Engineering Test Report No. 2201744-01		
Report Date	May 3, 2022	
Manufacturer Name	TouchTronics, Inc.	
Manufacturer Address	57315 Nagy Drive Elkhart, IN 46517	
Model No.	P1000-TK Hand-Held 4 Button Transmitter	
Date Received	April 27, 2022	
Test Dates	April 27, 2022 and April 28, 2022	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231(b) Innovation, Science, and Economic Development Canada, RSS-210 Innovation, Science, and Economic Development Canada, RSS-GEN	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature	MARK E. LONGINOTTI	
Tested by	Mark E. Longinotti	
Signature	Raymond J Klouda	
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	E0008692	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 and RSS-Gen test specification(s). The data presented in this test report pertains to the EUT on the test date(s) specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Table of Contents

1. Report Revision History 3
2. Introduction 4
2.1. Scope of Tests 4
2.2. Purpose 4
2.3. Identification of the EUT 4
3. Power Input 4
4. Grounding 4
5. Support Equipment 4
6. Interconnect Leads 4
7. Modifications Made to the EUT 4
8. Modes of Operation 5
9. Test Specifications 5
10. Test Plan 5
11. Deviation, Additions to, or Exclusions from Test Specifications 5
12. Laboratory Conditions 5
13. Summary 5
14. Sample Calculations 6
15. Statement of Conformity 6
16. Certification 6
17. Photographs of EUT 7
18. Block Diagram of Test Setup 9
19. Equipment List 10
20. Periodic Operation Measurements 11
21. Duty Cycle Factor Measurements 14
22. Spurious Radiated Emissions 18
23. Occupied Bandwidth Measurements 29
24. Scope of Accreditation 33

**This report shall not be reproduced, except in full,
without the written approval of Elite Electronic Engineering Inc.**

1. Report Revision History

Revision	Date	Description
–	3 MAY 2022	Initial Release of Engineering Test Report No. 2201744-01

2. Introduction

2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the TouchTronics, Inc. Hand-Held 4 Button Transmitter (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by TouchTronics, Inc. located in Elkhart, IN.

2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.231(b).

The test series was also performed to determine if the EUT meets the RF emission requirements of the Industry Canada Radio Standards Specification RSS-Gen and Industry Canada Radio Standards Specification RSS-210 for Transmitters.

Testing was performed in accordance with ANSI C63.10-2013.

2.3. Identification of the EUT

The EUT was identified as follows:

EUT Identification	
Product Description	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Frequency of Operation	433.9MHz
Modulation Type	On-Off Keying
Software/Firmware Version	V1.06
Field Strength of Fundamental	73.3dBuV/m (average)
Antenna Type	PC board trace
20dB Bandwidth	19.5kHz
99% Bandwidth	89.1kHz
Size of EUT	65mm x 46mm x 10mm

The EUT listed above was used throughout the test series.

3. Power Input

The EUT was powered by 3VDC from an internal CR2032 coin cell battery.

4. Grounding

The EUT was not connected to ground.

5. Support Equipment

No support equipment was submitted with the EUT.

6. Interconnect Leads

No interconnect leads were used during the tests.

7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

8. Modes of Operation

All tests were performed with EUT operating in the Transmit at 433.9MHz mode.

9. Test Specifications

The tests were performed to selected portions of, and in accordance with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 test specification(s).

- Federal Communications Commission “Code of Federal Regulations”, Title 47, Part 15, Subpart C
- ANSI C63.4-2014, “American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz”
- ANSI C63.10-2013, “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
- RSS-210 Issue 10, December 2019, “License-Exempt Radio Apparatus: Category I Equipment”
- RSS-Gen Issue 5, March 2019, Amendment 1, February 2021, Amendment 2, Innovation, Science, and Economic Development Canada, “Spectrum Management and Telecommunications, Radio Standards Specification, General Requirements for Compliance of Radio Apparatus”

10. Test Plan

No test plan was provided. Instructions were provided by personnel from TouchTronics, Inc. and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210, and ANSI C63.10-2013 specifications.

11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

12. Laboratory Conditions

Ambient Parameters	Value
Temperature	23°C
Relative Humidity	18%
Atmospheric Pressure	1020mb

13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Requirements	Test Methods	S/N	Results
Periodic Operation Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	#1	Conforms
Duty Cycle Factor Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	#1	N/A
Spurious Radiated Emissions	FCC 15C ISED RSS-210	ANSI C63.10: 2013	#1	Conforms
Occupied Bandwidth Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	#1	Conforms

14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

Formula 1: VL (dBuV) = MTR (dBuV) + CF (dB).

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

Formula 1: FS (dBuV/m) = MTR (dBuV) + AF (dB/m) + CF (dB) + (- PA (dB)) + DC (dB)

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

Formula 2: FS (uV/m) = AntiLog [(FS (dBuV/m))/20]

15. Statement of Conformity

The TouchTronics, Inc. Hand-Held 4 Button Transmitter, Model No. P1000-TK, Serial No. #1, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231(b) and Innovation, Science, and Economic Development Canada, RSS-210.

16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

17. Photographs of EUT

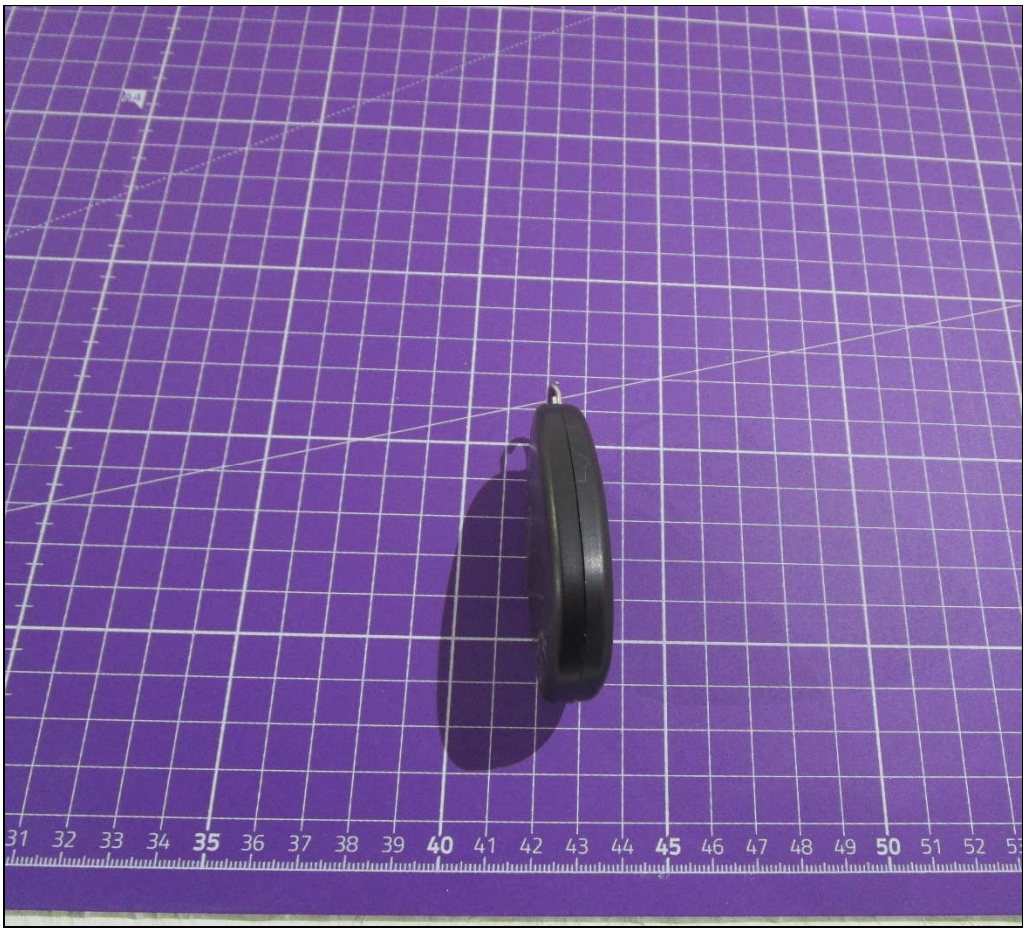
31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52

18. Block Diagram of Test Setup

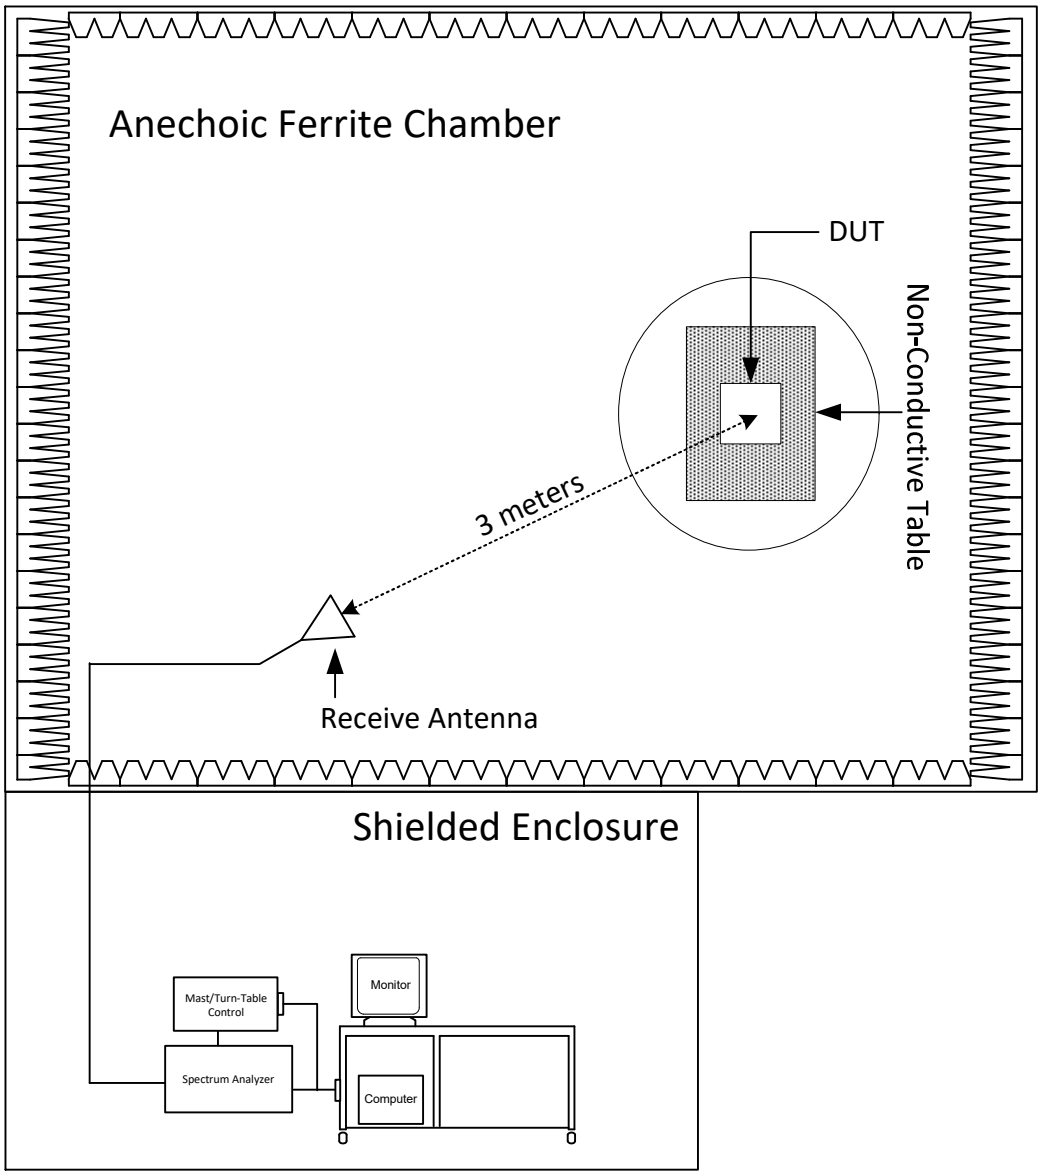

Radiated Measurements Test Setup

19. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10-12	PL2924	1GHZ-20GHZ	3/9/2022	3/9/2023
CDZ4	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
NLW2	MAGNETIC FIELD PROBE	ELECTRO-METRICS	MFC-25	---	20MHZ-230MHZ	NOTE 1	
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	10/5/2020	10/5/2022
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	4/28/2020	5/28/2022
RBG3	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101592	2HZ-44GHZ	4/7/2022	4/7/2023
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	
XPQ7	HIGH PASS FILTER	K&L MICROWAVE	4IH30-1804/T10000-0	5	1.8-10GHZ	2/3/2021	2/3/2023

N/A: Not Applicable I/O: Initial Only CNR: Calibration Not Required
NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

20. Periodic Operation Measurements

Test Information	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
Serial No	#1
Mode	Transmit at 433.9MHz
Test Date	April 28, 2022

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber or Shielded Enclosure
Test site used	Room 21
Note	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
FCC 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. RSS-210, Annex A, Section A.1.1: A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.

Procedures
A near field antenna was placed in close proximity to the EUT. The output of the antenna was connected to a spectrum analyzer. The following settings were selected on the spectrum analyzer:

1) Center frequency = transmit frequency of EUT
2) Span = 0 Hz
3) Sweep Time = 5 seconds
4) Trigger Level = Approximately 10dB to 20dB below the peak of the transmit signal
5) Sweep = Single Sweep

The transmit button on the EUT was depressed and immediately released. A plot of the transmitted signal was captured to ensure that the EUT ceased operation within 5 seconds.

Test Details	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Mode	Transmit at 433.9MHz
Parameters	Periodic Operation
Notes	

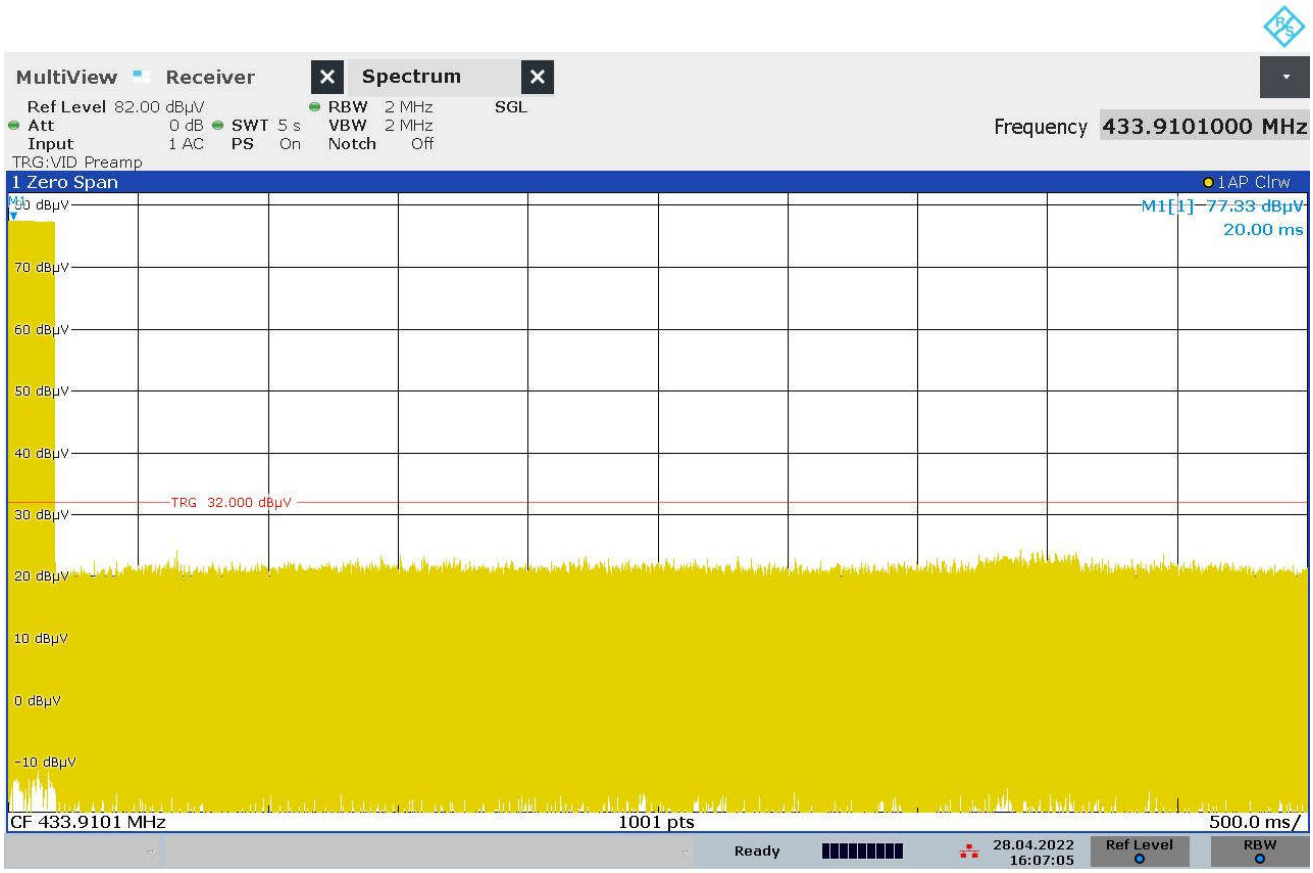

16:07:06 28.04.2022

21. Duty Cycle Factor Measurements

Test Information	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
Serial No	#1
Mode	Transmit at 433.9MHz
Test Date	April 27, 2022

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 21
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Procedures
The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal. The following procedure was used to measure a representative sample: 1) With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. 2) The pulse width is measured, and a plot of this measurement is recorded. 3) Next the number of pulses in the word period is measured and a plot is recorded. 4) Finally, the length of the word period is measured, and a third plot is recorded. If the word period exceeds 100msec, the word period is limited to 100msec. 5) The pulse width and number of pulses for the word period are used to compute the on-time. The duty cycle is then computed as the (on-time/ word period). 6) The duty cycle factor is computed from the duty cycle.

Test Details	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Mode	Transmit at 433.9MHz
Parameters	Short Pulses = 200usec
Notes	None

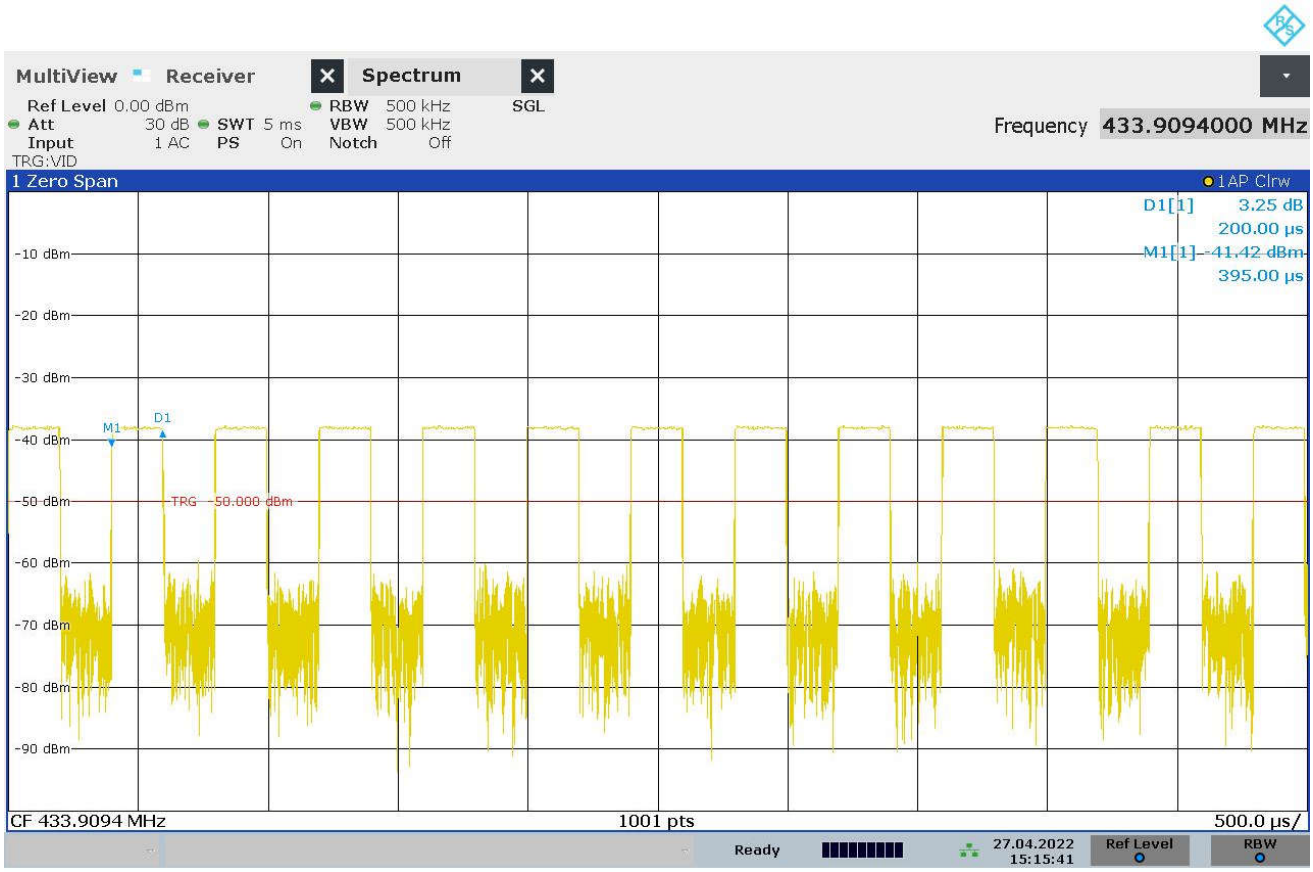

15:15:42 27.04.2022

Test Details	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
S/N	#1
Model No.	P1000-TK
Mode	Transmit at 433.9MHz
Parameters	Long Pulse = 405usec
Notes	None

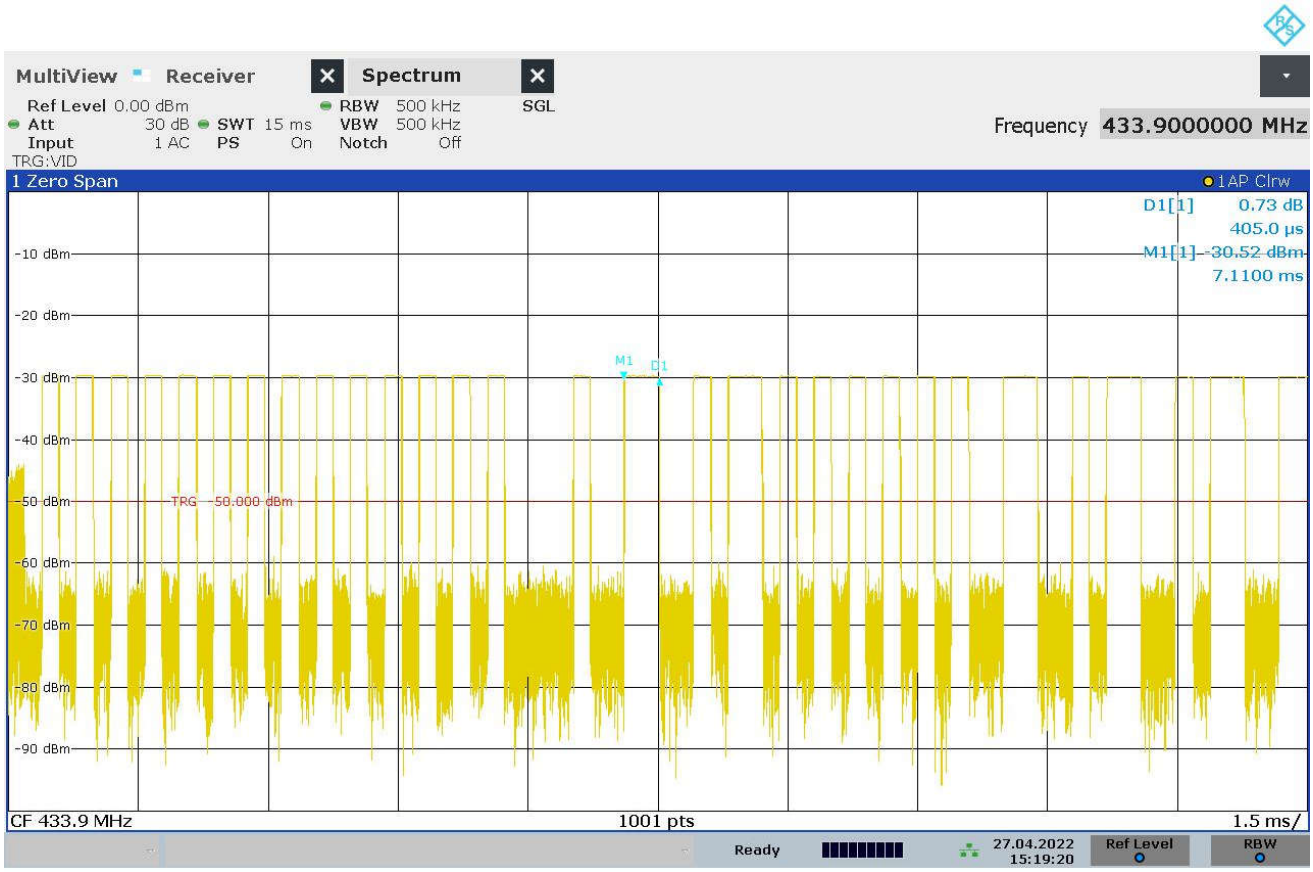

15:19:20 27.04.2022

Test Details	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Mode	Transmit at 433.9MHz
Parameters	Duty Cycle = (On-Time)/100msec = ((# short pulses x 200usec) + (long pulses x 405usec))/100msec = ((155 x 200usec) + (45 x 405usec))/100msec = 0.492
Notes	None

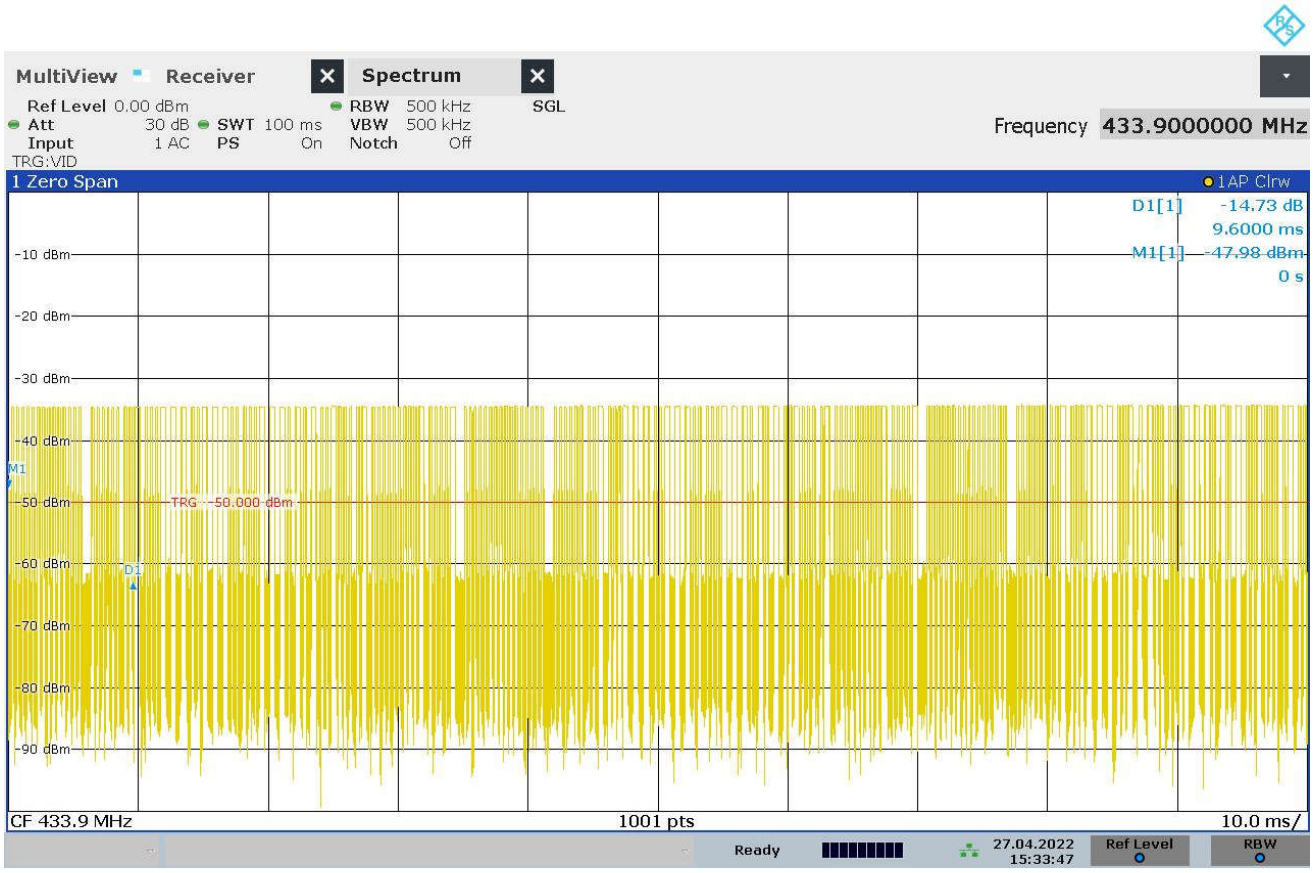

15:33:47 27.04.2022

$$\text{Duty Cycle Factor} = 20\log\left(\frac{0.492}{(100\text{msec})}\right) = -6.15\text{dB}$$

22. Spurious Radiated Emissions

Test Information	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
Serial No	#1
Mode	Transmit at 433.9MHz
Test Date	April 28, 2022

Test Setup Details	
Setup Format	Tabletop or Floor Standing
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 21
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements		
The EUT must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq. as well as the requirements of the RSS-GEN specification Section 8.10.		
Carrier Frequency (MHz)	Field Strength of Carrier (µV/m)	Field Strength of Spurious Emissions (µV/m)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750*	125 to 375*
174-260	3750	375
260-470	3750 to 12500*	375 to 1250*
Above 470	12500	1250

*Linear interpolations

Procedures
All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads. A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 4.5GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity. The final emission tests were then manually performed over the frequency range of 30MHz to 4.5GHz. Between 30MHz and 1000MHz, a bi-log antenna was used as the pick-up device. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer. Above 1GHz, a broadband double ridged waveguide antenna was used as the pick-up device. The EUT was placed on an 150cm high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer. The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train. To ensure that maximum or worst case, emission levels were measured, the following steps were taken: 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna. 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured. 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings. 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

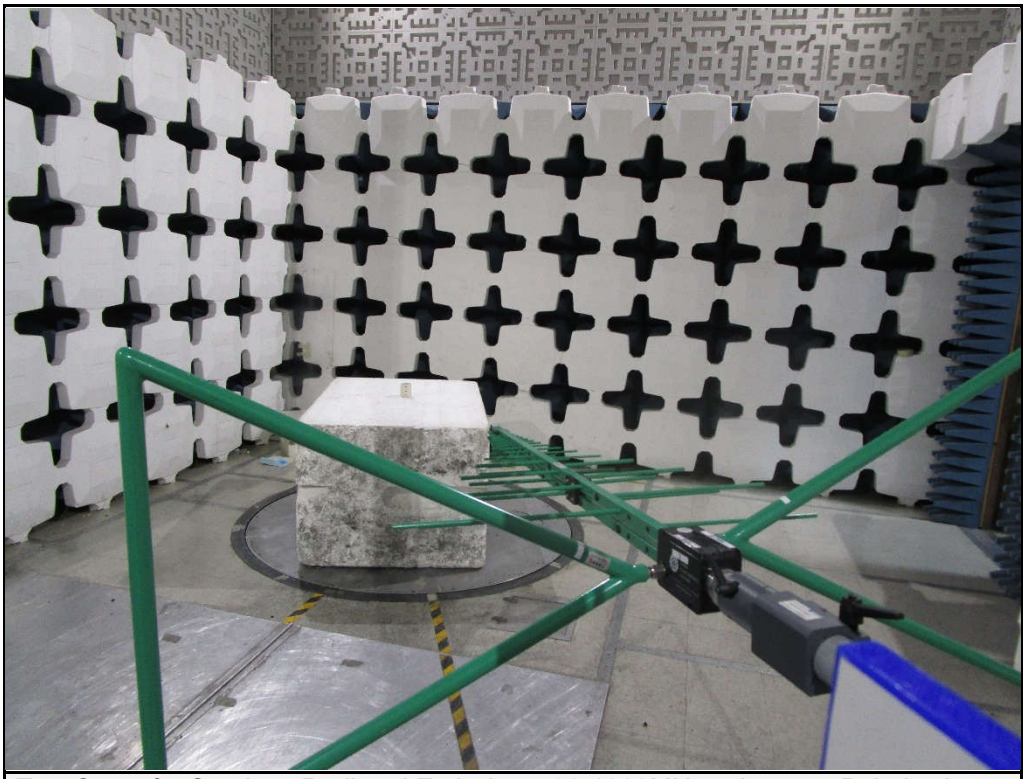

Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Horizontal

Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Vertical

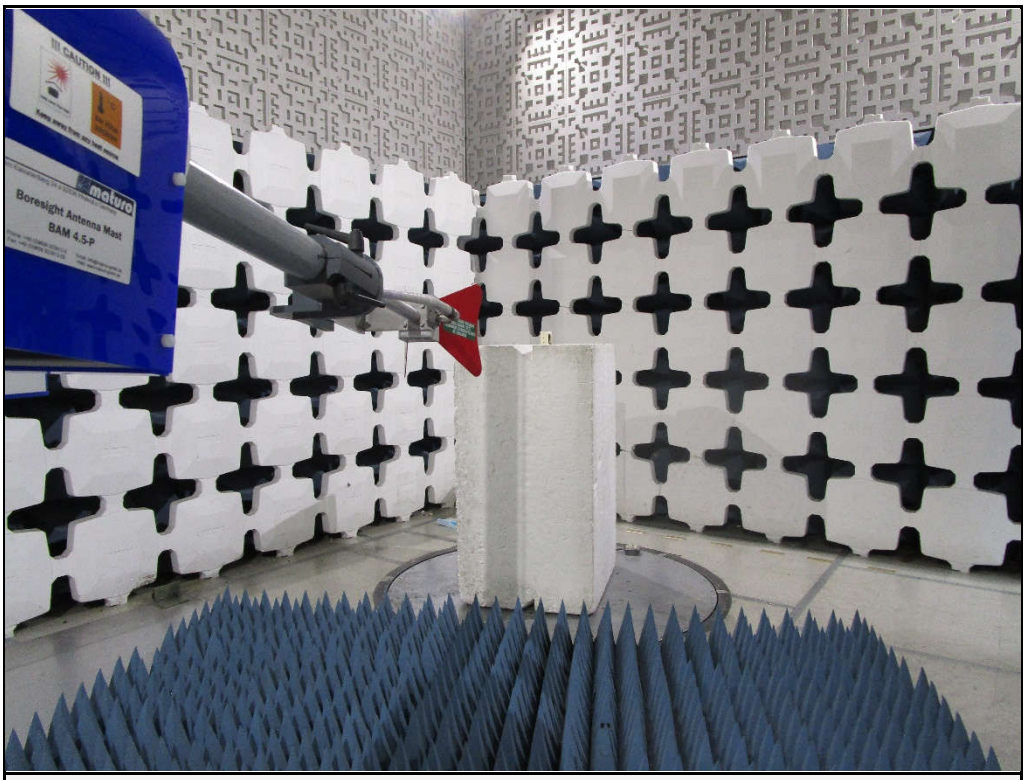

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization Horizontal

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization Vertical

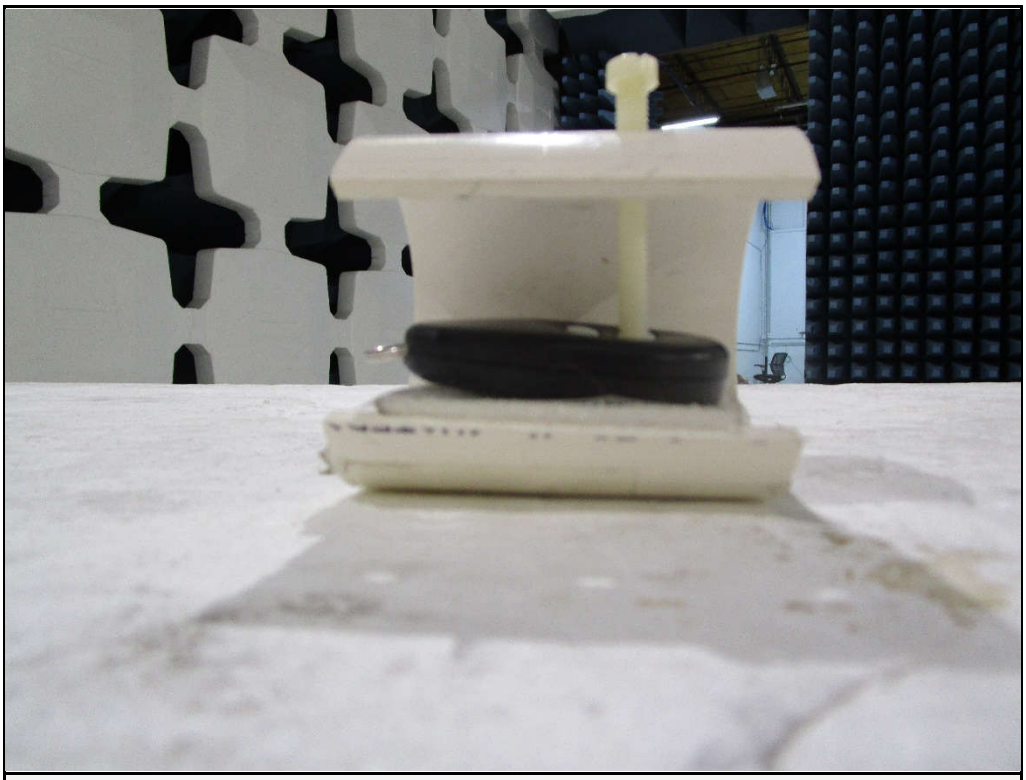

Test Setup for Spurious Radiated Emissions, EUT Oriented in the X-Axis

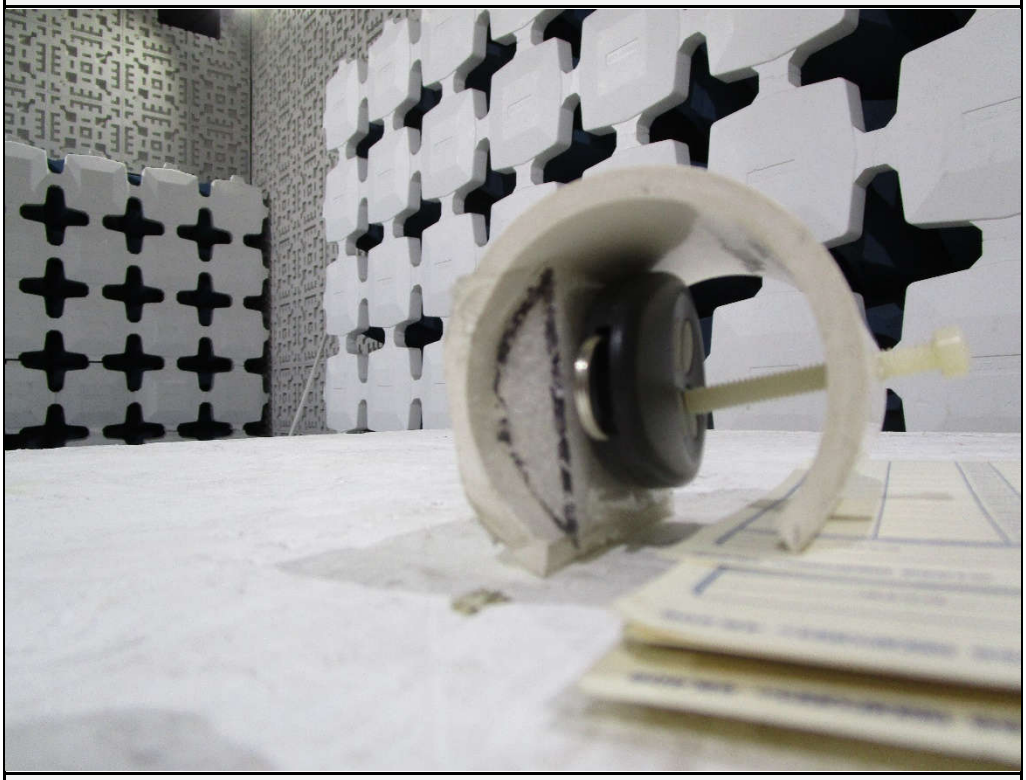

Test Setup for Spurious Radiated Emissions, EUT Oriented in the Y-Axis

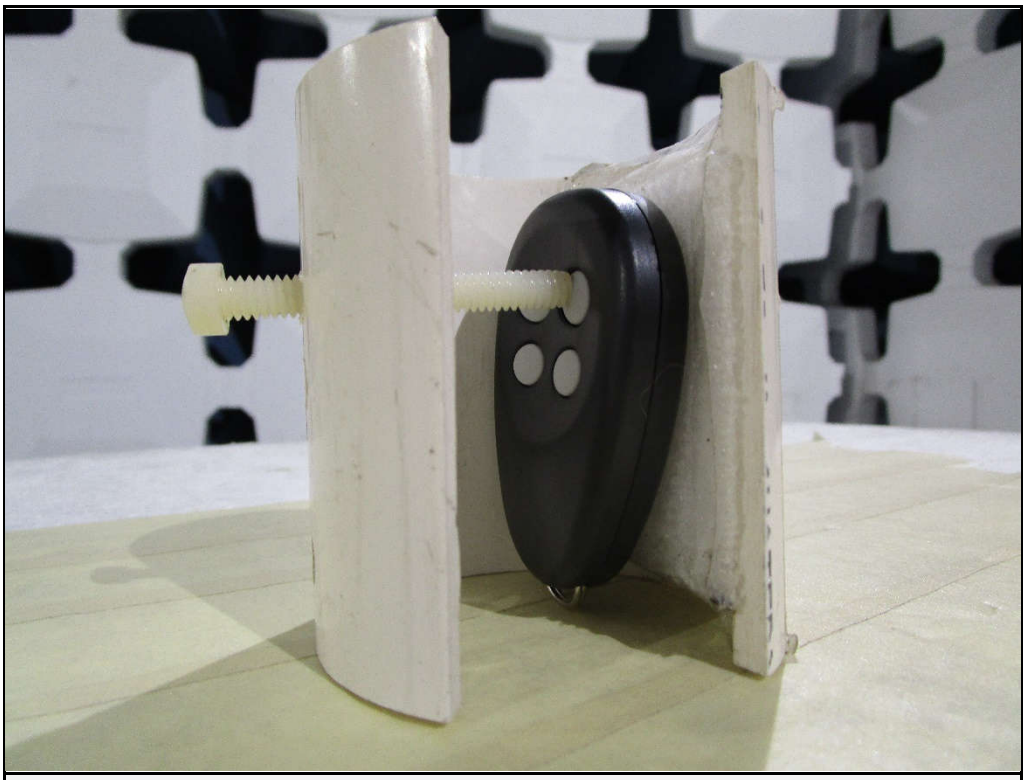

Test Setup for Spurious Radiated Emissions, EUT Oriented in the Z-Axis

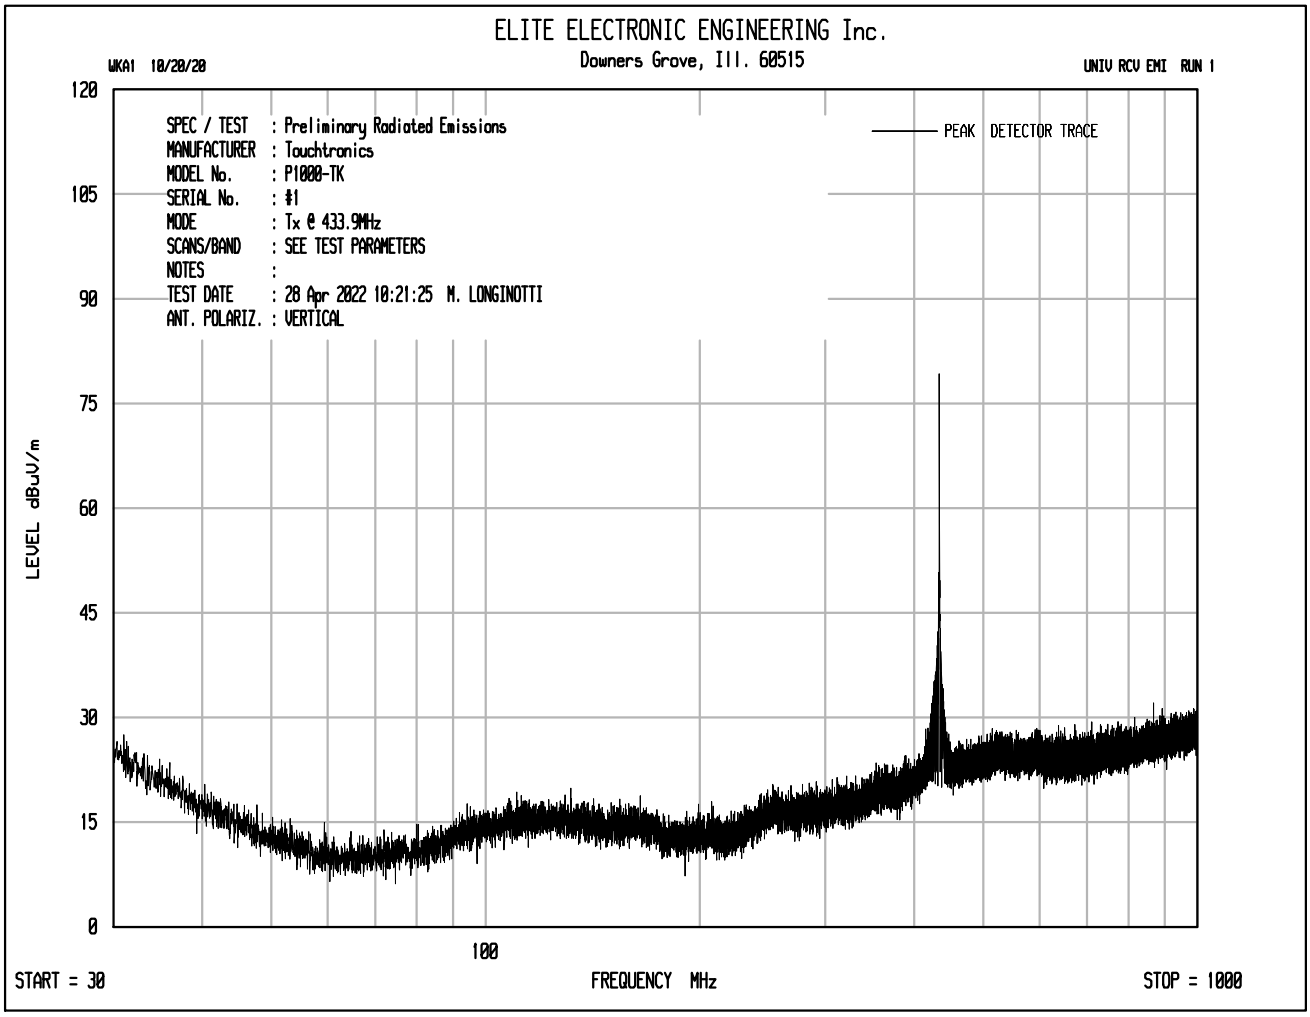
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 10/20/20
UNIV RCV EMI RUN 1
SPEC / TEST : Preliminary Radiated Emissions
MANUFACTURER : Touchtronics
MODEL No. : P1000-TK
SERIAL No. : #1
MODE : Tx @ 433.9MHz
SCANS/BAND : SEE TEST PARAMETERS
NOTES :
TEST DATE : 28 Apr 2022 10:21:25 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

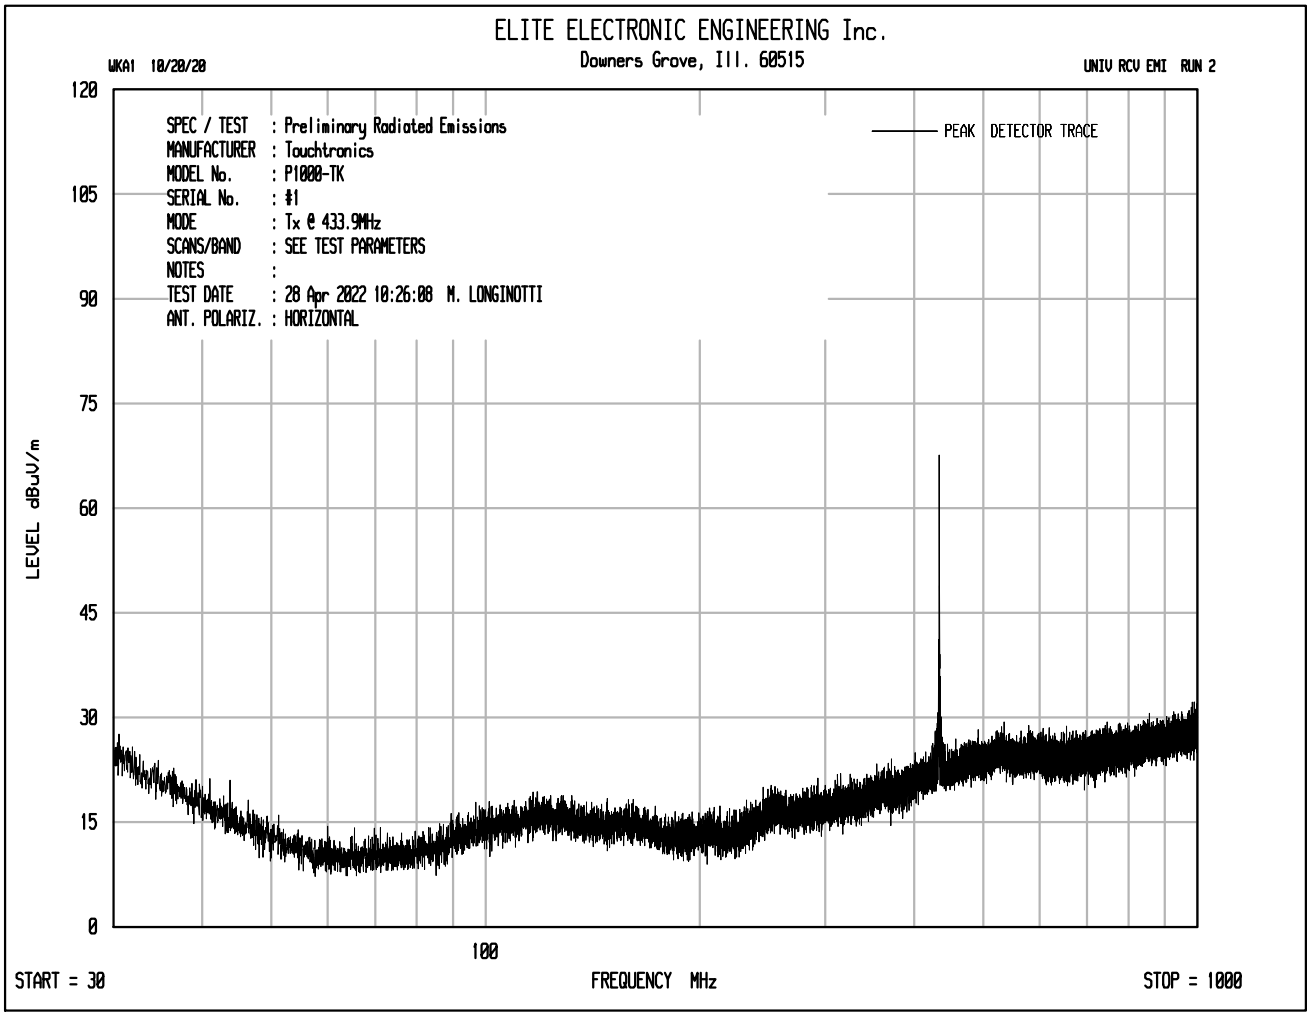
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 10/20/20
UNIV RCV EMI RUN 2
SPEC / TEST : Preliminary Radiated Emissions
MANUFACTURER : Touchtronics
MODEL No. : P1000-TK
SERIAL No. : #1
MODE : Tx @ 433.9MHz
SCANS/BAND : SEE TEST PARAMETERS
NOTES :
TEST DATE : 28 Apr 2022 10:26:08 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

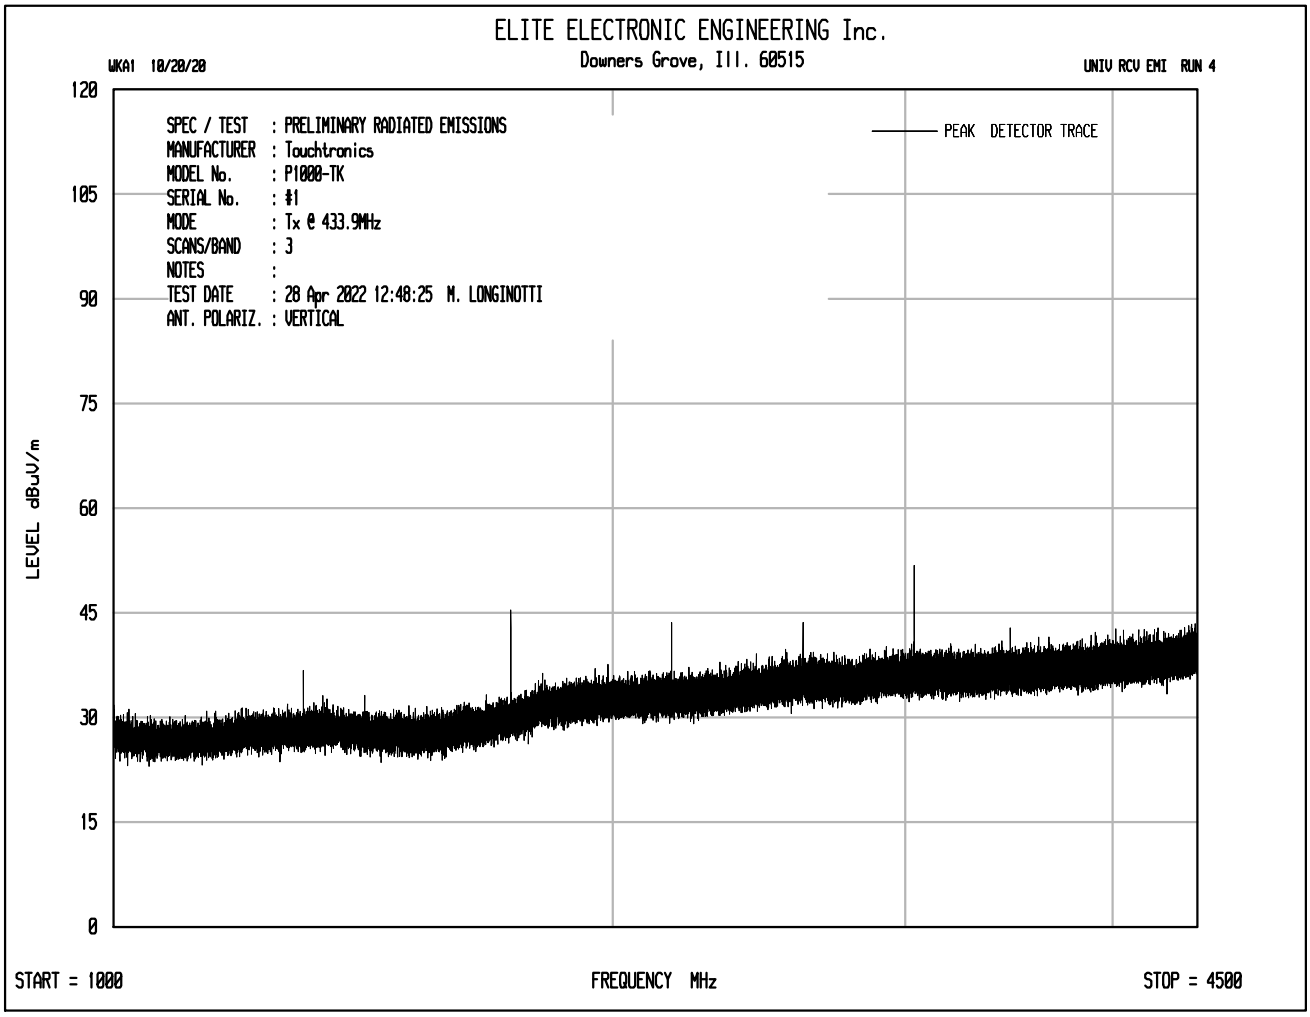
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 10/20/20
UNIV RCV EMI RUN 4
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : Touchtronics
MODEL No. : P1000-TK
SERIAL No. : #1
MODE : Tx @ 433.9MHz
SCANS/BAND : 3
NOTES :
TEST DATE : 28 Apr 2022 12:48:25 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 1000
FREQUENCY MHz
STOP = 4500

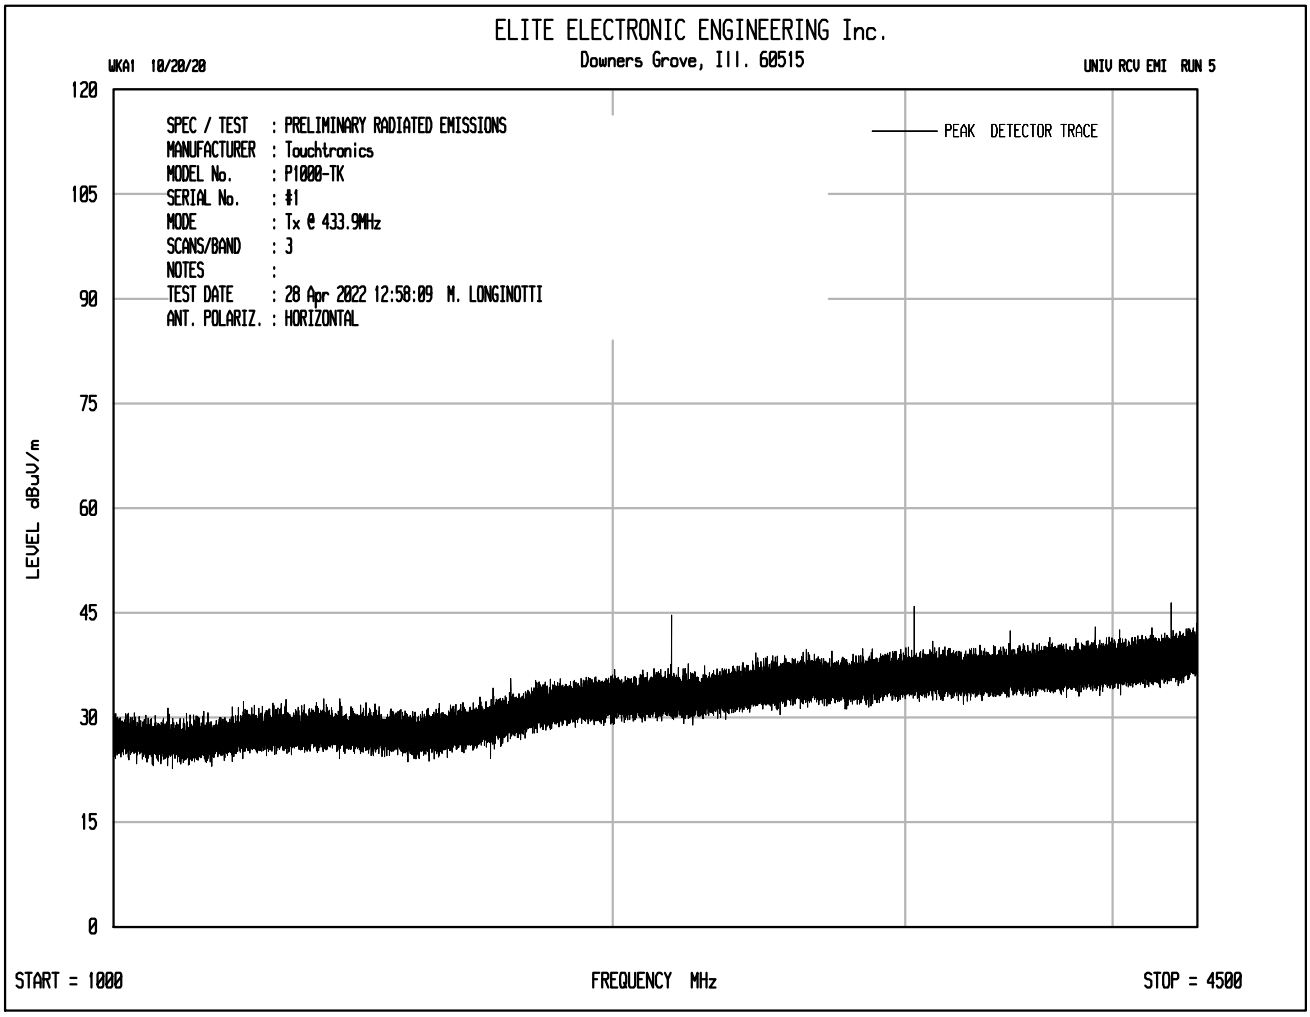
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 10/20/20
UNIV RCV EMI RUN 5
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : Touchtronics
MODEL No. : P1000-TK
SERIAL No. : #1
MODE : Tx @ 433.9MHz
SCANS/BAND : 3
NOTES :
TEST DATE : 28 Apr 2022 12:58:09 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 1000
FREQUENCY MHz
STOP = 4500

Test Details	
Manufacturer	TouchTronics, Inc.
Model	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Mode	Transmit at 433.9MHz
Requirements	Field Strength of Carrier Limit = 10996.4µV/m
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
433.914	H	43.9		1.4	22.5	0.0	-6.2	61.7	1209.8	10996.4	-19.2
433.914	V	55.5		1.4	22.5	0.0	-6.2	73.3	4599.7	10996.4	-7.6
867.828	H	5.3		2.0	26.3	0.0	-6.2	27.5	23.7	1099.6	-33.3
867.828	V	7.1		2.0	26.3	0.0	-6.2	29.3	29.1	1099.6	-31.5
1301.742	H	14.8		2.5	28.7	0.0	-6.2	39.9	98.5	500.0	-14.1
1301.742	V	16.8		2.5	28.7	0.0	-6.2	41.9	124.0	500.0	-12.1
1735.656	H	15.5		2.9	29.9	0.0	-6.2	42.1	127.9	1099.6	-18.7
1735.656	V	21.3		2.9	29.9	0.0	-6.2	47.9	249.3	1099.6	-12.9
2169.570	H	18.1		3.2	31.8	0.0	-6.2	47.0	223.5	1099.6	-13.8
2169.570	V	17.3		3.2	31.8	0.0	-6.2	46.2	203.9	1099.6	-14.6
2603.484	H	17.4		3.6	32.6	0.0	-6.2	47.5	236.5	1099.6	-13.3
2603.484	V	18.5		3.6	32.6	0.0	-6.2	48.6	268.5	1099.6	-12.2
3037.398	H	18.6		3.9	33.1	0.0	-6.2	49.5	298.7	1099.6	-11.3
3037.398	V	23.4		3.9	33.1	0.0	-6.2	54.3	519.1	1099.6	-6.5
3471.312	H	17.7		4.2	33.2	0.0	-6.2	48.9	278.6	1099.6	-11.9
3471.312	V	18.6		4.2	33.2	0.0	-6.2	49.8	309.0	1099.6	-11.0
3905.226	H	53.3		4.4	33.5	-40.1	-6.2	45.0	178.1	500.0	-9.0
3905.226	V	53.6		4.4	33.5	-40.1	-6.2	45.3	184.3	500.0	-8.7
4339.140	H	53.4		4.6	33.9	-40.1	-6.2	45.7	192.6	500.0	-8.3
4339.140	V	54.0		4.6	33.9	-40.1	-6.2	46.3	206.4	500.0	-7.7

23. Occupied Bandwidth Measurements

Test Information	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
Serial No	#1
Mode	Transmit at 433.9MHz
Test Date	April 27, 2022 and April 28, 2022

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 21
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
FCC 15.231(c): The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. RSS-210, Annex A, Section A.1.3: The occupied bandwidth (99% Bandwidth) of momentarily operated devices shall be less than or equal to 0.25% of the center frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the occupied bandwidth shall be less than or equal to 0.5% of the center frequency.

Procedures
The EUT was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 3kHz, and span was set to 1.5MHz. A screen capture was taken of the frequency spectrum near the carrier using a screen dump function on the spectrum analyzer.

Test Details	
Manufacturer	TouchTronics, Inc.
Product	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Mode	Transmit at 433.9MHz
Parameters	20dB BW = 19.5kHz
Notes	Vertical Lines V1 and V2 represent the 20dB frequency limits of 0.25% of the center frequency.

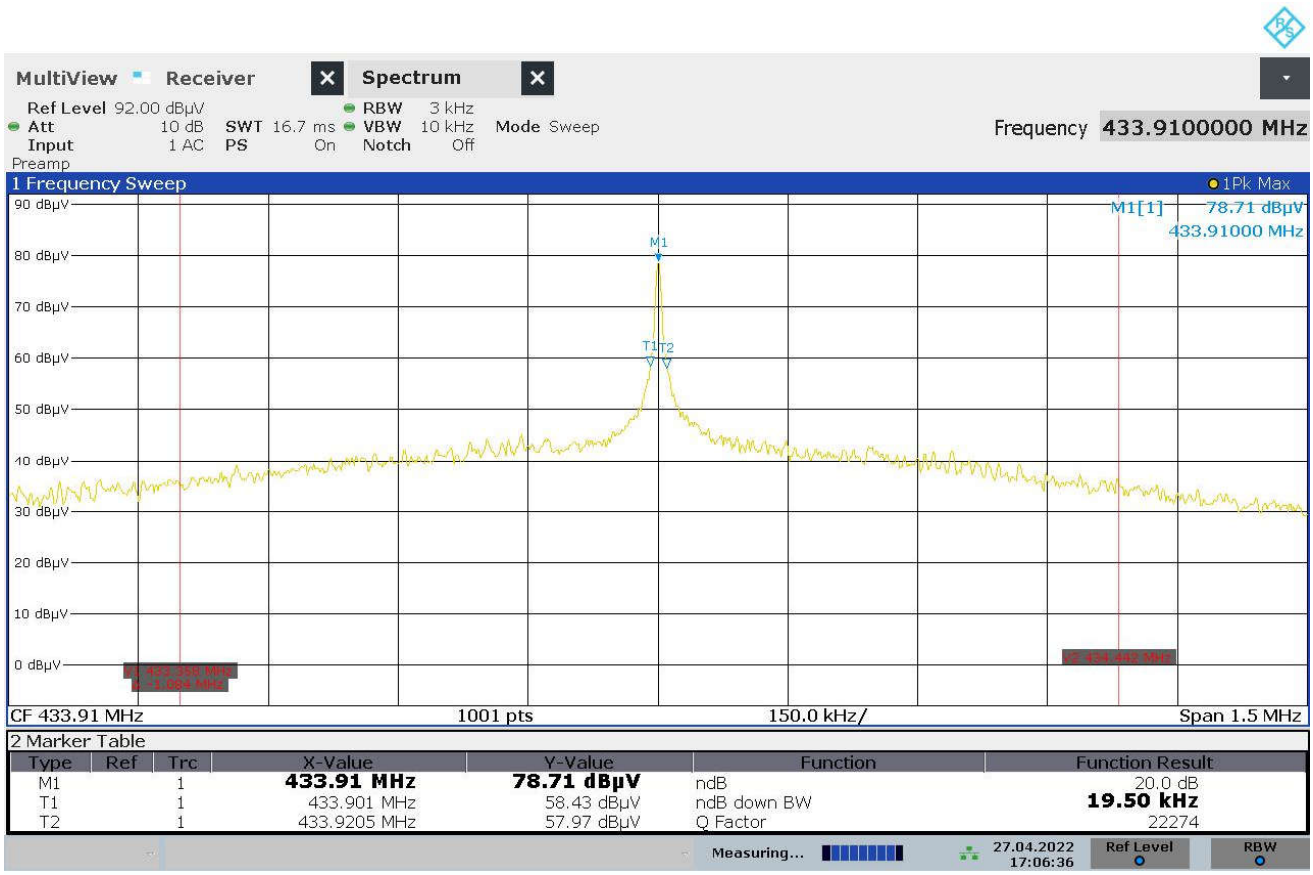

17:06:37 27.04.2022

Test Details	
Manufacturer	TouchTronics, Inc.
Model	Hand-Held 4 Button Transmitter
Model No.	P1000-TK
S/N	#1
Mode	Transmit at 433.9MHz
Parameters	99% BW = 89.1kHz
Notes	None

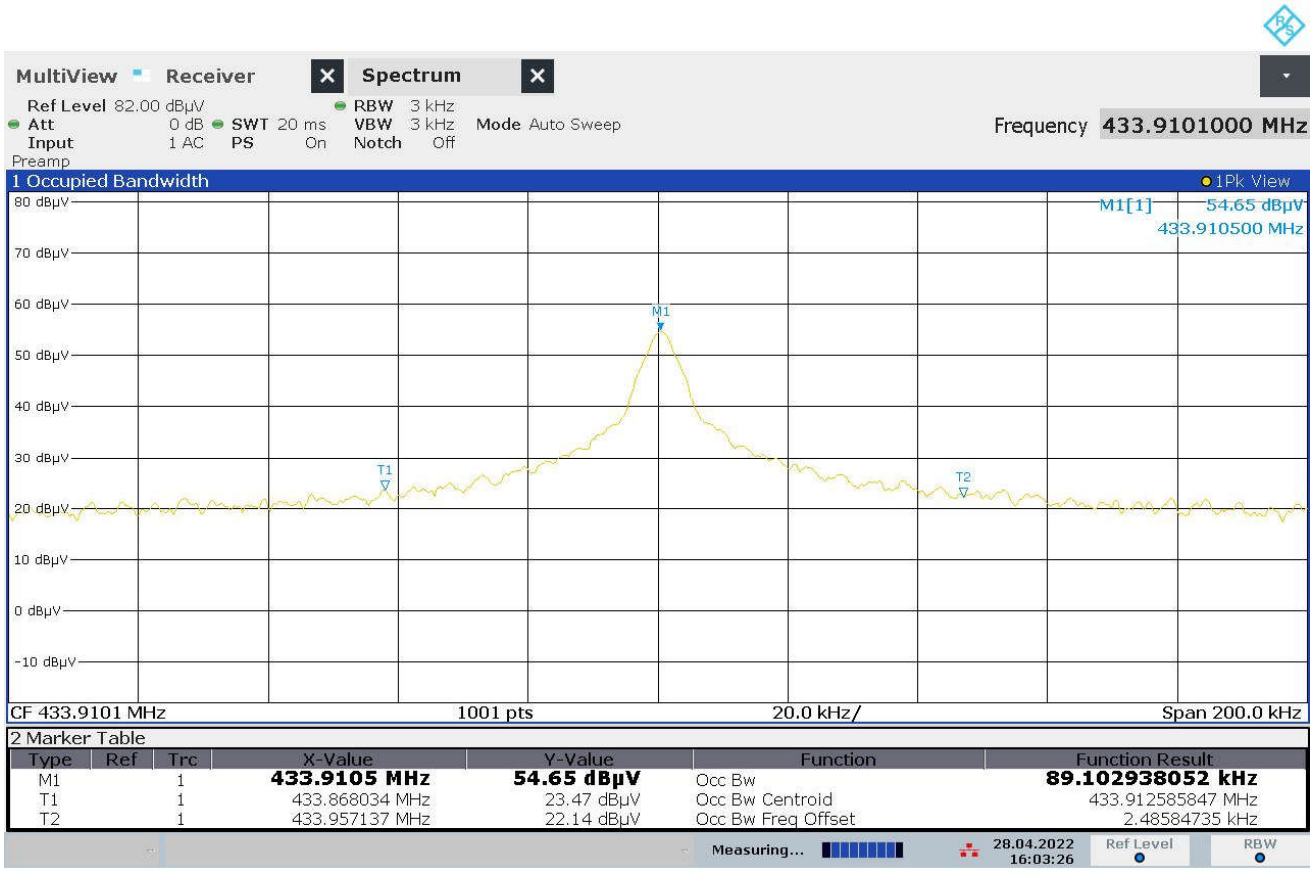

16:03:27 28.04.2022

24. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.
1516 Centre Circle
Downers Grove, IL 60515
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168
Email: rbugielski@elitetest.com
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112
Email: cfanning@elitetest.com
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163
Email: blugo@elitetest.com
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123
Email: reking@elitetest.com
Website: www.elitetest.com

ELECTRICAL

Valid To: June 30, 2023 Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:	Test Method(s) [1]:
Transient Immunity	ISO 7637-2 (including emissions); ISO 7637-3; ISO 16750-2:2012, Sections 4.6.3 and 4.6.4; CS-11979, Section 6.4; CS.00054, Section 5.9; EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222); GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12; ECE Regulation 10.06 Annex 10
Electrostatic Discharge (ESD)	ISO 10605 (2001, 2008); CS-11979 Section 7.0; CS.00054, Section 5.10; EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13; GMW 3097 Section 3.6
Conducted Emissions	CISPR 25 (2002, 2008), Sections 6.2 and 6.3; CISPR 25 (2016), Sections 6.3 and 6.4; CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2; GMW 3097, Section 3.3.2; EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)
Radiated Emissions Anechoic	CISPR 25 (2002, 2008), Section 6.4; CISPR 25 (2016), Section 6.5; CS-11979, Section 5.3; CS.00054, Section 5.6.3; GMW 3097, Section 3.3.1; EMC-CS-2009.1 (RE 310); FMC1278 (RE310); ECE Regulation 10.06 Annex 7 (Broadband) ECE Regulation 10.06 Annex 8 (Narrowband)

5202 Presidents Court, Suite 220 | Frederick, MD 21703-8515 | Phone: 301 644 3248 | Fax: 240 454 9449 | www.A2LA.org

Test Technology:	Test Method(s) [1]:
Vehicle Radiated Emissions	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
Bulk Current Injection (BCI)	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
Radiated Immunity Anechoic *(Including Radar Pulse)*	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
Radiated Immunity Magnetic Field	ISO 11452-8
Radiated Immunity Reverb	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
Radiated Immunity *(Portable Transmitters)*	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
Vehicle Radiated Immunity (ALSE)	ISO 11451-2; ECE Regulation 10.06 Annex 6
Vehicle Product Specific EMC Standards	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
Electrical Loads	ISO 16750-2
Emissions Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
Cellular Radiated Spurious Emissions	ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134 124 UMTS; 3GPP TS 34.124; ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

Test Technology:	Test Method(s) [1]:
Emissions (cont'd)	
Current Harmonics	IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11
Flicker and Fluctuations	IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12
Immunity	
Electrostatic Discharge	IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001
Radiated Immunity	IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004
Electrical Fast Transient/Burst	IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15
Surge	IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16
Conducted Immunity	IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

Test Technology:	Test Method(s) [1]:
Immunity (cont'd)	
Power Frequency Magnetic Field Immunity (*Down to 3 A/m*)	IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8
Voltage Dips, Short Interrupts, and Line Voltage Variations	IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11
Ring Wave	IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002
Generic and Product Specific EMC Standards	IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2
TxRx EMC Requirements	EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20
European Radio Test Standards	ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

Test Technology:	Test Method(s) [1]:
Canadian Radio Tests	RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN
Mexico Radio Tests	IFT-008-2015; NOM-208-SCFI-2016
Japan Radio Tests	Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18
Taiwan Radio Tests	LP-0002 (July 15, 2020)
Australia/New Zealand Radio Tests	AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)
Hong Kong Radio Tests	HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073
Korean Radio Test Standards	KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129
Vietnam Radio Test Standards	QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020//BTTTT
Vietnam EMC Test Standards	QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT
Unlicensed Radio Frequency Devices *(3 Meter Semi-Anechoic Room)*	47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANSI C63.10:2013, ANSI C63.17:2013 and FCC KDB 905462 D02 (v02))
Licensed Radio Service Equipment	47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANSI C63.26:2015)

Test Technology:	Test Method(s) [1]:
OTA (Over the Air) Performance GSM, GPRS, EGPRS UMTS (W-CDMA) LTE including CAT M1 A-GPS for UMTS/GSM LTS A-GPS, A-GLONASS, STB8/STB16 Large Device/Laptop/Tablet Testing Integrated Device Testing WiFi 802.11 a/b/g/n/a	CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2; CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0
Electrical Measurements and Simulation AC Voltage / Current (1mV to 5kV) 60 Hz (0.1V to 250V) up to 500 MHz (1µA to 150A) 60 Hz DC Voltage / Current (1mV to 15-kV) / (1µA to 10A) Power Factor / Efficiency / Crest Factor (Power to 30kW) Resistance (1mΩ to 4000MΩ) Surge (Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)	 FAA AC 150/5345-10H FAA AC 150/5345-43J FAA AC 150/5345-44K FAA AC 150/5345-46E FAA AC 150/5345-47C FAA EB 67D

On the following products and materials:
Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

[1] When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA *R101 - General Requirements - Accreditation of ISO-IEC 17025 Laboratories*.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1 [2]

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
Unintentional Radiators Part 15B	ANSI C63.4:2014	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1[2]

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
Industrial, Scientific, and Medical Equipment Part 18	FCC MP-5 (February 1986)	40000
Intentional Radiators Part 15C	ANSI C63.10:2013	40000
Unlicensed Personal Communication Systems Devices Part 15D	ANSI C63.17:2013	40000
U-NII without DFS Intentional Radiators Part 15E	ANSI C63.10:2013	40000
U-NII with DFS Intentional Radiators Part 15E	FCC KDB 905462 D02 (v02)	40000
UWB Intentional Radiators Part 15F	ANSI C63.10:2013	40000
BPL Intentional Radiators Part 15G	ANSI C63.10:2013	40000
White Space Device Intentional Radiators Part 15H	ANSI C63.10:2013	40000
Commercial Mobile Services (FCC Licensed Radio Service Equipment) Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
General Mobile Radio Services (FCC Licensed Radio Service Equipment) Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment) Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1[2]

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
Maritime and Aviation Radio Services		
Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
Microwave and Millimeter Bands Radio Services		
Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
Broadcast Radio Services		
Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
Signal Boosters		
Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

[2] Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (https://apps.fcc.gov/oetcf/eas/) for a listing of FCC approved laboratories.

Accredited Laboratory

A2LA has accredited

ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories.* This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (*refer to joint ISO-ILAC-IAF Communiqué dated April 2017*).

Presented this 19th day of May 2021.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 1786.01
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.