

FCC PART 15 CLASS B
EMI MEASUREMENT AND TEST REPORT
FOR

PREMIO COMPUTER, INC.

938 Radecki Court,
City of Industry, CA 91748

Model: PREMIODTP6E

July 17, 1998

This Report Concerns: ☒ Original Report	Equipment Type: Pentium® II Desktop System - Personal Computer, ITE
Test Engineer: Thomas Huang	
Test Date: July 14, 1998	
Certified By:  John Y. Chan - Director, Compliance Engineering	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street, Suite 2 Sunnyvale, CA 94086 (408) 732-9162	

Note: This report may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE.....	4
1.3 RELATED SUBMITTAL(S)/GRANT(S)	4
1.4 TEST METHODOLOGY.....	4
1.5 TEST FACILITY.....	5
1.6 TEST EQUIPMENT LIST	5
1.7 EQUIPMENT UNDER TEST (EUT)	6
1.8 EUT CONFIGURATION LIST DETAILS	6
1.9 SUPPORT EQUIPMENT.....	6
1.10 EXTERNAL I/O CABLING	6
2 - SYSTEM TEST CONFIGURATION.....	7
2.1 JUSTIFICATION.....	7
2.2 EUT EXERCISE SOFTWARE.....	7
2.3 SPECIAL ACCESSORIES	7
2.4 BLOCK DIAGRAM.....	8
2.5 CONFIGURATION OF TEST SYSTEM.....	9
2.6 TEST SETUP BLOCK DIAGRAM.....	10
2.7 EQUIPMENT MODIFICATIONS	11
3 - CONDUCTED EMISSIONS TEST DATA	12
3.1 MEASUREMENT UNCERTAINTY.....	12
3.2 EUT SETUP	12
3.3 SPECTRUM ANALYZER SETUP.....	12
3.4 TEST PROCEDURE	12
3.5 SUMMARY OF TEST RESULTS.....	13
3.6 CONDUCTED EMISSIONS TEST DATA.....	13
3.7 PLOT OF CONDUCTED EMISSIONS TEST DATA	13
4 - RADIATED EMISSION DATA	14
4.1 MEASUREMENT UNCERTAINTY.....	14
4.2 EUT SETUP	14
4.3 SPECTRUM ANALYZER SETUP.....	14
4.4 TEST PROCEDURE	15
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.6 SUMMARY OF TEST RESULTS.....	15
4.7 RADIATED EMISSIONS TEST RESULT DATA	16
5 - FCC PRODUCT LABELING AND WARNING STATEMENT.....	18
5.1 PROPOSED FCC LABEL FORMAT	18
5.2 PROPOSED LABEL LOCATION ON EUT	18
5.3 FCC WARNING STATEMENT.....	18
6 - CONDUCTED AND RADIATED SETUP PHOTOGRAPHS.....	19
6.1 CONDUCTED EMISSION PHOTOGRAPH – FRONT VIEW	19
6.2 CONDUCTED EMISSION PHOTOGRAPH – REAR VIEW.....	20
6.3 RADIATED EMISSION PHOTOGRAPH – FRONT VIEW	21
6.4 RADIATED EMISSION PHOTOGRAPH – REAR VIEW.....	22
7 – EUT PHOTOGRAPHS	23
7.1 EUT - FRONT VIEW	23
7.2 EUT - REAR VIEW	24
7.3 EUT – INSIDE FRONT BEZEL	25
7.4 EUT – LEFT SIDE VIEW WITH COVER REMOVED	26
7.5 POWER SUPPLY - SIDE VIEW WITH LABEL.....	27
7.6 POWER SUPPLY - COVER REMOVED, COMPONENT VIEW	28

7.7 POWER SUPPLY – CIRCUIT VIEW	29
7.8 MOTHERBOARD - COMPONENT VIEW.....	30
7.9 MOTHERBOARD - CIRCUIT VIEW	31
7.10 VGA ADAPTER - COMPONENT VIEW	32
7.11 VGA ADAPTER - CIRCUIT VIEW	33
APPENDIX A – EUT BLOCK DIAGRAM (NOT AVAILABLE AT TIME OF TEST).....	34
APPENDIX B – PLOT OF CONDUCTED EMISSION TEST DATA	35
APPENDIX C – USER MANUAL.....	36

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *PREMIO COMPUTER, Inc.*, model PREMIODTP6E or the "EUT" as referred to in this report is a Desktop personal computer measuring 12.0"L x 10.0"W, which features the Premio Computer PREMIO 212G Motherboard. The system board utilizes the Intel 82440BX AGP chipset with Ultra I/O controller.

- The four-layered motherboard supports Intel Pentium® II processors from 233 to 500 MHz with integrated VRM, and is provided with a frequency synthesizer chip for CPU clock selection. The motherboard conforms to the Intel ATX form factor footprint. It has on-board support for four IDE hard drives, one floppy drives, one parallel port, two serial ports, two USB ports, PS/2 mouse and keyboard connectors.
- Other Motherboard features include Mode 0-4 PCI IDE; 3.3V unbuffered EDO (Extended Data Output) and SDRAM memory. Cache support for 512K in CPU support.
- Peripheral expansion capability includes five (5) 32-bit PCI slots, two (2) 16-bit ISA slots (one (1) shared PCI/ISA slot), one AGP slot, and four (4) 168-pin DIMM memory socket.
- The EUT also includes a Desktop chassis with plastic front bezel. The Desktop chassis provides for eight (8) half-height bays (three (3) exposed 3.5 inch drive bays, and two (2) exposed 5.25 inch drive bays), and a 200 Watt ATX power supply.
- Additionally, the EUT was equipped with one (1) 3.5" floppy drive, one (1) IDE hard drive, one (1) CD-ROM drive, one (1) AGP video display adapter and one (1) PCI Network adapter.

1.2 Objective

This Class B report is prepared on behalf of PREMIO COMPUTER, Inc. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules and to ICES-003 of the Canadian Interference-Causing Equipment Regulations.

The objective of the manufacturer is to demonstrate compliance with FCC Class B limits for conducted and radiated margin and to ICES-003 requirements for Information Technology Equipment.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 -1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Suite 2, Sunnyvale, California, USA.

Test sites at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-674 and R-657. The test sites has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1993, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Data
HP	Spectrum Analyzer	8568B	2610A02165	2/6/99
HP	Spectrum Analyzer	8593B	2919A00242	3/20/99
HP	Amplifier	8349B	2644A02662	3/20/99
HP	Quasi-Peak Adapter	85650A	917059	2/6/99
HP	Amplifier	8447E	1937A01046	2/6/99
A.H. System	Horn Antenna	SAS0200/571	261	2/27/99
Com-Power	Log Periodic Antenna	AL-100	16005	1/2/99
Com-Power	Biconical Antenna	AB-100	14012	1/2/99
Solar Electronics	LISN	8012-50-R-24-BNC	968447	3/28/99
Com-Power	LISN	LI-200	12208	12/20/98
Com-Power	LISN	LI-200	12005	12/20/98
BACL	Data Entry Software	DES1	0001	12/20/98

1.7 Equipment Under Test (EUT)

Manufacturer	Description	Model	Serial Number	FCC ID
PREMIO COMPUTER, Inc.	Pentium® II Desktop System	PREMIODTP6E	None	IW2 PREMIODTP6E

1.8 EUT Configuration List Details

Manufacturer	Description	Model	Serial Number	FCC ID
Premio	Motherboard	212G	M9806069862	None
PREMIO	Power Supply	TG-2006B	7464109	None
TEAC	3.5" Floppy Drive	FD-235HF	6247068	None
CHINON	5.25" Floppy Drive	FR-506	1192731	None
Hercules	Video Card	GB3570 AGP	None	None
	Chassis	Desktop	None	None

1.9 Support Equipment

Manufacturer	Description	Model	Serial Number	FCC ID
Compaq	Keyboard	104 WN	BO3C80A39E4G6K	AQ6-MTN41Z15DIP
Compaq	Mouse	MUS9J	B01920H67E0071I	EMJMJUSJJ
Citizen Watch Ltd.	Printer	LSP-10	5047999-92	DLK66TLSP-10
ViewSonic	Monitor	705A	1912600348	FVI7035AC1
EVEREX	Modem	EV-945	None	E3E5UVEV-945
EVEREX	Modem	EV-945	None	E3E5UVEV-945

1.10 External I/O Cabling

Cable Description	Length (M)	Port/From	To
Shielded Keyboard Cable	1.6	Keyboard Port/EUT	Compaq Keyboard
Unshielded mouse cable	2.0	Mouse Port/EUT	Compaq mouse
Shielded Printer Cable	2.0	Parallel/EUT	Citizen Printer
Shielded Serial Cable	1.5	Serial 1/EUT	EVEREX Modem
Shielded Serial Cable	1.5	Serial 2/EUT	EVEREX Modem
Shielded USB Cablex2	1.5	USB Ports/EUT	Terminators
Shielded Video Cable	1.8	Video out/Video Card/EUT	Viewsonic monitor

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

The PCI video adapter provided the 15-pin D-Sub.

The following I/O ports were provided by the motherboard: two serial ports, one parallel port, two USB port, one PS/2 keyboard port, one PS/2 mouse port, one floppy interface connector, and two IDE interface connectors. The CD-ROM drive provides the audio out jack and the Network card provide the AUX, BNC and RJ45 TP connector.

The AGP video card was used for the final qualification test. The parallel port (LPT1), two serial ports (COM1 and COM2), PS/2 mouse and keyboard ports, two USB ports, TP port, BNC port, and audio jack were also tested along with a 200 Watt power supply.

Since the fundamental frequency is the same with all processor speeds, 100MHz BUS in this case, the EUT was tested with the Intel Pentium® II 400MHz CPU to represent worst case results.

The BUS and processor speeds were achieved by installing the appropriate processor and changing the jumper settings on the motherboard. Following is the supported BUS and processor speeds:

Intel Pentium® II:
100 MHz BUS for 400MHz processor.

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, GWBASIC 2Modem, contained on the hard drive, is started in a DOS window under the Windows 95 operating system. Once loaded, the program sequentially exercises each system component.

The sequence used is as follows:

- 1) Lines of Hs scrolls across the VGA monitor
- 2) The printer outputs Hs
- 3) The two modems receive Hs
- 4) Send a signal to the two USB cables, which were terminated by a 100 ohms resistor.

The complete cycle takes approximately 5 - 10 seconds and the process is continuously repeated.

2.3 Special Accessories


As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied by INMAC, Y.C. Cable, Monster Cable and from their respective support equipment manufacturers. The printer, the two modems and VGA monitor featured shielded metal connectors.

2.4 Block Diagram


There is not block diagram available at the time of testing.

The system has only one full speed. In the full-speed mode, the 14.3MHz crystal on the motherboard drives the frequency synthesizer to produce the 100MHz BUS clock to the CPU and other components on the motherboard. Internally, the CPU is running at 400MHz.

2.5 Configuration of Test System

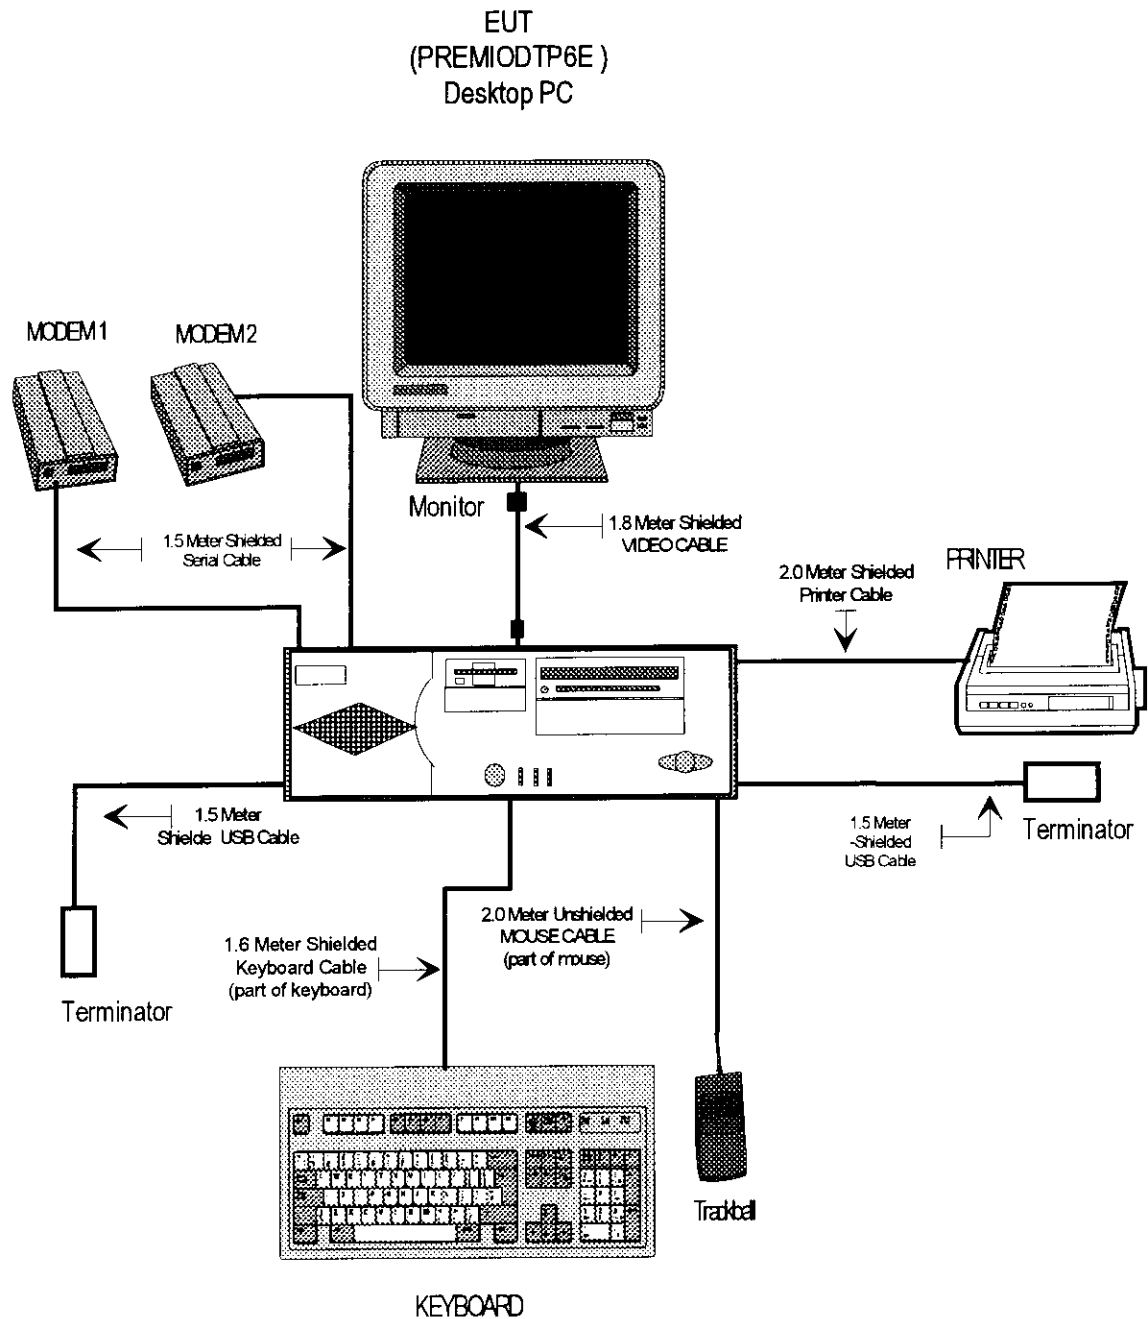

2.6 Test Setup Block Diagram

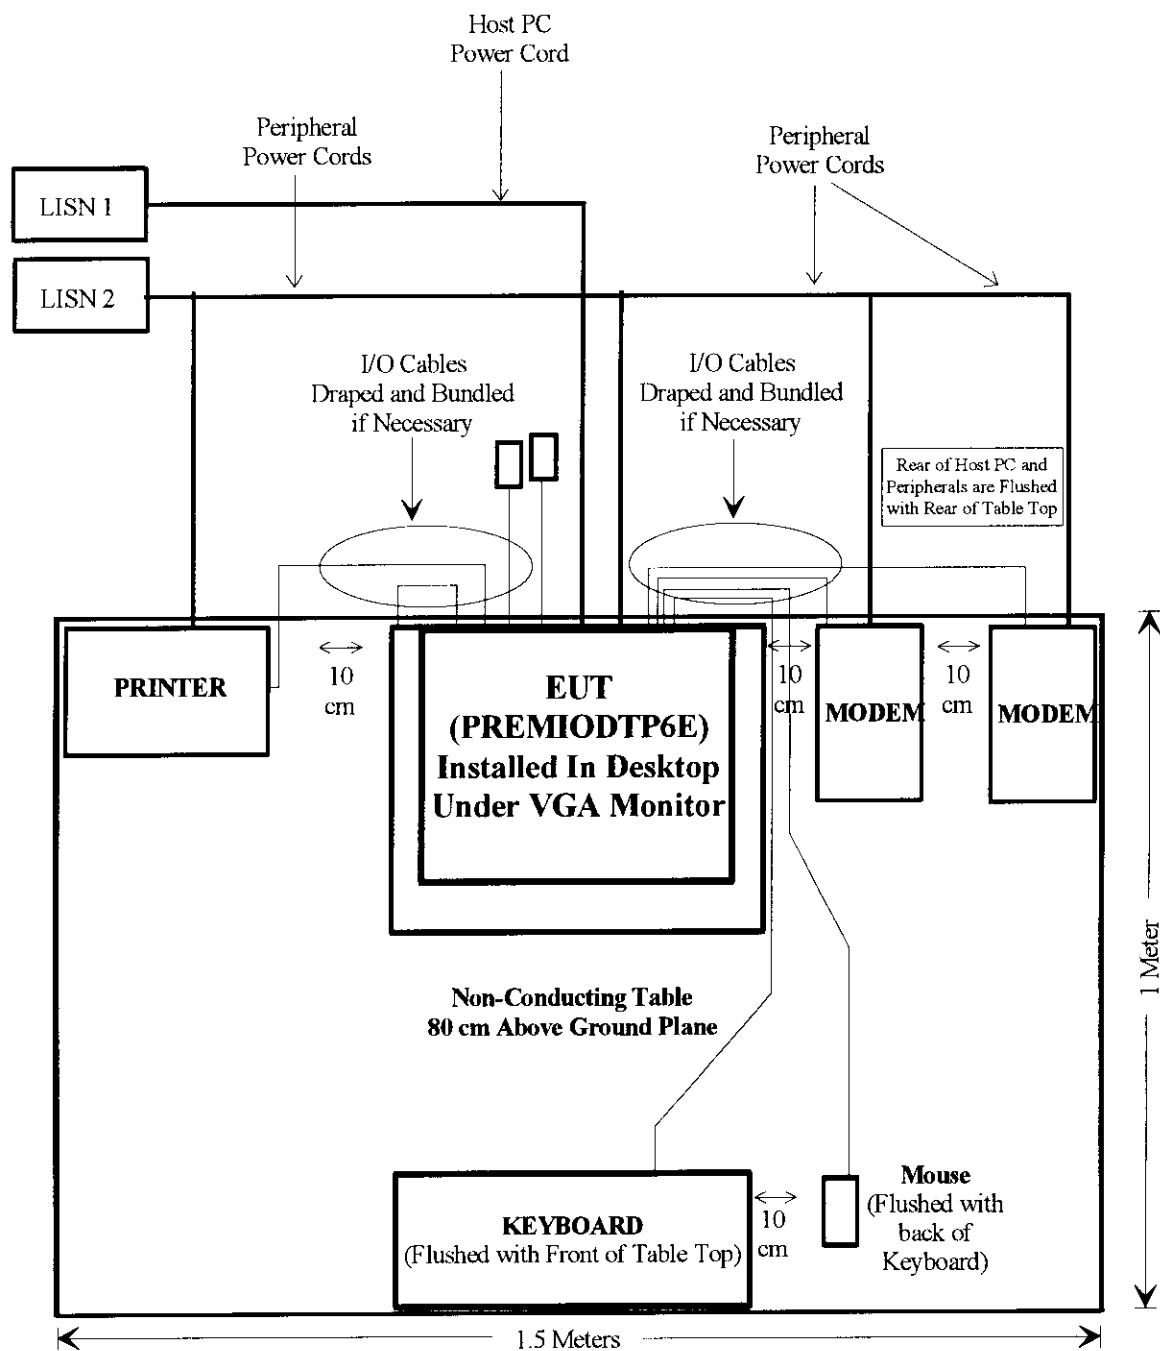

2.7 Equipment Modifications

No modification(s) to the EUT were necessary to comply with the applicable limits:

3 - CONDUCTED EMISSIONS TEST DATA

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

3.2 EUT Setup

The measurement was performed at the Open Area Test Site, using the same setup per ANSI C63.4 - 1992 measurement procedure. Specification used was with the FCC Class B limits.

The EUT was connected to a 110 VAC / 60 Hz power source and it was placed center and the back edge of the test table. The VGA monitor was placed on the top of EUT, printer was placed on one side of the EUT and the two modems on the other side. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The keyboard was placed directly in front of the EUT, flushed with the front of the tabletop. The PS/2 mouse was place next to the keyboard on one. The mouse was flushed with the back of the keyboard.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped over edge of the test table and bundle when necessary.

3.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conducted emission test:

Start Frequency.....	450 kHz
Stop Frequency.....	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	100 kHz
Video Bandwidth.....	100 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

3.4 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first LISN with the VGA monitor and all support equipment power cords connected to the second.

Since the fundamental frequency is the same with all processor speeds, 100MHz BUS in this case, the EUT was tested using the Intel Pentium® II 400 MHz CPU with the PREMIO (TG-2006-B) 200 Watt power supply to represent worst case results for the final qualification test. Therefore, these results were used for final test data recorded in the table listed under section 3.6 of this report.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination. All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (less than -4 dB μ V). Quasi-peak readings are distinguished with a "Qp".

3.5 Summary of Test Results

According to the data in section 3.6, the EUT complied with the FCC Conducted margin for a Class B device and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, with the *worst* margin reading of:

-3.4 dB μ V at 0.600 MHz in the *Line* mode for the PREMIO, TG-2006-B power supply

3.6 Conducted Emissions Test Data

3.6.1 Final Test Data for PREMIO Power Supply, model TG-2006-B with Intel Pentium® II 400 MHz CPU, 0.45 - 30 MHz.

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	Qp/Ave/Peak	Line/Neutral	dB μ V	dB
0.600	44.6	QP	Line	48	-3.4
1.010	44.4	QP	Neutral	48	-3.6
15.230	41.8	QP	Line	48	-6.2
15.230	39.3	QP	Neutral	48	-8.7
13.630	38.4	QP	Line	48	-9.6
27.370	33.5	QP	Neutral	48	-14.5

3.7 Plot of Conducted Emissions Test Data

Plot of Conducted Emissions test data for the PREMIO power supply, model TG-2006-B with Intel Pentium® II 400 MHz processor is presented in Appendix B of this report as reference.

4 - RADIATED EMISSION DATA

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

4.2 EUT Setup

The radiated emission tests were performed in the open area 3 meter test site, using the setup in accordance with the ANSI C63.4 - 1992. The specification used was the FCC Class B limits.

The EUT was connected to a 110 VAC / 60 Hz power source and it was placed center and the back edge of the test table. The VGA monitor was placed on the top of EUT, printer was placed on one side of the EUT and the two modems on the other side. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The keyboard was placed directly in front of the EUT, flushed with the front of the tabletop. The PS/2 mouse was placed next to the keyboard on one. The mouse was flushed with the back of the keyboard.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped over edge of the test table and bundle when necessary.

4.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33, since the internal processor speed operates between 108-500 MHz, the system was tested to 2000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency	30 MHz
Stop Frequency	2000 MHz
Sweep Speed	Auto
IF Bandwidth	100 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	1MHz

4.4 Test Procedure

For the radiated emissions test, both the EUT and VGA monitor and all support equipment power cords was connected to the AC floor outlet since the power supply (TG-2006-B) used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (less than -4 dBμV), and are distinguished with a "Qp" in the data table.

Since the fundamental frequency is the same with all processor speeds, 100MHz BUS in this case, the EUT was tested using the Intel Pentium® II 400 MHz CPU at 100 MHz BUS speed to represent worst case results for the final qualification test. . Therefore, these results were used for final test data recorded in the table listed under section 4.7 of this report as reference.

The parallel port (LPT1), two serial ports (COM1 and COM2), two USB ports, TP port, BNC port, PS/2 mouse and keyboard ports were also tested.

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

4.6 Summary of Test Results

According to the data in section 4.7, the EUT complied with the FCC Class B standards and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, and had the worst margin of:

-3.8 dBμV at 801.79 MHz in the Horizontal polarization with the Intel Pentium® II 400 MHz CPU at 100 MHz BUS.

-2.0 dBμV at 801.79 MHz in the Vertical polarization with the Intel Pentium® II 400 MHz CPU at 100 MHz BUS – After Maximize procedure.

4.7 Radiated Emissions Test Result Data**4.7.1 Test Data for Intel Pentium® II 400 MHz CPU at 100 MHz BUS, 30 to 2000 MHz.**


INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTE AMPLITUDE	FCC CLASS B	
Frequency	Ampl.	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dB μ V/m	Degree	Meter	H/V	dB μ V/m	dB	dB	dB μ V/m	dB μ V/m	dB
801.79	31.2	90	1.1	H	21.7	10.7	21.4	42.2	46.0	-3.8
801.79	31.7	0	1.3	V	21.2	10.7	21.4	42.2	46.0	-3.8
300.67	43.7	0	1.8	H	13.9	5.9	22.6	40.9	46.0	-5.1
701.56	34.1	90	1.2	V	19.4	9.3	22.4	40.4	46.0	-5.6
902.01	27.9	225	1.3	H	22.1	10.7	20.7	40.0	46.0	-6.0
701.56	31.2	180	1.2	H	20.4	9.3	22.4	38.5	46.0	-7.5
902.01	28.1	180	1.4	V	20.9	10.7	20.7	39.0	46.0	-7.0
501.12	37.4	200	1.5	V	15.9	7.5	23.6	37.2	46.0	-8.8
167.03	38.7	225	1.6	H	12.7	4.2	21.4	34.2	43.5	-9.3
501.12	34.5	270	1.5	H	17.5	7.5	23.6	35.9	46.0	-10.1
300.67	38.7	0	2.2	V	13.0	5.9	22.6	35.0	46.0	-11.0
167.04	36.2	270	1.5	V	13.4	4.2	21.4	32.4	43.5	-11.1
133.48	36.1	330	1.6	V	11.5	3.7	21.4	29.9	43.5	-13.6
400.89	30.5	160	1.6	H	15.6	6.7	23.3	29.5	46.0	-16.5
400.89	30.7	90	1.4	V	15.1	6.7	23.3	29.2	46.0	-16.8
312.05	31.7	100	1.8	H	14.2	5.7	23.0	28.6	46.0	-17.4
334.08	30.1	240	1.6	V	13.6	6.1	22.6	27.2	46.0	-18.8
133.46	28.1	270	1.8	H	11.5	3.7	21.4	21.9	43.5	-21.6
312.05	28.0	180	1.5	V	13.2	5.7	23.0	23.9	46.0	-22.1

4.7.2 Maximized Final Test Data for Intel Pentium® II 400 MHz CPU at 100 MHz BUS, 30 to 2000 MHz.

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC CLASS B	
Frequency	Ampl.	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dB μ V/m	Degree	Meter	H/V	dB μ V/m	dB	dB	dB μ V/m	dB μ V/m	dB
801.79	33.5	0	1.6	V	21.2	10.7	21.4	44.0	46	-2.0 QP
300.67	46.3	270	1.5	H	13.9	5.9	22.6	43.5	46	-2.5
801.79	31.6	225	1.1	H	21.7	10.7	21.4	42.6	46	-3.4
701.56	34.8	250	1.4	H	20.4	9.3	22.4	42.1	46	-3.9
701.56	34.3	100	1.2	V	19.4	9.3	22.4	40.6	46	-5.4
902.01	28.1	270	1.3	H	22.1	10.7	20.7	40.2	46	-5.8


5 – FCC PRODUCT LABELING AND WARNING STATEMENT

5.1 Proposed FCC Label Format

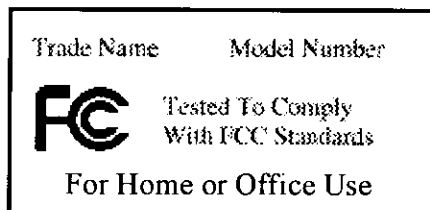

Specifications: Text is white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened and shall be affixed at a conspicuous location on the EUT.

5.2 Proposed Label Location on EUT

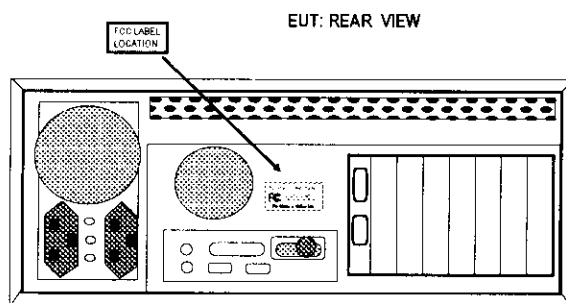

5.3 FCC Warning Statement

The FCC Warning Statement is provided with the product manual. A sample of the statement is presented in Appendix C of this report as reference.


Appendix B – PLOT OF CONDUCTED EMISSION TEST DATA

PREMIO PREMIO DTP6E (PC SYSTEM)
REF 48.0 dBμV ATTEN 0 dB

MKR 600 KHZ
44.60 dBμV

hp

10 dB/

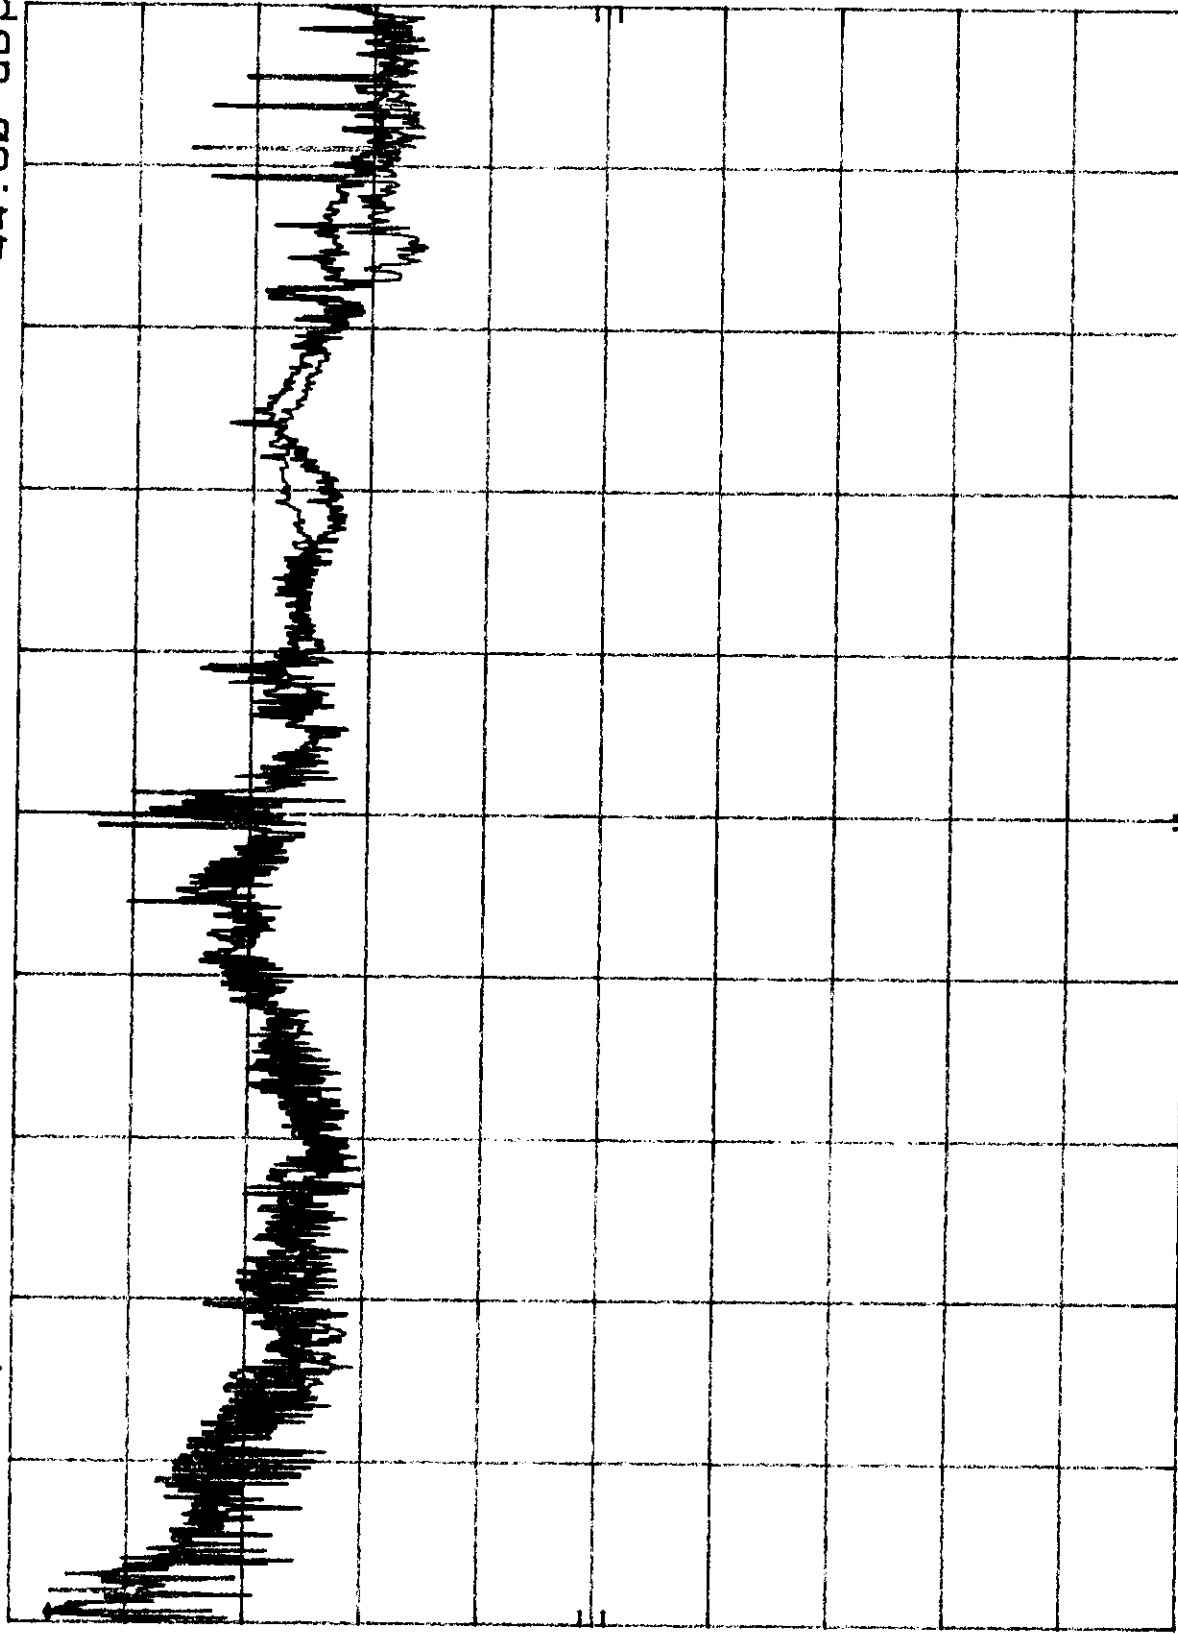

START 450 KHZ RES BW 10 KHZ VBW 30 KHZ STOP 30.00 MHz
SWP 20 sec