

FCC PART 15.247

TEST REPORT

For

Hobbico Inc

2904 Research Road, Champaign, Illinois United States

FCC ID: IYFJ2000

Report Type: Original Report	Product Type: Vusion 250 Race Quad RTF 25mW
Report Number: RDG160905008-00	
Report Date: 2016-09-26	
Reviewed By:	Allen Qiao RF Engineer
Approved by:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Dongguan). This report may contain data or test methods that are not covered by the NVLAP accreditation scope and shall be marked with an asterisk "*" and noted.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	7
APPLICABLE STANDARD	7
FCC §15.203 - ANTENNA REQUIREMENT.....	8
APPLICABLE STANDARD	8
ANTENNA CONNECTOR CONSTRUCTION	8
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	9
APPLICABLE STANDARD	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP	9
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST DATA	11
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	15
APPLICABLE STANDARD	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE	15
TEST DATA	15
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	17
APPLICABLE STANDARD	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	22

APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(d) - BAND EDGES TESTING	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	28

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hobbico Inc*'s product, model number: *J2000(FCC ID:IYFJ2000)* (the "EUT") in this report was a *Vusion 250 Race Quad RTF 25mW*, which was measured approximately: 16.2 cm (L) x 16.5 cm (W) x 6.8 cm (H), rated input voltage: DC6V from battery.

Note: The series product, model RISJ2000 and J2000 are electrically identical, the difference between them is the model name, we selected J2000 for fully testing, the details was explained in the declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 160905008 (Assigned by BACL, Dongguan). The EUT was received on 2016-09-07.

Objective

This report is prepared on behalf of *Hobbico Inc* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the Part of a system with FCC ID: IYF0205.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode with maximum power output, which was provided by the manufacturer, 79 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	...	...
3	2405	...	...
...	...	...	...
...	...	77	2479
38	2440	78	2480
39	2441	/	/

EUT was tested with channel 0, 39 and 78.


EUT Exercise Software

No software was made to the EUT.

Equipment Modifications

No modification was made to the EUT.

Block Diagram of Test Setup

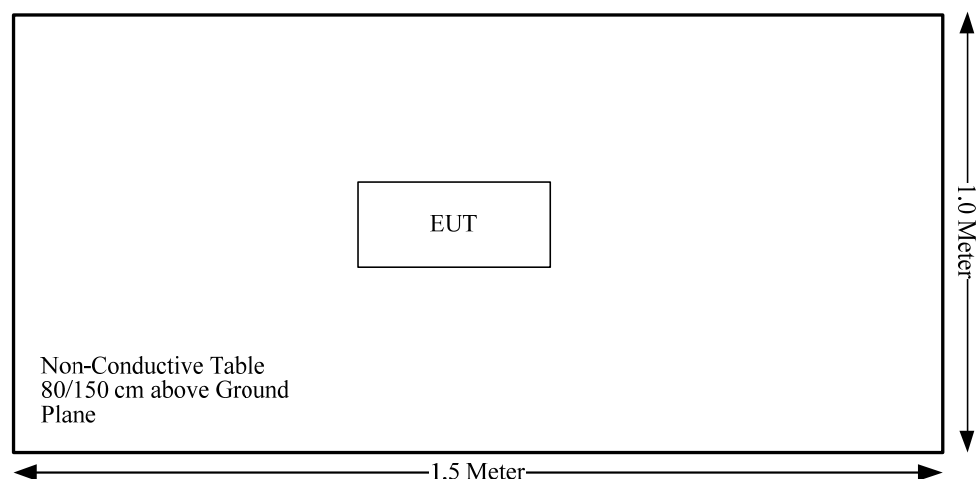

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Note: Not Applicable: It is battery operated equipment.

Test time: 2016-09-18 ~ 2016-09-25.

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum tune-up power including tolerance is 4.0 dBm(2.1mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 2.1/5 \cdot (\sqrt{2.480}) = 0.7 < 3.0$

So the SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement and the antenna gain is 1.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.


Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

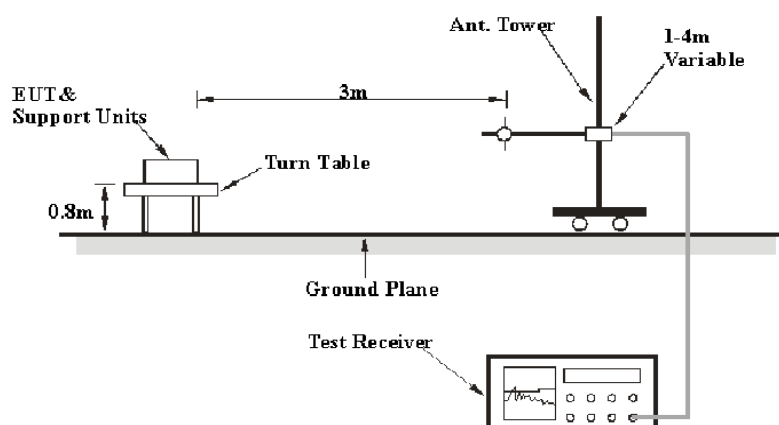

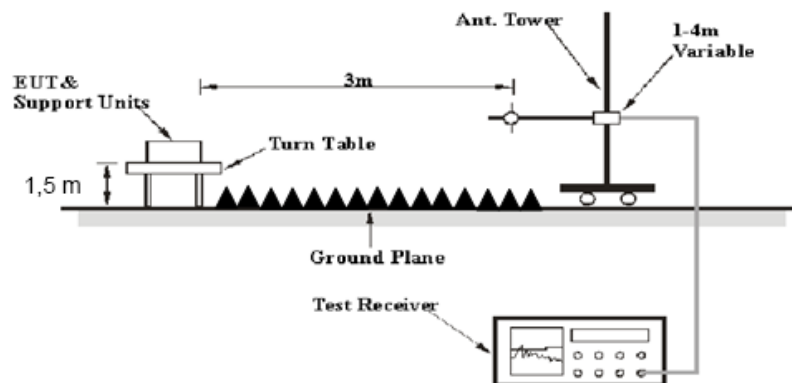Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2016-09-01	2017-09-01
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2016-09-01	2017-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2016-01-05	2019-01-04
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2016-09-06	2017-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data**Environmental Conditions**


Temperature:	28.5 °C
Relative Humidity:	64 %
ATM Pressure:	100.2 kPa

* The testing was performed by Costa Dong on 2016-09-18.


Test Mode: Transmitting

Below 1 GHz: (Low channel is the worst case)

Horizontal:

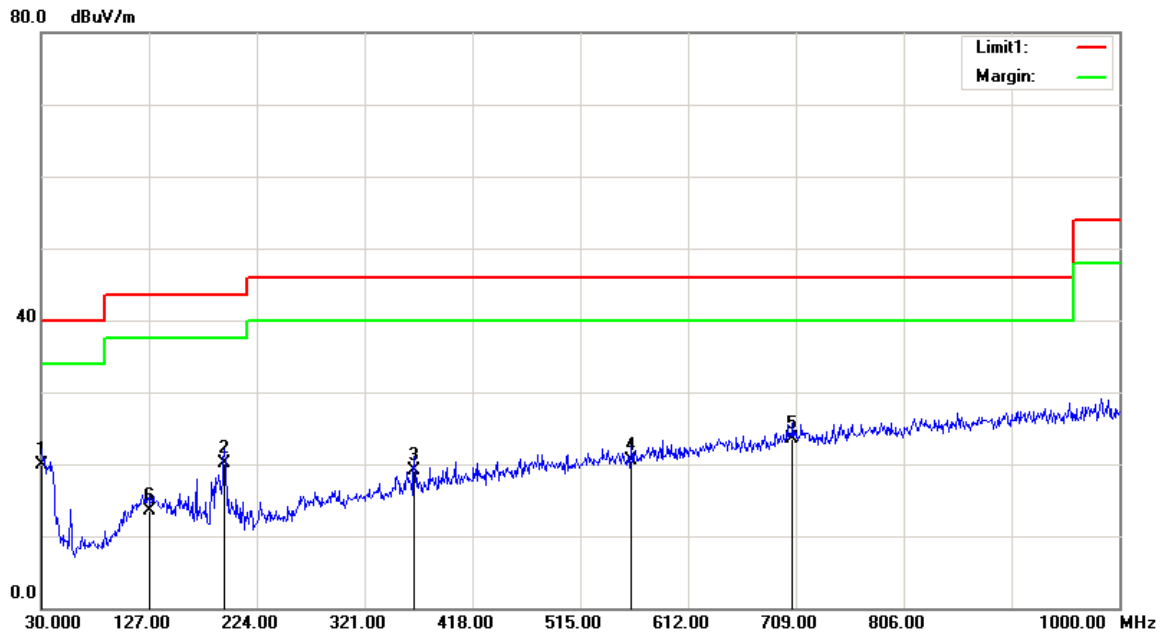

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	19.73	QP	0.27	20.00	40.00	20.00
194.9000	28.20	QP	-8.10	20.10	43.50	23.40
365.6200	23.50	QP	-4.40	19.10	46.00	26.90
560.5900	21.39	QP	-0.89	20.50	46.00	25.50
706.0900	21.70	QP	1.90	23.60	46.00	22.40
127.0000	19.39	QP	-5.79	13.60	43.50	29.90

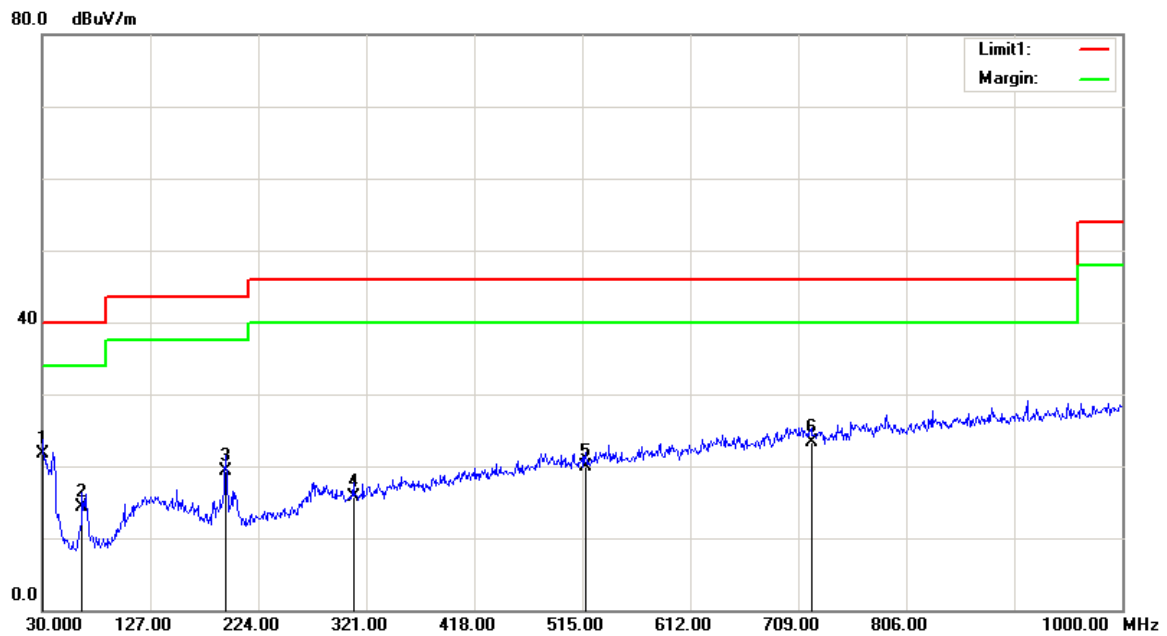Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	20.67	QP	1.03	21.70	40.00	18.30
65.8900	26.88	QP	-12.58	14.30	40.00	25.70
194.9000	27.50	QP	-8.10	19.40	43.50	24.10
309.3600	21.31	QP	-5.61	15.70	46.00	30.30
517.9100	21.42	QP	-1.52	19.90	46.00	26.10
720.6400	21.61	QP	1.69	23.30	46.00	22.70

2) 1-25GHz:

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	67.08	PK	H	25.65	3.66	0.00	96.39	N/A	N/A
2402	55.62	AV	H	25.65	3.66	0.00	84.93	N/A	N/A
2402	58.45	PK	V	25.65	3.66	0.00	87.76	N/A	N/A
2402	46.98	AV	V	25.65	3.66	0.00	76.29	N/A	N/A
2390	33.33	PK	H	25.61	3.63	0.00	62.57	74.00	11.43
2390	13.48	AV	H	25.61	3.63	0.00	42.72	54.00	11.28
4804	33.54	PK	H	30.59	5.06	27.41	41.78	74.00	32.22
4804	21.05	AV	H	30.59	5.06	27.41	29.29	54.00	24.71
7206	32.13	PK	H	34.09	6.61	25.91	46.92	74.00	27.08
7206	20.74	AV	H	34.09	6.61	25.91	35.53	54.00	18.47
3020	31.44	PK	H	27.26	6.73	27.51	37.92	74.00	36.08
3020	19.88	AV	H	27.26	6.73	27.51	26.36	54.00	27.64
Middle Channel: 2441 MHz									
2441	67.17	PK	H	25.75	3.76	0.00	96.68	N/A	N/A
2441	55.01	AV	H	25.75	3.76	0.00	84.52	N/A	N/A
2441	59.33	PK	V	25.75	3.76	0.00	88.84	N/A	N/A
2441	47.64	AV	V	25.75	3.76	0.00	77.15	N/A	N/A
4882	33.81	PK	H	30.79	5.19	27.42	42.37	74.00	31.63
4882	21.26	AV	H	30.79	5.19	27.42	29.82	54.00	24.18
7323	32.1	PK	H	34.38	6.75	25.88	47.35	74.00	26.65
7323	20.67	AV	H	34.38	6.75	25.88	35.92	54.00	18.08
3020	31.37	PK	H	27.26	6.73	27.51	37.85	74.00	36.15
3020	20.18	AV	H	27.26	6.73	27.51	26.66	54.00	27.34
3475	31.05	PK	H	28.72	4.73	27.23	37.27	74.00	36.73
3475	19.48	AV	H	28.72	4.73	27.23	25.70	54.00	28.30
High Channel: 2480 MHz									
2480	67.35	PK	H	25.85	3.68	0.00	96.88	N/A	N/A
2480	55.68	AV	H	25.85	3.68	0.00	85.21	N/A	N/A
2480	58.42	PK	V	25.85	3.68	0.00	87.95	N/A	N/A
2480	46.71	AV	V	25.85	3.68	0.00	76.24	N/A	N/A
2483.5	35.66	PK	H	25.86	3.67	0.00	65.19	74.00	8.81
2483.5	19.96	AV	H	25.86	3.67	0.00	49.49	54.00	4.51
4960	32.75	PK	H	31.00	5.34	27.43	41.66	74.00	32.34
4960	21.64	AV	H	31.00	5.34	27.43	30.55	54.00	23.45
7440	32.31	PK	H	34.66	6.89	25.97	47.89	74.00	26.11
7440	20.46	AV	H	34.66	6.89	25.97	36.04	54.00	17.96
3020	31.67	PK	H	27.26	6.73	27.51	38.15	74.00	35.85
3020	19.16	AV	H	27.26	6.73	27.51	25.64	54.00	28.36

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	27.5 °C
Relative Humidity:	33 %
ATM Pressure:	99.6 kPa

* The testing was performed by Costa Dong on 2016-09-23.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency	Channel Separation	Limit
MHz	MHz	MHz
2464	1.004	0.301
2465		

Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

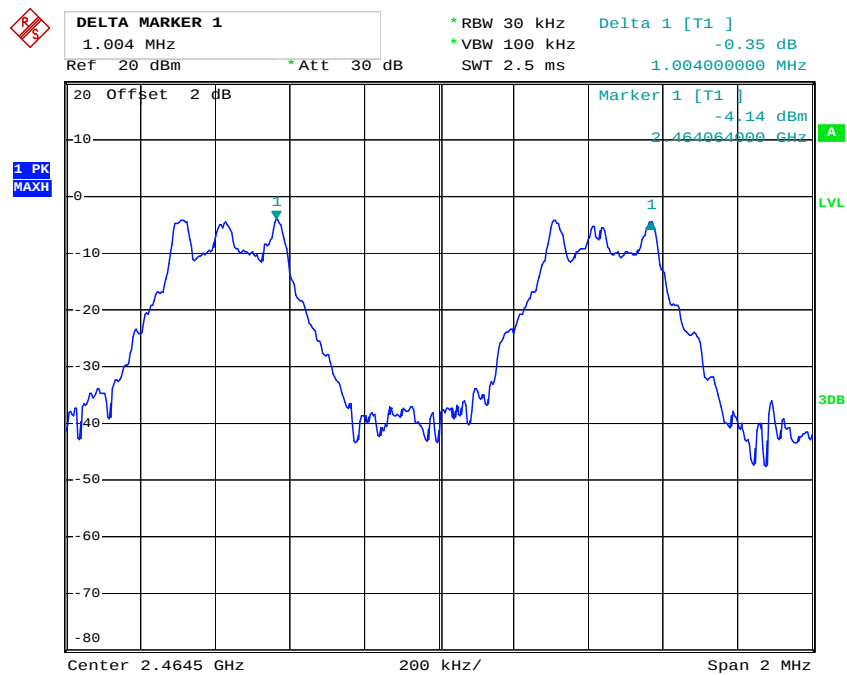

Date: 23.SEP.2016 00:27:40

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4 °C
Relative Humidity:	33 %
ATM Pressure:	99.6 kPa

* The testing was performed by Costa Dong on 2016-09-22.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.432
Middle	2441	0.434
High	2480	0.452

Low Channel

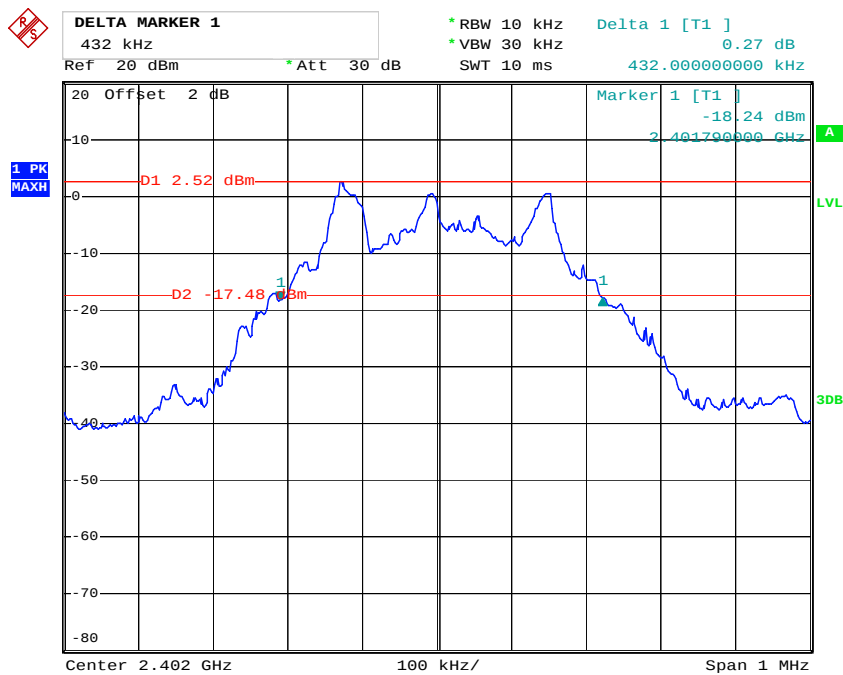


Date: 22.SEP.2016 23:38:02

Middle Channel

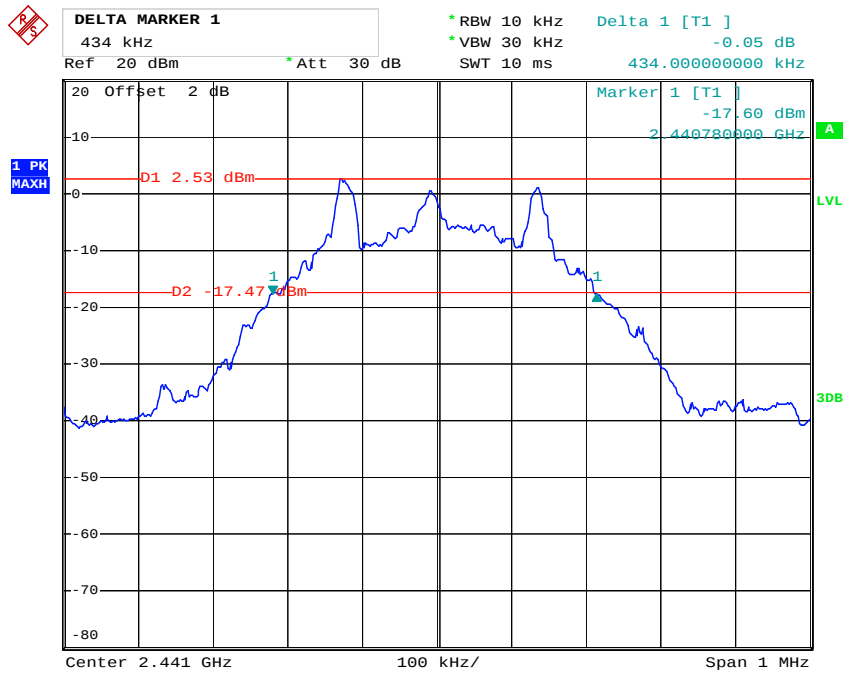

Date: 22.SEP.2016 23:36:36

High Channel

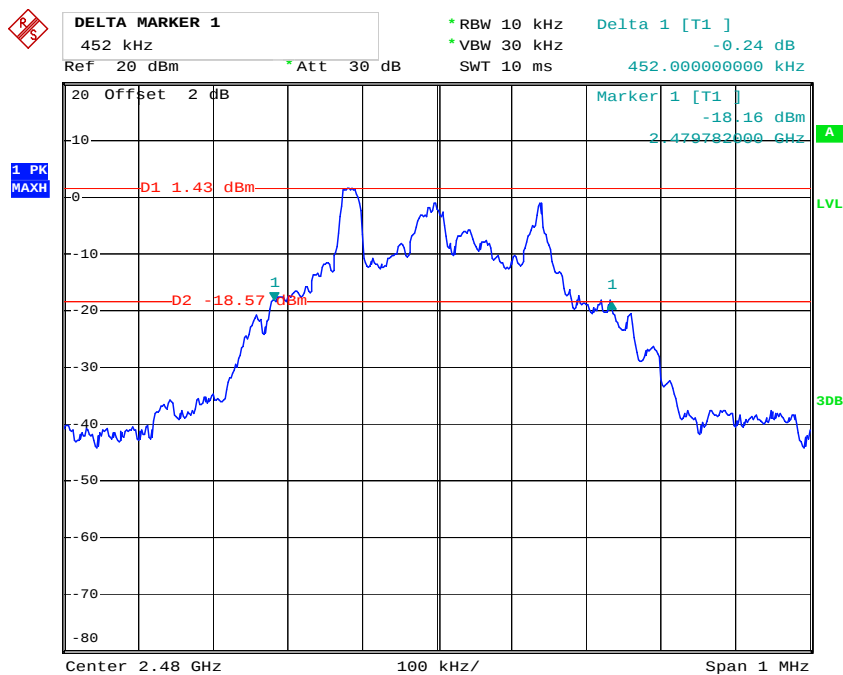

Date: 22.SEP.2016 23:34:52

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.5 °C
Relative Humidity:	33 %
ATM Pressure:	99.6 kPa

* The testing was performed by Costa Dong on 2016-09-25.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	15	≥ 15

Number of Hopping Channels

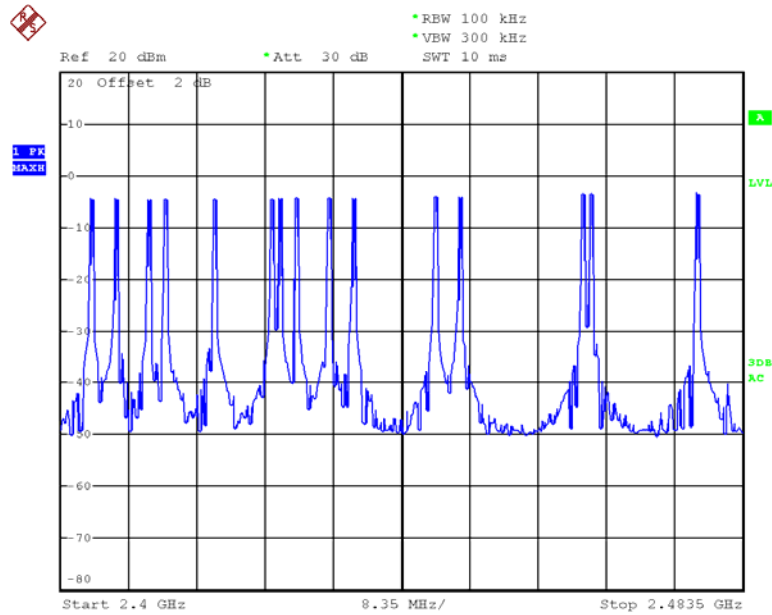

Date: 25.SEP.2016 16:23:56

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time = time slot length $\times$ hope rate / number of hopping channels $\times 31.6\text{s}$
Hop rate = 1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.5 °C
Relative Humidity:	33 %
ATM Pressure:	99.6 kPa

* The testing was performed by Costa Dong on 2016-09-23.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Frequency(MHz)	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2411	0.94	0.020	0.4	Compliance
Dwell Time= time slot length * hope rate/ number of hopping channels *hopping NO. * 0.4s				

Note: hopping rate = 52 pulse/s, which was declared by applicant.

Pulse Width

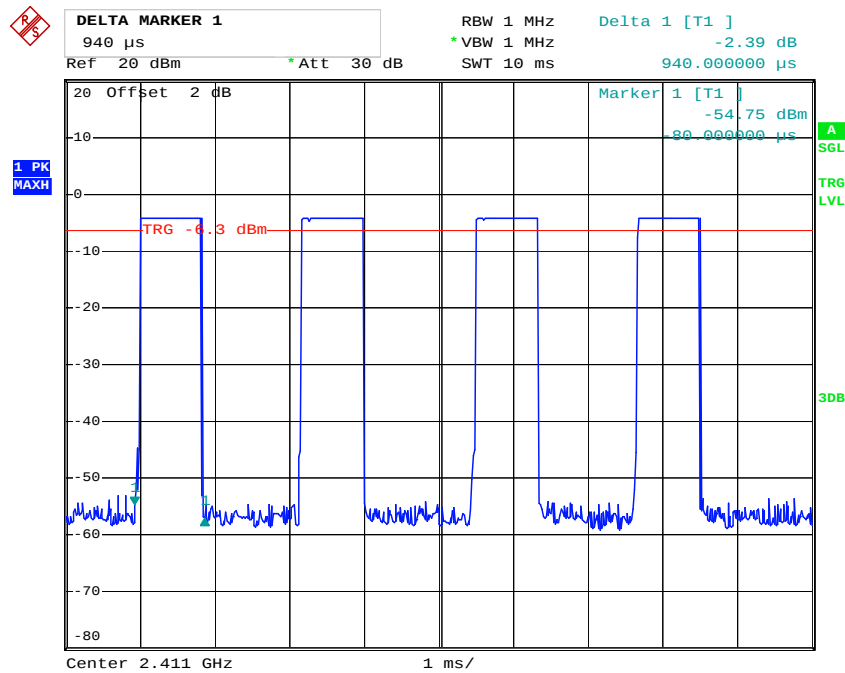

Date: 23.SEP.2016 00:32:57

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.4 °C
Relative Humidity:	33 %
ATM Pressure:	99.6 kPa

* The testing was performed by Costa Dong on 2016-09-22.


Test Result: Compliance.

Test Mode: Transmitting

Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
Low	2402	3.24	21
Middle	2441	3.15	21
High	2480	2.45	21


Note: The data above was tested in conducted mode.

Output Power, Low Channel

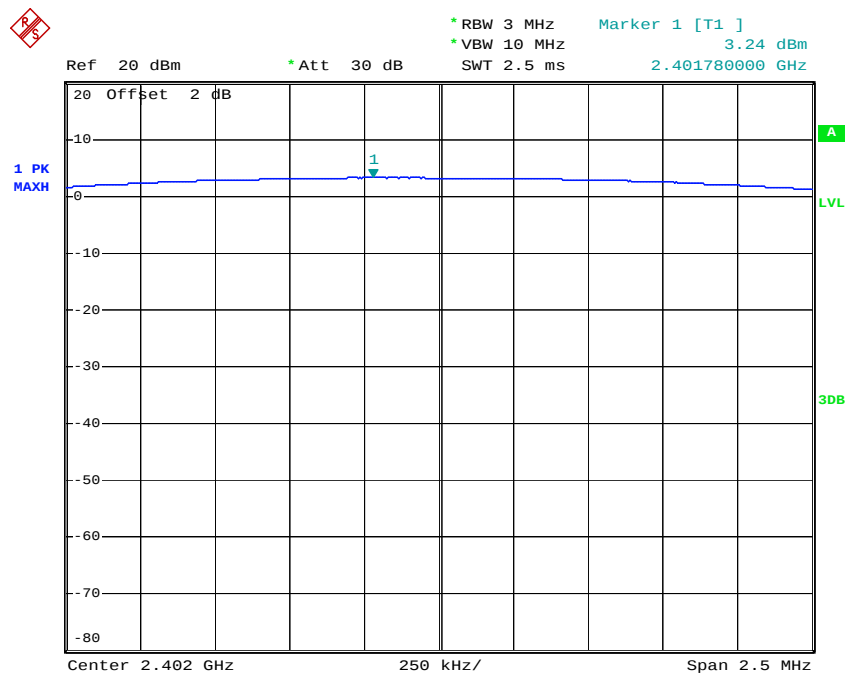


Date: 22.SEP.2016 22:48:49

Output Power, Middle Channel

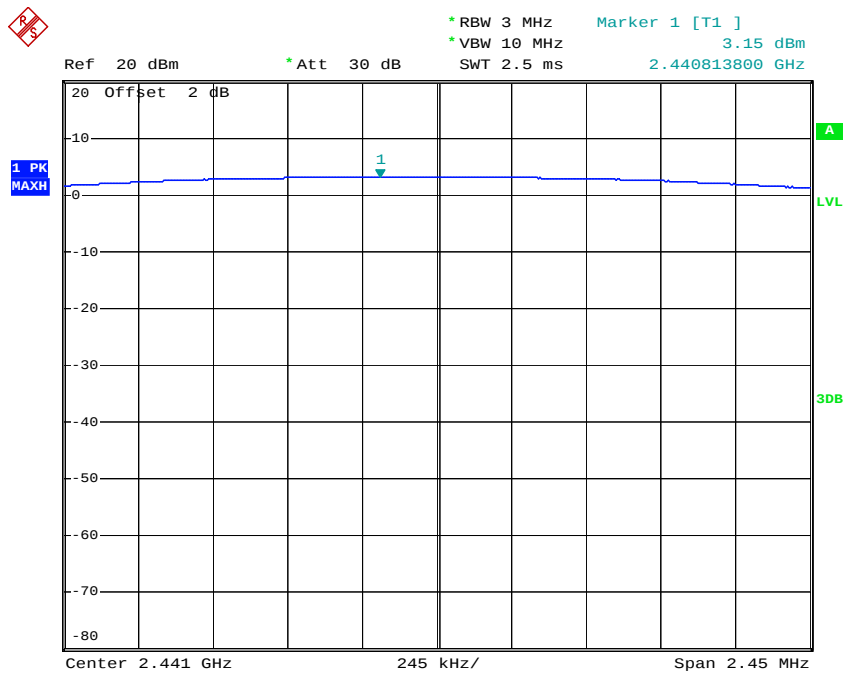

Date: 22.SEP.2016 22:52:51

Output Power, High Channel

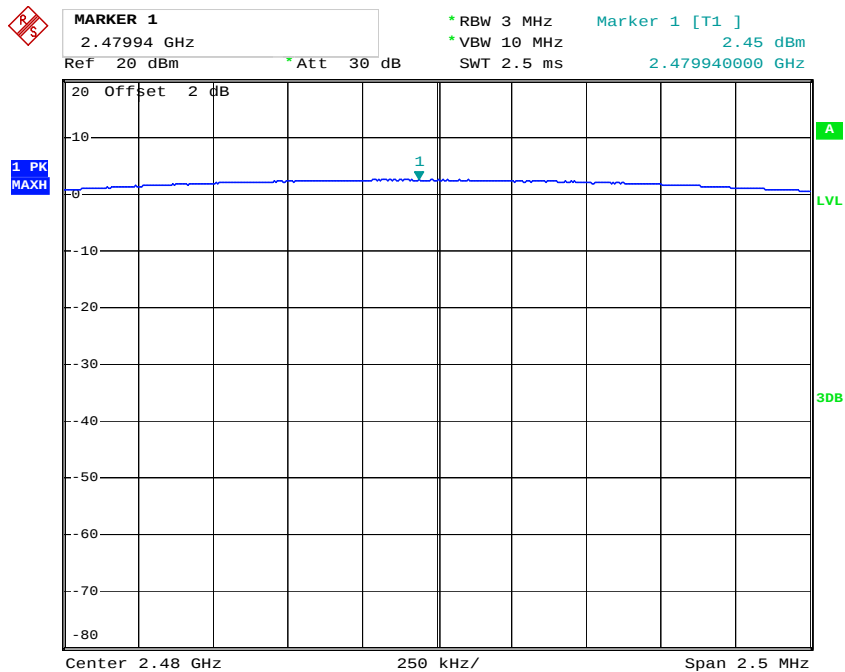

Date: 22.SEP.2016 23:50:31

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.4 °C
Relative Humidity:	33 %
ATM Pressure:	99.6 kPa

* The testing was performed by Costa Dong on 2016-09-22.


Test Result: Compliance

Band Edge, Left Side

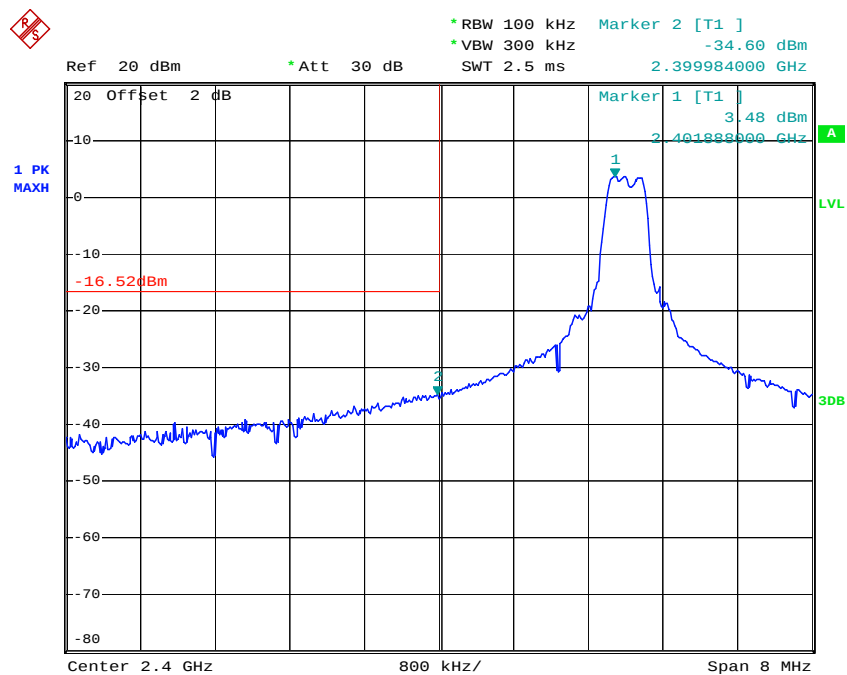

Date: 22.SEP.2016 22:50:26

Band Edge, Right Side

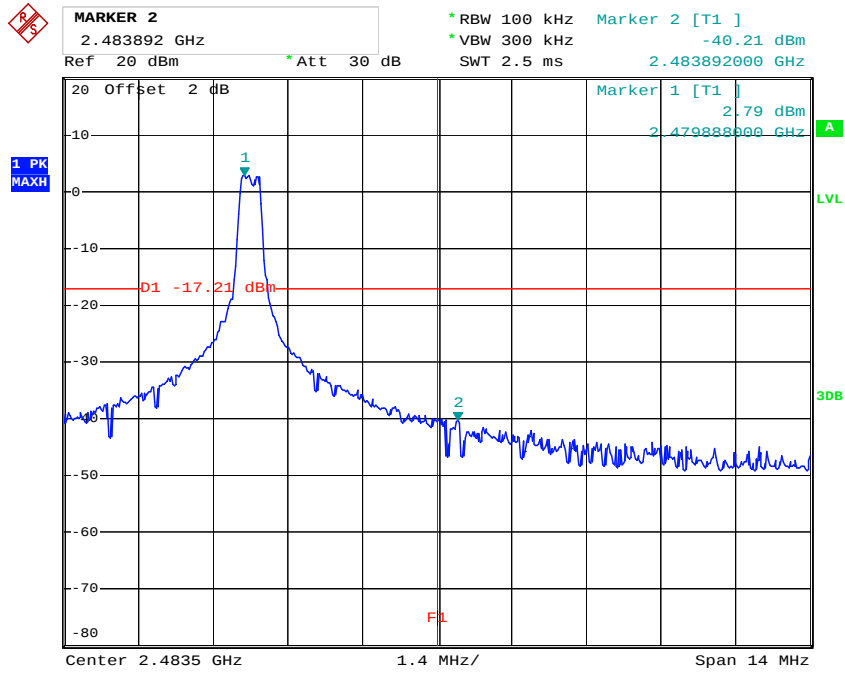

Date: 22.SEP.2016 23:48:04

*****END OF REPORT*****