

Test of Spectralink SNP2400 Telephone Device

To FCC 47 CFR Part 15.247/IC RSS-210

Test Report Serial No.:
TUVR03a/REVA



TEST REPORT

FROM



Test of SpectraLink SNP2400 Telephone Device

To FCC 47 CFR Part 15.247/IC RSS-210

Test Report Serial No.:
TUVR03a/REVA

This report supersedes none

Remarks:

Equipment complied with the specification

☒

Equipment did not comply with the specification

☐

This Test Report is issued Under the Authority of:

A handwritten signature in black ink, appearing to read "Gordon Hurst", is written over a horizontal line.

Gordon Hurst President & CEO

Copy No: pdf

Issue date: 17th February '03

Equipment Details:

Manufacturer: SpectraLink Corporation

Type designation: refer to section 2 of test report

Serial No's: refer to section 4 of test report



2106

This test report may be reproduced in full only



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 2 of 69

This page has been left intentionally blank



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 3 of 69

CONTENTS

1	EXECUTIVE SUMMARY	5
2	TECHNICAL DETAILS	7
3	TEST SUMMARY	8
	3.1 LIST OF MEASUREMENTS	8
	3.2 OPERATIONAL MODE OF EUT	9
4	MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS	10
	4.1 GENERAL OBSERVATIONS	10
	4.2 TEST RESULTS	11
	4.2.1 Transmitter characteristics	11
5	PHOTOGRAPHS	27
	5.1 AC WIRELINE CONDUCTED EMISSION TEST SETUP	27
	5.2 RESTRICTED BANDS RADIATION (30MHz – 1GHz).....	28
6	GRAPHICAL RESULTS	29
7	TEST EQUIPMENT	68
8	SUMMARY OF TEST RESULTS.....	69



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 4 of 69

This page has been left intentionally blank

1 Executive Summary


The purpose of this test program was to demonstrate compliance of the SpectraLink Wireless Telephone against the current USA and Canadian specifications for short-range device certification requirements. The SpectraLink Wireless Telephone demonstrated compliance against the US standard FCC 47 CFR Part 15.247 Subpart C (Intentional Radiator) and Canada's IC/RSS-210 Low Power License-Exempt Radio Communication Devices (all frequency bands).

NetLink Wireless Telephone is designed and manufactured by SpectraLink Corporation, and used for NetLink Wireless Telephone System (WTS) also designed and manufactured by SpectraLink Corporation. The WTS is a fully featured, 802.11-b (DSSS) based wireless telephone system, providing both voice and data communications over a single integrated wireless network at in the 2.4GHz frequency band. NetLink WTS has two components, Wireless Telephones and Telephony Gateways.

NetLink Wireless Telephones operate as clients on the WLAN, alongside other mobile 802.11 devices. Wireless LAN fixed radios, called access points (APs), receive IP voice packets from Wireless Telephones and forward them to the NetLink Telephony Gateway over the Ethernet LAN.

The NetLink WTS simplifies LAN management and improves the cost-effectiveness of the network. With the NetLink Wireless Telephone, employees will have a phone whenever they need one, wherever they are in the facility. Wireless Telephones work just like a desktop telephone, with all the features and capabilities that employees desire, including: Display capabilities, Multiple line appearances, Host switch features, Message waiting indication, Messaging.

The following diagram identifies the NetLink system architecture and its position in a typical voice/data network.

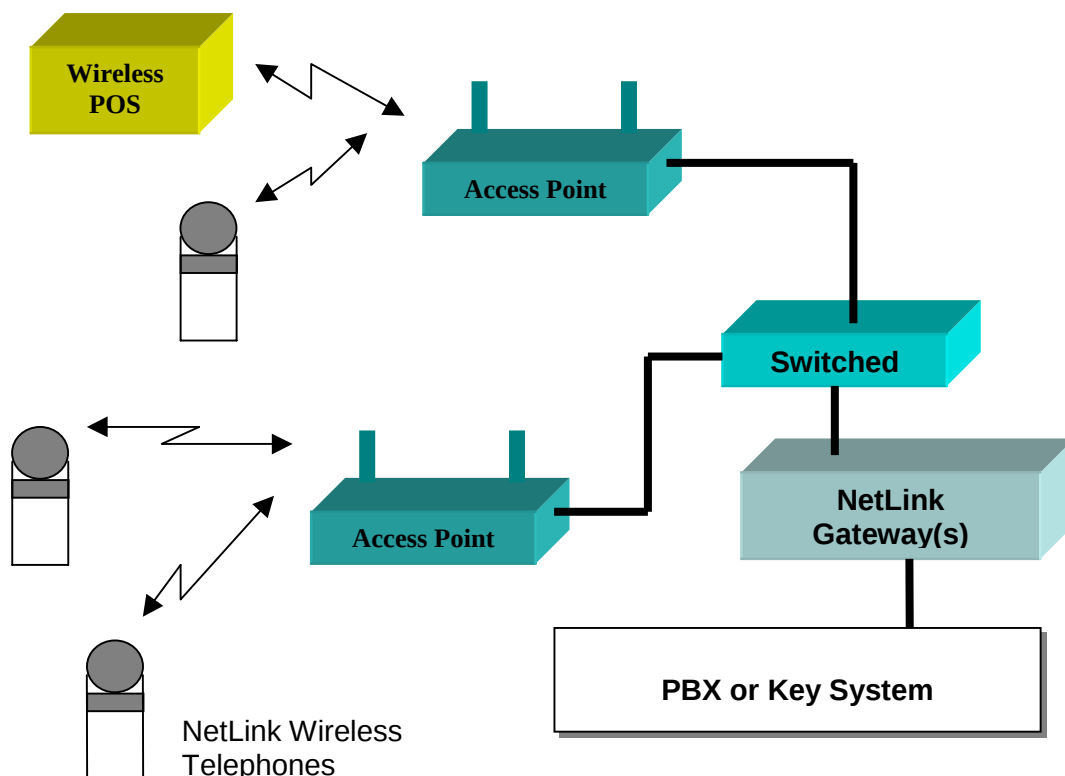

Test Configuration

The test configuration was a standalone telephone unit. The unit was pre-programmed to be able to set the following configurations:


Normal Transmit and Receive Modes:

- Mode I: Channel 1 (2,412MHz) Display "Norm, Tx Chan 1": Low Channel
- Mode II: Channel 6 (2,437MHz) Display "Norm, Tx Chan 6": Mid Channel
- Mode III: Channel 11 (2,462MHz) Display "Norm, Tx Chan 11" : High Channel

Continuous Receive Modes:

- Mode VII: Continuous receive mode on Channel 6 (2,437MHz)

A SMA coaxial connector was used to demonstrate compliance for conducted measurement testing. A telephone with integral antenna was utilized for all emission measurements.

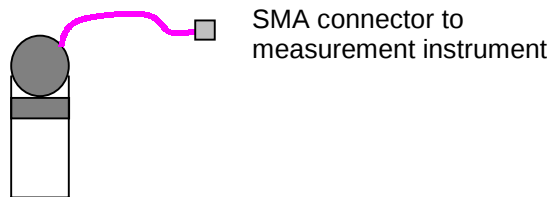

NetLink Wireless Telephone
Equipment Under Test (EUT)

The required tests demonstrated compliance as per client declaration of test configuration, monitoring method and associated pass/fail criteria.

This report provides summarised test results of each test performed. Detailed test results were recorded in Test Results Sheets and retained within the laboratory.

No equipment modification was required to achieve the results reported in this document.



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 7 of 69

2 Technical Details

Purpose	To verify compliance of the SNP2400 Wireless Telephone to FCC and Industry Canada specifications
Applicant / Client	SpectraLink Corporation 5755 Central Avenue Boulder, Colorado 80301 USA
Manufacturer Laboratory performing the tests	SpectraLink Corporation MiCOM Labs, Inc. 3922 Valley Avenue, Suite "B" Pleasanton, California 94566 USA
Test report reference number	TUVR03a/REVA
Date EUT received	22 nd January '03
Standard applied	FCC 47 CFR Part 15.247/IC RSS-210
Dates of test (from - to)	11 th February '03 – 16 th February '03
No of Units:	Two
Equipment Category:	802.11b Spread Spectrum Device
Trade Name:	SpectraLink
Type Number:	NetLink Wireless Telephone
Type of Equipment:	Standalone Telephone
Type Designation:	SNP2400
ITU Emission Code(s):	11M0D7E
Full Frequency Range:	2,400 – 2,483.5MHz
Frequency Channel Range:	2,412 – 2,462MHz (Channels 1 – 11)
Modulation:	DSSS
Microprocessor(s):	Texas Instruments 54xx
Operating Frequency (ies):	2,400 – 2,483.5MHz
Clock/Oscillator(s)	32.768KHz, 44MHz
Rated Input Voltage:	Nominal: +4.2V DC Min - Max: +3.5Vdc – 4.9Vdc
Aggregate Bit Rates:	1Mbit/s, 2Mbit/s, 5.5Mbit/s, 11Mbit/s
Antenna Gain:	0dBi
Nominal Output Power:	+20dBm
Temperature Range:	0 to +40°C
Primary Function Evaluation:	To initiate and receive telephone calls
Intended function in accordance with accompanying documentation	To initiate and receive telephone calls without perceptible degradation of voice quality or loss of correct keypad & display operation
Normal Test Modulation, Error Correction and Control Signals:	IEEE 802.11b

3 Test Summary

3.1 List of Measurements

The following table represents the list of measurements for Spread Spectrum, Direct Sequence devices under the **FCC, Part 15 Subpart C** and **Industry Canada RSS-210**.

List of Measurements

Section(s)	Test Items		Condition
	Transmit mode (TX):		
15.247(a)(2) 5.9.1	Bandwidth at 6 dB below		Conducted
15.247(c) 5.9.1 6.2.2 (o) (e1)	Occupied BW (or Bandedge) Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission in any 100kHz of out-band shall be at least 20dB below the highest in-band spectral density.	Conducted
15.247(b) 6.2.2 (o) (b)	Transmitter output power	Shall not exceed 1.0 W	Conducted
15.247(d) 6.2.2 (o) (b)	Transmitter power spectral density	Shall not be greater than 8 dBm in any 3kHz band	Conducted
15.247(e) 6.2.2 (o) (b)	Processing gain	N/A	N/A ¹
15.207 6.6	AC Wireline Conducted Emissions 450kHz–30MHz	Class B: 250µV	Conducted
15.205/ 209 6.2.1 / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table 3	Radiated (30MHz -1GHz)
			Radiated (1GHz-25GHz)
	Receive mode (RX):		
15.207 7.4	AC Wireline Conducted Emissions 450kHz–30MHz	Class B: 250µV	Conducted
15.209 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz-1GHz)
			Radiated (1GHz-25GHz)

Note 1: The current specification does not require test of this parameter. The Processing Gain data is excluded from this application according to the FCC rule change on 16 May 2002

3.2 Operational Mode of EUT

Three kinds of modulation are used for transmission with bit rates 1Mbit/s, 5.5Mbit/s and 11Mbit/s. The equipment will be marketed with one antenna (no direct connection from the end user is permitted). The EUT was delivered as two separate items;

- (a).. connectorized for conducted measurements
- (b).. antenna for radiated measurements

Table 3.3(a) – Transmit mode (TX)

Operating Frequency (GHz)	Rated Output Power (Conducted) [dBm]			Test Performed*
	Bit Rate 1Mbit/s	Bit Rate 5.5Mbit/s	Bit Rate 11Mbit/s	
2.412 (Ch. 1)	+20	+20	+20	X
2.417 (Ch. 2)	+20	+20	+20	
2.422 (Ch. 3)	+20	+20	+20	
2.427 (Ch. 4)	+20	+20	+20	
2.432 (Ch. 5)	+20	+20	+20	
2.437 (Ch. 6)	+20	+20	+20	X
2.442 (Ch. 7)	+20	+20	+20	
2.447 (Ch. 8)	+20	+20	+20	
2.452 (Ch. 9)	+20	+20	+20	
2.457 (Ch. 10)	+20	+20	+20	
2.462 (Ch. 11)	+20	+20	+20	X

* Full conducted testing with bit rates 1, 5.5 and 11Mbit/s

Table 3.3(b) – Receive mode (RX)

Operating Frequency (GHz)	Test Performed*
2.412 (Ch. 1)	
2.417 (Ch. 2)	
2.422 (Ch. 3)	
2.427 (Ch. 4)	
2.432 (Ch. 5)	
2.437 (Ch. 6)	X
2.442 (Ch. 7)	
2.447 (Ch. 8)	
2.452 (Ch. 9)	
2.457 (Ch. 10)	
2.462 (Ch. 11)	

* Full radiated emission testing with bit rate 1Mbit/s

Note 1: The manufacturer declared that the EUT was operated in worst case conditions, simultaneous transmit, receive and standby modes through a single antenna port, therefore only one set of radiated measurements were taken for each channel of interest – refer to transmitter characteristics.

Note 2: Two EUT's were delivered for test purposes

- SNP2400 with integral antenna
- SNP2400 with coaxial flying lead, terminated in an SMA connector

Note 3: The SNP2400 telephone with coaxial connector was used for conducted testing

Note 4: The SNP2400 telephone with integral antenna was utilised for all emission measurements

4 Measurements, Examinations and Derived Results

4.1 General observations

Equipment model and serial number(s)

Module:	Model Number:	Serial Number:
Netlink Telephone (coaxial connector)	SNP2400	SNPFCC#2*
“ “ (integral antenna)	SNP2400	SNPFCC#4*

*The telephones submitted for testing were pre-production models

Additional notes:

- 1. This report contains the test results only. Details of the test methods used have been recorded and are kept on file by the laboratory. Wherever possible, the test methods described in ETSI document EN 301 126 have been used.*
- 2. The measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95% in accordance with UKAS document M 3003.*

4.2 Test Results

4.2.1 Transmitter characteristics


4.2.1.1 6dB Bandwidth

Test Procedure

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyser connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate centre frequency. The spectrum analyzer was set to: RBW=100kHz, VBW=100kHz*1, Span=50MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

Test Measurement Setup

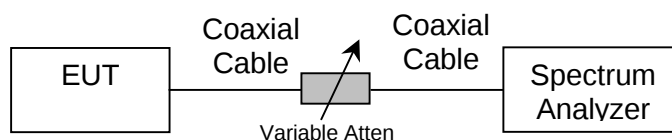

Measurement setup for 6dB bandwidth test

Measurement Results

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 23rd January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	6dB Bandwidth (MHz)
2412 (Ch.1)	2,406.04	2,417.96	TUVR03/01	11.92
2437 (Ch.6)	2,430.92	2,443.09	TUVR03/04	12.17
2462 (Ch.11)	2,456.34	2,467.67	TUVR03/07	11.33

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	6dB Bandwidth (MHz)
2412 (Ch.1)	2,406.04	2,417.96	TUVR03/02	11.92
2437 (Ch.6)	2,431.42	2,442.59	TUVR03/05	11.17
2462 (Ch.11)	2,456.34	2,467.67	TUVR03/08	11.33

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	6dB Bandwidth (MHz)
2412 (Ch.1)	2,406.04	2,417.96	TUVR03/03	11.92
2437 (Ch.6)	2,431.50	2,442.50	TUVR03/06	11.00
2462 (Ch.11)	2,456.71	2,467.29	TUVR03/09	10.58



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 12 of 69

Specification.

Limits

Minimum 6dB Bandwidth	500KHz
-----------------------	--------

Measurement Uncertainty

Measurement uncertainty (ppm)	±0.86	2.074KHz
-------------------------------	-------	----------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-03	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1

Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.2 Occupied Bandwidth / Band-Edge (at 20dB below), Out of Band Emissions

Test Procedure


The bandwidth at 20 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW=100kHz, VBW=100kHz*1, Span=50MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

Test Measurement Setup



Measurement setup for Occupied Bandwidth / Band-edge (at 20db below), and Out of Band Emissions

Measurement Results of Occupied Bandwidth (20dB)

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 24th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	20dB Bandwidth (MHz)
2412 (Ch.1)	2,404.25	2,421.17	TUVR03/25	16.92
2437 (Ch.6)	2,429.25	2,445.75	TUVR03/28	16.50
2462 (Ch.11)	2,454.67	2,470.17	TUVR03/31	15.50

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	20dB Bandwidth (MHz)
2412 (Ch.1)	2,404.17	2,420.92	TUVR03/26	16.75
2437 (Ch.6)	2,429.67	2,445.42	TUVR03/29	15.75
2462 (Ch.11)	2,454.92	2,470.58	TUVR03/32	15.67

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	20dB Bandwidth (MHz)
2412 (Ch.1)	2,404.25	2,421.17	TUVR03/27	16.92
2437 (Ch.6)	2,429.58	2,445.50	TUVR03/30	15.92
2462 (Ch.11)	2,454.75	2,470.58	TUVR03/33	15.83



Measurement Results of Band-edge

Test date: 24th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	Margin to Lower Limit (MHz)	Margin to Upper Limit (MHz)
2412 (Ch.1)	2,404.17		TUVR03/10	4.17	
2462 (Ch.11)		2,470.92	TUVR03/13		12.58

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	Margin to Lower Limit (MHz)	Margin to Upper Limit (MHz)
2412 (Ch.1)	2,404.17		TUVR03/11	4.17	
2462 (Ch.11)		2,470.92	TUVR03/14		12.58

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Low Frequency (MHz)	Upper Frequency (MHz)	Plot #	Margin to Lower Limit (MHz)	Margin to Upper Limit (MHz)
2412 (Ch.1)	2,404.17		TUVR03/12	4.17	
2462 (Ch.11)		2,470.92	TUVR03/15		12.58

Measurement Results of Out of Band Emissions

All conducted emissions in any 100KHz bandwidth outside of the spread spectrum band were at least 20dB lower than the highest in-band power level.

Specification

Limits

Minimum 20dB Bandwidth @ Band-edge	Lower Limit Band-edge	Upper Limit Band-edge	Out of Band Emissions	Down on maximum power
	2,400MHz	2,483.5MHz		>= 20dB

Measurement Uncertainty Occupied Bandwidth / Band-edge

Measurement uncertainty (ppm)	±0.86	2.074KHz
-------------------------------	-------	----------

Measurement Uncertainty Out of Band Emissions

Measurement uncertainty (dB)	+1.38 / -1.84dB
------------------------------	-----------------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-01 & 05	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1


Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.3 Transmitter Output Power

Test Procedure

- A transmitter antenna terminal of EUT is connected to the input of a RF power sensor.
- Measurement is made while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Setup

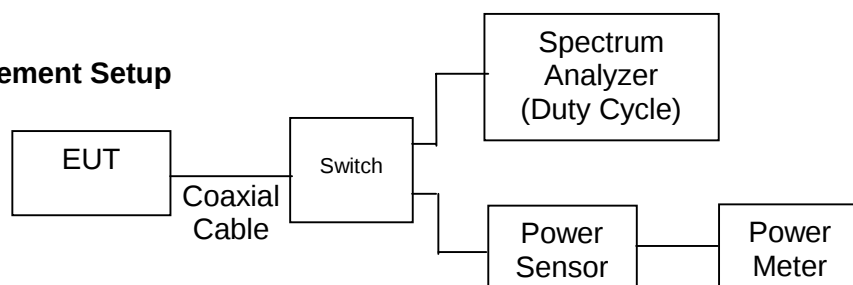

Measurement setup for Transmitter Output Power

Measurement Results for Transmitter Output Power

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 23th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Duty Cycle (%)	Measured on Period (mS)	Measured off Period (mS)	Measured O/P Power (dBm)	Path Loss (dB)	Conducted Power (dBm)
2412 (Ch.1)	5.9	1.18	18.82	19.06	0.5	19.56
2437 (Ch.6)	5.9	1.18	18.82	18.08	0.5	18.58
2462 (Ch.11)	5.9	1.18	18.82	17.08	0.5	17.58

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Duty Cycle (%)	Measured on Period (mS)	Measured off Period (mS)	Measured O/P Power (dBm)	Path Loss (dB)	Conducted Power (dBm)
2412 (Ch.1)	1.89	0.364	18.936	19.50	0.5	20.00
2437 (Ch.6)	1.89	0.364	18.936	18.70	0.5	19.20
2462 (Ch.11)	1.89	0.364	18.936	17.56	0.5	18.06

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Duty Cycle (%)	Measured on Period (mS)	Measured off Period (mS)	Measured O/P Power (dBm)	Path Loss (dB)	Conducted Power (dBm)
2412 (Ch.1)	1.48	0.283	18.817	19.59	0.5	20.09
2437 (Ch.6)	1.48	0.283	18.817	18.42	0.5	18.92
2462 (Ch.11)	1.48	0.283	18.817	17.05	0.5	17.55



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 16 of 69

Specification

Limits

Transmitter Output Power	Watts	dBm
	≤ 1	$\leq +30$

Measurement Uncertainty Output Power

Measurement uncertainty (dB)	± 1.33
------------------------------	------------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-01	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1, PMtr 1, PSnsr 1

Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously

4.2.1.4 Transmitter Power Spectral Density


Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set as follows:

RBW= 3kHz, VBW=100kHz, Suitable Span and Sweep time

Test Measurement Setup



Measurement setup for Transmitter Power Spectral Density

Measurement Results for Transmitter Power Spectral Density

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Radio parameters.

Data Rate(s): 1, 5.5, 11 Mbit/s

Test date: 23th January '03

TABLE OF RESULTS – 1Mbit/s

Center Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Plot #	Path Loss (dB)	Actual Value (dBm)	Limit (dBm)	Margin (dB)
2412 (Ch.1)	-13.50	TUVR03/16	8.5	-5.00	+8.00	13.00
2437 (Ch.6)	-15.33	TUVR03/19	8.5	-6.83	+8.00	14.83
2462 (Ch.11)	-14.83	TUVR03/22	8.5	-6.33	+8.00	14.33

TABLE OF RESULTS – 5.5Mbit/s

Center Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Plot #	Path Loss (dB)	Actual Value (dBm)	Limit (dBm)	Margin (dB)
2412 (Ch.1)	-14.33	TUVR03/17	8.5	-5.83	+8.00	13.83
2437 (Ch.6)	-15.17	TUVR03/20	8.5	-6.67	+8.00	14.67
2462 (Ch.11)	-16.17	TUVR03/23	8.5	-7.67	+8.00	15.67

TABLE OF RESULTS – 11Mbit/s

Center Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Plot #	Path Loss (dB)	Actual Value (dBm)	Limit (dBm)	Margin (dB)
2412 (Ch.1)	-15.00	TUVR03/18	8.5	-6.50	+8.00	14.50
2437 (Ch.6)	-16.83	TUVR03/21	8.5	-8.33	+8.00	16.33
2462 (Ch.11)	-15.83	TUVR03/24	8.5	-7.33	+8.00	15.33



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 18 of 69

Specification

Limits

Transmitter Power	dBm
Spectral Density	
	$\leq +8.0$

Measurement Uncertainty Spectral Density

Measurement uncertainty (dB)	± 1.33
------------------------------	------------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-01	Bar 1, RVA 01, K-CBL 8, K-CBL 10, S-Anlr 1

Note 1: The unit was tested in Tx, Rx and Standby modes simultaneously




4.2.1.5 AC Wireline Conducted Emissions (450KHz – 30MHz)

Test Procedure

The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Setup

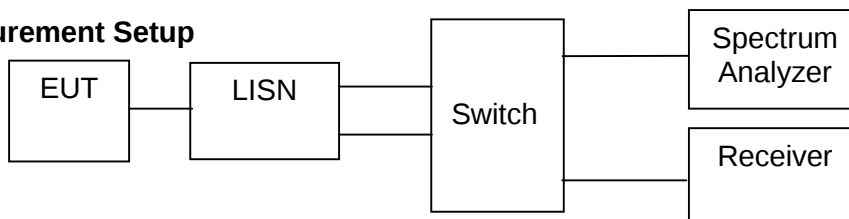

Measurement Results for AC Wireline Conducted Emissions (450KHz – 30MHz)

The EUT was found to comply to the limits of FCC Part 15, Subpart C and RSS-210 with a margin of 13.95dB. The six highest emissions relative to the limit are reported for two modes of operation. Spectrum analyzer pre-scan data plots are held in the laboratory for reference purposes.

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Test date: 28/29th January '03

EUT **SNP2400**, Ch 6 (2,437MHz), Tx/Rx/Standby Mode1Mbit/s

Frequency (MHz)	QP Voltage (dBμV)	QP Limit (dBμV)	QP Voltage (μV)	QP Limit (μV)	Phase
0.450	29.81	48	30.94	250	LINE 1
0.458	30.24	48	32.51	250	NEUTRAL
29.470	33.86	48	49.32	250	NEUTRAL
29.724	33.05	48	44.93	250	LINE 1
29.744	33.56	48	47.64	250	LINE 1
29.804	34.05	48	50.41	250	NEUTRAL



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 20 of 69

EUT **SNP2400**, Ch 6 (2,437MHz), Receive only mode

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.474	30.84	48	34.83	250	NEUTRAL
29.612	27.05	48	22.52	250	LINE 1
29.656	30.45	48	33.30	250	LINE 1
29.676	30.48	48	33.42	250	LINE 1
29.680	30.05	48	31.81	250	NEUTRAL
29.908	31.05	48	35.69	250	NEUTRAL

Note 1: Two separate configurations were tested: Tx/Rx/Standby mode and receive only mode

Photographs of the test setup are provided in Section 5.1 'AC WIRELINE CONDUCTED EMISSION TEST SETUP'

Specification

Measurement Uncertainty Spectral Density

Measurement uncertainty (dB)	± 2.64
------------------------------	------------

Traceability


METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-EMC-01	Bar 1, LMT1, 15F50B001, 15F50B002, LISN1, ReCVR1

4.2.1.6 Restricted Bands Radiation (30MHz – 1GHz)

Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. A notch filter was used to remove the fundamental frequency, see Notch Filter Response plots 38-41 in Section 6, Graphical Results. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz on the Open Area Test Site (OATS). The highest emissions relative to the limit are listed. A photograph of the product tested at the OATS site is available, see Section 5.2.

Test Measurement Setup

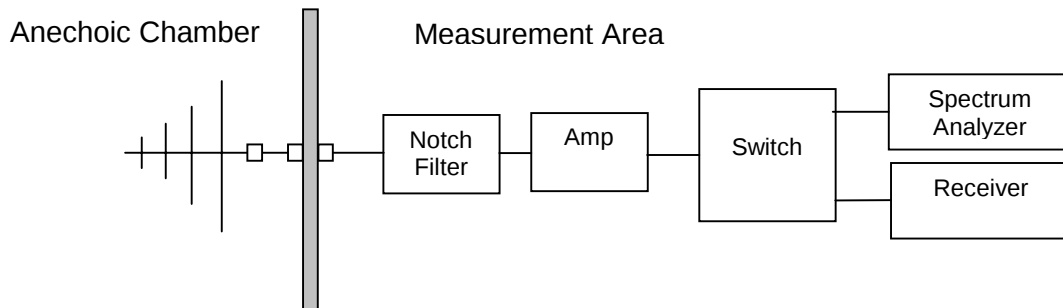

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB, Cable Loss of 1.3dB, an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 \log (\text{Level } (\mu\text{V/m)})$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}.$$



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 22 of 69

Measurement Results for Restricted Bands Radiation (30MHz – 1GHz)

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Test date: Pre-scans 25th/26th January '03 and OATS 7th February '03

EUT SNP2400, Ch 1 (2,412MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (QP)	Limit (dBμV/m) (QP)	Field Strength (μV/m) (QP)	Limit (μV/m) (QP)
210.99	V	9.90	9.20	15.9	17.34	26.54	43.5	21.23	150
307.98	H	9.97	8.37	14.1	16.07	24.44	46.0	16.67	200
307.98	V	21.23	19.51	14.5	16.47	35.98	46.0	62.95	200
351.99	V	17.60	14.89	15.3	17.43	32.32	46.0	41.30	200
373.99	V	16.38	13.34	15.8	17.93	31.27	46.0	36.60	200
571.99	V	15.50	12.57	19.1	22.00	34.57	46.0	53.52	200
835.99	V	14.54	14.17	21.6	25.57	39.74	46.0	97.05	200

EUT SNP2400, Ch 6 (2,437MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (QP)	Limit (dBμV/m) (QP)	Field Strength (μV/m) (QP)	Limit (μV/m) (QP)
263.99	V	15.57	12.50	12.9	14.57	27.07	46.0	22.57	200
308.00	V	20.86	19.53	14.1	16.07	35.60	46.0	60.26	200
352.00	V	17.46	14.91	15.3	17.43	32.34	46.0	41.40	200
374.00	V	16.22	13.63	15.8	17.93	31.56	46.0	37.84	200
395.98	V	17.27	14.41	16.6	18.86	33.27	46.0	46.08	200
572.00	V	15.73	11.58	19.1	22.00	33.58	46.0	47.75	200

EUT SNP2400, Ch 11 (2,462MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (QP)	Limit (dBμV/m) (QP)	Field Strength (μV/m) (QP)	Limit (μV/m) (QP)
264.00	V	16.10	12.90	12.9	14.57	27.47	46.0	23.63	200
308.00	V	20.12	19.18	14.1	16.07	35.25	46.0	57.88	200
351.96	V	16.77	14.88	15.3	17.43	32.31	46.0	41.26	200
373.98	V	16.50	13.70	15.8	17.93	31.63	46.0	38.15	200
395.99	V	18.43	15.57	16.6	18.86	34.43	46.0	52.66	200
571.99	V	14.66	11.37	19.1	22.00	33.37	46.0	46.61	200



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 23 of 69

EUT SNP2400, Ch 6 (2,437MHz), Receive Mode 1Mbit/s

Frequency (MHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV/m) (QP)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (QP)	Limit (dBμV/m) (QP)	Field Strength (μV/m) (QP)	Limit (μV/m) (QP)
219.99	V	11.3	9.9	16.3	17.74	27.64	46.0	24.10	200
307.99	V	22.24	19.17	14.1	16.07	35.24	46.0	57.81	200
373.98	V	17.34	13.48	15.8	17.93	31.41	46.0	37.20	200
396.02	V	19.08	17.44	16.6	18.86	36.3	46.0	65.31	200
571.99	V	15.48	13.01	19.1	22.0	35.01	46.0	56.30	200
593.98	V	15.17	10.12	19.5	22.39	32.51	46.0	42.22	200

Measurement Uncertainty Radiated Emissions

Measurement uncertainty (dB)	+5.6 / -4.5
------------------------------	-------------

Traceability


METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-EMC-07	Bar 1, Notch, AMP 3, ANT 1, K-Cbl 11, 10F50N003, 15F50N001, 5F50N001, ReCVR1, SSwpr 1, PSnsr 3

4.2.1.7 Restricted Bands Radiation (1GHz-25GHz)

Test Procedure

Radiated emissions were measured in the frequency range 1GHz to 25GHz in transmitting mode and 1GHz to 12.5GHz in receiving mode. All tests were performed in the anechoic chamber at a 1-meter distance on both horizontal and vertical polarities and extrapolated to 3m. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of azimuth by rotation through 360°. The six highest emissions relative to the limit are listed. A notch filter was used to remove the fundamental frequency, see Notch Filter Response plots 38-41 in Section 6, Graphical Results. After notch filter cut-off waveguide were utilized as high-pass filters from 12.75-25GHz. Frequencies not covered by the 'Restricted Bands of Operation' are compared to the fundamental carrier per 47 CFR 15.247(c).

Test Measurement Setup

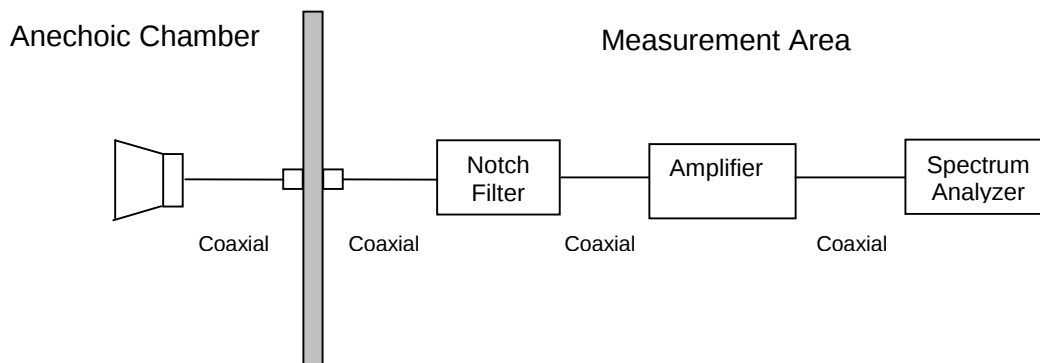

Measurement setup for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss

For example:

Given a Receiver input reading of 51.5dBμV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dBμV/m (or dBμV) and μV/m (or μV) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 \log (\text{Level (}\mu\text{V/m)})$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}.$$



Measurement Results for Restricted Bands Radiation (1GHz - 25GHz)

Ambient conditions.

Temperature: 17 to 22 °C

Relative humidity: 34 to 65%

Pressure: 999 to 1012 mbar

Test date: 25th/26th January '03

Results for Variant SNP2400

EUT SNP2400, Ch 1 (2,412MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (peak)	FCC/IC Limit (dBμV/m)	Field Strength (dBμV/m) (average)	NRB/OB*
1.013	V	38.4	-	24.9	-27.0	36.30	54.0	-	-
2.244	V	39.8	-	30.0	-22.44	47.36	54.0	-	-
2.266	V	38.9	-	30.0	-22.44	46.46	54.0	-	-
4.824	V	37.5	-	33.7	-16.38	53.88	54.0	-	-
2.038	H	39.0	-	29.1	-24.38	43.72	54.0	-	-
2.244	H	36.3	-	30.0	-22.44	43.86	54.0	-	-
2,412	V	60.67	-	30.7	8.0	99.37	OB*	-	OB*
2,412	H	63.33	-	30.7	8.0	102.03	OB*	-	OB*

EUT SNP2400, Ch 6 (2,437MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (peak)	FCC/IC Limit (dBμV/m)	Field Strength (dBμV/m) (average)	NRB/OB*
1.013	V	39.5	-	24.9	-27.0	37.4	54.0	-	-
2.063	V	42.3	-	28.9	-24.38	46.82	54.0	-	-
2.244	V	38.7	-	30.0	-22.44	46.26	54.0	-	-
2.063	H	43.0	-	29.1	-24.38	47.72	54.0	-	-
2.223	H	38.9	-	30.0	-22.44	46.46	54.0	-	-
2.244	H	40.9	-	30.0	-22.44	48.46	54.0	-	-
2.437	V	57.5	-	30.7	8.0	96.2	OB*	-	OB*
2.437	H	61.17	-	30.7	8.0	99.87	OB*	-	OB*



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 26 of 69

EUT SNP2400, Ch 11 (2,462MHz), Tx/Rx/Standby Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (peak)	FCC/IC Limit (dBμV/m)	Field Strength (dBμV/m) (average)	NRB/OB*
1.012	V	40.8	-	24.9	-27.00	38.70	54.0	-	-
1.496	V	39.4	-	26.7	-26.17	40.08	54.0	-	-
1.503	V	39.2	-	26.7	-25.94	39.96	54.0	-	-
2.088	V	45.2	-	28.9	-24.38	49.72	-	-	NRB*
2.088	H	43.3	-	29.1	-24.38	48.12	-	-	NRB*
2.245	H	40.2	-	30.0	-22.44	47.76	54.0	-	-
2.462	V	63.0	-	30.7	8.0	101.70	OB*	-	OB*
2.462	H	59.7	-	30.7	8.0	98.37	OB*	-	OB*

EUT SNP2400, Ch 6 (2,437MHz), Receive Mode 1Mbit/s

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB)	Correction Factor (dB)	Field Strength (dBμV/m) (peak)	FCC/IC Limit (dBμV/m)	Field Strength (dBμV/m) (average)	NRB/OB*
1.012	V	34.8	-	24.9	-27.0	32.7	54.0	-	-
1.056	V	30.5	-	24.9	-27.0	28.4	54.0	-	-
1.144	V	31.5	-	25.3	-27.22	29.58	54.0	-	-
1.364	V	30.2	-	25.7	-26.57	29.33	54.0	-	-
1.497	V	30.0	-	26.7	-26.02	30.68	54.0	-	-
1.540	V	31.0	-	26.7	-25.94	31.76	54.0	-	-

***Note:** OB implies Operational Band (2,400 2,462MHz); in this case the limit +20dBm was measured with a power meter

NRB implies "Non Restricted Bands of Operation"

Frequencies not covered by the 'Restricted Bands of Operation' are compared to the fundamental carrier per 47 CFR 15.247(c). 'OB' – Operational Band in the matrix identifies the fundamental carrier.

The Notch Filter Response plots 38-41 are available in Section 6, Graphical Results

Measurement Uncertainty Radiated Emissions


Measurement uncertainty (dB)	+5.6/ -4.5
------------------------------	------------

Traceability

METHOD	TEST EQUIPMENT USED
Measurements were made per work instruction WI-EMC-07	Bar 1, Notch, AMP 3, ANT 1, K-Cbl 11, 10F50N003, 15F50N001, 5F50N001, ReCVR1, SSwpr 1, Pmtr 1, PSnr 3

5 Photographs

5.1 AC WIRELINE CONDUCTED EMISSION TEST SETUP

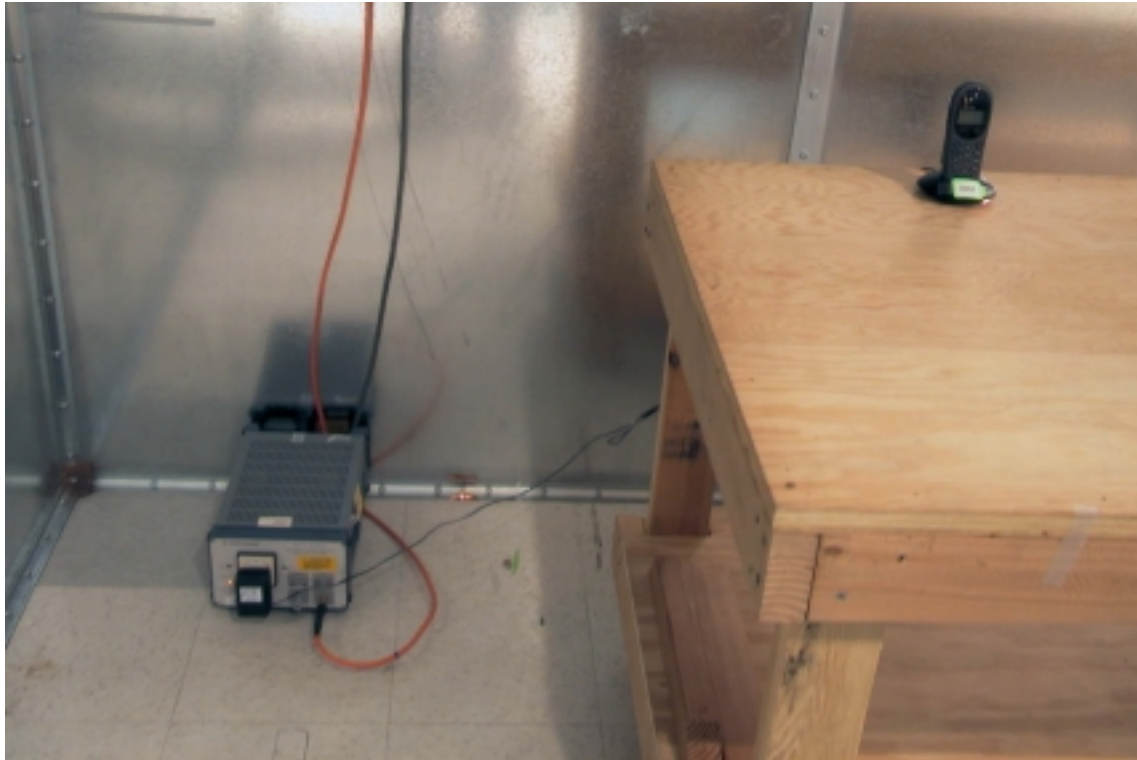

5.2 RESTRICTED BANDS RADIATION (30MHz – 1GHz)








6 Graphical Results


This report contains the following plots as referenced in the test results section


BANDWIDTH AT 6dB	BAND-EDGE
TUVR03/01	TUVR03/10
TUVR03/02	TUVR03/11
TUVR03/03	TUVR03/12
TUVR03/04	TUVR03/13
TUVR03/05	TUVR03/14
TUVR03/06	TUVR03/15
TUVR03/07	
TUVR03/08	
TUVR03/09	
SPECTRAL POWER DENSITY	OCCUPIED BANDWIDTH 20dB
TUVR03/16	TUVR03/25
TUVR03/17	TUVR03/26
TUVR03/18	TUVR03/27
TUVR03/19	TUVR03/28
TUVR03/20	TUVR03/29
TUVR03/21	TUVR03/30
TUVR03/22	TUVR03/31
TUVR03/23	TUVR03/32
TUVR03/24	TUVR03/33
CONDUCTED EMISSIONS	NOTCH FILTER RESPONSE
TUVR03/34	TUVR03/38
TUVR03/35	TUVR03/39
TUVR03/36	TUVR03/40
TUVR03/37	TUVR03/41

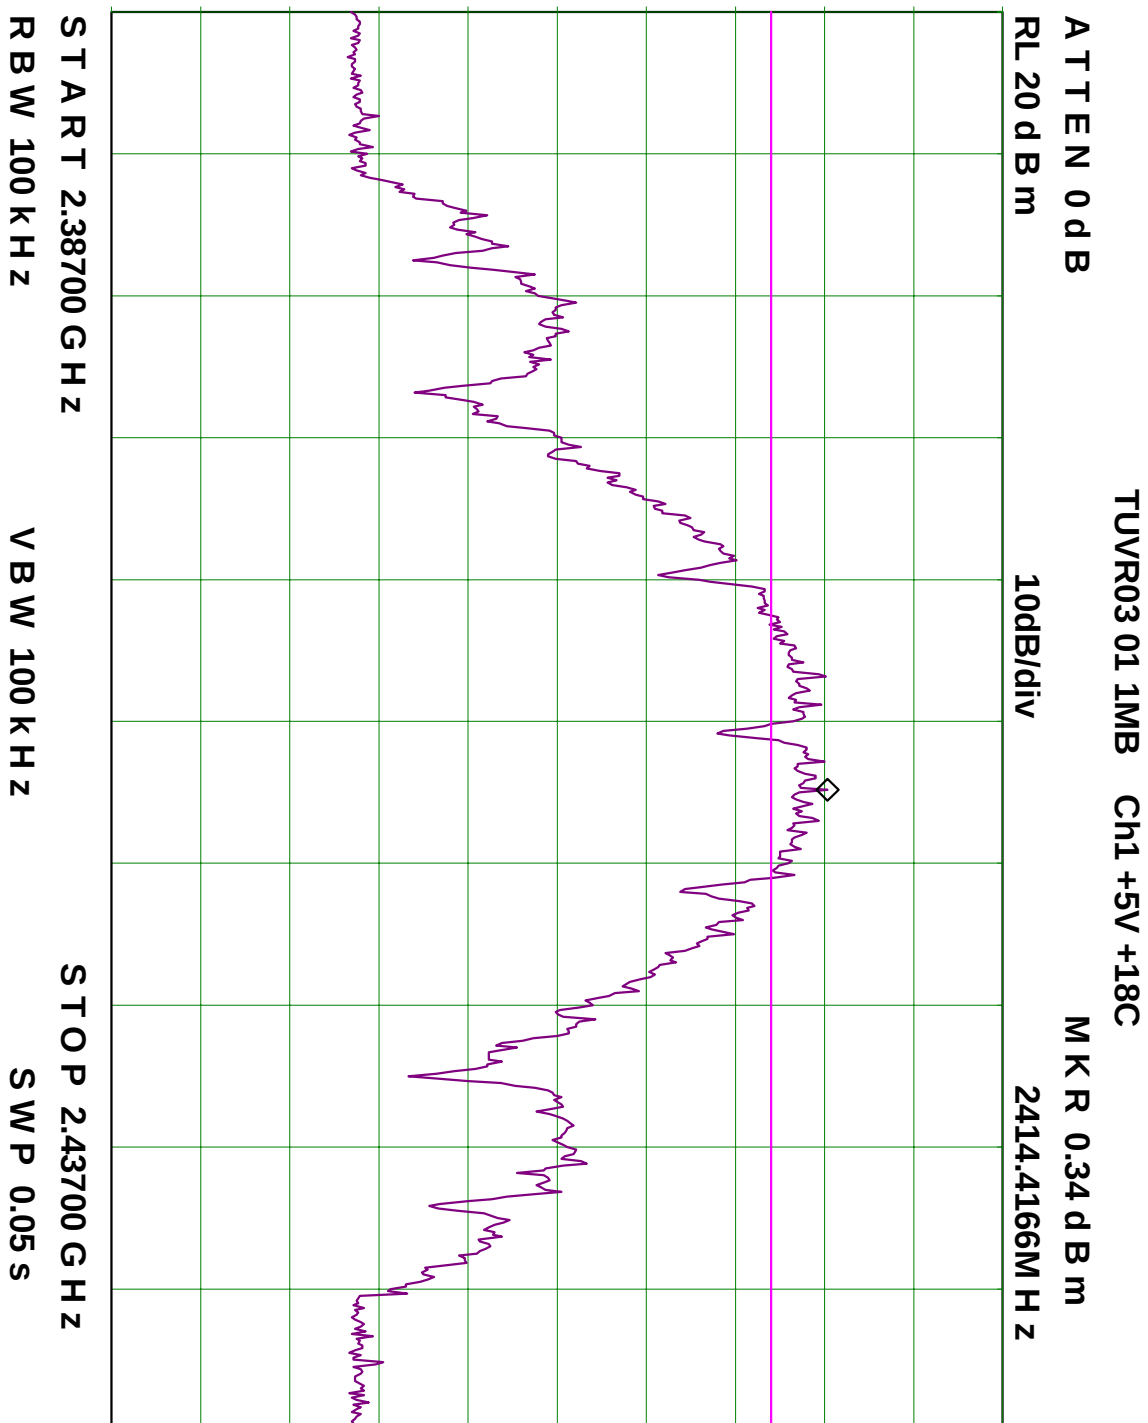


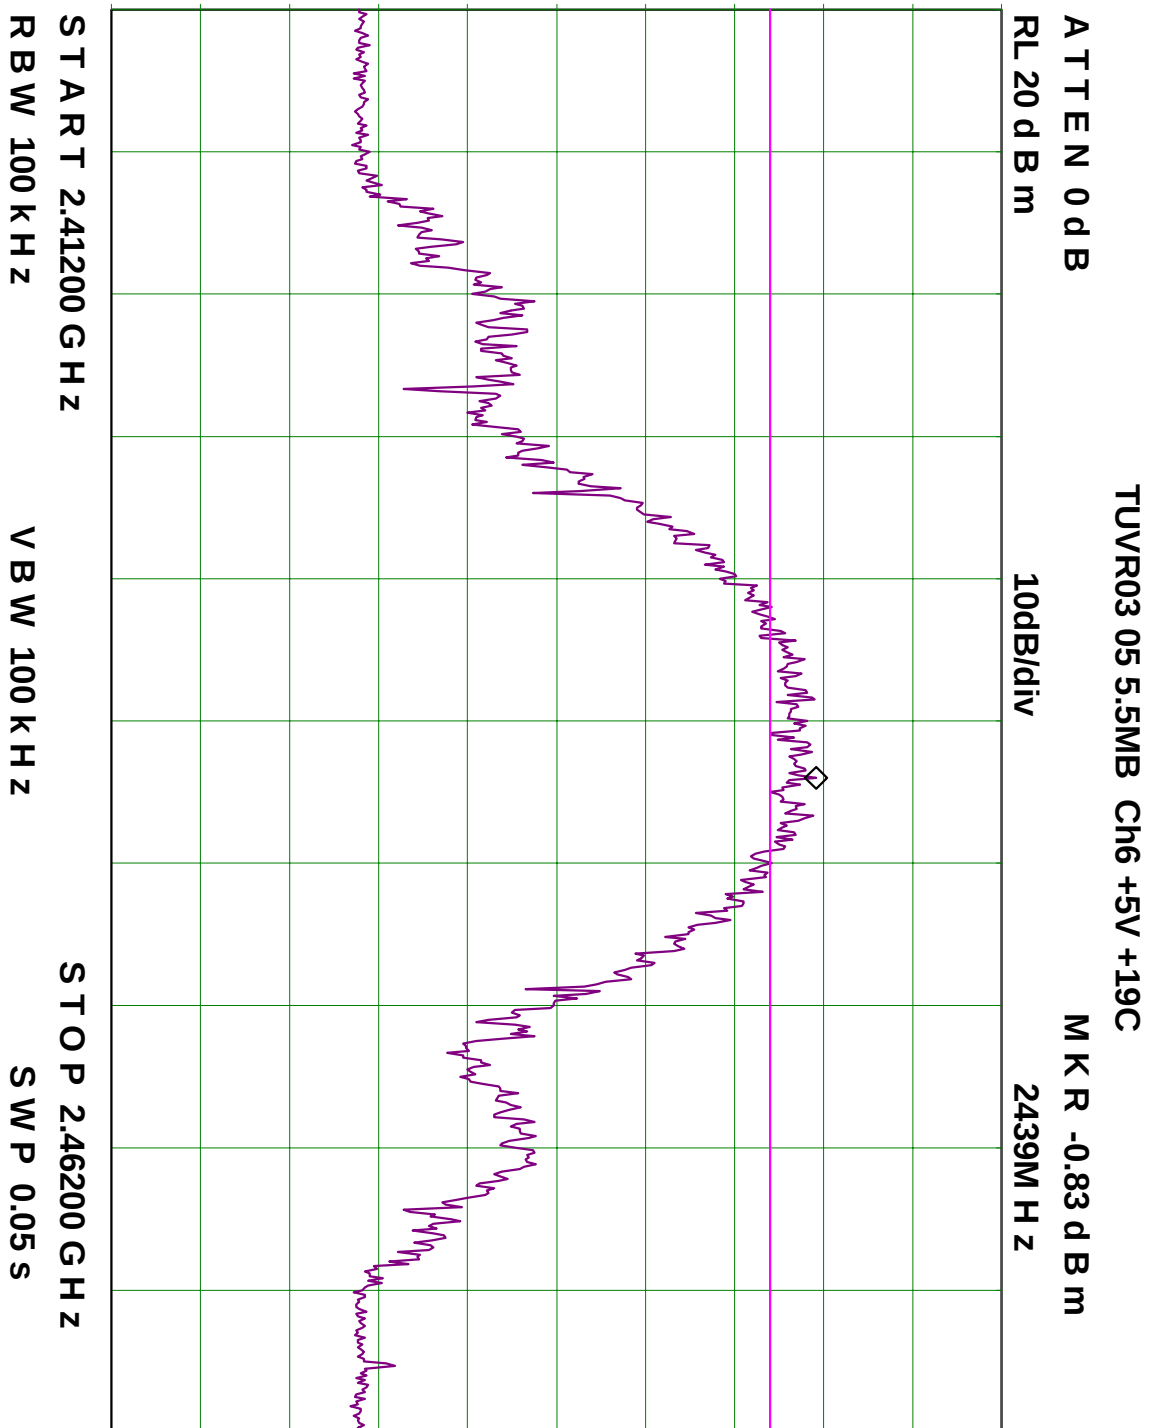


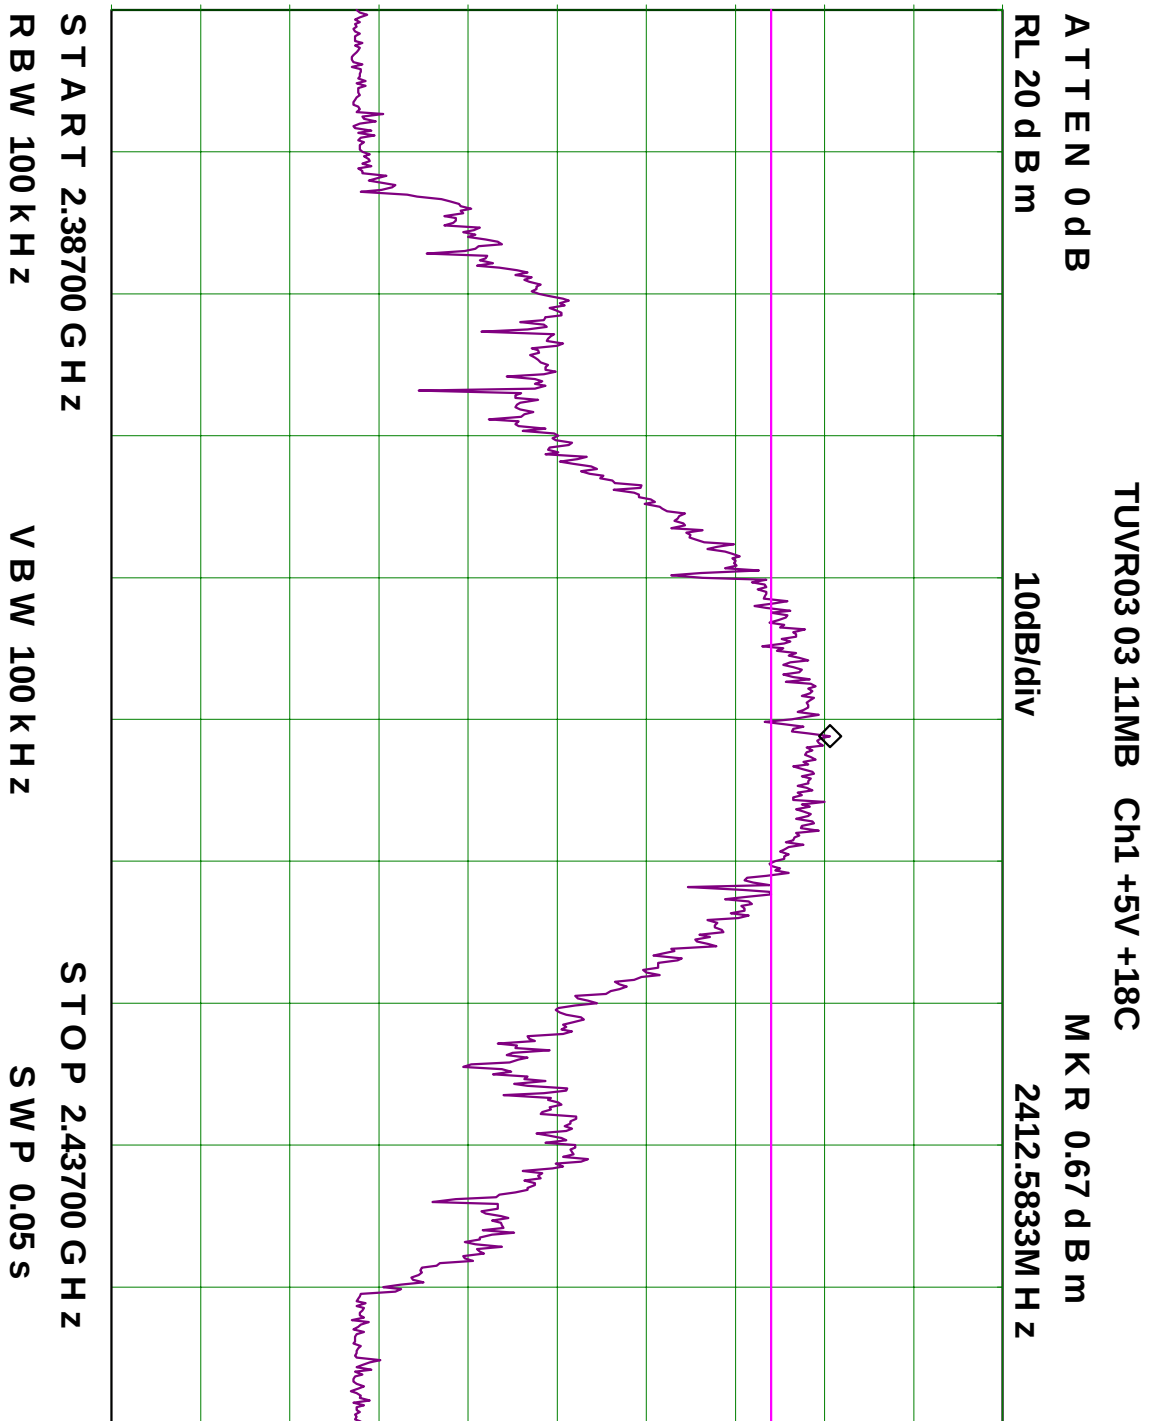


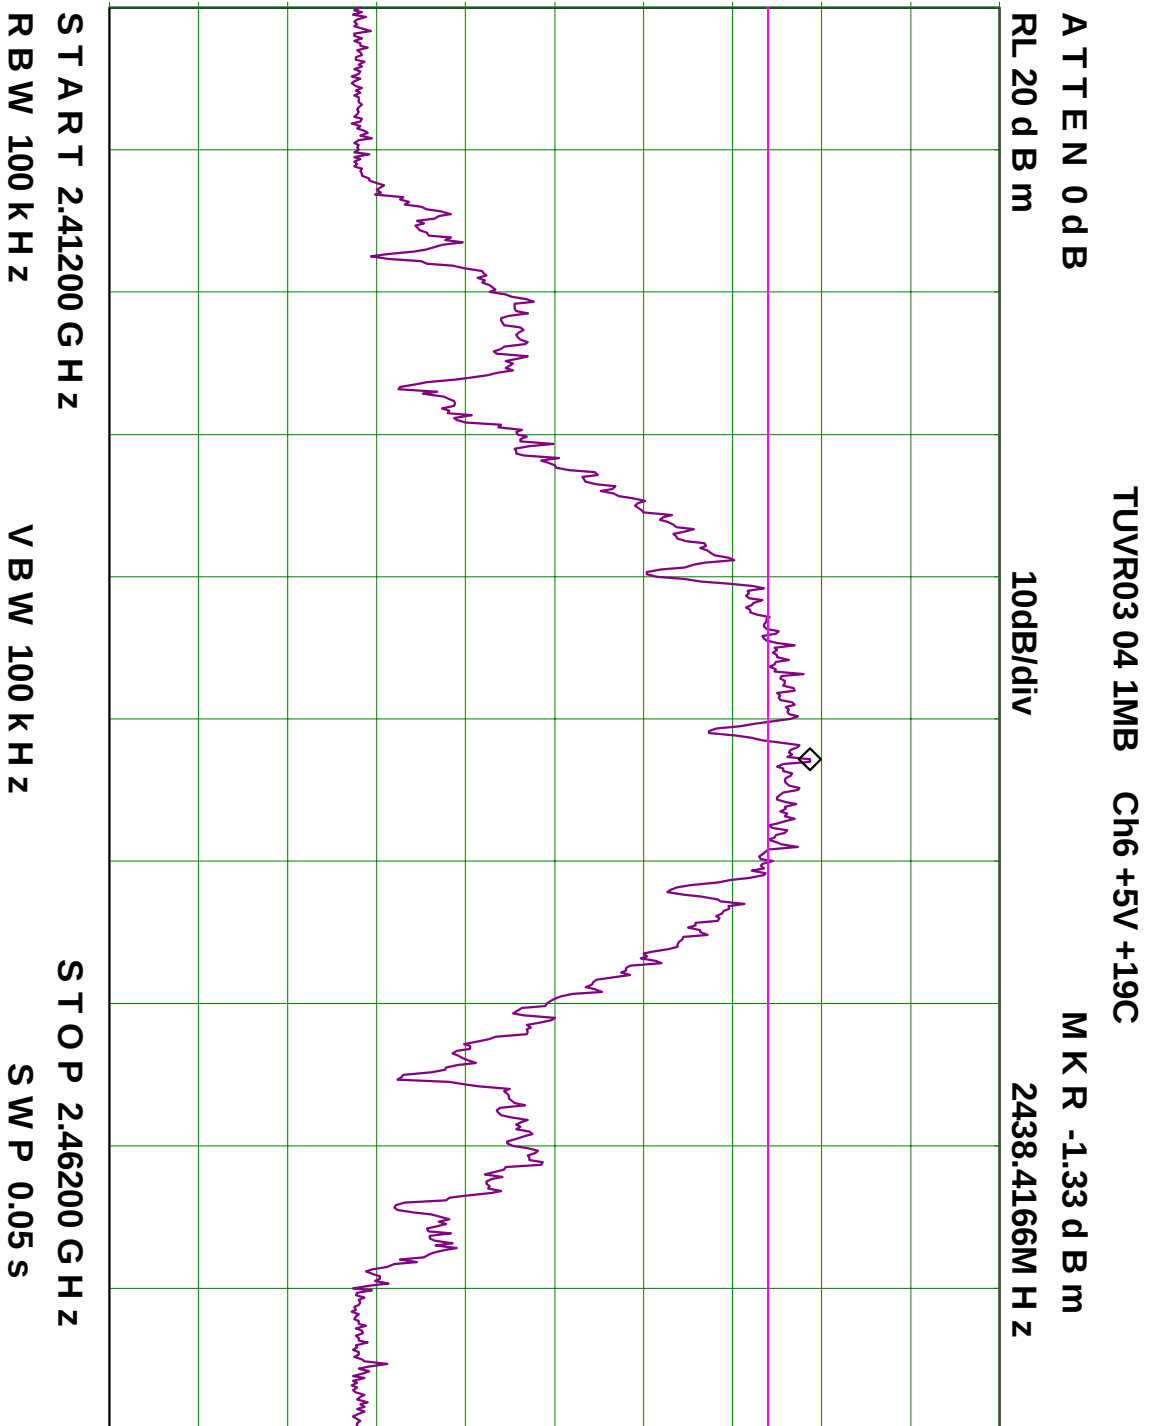


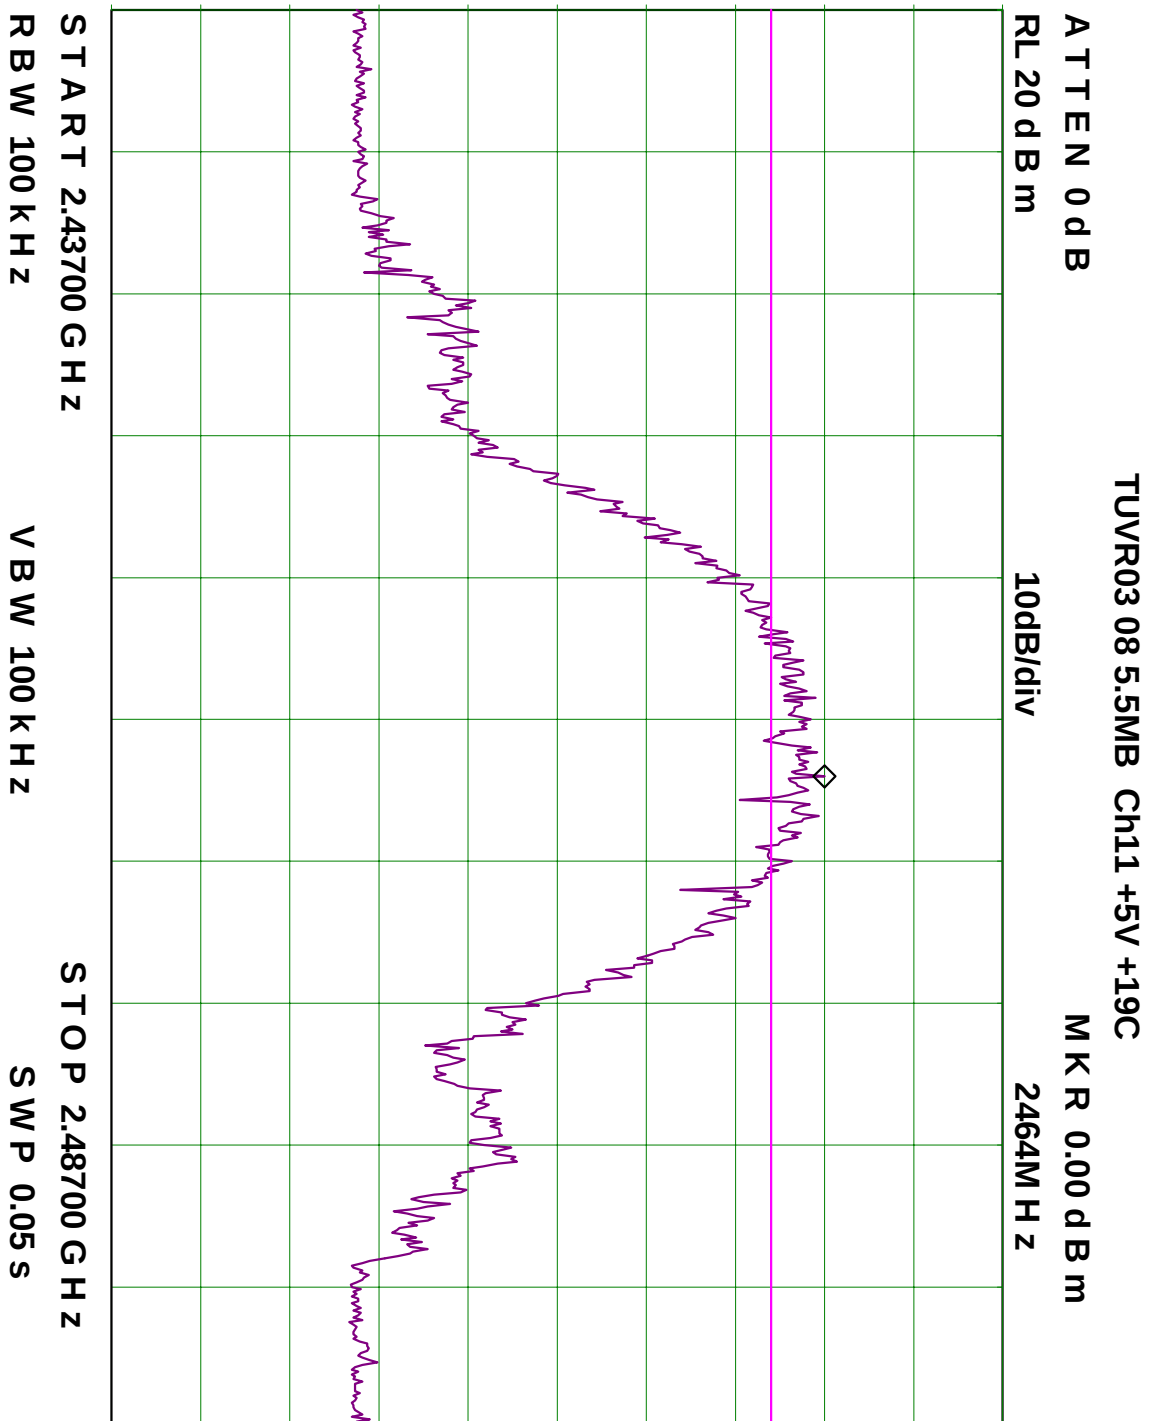


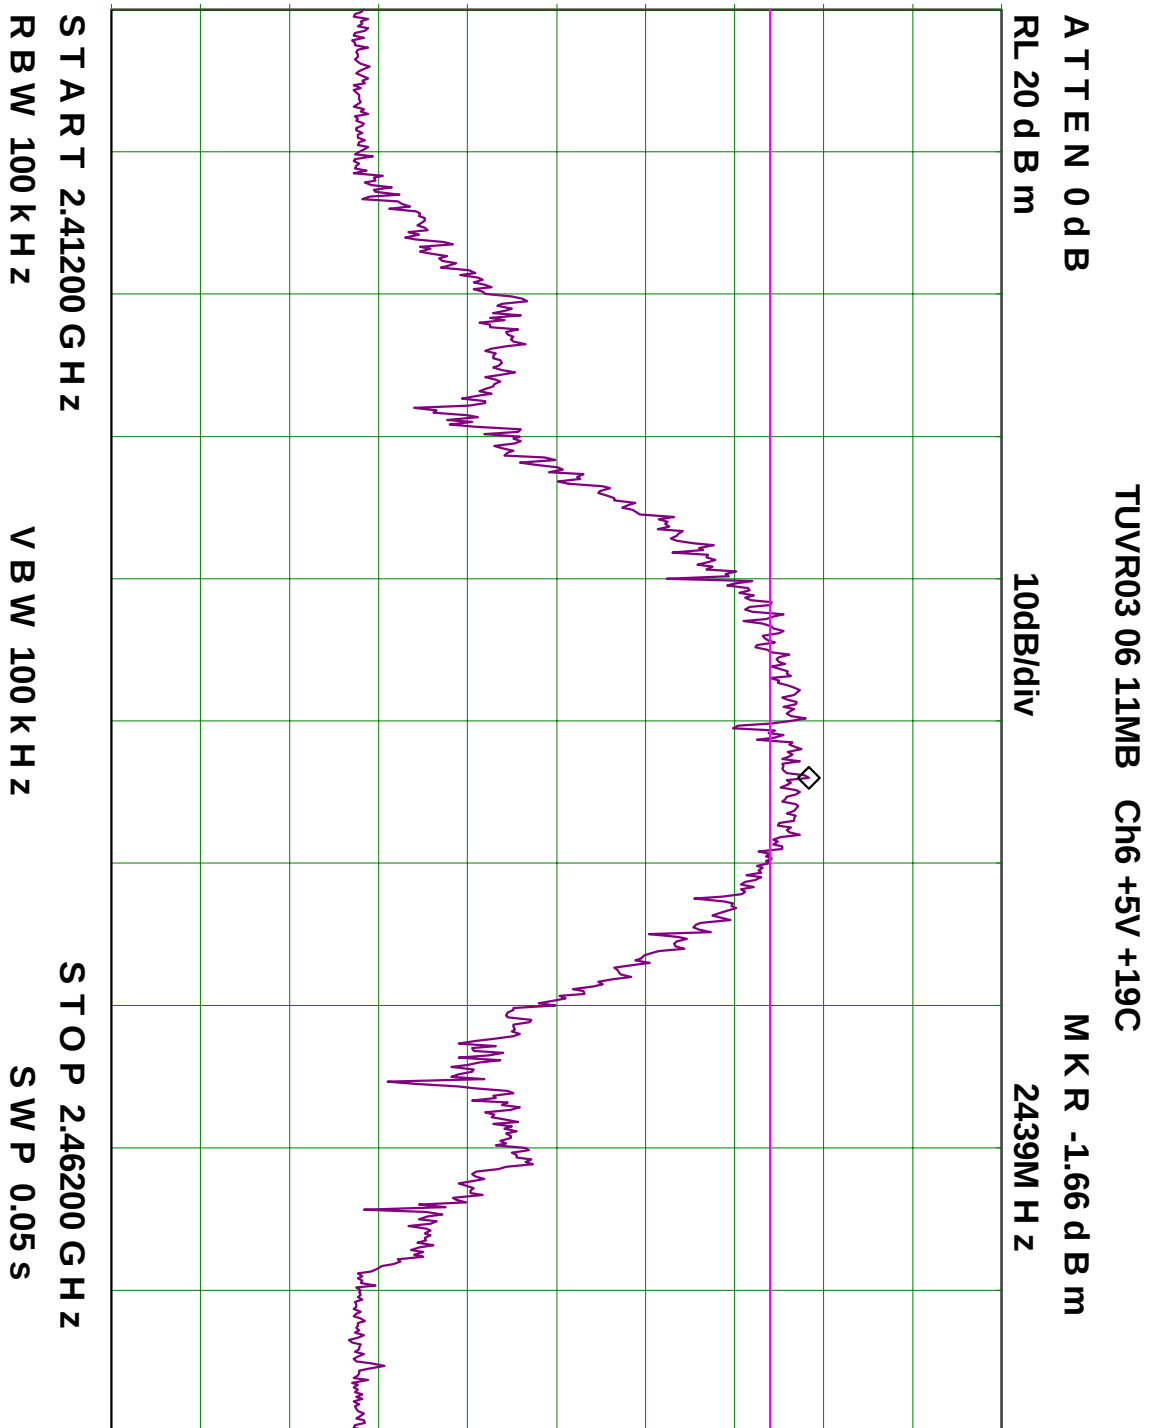


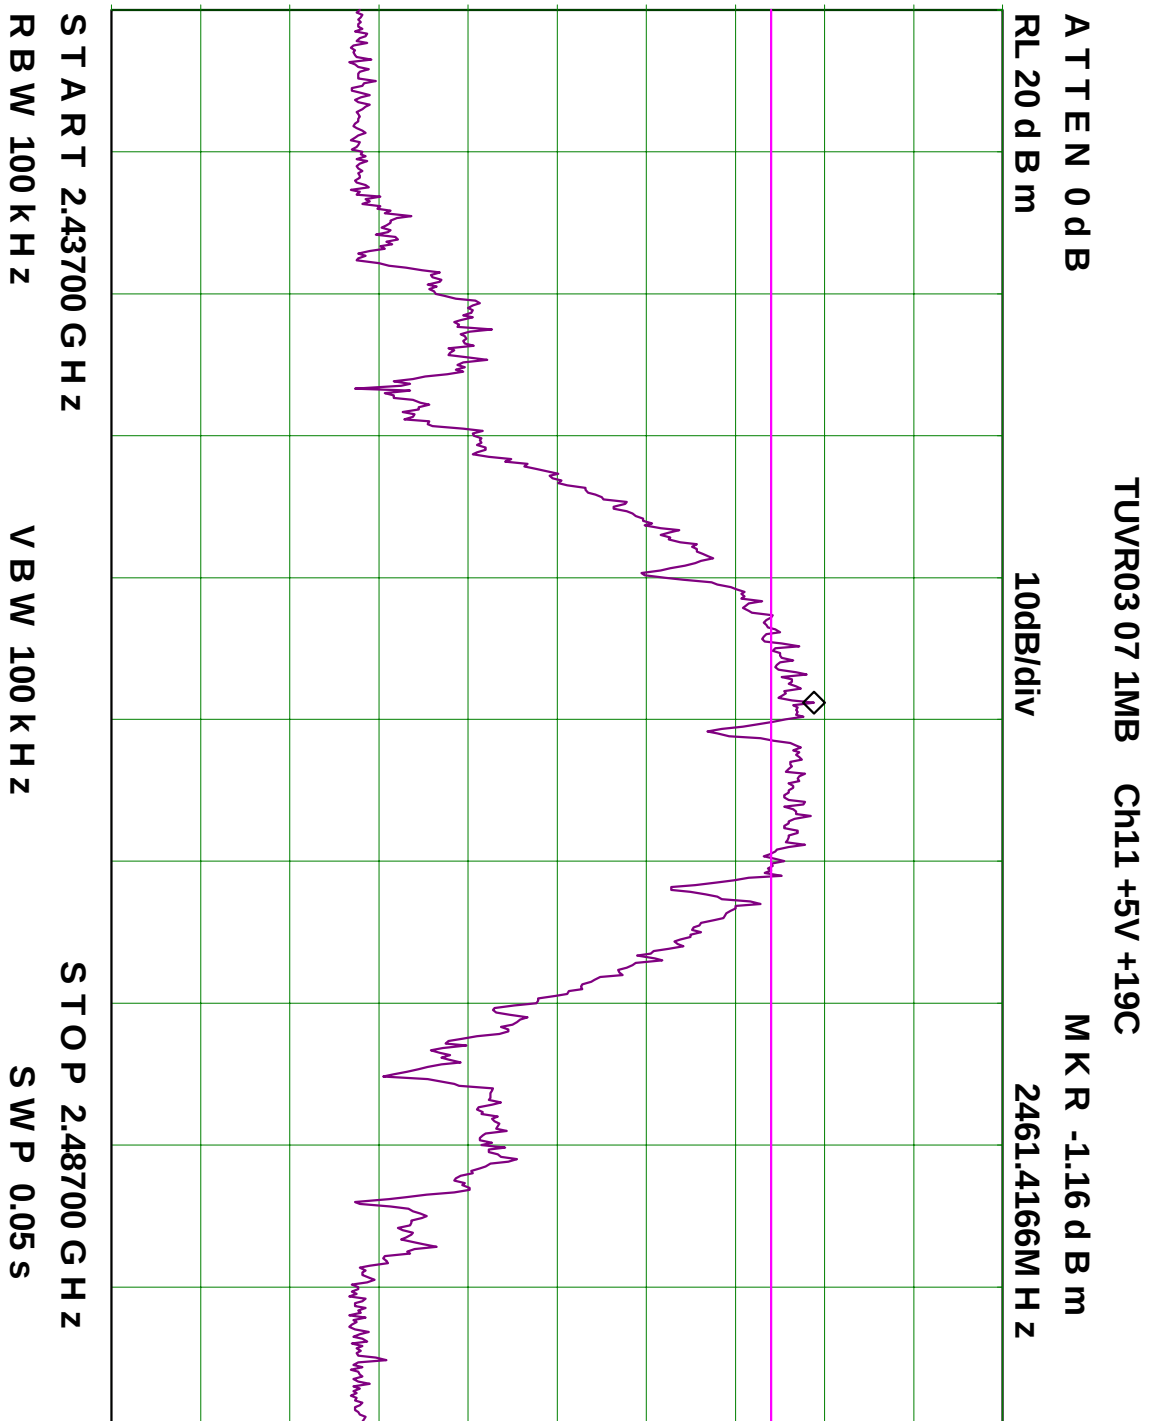


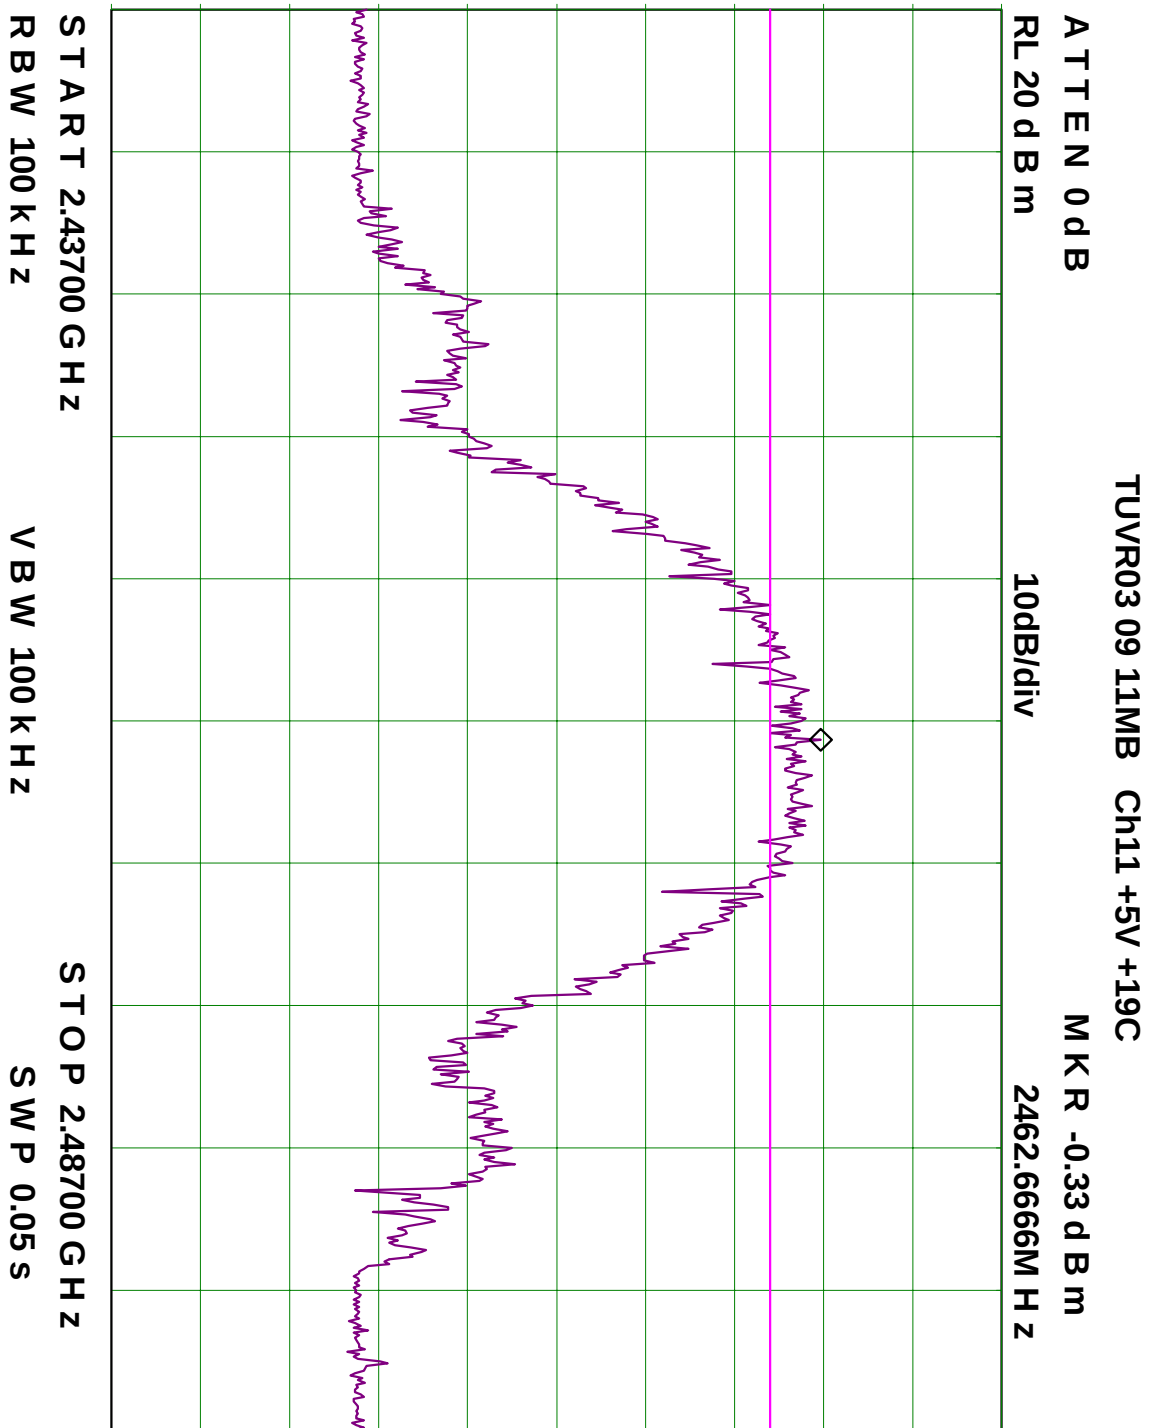


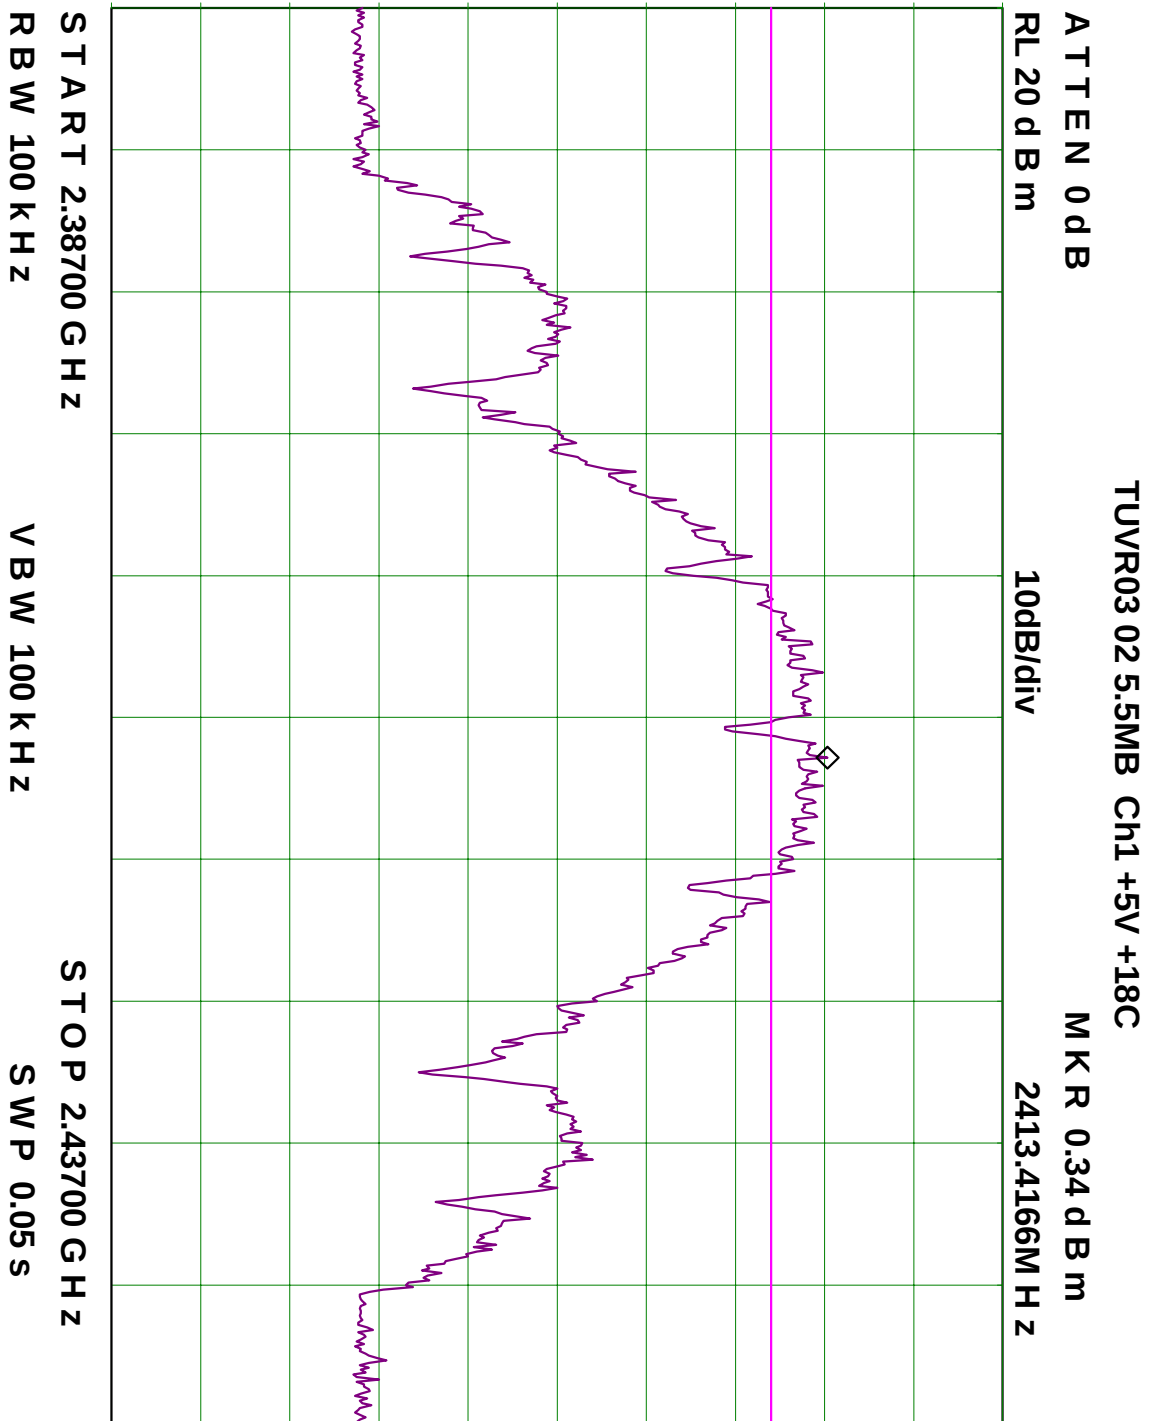


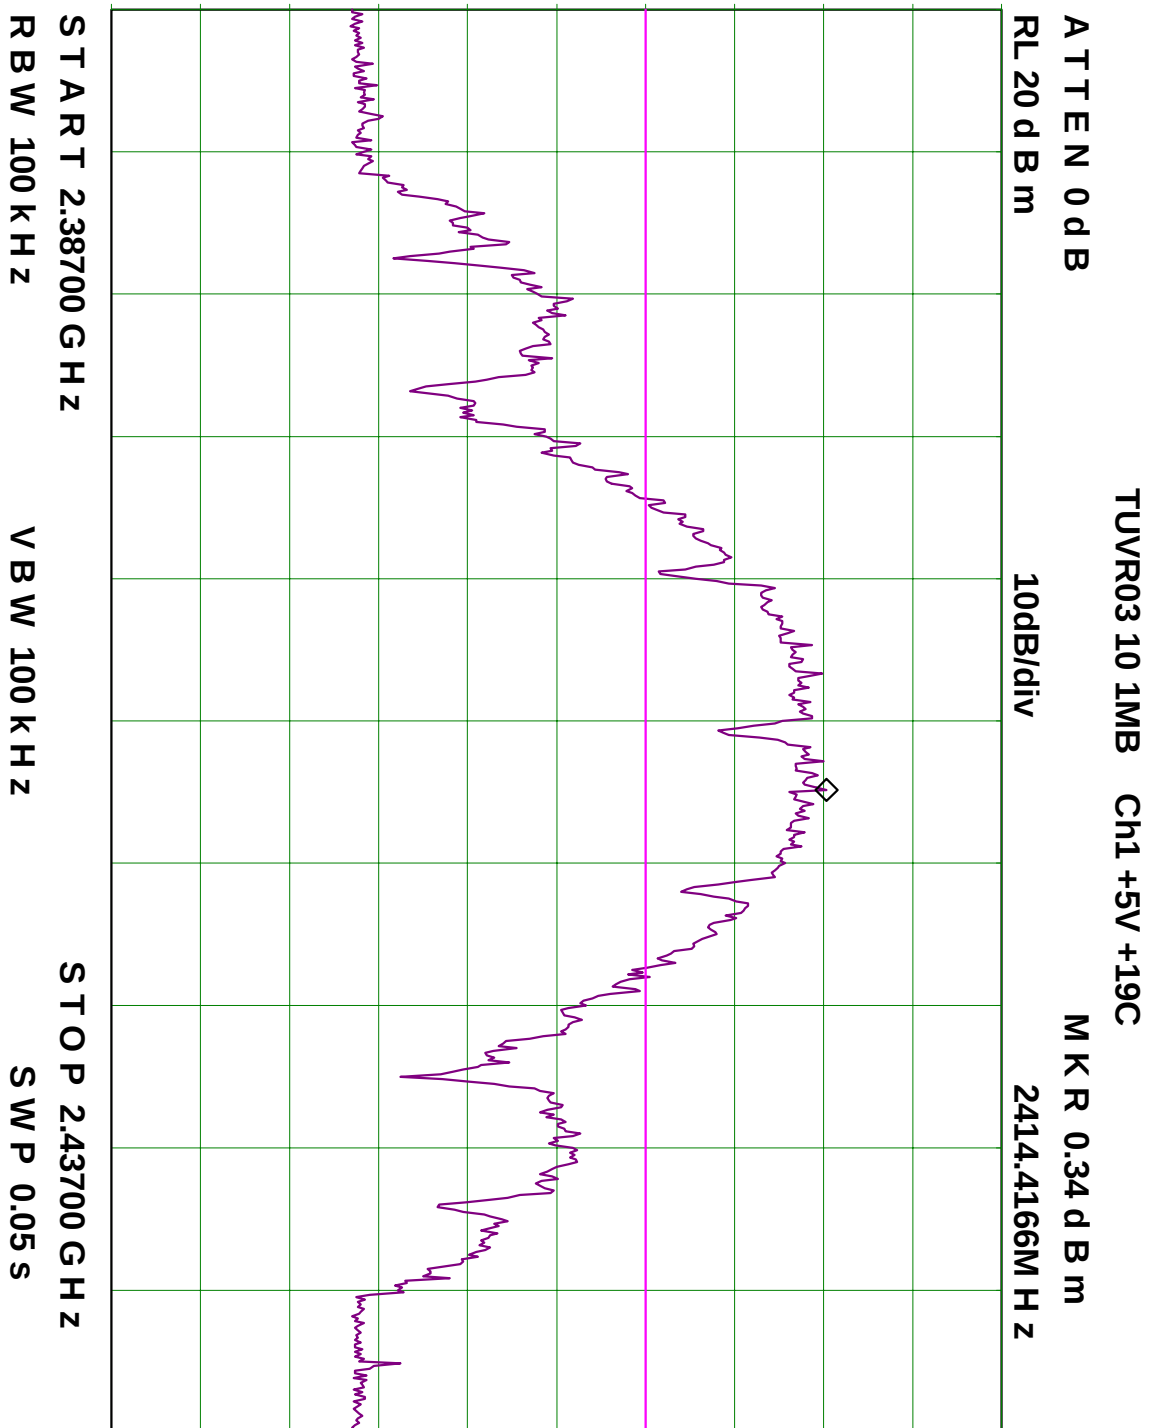


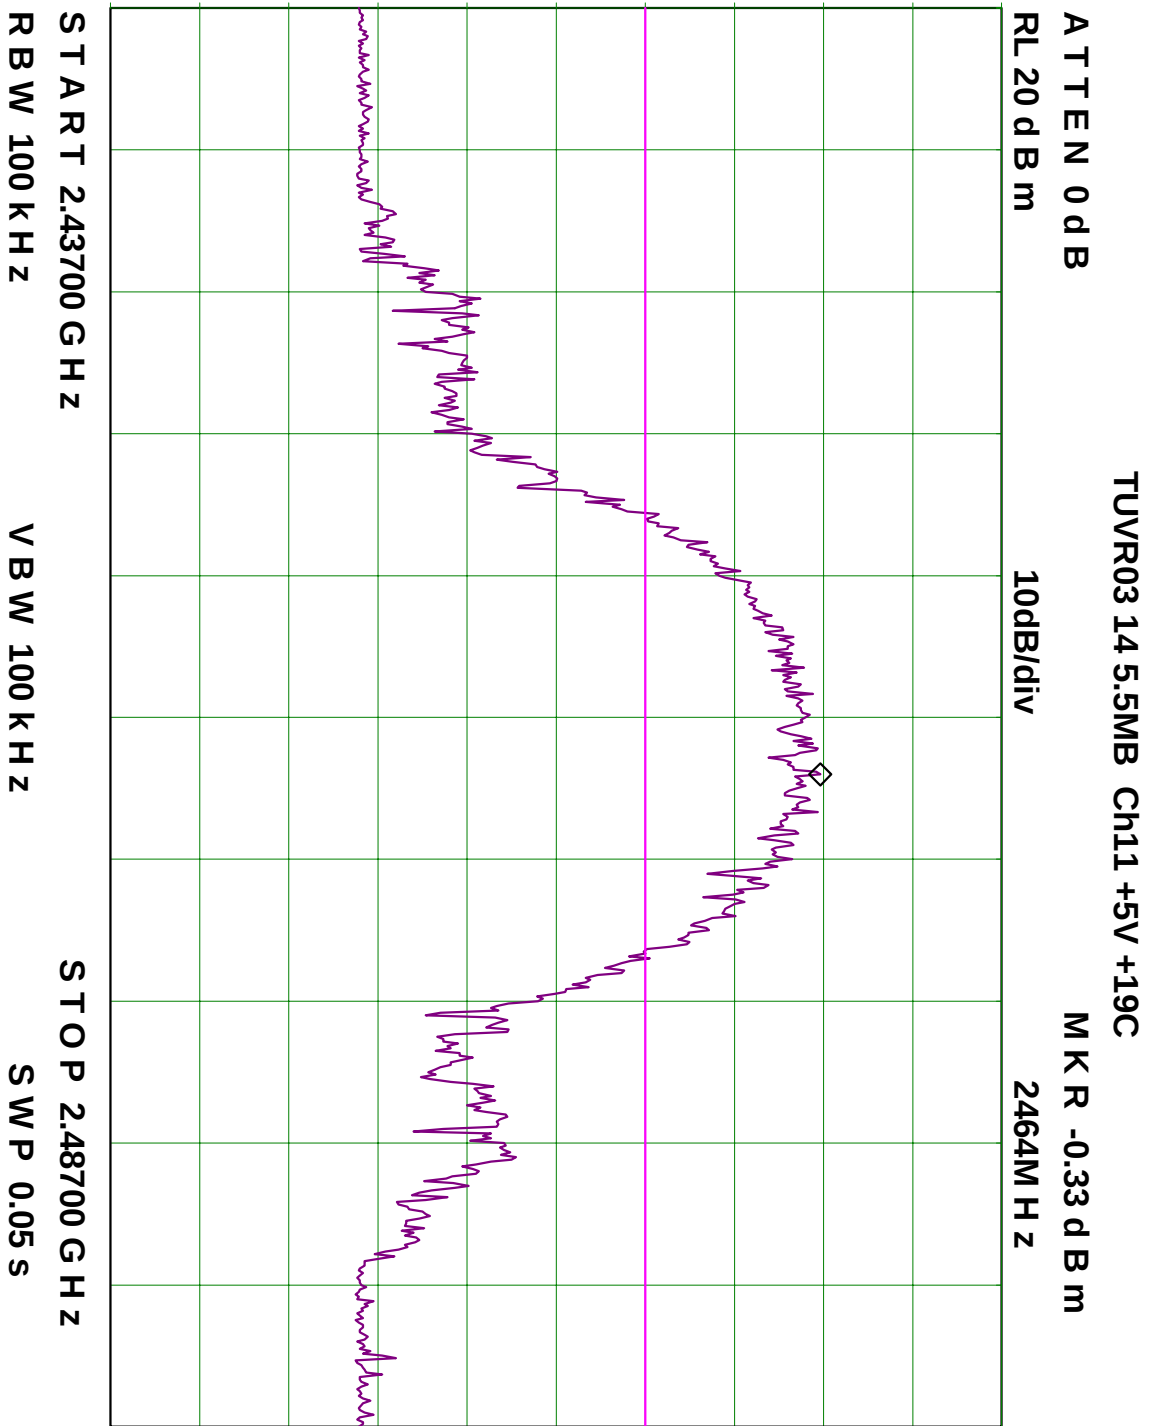


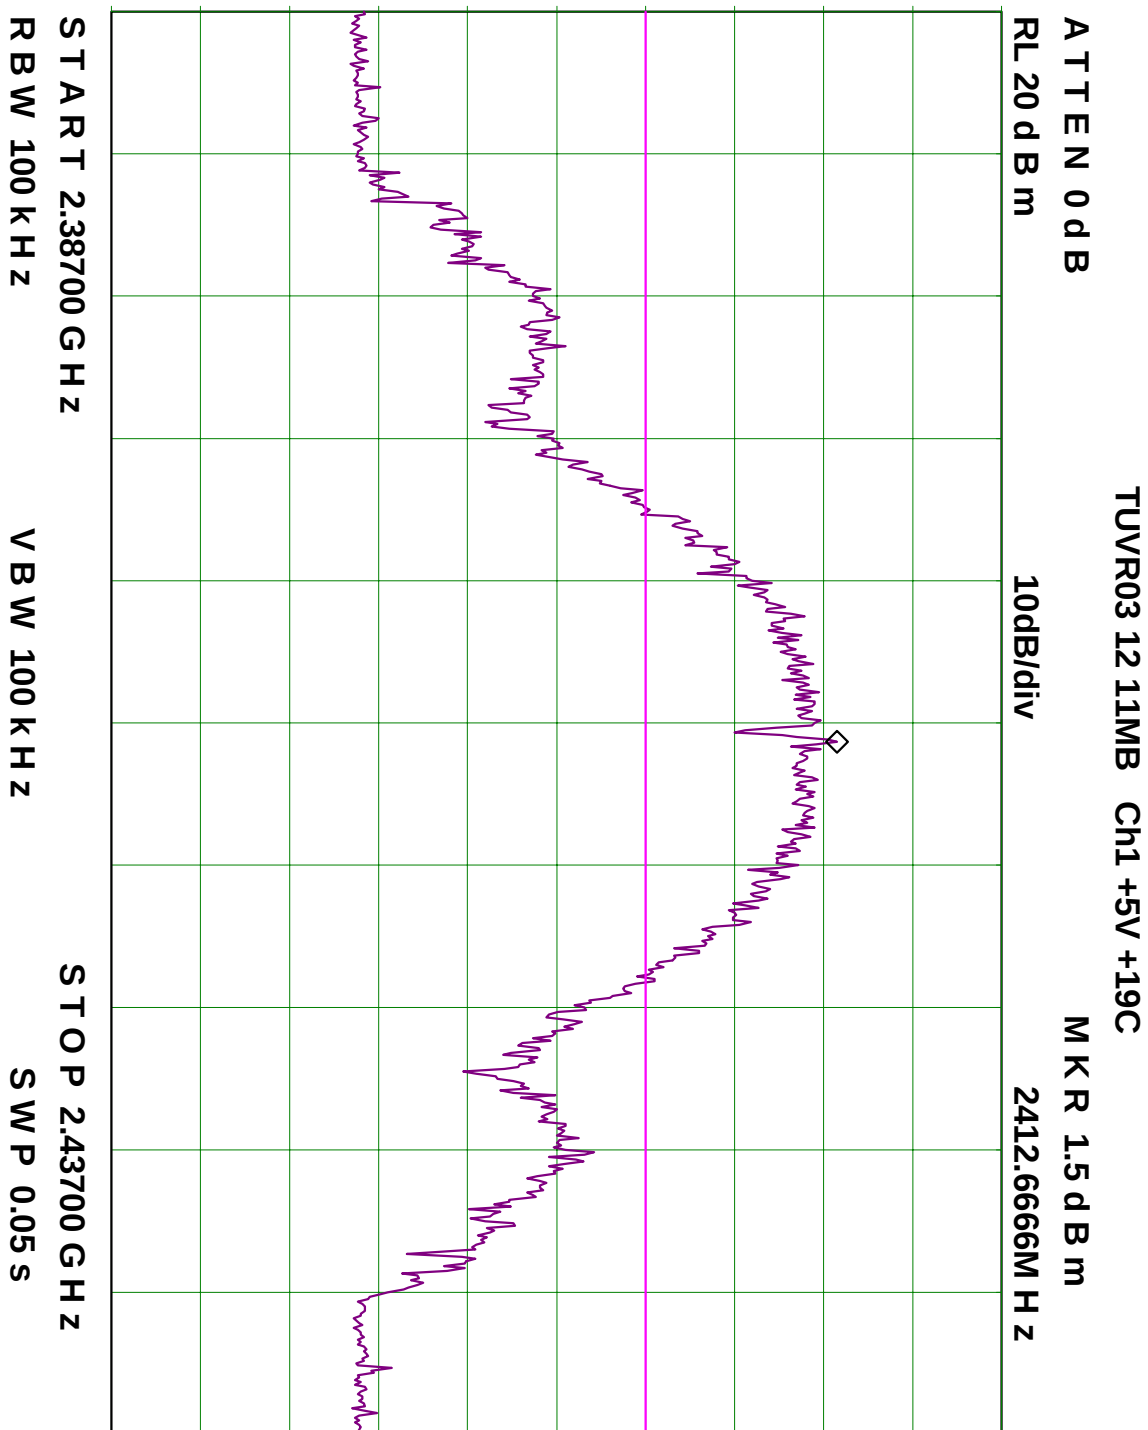


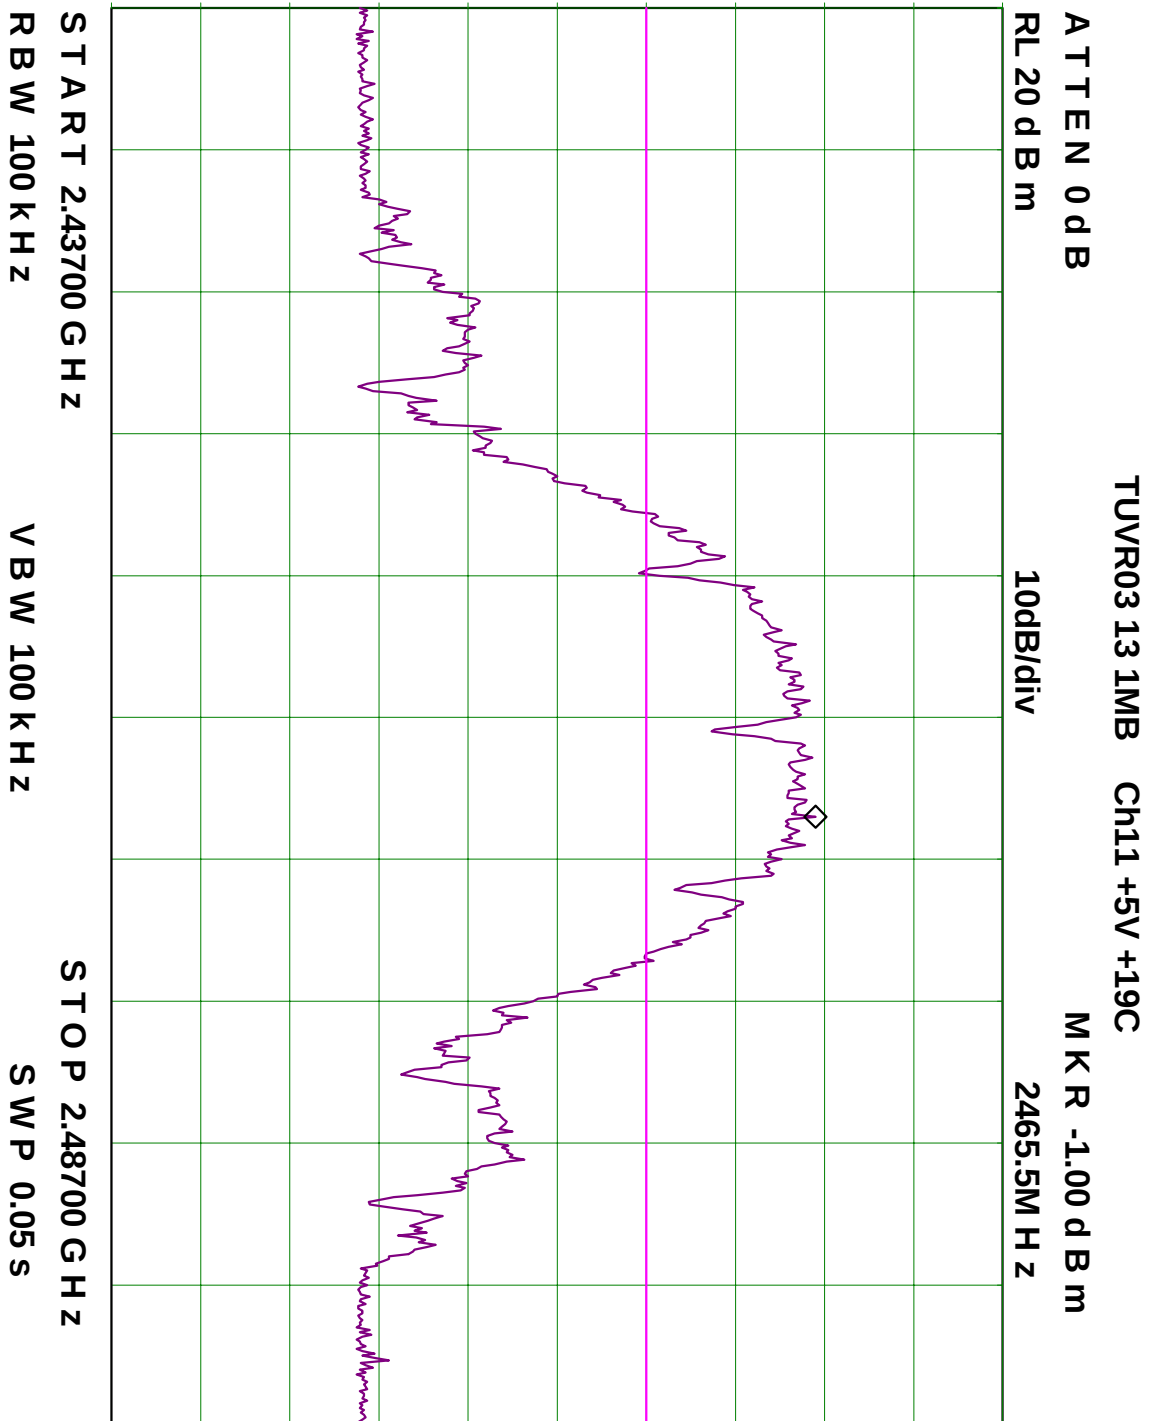


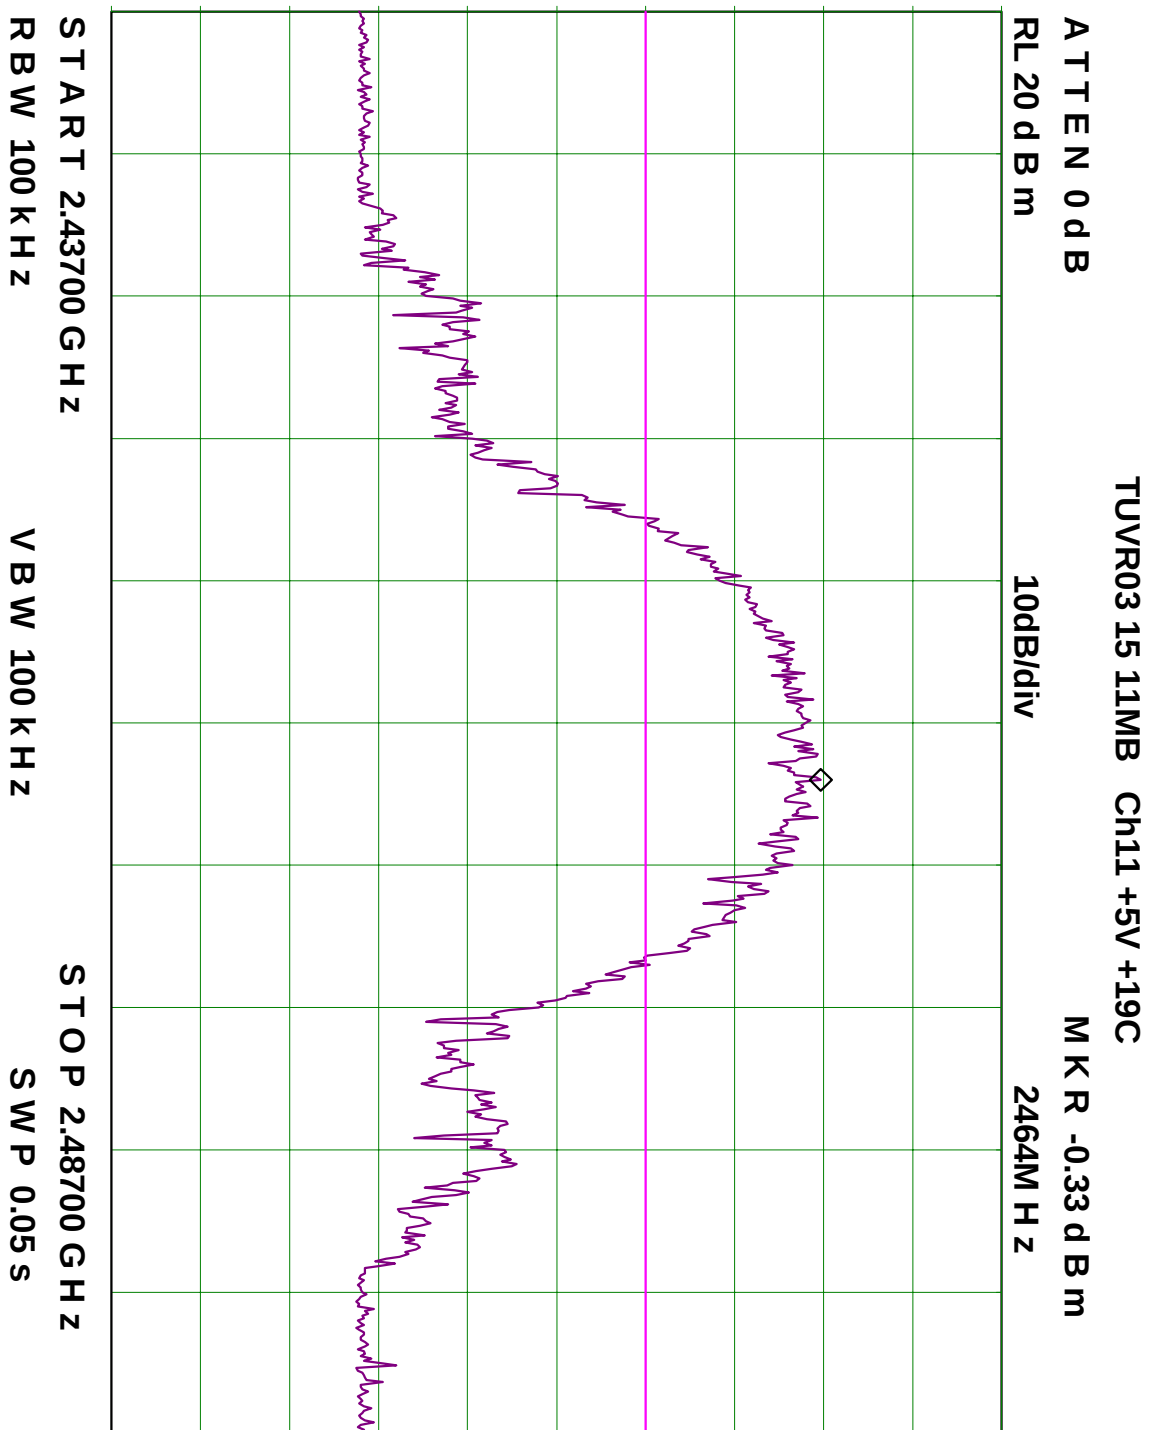


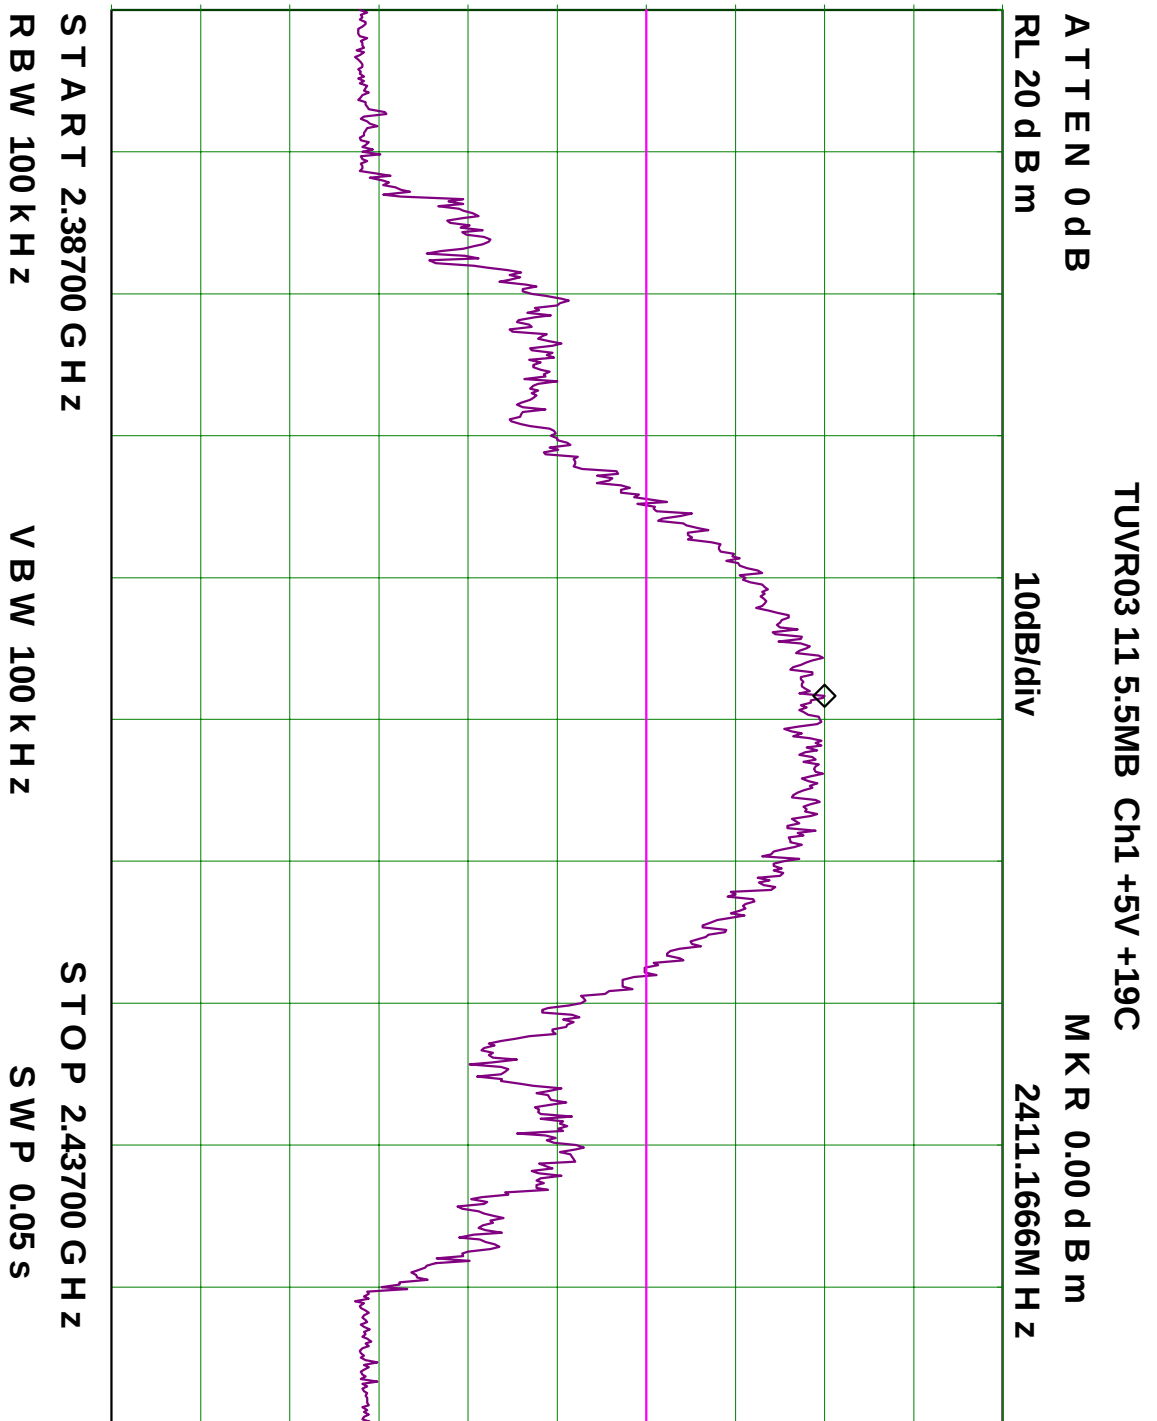


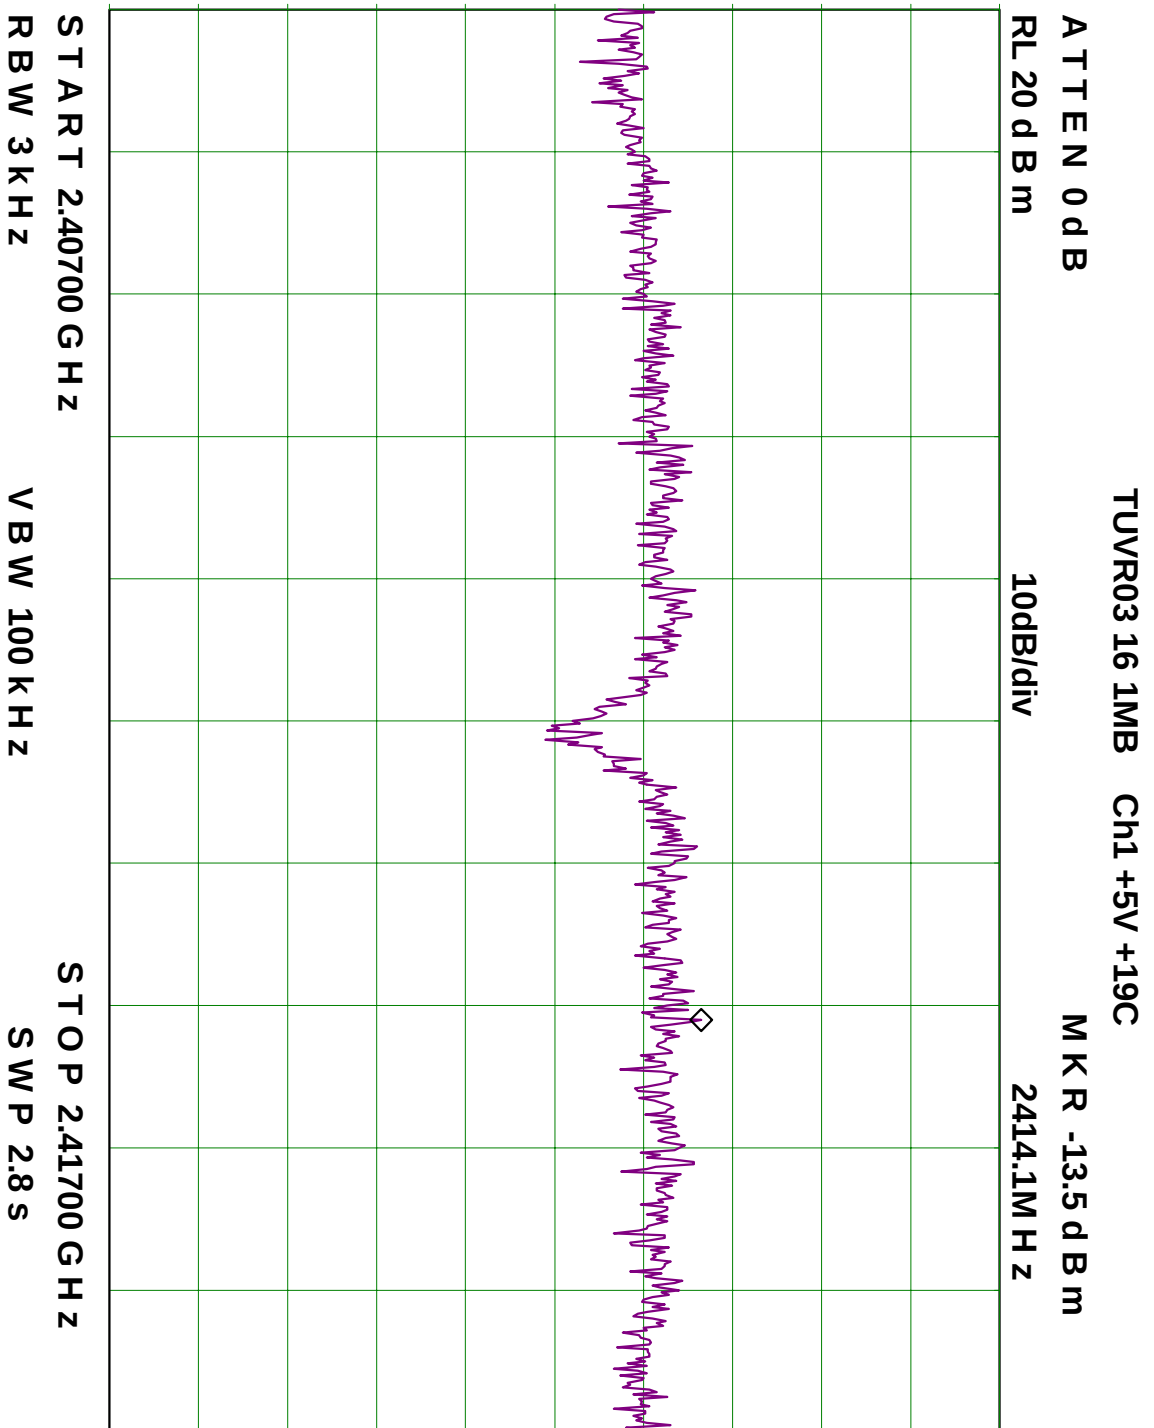


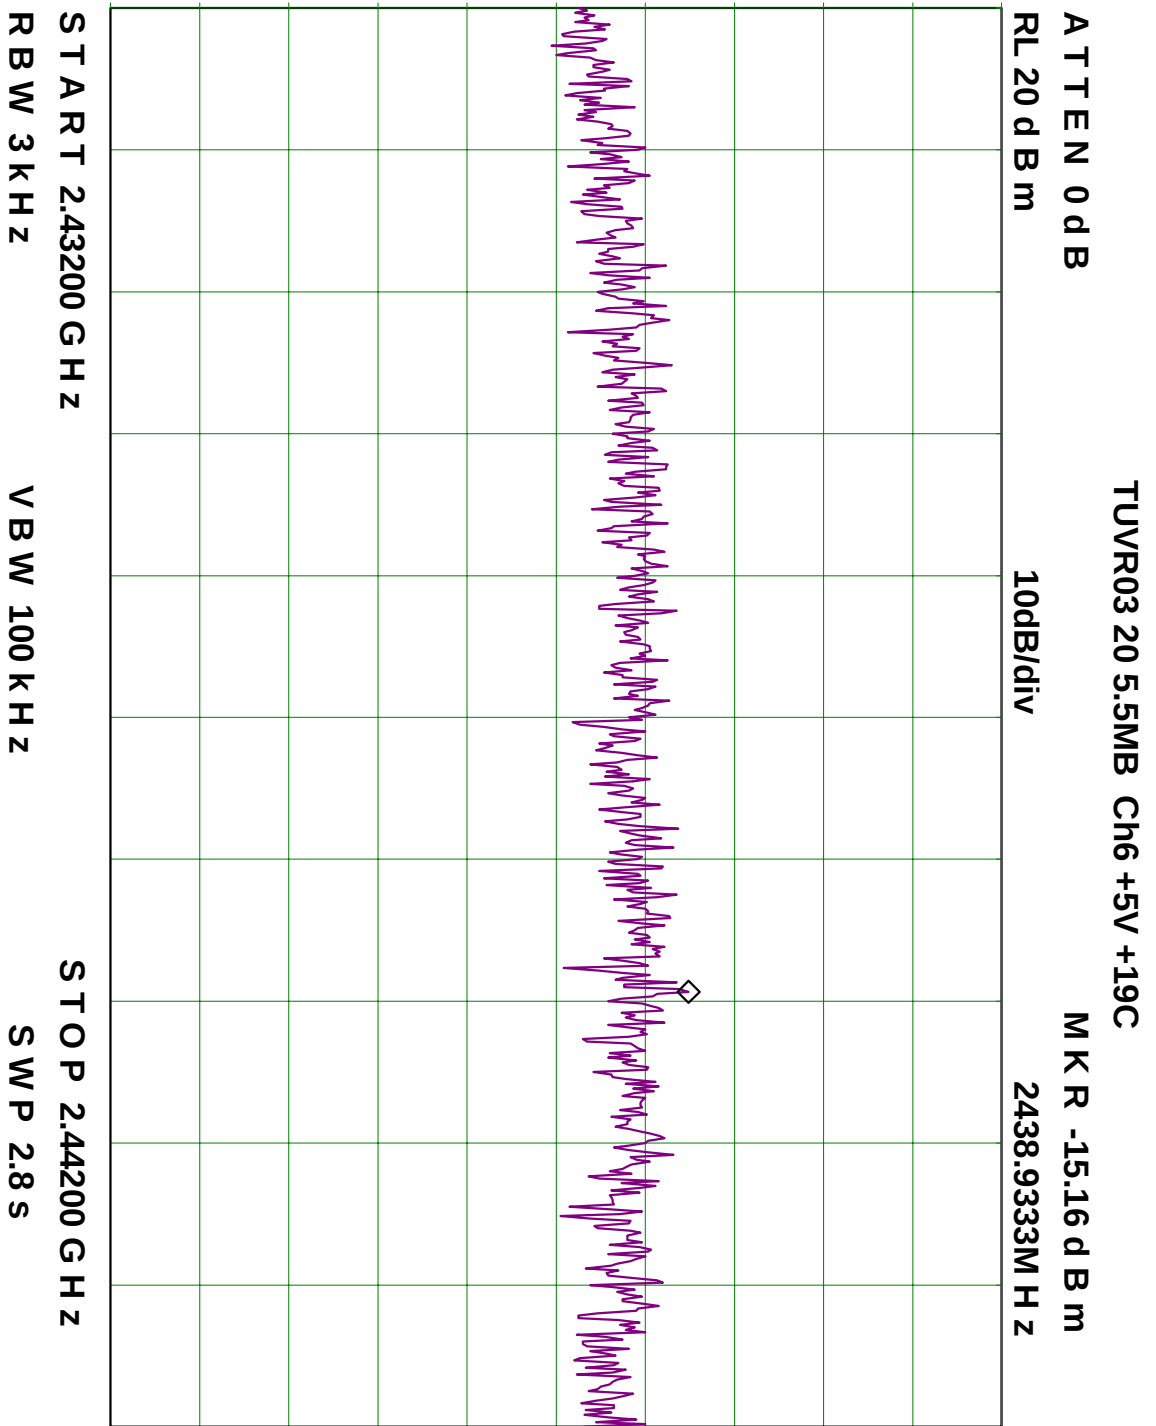


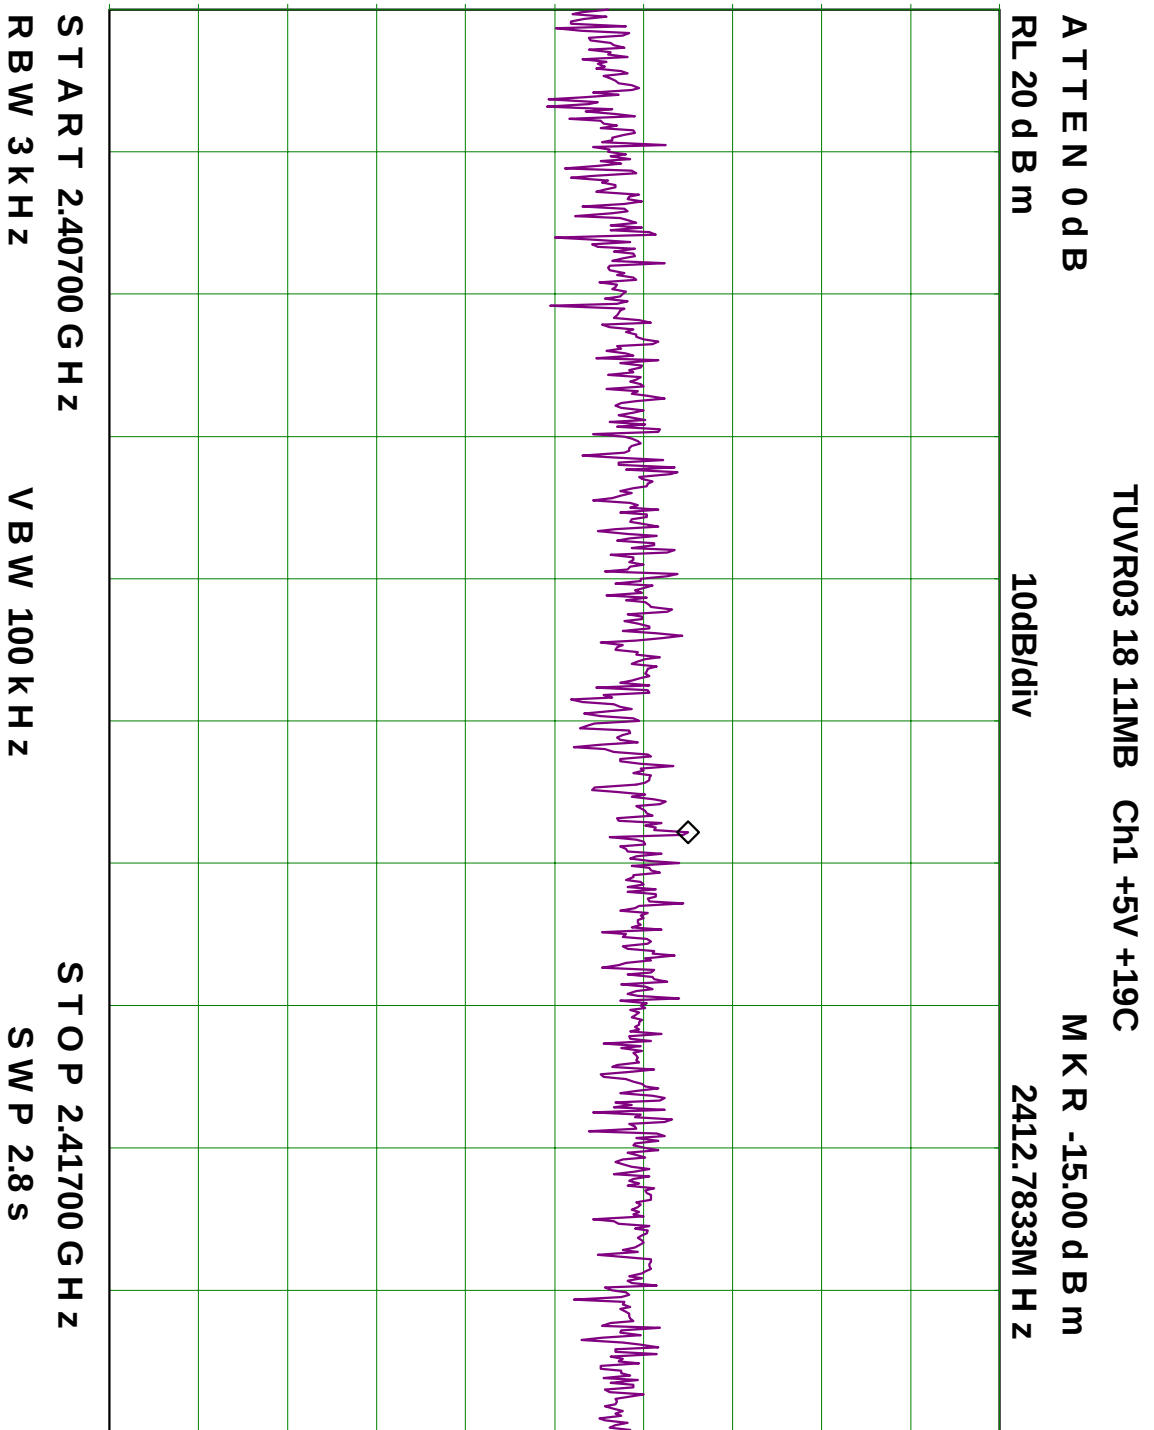


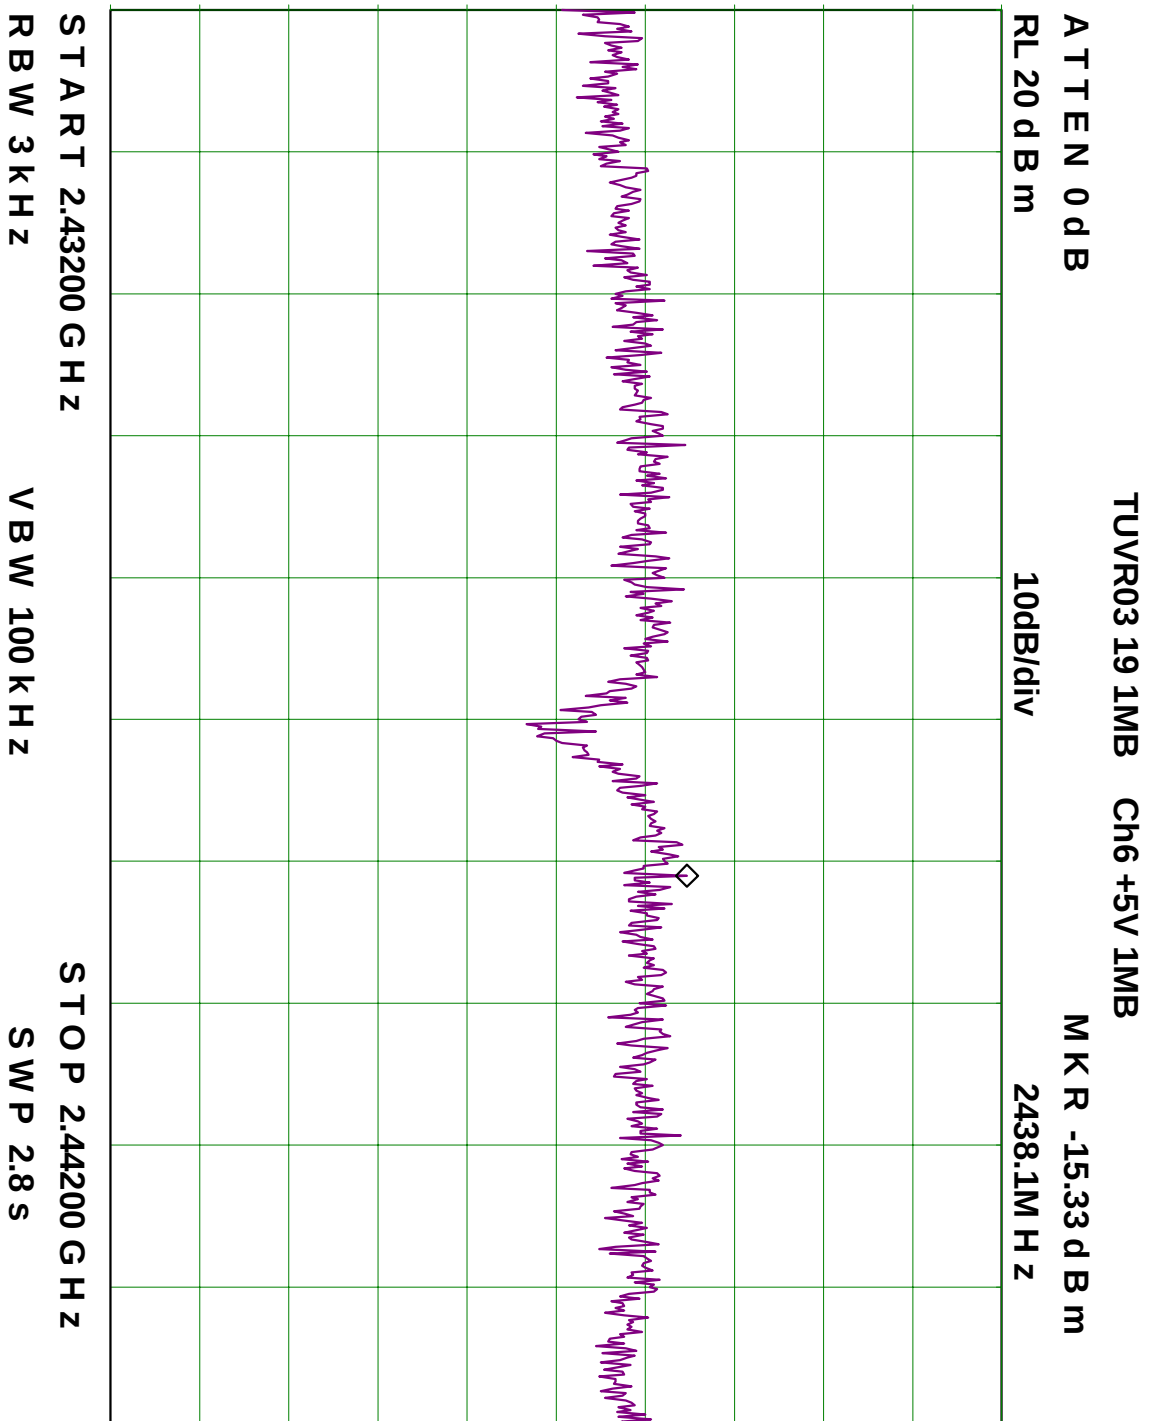


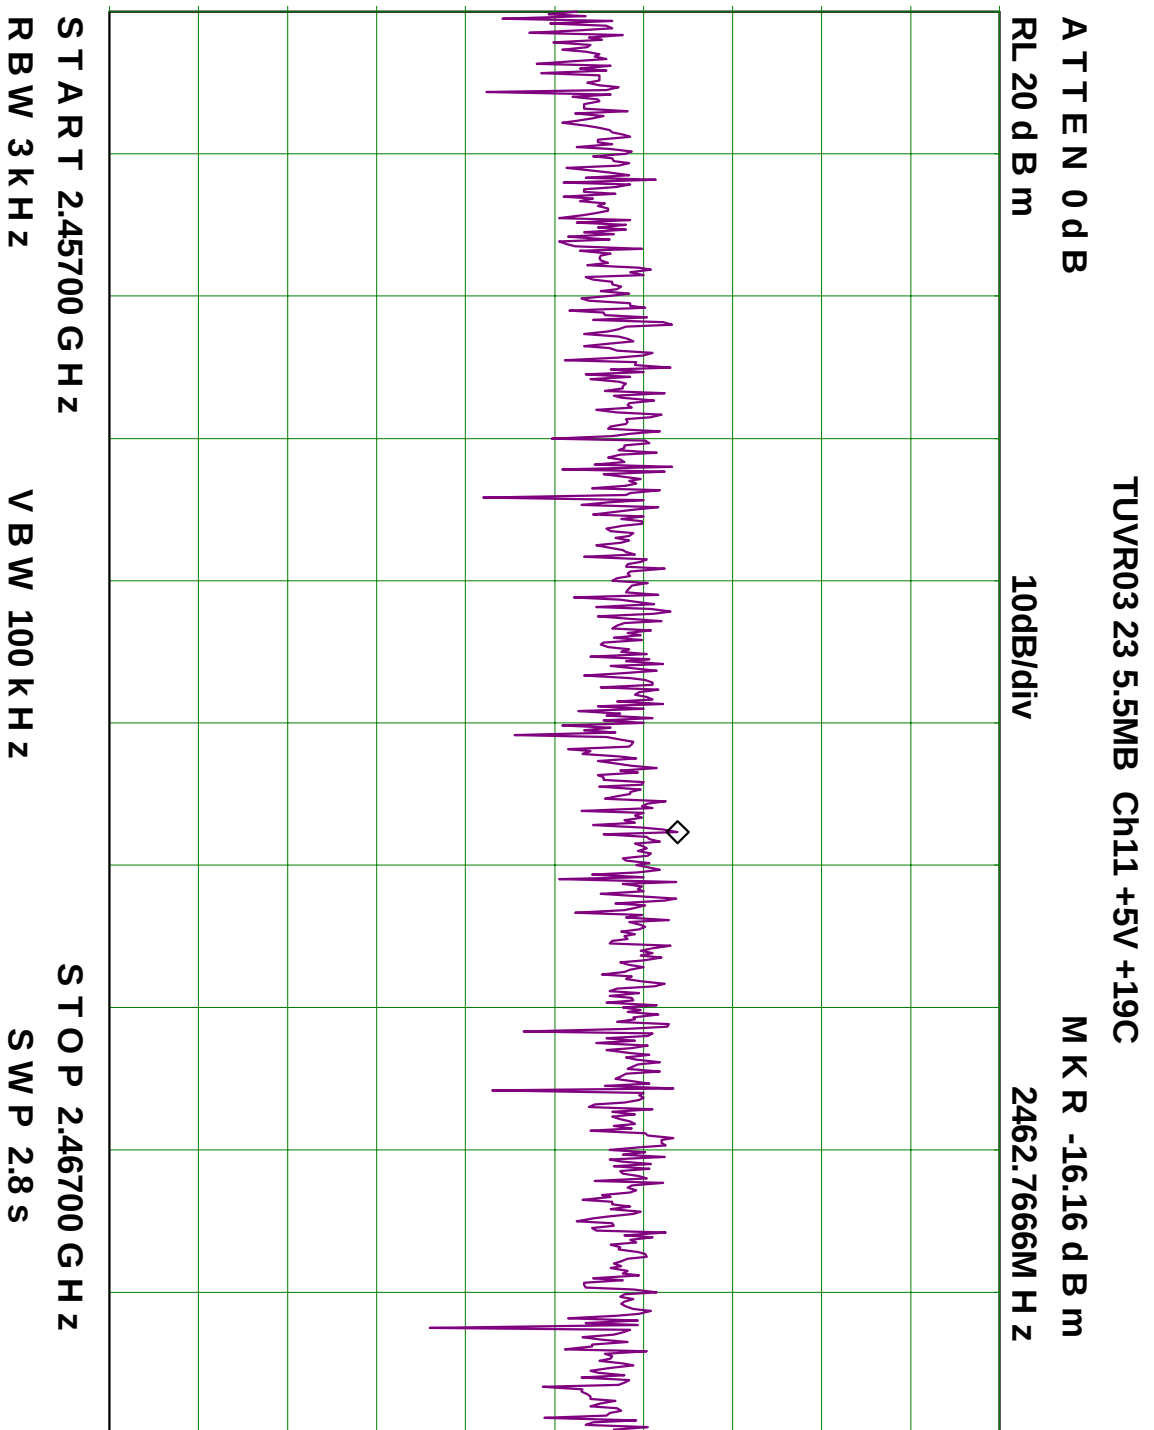


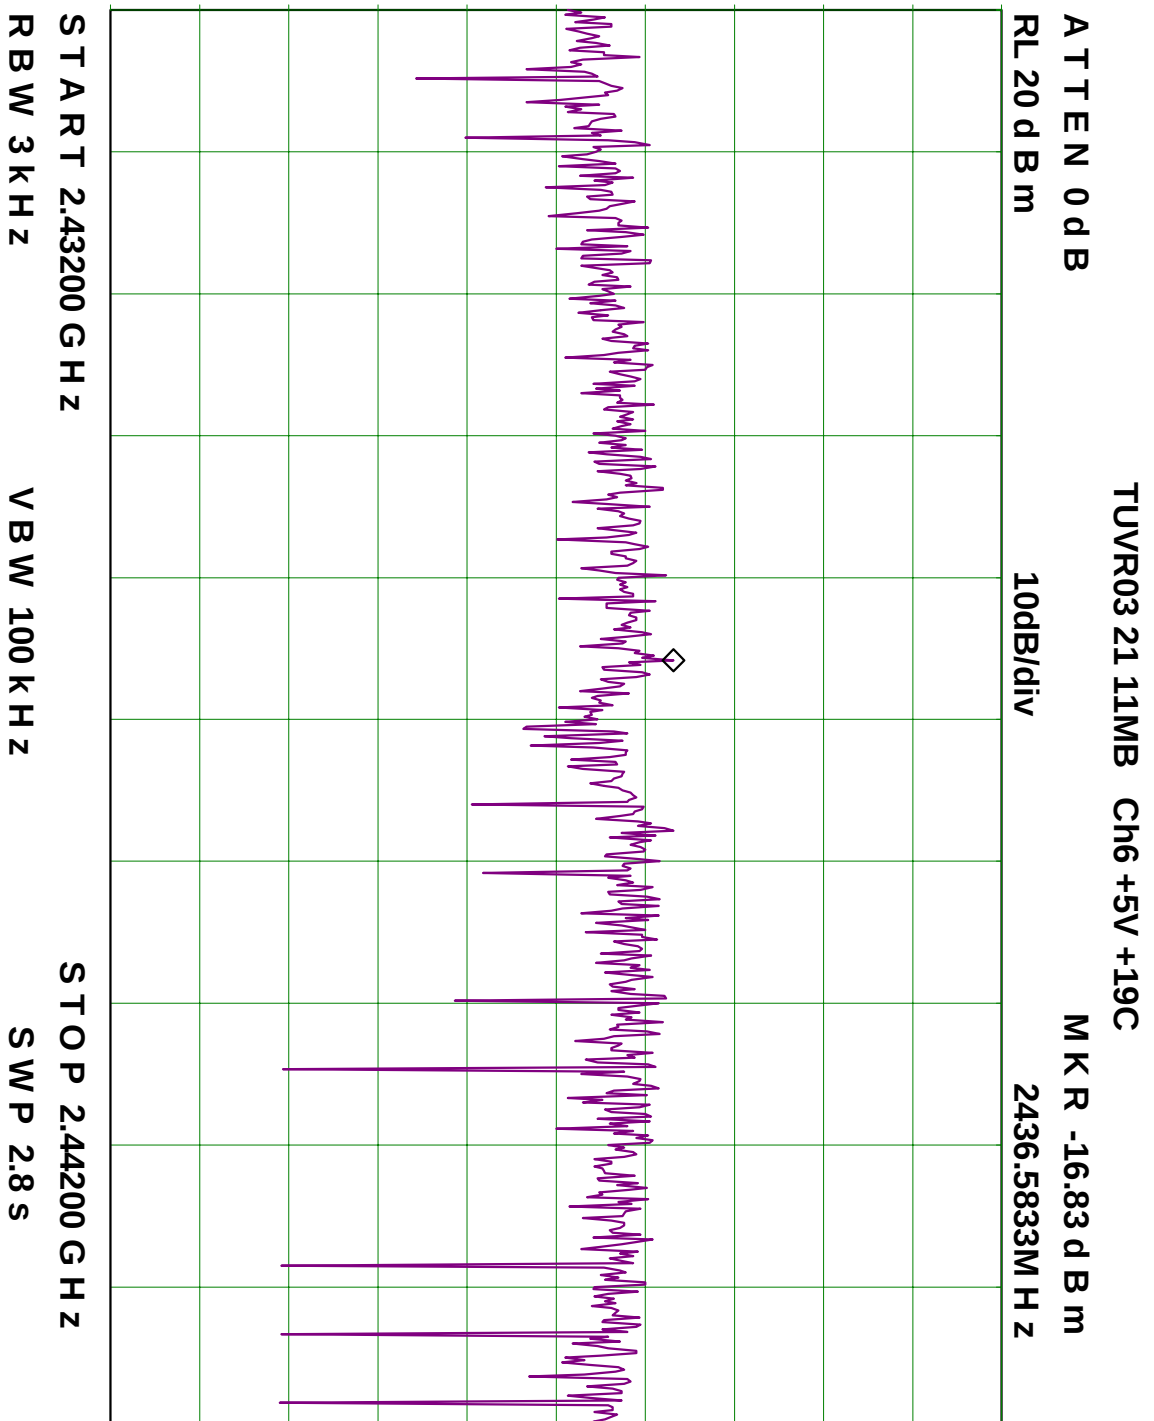


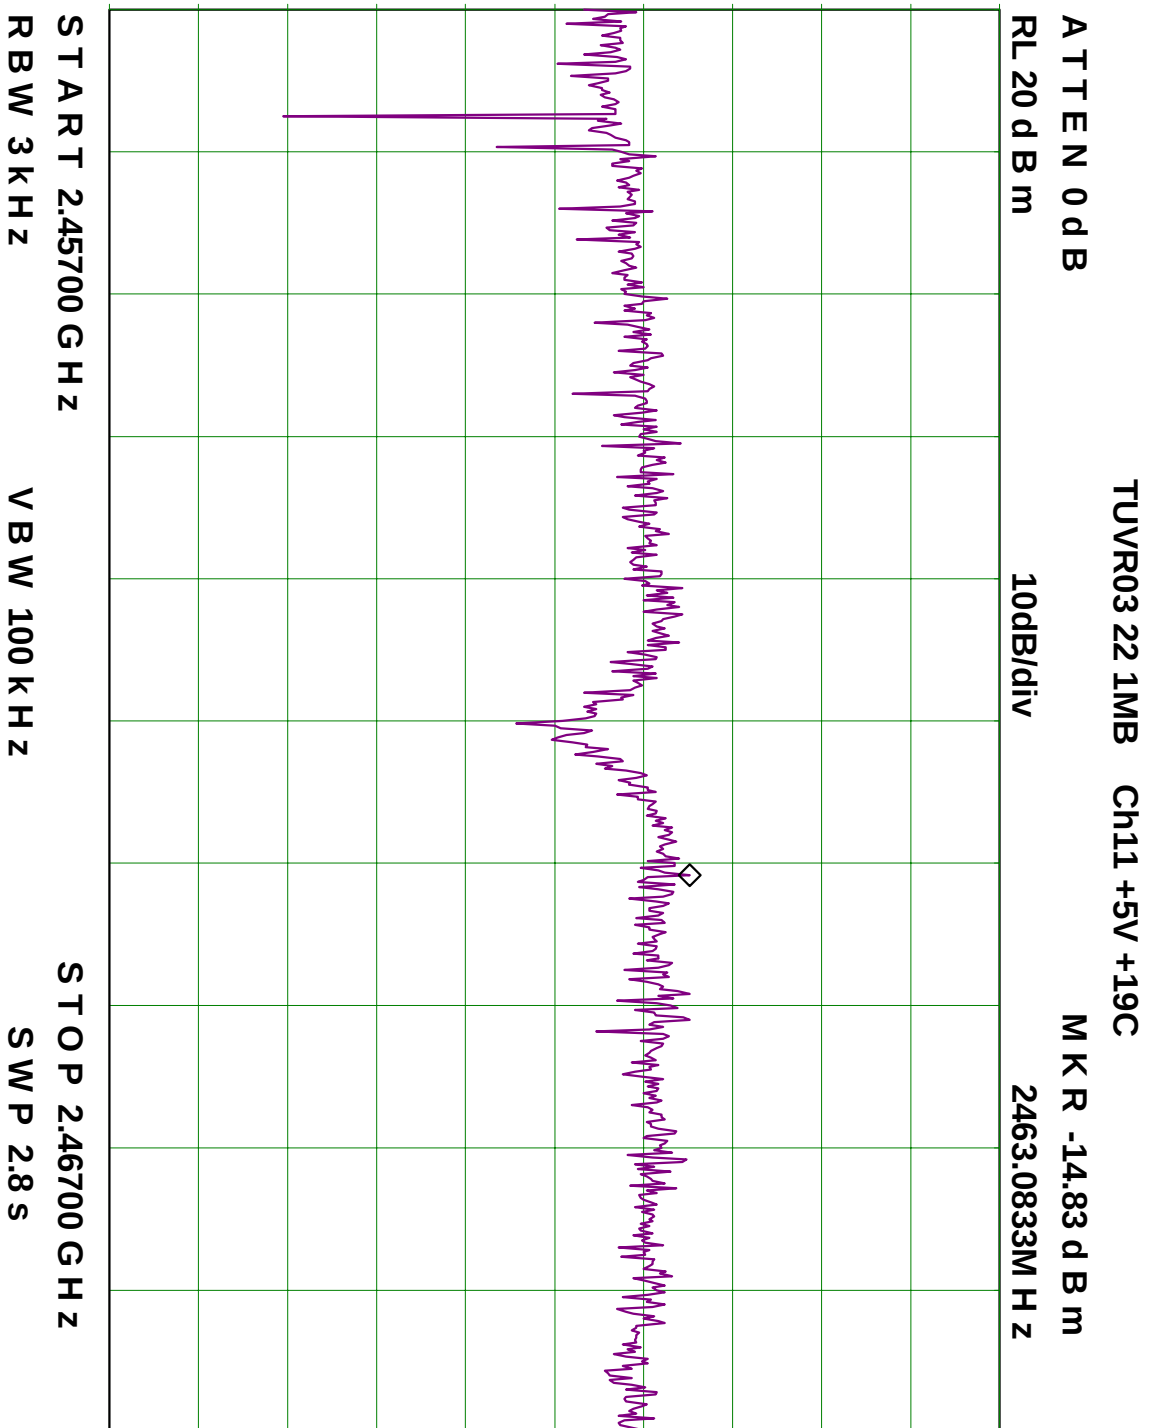


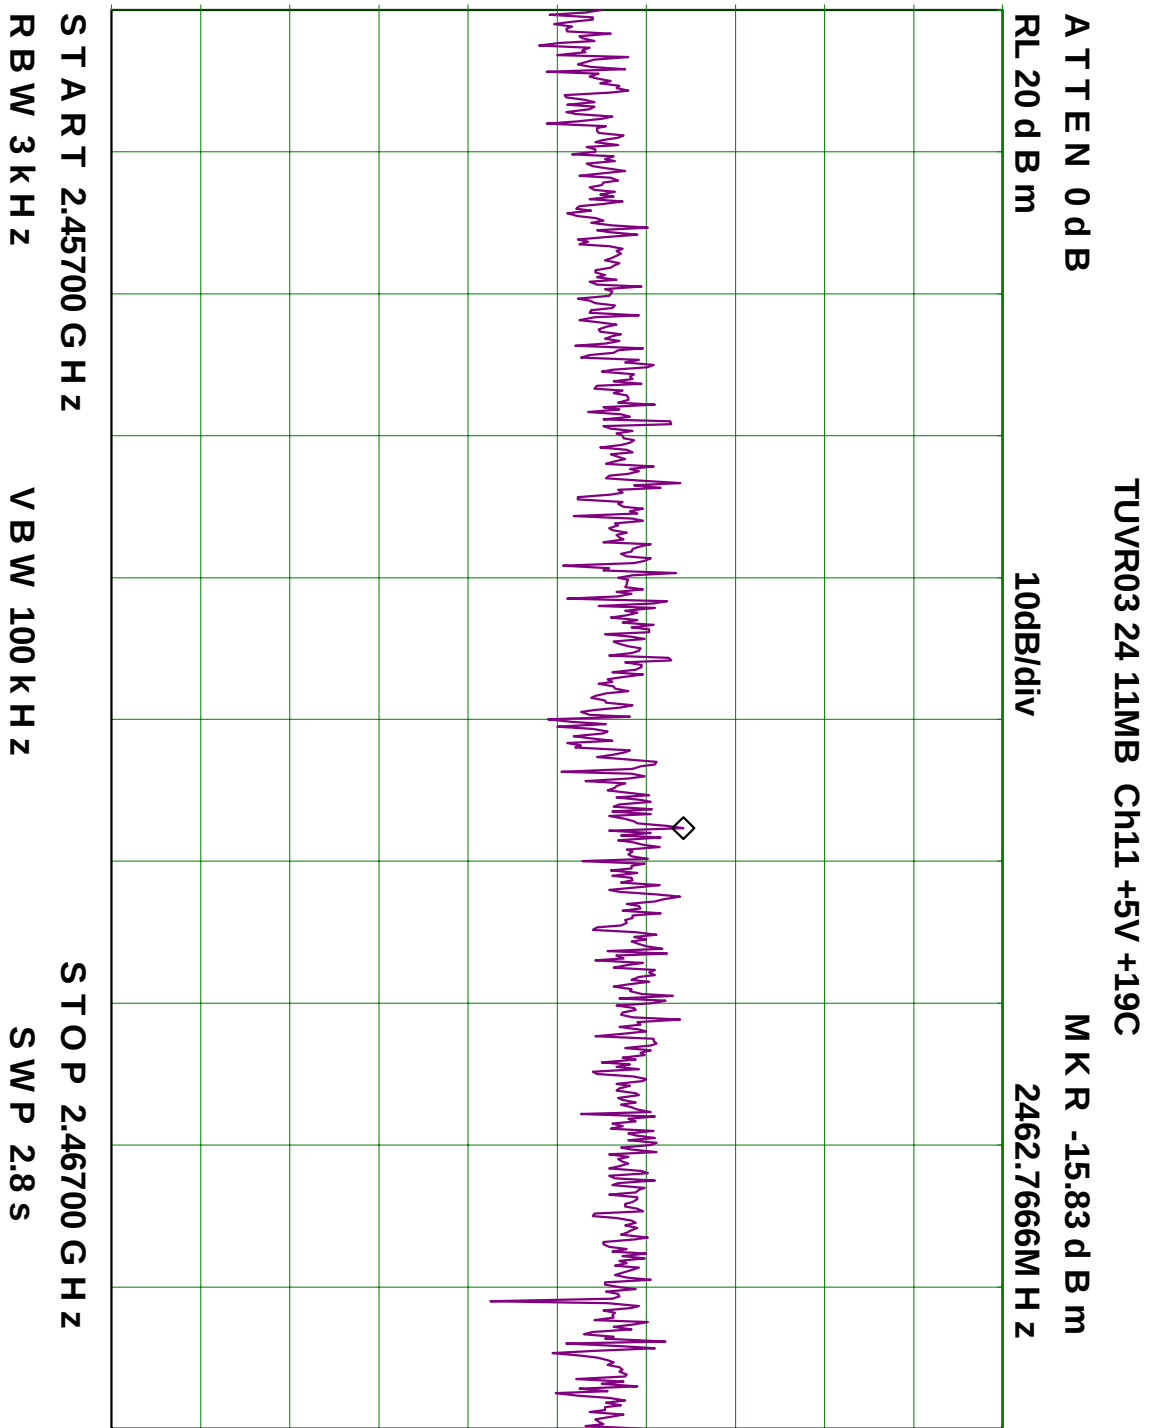


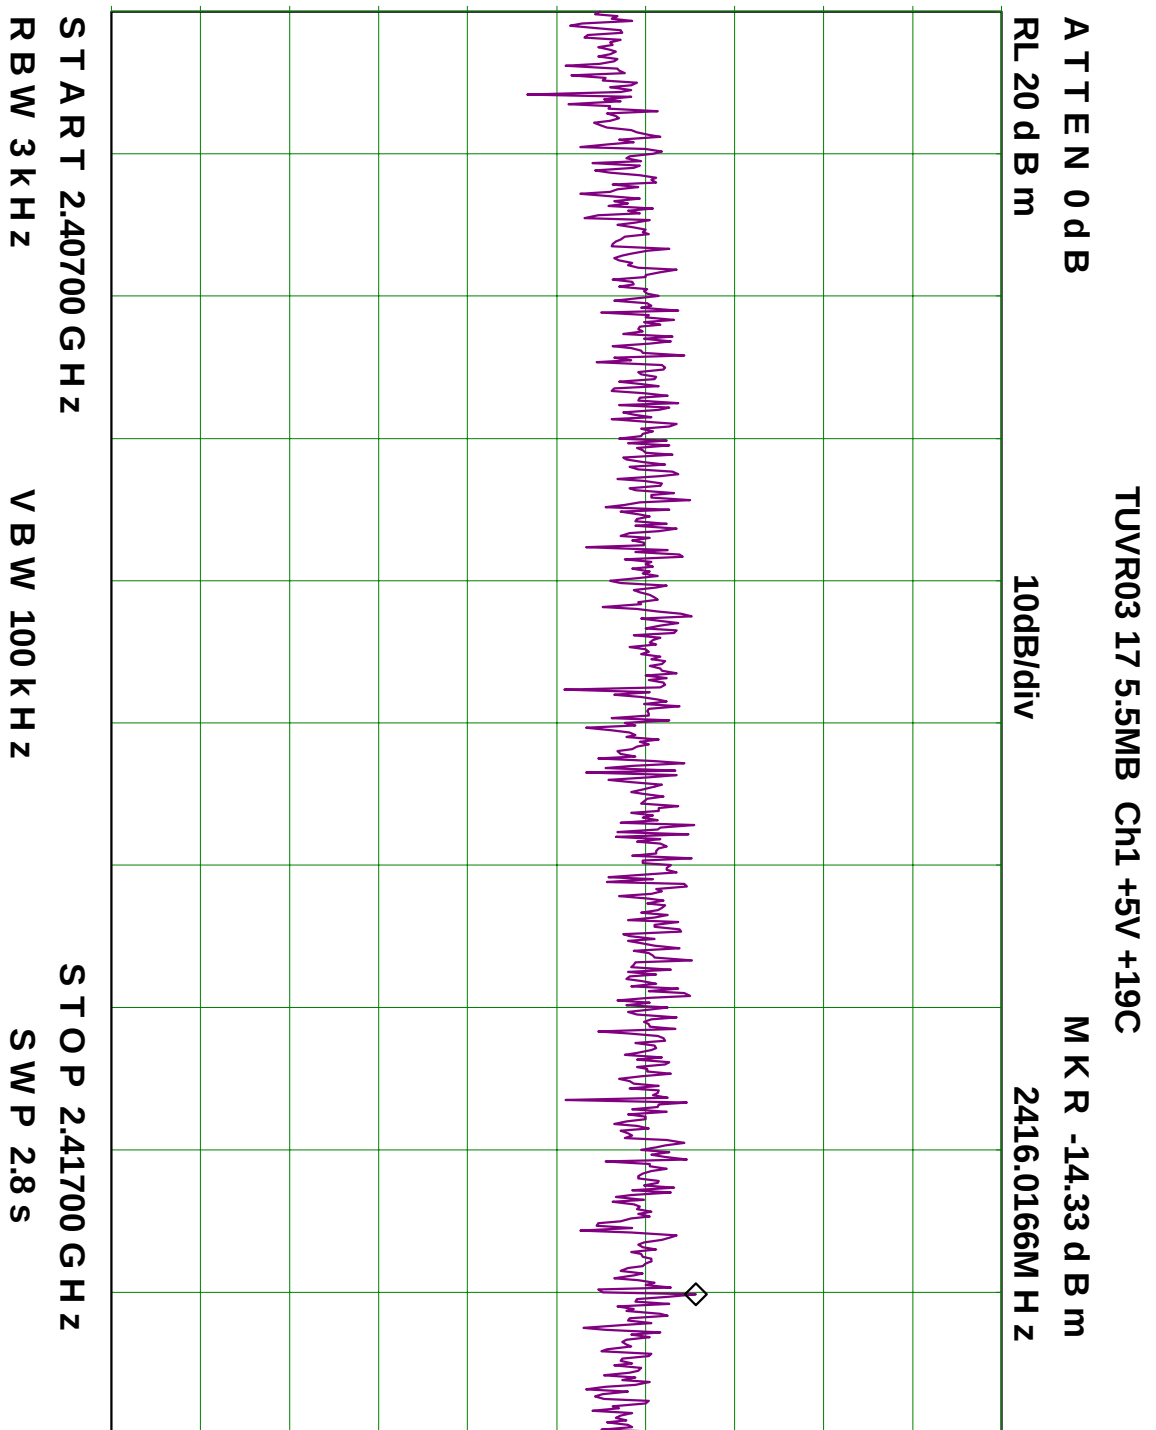


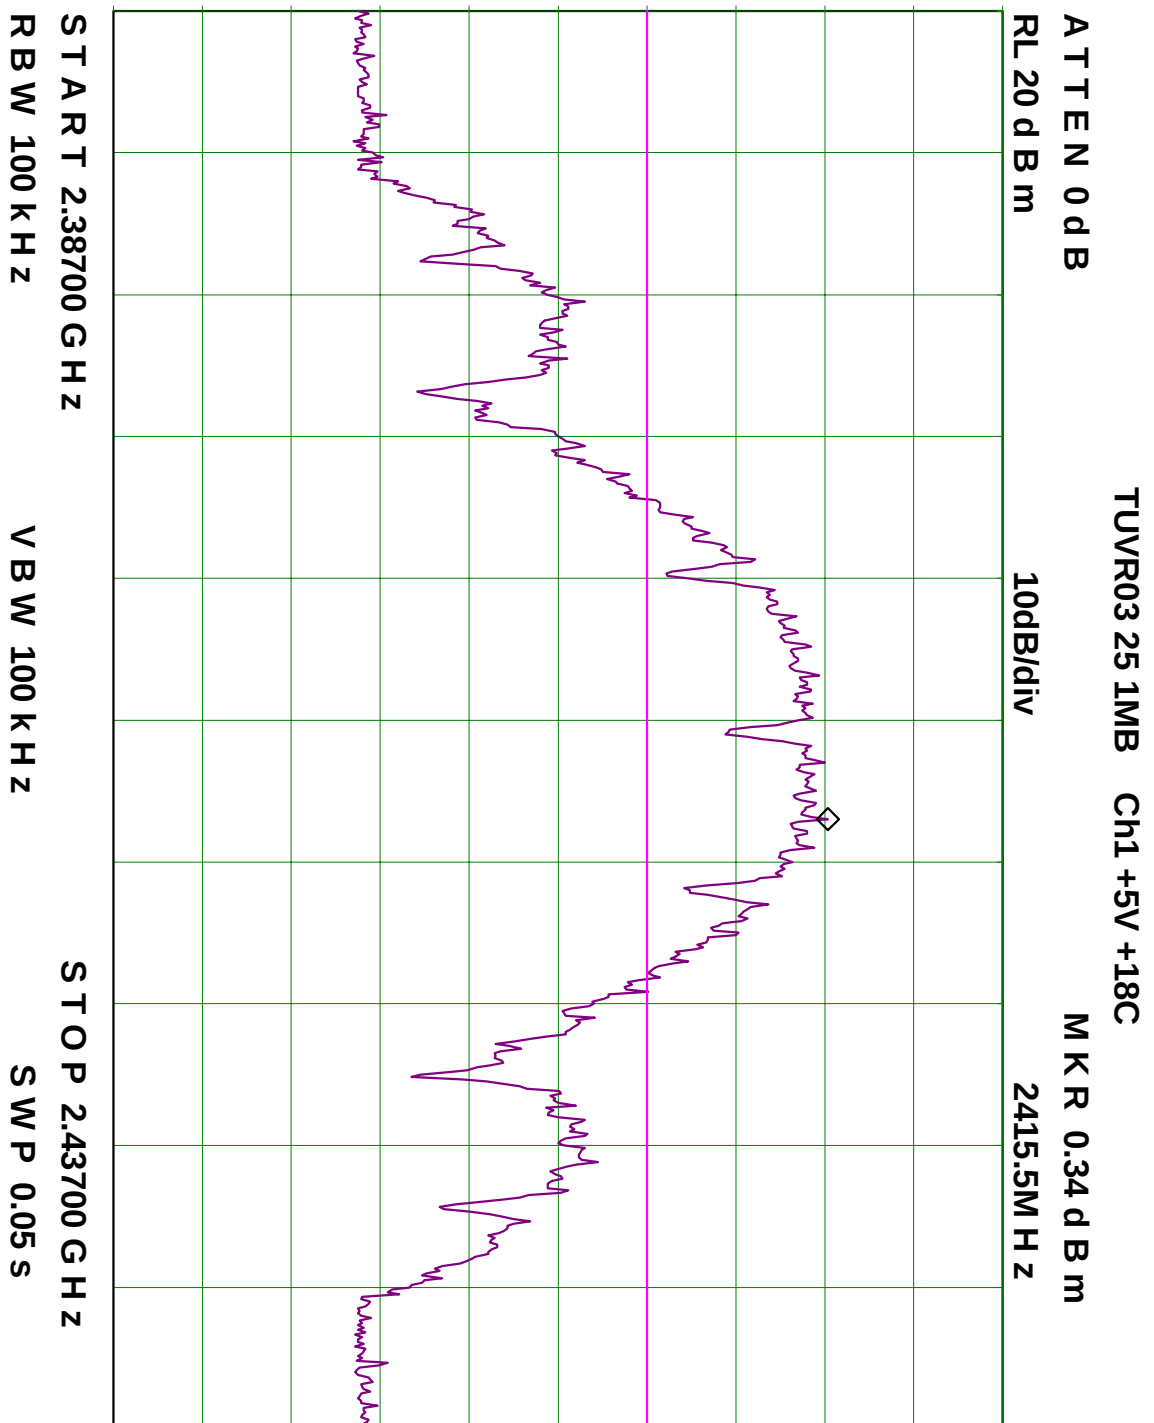


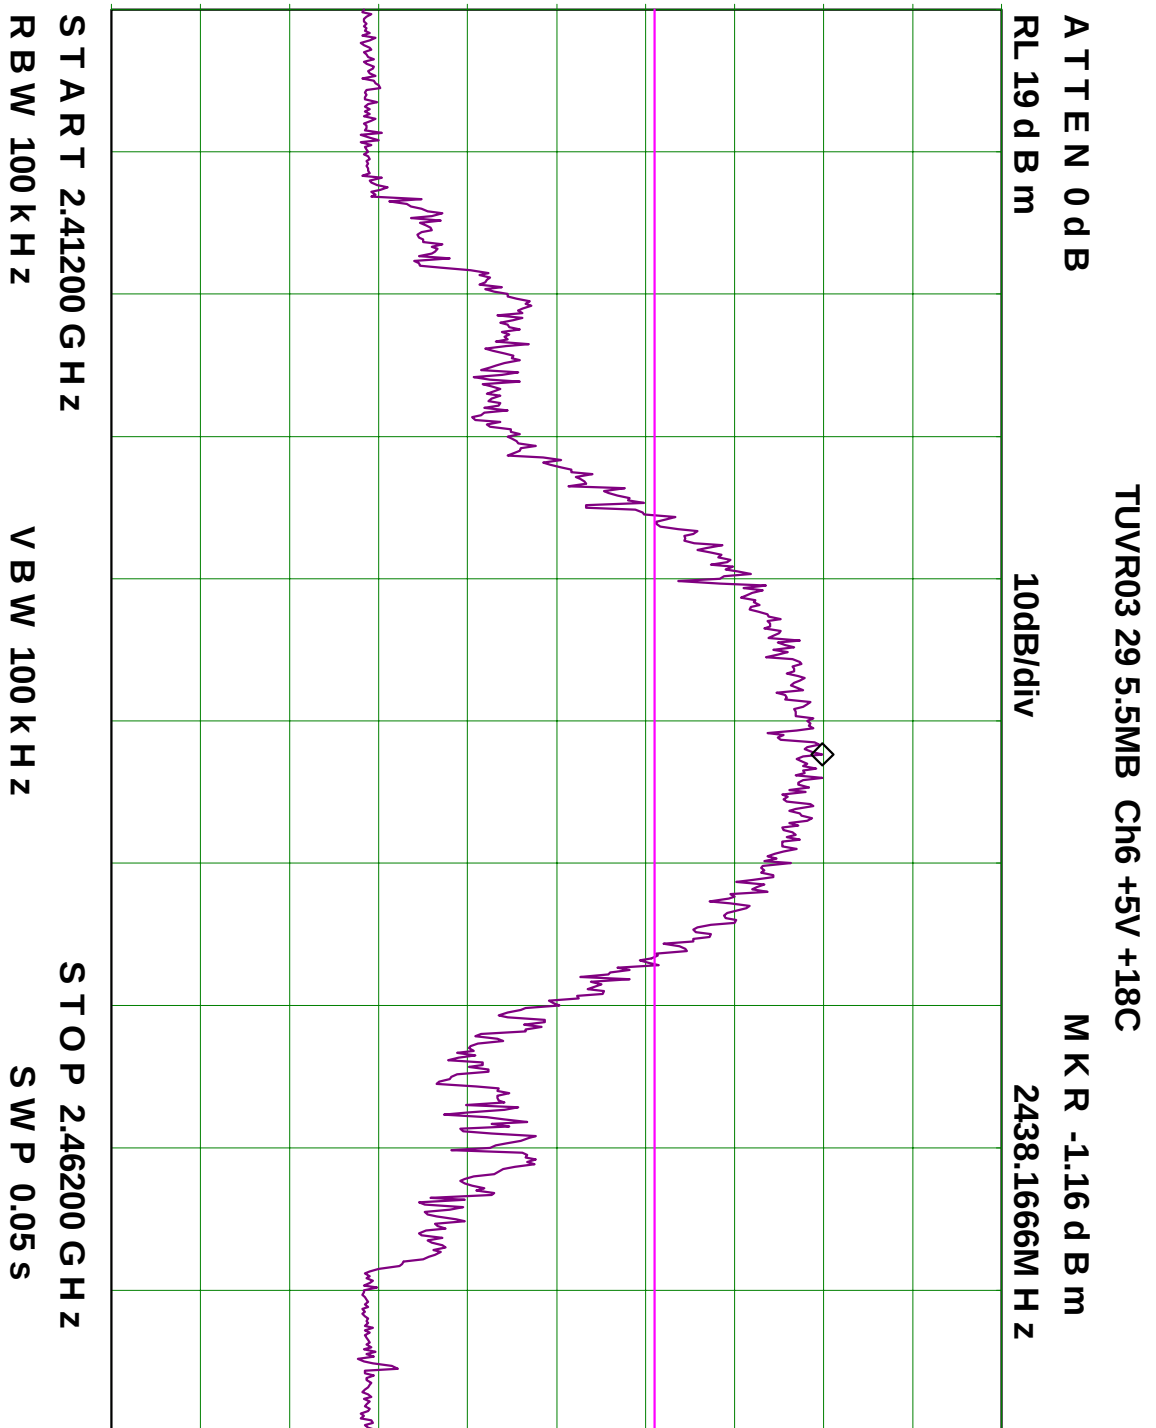


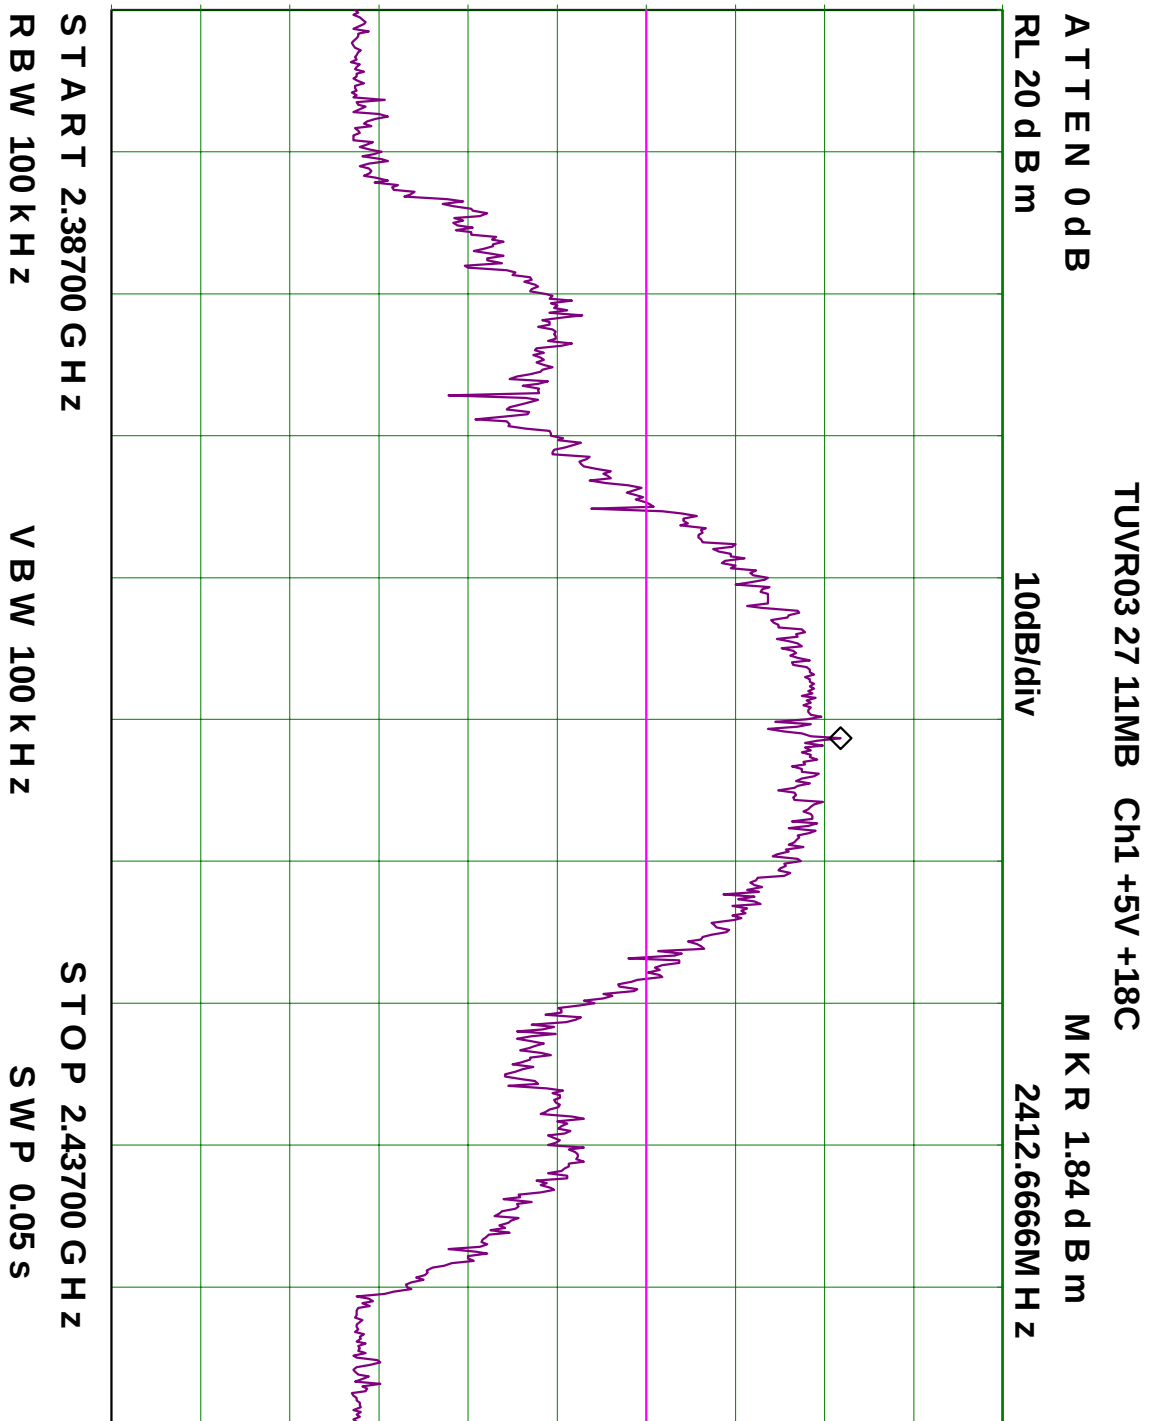


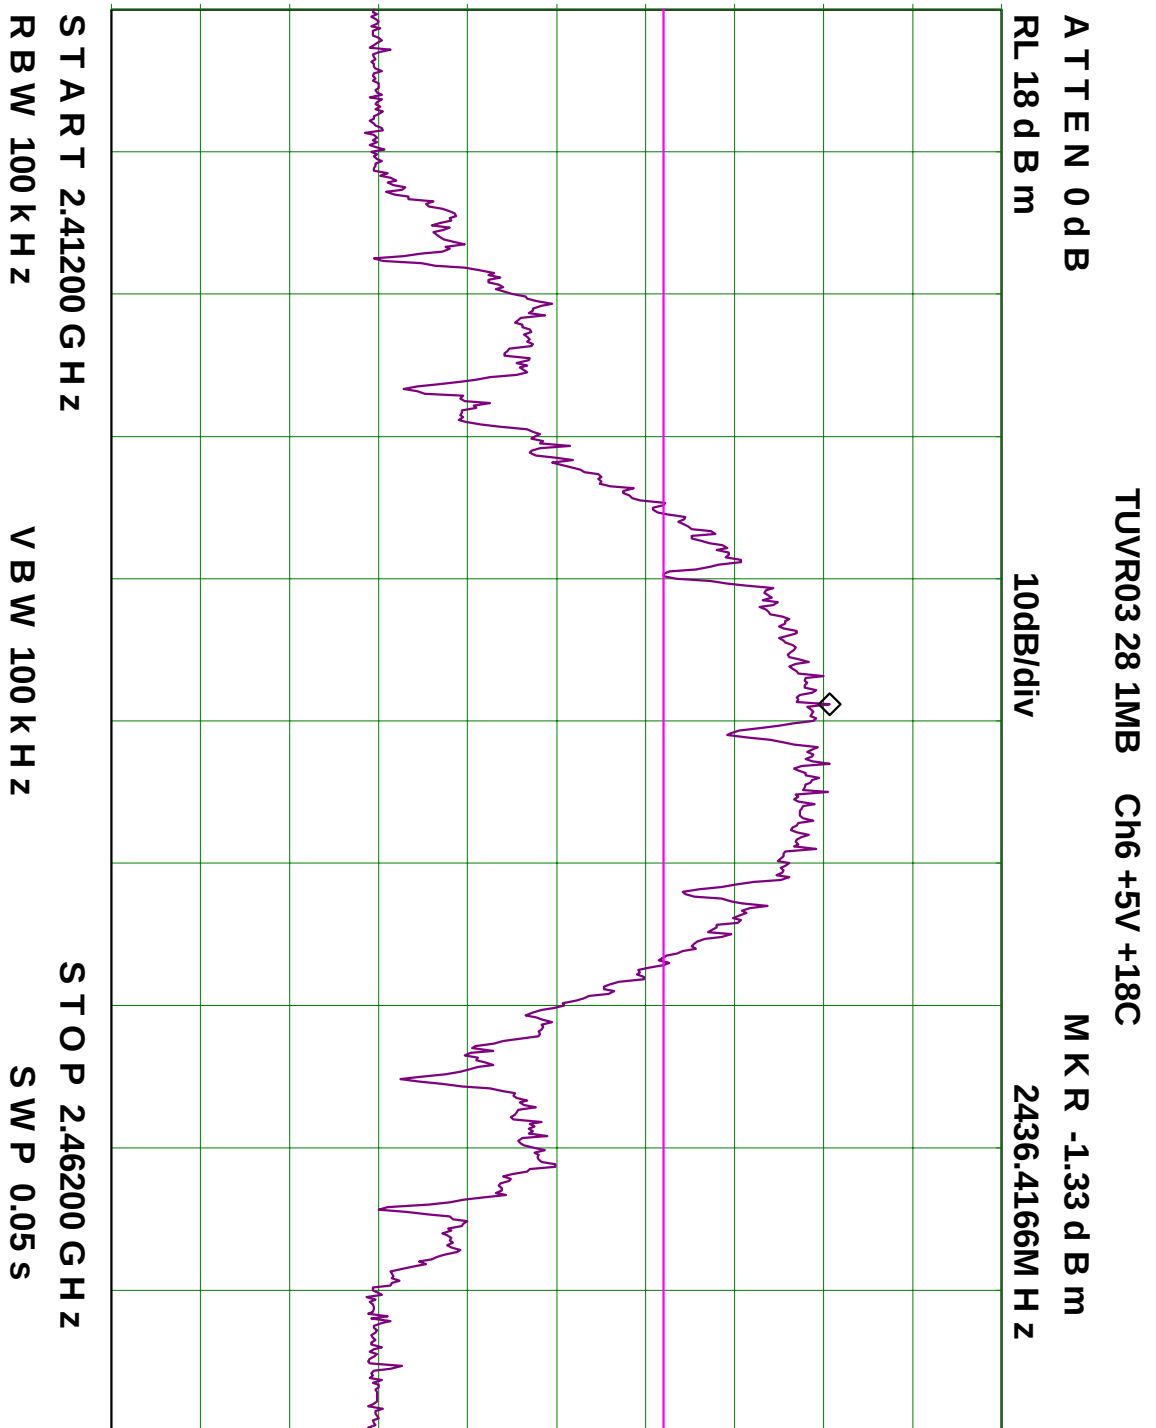


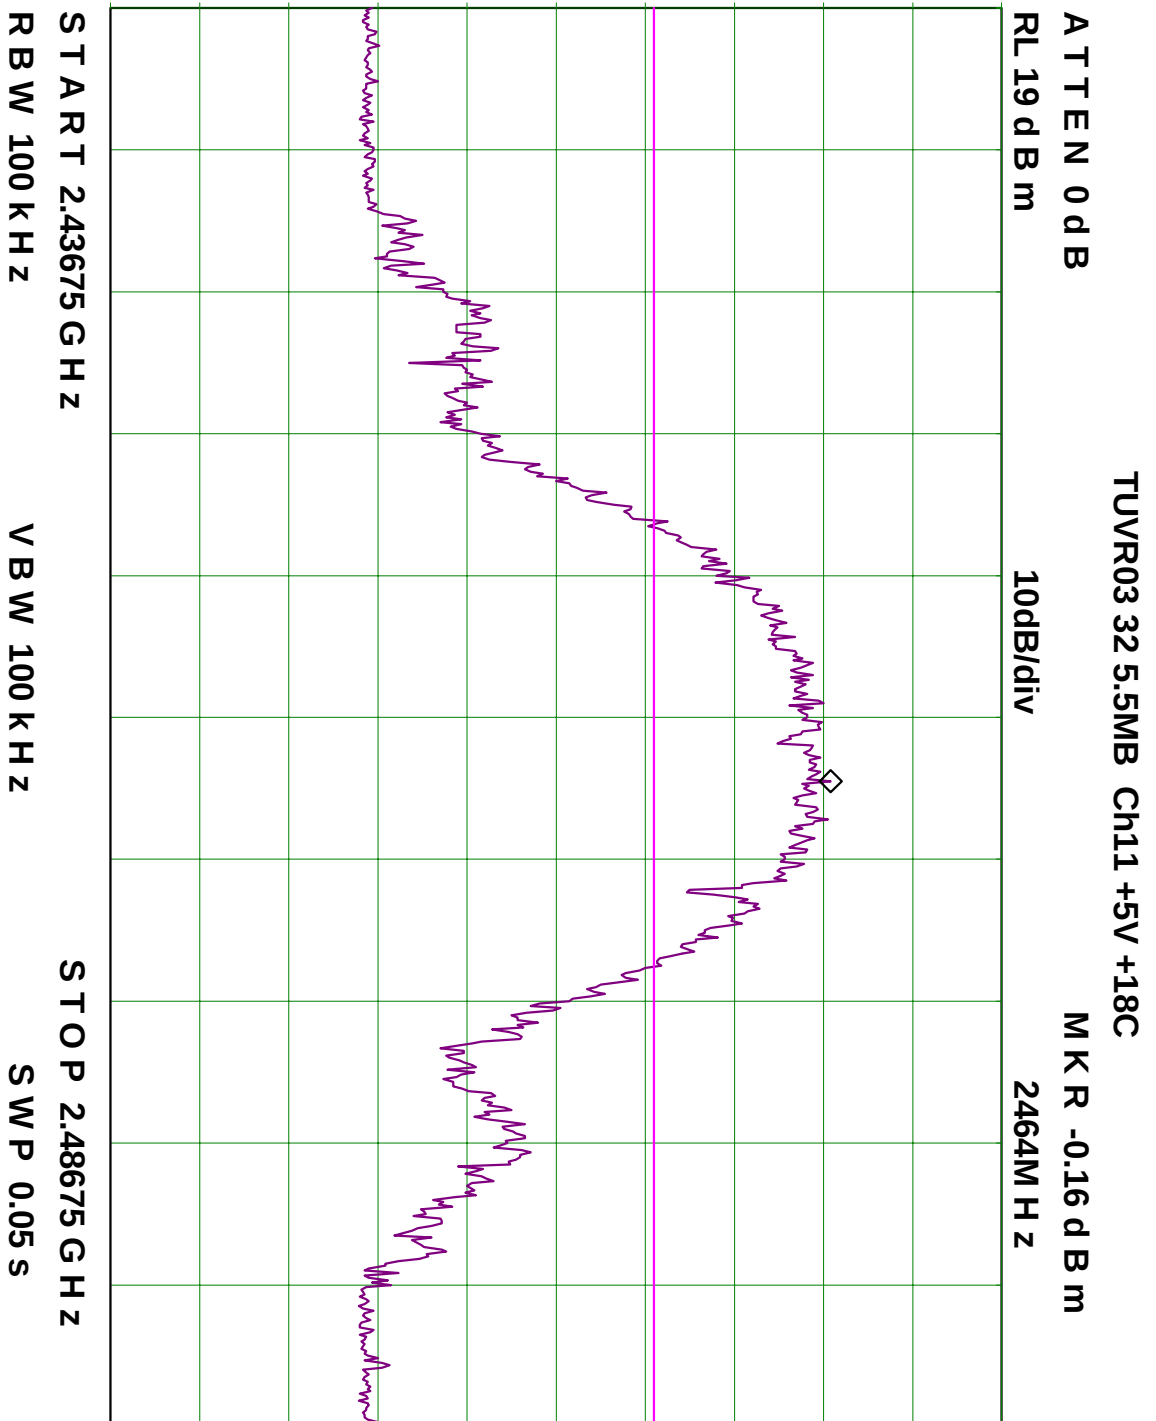

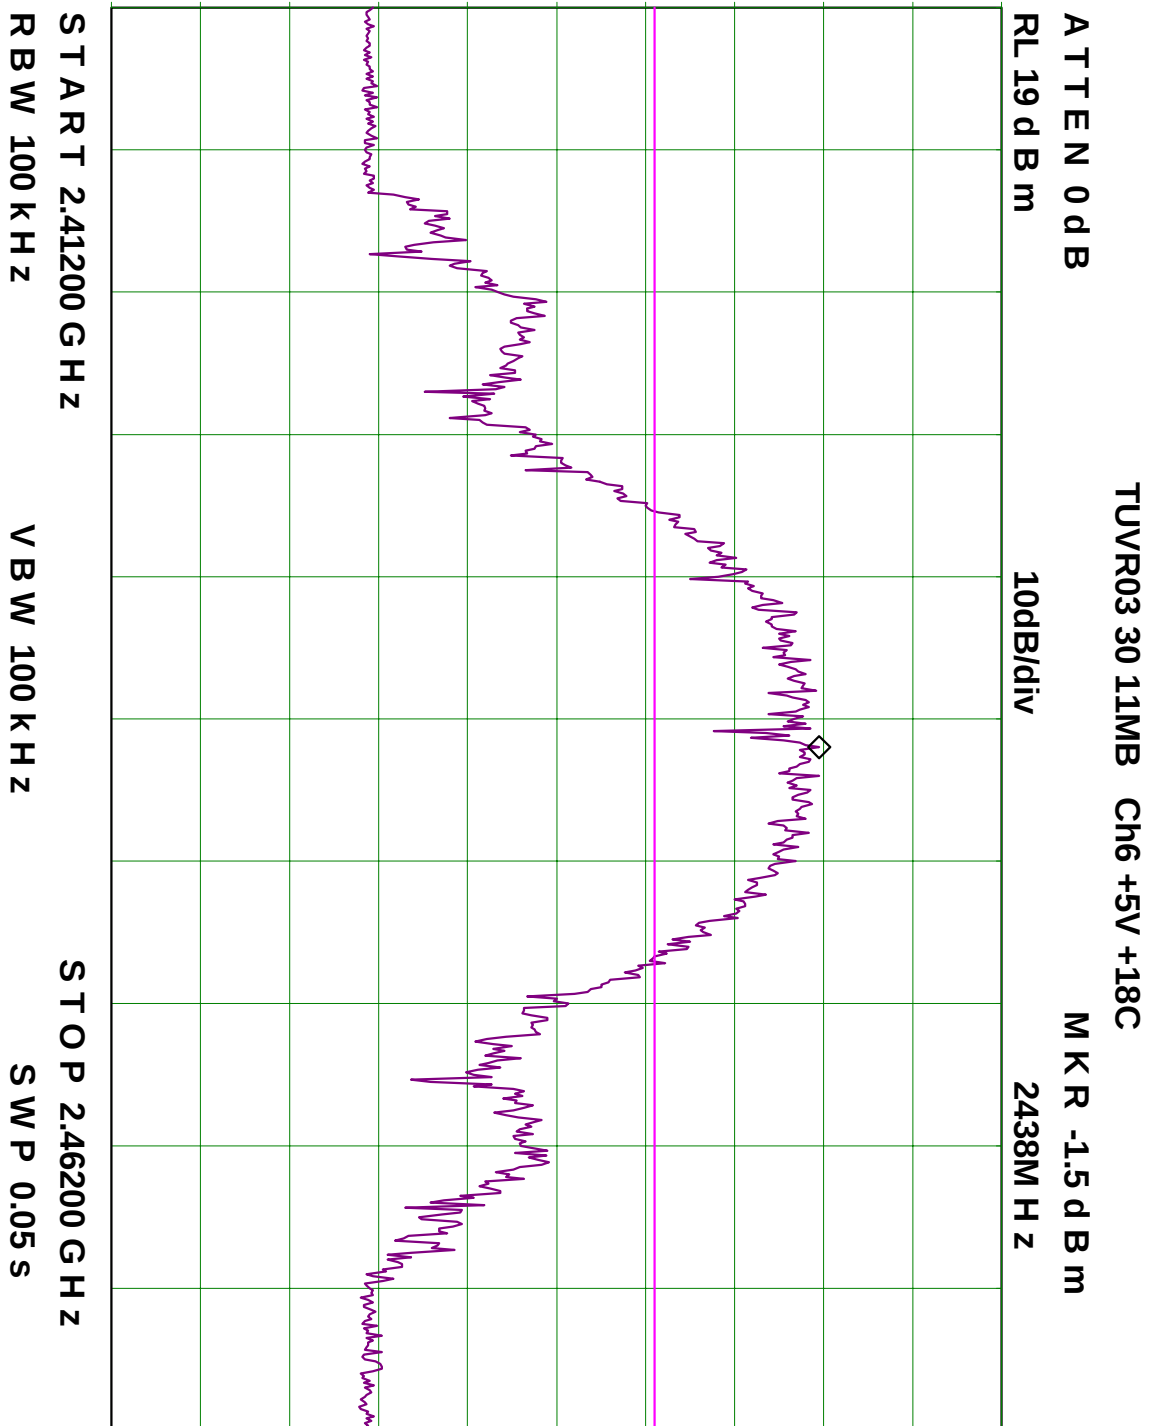

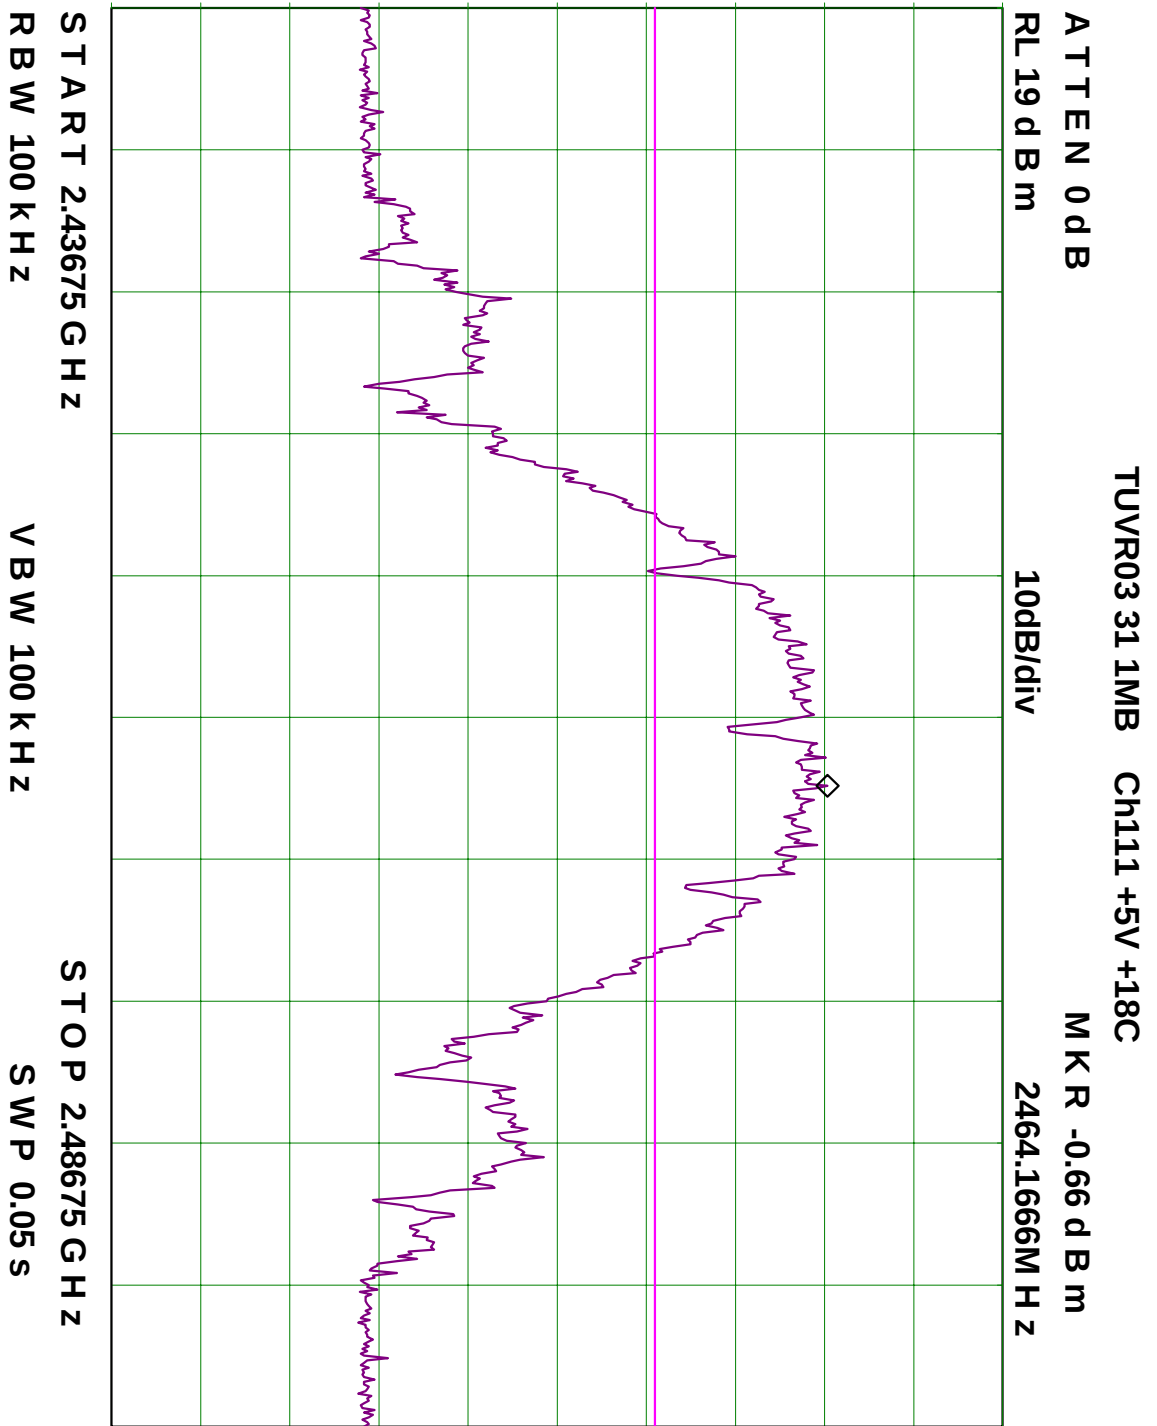

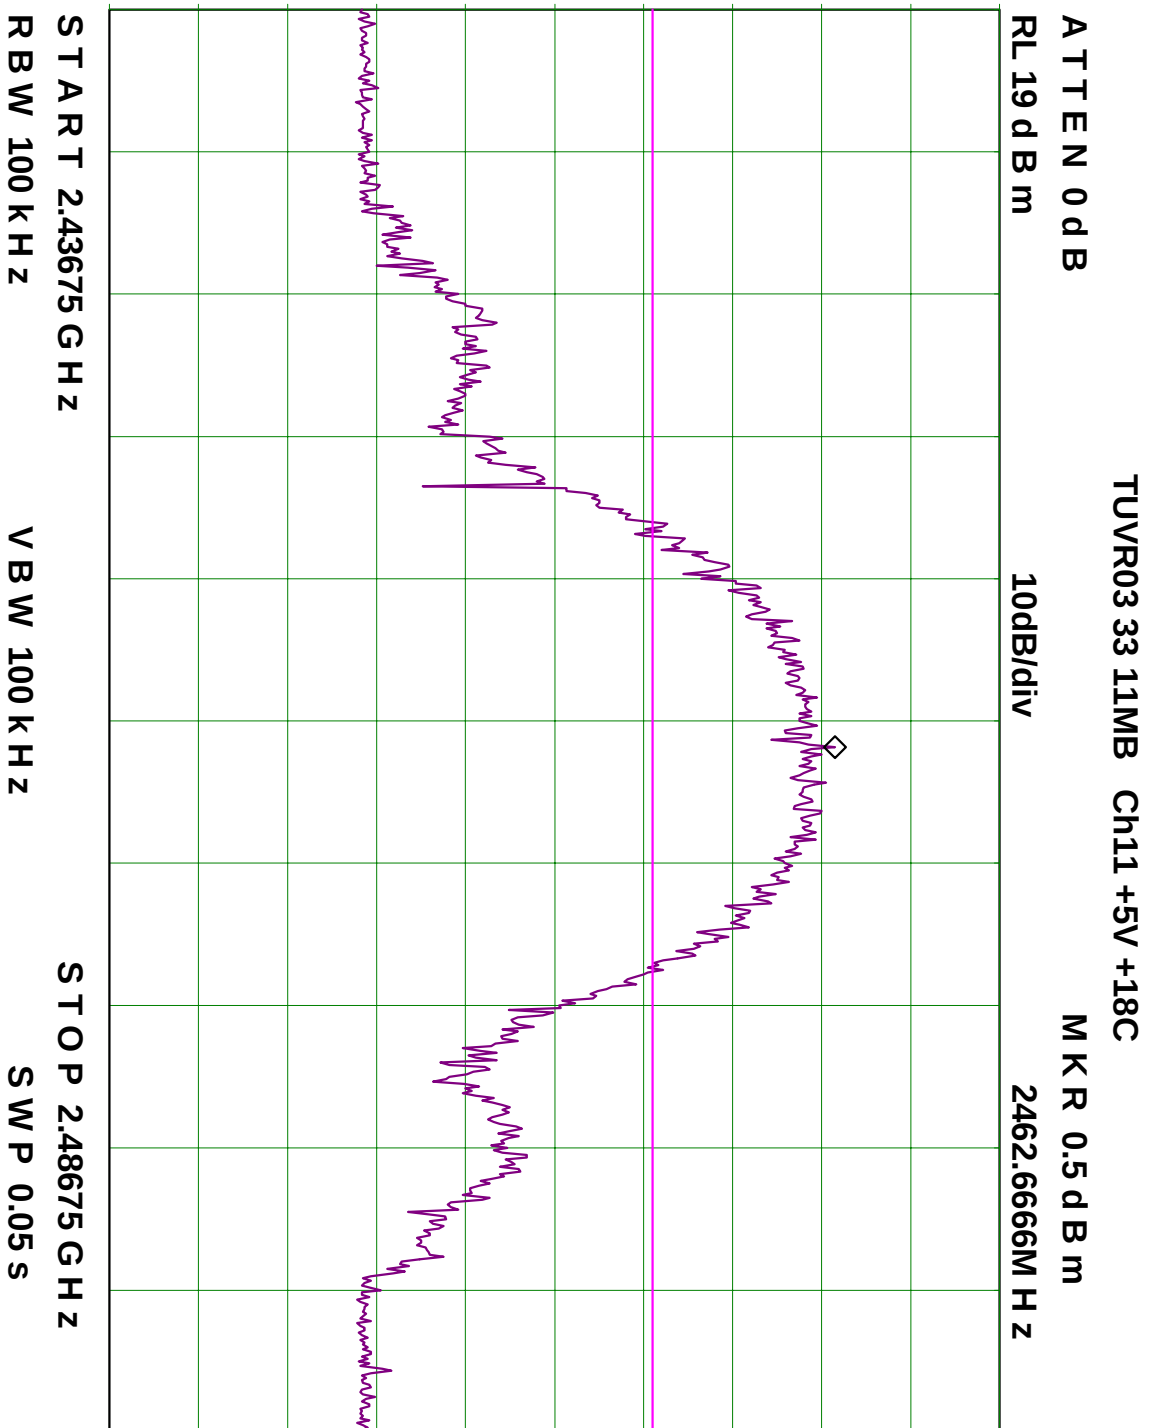


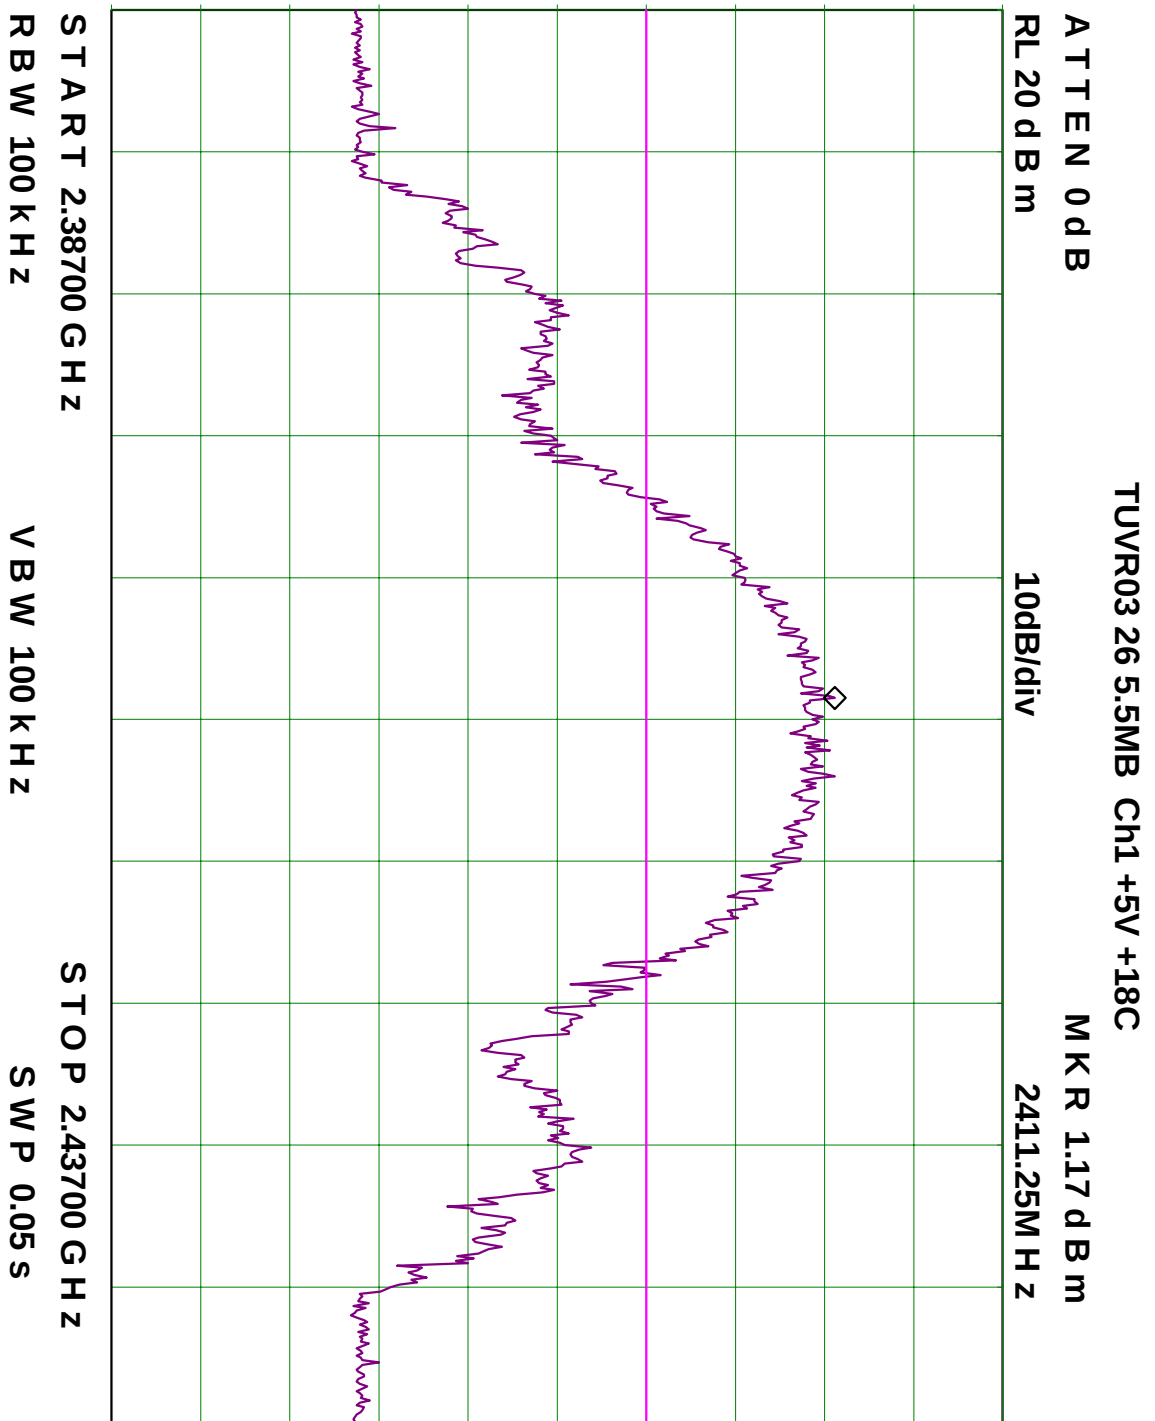




Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 63 of 69

Line N (Neutral) – Channel 6 (2,437MHz) Receive Mode Only

Horizontal
29.Jan 03 11:45
Demod FM
Att 0 dB
RBW 9 kHz
MT 50 ms
PREAMP OFF

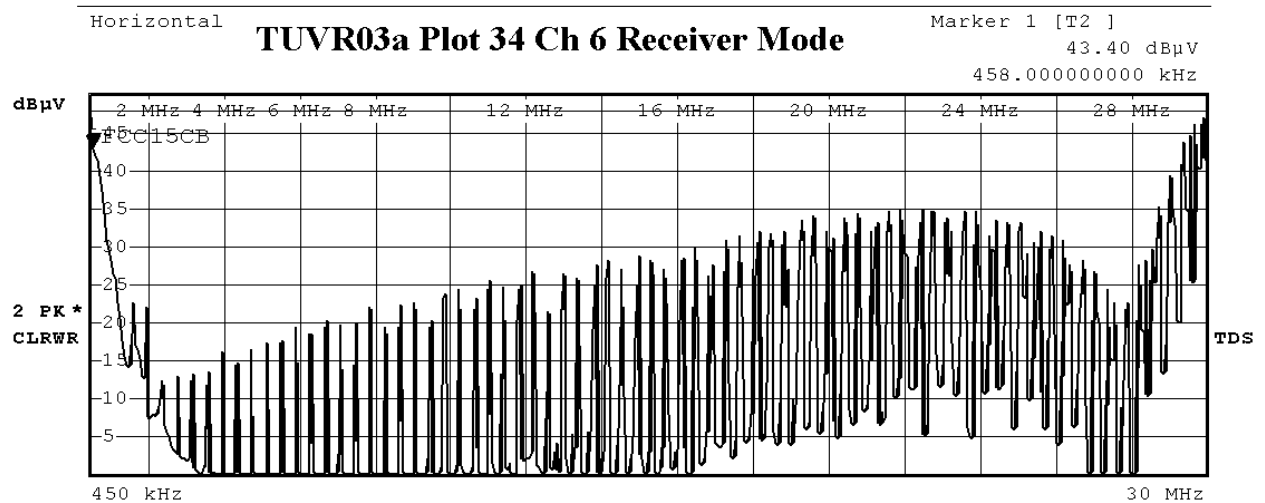
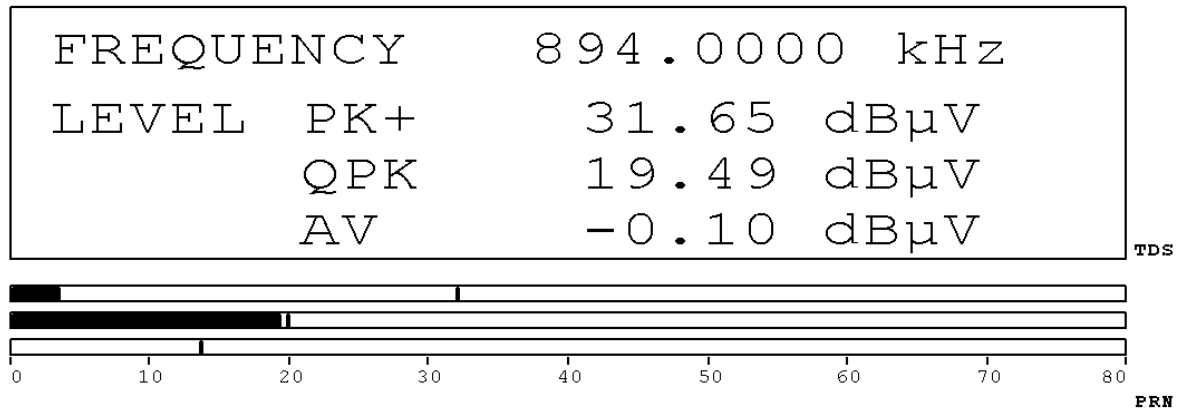


Date: 29.JAN.2003 11:45:18



Line N (Neutral) – Channel 6 (2,437MHz) Tx/Rx/Standby Mode

Horizontal
29.Jan 03 10:34
Demod FM
Att 0 dB
RBW 9 kHz
MT 50 ms
PREAMP OFF

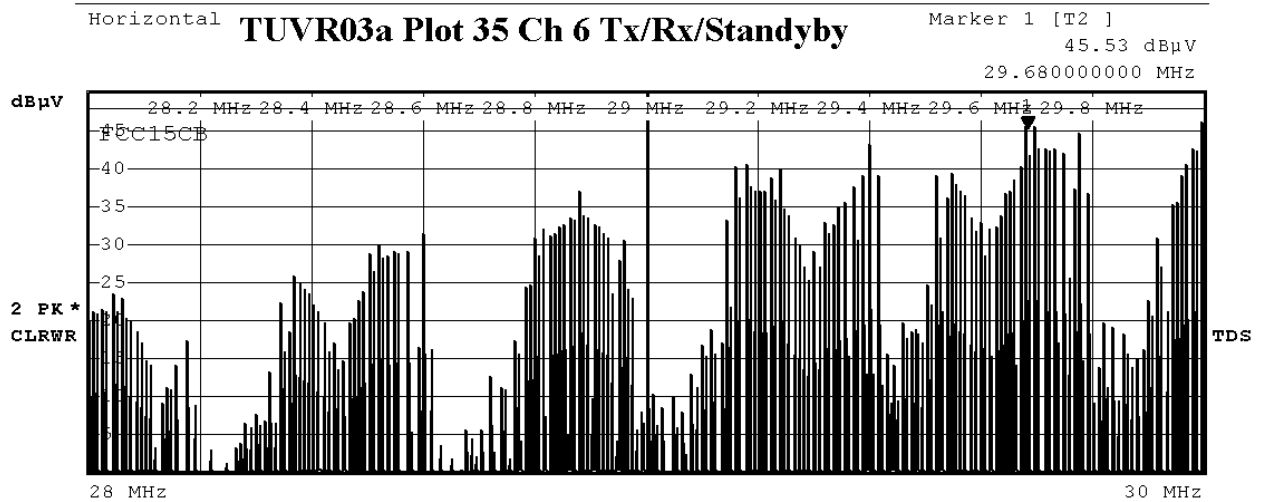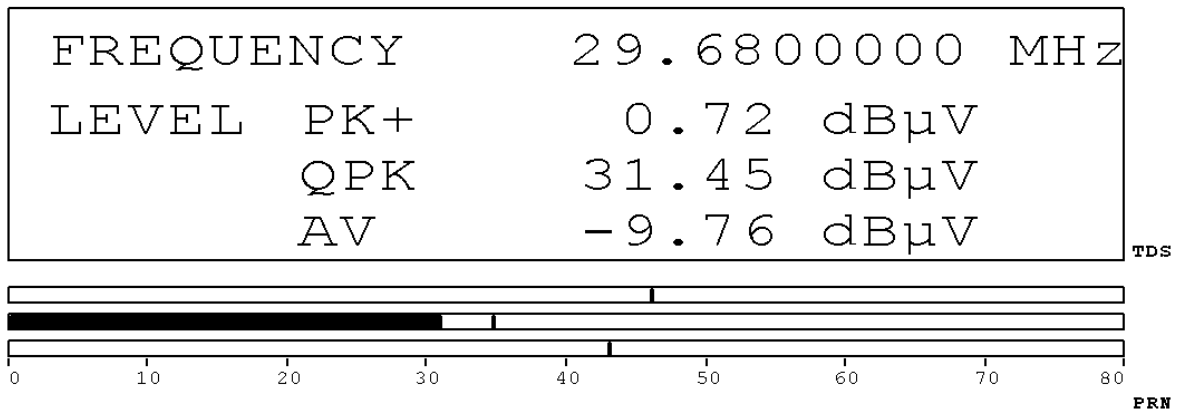



Date: 29.JAN.2003 10:34:04



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 65 of 69

Line L1 (Hot) – Channel 6 (2,437MHz) Receive Mode

Horizontal
29.Jan 03 12:14
Demod FM
Att 0 dB
RBW 9 kHz
MT 50 ms
PREAMP OFF

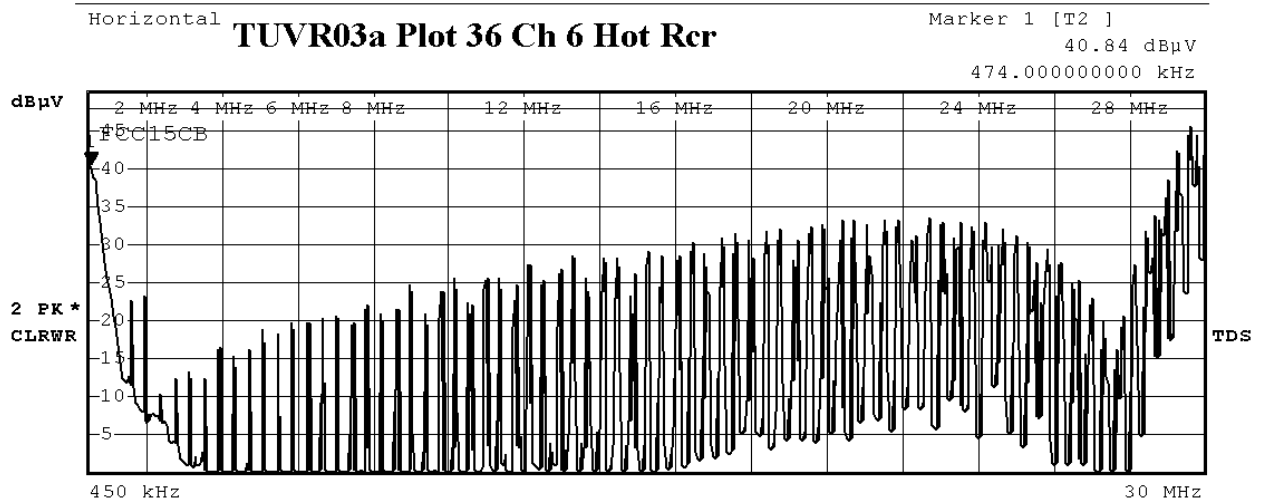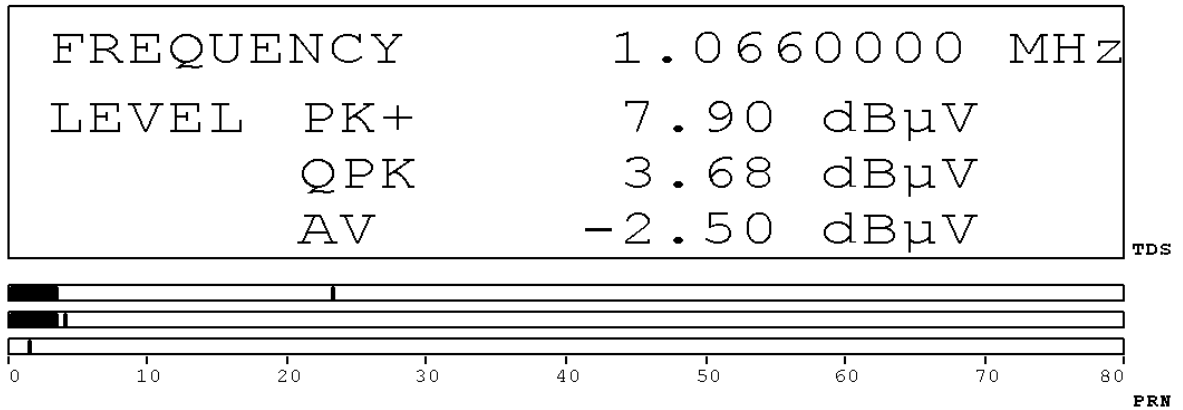

Date: 29.JAN.2003 12:14:08




Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 66 of 69

Line L1 (Hot) – Channel 6 (2,437MHz) Tx/Rx/Standby Mode

Horizontal
29.Jan 03 10:59
Demod FM
Att 0 dB
RBW 9 kHz
MT 50 ms
PREAMP OFF


FREQUENCY	23.9220000	MHz
LEVEL PK+	-0.38	dBμV
QPK	-8.20	dBμV
AV	-10.62	dBμV

TDS



PRN


Horizontal
TUVR03a Plot 37 Hot Tx/Rx/Stdby
Marker 1 [T2]
41.06 dBμV
470.000000000 kHz

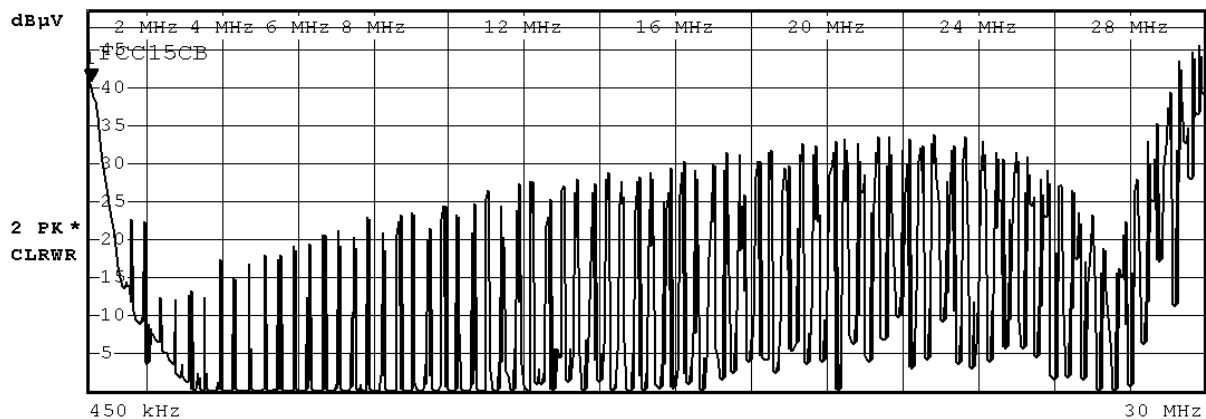


TDS

Date: 29.JAN.2003 10:59:53


Plots 38, 39, 40, 41 Notch Filter Response

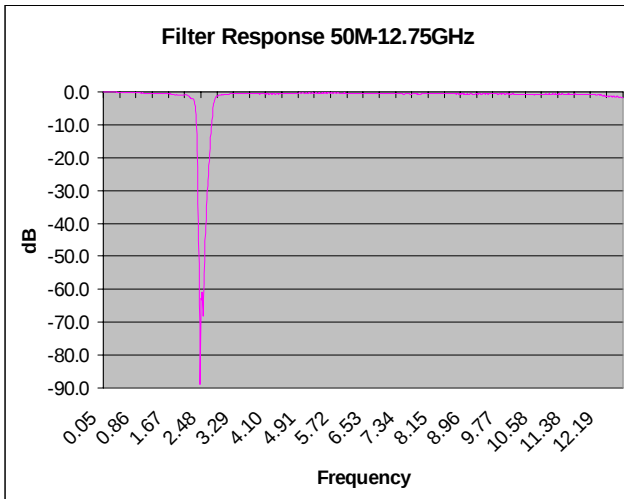


TUVR04a/38

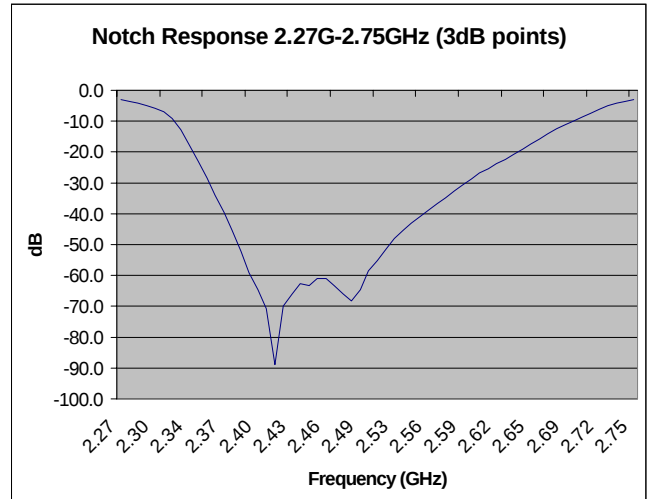

TUVR04a/39

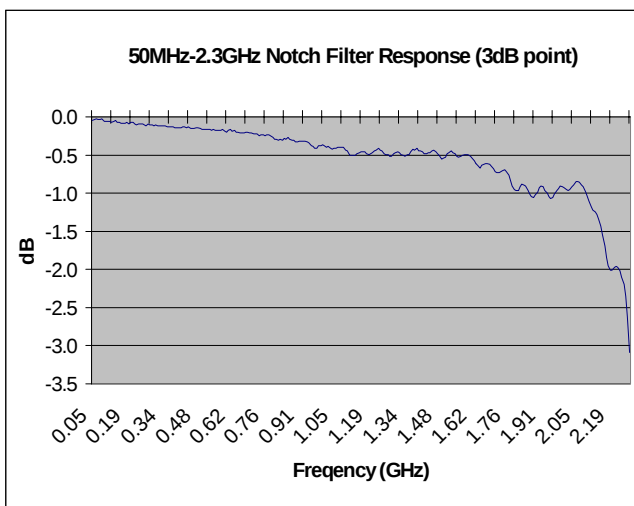

TUVR04a/40

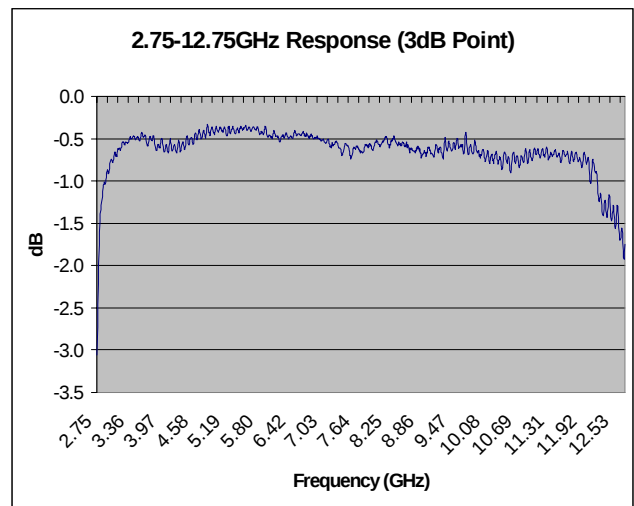

TUVR04a/41



Title: Test of SpectraLink SNP2400 Telephone
To: FCC 47 CFR Part 15.247/IC RSS-210
Serial #: TUVR03a/REVA
Issue Date: 17th February '03
Page: 68 of 69

7 Test Equipment

Asset Abbrev. #	Instrument	Manufacturer	Part #	Calibration Due Date	Serial #
Bar 1	Barometer/Thermometer	Control Co.	4196	10 Jun '03	E2844
RVA 01	Variable Coaxial Attenuator	Weinschel	940-60-33	22 Jun '03	A6595
K-CBL 08	SMA Cable	Megaphase	Sucoflex 104	27 Jun '03	Unknown
K-CBL 10	SMA Cable	Megaphase	Sucoflex 104	24 Oct '03	Unknown
K-CBL 11	SMA Cable	Megaphase	Sucoflex 104	27 Jun '03	Unknown
15F50B001	BNC Cable	Megaphase	Unknown	26 Oct '03	Unknown
15F50B002	BNC Cable	Megaphase	Unknown	26 Oct '03	Unknown
10F50B003	BNC Cable	Megaphase	Unknown	26 Oct '03	Unknown
15F50N001	N-Type Cable	Megaphase	Unknown	26 Oct '03	Unknown
5F50N001	N-Type Cable	Megaphase	Unknown	26 Oct '03	Unknown
ANT 1	Antenna (30M-2GHz)	Schaffner and Chase	CBLG140A	Not Applicable	1195
ANT1-18	Horn Antenna	The Electro-Mechanics Company	3115	21 Oct '03	9205-3882
Notch 1	2.4GHz	Microtronics	BRM50701	Not Applicable	001
AMP 3	Amplifier (0.5-22GHz)	Com-Power	PA-122	Not Applicable	181910
ReCVR 1	EMI Receiver	Rhode & Schwartz	ESI 7	11 Apr '03	838496/007
LISN 1	LISN	Rhode & Schwartz	ESH3Z5	25 Oct '03	836679/006
PMtr 1	Power Meter	Hewlett Packard	437B	1 Oct '03	3125U13554
PSnsr 1	Power Sensor	Hewlett Packard	R8485A	30 Jun '03	3318A19694
PSnsr 3	Power Sensor	Hewlett Packard	8487D	1 Oct '03	3318A00371
S-Anlr 1	Spectrum Analyser	Hewlett Packard	8565E	30 Jun '03	3425A00181
SSwpr 4	Synthesized Sweeper	Hewlett Packard	83640A	30 Jun '03	2927A00105



8 Summary Of Test Results

Test results reported in this document relate only to the items tested

Parameter	C	NC	NT	NA	Reference to remark
Transmitter characteristics					
Bandwidth at 6dB	X				
Occupier Bandwidth 20dB	X				
Band-Edge	X				
Out of Band Emissions (20dB)	X				
Processing Gain				X	
Transmitter Output Power	X				
Power Spectral Density	X				
AC Wireline Conducted Emissions (450KHz-30MHz)	X				
Restricted Band Radiation (30MHz-1GHz)	X				
Restricted Band Radiation (1GHz-25GHz)	X				

Note: C: The parameter is compliant with the requirements.
NC: The parameter is not compliant with the requirements.
NT: The parameter is not tested.
NA: The test of this parameter is not applicable.



3922 Valley Avenue, Suite "B"
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com