

# Test Report

Report Number:

**F171908E5**

Equipment under Test (EUT):

**Vehicle key  
PK3**

Applicant:

**Marquardt GmbH**

Manufacturer:

**Marquardt GmbH**



Deutsche  
Akkreditierungsstelle  
D-PL-17186-01-01  
D-PL-17186-01-02  
D-PL-17186-01-03


## References

- [1] **ANSI C63.10: 2013** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- [2] **FCC 47 CFR Part 15 (October 12, 2017)** Radio Frequency Devices
- [3] **RSS-210 Issue 9 (August 2016)** Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
- [4] **RSS-Gen Issue 4 (November 2014)** General Requirements and Information for the Certification of Radiocommunication Equipment

## Test result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

|                      |                     |                                                                                      |               |
|----------------------|---------------------|--------------------------------------------------------------------------------------|---------------|
| Test engineer:       | Wolfgang KASALOWSKY |  | 19.10.2017    |
|                      | _____<br>Name       | _____<br>Signature                                                                   | _____<br>Date |
| Authorized reviewer: | Bernd STEINER       |  | 19.10.2017    |
|                      | _____<br>Name       | _____<br>Signature                                                                   | _____<br>Date |

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

This test report is valid in hardcopy form as well as in electronic form.

| <b>Contents:</b>                         | <b>Page</b> |
|------------------------------------------|-------------|
| 1 Identification.....                    | 4           |
| 1.1 Applicant.....                       | 4           |
| 1.2 Manufacturer.....                    | 4           |
| 1.3 Test laboratory .....                | 4           |
| 1.4 EUT (Equipment Under Test) .....     | 5           |
| 1.5 Technical data of equipment.....     | 5           |
| 1.6 Dates .....                          | 6           |
| 2 Operational states.....                | 7           |
| 3 Additional information .....           | 8           |
| 4 Overview.....                          | 8           |
| 5 Results.....                           | 9           |
| 5.1 20 dB bandwidth .....                | 9           |
| 5.1.1 Method of measurement .....        | 9           |
| 5.1.2 Test result.....                   | 10          |
| 5.2 99 % bandwidth.....                  | 12          |
| 5.2.1 Method of measurement .....        | 12          |
| 5.2.2 Test result.....                   | 13          |
| 5.3 Transmission time control.....       | 15          |
| 5.3.1 Method of measurement .....        | 15          |
| 5.3.2 Test result.....                   | 16          |
| 5.4 Radiated emissions.....              | 18          |
| 5.4.1 General method of measurement..... | 18          |
| 5.4.2 Test results .....                 | 25          |
| 6 Test Equipment used for Tests .....    | 35          |
| 7 Report History.....                    | 36          |
| 8 List of Annexes .....                  | 36          |

# 1 Identification

## 1.1 Applicant

|                                                                |                                                                              |
|----------------------------------------------------------------|------------------------------------------------------------------------------|
| Name:                                                          | Marquardt GmbH                                                               |
| Address:                                                       | Schloßstraße 16<br>78604 Rietheim - Weilheim                                 |
| Country:                                                       | Germany                                                                      |
| Name for contact purposes:                                     | Mr. Mathias KIEFER                                                           |
| Phone:                                                         | +49 7424 99-28189                                                            |
| Fax:                                                           | +49 7424 99-2541                                                             |
| eMail Address:                                                 | <a href="mailto:mathias.kiefer@marquardt.de">mathias.kiefer@marquardt.de</a> |
| Applicant represented during the test by the following person: | -                                                                            |

## 1.2 Manufacturer

|                                                                   |                                                                              |
|-------------------------------------------------------------------|------------------------------------------------------------------------------|
| Name:                                                             | Marquardt GmbH                                                               |
| Address:                                                          | Schloßstraße 16<br>78604 Rietheim - Weilheim                                 |
| Country:                                                          | Germany                                                                      |
| Name for contact purposes:                                        | Mr. Mathias KIEFER                                                           |
| Phone:                                                            | +49 7424 99-28189                                                            |
| Fax:                                                              | +49 7424 99-2541                                                             |
| eMail Address:                                                    | <a href="mailto:mathias.kiefer@marquardt.de">mathias.kiefer@marquardt.de</a> |
| Manufacturer represented during the test by the following person: | -                                                                            |

## 1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**32825 Blomberg**  
**Germany**

accredited by Deutsche Akkreditierungsstelle GmbH (DAKKS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-02, FCC Test Firm Accreditation with the registration number 469623, designation number DE0004 and Industry Canada Test site registration SITE# IC3469A-1.

## 1.4 EUT (Equipment Under Test)

|                            |                                   |
|----------------------------|-----------------------------------|
| Test object: *             | Vehicle key                       |
| Model / HVIN: *            | PK3                               |
| PMN: *                     | PK3                               |
| Serial number: *           | Test mode: #D1<br>Normal mode: #1 |
| PCB identifier: *          | 243.213.111                       |
| Hardware version:          | HW40                              |
| Software version / FVIN: * | SW231                             |
| FCC ID: *                  | IYZ-PK3                           |
| IC: *                      | 2701A-PK3                         |

\*: Declared by the applicant

## 1.5 Technical data of equipment

|                            |                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Vehicle key:</b>        | <b>PK3</b>                                                                                                            |
| Power supply: *            | Lithium battery CR2032                                                                                                |
| Supply voltage: *          | U <sub>nom</sub> = 3.0 V <sub>DC</sub> U <sub>min</sub> = 2.55 V <sub>DC</sub> U <sub>max</sub> = 3.0 V <sub>DC</sub> |
| Temperature range: *       | -20 °C to +70 °C                                                                                                      |
| <b>RF part:</b>            |                                                                                                                       |
| Duty cycle class:*         | Manual triggered device                                                                                               |
| Channel spacing: *         | 450 kHz (three channel operation)                                                                                     |
| Operating Frequencies: *   | 433.47 MHz / 433.92 MHz / 434.37 MHz                                                                                  |
| Transmitter power (ERP): * | typ. -17 dBm                                                                                                          |
| Modulation: *              | 2FSK                                                                                                                  |
| Frequency deviation: *     | ± 5 kHz @ 5 kBit/s<br>± 20 kHz @ 20 kBit/s                                                                            |
| Data rate: *               | 5 kBit/s; 20 kBit/s                                                                                                   |
| Antenna: *                 | integrated PCB-Loop antenna                                                                                           |
| <b>LF receiver</b>         |                                                                                                                       |
| Operating frequency: *     | 21.85 kHz                                                                                                             |
| Number of channels: *      | 1                                                                                                                     |
| Type of modulation: *      | BPSK                                                                                                                  |
| Data rate: *               | 5.4 kBit/s; 2.7 kBit/s                                                                                                |
| Antenna type: *            | 3D-Axis-Coil, Rx at all axis                                                                                          |

\*: Declared by the applicant

## 1.6 Dates

|                                 |            |
|---------------------------------|------------|
| Date of receipt of test sample: | 07.09.2017 |
| Start of test:                  | 18.10.2017 |
| End of test:                    | 19.10.2017 |

## 2 Operational states

The PK3 (vehicle key) is a component of a driving authorisation system of a car.

The component exchange encrypted data with the vehicle for car access, to start the engine and to locate the key. The PK3 contains three buttons for car access. By pressing the dedicated button the PK3 sends over RF authorization data to the control unit to open the doors. The 2nd button releases data to lock the doors. A third button is dedicated to open the trunk deck. An additional "PANIC" button is implemented.

Moreover car access is also released after touching the door handles. The key is waken by the magnetic field of the LF antennas, driven by the Body control unit of the vehicle. The PK3 sends over RF encrypted data in return for authentication.

In case the battery is low car access is possible by means of an integrated mechanic emergency key. The PK3 is then to be placed into a dedicated slot inside the centre console to be powered wireless by means of a magnetic field.

The RF Transmitter sends encrypted data to the vehicle modulated on an RF carrier of 433MHz. When pressing a button on the PK3 a dedicated command with the encrypted data for authentication is sent:

### Open-Button:

- Pressed short: unlocks the doors
- Pressed long: unlocks the doors and opens the windows

### Close-Button:

- Pressed short: locks the doors
- Pressed long: locks the doors and closes the windows

### Trunk-Button: to unlock the boot lid

An LED indicates that appropriate data was sent.

### **Test modes:**

In test mode the EUT is transmitting continuously with a duty cycle of 100%.

### Trunk Button: ON/OFF

ON: LED blinks twice (long) and during transmission continuously (short)

OFF: LED blinks 4 times (long)

### Open Button: Channel select

The three channels can be selected consecutively. After insertion of the battery CH1 (433.47MHz) is selected by default. To select the next channel press the "Open" button again. Remember to check the LED.

CH1 ( $f_c = 433.47\text{MHz}$ ): LED blinks once

CH2 ( $f_c = 433.92\text{MHz}$ ): LED blinks twice

CH3 ( $f_c = 434.37\text{MHz}$ ): LED blinks three times

### Close Button: Modulation on/off

There are four modes available, which can be selected consecutively. After insertion of the battery Mode 1 is selected by default. To select the next mode press the "Close" button again. Remember to check the LED.

Mode 1 (selected channel unmodulated  $f_c - 5\text{ kHz}$ ): LED blinks once

Mode 2 (selected channel unmodulated  $f_c + 5\text{ kHz}$ ): LED blinks twice

Mode 3 (selected channel modulated 5kBaud): LED blinks three times

Mode 4 (selected channel modulated 20kBaud): LED blinks four times

### 3 Additional information

Object of this test report is the UHF transmitter of the EUT.

The radiated tests were performed with a sample in test mode powered by its battery.  
The tests were performed with a new battery inserted to the EUT.

### 4 Overview

| Application               | Frequency range [MHz] | FCC 47 CFR Part 15 section [2]         | RSS 210, Issue 9 [3] or RSS-Gen, Issue 4 [4] | Status | Refer page |
|---------------------------|-----------------------|----------------------------------------|----------------------------------------------|--------|------------|
| Occupied bandwidth        | 433.47 to 434.37      | 15.231 (c)                             | A1.3 [3]                                     | Passed | 9 et seq.  |
| Transmission time control | 433.47 to 434.37      | 15.231 (a) (1)                         | A1.1 (a) [3]                                 | Passed | 15 et seq. |
| Radiated emissions        | 0.009 – 4500          | 15.231 (b)<br>15.205 (a)<br>15.209 (a) | A1.2 [3]<br>4.1 [3]<br>6.13 [4]              | Passed | 18 et seq. |

## 5 Results

### 5.1 20 dB bandwidth

#### 5.1.1 Method of measurement

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture has to be used. The EUT has to be switched on; the transmitter shall work with its maximum data rate.

The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual channel.
- Resolution bandwidth: Between 1 % to 5 % of the required bandwidth, if no requirements were made, the following minimum values shall be used:  
From 9 kHz to 30 MHz:  $RBW_{min} = 1 \text{ kHz}$ ;  
from 30 MHz to 1000: MHz  $RBW_{min} = 10 \text{ kHz}$ ;  
and from 1000 MHz to 40 GHz:  $RBW_{min} = 100 \text{ kHz}$ .
- Video bandwidth: <sup>3</sup> the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.


The measurement will be performed at the middle of the assigned frequency band.

Test set-up: Measurement was performed in an anechoic chamber with an EUT in test mode.

### 5.1.2 Test result


|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 55 % |
|---------------------|-------|-------------------|------|

20 dB Bandwidth @ channel 2 (433.92 MHz) at data rate 5 kBit/s:

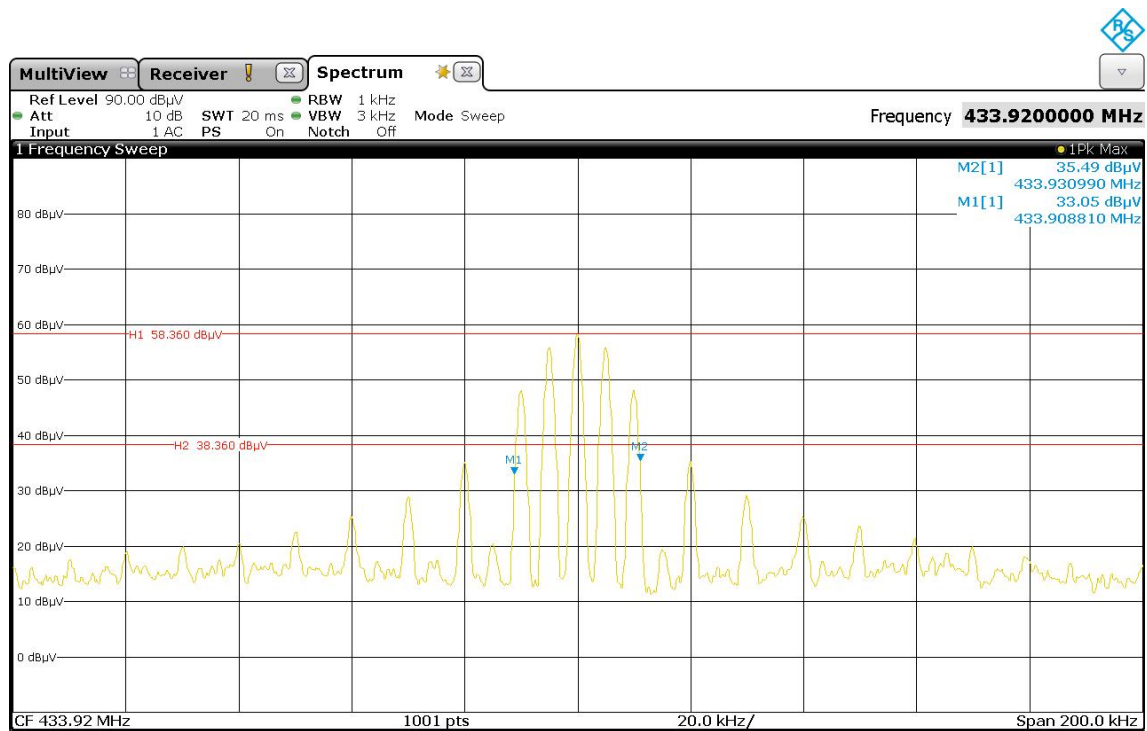

| Lower frequency<br>[MHz]                                                    | Upper frequency | 20 dB bandwidth | LIMIT<br>(0.25 % of the center frequency) |
|-----------------------------------------------------------------------------|-----------------|-----------------|-------------------------------------------|
| 433.908810 MHz                                                              | 433.930990 MHz  | 22.180 kHz      | 1084.800 kHz                              |
| Measurement uncertainty: $<10^{-7}$ (frequency), 0.66 dB / -0.72 dB (level) |                 |                 |                                           |

20 dB Bandwidth @ channel 2 (433.92 MHz) at data rate 20 kBit/s:

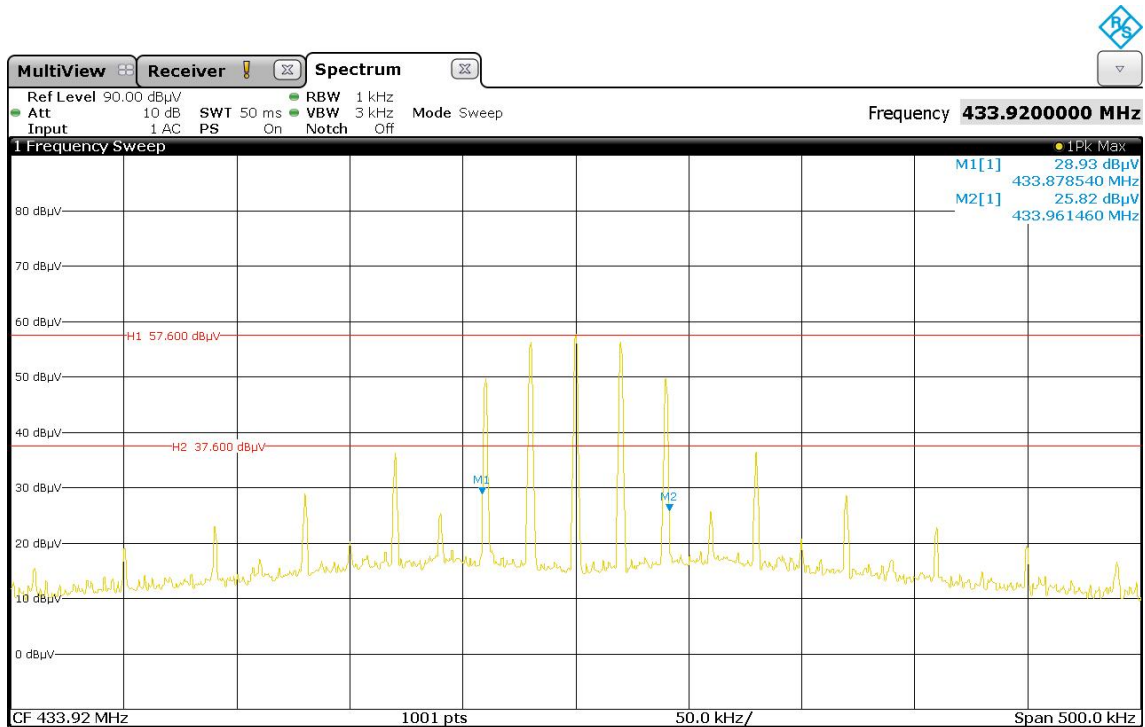

| Lower frequency                                                             | Upper frequency | 20 dB bandwidth | LIMIT<br>(0.25 % of the center frequency) |
|-----------------------------------------------------------------------------|-----------------|-----------------|-------------------------------------------|
| 433.878540 MHz                                                              | 433.961460 MHz  | 82.920 kHz      | 1084.800 kHz                              |
| Measurement uncertainty: $<10^{-7}$ (frequency), 0.66 dB / -0.72 dB (level) |                 |                 |                                           |

Test: Passed

Test equipment (please refer chapter 6 for details)

9, 10, 12 - 15, 17, 19

## 5.2 99 % bandwidth

### 5.2.1 Method of measurement

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.


The difference between the two recorded frequencies is the 99 % occupied bandwidth.

Test set-up: Measurement was performed in an anechoic chamber with an EUT in test mode.

## 5.2.2 Test result


|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 55 % |
|---------------------|-------|-------------------|------|

99%-Bandwidth @ channel 2 (433.92 MHz) at data rate 5 kBit/s:

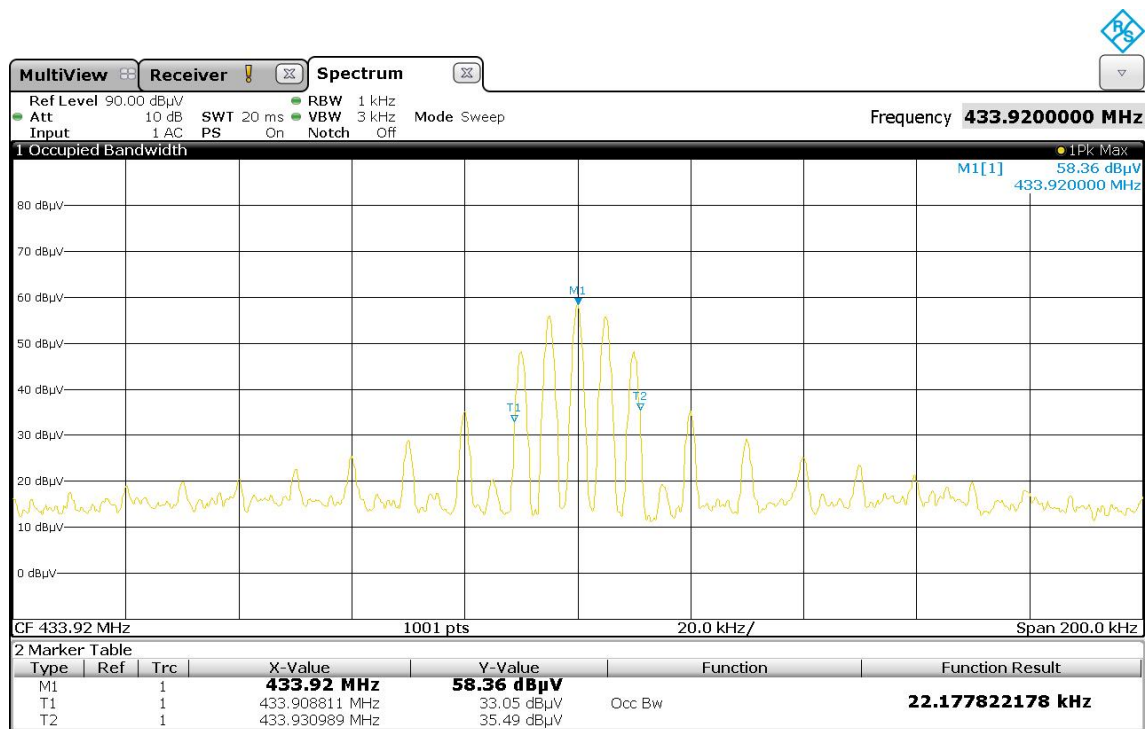

| Lower frequency                                                                    | Upper frequency | 99 % bandwidth | LIMIT<br>(0.25 % of the center frequency) |
|------------------------------------------------------------------------------------|-----------------|----------------|-------------------------------------------|
| 433.908811 MHz                                                                     | 433.930989 MHz  | 22.178 kHz     | 1084.800 kHz                              |
| Measurement uncertainty: <10 <sup>-7</sup> (frequency), 0.66 dB / -0.72 dB (level) |                 |                |                                           |

99%-Bandwidth @ channel 2 (433.92 MHz) at data rate 20 kBit/s:

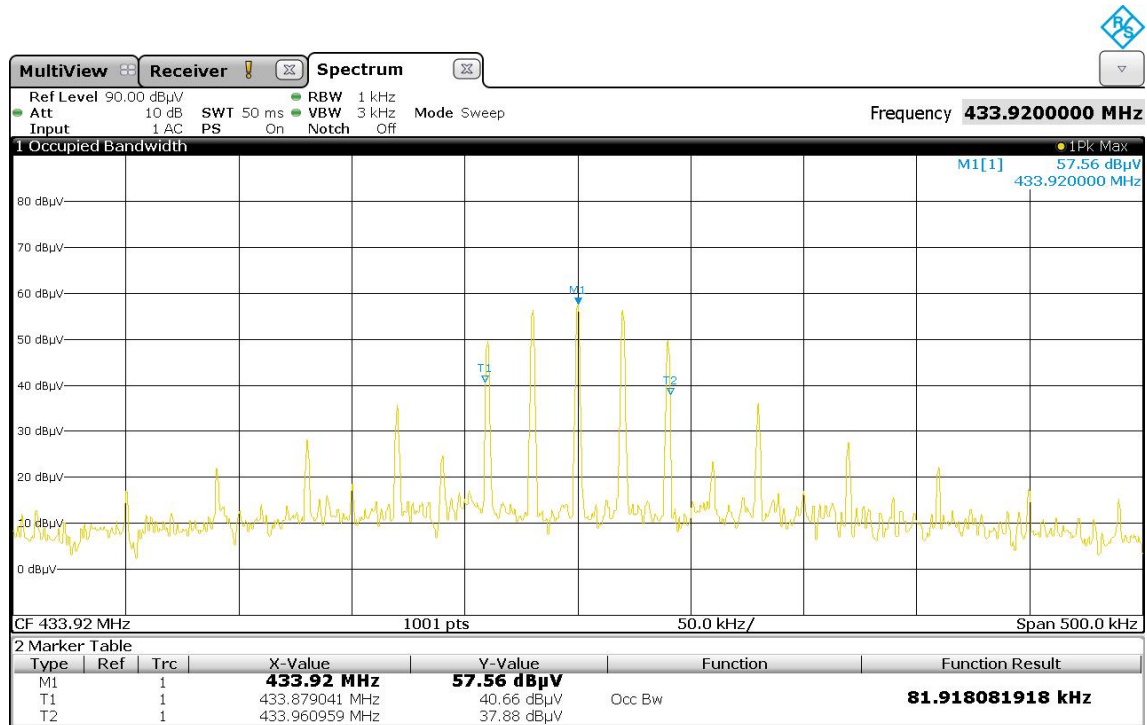

| Lower frequency                                                                    | Upper frequency | 99 % bandwidth | LIMIT<br>(0.25 % of the center frequency) |
|------------------------------------------------------------------------------------|-----------------|----------------|-------------------------------------------|
| 433.879041 MHz                                                                     | 433.960959 MHz  | 81.918 kHz     | 1084.800 kHz                              |
| Measurement uncertainty: <10 <sup>-7</sup> (frequency), 0.66 dB / -0.72 dB (level) |                 |                |                                           |

Test: Passed

Test equipment (please refer chapter 6 for details)

9, 10, 12 - 15, 17, 19

## 5.3 Transmission time control

### 5.3.1 Method of measurement

1. The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed or a test fixture has to be used. The EUT has to be switched on, the transmitter shall work with its maximum data rate.


The following spectrum analyser settings shall be used:

- Span: = 0 Hz.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: <sup>3</sup> the resolution bandwidth.
- Sweep: Single sweep with at least 5 seconds.
- Detector function: peak.
- Trace mode: Max hold.

The frequency line shall be set a point, where the transmitter will be released. The sweep shall start, when the transmitter started to operate. The transmitter shall be released when the trace crosses the frequency line. One marker shall be set to the point of the frequency line, a delta marker to the time, where the transmitter stopped transmission.

-

Test set-up:

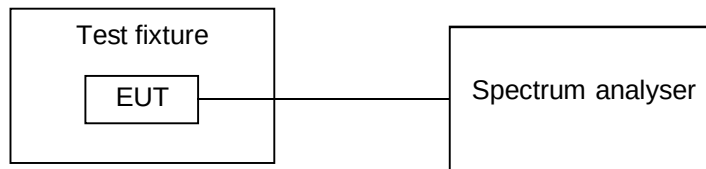


### 5.3.2 Test result

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 52 % |
|---------------------|-------|-------------------|------|

The EUT starts transmitting as soon as a button is pressed.  
The duration of transmission depends on the duration the button is pressed. The transmission will automatically stop after 87.660 seconds even if the button is pressed for a longer time.


Measurement was performed with EUTs in normal mode.

#### Maximum transmission time:

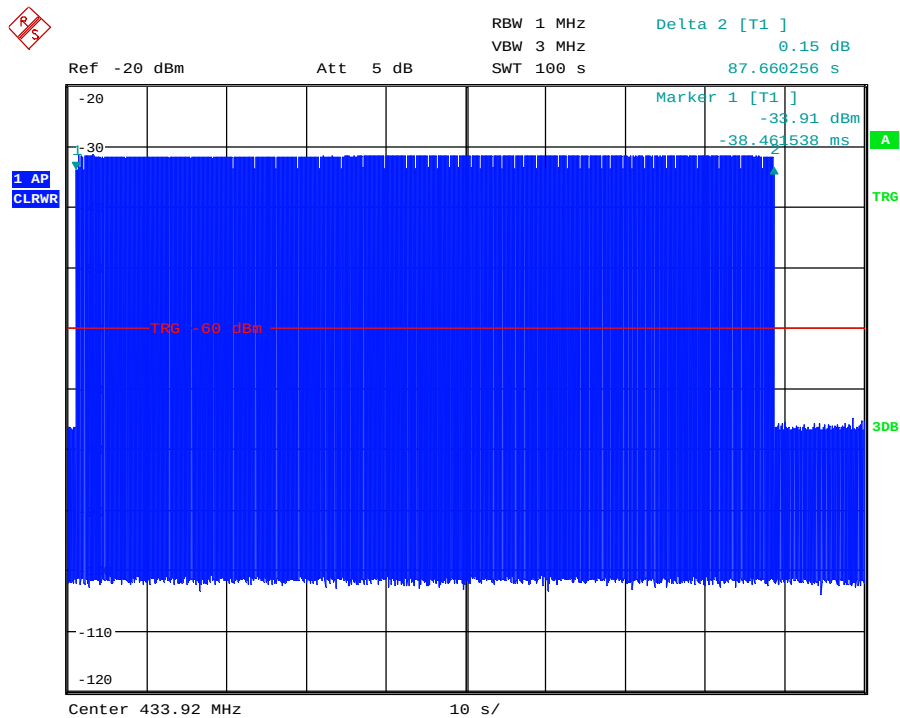

The worst case for the transmitter release time is presented in the plot below.

Transmitter release time:

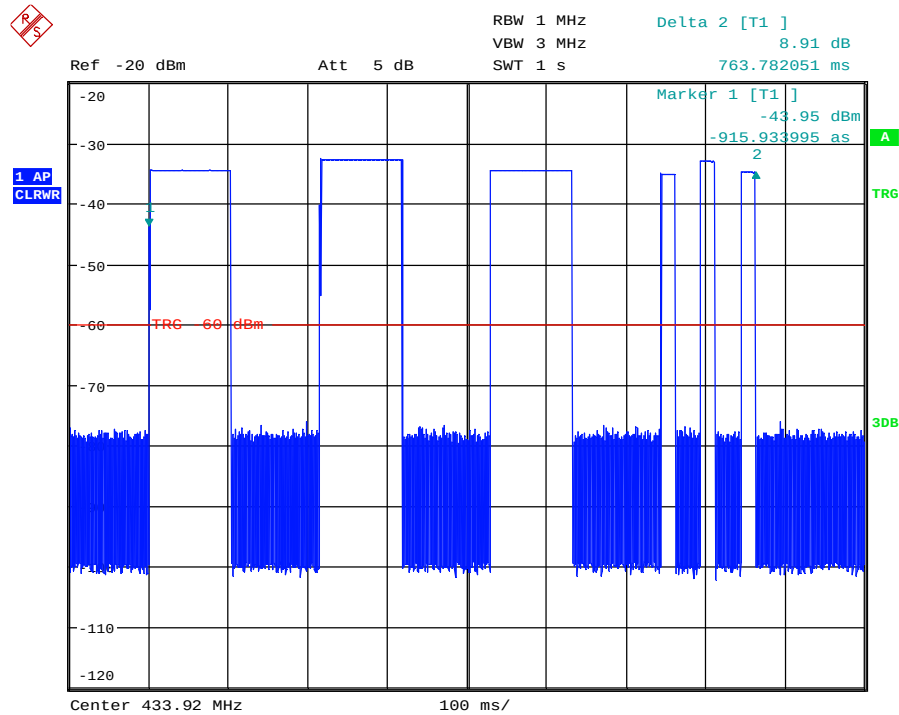

| Transmitter release time | LIMIT      |
|--------------------------|------------|
| 763.782 ms               | 5 s        |
| Measurement uncertainty  | $<10^{-7}$ |

Test: Passed

Test equipment (please refer chapter 6 for details)

11, 18

## 5.4 Radiated emissions

### 5.4.1 General method of measurement

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 25 / 40 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 40 GHz.


#### Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Table-top devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set-up of the Equipment under test will be in accordance to [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz  | 300 Hz               |
| 150 kHz to 30 MHz | 10 kHz               |

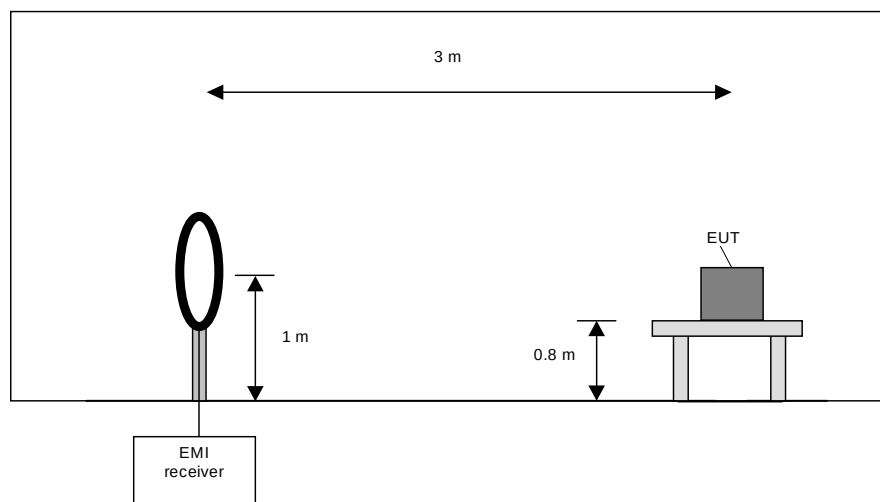

#### Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


#### Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the frequencies, which were detected during the preliminary measurements, the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range   | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz  | 200 Hz               |
| 150 kHz to 30 MHz | 9 kHz                |

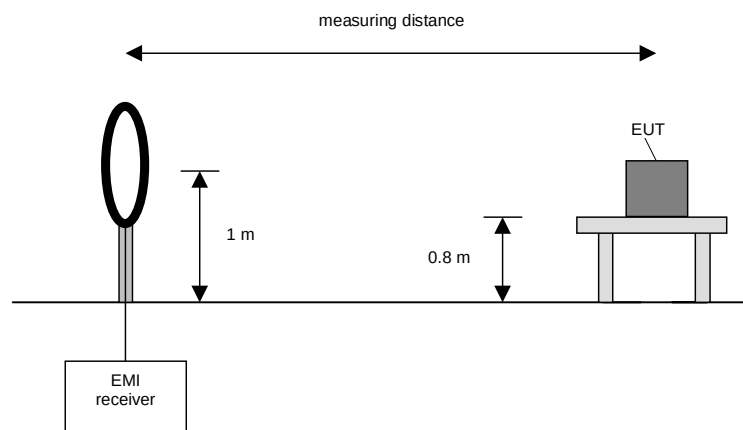

#### Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (if the EUT is a module and might be used in a handheld equipment application).


#### **Preliminary measurement (30 MHz to 1 GHz)**

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. Floor-standing devices will be placed directly on the turntable/ground plane. The set-up of the Equipment under test will be in accordance to [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-----------------|----------------------|
| 30 MHz to 1 GHz | 100 kHz              |

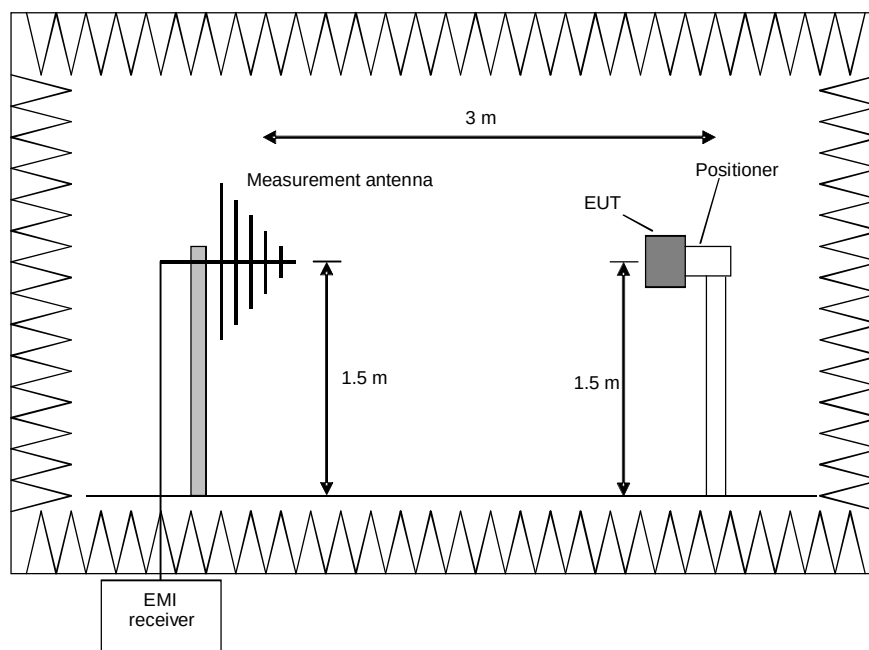

#### Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.  
The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Repeat 1) to 3) with the vertical polarisation of the measuring antenna.
5. Make a hardcopy of the spectrum.
6. Repeat 1) to 5) with the EUT raised by an angle of 30 ° (60 °, 90 °, 120 ° and 150 °) according to 6.6.5.4 in [1].
7. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.

#### Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-----------------|----------------------|
| 30 MHz to 1 GHz | 120 kHz              |

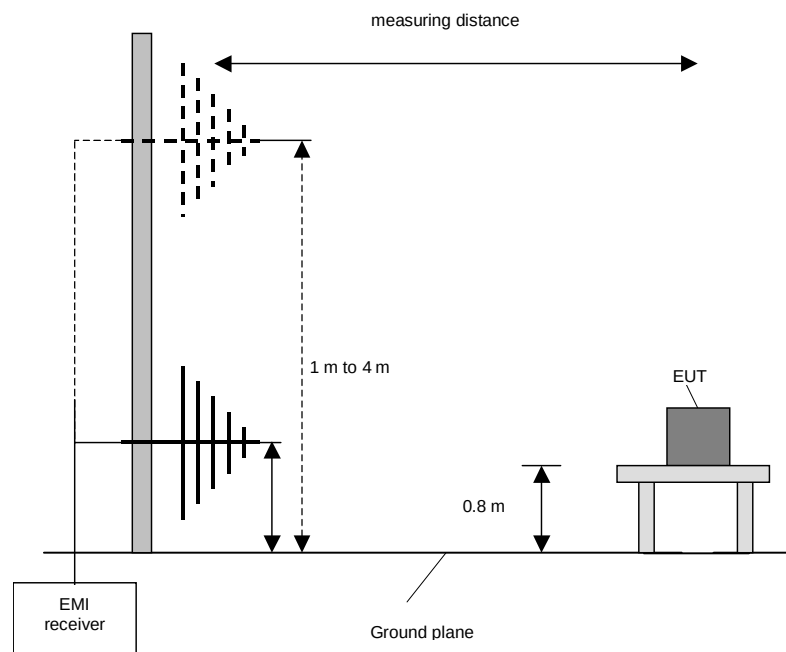

#### Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

#### **Preliminary and final measurement (1 GHz to 40 GHz)**


This measurement will be performed in a fully anechoic chamber. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. The set-up of the Equipment under test will be in accordance to [1].

#### **Preliminary measurement (1 GHz to 40 GHz)**

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range         | Resolution bandwidth |
|-------------------------|----------------------|
| 1 GHz to 4 GHz          | 100 kHz              |
| 4 GHz to 12 GHz         | 100 kHz              |
| 12 GHz to 18 GHz        | 100 kHz              |
| 18 GHz to 25 / 26.5 GHz | 100 kHz              |
| 26.5 GHz to 40 GHz      | 100 kHz              |

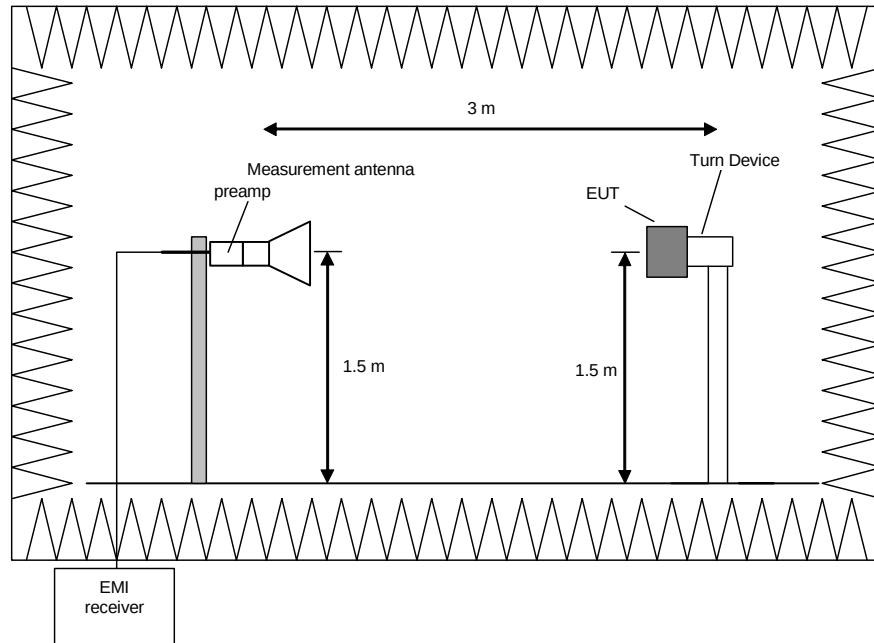

#### Procedure preliminary measurement:

Prescans were performed in the frequency range 1 to 40 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Rotate the EUT by 360° to maximize the detected signals.
3. Repeat 1) to 2) with the vertical polarisation of the measuring antenna.
4. Make a hardcopy of the spectrum.
5. Repeat 1) to 4) with the EUT raised by an angle of 30° (60°, 90°, 120° and 150°) according to 6.6.5.4 in [1].
6. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
7. The measurement antenna polarisation, with the according EUT position (Turntable and Turn device) which produces the highest emission for each frequency will be used for the final measurement. The six closest values to the applicable limit will be used for the final measurement.

#### Final measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed by rotating the turntable through 0 to 360° in the worst-case EUT orientation which was obtained during the preliminary measurements.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range         | Resolution bandwidth |
|-------------------------|----------------------|
| 1 GHz to 4 GHz          | 1 MHz                |
| 4 GHz to 12 GHz         | 1 MHz                |
| 12 GHz to 18 GHz        | 1 MHz                |
| 18 GHz to 25 / 26.5 GHz | 1 MHz                |
| 26.5 GHz to 40 GHz      | 1 MHz                |

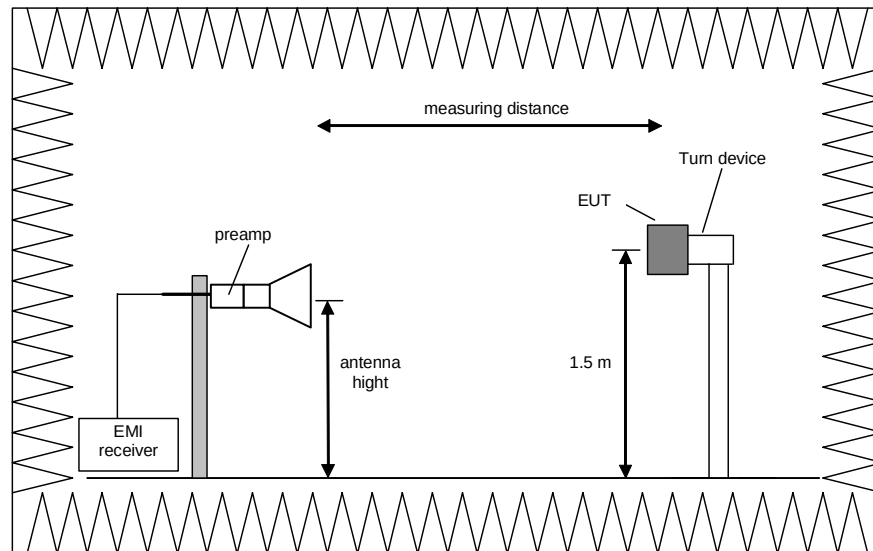

#### Procedure of measurement:

The measurements were performed in the frequency ranges 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 25 /26.5 GHz and 26.5 GHz to 40 GHz.

The following procedure will be used:

- 1) Set the turntable and the turn device to obtain the worst-case emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna polarisation to the orientation with the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with peak and average detector activated.
- 4) Rotate the turntable from 0° to 360° to find the EUT angle that produces the highest emissions.
- 5) Note the highest displayed peak and average values
- 6) Repeat the steps 1) to 5) for each frequency detected during the preliminary measurements.

## 5.4.2 Test results


### 5.4.2.1 Preliminary radiated emission measurement (9 kHz to 4.5 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 55 % |
|---------------------|-------|-------------------|------|

|                  |                                                                                                                            |
|------------------|----------------------------------------------------------------------------------------------------------------------------|
| Position of EUT: | The EUT was set-up on a non-conducting table of a height of 0.8 m and 1.5 m. The distance between EUT and antenna was 3 m. |
| Cable guide:     | For detail information of test set-up refer to the pictures in annex A of this test report.                                |
| Test record:     | All results are shown in the following.                                                                                    |
| Supply voltage:  | During all measurements the EUT was supplied with 3 V <sub>DC</sub> by battery.                                            |
| Frequency range: | The preliminary measurement was carried out in the frequency range 9 kHz to 4 GHz according to [2].                        |
| Mode of EUT:     | Test mode: EUT transmits continuously with a data rate of 5 kBit/s or 20 kBit/s and a duty cycle of 100%.                  |

**Transmitter operates at 433.92 MHz**

**Spurious emissions from 9 kHz to 30 MHz:**

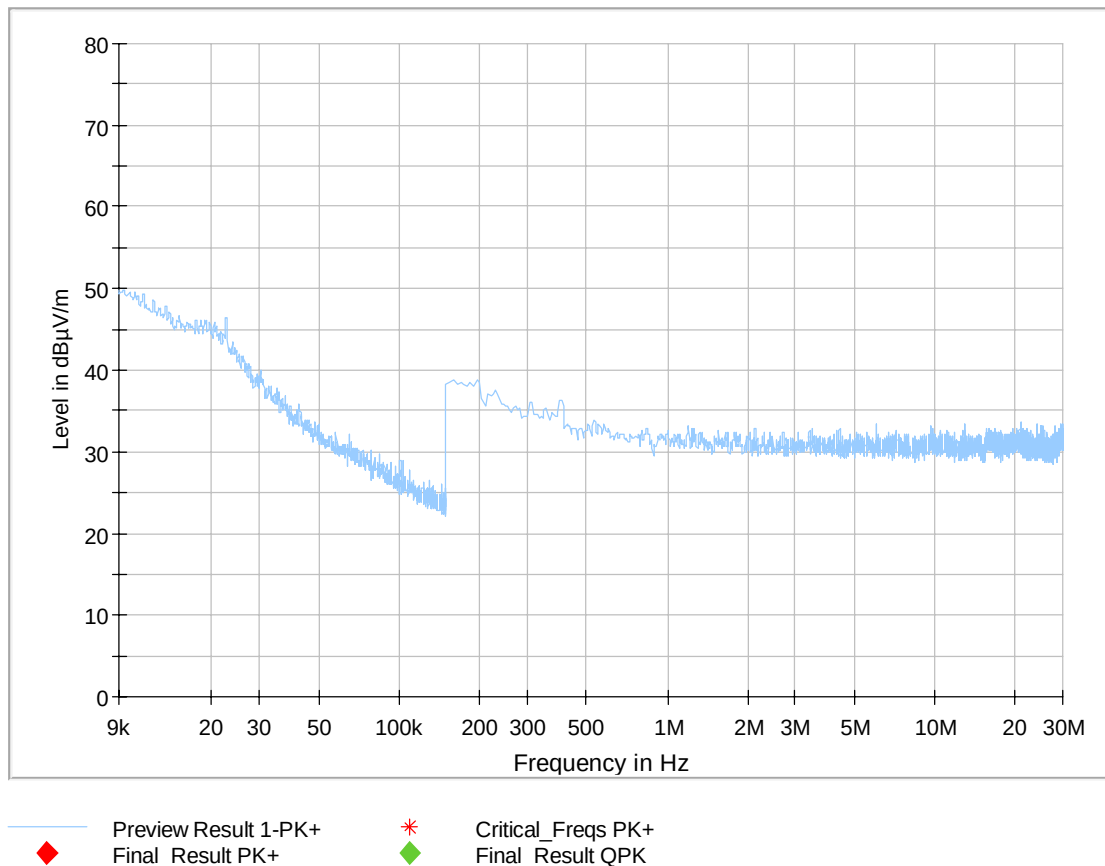

No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test for PK3.


Therefore no measurements were carried out at the outdoor test site.

Test equipment used (see chapter 6):


9, 10, 12, 13, 20

Spurious emissions from 30 MHz to 1 GHz:

Data rate 5 kBit/s

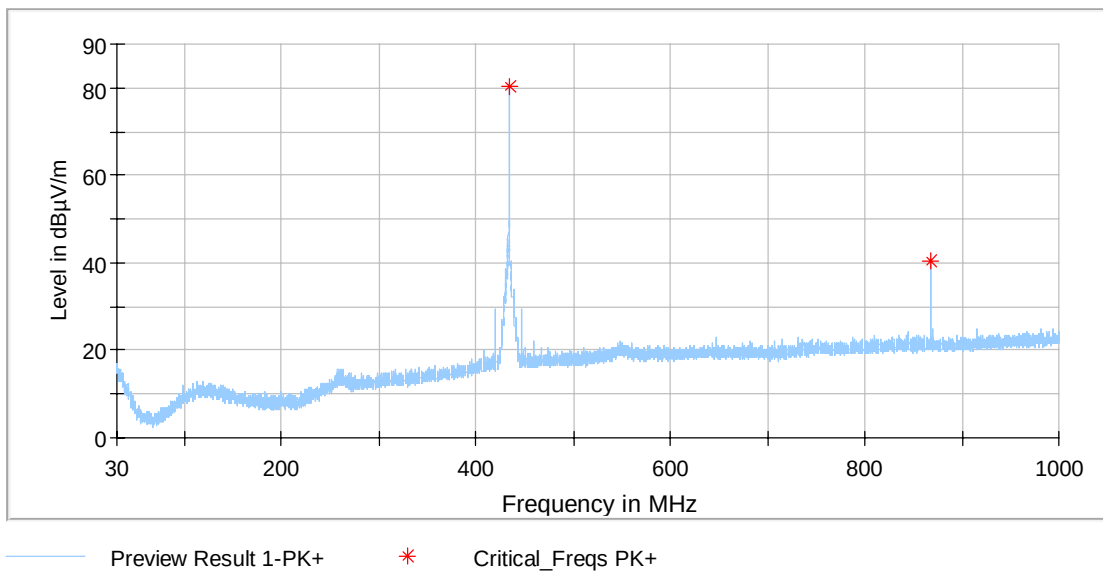

Data rate 20 kBit/s

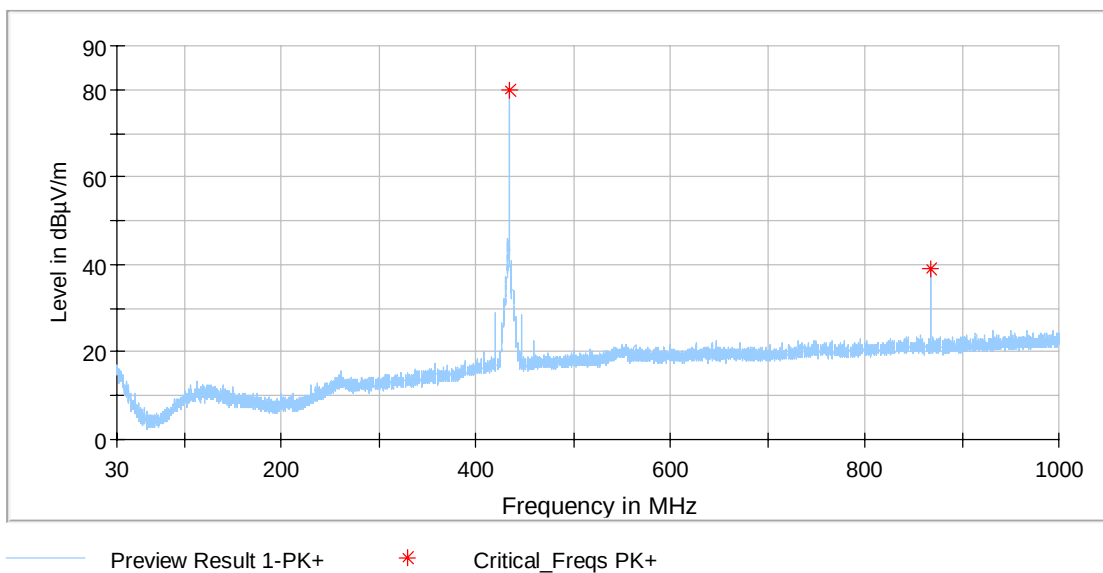

The nominal frequency of the transmitter 433.92 MHz and the 2<sup>nd</sup> harmonic 867.84 MHz were found during the preliminary radiated emission test.


These frequencies will be measured in a final measurement. The results are shown in chapter 5.4.2.3.

Test equipment used (see chapter 6):

9, 10, 12 - 15, 17, 19


Spurious emissions from 1 GHz to 4.5 GHz:

Data rate 5 kBit/s:

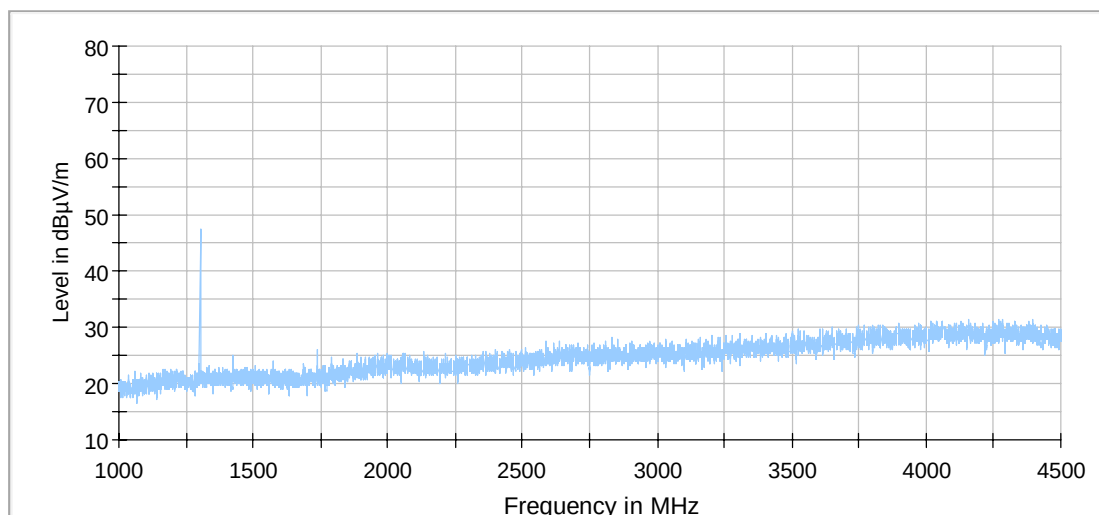

PK+\_MAXH

Data rate 20 kBit/s:

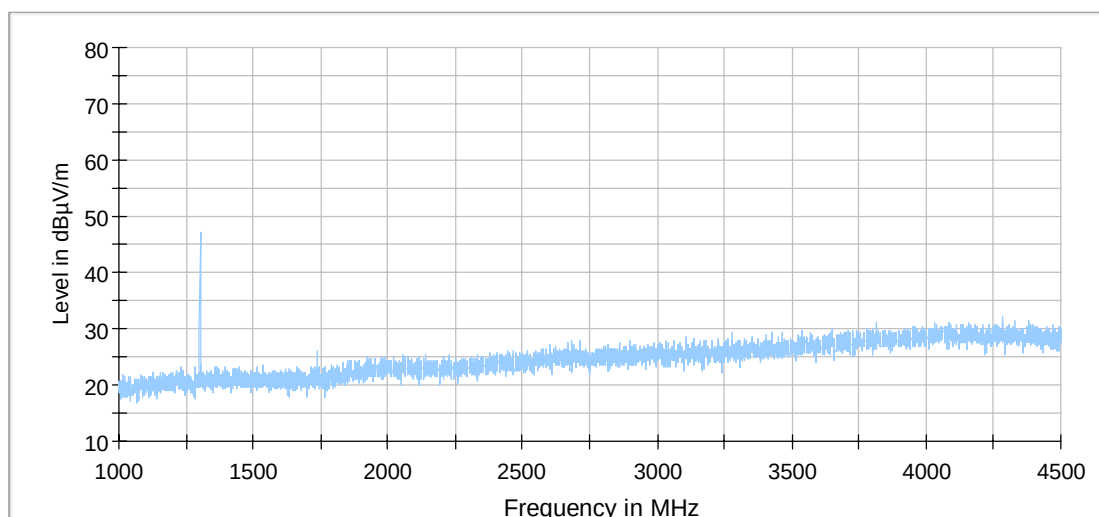

PK+\_MAXH

The following frequencies were found during the preliminary radiated emission test:

Inside restricted bands: 1301.76 MHz

These frequencies have to be measured in a final measurement. The results are shown in chapter 5.4.2.4.

Test equipment used (see chapter 6):

9, 10, 12 - 14, 16, 17, 21 - 23

#### 5.4.2.2 Final radiated emission measurement (9 kHz to 30 MHz)

No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, therefore no final measurements were carried out at the outdoor test site.

#### 5.4.2.3 Final radiated emission measurement (30 MHz to 1 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 18 °C | Relative humidity | 36 % |
|---------------------|-------|-------------------|------|

|                  |                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------|
| Position of EUT: | The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m. |
| Cable guide:     | For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.  |
| Test record:     | All results are shown in the following.                                                                          |
| Supply voltage:  | During all measurements the EUT was supplied with 3 V <sub>DC</sub> by battery.                                  |
| Mode of EUT:     | Test mode: EUT transmits continuously with a data rate of 5 kBit/s and a duty cycle of 100%.                     |
| Test results:    | The test results were calculated with the following formula:                                                     |


Result [dBμV/m] = reading [dBμV] + cable loss [dB] + antenna factor [dB/m] + 6 dB (used attenuator)

The measured points and the limit line in the following diagrams refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with an x are the measured results of the standard final measurement on the open area test site.

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.


The measurement time with the quasi-peak measuring detector is 1 second.

Due to the fact that the EUT is portable equipment it was measured in three orthogonal positions:

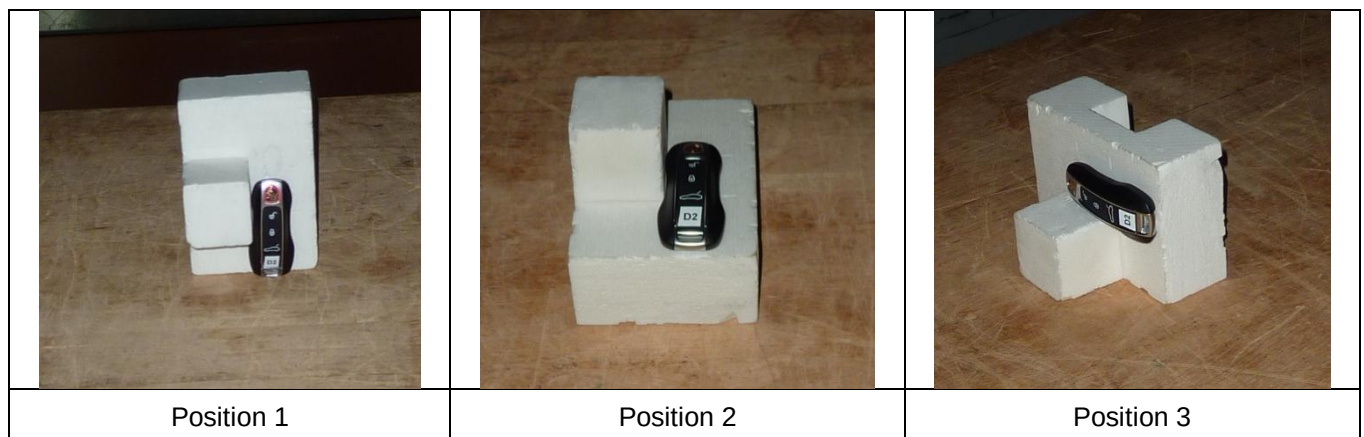

**Transmitter operates at 433.92 MHz**

Data rate: 5 kBit/s

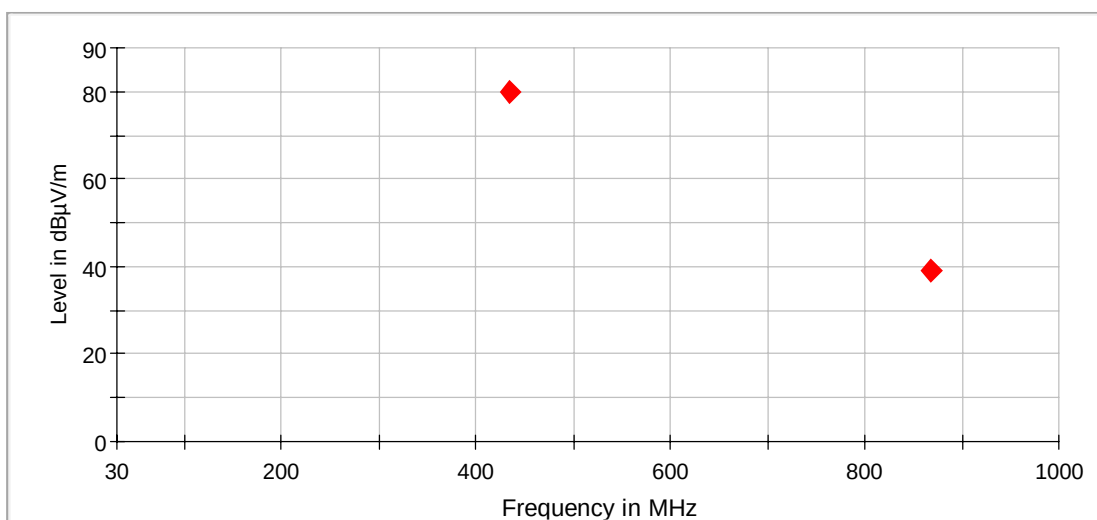


◆ Final\_Result QPK

**Final\_Result**

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV/m) | Limit *<br>(dBμV/ | Margin<br>(dB) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Height<br>(cm) | Pol. | Azimuth<br>(deg) | Corr.<br>(dB) | EUT<br>position |
|--------------------|-----------------------|-------------------|----------------|-----------------------|--------------------|----------------|------|------------------|---------------|-----------------|
| 433.908000         | 80.20                 | 80.82             | 0.62           | 1000.0                | 120.000            | 104.0          | H    | 120.0            | 26.3          | 2               |
| 867.837500         | 39.62                 | 60.82             | 21.20          | 1000.0                | 120.000            | 110.0          | H    | 86.0             | 34.0          | 2               |

\*) Limit calculated according to [2] Part 15.231 (b)

Data rate: 20 kBit/s

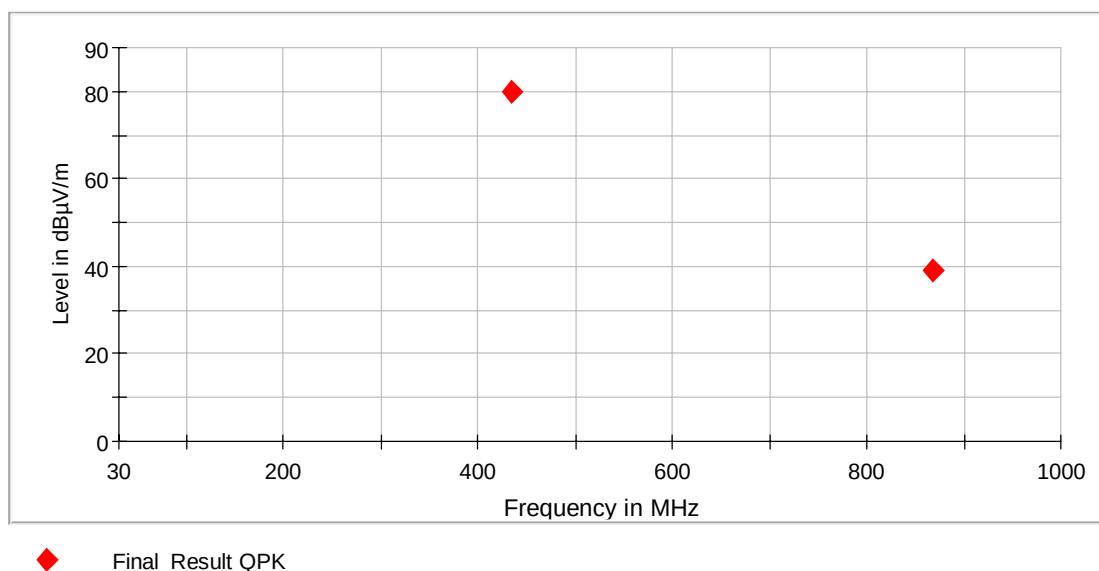

## Final\_Result

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV/m) | Limit *<br>(dBμV/ | Margin<br>(dB) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Height<br>(cm) | Pol. | Azimuth<br>(deg) | Corr.<br>(dB) | EUT<br>position |
|--------------------|-----------------------|-------------------|----------------|-----------------------|--------------------|----------------|------|------------------|---------------|-----------------|
| 433.908000         | 79.86                 | 80.82             | 0.96           | 1000.0                | 120.000            | 106.0          | H    | 130.0            | 26.3          | 2               |
| 867.886000         | 38.89                 | 60.82             | 21.93          | 1000.0                | 120.000            | 108.0          | H    | 91.0             | 34.0          | 2               |

\*) Limit calculated according to [2] Part 15.231 (b)

Test: Passed

Test equipment used (see chapter 6):

1 - 8


#### 5.4.2.4 Final radiated emission measurement (1 GHz to 4.5 GHz)

|                     |       |                   |      |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 26 % |
|---------------------|-------|-------------------|------|

|                       |                                                                                                                  |
|-----------------------|------------------------------------------------------------------------------------------------------------------|
| Position of EUT:      | The EUT was set-up on a non-conducting table of a height of 1.5 m. The distance between EUT and antenna was 3 m. |
| Cable guide:          | For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.  |
| Test record:          | All results are shown in the following.                                                                          |
| Supply voltage:       | During all measurements the EUT was supplied with 3 V <sub>DC</sub> by battery.                                  |
| Resolution bandwidth: | For all measurements a resolution bandwidth of 1 MHz was used.                                                   |
| Mode of EUT:          | Test mode: EUT transmits continuously with a data rate of 5 kBit/s or 20 kBit/s and a duty cycle of 100%.        |

**Transmitter operates at 433.92 MHz**

Data rate: 5 kBit/s

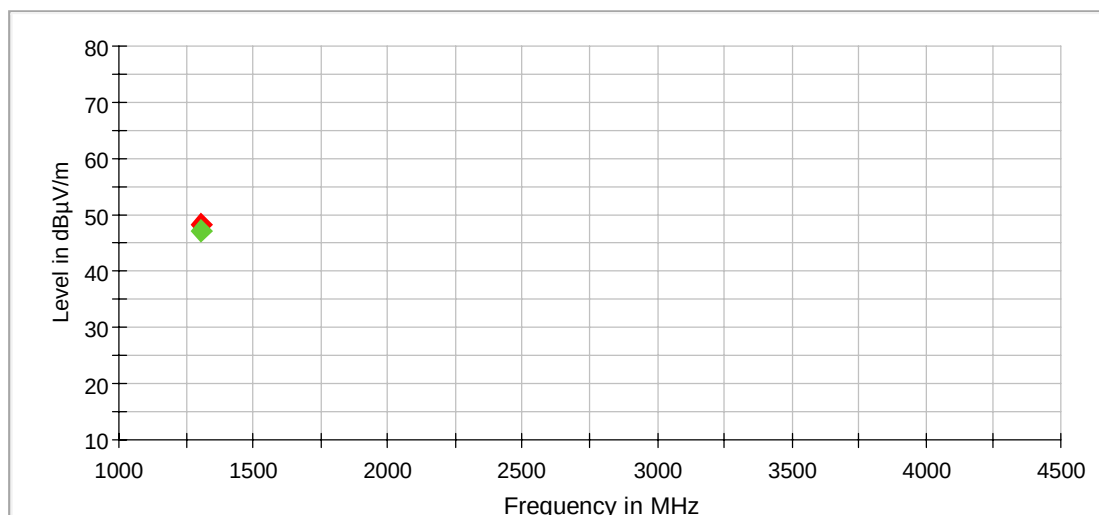

◆ Final\_Result PK+      ◆ Final\_Result CAV

**Final Result**

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Pol | Azimuth (deg) | Elevation (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|---------------|-----------------|------------|
| 1301.743750     | ---              | 47.01            | 54.00          | 6.99        | V   | 216.0         | 0.0             | -14.6      |
| 1301.743750     | 48.24            | ---              | 74.00          | 25.76       | V   | 216.0         | 0.0             | -14.6      |

Measurement uncertainty      +5.1 dB / -5.1 dB


The correction factor was calculated as follows:

Corr. (dB) = cable attenuation (dB) + amplifier gain(dB) + antenna factor (dBµV/m)

Therefore the reading can be calculated as follows:

Reading (dBµV/m) = result Peak/Average (dBµV/m) - Corr. (dB)

Data rate: 20 kBit/s

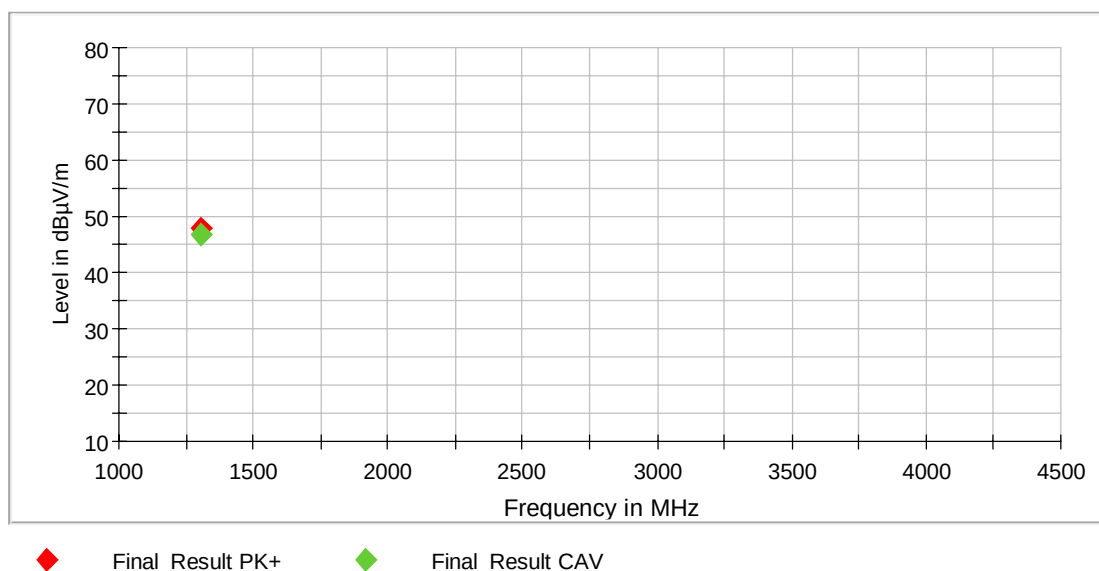

### Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Pol | Azimuth (deg) | Elevation (deg) | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|---------------|-----------------|------------|
| 1301.809375     | ---              | 46.63            | 54.00          | 7.37        | V   | 220.0         | 0.0             | -14.6      |
| 1301.809375     | 47.96            | ---              | 74.00          | 26.04       | V   | 220.0         | 0.0             | -14.6      |

Measurement uncertainty      +5.1 dB / -5.1 dB

The correction factor was calculated as follows:

Corr. (dB) = cable attenuation (dB) + amplifier gain(dB) + antenna factor (dBµV/m)

Therefore the reading can be calculated as follows:

Reading (dBµV/m) = result Peak/Average (dBµV/m) - Corr. (dB)

Test:      Passed

Test equipment used (see chapter 6):

9, 10, 12-14, 16, 17, 21 - 23

## 6 Test Equipment used for Tests

| No. | Test equipment             | Type               | Manufacturer       | Serial No.         | PM. No. | Cal. Date                         | Cal. due |
|-----|----------------------------|--------------------|--------------------|--------------------|---------|-----------------------------------|----------|
| 1   | EMI Software               | EMC 32             | Rohde & Schwarz    | 100061             | 481022  | -                                 | -        |
| 2   | Open area test site        | -                  | Phoenix Test-Lab   | -                  | 480085  | Weekly verification (system cal.) |          |
| 3   | Measuring receiver         | ESIB7              | Rohde & Schwarz    | 100304             | 480521  | 18.02.2016                        | 02.2018  |
| 4   | Controller                 | HD100              | Deisel             | 100/670            | 480139  | -                                 | -        |
| 5   | Turntable                  | DS420HE            | Deisel             | 420/620/80         | 480087  | -                                 | -        |
| 6   | Antenna support            | AS615P             | Deisel             | 615/310            | 480086  | -                                 | -        |
| 7   | Antenna                    | CBL6111 D          | Chase              | 25761              | 480674  | 0209.2016                         | 09.2019  |
| 8   | 6 dB attenuator            | R412706000         | Radiall            | 9833               | 410082  | Weekly verification (system cal.) |          |
| 9   | Fully anechoic chamber M20 | -                  | Albatross Projects | B83107-E2439-T232  | 480303  | Weekly verification (system cal.) |          |
| 10  | Spectrum analyser          | ESW44              | Rohde & Schwarz    | 101635             | 482467  | 22.06.2017                        | 06.2019  |
| 11  | Spectrum Analyser          | FSU46              | Rohde & Schwarz    | 200125             | 480956  | 07.03.2017                        | 03.2018  |
| 12  | Controller                 | MCU                | Maturo             | MCU/043/971107     | 480832  | -                                 | -        |
| 13  | Turntable                  | DS420HE            | Deisel             | 420/620/80         | 480315  | -                                 | -        |
| 14  | Antenna support            | AS615P             | Deisel             | 615/310            | 480187  | -                                 | -        |
| 15  | Antenna                    | CBL6112 B          | Chase              | 2688               | 480328  | 19.06.2017                        | 06.2020  |
| 16  | Antenna                    | 3115A              | EMCO               | 9609-4918          | 480183  | 10.11.2014                        | 11.2017  |
| 17  | Positioner                 | TDF 1.5            | Maturo             | 15920215           | 482034  | -                                 | -        |
| 18  | Test fixture               | -                  | Phoenix Testlab    | -                  | 410160  | -                                 | -        |
| 19  | RF-cable No. 36            | Sucoflex 106B      | Suhner             | 0587/6B            | 480865  | Weekly verification (system cal.) |          |
| 20  | Loop antenna               | HFH2-Z2            | Rohde & Schwarz    | 832609/014         | 480059  | 29.02.2016                        | 02.2018  |
| 21  | RF-cable No. 38            | Sucoflex 106B      | Huber+Suhner       | 0709/6B / Kabel 38 | 481328  | Weekly verification (system cal.) |          |
| 22  | RF-cable No. 40            | Sucoflex 106B      | Huber+Suhner       | 0708/6B / Kabel 40 | 481330  | Weekly verification (system cal.) |          |
| 23  | Preamplifier               | JS3-00101200-23-5A | Miteq              | 681851             | 480337  | 18.02.2016                        | 02.2018  |

## 7 Report History

| Report Number | Date       | Comment             |
|---------------|------------|---------------------|
| F171908E5     | 19.10.2017 | Initial test report |
| -             | -          | -                   |
| -             | -          | -                   |

## 8 List of Annexes

ANNEX A            TEST SETUP PHOTOS            4 pages

171908\_13    Test setup fully anechoic chamber  
 171908\_14    Test setup fully anechoic chamber  
 171908\_15    Test setup fully anechoic chamber  
 171908\_16    Test setup open area test site

ANNEX B            EXTERNAL PHOTOS            2 pages

171908\_17    PK3, Front view  
 171908\_18    PK3, backside view

ANNEX C            INTERNAL PHOTOS            3 pages

171908\_19    PK3, bottom view (battery cover removed)  
 171908\_11    PCB, bottom view  
 171908\_12    PCB, top view