

FCC TEST REPORT


Applicant	Marquardt GmbH
Address	Schloss-str.16,78604 Rietheim-Weilheim,Germany

Manufacturer or Supplier	Marquardt GmbH
Address	Schloss-str.16,78604 Rietheim-Weilheim,Germany
Product	Lotus keyfob
Brand Name	Marquardt
Model	GK1
FCC ID:	IYZGK1
Date of tests	Jun. 08, 2023 ~ Aug. 19, 2023

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart F, Section 15.519**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Aug. 19, 2023	 Date: Aug. 19, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.4 DESCRIPTION OF SUPPORT UNITS.....	11
4 TEST TYPES AND RESULTS.....	12
4.1 RADIATED EMISSION	12
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITIONS	17
4.1.7 TEST RESULTS	18
4.2 UWB BANDWIDTH	28
4.2.1 LIMITS OF UWB BANDWIDTH	28
4.2.2 TEST INSTRUMENTS.....	28
4.2.3 TEST PROCEDURES	29
4.2.4 DEVIATION FROM TEST STANDARD	29
4.2.5 TEST SETUP	30
4.2.6 EUT OPERATING CONDITIONS	30
4.2.7 TEST RESULTS	31
4.3 PEAK POWER AND MAXIMUM AVERAGE EMISSIONS	33
4.3.1 LIMITS	33
4.3.2 TEST INSTRUMENTS.....	33
4.3.3 TEST PROCEDURES	34
4.3.4 DEVIATION FROM TEST STANDARD	34
4.3.5 TEST SETUP	35
4.3.6 EUT OPERATING CONDITIONS	35
4.3.7 TEST RESULTS	36



Test Report No.: W7L-P230608W002RF02

4.4	SHUTOFF TIMING REQUIREMENTS	40
4.4.1	LIMITS OF SHUTOFF TIMING REQUIREMENTS	40
4.4.2	TEST INSTRUMENTS.....	40
4.4.3	TEST PROCEDURES	40
4.4.4	DEVIATION FROM TEST STANDARD	40
4.4.6	EUT OPERATING CONDITIONS	40
4.4.7	TEST RESULTS	41
5	ANTENNA REQUIREMENTS	43
6	PHOTOGRAPHS OF THE TEST CONFIGURATION	44
7	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	45



Test Report No.: W7L-P230608W002RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P230608W002RF02	Original release	Aug. 19, 2023

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart F(Section 15.519)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by battery(Note)
15.519(a)(1)	Shutoff Timing Requirements	PASS	Meet the requirement of limit.
15.503(d) 15.519(b)	UWB bandwidth	PASS	Meet the requirement of limit.
15.519(c)/ 15.209 15.519(d)	Radiated Emissions	PASS	Meet the requirement of limit.
15.519(e)	Peak Level of the Emission	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used
*Test Lab Information Reference Lab : Huarui 7Layers High Technology (Suzhou) Co., Ltd. Lab Address: Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province Accredited Test Lab Cert 6613.01 The FCC Site Registration No. is 434559; The Designation No. is CN1325.			

Note :

- Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Lotus keyfob
BRAND NAME*	Marquardt
MODEL NAME*	GK1
FCC ID*	IYZGK1
NOMINAL VOLTAGE*	3.0Vdc (battery)
MODULATION TYPE*	BPM-BPSK
FREQUENCY*	CH5: 6489.6MHz/ CH9: 7987.2MHz
HW VERSION*	232605
SW VERSION*	232401
ANTENNA TYPE*	PCB Antenna with 3.2 dBi gain for CH5 PCB Antenna with 3.3 dBi gain for CH9
I/O PORTS*	Refer to user's manual
CABLE SUPPLIED*	N/A
EXTREME TEMPERATURE*	-20 ~ 60°C
EXTREME VOLTAGE*	EUT 2.5V ~ EUT 3.3V
EQUIPMENT TYPE	Hand-held UWB Systems

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

4. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Lithium Battery	Panasonic	Panasonic Corporation	CR2032	Capacity:3.0 Vdc, 225mAh

3.2 DESCRIPTION OF TEST MODES

CHANNEL	FREQUENCY
5	6489.6MHz
9	7987.2MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO						DESCRIPTION
	RE $\geq$ 1G	RE < 1G	PLC	BW	PE&AE	STR	
-	√	√	-	√	√	√	DC 3V by battery

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE < 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **BW**: 10dB Bandwidth measurement
PE&AE: Peak power and maximum average emissions
STR: Shutoff Timing Requirements

RADIATED EMISSION TEST (BELOW 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	5, 9	9	BPM-BPSK

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	5, 9	5, 9	BPM-BPSK

UWB BANDWIDTH MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	5, 9	5, 9	BPM-BPSK

PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	5, 9	5, 9	BPM-BPSK

SHUTOFF TIMING REQUIREMENTS:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	UWB	5, 9	5, 9	BPM-BPSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 53%RH	DC 3V from battery	Chao Wu
RE≥1G	23deg. C, 53%RH	DC 3V from battery	Chao Wu
BW	20deg. C, 55%RH	DC 3V from battery	Chao Wu
PE&AE	23deg. C, 53%RH	DC 3V from battery	Chao Wu
STR	23deg. C, 53%RH	DC 3V from battery	Chao Wu

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart F, Section 15.519

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 960MHz

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Above 960MHz

1. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

2. In addition to the radiated emission limits specified in the table in paragraph (a)(b) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

3. The calculation below has been used for the test, in order to translate the Limit to 1m test distance.

According to the ANSI C63.10-2013:

$$E(\text{dB}\mu\text{V/m}) = \text{EIRP}(\text{dBm}) + 95.2,$$

$$3\text{m to } 1\text{m test distance : Distance Correction Factor}(\text{db}) = 20 \cdot \log(1/3) = -9.54\text{db}$$

So Field Strength(@3m) = Field Strength(@1m) + Distance Correction Factor,

For radiated emission measurement:

Margin = Field Strength(@3m) - Limit(@3m) = Field Strength(@1m) + Distance Correction Factor - Limit(@3m) = Field Strength(@1m) - (**Limit(@3m) - Distance Correction Factor**), so (**Limit(@3m) - Distance Correction Factor**) can treat as 1m Field Strength Limit.

For Limit above 960MHz, It's EIRP limit, So we can translate it to Field Strength Limit(@1m), by the equation below:

$$\text{Field Strength Limit}(@1\text{m}) = \text{EIRP Limit}(@3\text{m}) + 95.2 - \text{Distance Correction Factor}(3\text{m to } 1\text{m})$$

So 1m test distance Field Strength Limit is:

FCC @1m Distance	
Frequency in MHz	Field Strength in dBμV/m
960-1610	29.44
1610-1990	41.44
1990-3100	43.44
3100-10600	63.44
Above 10600	43.44

FCC @1m Distance	
Frequency	Field Strength in dBμV/m
1 164-1 240 MHz	19.44
1 559-1 610 MHz	19.44

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23

- NOTE:**
1. The calibration interval of the above test instruments is 6 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

4.1.3 TEST PROCEDURES

1. The EUT was placed on the top of a rotating table 0.8 meters (below 960MHz) and 1.5 meters (above 960MHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters (below 960MHz) and 1 meters (above 960MHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
6. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Quasi-peak detection at frequency below 960MHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Average detection at frequency above 960MHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1KHz and the video bandwidth is 3KHz for Average detection at frequency range from 1164-1240MHz & 1559-1610MHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Below 30MHz test setup

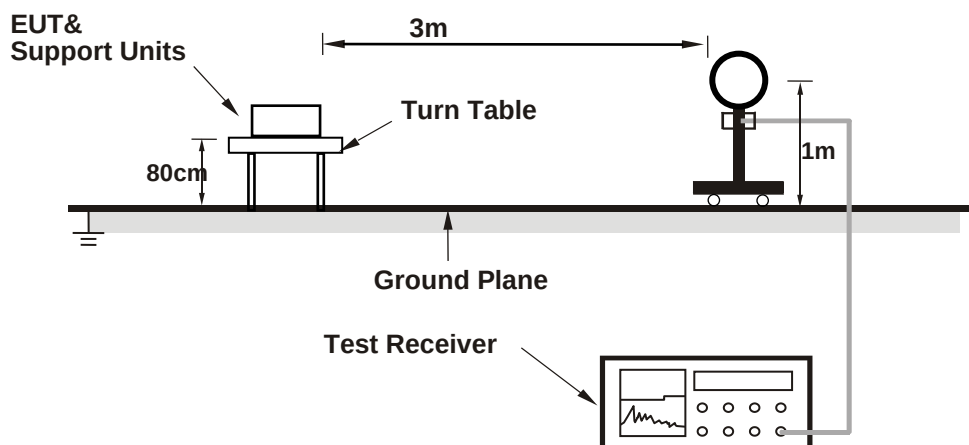


Below 960MHz test setup

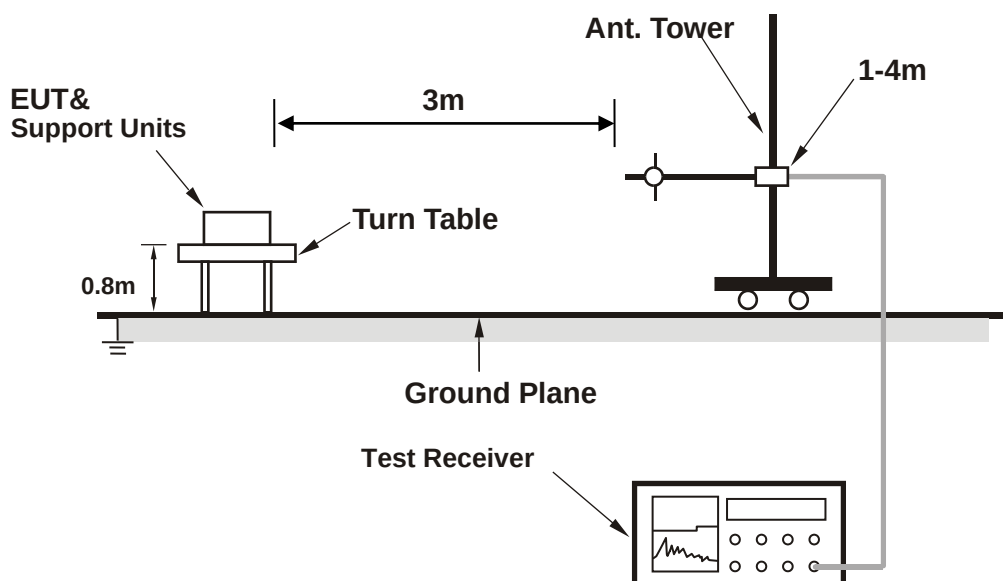

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 960MHz test setup

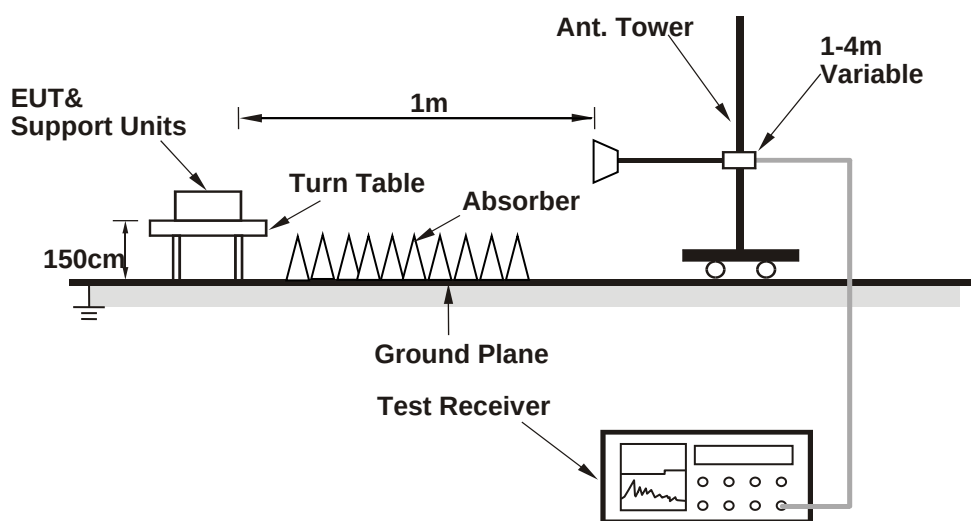

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report

Radiated Emissions Test Data Below 960 MHz:


CHANNEL	TX Channel 9	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 960MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	56.190	20.76	47.71	40.00	-19.24	-26.95	Peak	Horizontal
2	95.960	37.34	63.84	43.50	-6.16	-26.50	Peak	Horizontal
3 PP	144.460	37.86	64.43	43.50	-5.64	-26.57	Peak	Horizontal
4	263.770	34.39	56.17	46.00	-11.61	-21.78	Peak	Horizontal
5	480.080	28.57	46.24	46.00	-17.43	-17.67	Peak	Horizontal
6	623.640	35.39	50.79	46.00	-10.61	-15.40	Peak	Horizontal

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Emission level – Limit value.
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.

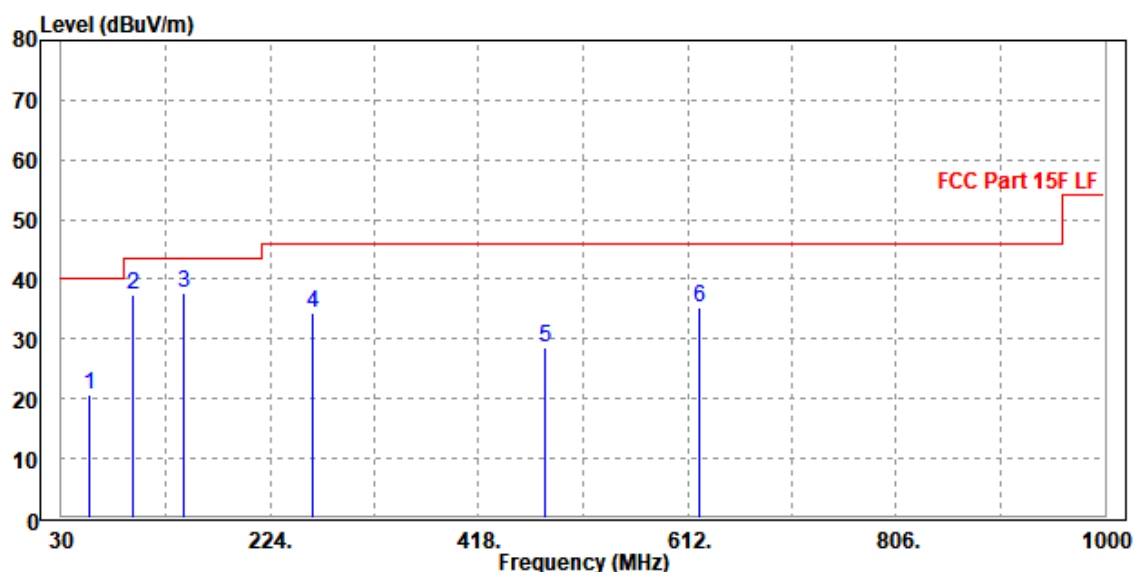


CHANNEL	TX Channel 9	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 960MHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	71.710	17.50	45.98	40.00	-22.50	-28.48	Peak	Vertical
2 PP	120.210	29.57	57.22	43.50	-13.93	-27.65	Peak	Vertical
3	203.630	28.96	52.93	43.50	-14.54	-23.97	Peak	Vertical
4	385.990	28.47	47.84	46.00	-17.53	-19.37	Peak	Vertical
5	576.110	30.28	46.63	46.00	-15.72	-16.35	Peak	Vertical
6	768.170	30.05	44.42	46.00	-15.95	-14.37	Peak	Vertical

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Emission level – Limit value.
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.

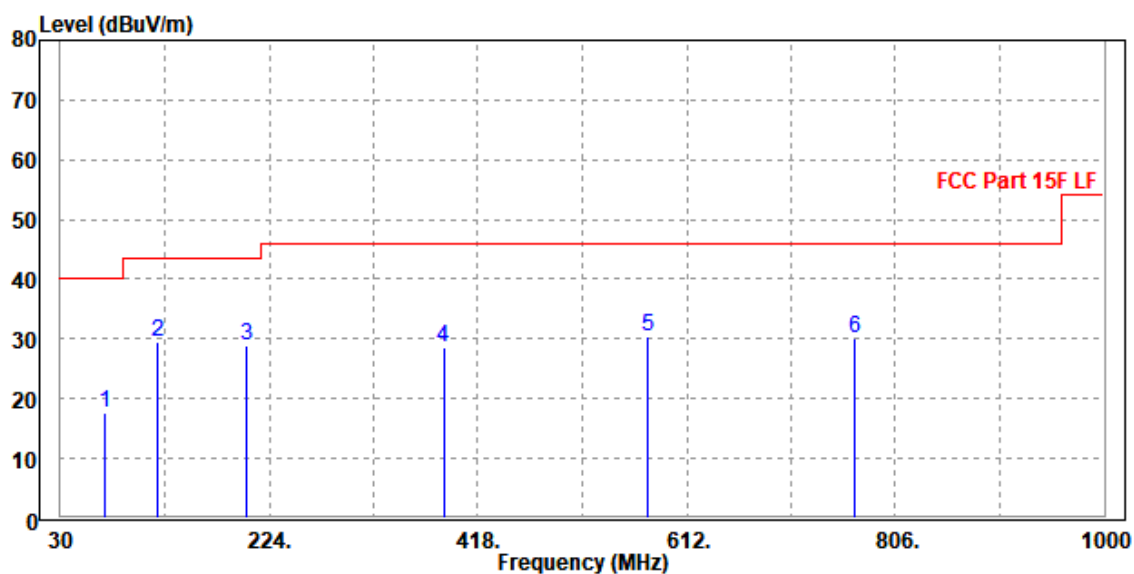


Radiated Emissions above 960 MHz:

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	960MHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1952	28.49	35.63	41.44	-12.95	33.42	5.58	46.14	196	301	Average
3669	29.95	31.59	63.44	-33.49	35.93	7.91	45.48	148	76	Average
6644	25.09	21.8	63.44	-38.35	38.09	10.46	45.26	171	79	Average
10180	32.09	22.38	63.44	-31.35	40.21	13.12	43.62	111	280	Average
12084	33.85	20.45	43.44	-9.59	41.68	14.7	42.98	154	78	Average
14532	34.11	16.52	43.44	-9.33	42.43	18.76	43.6	114	286	Average

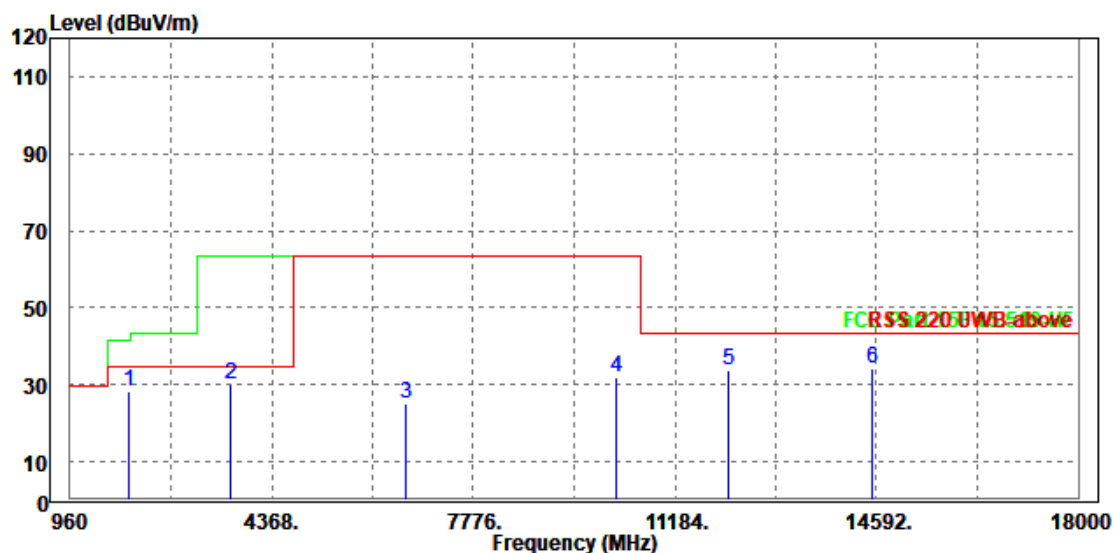

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1799	27	36.62	41.44	-14.44	31.16	5.35	46.13	137	179	Average
3669	28.45	31.75	63.44	-34.99	34.27	7.91	45.48	170	314	Average
6491	26.08	23.88	63.44	-37.36	37.19	10.33	45.32	143	5	Average
7885	25.49	21.38	63.44	-37.95	37.17	11.19	44.25	152	168	Average
9840	30.35	22.2	63.44	-33.09	38.94	12.83	43.62	188	81	Average
14532	34.34	18.64	43.44	-9.1	40.54	18.76	43.6	114	193	Average

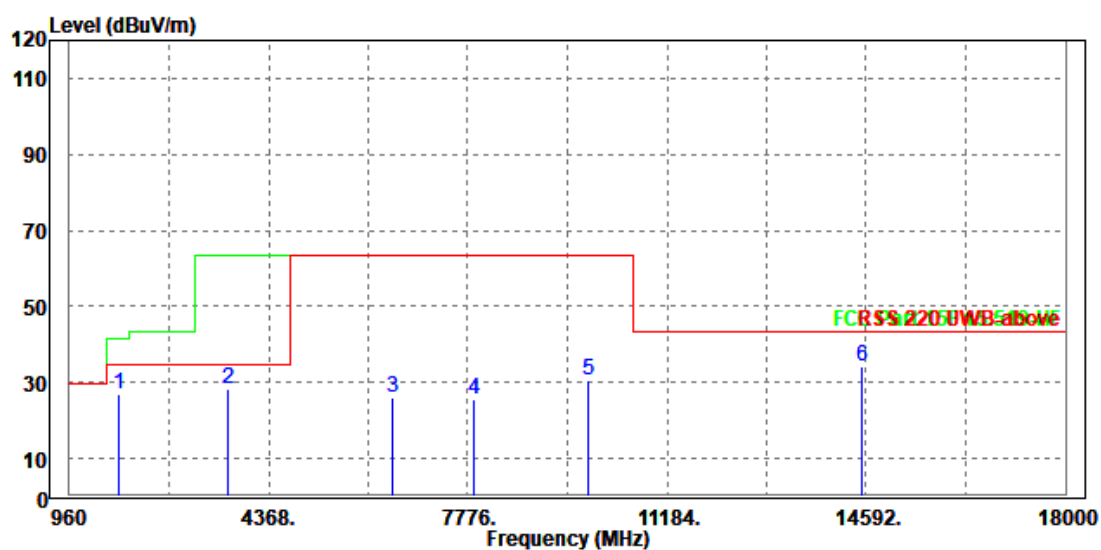


REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. The emission levels of other frequencies were greater than 20dB margin.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	960MHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1952	25.44	32.58	41.44	-16	33.42	5.58	46.14	110	137	Average
3669	29.42	31.06	63.44	-34.02	35.93	7.91	45.48	119	288	Average
8123	26.36	20.76	63.44	-37.08	38.37	11.35	44.12	116	198	Average
9534	30.75	22.4	63.44	-32.69	39.45	12.69	43.79	117	339	Average
12594	33.09	20.06	43.44	-10.35	41.68	14.95	43.6	135	201	Average
14753	32.86	16.37	43.44	-10.58	42.65	17.55	43.71	116	263	Average

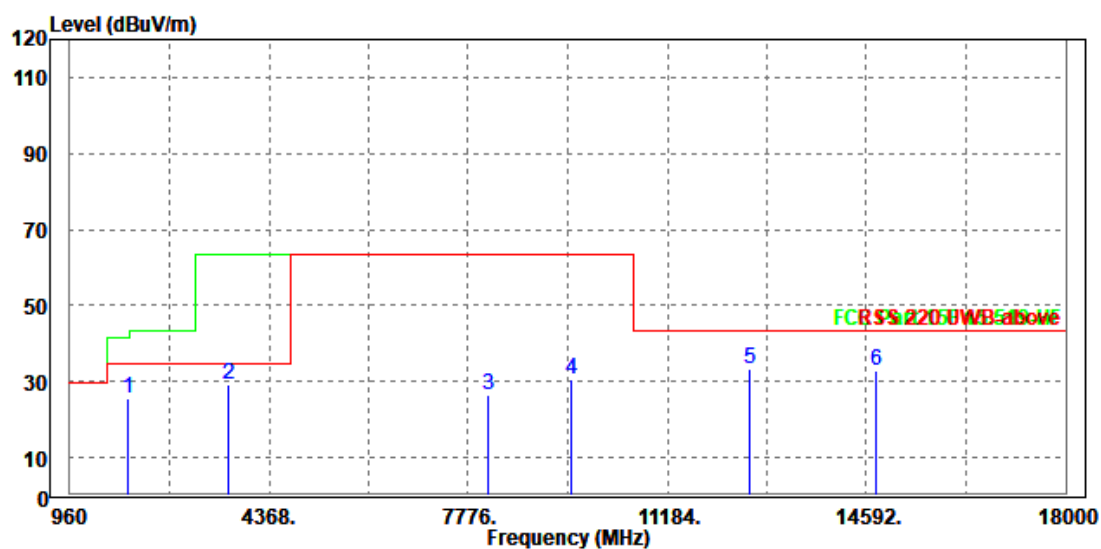

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1799	27.03	36.65	41.44	-14.41	31.16	5.35	46.13	119	69	Average
3669	30.62	33.92	63.44	-32.82	34.27	7.91	45.48	185	10	Average
5250	25.3	25.62	63.44	-38.14	35.3	9.89	45.51	197	306	Average
9789	31.28	23.2	63.44	-32.16	38.92	12.81	43.65	104	281	Average
13308	30.13	18.21	43.44	-13.31	40.4	15.38	43.86	161	297	Average
16589	34.37	16.38	43.44	-9.07	43.36	16.89	42.26	200	293	Average

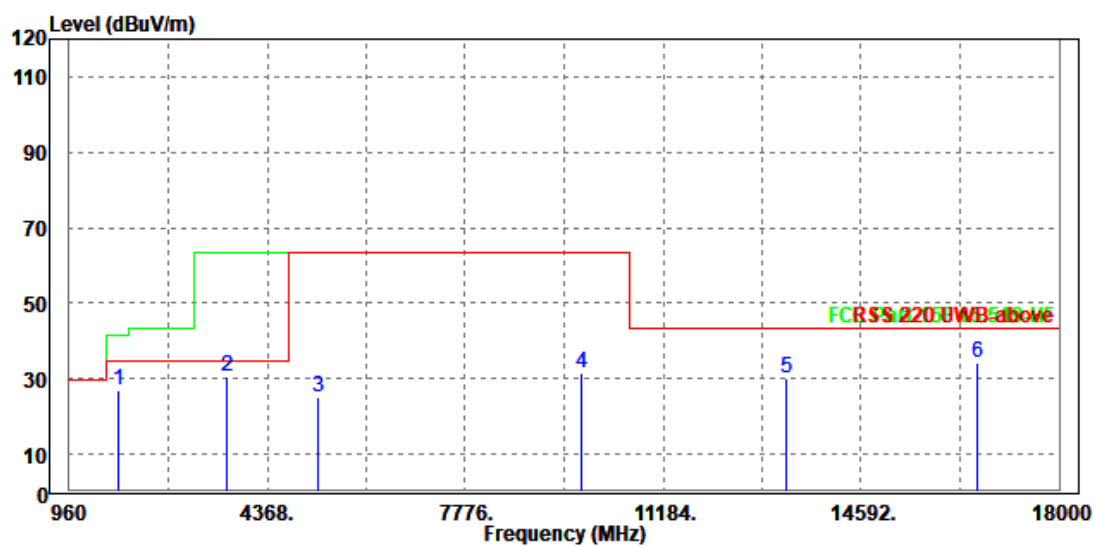



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. The emission levels of other frequencies were greater than 20dB margin.



Radiated Emissions Test Data in The GPS Bands:

CHANNEL	TX Channel 5	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	1164 – 1240 MHz and 1559- 1610 MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1221.38	14.85	27.37	19.44	-4.59	29.3	4.3	46.12	173	333	Average
1585.928	16.24	26.88	19.44	-3.2	30.49	5	46.13	146	292	Average

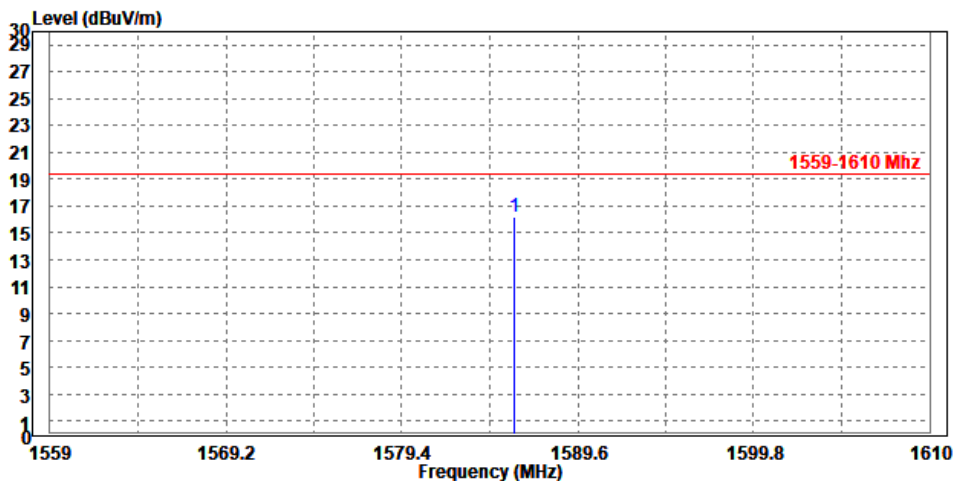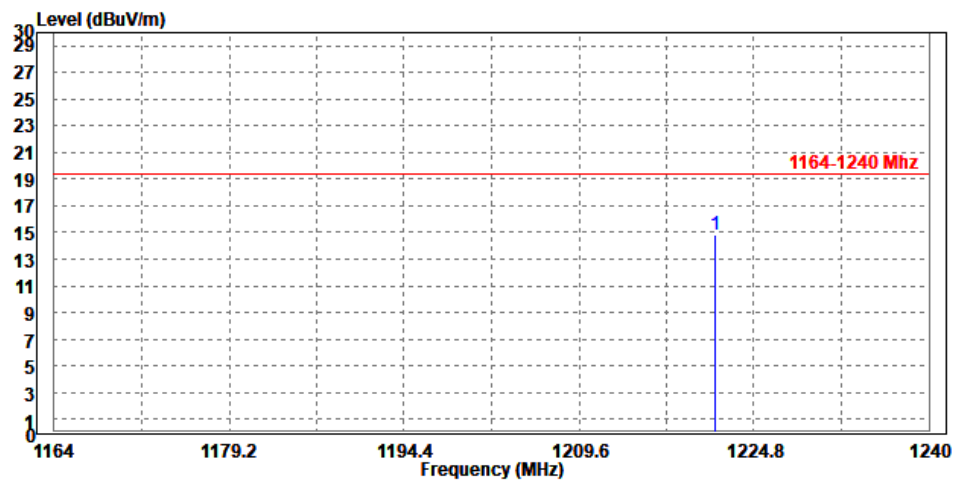

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1183.912	14.98	28.04	19.44	-4.46	28.83	4.23	46.12	152	243	Average
1566.701	15.17	26.15	19.44	-4.27	30.18	4.97	46.13	109	360	Average

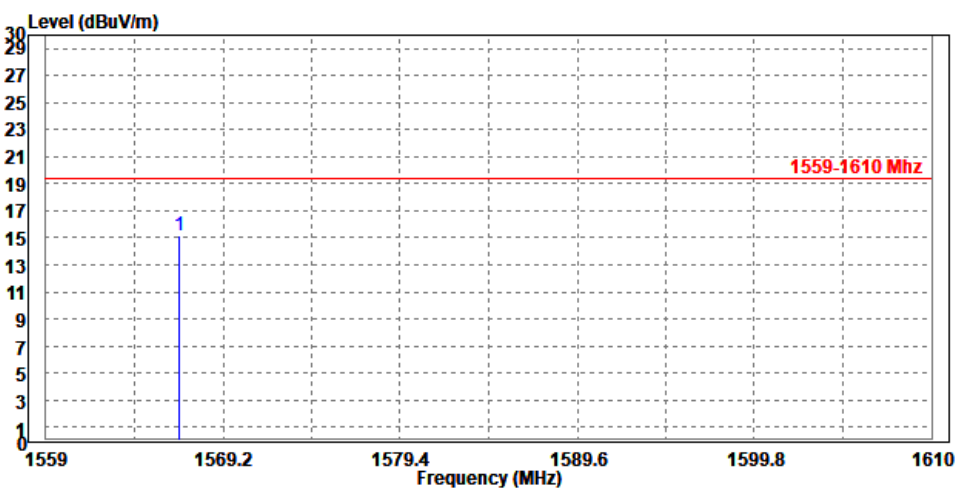
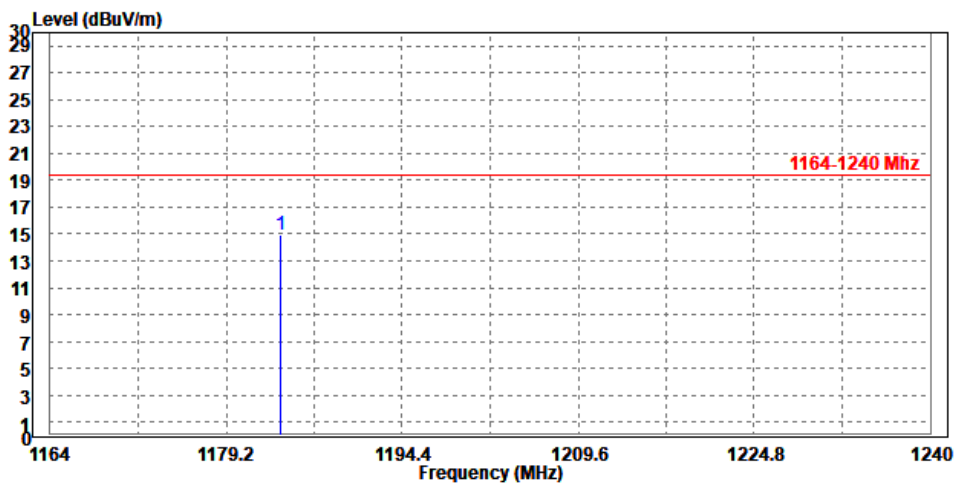


REMARKS:



1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. The emission levels of other frequencies were greater than 20dB margin.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Average (AV)
FREQUENCY RANGE	1164 – 1240 MHz and 1559- 1610 MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M										
FREQ. (MHz)	EMISSIO N LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1169.016	15.21	27.93	19.44	-4.23	29.2	4.2	46.12	171	267	Average
1580.165	15.79	26.49	19.44	-3.65	30.44	4.99	46.13	179	168	Average

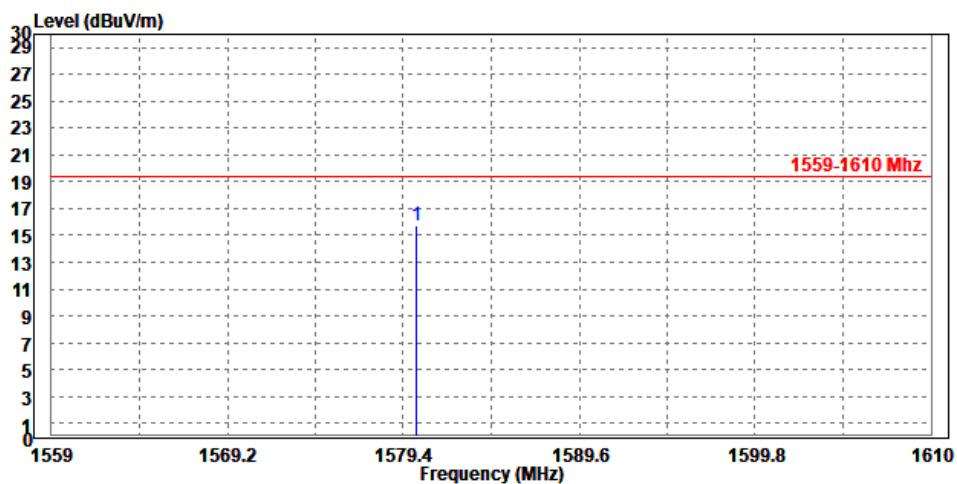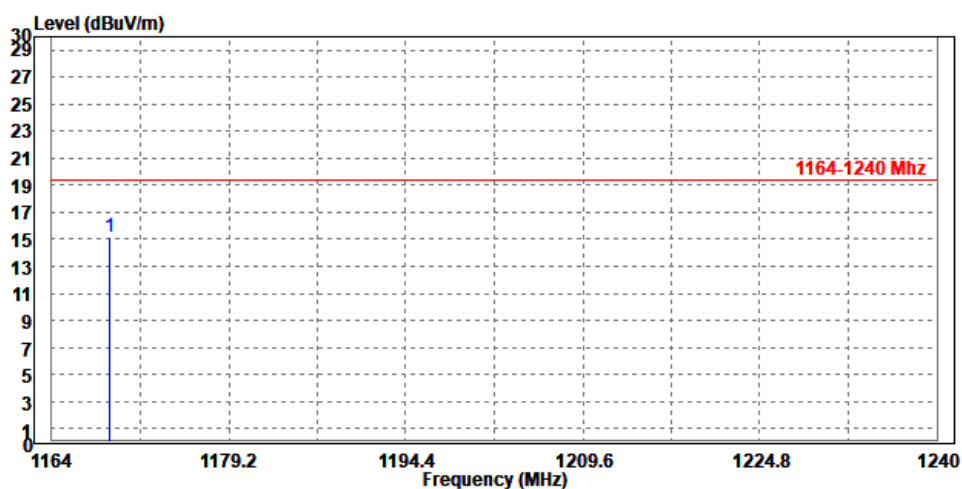

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1186.192	15.43	28.49	19.44	-4.01	28.83	4.23	46.12	198	30	Average
1601.687	16.1	26.87	19.44	-3.34	30.33	5.03	46.13	104	10	Average

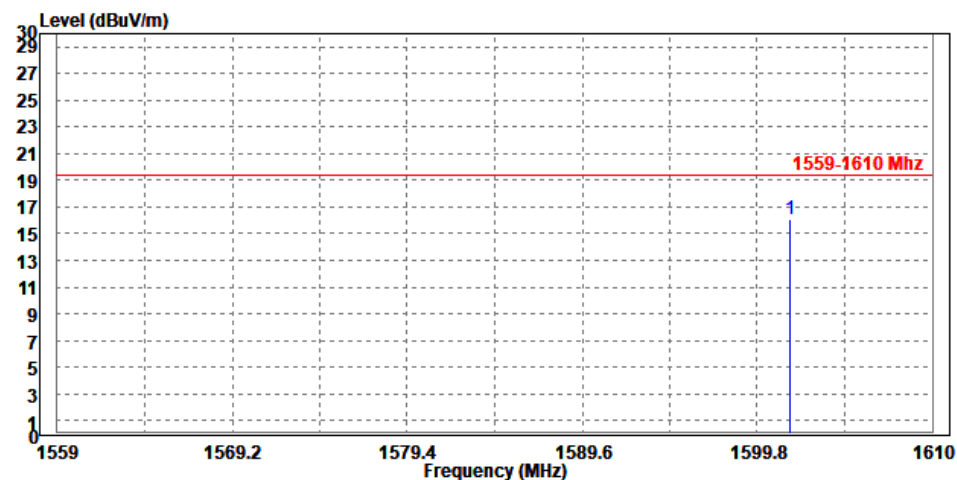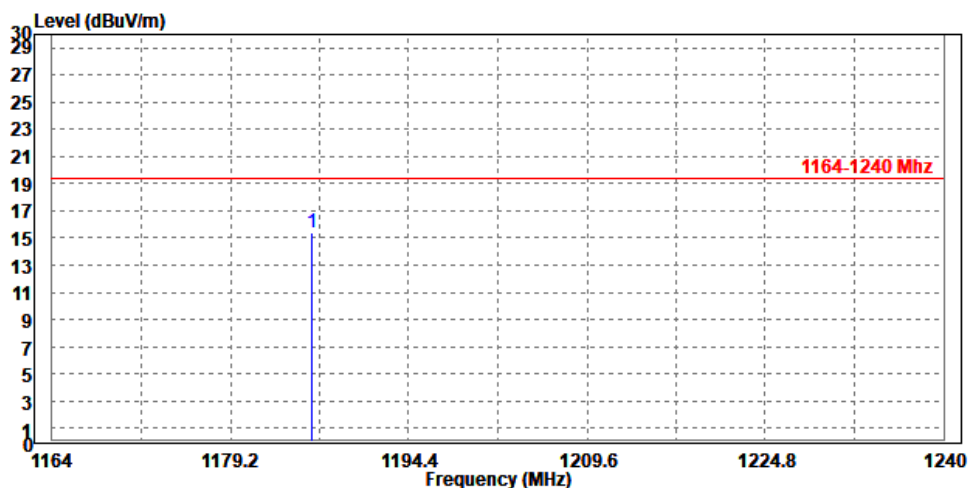

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- The emission levels of other frequencies were greater than 20dB margin.

4.2 UWB BANDWIDTH

4.2.1 LIMITS OF UWB BANDWIDTH

FCC 15.503(d) Has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

FCC 15.519(3)(b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.25,22	Feb.24,24
Open Switch and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A03	182185	Feb.16,22	Feb.15,24
Wideband Radio Communication	R&S	CMW500	169399	Jun.26,22	Jun.25,24
Hygrothermograph	DELI	20210528	SZ015	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Oct.27,23
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24

NOTE:

1. The calibration interval of the above test instruments is 6 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.


4.2.3 TEST PROCEDURES

1. Set the center frequency of the channel under test
2. Set resolution bandwidth (RBW) = 1MHz
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 10 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

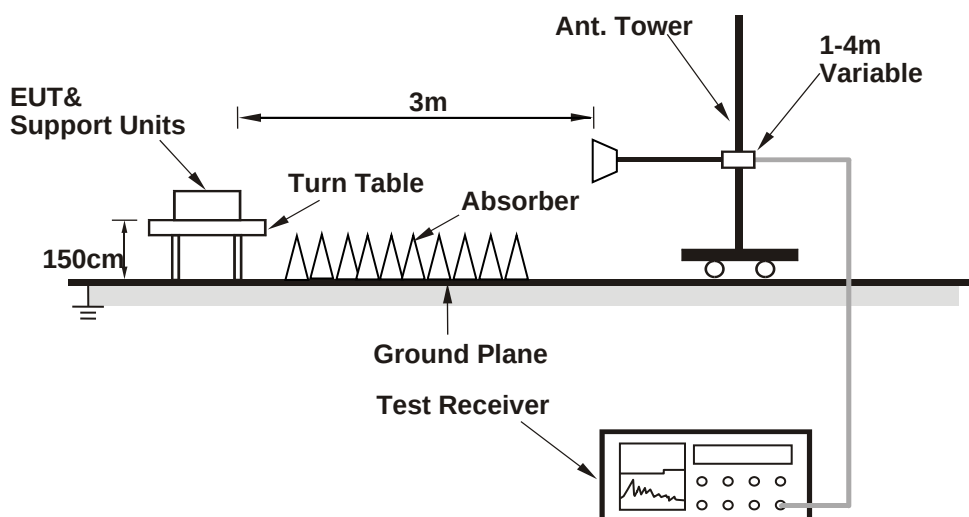


4.2.6 EUT OPERATING CONDITIONS

The sample provided by client to enable the EUT under transmission condition continuously.


4.2.7 TEST RESULTS

Frequency(MHz)	Measured Frequencies		Limit (MHz)	10dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
	FL (MHz)	FH (MHz)				
6489.6	6221.9	6780.3	FL > 3100 and FH < 10600	558.4	≥500	Pass

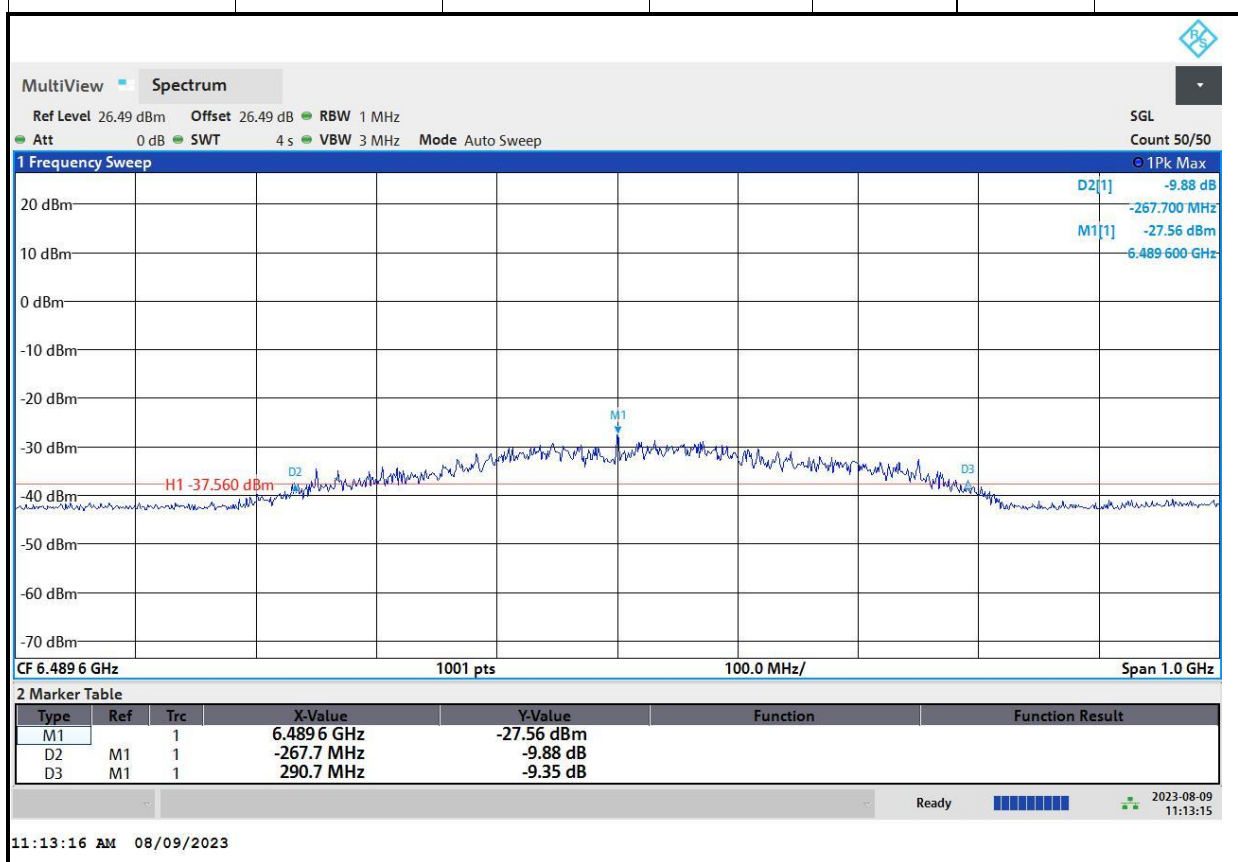

Note: FL=M1+D2 , FH=M1+D3 , 10DB BANDWIDTH=FH-FL

Frequency(MHz)	Measured Frequencies		Limit (MHz)	10dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
	FL (MHz)	FH (MHz)				
7987.2	7682.5	8252.9	FL > 3100 and FH < 10600	570.4	≥500	Pass

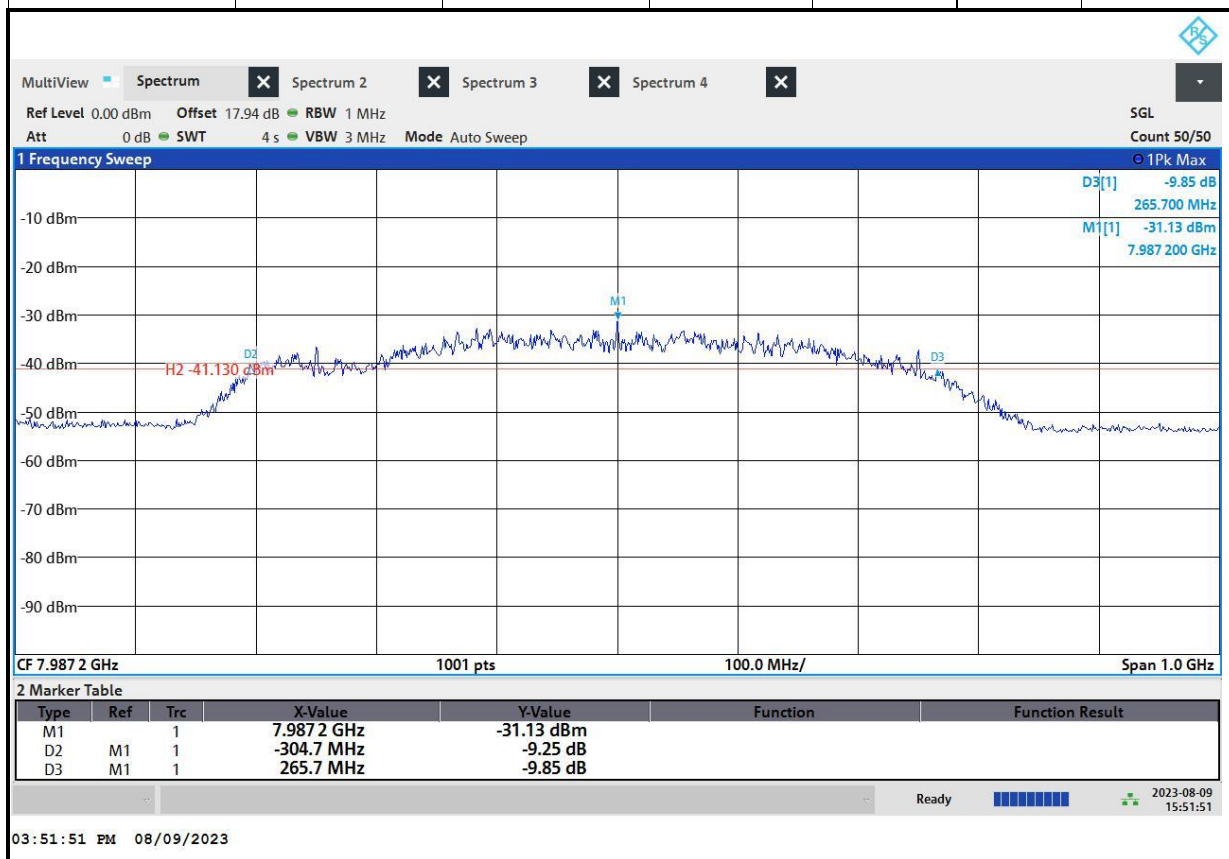

Note: FL=M1+D2 , FH=M1+D3 , 10DB BANDWIDTH=FH-FL

4.3 PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

4.3.1 LIMITS

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP.

When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, fM. If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2$.

47 CFR 15.519(c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100-10600	-41.3

4.3.2 TEST INSTRUMENTS

Same as 4.2.2


4.3.3 TEST PROCEDURES

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak/RMS Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

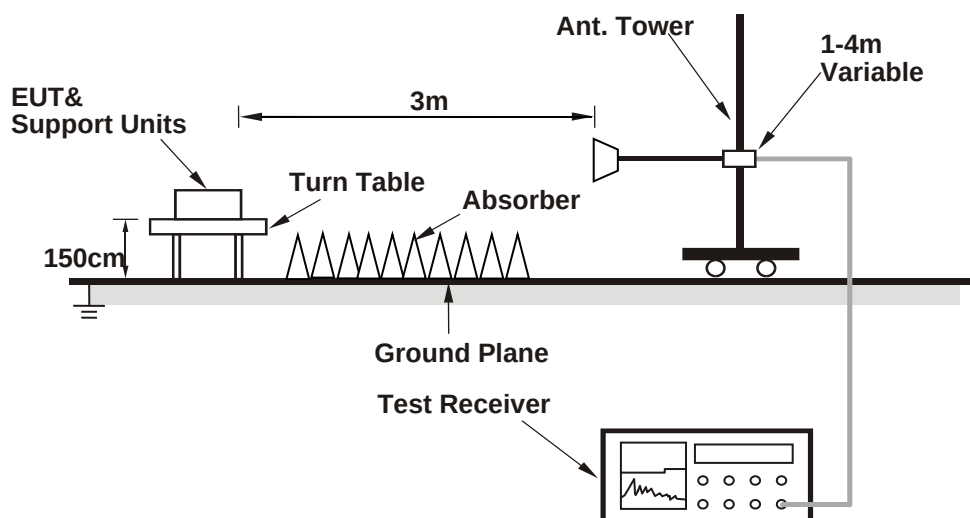

4.3.6 EUT OPERATING CONDITIONS

The sample provided by client to enable the EUT under transmission condition continuously.

4.3.7 TEST RESULTS


Peak Power Emissions

NOTE:

The RBW=10MHz, VBW=10MHz, so the EIRP limit is $0\text{dBm} + 20 \log(10/50) = -13.98\text{dBm}/10\text{MHz}$.


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Peak (PK)
TEST FREQUENCY	6489.6MHz		

Frequency (MHz)	Peak Value (dBm/10MHz)	EIRP Limit (dBm/10MHz)	Pass/Fail
6489.6	-17.30	-13.98	Pass

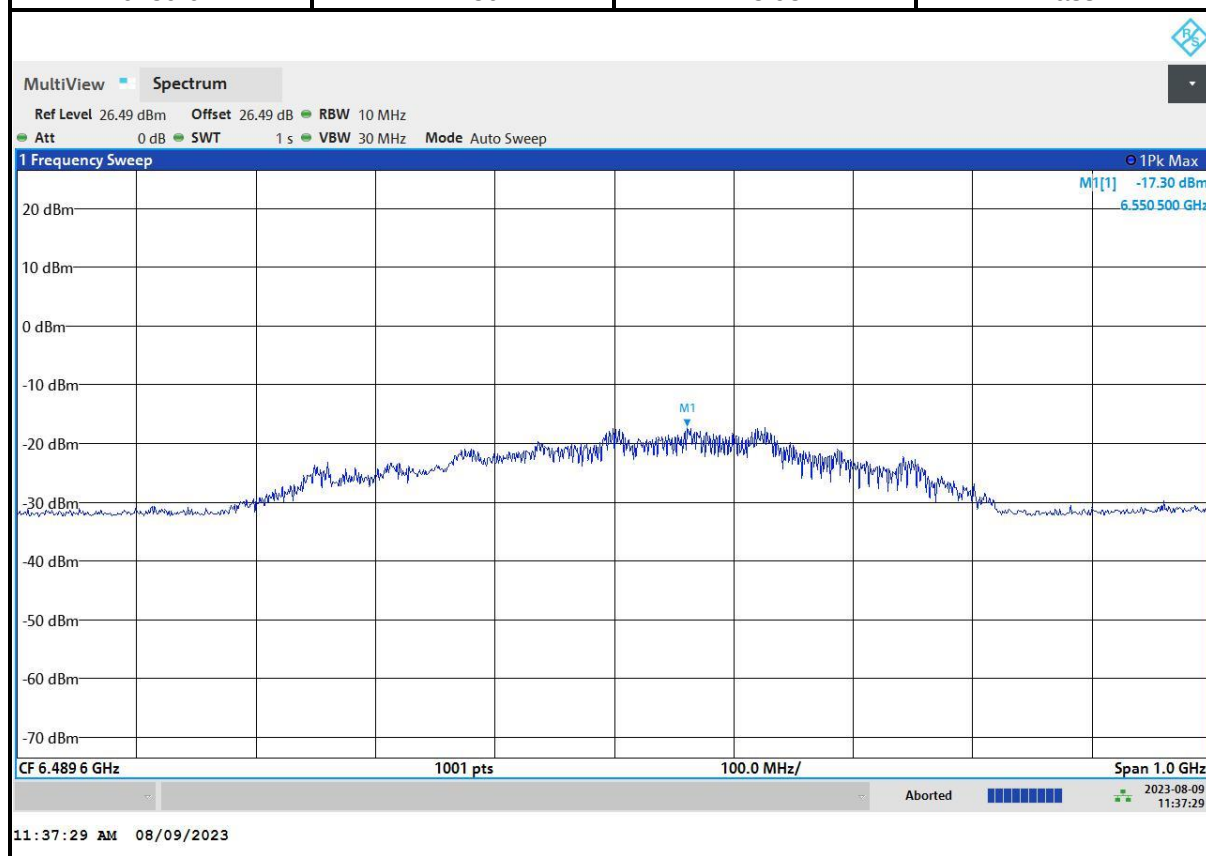

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
TEST FREQUENCY	7987.2MHz		


Frequency (MHz)	Peak Value (dBm/10MHz)	EIRP Limit (dBm/10MHz)	Pass/Fail
7987.2	-21.45	-13.98	Pass

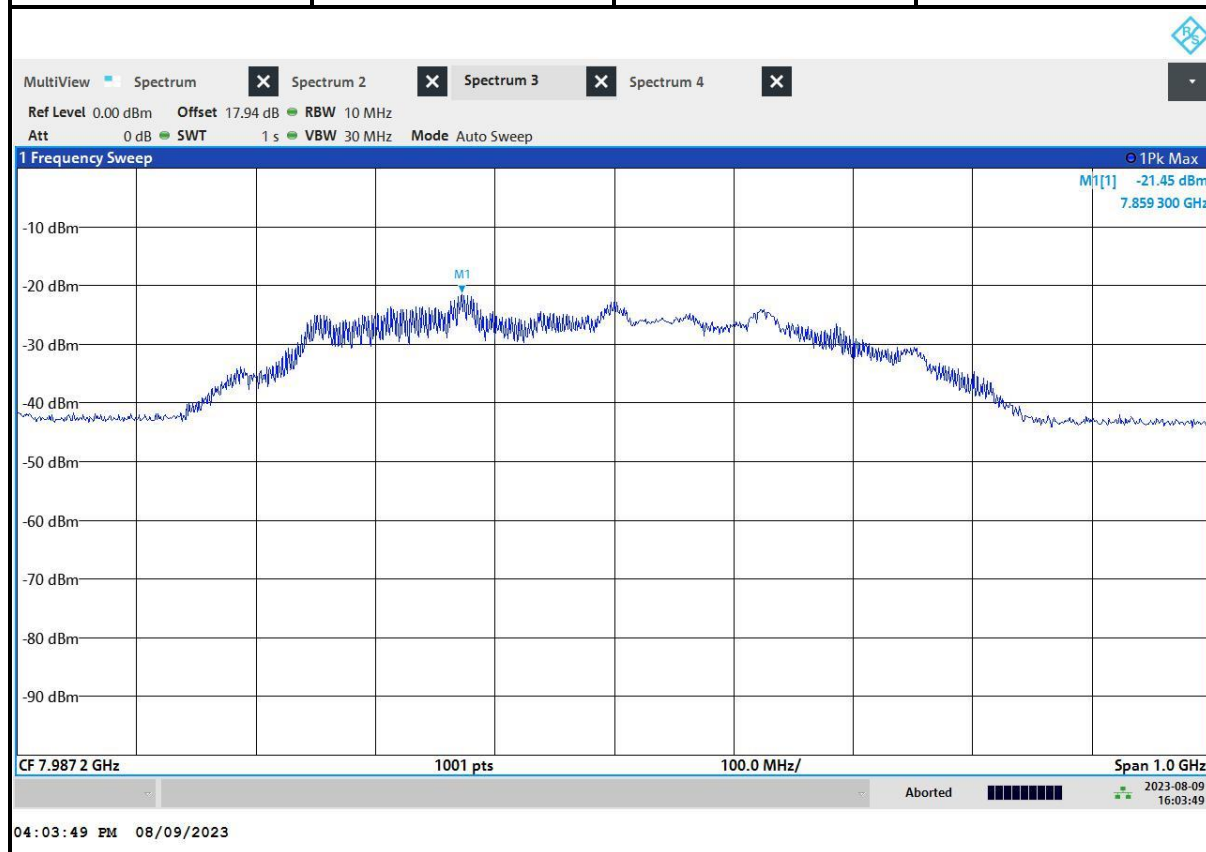

Average Power Emissions


CHANNEL	TX Channel 5	DETECTOR FUNCTION	Average (RMS)
TEST FREQUENCY	6489.6MHz		

Frequency (MHz)	Peak Value (dBm)	EIRP Limit (dBm)	Pass/Fail
6489.6	-47.10	-41.3	Pass

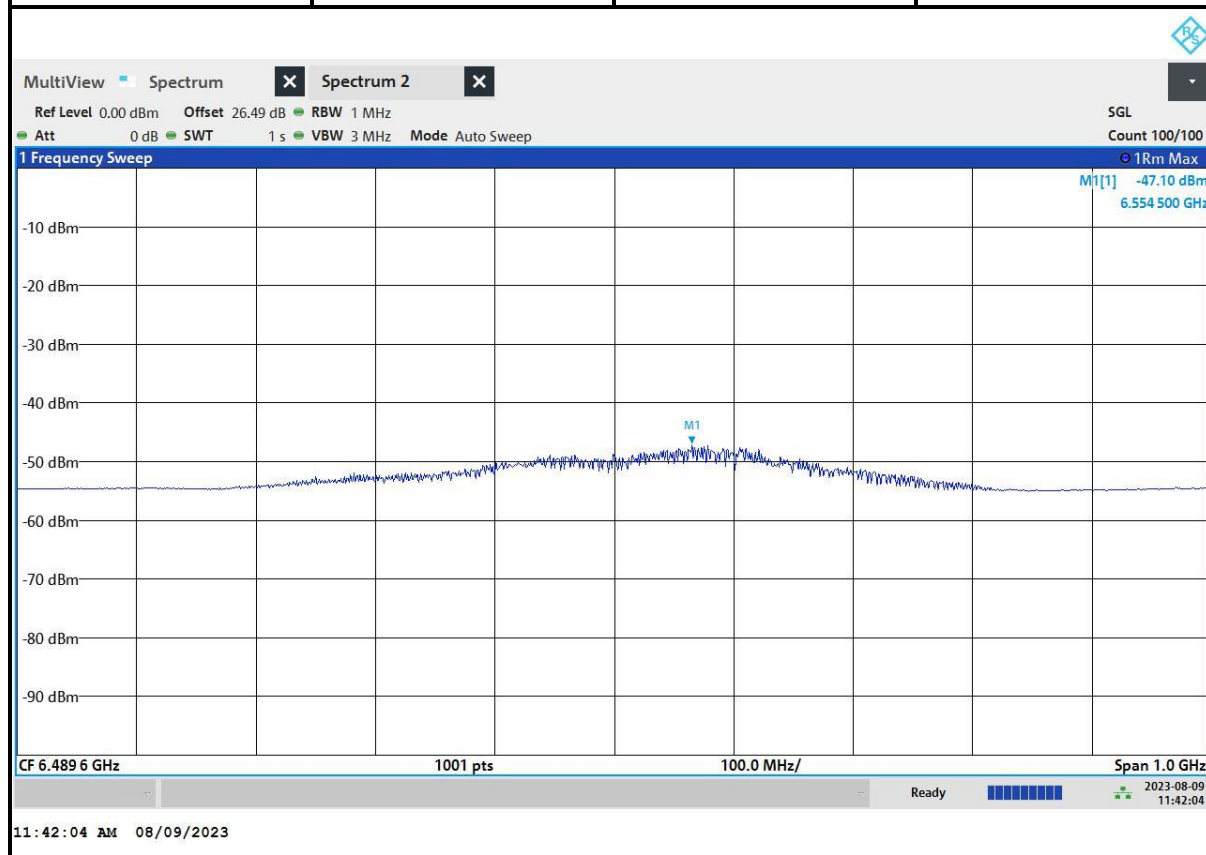

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Average (RMS)
TEST FREQUENCY	7987.2MHz		

Frequency (MHz)	Peak Value (dBm)	EIRP Limit (dBm)	Pass/Fail
7987.2	-53.12	-41.3	Pass

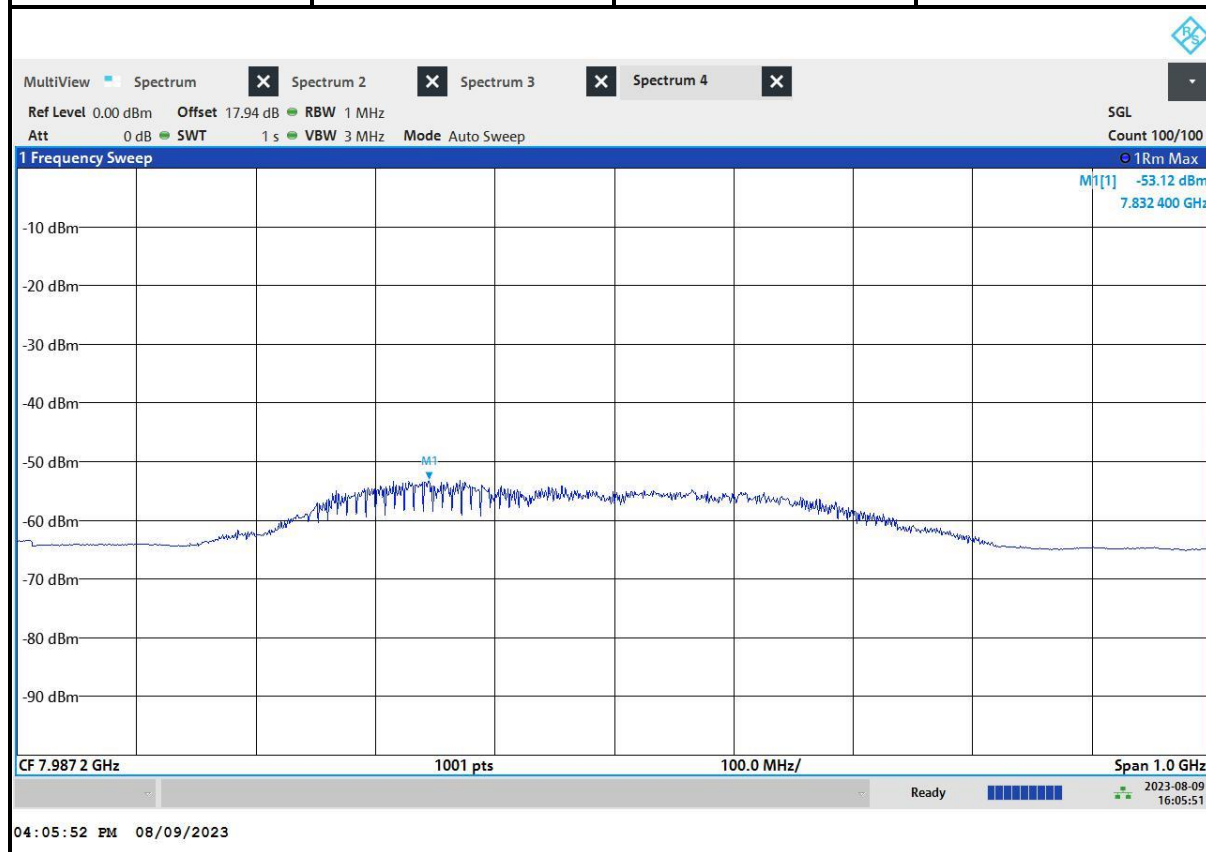

4.4 SHUTOFF TIMING REQUIREMENTS

4.4.1 LIMITS OF SHUTOFF TIMING REQUIREMENTS

The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

4.4.2 TEST INSTRUMENTS

Same as 4.2.2


4.4.3 TEST PROCEDURES

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer set the center frequency, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the transmission duration was measured and recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP





4.4.6 EUT OPERATING CONDITIONS

- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.4.7 TEST RESULTS

FREQUENCY (MHz)	MEASUREMENT RESULT (sec)	MAXIMUM LIMIT (sec)	PASS/FAIL
6489.6	3.73	10	PASS

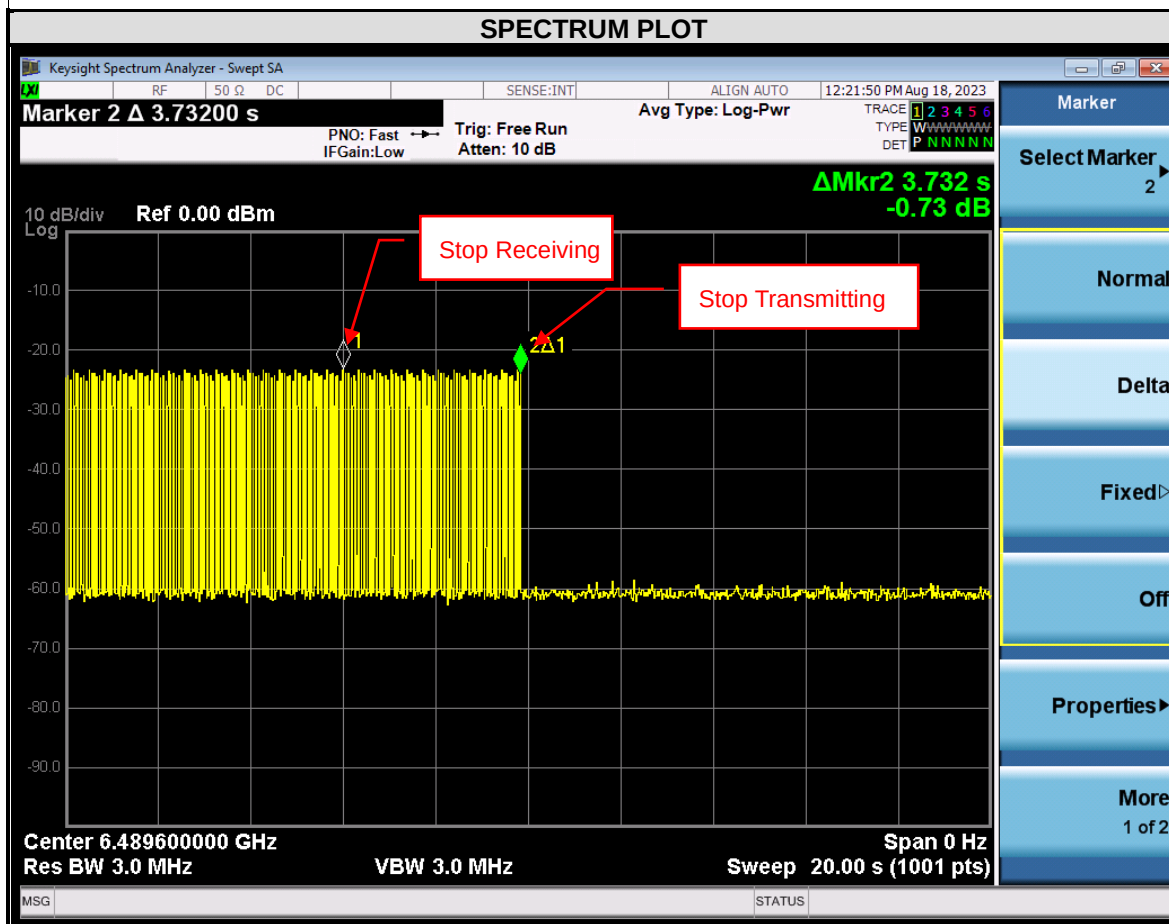



SPECTRUM PLOT

Keysight Spectrum Analyzer - Swept SA

Marker 2 Δ 3.73219 s

PNO: Fast IFGain: Low Trig: Free Run Atten: 10 dB #Avg Type: Log-Pwr

TRAC 1 2 3 4 5 6 TYPE W W W W W W W W DET P N N N N N N

10 dB/div Log Ref 0.00 dBm

Stop Receiving

Stop Transmitting

Δ Mkr2 3.732 s -1.60 dB

Center 7.987200000 GHz Res BW 3.0 MHz #VBW 3.0 MHz Span 0 Hz Sweep 20.00 s (1001 pts)

MSG Alignment Completed STATUS

5 ANTENNA REQUIREMENTS

The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device.

Verdict:

The Sample is configured with a PCB antenna, which mounted only inside the device, it can't be made modifiable by users.

6 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

7 APPENDIX A - Modifications recorders for engineering changes to the eut BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---