


Report on the FCC and IC Testing of the
Marquardt GmbH
NFC Door Handle Sensor
Model: NH2
In accordance with FCC 47 CFR Part 15 C
and ISED RSS-210 and ISED RSS-Gen

Prepared for: Marquardt GmbH
Schloss-Straße 16
78604 Rietheim-Weilheim
Germany

FCC ID: IYZNH2
IC: 2701A-NH2

COMMERCIAL-IN-CONFIDENCE

Date: 2025-09-09
Document Number: TR-713371016-03 | Revision 2

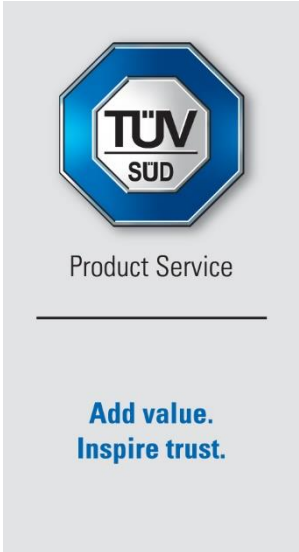

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Martin Steindl	2025-09-09	<i>Steindl Martin</i> SIGN-ID 1071893
Authorised Signatory	Michael Ingerl	2025-09-09	<i>M. Ingerl</i> SIGN-ID 1071936

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

Engineering Statement:

This measurement shown in this report were made in accordance with the procedures described on test pages.
All reported testing was carried out on a sample equipment to demonstrate limited compliance with with FCC 47 CFR Part 15 C and ISED RSS-210 and RSS-GEN.
The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Martin Steindl	2025-09-09	<i>Steindl Martin</i> SIGN-ID 1071894

Laboratory Accreditation
DAkkS Reg. No. D-PL-11321-11-02
DAkkS Reg. No. D-PL-11321-11-03

Laboratory recognition
Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration
3050A-2

Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 C:2023 and ISED RSS-210, Issue 11:2024 and ISED RSS-Gen, Issue 5 + Amd. 2:2021

  Deutsche Akkreditierungsstelle D-PL-11321-11-00	DISCLAIMER AND COPYRIGHT This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2025 TÜV SÜD Product Service.
--	--

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuvsud.com/imprint

Managing Directors:
Walter Reithmaier (Sprecher / CEO)
Patrick van Welij

Phone: +49 (0) 9421 56 82-0
Fax: +49 (0) 9421 56 82-199
www.tuvsud.com

TÜV SÜD Product Service GmbH
Äußere Frühlingsstraße 45
94315 Straubing
Germany



Content

1	Report Summary	2
1.1	Modification Report	2
1.2	Introduction	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Test Configuration	5
1.6	Modes of Operation	5
1.7	EUT Modifications Record	5
1.8	Test Location	5
2	Test Details	6
2.1	Antenna requirement	6
2.2	Bandwidth of Signal	7
2.3	Radiated Emissions	10
2.4	Temperature Stability	18
3	Measurement Uncertainty	21
TR-713371016-03 Annexes Revision 1:		
Annex A:	Photographs of Test Setup	2 pages
Annex B:	External Photos of EUT	3 pages



1 Report Summary

1.1 Modification Report

Alternations and additions of this report will be issued to the holders of each copy in the form of a complete document.

Revision	Description of changes	Date of Issue
0	First Issue	2025-05-08
1	Retest of radiated emissions with housing	2025-05-21
2	Added IC and FCC ID. Corrected limit and margin on page 15.	2025-09-09

Table 1: Report of Modifications

1.2 Introduction

Applicant	Marquardt GmbH Schloss-Straße 16 78604 Rietheim-Weilheim Germany
Manufacturer	Marquardt GmbH
Model Number(s)	NH2
Serial Number(s)	9861284280
Hardware Version(s)	585.190.012-02
Software Version(s)	24/48.00
Number of Samples Tested	1
Test Specification(s) / Issue / Date	FCC 47 CFR Part 15 C : 2023 and ISED RSS-210, Issue 11, : 2024 ISED RSS-Gen, Issue 5 + Amd. 2 : 2021
Test Plan/Issue/Date	Test mode Description of NH2; Version 1.1
Order Number	6200750427
Date	2025-04-14
Date of Receipt of EUT	2025-04-21
Start of Test	2025-04-30
Finish of Test	2025-05-16
Name of Engineer(s)	M. Steindl, A. Deese
Related Document(s)	ANSI C63.10:2013



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 C and ISED RSS-210 and RSS-Gen is shown below.

<i>Section</i>	<i>Specification Clause</i>	<i>Test Description</i>	<i>Result</i>
2.1	15.203	Antenna requirement	Pass - Integrated
2.2	15.215(c)	Bandwidth of Signal	Pass
---	15.207	Conducted Disturbance at Mains Terminal	Not applicable
2.3	15.209, 15.225	Radiated Disturbance	Pass
2.4	15.225(e)	Frequency Tolerance	Pass

Table 2: Results according to FCC 47 CFR Part 15 C

<i>Section</i>	<i>Specification Clause</i>	<i>Test Description</i>	<i>Result</i>
2.3	7.3	Radiated Emissions	Pass
---	7.3	AC Power Line Conducted Emissions	Not applicable
2.4	B.6 b.	Frequency Tolerance	Pass

Table 3: Results according to ISED RSS-210

<i>Section</i>	<i>Specification Clause</i>	<i>Test Description</i>	<i>Result</i>
2.2	6.7	Bandwidth of Signal	Pass
---	8.8	AC Power Line Conducted Emissions	Not applicable
2.3	8.9, 8.10	Radiated Emissions	Pass
2.4	6.11	Frequency Tolerance	Pass

Table 4: Results according to ISED RSS-Gen

1.4 Product Information

1.4.1 Technical Description

The EUT is a NFC door handle sensor for automotive applications.

<i>Frequency Band</i>	13.110 – 14.010 MHz
<i>Number of frequency channels:</i>	1

<i>Supply Voltage:</i>	12 V
<i>Supply Frequency:</i>	DC (0 Hz)
<i>Highest clock frequency (radio part):</i>	13.56 MHz
<i>Highest clock frequency (non-radio part):</i>	40 MHz



1.4.2 List of Antennas

The EUT has a dedicated integrated antenna.



1.4.3 EUT Ports / Cables identification

Port	Max Cable Length Specified	Usage	Type	Screened	Comment
DC Power	---	1.2 m	DC supply	No	---
Touch Signal	---	1.2 m	Signal Port	No	---

Table 5

1.5 Test Configuration

The EUT was configured in stand alone mode.

1.6 Modes of Operation

Tests were performed with the EUT continuously polling and with the EUT continuously reading a tag.

1.7 EUT Modifications Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 6

1.8 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

Test Name	Name of Engineer(s)
Antenna requirement	M. Steindl
Bandwidth of Signal	M. Steindl
Radiated Disturbance	A. Deese
Frequency Tolerance	M. Steindl

Office Address:

Äußere Frühlingsstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Antenna requirement

2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.203

2.1.2 Equipment under Test and Modification State

NH2; HW: 585.190.012-02; SW: 24/48.00; Modification State 0

2.1.3 Date of Test

2025-05-07

2.1.4 Specification Limits

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some fields disturbance sensors, or to other intentional radiators which must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits are not exceeded.

2.1.5 Test Results

<i>Antenna connector type:</i>	Not applicable – integrated antenna
<i>Antenna connector impedance:</i>	N/A

See “External Photos of EUT” in Annex B for details.



2.2 Bandwidth of Signal

2.2.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.215(c)
ISED RSS-Gen, Clause 6.7

2.2.2 Equipment under Test and Modification State

NH2; HW: 585.190.012-02; SW: 24/48.00; Modification State 0

2.2.3 Date of Test

2025-05-07

2.2.4 Environmental Conditions

Ambient Temperature	23 °C
Relative Humidity	31 %

2.2.5 Specification Limits


No limitation – Bandwidth noted

2.2.6 Test Method

The test was performed according to ANSI C63.10, clauses 6.9
See section 2.3 of this test report for details.

2.2.7 Test Results

2.2.7.1 Test Results for Polling mode

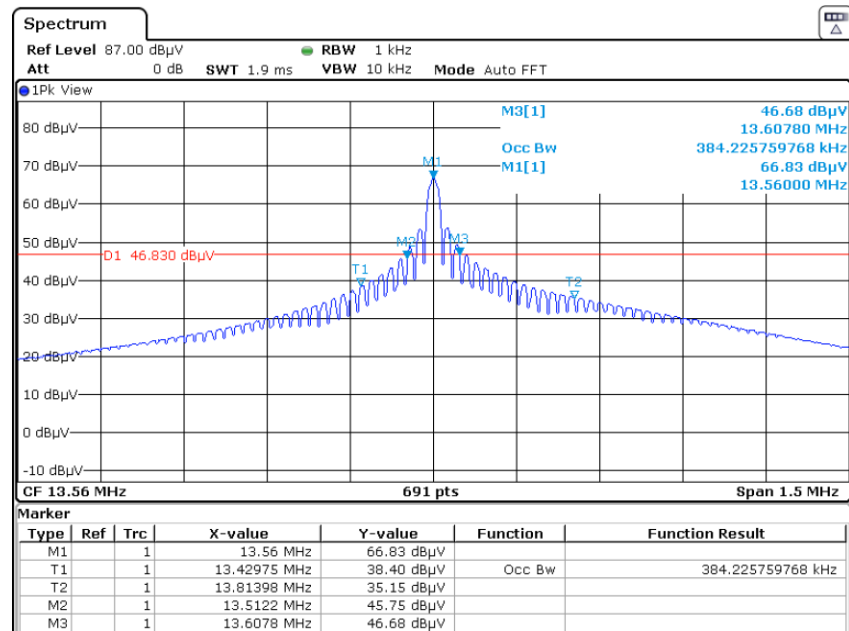

Date: 7.MAY.2025 19:20:01


Center frequency	20 dB Bandwidth
13.56 MHz	95.6 kHz

Table 7: 20 dB bandwidth

Centre Frequency	99% Bandwidth
13.56 MHz	384.226 kHz

Table 8: 99% bandwidth

2.2.7.2 Test Results for Reading mode

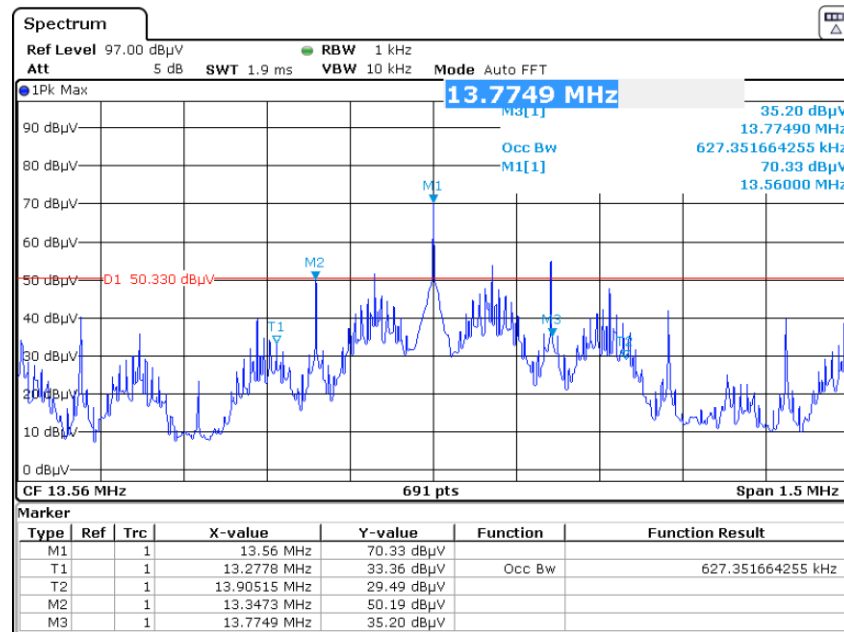

Date: 7.MAY.2025 19:22:21

Center frequency	20 dB Bandwidth
13.56 MHz	427.6 kHz

Table 9: 20 dB bandwidth

Centre Frequency	99% Bandwidth
13.56 MHz	627.35 kHz

Table 10: 99% bandwidth

2.2.8 Test Location and Test Equipment

The test was carried out in radio test laboratory

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	24	2026-03-31

Table 11



2.3 Radiated Emissions

2.3.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.205, 15.209 and 15.225
ISED RSS-210, Clause 7.7 and B.6
ISED RSS-Gen, Clauses 8.9 and 8.10

2.3.2 Equipment under Test and Modification State

NH2; HW: 585.190.012-02; SW: 24/48.00; Modification State 0

2.3.3 Date of Test

2025-05-16

2.3.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	43 %



2.3.5 Specification Limits

Radiated emission limits:					
Frequency Range (MHz)	Test distance (m)	Field strength		Field strength	
		($\mu A/m$)	(dB $\mu A/m$)	($\mu V/m$)	(dB $\mu V/m$)
0.009 – 0.49	300	6.37 / f	20*lg(6.37 / f)	2400 / f	20*lg(2400 / f)
0.49 – 1.705	30	63.7 / f	20*lg(63.7 / f)	24000 / f	20*lg(24000 / f)
1.705 – 13.110	30	0.08	-21.94	30	29.54
13.110 – 13.410	30	0.283	-11.0	106	40.5
13.410 – 13.553	30	0.891	-1.0	334	50.5
13.553 – 13.567	30	42.26	32.5	15848	84
13.567 – 13.710	30	0.891	-1.0	334	50.5
13.710 – 14.010	30	0.283	-11.0	106	40.5
14.010 - 30	30	0.08	-21.94	30	29.54
30 – 88	3	---	---	100	40
88 – 216	3	--	---	150	43.5
126 – 960	3	--	---	200	46
above 960	3	--	---	500	54
Note 1: f in kHz					

Table 12 Radiated emission limits

At frequencies at or above 30 MHz, measurements may be performed at distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

2.3.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

2.3.6.1 Frequency range 9 kHz – 30 MHz

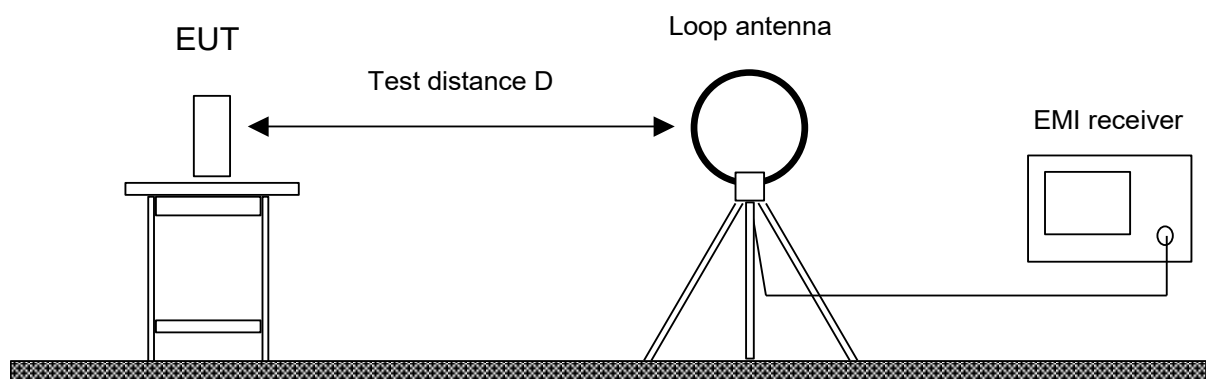


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

2.3.6.2 Frequency range 30 MHz – 1 GHz

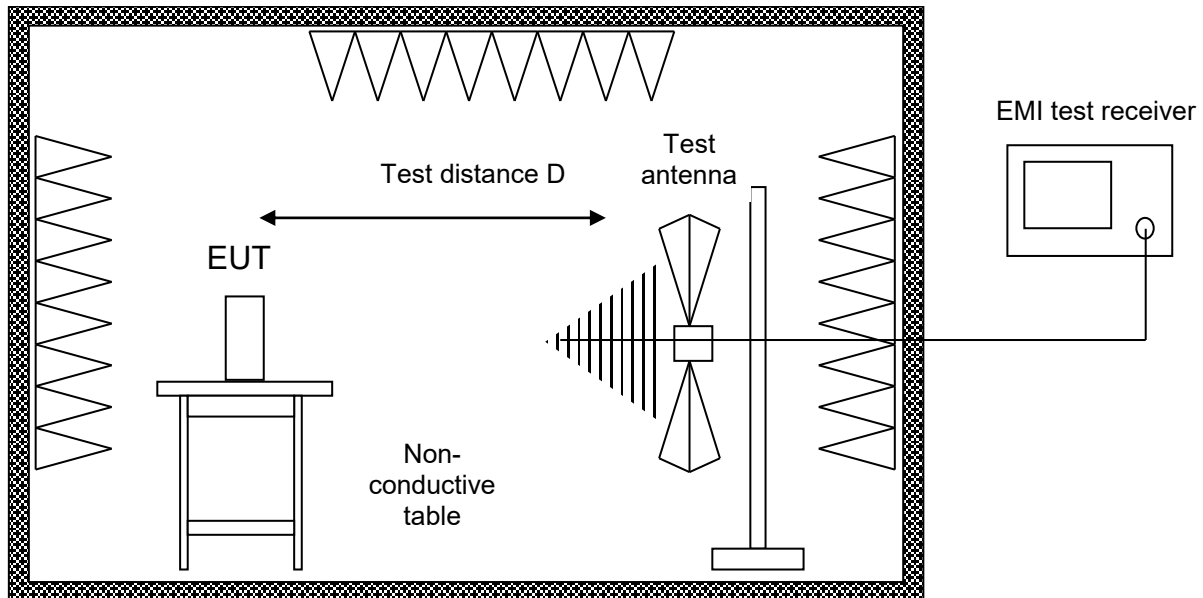

Alternate test site (semi anechoic room)

The EUT was placed on a non-conductive table, 0.8 m above the ground plane

Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz.

With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



2.3.7 Test Results

Frequency range	Limit applied	Test distance
9 kHz – 30 MHz	15.209; 15.225	3 m
30 MHz – 1 GHz	15.209	3 m

Table 13


Sample calculation:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} + \text{Antenna Transducer (dB(1/m)))}$$

Additional correction of level in the frequency range 9 – 490 kHz (300 m to 3 m): -80.0 dB

Additional correction of level in the frequency range 490 kHz – 30 MHz (30 m to 3 m): -40.0 dB


Frequency range 13.01 MHz – 14.11 MHz (Spectrum Mask acc. 15.225(a)-(c)):

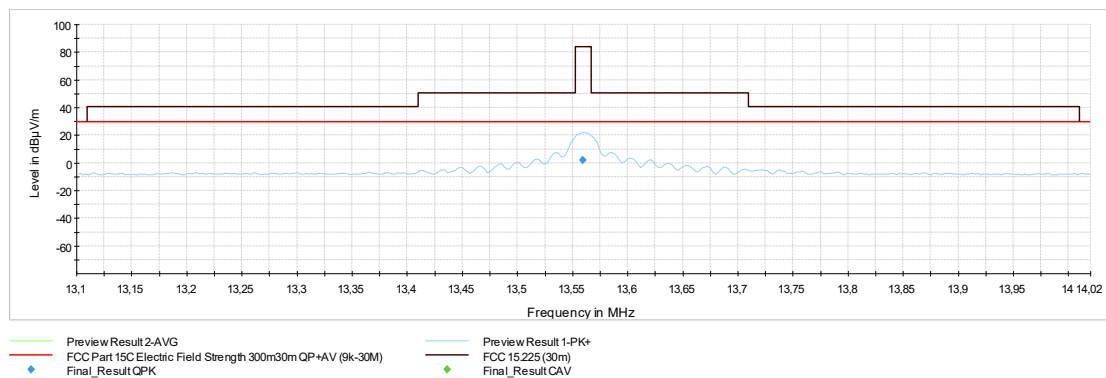



Product Service

Frequency range 9 kHz – 30 MHz:

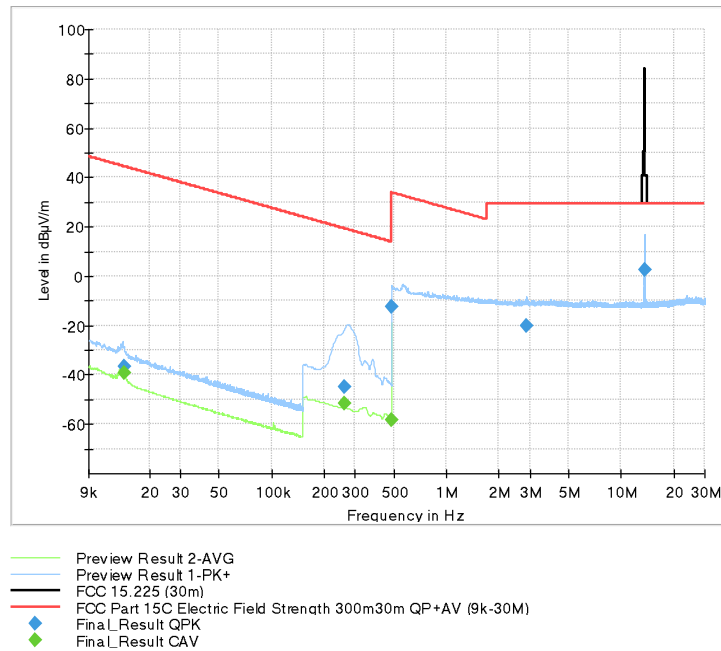


Frequency MHz	QuasiPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Pol	Azi- muth deg	Corr. dB/m
0.014430	-36.60	---	44.42	81.02	1000	0.2	V	-75.0	-58.1
0.260750	-45.11	---	19.28	64.39	1000	9	V	49.0	-59.9
0.490000	-12.23	---	13.80	26.03	1000	9	V	5.0	-20.0
2.860000	-19.92	---	29.54	49.46	1000	9	V	177.0	-19.9
13.559250	2.56	---	84.00	81.44	1000	9	H	-15.0	-20.2



Product Service

Frequency range 30 MHz – 1 GHz:

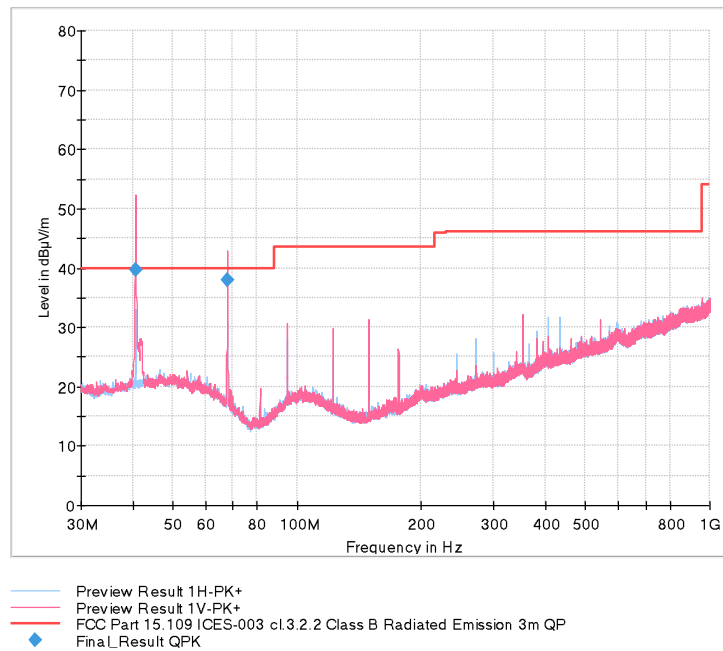

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
40.680000	39.66	40.00	0.34	1000	120	106.0	V	-198.0	17.9
67.800000	37.89	40.00	2.11	1000	120	100.0	V	-121.0	16.2



2.3.8 Test Location and Test Equipment

The test was carried out in semi anechoic room, Cabin No. 8

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop antenna	Schwarzbeck	FMZB 1519 C	72526	36	2028-01-31
TRILOG broadband antenna	Schwarzbeck	VULB 9162	20116	36	2028-02-29
Fixed attenuator	Aeroflex	Model 1: 4 dB	39625	36	2028-02-29
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2025-06-30
Semi anechoic room	Albatross Projects	Cabin No. 8	19917	--	---
EMC measurement software	Rohde & Schwarz	EMC32 Emission K8 – V10.60.20	19927	---	---

Table 14



2.4 Temperature Stability

2.4.1 Specification Reference

FCC 47 CFR Part 15 E, Clause 15.225(e)
ISSED RSS-210, Clause B.6 b.
ISED RSS-Gen, Clause 6.11

2.4.2 Equipment under Test and Modification State

NH2; HW: 585.190.012-02; SW: 24/48.00; Modification State 0

2.4.3 Date of Test

2025-04-30

2.4.4 Environmental Conditions


Ambient Temperature	24 °C
Relative Humidity	33 %

2.4.5 Specification Limits

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency over a temperature variation of -20 °C to $+50$ °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C. For battery operated equipment, the equipment tests shall be performed using a new battery.

2.4.6 Test Method

The test was performed according to ANSI C63.10, section 6.8.

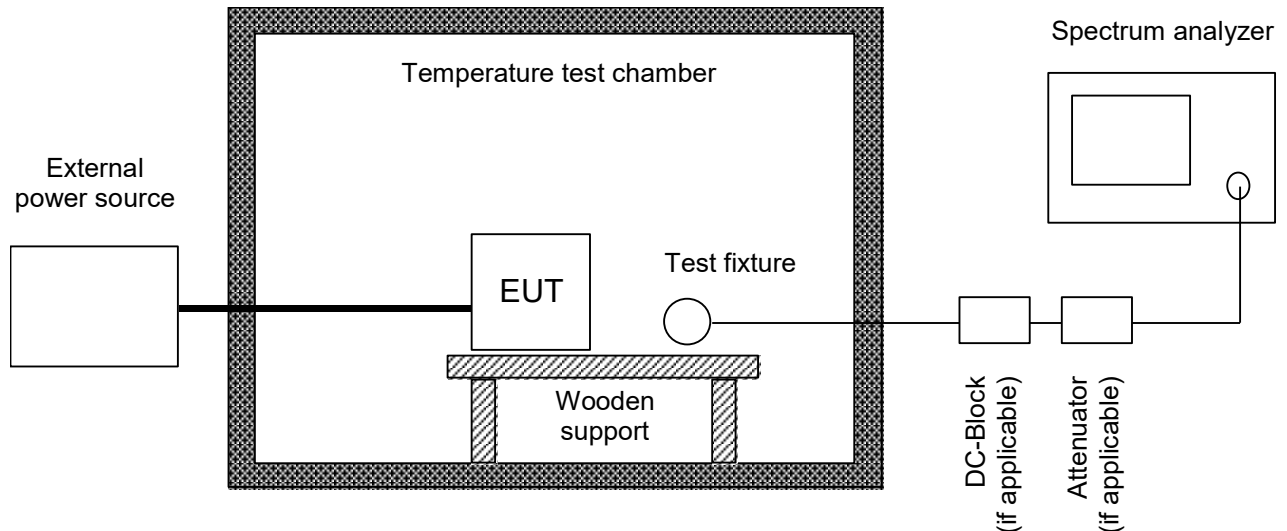

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C. Temperature and voltage range may vary if the manufacturer states another temperature or voltage range.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as a DC block and appropriate (50 Ω) attenuators. In case where the EUT does not provide an antenna connector or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- The maximum battery voltage as delivered by a new battery or 115 % of the battery nominal voltage;
- The battery nominal voltage
- 85 % of the battery nominal voltage
- The battery operating end point voltage which shall be specified by the equipment manufacturer.

The EUT is operating providing an unmodulated carrier for frequency error tests. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point of the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1 % of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance is larger than the uncertainty of the measured frequency tolerance.



2.4.7 Test Results

<i>Temperature</i>	<i>Supply Voltage</i>	<i>Frequency (MHz)</i>	<i>Frequency drift (ppm)</i>
-20	12.00	13.5602196	0.169
-10	12.00	13.5601819	0.131
0	12.00	13.5601837	0.133
10	12.00	13.5601432	0.092
20	10.20	13.5600986	0.048
20	12.00	13.5600508	0.000
20	13.80	13.5600819	0.031
30	12.00	13.5600008	-0.050
40	12.00	13.5599263	-0.125
50	12.00	13.5599357	-0.115

Table 15

2.4.8 Test Location and Test Equipment

The test was carried out in radio test laboratory

Instrument	Manufacturer	Type No	TE No	Calibra- tion Pe- riod (months)	Calibration Due
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	24	2026-03-31
Climatic test chamber	ESPEC	PL-4J	39858	12	2026-09-06

Table 16



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Conducted Voltage Emission		
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB
Discontinuous Conducted Emission		
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB
Conducted Current Emission		
9 kHz to 200 MHz	2	± 3.5 dB
Magnetic Fieldstrength		
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB
Radiated Emission		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 5.0 dB
1 GHz to 6 GHz	2	± 4.6 dB
Test distance 10 m		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 4.9 dB
The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$		

Table 17 Measurement uncertainty based on CISPR 16-4-2



<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	2	± 5 %
Conducted Power		
9 kHz ≤ f < 30 MHz	2	± 1.0 dB
30 MHz ≤ f < 1 GHz	2	± 1.5 dB
1 GHz ≤ f ≤ 40 GHz	2	± 2.5 dB
1 MS/s power sensor (TS8997)	2	± 1.5 dB
Occupied Bandwidth	2	± 5 %
Power Spectral Density	2	± 3.0 dB
Radiated Power		
25 MHz – 6 GHz	1.96	±4.4 dB
1 GHz – 18 GHz	1.96	±4.7 dB
18 GHz – 40 GHz	1.96	±4.9 dB
40 GHz – 325 GHz	1.96	±6.1 dB
Conducted Spurious Emissions	2	± 3.0 dB
Radiated Spurious Emissions	2	± 6.0 dB
Voltage		
DC	2	± 1.0 %
AC	2	± 2.0 %
Time (automatic)	2	± 5 %
Frequency	2	± 10 ⁻⁷
The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of kp = 2, providing a level of confidence of p = 95.45%		

Table 18 Measurement uncertainty based on ETSI TR 100 028

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 (U_{CISPR}) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.



Product Service

Test Name	Expanded Uncertainty
Occupied Bandwidth	±5 %
Conducted Power	
9 kHz ≤ f < 30 MHz	±1.0 dB
30 MHz ≤ f < 1 GHz	±1.5 dB
1 GHz ≤ f ≤ 40 GHz	±2.5 dB
1 MS/s power sensor (2.4 / 5 GHz band)	±1.5 dB
Power Spectral Density	±3.0 dB
Radiated Power	
25 MHz – 26.5 GHz	±6.0 dB
26.5 GHz – 66 GHz	±8.0 dB
40 GHz – 325 GHz	±10.0 dB
Conducted Spurious Emissions	±3.0 dB
Radiated Field Strength 9 kHz – 40 GHz	±6.0 dB
Voltage	
DC	± 1.0 %
AC	± 2.0 %
Time (automatic)	± 5 %
Frequency	± 10 ⁻⁷

Table 19 Decision Rule: Maximum allowed measurement uncertainty

End of Test Report