


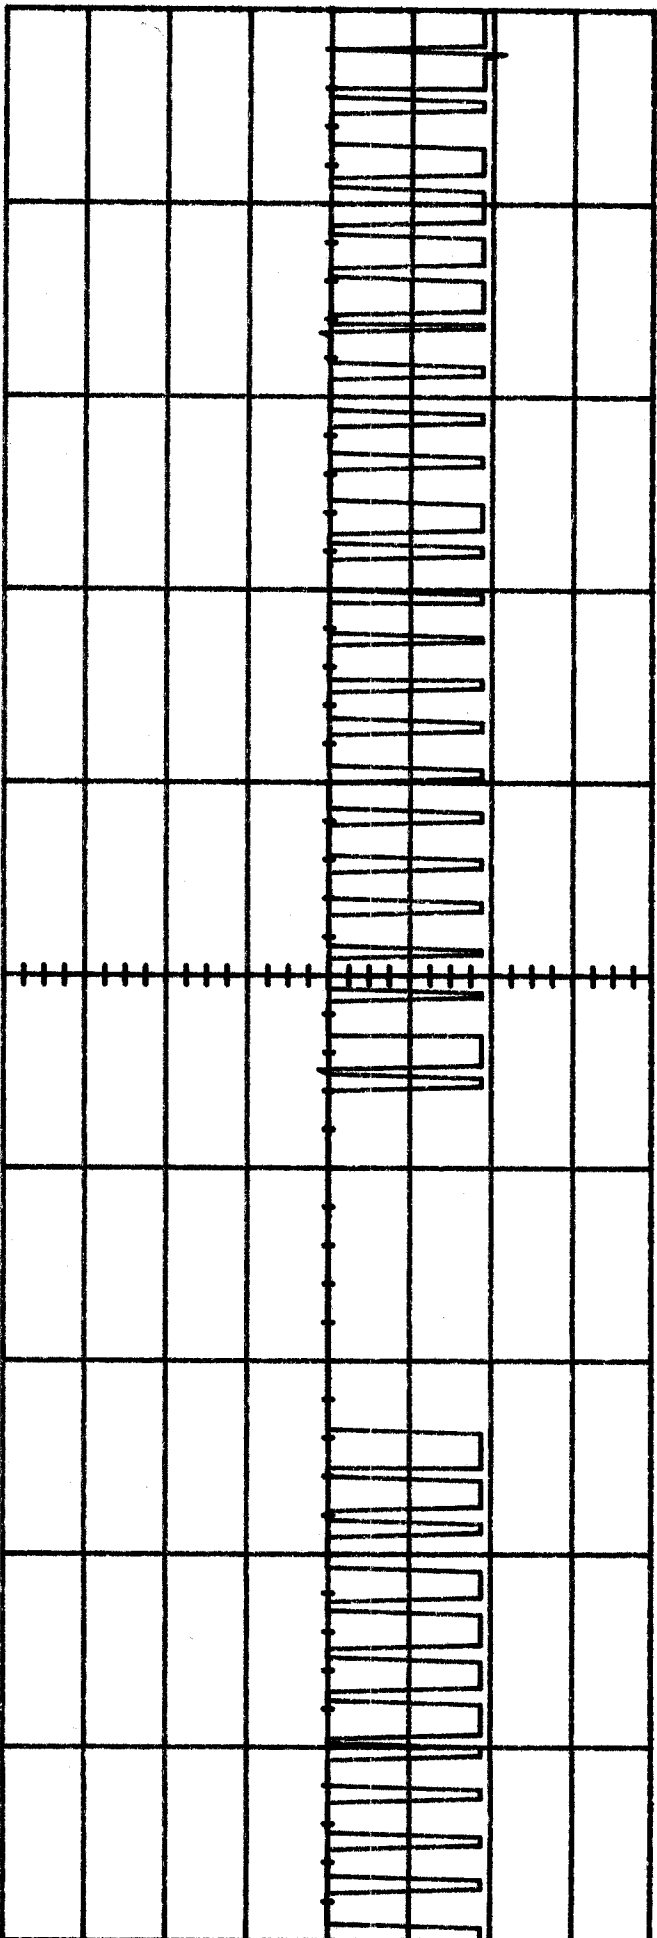


Main Timebase Delay/Pos Reference Mode
 10.0 ms/div 0.00000 s Left Repetitive
 Channel 1 Sensitivity Offset Probe Coupling
 5.00 V/div 0.00000 V 10.00 : 1 dc (1M ohm)

Trigger mode : Edge
 On Positive Edge of Chan1
 Trigger Level
 Chan1 = 7.50000 V (noise reject OFF)
 Holdoff = 100.000 ns

Markers
 Vmarker2 (c1) = 19.9991 V
 Vmarker1 (c1) = 0.00000 V
 delta V (c1) = 19.9991 V
 stop = 40.0000 ms
 start = -80.0000 ms
 delta t = 100.000 ms
 1/delta t = 10.0000 Hz


Pulse train over
 100 ms.

Buc Doc model 0043

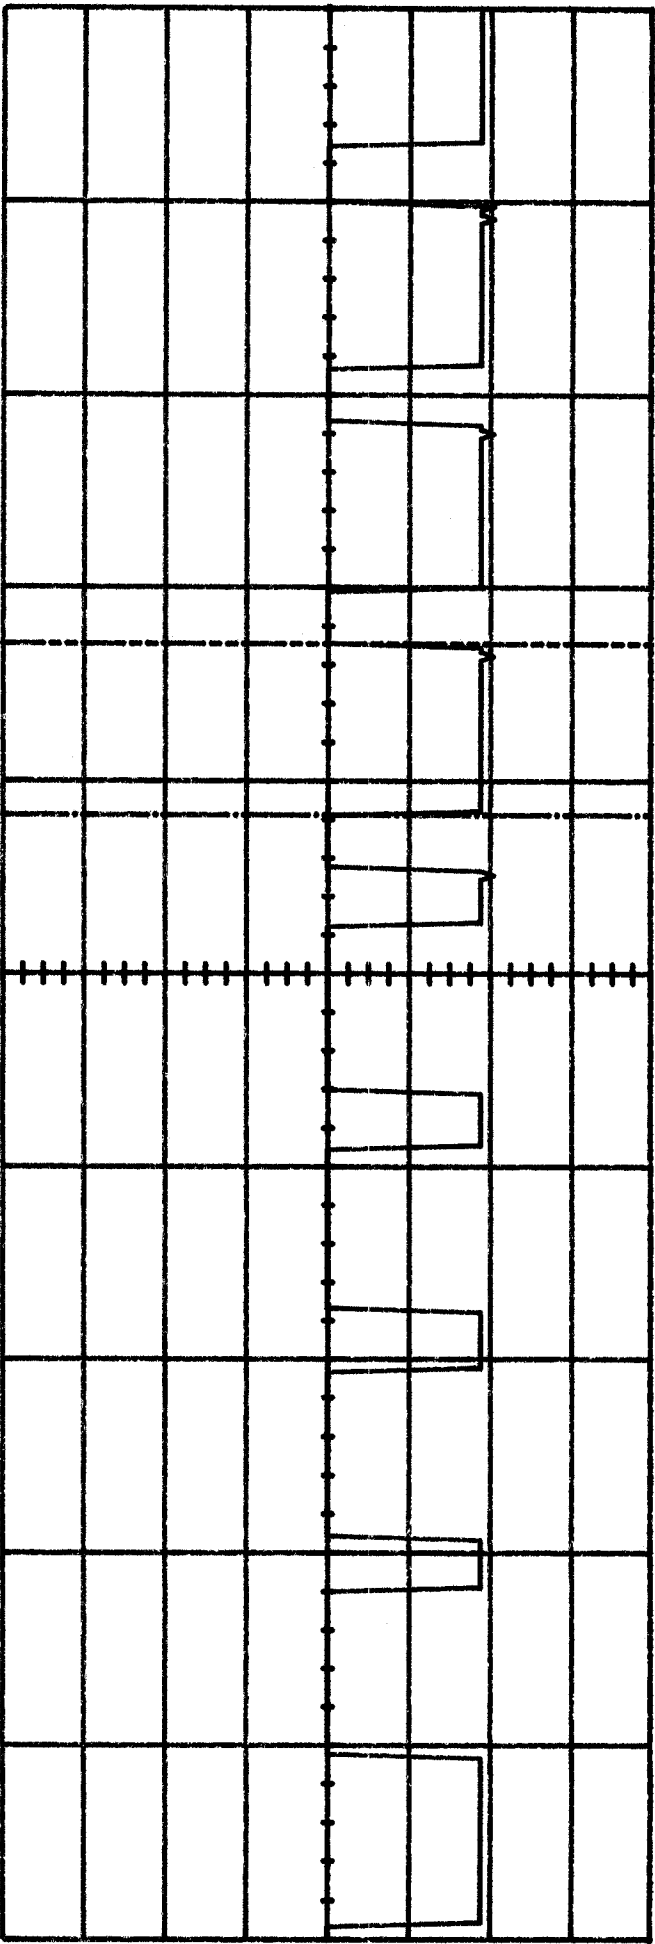

Main	Timebase	Delay/Pos	Reference	Mode	Markers
	2.00 ms/div	-2.00000 ms	Left	Repetitive	Vmarker2 (c1) = 10.9521 V
Channel 1	Sensitivity	Offset	Probe	Coupling	Vmarker1 (c1) = 0.00000 V
	5.00 V/div	0.00000 V	10.00 : 1	dc (1M ohm)	delta V (c1) = 10.9521 V
Trigger mode : Edge					
On Positive Edge Of Chan1					
Trigger Level					
Chan1 = 7.50000 V (noise reject OFF)					
Holdoff = 100.000 ns					
	stop	start	delta t	1/delta t	
	= 6.36000 ms	= 4.56000 ms	= 1.50000 ms	= 666.666 Hz	

Long Rise Time
1.8 ms

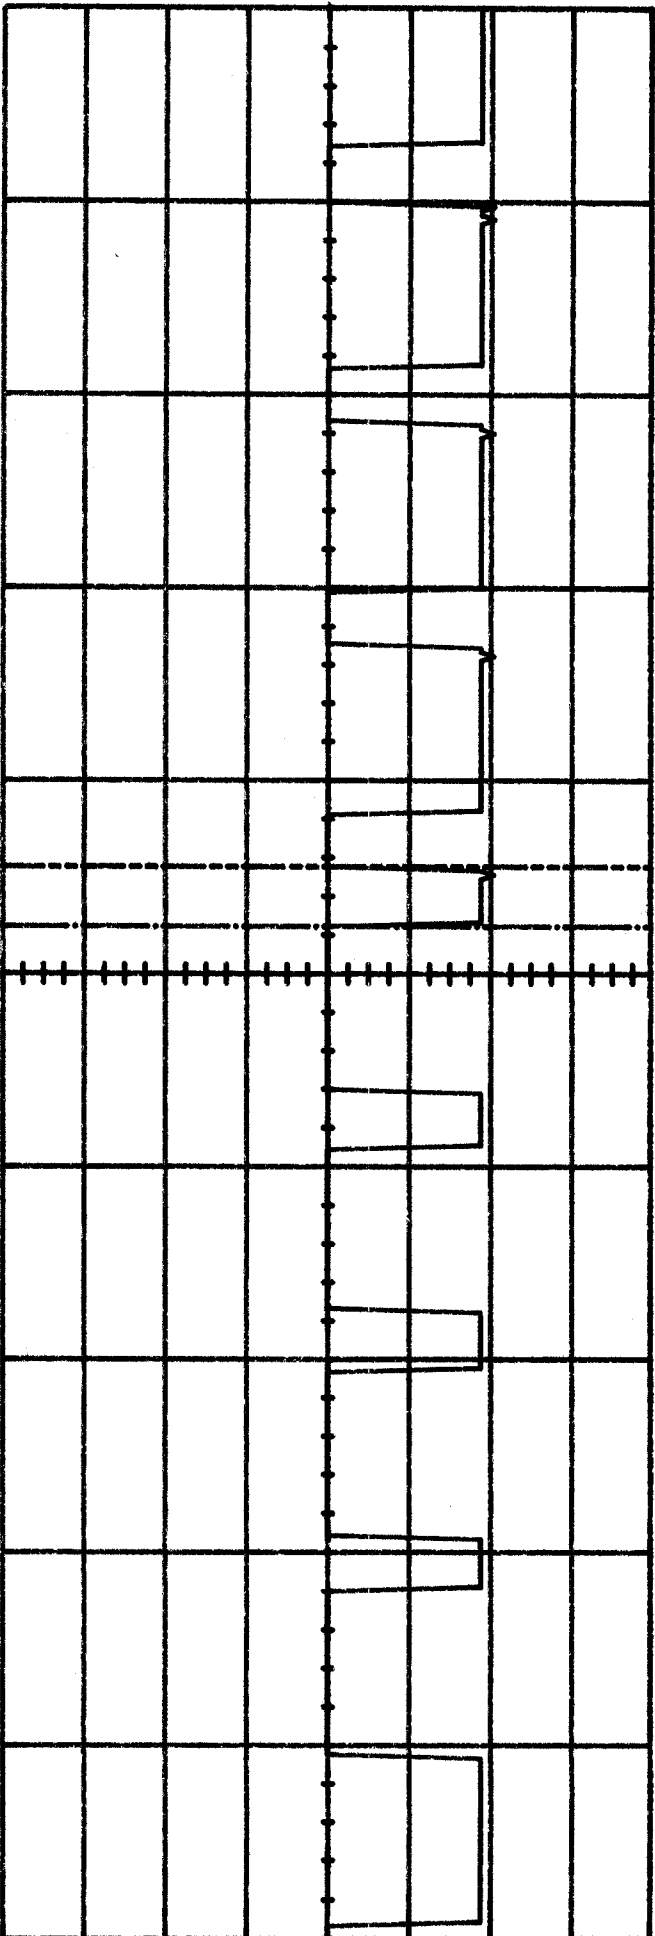

Main	Timebase	Delay/Pos	Reference	Mode	Markers
	2.00 ms/div	-2.00000 ms	Left	Repetitive	Vmarker2 (c1) = 19.9921 V
Channel 1	Sensitivity	Offset	Probe	Coupling	Vmarker1 (c1) = 0.00000 V
	5.00 V/div	0.00000 V	10.00 : 1	dc (1M ohm)	delta V (c1) = 19.9921 V
Trigger mode : Edge On Positive Edge Of Chan1 Trigger Level Chan1 = 7.50000 V (noise reject OFF) Holdoff = 100.000 ns					stop = 7.52000 ms start = 6.88000 ms delta t = 640.000 us 1/delta t = 1.56250 kHz

Short Pulse
0.64 ms