

Nemko Dallas Test Report: 2L0132RUS1

Applicant: Indyme
9085 Aero Avenue
San Diego, CA 92123

Equipment Under Test: CB550 Callbox
(E.U.T.)

In Accordance With: **FCC Part 15, Subpart C**
For Low Power Transmitters Operating Periodically
In The Band 40.66 - 40.77 MHz And Above 70 MHz

Tested By: Nemko Dallas, Inc.
802 N. Kealy
Lewisville, TX 75057-3136

Authorized By:

A handwritten signature in dark ink, appearing to read "John Fish", is shown on a light-colored background.

John Fish, EMC Engineer

Date: 5/31/02

Total Number of Pages: 27

TABLE OF CONTENTS

Section 1.	Summary of Test Results	3
Section 2.	Equipment Under Test (E.U.T.).....	5
Section 3.	Equipment Configuration	8
Section 4.	Transmission Requirements.....	9
Section 5.	Radiated Emissions	12
Section 6.	Occupied Bandwidth.....	17
Section 7.	Frequency Tolerance Devices in the Frequency Band 40.66 - 40.77 MHz	19
Section 8.	Periodic Alternate Field Strength Requirements.....	20
Section 9.	Powerline Conducted Emissions	21
Section 10.	Block Diagrams	22
Section 11.	Test Equipment List.....	25
ANNEX A - RESTRICTED BANDS		26

EQUIPMENT: **CB550 Callbox****Section 1. Summary of Test Results**

Manufacturer: Indyme

Model No.: CB550 Callbox

Sample No.: 1

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.231. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. NONE
See " Summary of Test Data".

**NVLAP LAB CODE: 100426-0**

NEMKO Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. NEMKO Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

Summary Of Test Data

Name of Test	Paragraph No.	Results
Transmission Requirements	15.231(a)	Complies
Radiated Emissions	15.231(b)	Complies
Occupied Bandwidth	15.231(c)	Complies
Frequency Tolerance	15.231(d)	N/A
Alternate Field Strength Requirements	15.231(e)	N/A
Powerline Conducted Emissions	15.207	N/A

Footnotes:

- 1) The device operates above 70 MHz
- 2) The device is not a periodic transmitter
- 3) The device is battery powered.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Range:	303.825 MHz (Nominal)
Operating Frequency(ies) of Sample:	303.86 MHz
Type of Emission:	Digital
Supply Power Requirement:	Lifetime integral battery
Duty Cycle Correction Factor:	-15.6 dB

Description of E.U.T.

The unit is a microprocessor controlled callbox that is a self contained low transmit power unit with an integral lifetime battery (estimated lifetime is 7-10 years under normal use). It is installed in a nonconductive plastic enclosure with customer specific graphic overlays.

The unit operates at a nominal frequency of 303.825 MHz using an RFM TX5003 hybrid transmitter module and a permanently attached wire antenna

Modifications Incorporated in E.U.T.

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

Justification

The E.U.T. was configured for testing as per typical installation.

The following combinations were investigated to establish worst case configuration:

- (1) Lying flat
- (2) Upright
- (3) Lying on edge

Exercise Mode

The E.U.T. exercise mode used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

Exercise mode:


- (1) Transmit full power
- (2)
- (3)
- (4)
- (5)
- (6)

EQUIPMENT: **CB550 Callbox****Section 3. Equipment Configuration****Equipment Configuration List:**

Item	Description	Model No.	Serial.	Rev.
(A)	Callbox	CB550	None	
(B)				

Inter-connection Cables:

Item	Description	Length (m)
(1)	There are no interconnecting cables	
(2)		

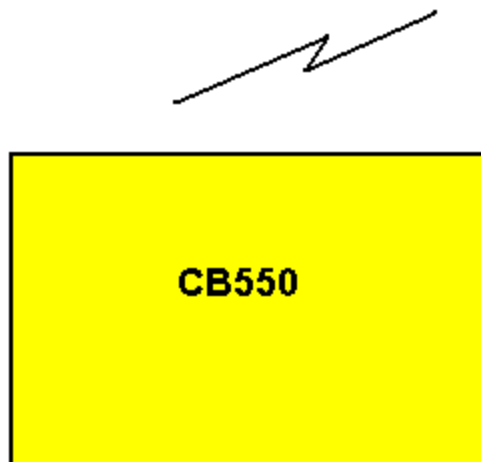Configuration of the Equipment Under Test (E.U.T)

Section 4. Transmission Requirements

NAME OF TEST: Transmission Requirements	PARA. NO.: 15.231(a)
TESTED BY: David Light	DATE: 5/30/2002

Minimum Standard:

15.231(a) Continuous transmissions such as voice, video or data transmissions are not permitted.

15.231(a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds after being released.

15.231(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds of activation.

15.231(a)(3) Periodic transmissions at regular pre-determined intervals are not permitted. However polling or supervisory transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

15.231(a)(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm.

Test Results:

Complies.

Test Data:

Compliance was determined by verification of technical specifications and a functional test on the equipment.

EQUIPMENT: **CB550 Callbox**

Rationale for Compliance with Transmission Requirements

15.231(a)(1)	☒ Manual activation	TX deactivation time:
15.231(a)(2) :	☐ Automatic activation	
15.231(a)(3) :	☐ Regular, predetermined transmissions	TX rate and duration:
	☐ Polling or supervisory transmissions	
15.231(a)(4) :	☐ Alarm device operating during the pendency of alarm condition	
	☐ Non-alarm device	

EQUIPMENT: **CB550 Callbox**

Test Data – Transmission Requirements



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Transmitter Release Time	
Page 1 of 1		Complete <u>X</u>	
Job No.: 2L0132	Date: <u>5/30/2002</u>	Preliminary: _____	
Specification: 15.231(a)(1)	Temperature(°C): <u>24</u>		
Tested By: <u>David Light</u>	Relative Humidity(%) <u>40</u>		
E.U.T.: <u>CB550</u>			
Configuration: <u>TX</u>			
Sample Number: <u>1</u>			
Location: <u>Lab 1</u>	RBW: <u>Refer to plots</u>	Measurement	
Detector Type: <u>Peak</u>	VBW: <u>Refer to plots</u>	Distance: _____ m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: <u>1629</u>		
Filter: _____	Cable #2: _____		
Receiver: <u>1464</u>	Cable #3: _____		
Attenuator #1: _____	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: <u>802</u>			
Measurement Uncertainty: <u>+/-1.7 dB</u>			
ATTEN 10dB ΔMKR -23.33dB RL -10.00dBm 10dB/ 2.7167sec CENTER 303.863333MHz SPAN 0Hz *RBW 300kHz VBW 300kHz *SWP 5.00sec			
Notes: <u>Transmitter release time equals 2.72 seconds</u>			

Section 5. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.231(b)
TESTED BY: David Light	DATE: 5/31/2002

Minimum Standard:**Permissible Field Strength Limits (Momentarily Operated Devices)**

Fundamental Frequency (MHz)	Field Strength of Fundamental Microvolts/Meter at 3 meters; (watts)	Field Strength of Unwanted Emissions Microvolts/Meter at 3 meters; (watts)
40.66 - 40.70	2,250	225
70-130	1, 250	125
130-174	1,250 to 3,750*	125 to 375
174-260 (note 1)	3,750	375
260-470 (note 1)	3,750 to 12,500*	375 to 1,250
Above 470	12,500	1,250

Notes:

# Use quasi-peak or averaging meter.	For 130 - 174 MHz: $FS \text{ (microvolts/m)} = (56.82 \times F) - 6136$
* Linear interpolation with frequency F in MHz	For 260 - 470 MHz: $FS \text{ (microvolts/m)} = (41.67 \times F) - 7083$

Any emissions that fall within the restricted bands of 15.205 shall not exceed the following limits:

Frequency (MHz)	Field Strength (m V/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

Test Results: Complies. The worst-case emission level is 70.2 dBµV/m @ 3m at 303.8 MHz. This is 4.5 dB below the specification limit of 74.7 dBµV/m.

The device was tested with a fully charged battery.

Test Data: See attached table.

Above 1 GHz a spectrum analyzer and low noise amplifier are used to measure emission levels. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was 1 MHz.

In the case of handheld equipment, the E.U.T. is rotated in three planes to obtain worst-case results.

EQUIPMENT: **CB550 Callbox**

Test Data - Radiated Emissions



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Duty Cycle

Page 1 of 2

Job No.: 2L0132

Date: 5/30/2002

Complete X

Specification: 15.231

Temperature(°C): 24

Preliminary: _____

Tested By: David Light

Relative Humidity(%) 40

E.U.T.: CB550

Configuration: Tx

Sample Number: 1

Location: Lab 1

RBW: Refer to plots

Measurement

Detector Type: Peak

VBW: Refer to plots

Distance: _____ m

Test Equipment Used

Antenna: _____

Directional Coupler: _____

Pre-Amp: _____

Cable #1: 1629

Filter: _____

Cable #2: _____

Receiver: 1464

Cable #3: _____

Attenuator #1: _____


Cable #4: _____

Attenuator #2: _____

Mixer: _____

Additional equipment used: 802

Measurement Uncertainty: +/-1.7 dB

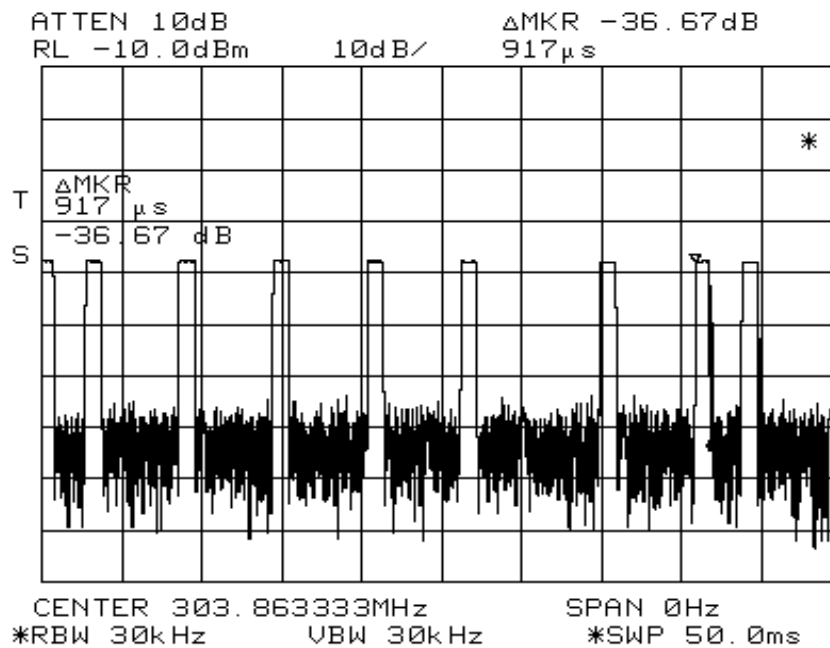

Notes: Each pulse width equals 917uS

EQUIPMENT: **CB550 Callbox**

Test Data – Continued



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667


Nemko Dallas, Inc.

Data Plot

Page 2 of 2

Duty Cycle

Job No.: 2L0132 Date: 5/30/2002
Specification: 15.2 Temperature(°C): 24
Tested By: David Light Relative Humidity(%) 40
E.U.T.: CB550
Configuration: Tx

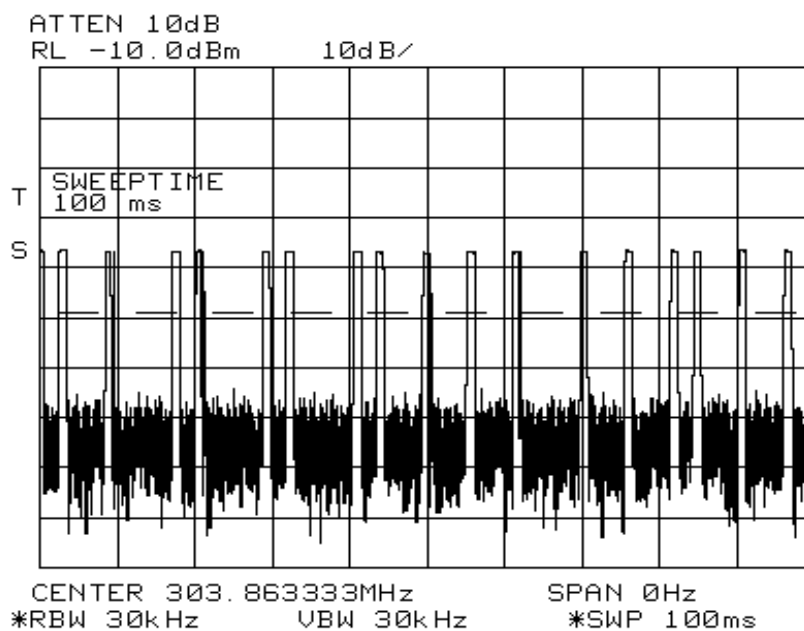Notes: 18 pulses per 100mS equals 16.51mS per 100 mS $20\log(16.51/100) = -15.6 \text{ dB Correction factor}$

EQUIPMENT: **CB550 Callbox**

Test Data – Continued



NEMKO Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Radiated Emissions Data

Complete X Job #: 2L0132R Test #: RE-1
Preliminary Page 1 of 1

Client Name : INDYME
EUT Name : CALLBOX
EUT Model # : CB550
EUT Part # : NA
EUT Serial # : None
EUT Config. : Lying flat (worst case) Tx full power

Specification : 15.231(b) Reference :
Rod. Ant. #: Temp. (deg. C) : 22 Date : 5/31/02
Bicon Ant. #: Humidity (%) : 45 Time : 6:30
Log Ant. #: 1034 Staff : Light
Bilog Ant. #: Photo ID: None
Dipole Ant. #: Peak Bandwidth: 100 kHz
Cable#: 1983 Location: AOATS Video Bandwidth 100 kHz
Preamp#: 791 Distance: 3m
Limiter#: NA
Atten #: NA
Detector#: 1464

Meas. Freq. (MHz)	Ant. Pol. (H/V)	Duty Cycle (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
303.8	V	-15.6	49.7	20.4	4.6	0.0	59.1	74.7	-15.6	Pass	
607.6	V	-15.6	30.5	19.2	6.7	23.2	17.6	54.7	-37.1	Pass	Noise floor
911.4	V	-15.6	31.0	24.7	8.6	23.8	24.9	54.7	-29.8	Pass	Noise floor
303.8	H	-15.6	60.8	20.4	4.6	0.0	70.2	74.7	-4.5	Pass	
607.6	H	-15.6	37.8	18.9	6.7	23.2	24.6	54.7	-30.1	Pass	
911.4	H	-15.6	31.0	21.8	8.6	23.8	22.0	54.7	-32.7	Pass	Noise floor
There were no emissions detected above the 2nd harmonic											
Spectrum was scanned to the 10th harmonic											

..\\EMCShare\\AUTOMATE\\DATASHTS\\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

EQUIPMENT: **CB550 Callbox**

Radiated Photographs (Worst Case Configuration)

FRONT VIEW



REAR VIEW



Section 6. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.231(c)
TESTED BY: David Light	DATE: 5/30/2002

Minimum Standard: 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Results: [Complies. See attached graph.](#)

Test Data: See attached graph.

EQUIPMENT: **CB550 Callbox**

Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		20 dB Bandwidth			
Page 1 of 1				Complete <u>X</u>	
Job No.:	2L0132	Date:	7/11/2002	Preliminary: _____	
Specification:	15.231(c)	Temperature(°C):	24		
Tested By:	David Light	Relative Humidity(%)	40		
E.U.T.:	CB550				
Configuration:	Tx				
Sample Number:	1				
Location:	Lab 1	RBW:	Refer to plots	Measurement	
Detector Type:	Peak	VBW:	Refer to plots	Distance: <u>na</u> m	
Test Equipment Used					
Antenna:		Directional Coupler:			
Pre-Amp:		Cable #1:	1629		
Filter:		Cable #2:			
Receiver:	1036	Cable #3:			
Attenuator #1:		Cable #4:			
Attenuator #2:		Mixer:			
Additional equipment used:	802				
Measurement Uncertainty:	+/-1.7 dB				
Ref Lv 1 -20 dBm Marker 1 [T1] -50.41 dBm 303.83684419 MHz RBW 50 kHz VBW 50 kHz SWT 6 ms RF Att 10 dB Unit dBm					
Center 303.8739203 MHz 118.75 kHz Span 1.1875 MHz					
Date: 11.JUL.2002 08:59:49					
Notes:					

Section 7. Frequency Tolerance
Devices in the Frequency Band 40.66 - 40.77 MHz

NAME OF TEST: Frequency Tolerance	PARA. NO.: 15.231(d)
TESTED BY:	DATE:

Minimum Standard: 15.231(d) For devices operating within the frequency band 40.66 - 40.70 MHz, the bandwidth of the emission shall be confined within the band edges and the frequency tolerance of the carrier shall be $\pm 0.01\%$. This frequency tolerance shall be maintained for a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary power supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Results: **Not Applicable. The device does not operate in this range.**

Test Data: See attached graph.

Section 8. Periodic Alternate Field Strength Requirements

NAME OF TEST: Periodic Alternate Field Strength Requirements	PARA. NO.: 15.231(e)
TESTED BY:	DATE:

Minimum Standard:

15.231(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following.

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500	50 to 150
174 - 260	1,500	150
260-470	1,500 to 5,000	150 to 500
Above 470	5,000	500

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Test Results:

Not applicable. The device is not a periodic transmitter.

Test Data:

See attached table.

Section 9. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207
TESTED BY:	DATE:

Minimum Standard:

Frequency(MHz)	Maximum Powerline Conducted RF Voltage	
	mV	dBmV
0.45 - 30.0	250	48

Test Results: **Not applicable. The device is battery powered.**

Test Data: See attached graphs and table.

Method Of Measurement: (Procedure ANSI C63.4-1992)


Measurements were made using a spectrum analyzer with 10 kHz RBW, Peak detector. Any emissions that are close to the limit are measured using a test receiver with 10 kHz bandwidth, CISPR Quasi-Peak detector.

Broadband emissions are identified by switching the receiver detector function from Quasi-Peak to Average. If the amplitude of the emission drops by 6 dB or more then the emission is classified as broadband and the Quasi-Peak level is reduced by a factor of 13 dB.


All emissions within 10 dB of limit have been recorded.

Section 10. Block Diagrams


Conducted Emissions

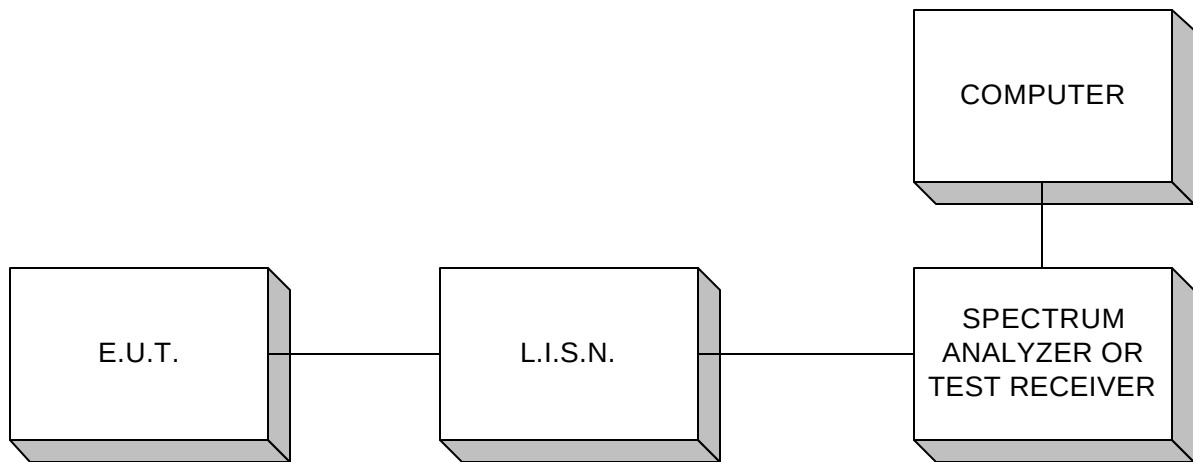

Occupied Bandwidth, Duty Cycle

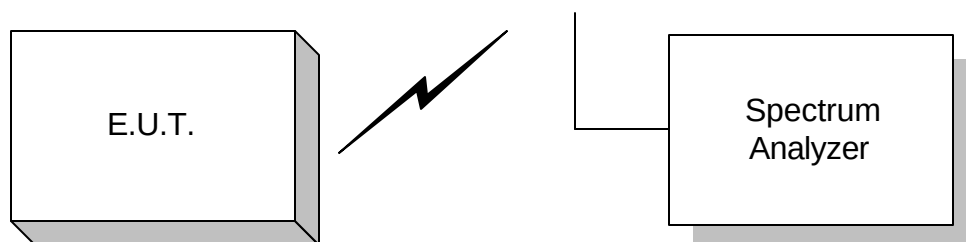


Outdoor Test Site For Radiated Emissions

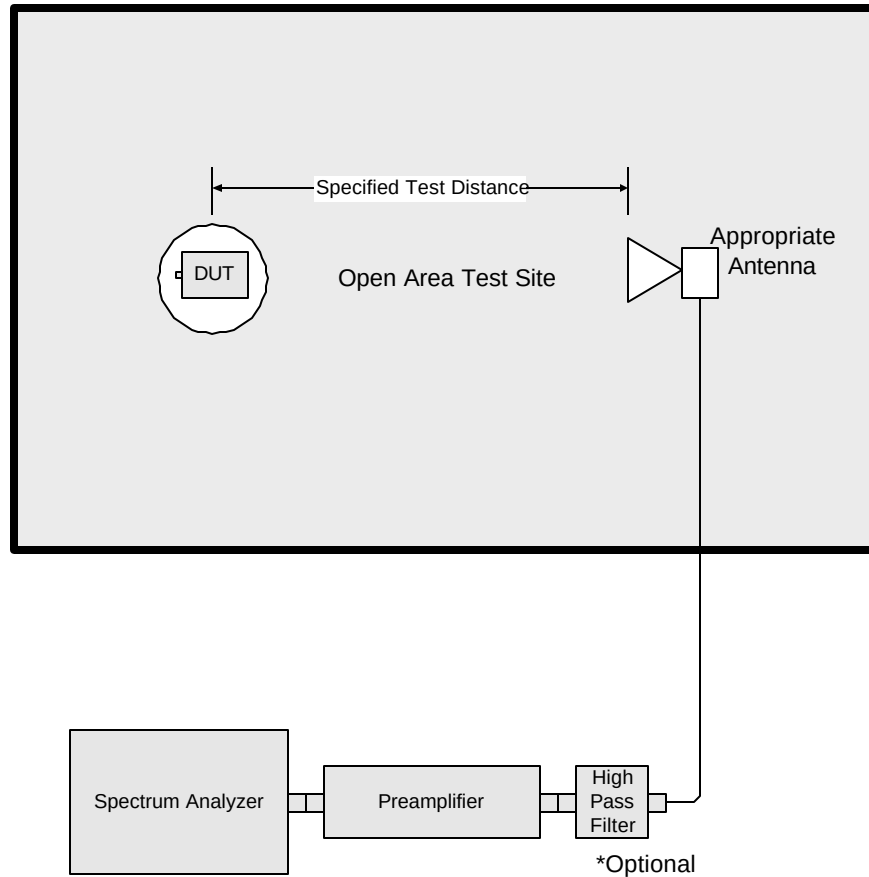

Radiated Emissions 30 MHz - 1 GHz

The spectrum was searched up to the 10th harmonic of the fundamental frequency of operation.

EQUIPMENT: **CB550 Callbox**

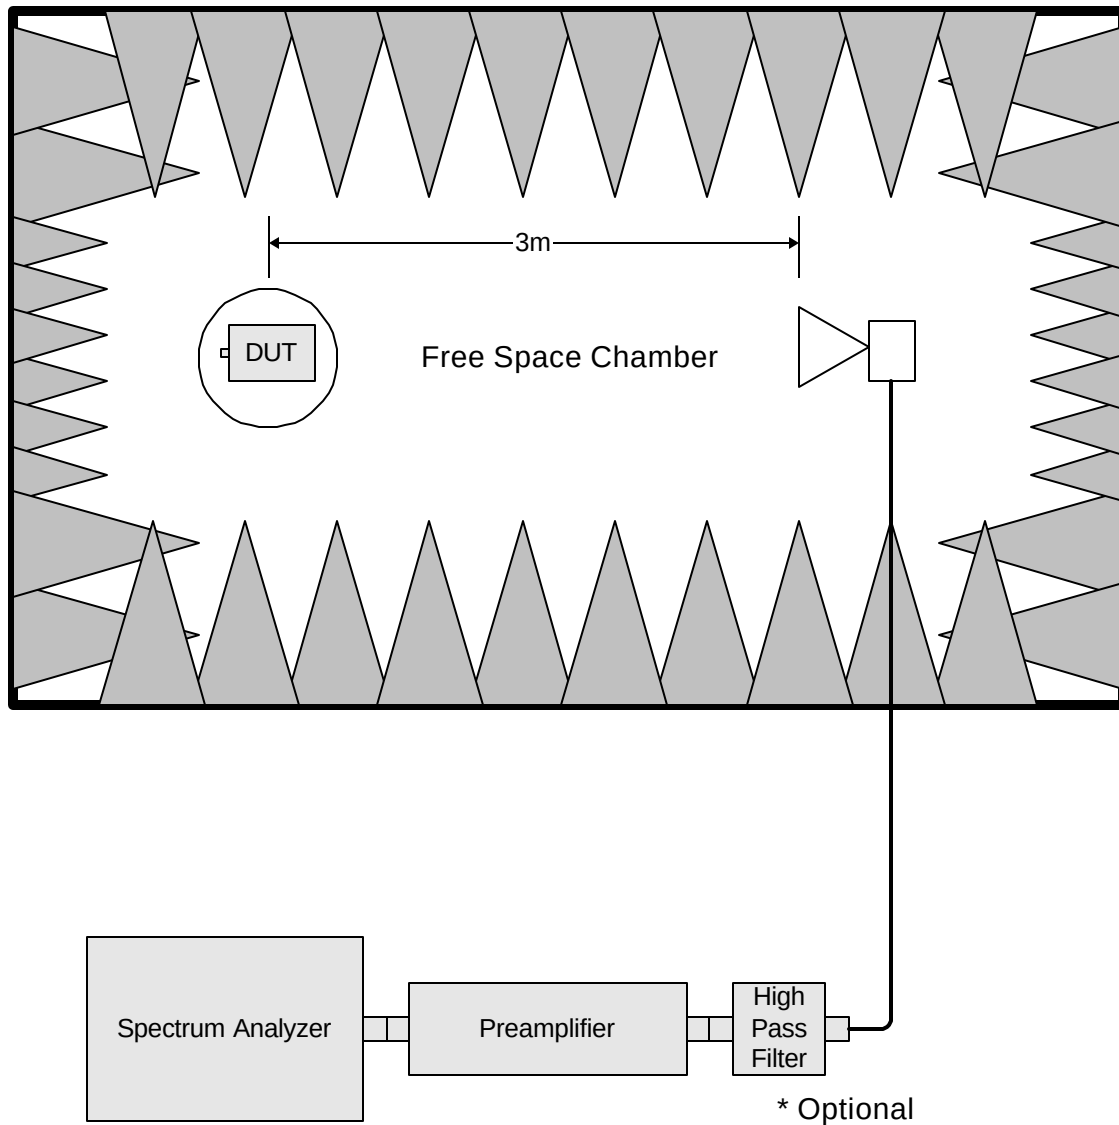

Radiated Emissions above 1 GHz

EQUIPMENT: **CB550 Callbox****Section 11. Test Equipment List**

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	06/01/01
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	06/01/01
1464	Spectrum analyzer (2 yr cal)	Hewlett Packard 8563E	3551A04428	01/02/01
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	07/30/01
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/30/01
791	PREAMP, 25dB	ICC LNA25	398	08/16/01
1034	ANTENNA,LP	A.H. SYSTEMS SAS-200/510	121	05/09/02
1983	CABLE	KTL Site A OATS	N/A	09/25/01
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU
802	Near Field Probe Set	EMCO 7405	103	N/A
1036	Spectrum Analyzer 2 yr cal	Rohde & Schwarz FSEK30	830844/006	12/18/01

ANNEX A - RESTRICTED BANDS

Annex A Restricted Bands of Operation

(a) Except as shown in paragraph (d) of this section , only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.49 - 0.51	16.69475-16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425-16.80475	960-1240	7.25-7.75
3.020 - 3.026	25.5-25.67	1300-1427	8.025-8.5
4.125 - 4.128	37.5-38.25	1435-1626.6	9.0-9.2
4.17725 - 4.17775	73-74.6	1645.5-1646.5	9.3-9.5
4.20725 - 4.20775	74.8-75.2	1660-1710	10.6-12.7
6.215 - 6.218	108-121.94	1718.8-1722.2	13.25-13.4
6.31175 - 6.31225	123-138	2220-2300	14.47-14.5
8.291 - 8.294	149.9-150.05	2310-2390	15.35-16.2
8.362 - 8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625 - 8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425 - 8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29 - 12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975 - 12.52025	240-285	3345.8-3358	36.43-36.5
12.57675 - 12.57725	322-335.4	3600-4400	Above 38.6
13.36 - 13.41			