

TEST REPORT

Applicant: Afimilk Agricultural Cooperative Ltd.

Address of Applicant: Afimilk Ltd. Kibbutz Afikim 1514800, Israel

Manufacturer: Afimilk Agricultural Cooperative Ltd.

Address of Manufacturer: Afimilk Ltd. Kibbutz Afikim 1514800, Israel

Factory: Flex LTD

Address of Factory: Jabotinski St 13, Ofakim

Equipment Under Test (EUT)

Product Name: Afimilk Reader H, 9,AF 5.5+ Compatible

Model No.: Reader H 9

Trade Mark: Afimilk®

FCC ID: JER52562H9

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: January 01, 2026

Date of Test: January 01-21, 2026

Date of report issued: January 21, 2026

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Laboratory Manager


This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Version

Report No.	Version No.	Date	Description
GTS2025060375F02	00	July 24, 2025	Original
GTS2025100283F02	01	January 21, 2026	add test frequency

Tested By:




Date:

January 21, 2026

Test Engineer

Prepared By:




Date:

January 21, 2026

Project Engineer

Check By:



Date:

January 21, 2026

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 DEVIATION FROM STANDARDS	6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.6 TEST FACILITY.....	6
5.7 TEST LOCATION	6
5.8 ADDITIONAL INSTRUCTIONS.....	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 RADIATED EMISSION METHOD	10
7.2.1 Field Strength of The Fundamental Signal	12
7.2.2 Spurious emissions and Band Edge.....	13
7.3 20dB OCCUPY BANDWIDTH	25
8 TEST SETUP PHOTO	29
9 EUT CONSTRUCTIONAL DETAILS	29

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10: 2020.
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: Not applicable.

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	Afimilk Reader H, 9,AF 5.5+ Compatible
Model No.:	Reader H 9
S/N:	426604-4061-01170
Test sample(s) ID:	GTS2025100283-1
Sample(s) Status	Engineered sample
Operation Frequency:	907-924MHz
Channel numbers:	3
Modulation type:	2-GFSK
Antenna Type:	ANT 1&2: Internal Antenna
Antenna gain:	ANT 1&2: 1.2dBi MIMO No Support
Power supply:	AC 23-27V Or DC 24V Or DC 51V/0.8A By POE

Disclaimer statement:

1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Channel	Frequency
The lowest channel	907MHz
The middle channel	916MHz
The Highest channel	924MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report (Only show the worst case:Y axis) and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	90.64	91.53	90.83

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Araknis	Ethernet POE	AN-310-SW-R-24-POE	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Continuously transmitter provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 11, 2025	Apr. 10, 2026
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 12, 2025	Apr. 11, 2026
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 12, 2025	Apr. 11, 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 11, 2025	Jul 10, 2026
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.22, 2025	Nov.21, 2026
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2025	Apr. 10, 2026
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2025	Apr. 10, 2026
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2025	Apr. 10, 2026
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 11, 2025	Mar. 10, 2026
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2025	Apr. 10, 2026
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 24, 2025	Nov. 23, 2026
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2025	Apr. 10, 2026
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 15, 2025	Apr. 14, 2026
16	RE cable 1	GTS	N/A	GTS675	Jul. 11, 2025	Jul. 10, 2026
17	RE cable 2	GTS	N/A	GTS676	Jul. 11, 2025	Jul. 10, 2026
18	RE cable 3	GTS	N/A	GTS677	Jul. 11, 2025	Jul. 10, 2026
19	RE cable 4	GTS	N/A	GTS678	Jul. 11, 2025	Jul. 10, 2026
20	RE cable 5	GTS	N/A	GTS679	Jul. 11, 2025	Jul. 10, 2026
21	RE cable 6	GTS	N/A	GTS680	Jul. 11, 2025	Jul. 10, 2026
22	RE cable 7	GTS	N/A	GTS681	Jul. 11, 2025	Jul. 10, 2026
23	RE cable 8	GTS	N/A	GTS682	Jul. 11, 2025	Jul. 10, 2026
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2025	Apr. 10, 2026
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 15, 2025	Apr. 14, 2026
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 12, 2025	Apr. 11, 2026
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2025	Apr. 10, 2026
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2025	Apr. 10, 2026
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2025	Apr. 10, 2026
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A
11	Current probe	CYBERTEK	EM5011	GTS698	Jan. 13, 2025	Jan. 12, 2026

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 11, 2025	Apr. 10, 2026
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 11, 2025	Apr. 10, 2026
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 11, 2025	Apr. 10, 2026
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2025	Apr. 10, 2026
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 11, 2025	Apr. 10, 2026
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 11, 2025	Apr. 10, 2026
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 11, 2025	Apr. 10, 2026
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 15, 2025	Apr. 14, 2026


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Jul. 16, 2025	Jul. 15, 2026


7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is internal Antenna, reference to the appendix II for details	

7.2 Radiated Emission Method

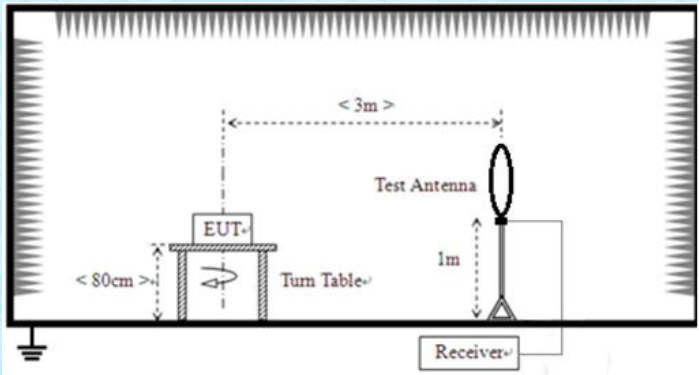Test Requirement:	FCC Part15 C Section 15.209, 15.205				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 10GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)	Remark	
	902-928MHz		94.00	QP Value	
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)	Remark	
	0.009MHz-0.490MHz		2400/F(kHz) @300m	Quasi-peak Value	
	0.490MHz-1.705MHz		24000/F(kHz) @30m	Quasi-peak Value	
	1.705MHz-30.0MHz		30 @30m	Quasi-peak Value	
	30MHz-88MHz		100 @3m	Quasi-peak Value	
	88MHz-216MHz		150 @3m	Quasi-peak Value	
	216MHz-960MHz		200 @3m	Quasi-peak Value	
	960MHz-1GHz		500 @3m	Quasi-peak Value	
	Above 1GHz		500 @3m	Average Value	
		5000 @3m	Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				

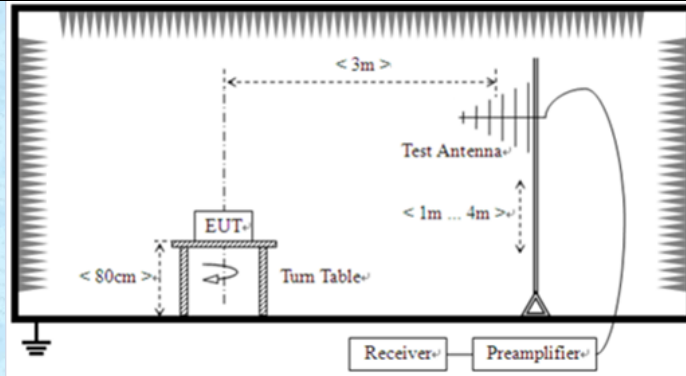

For radiated emissions above 1GHz

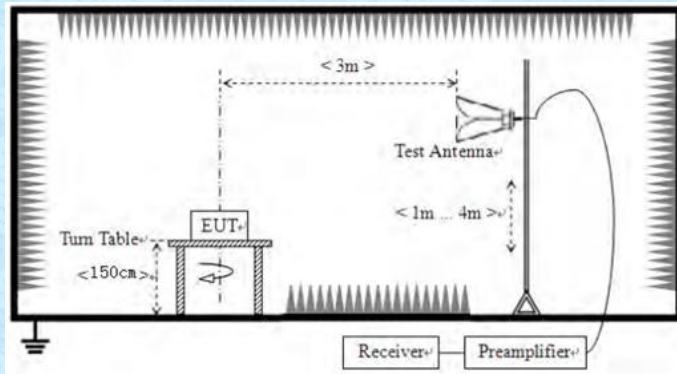

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments: Refer to section 6.0 for details

Test mode: Refer to section 5.2 for details

Test environment: Temp.: 25 °C Humid.: 52% Press.: 1012mbar

Test voltage: AC 24V, 60Hz

Test results: Pass

Measurement data:

Pre-scan all test modes, found worst case at Ant 1, and so only show the test result of it.

7.2.1 Field Strength of The Fundamental Signal

QP value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
907.00	85.83	23.13	5.75	31.10	83.61	94.00	-10.39	Vertical
907.00	93.23	23.13	5.75	31.10	91.01	94.00	-2.99	Horizontal
916.00	93.63	23.22	5.78	31.10	91.53	94.00	-2.47	Vertical
916.00	85.91	23.22	5.78	31.10	83.81	94.00	-10.19	Horizontal
924.00	86.07	23.30	5.80	31.10	84.07	94.00	-9.93	Vertical
924.00	92.82	23.30	5.80	31.10	90.82	94.00	-3.18	Horizontal


7.2.2 Spurious emissions and Band Edge

■ Below 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz

Test Frequency:	907MHz	Polarization:	Horizontal
-----------------	--------	---------------	------------

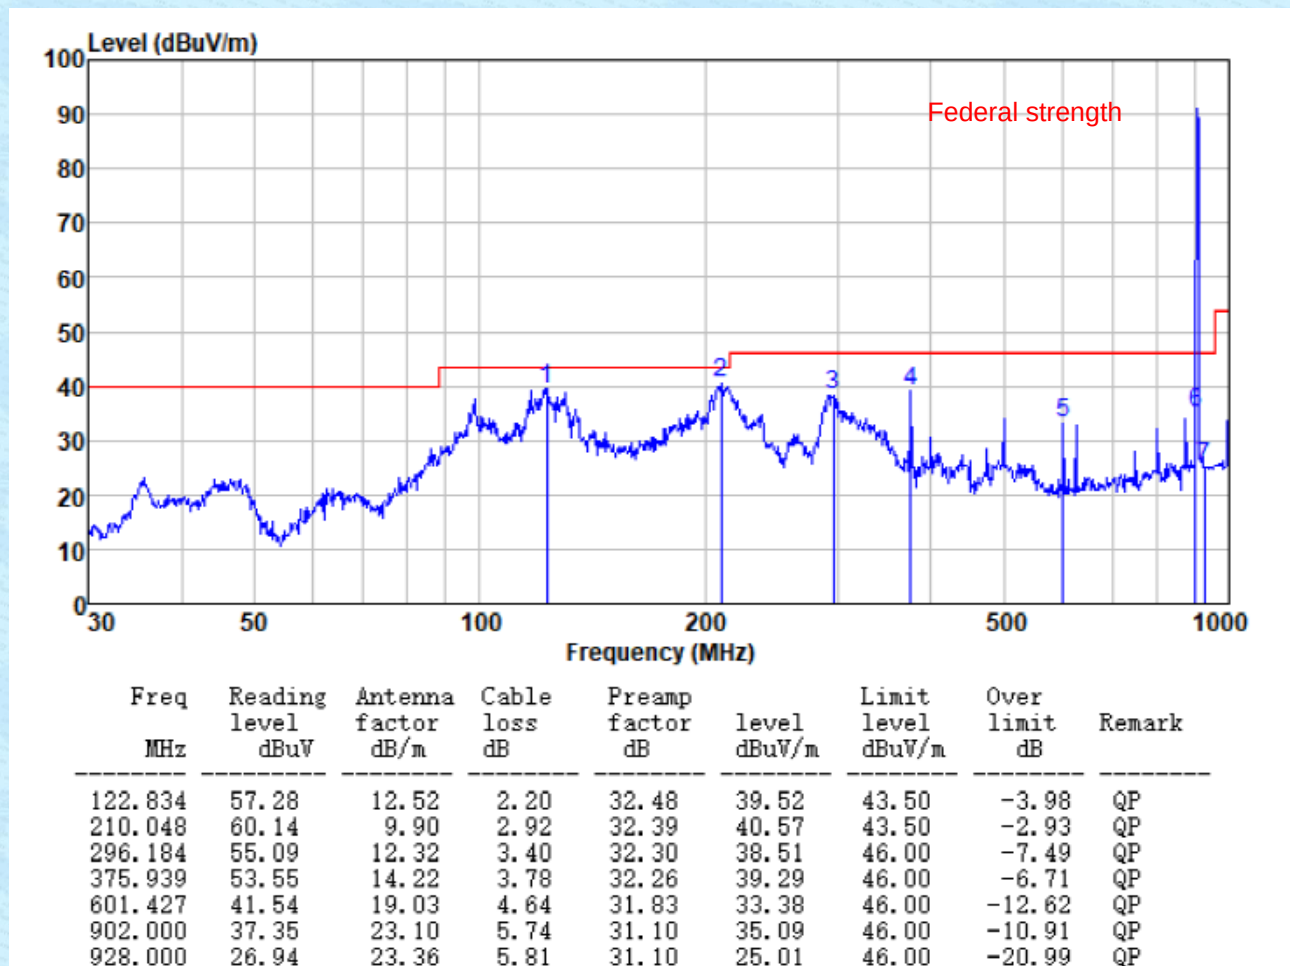


Test Frequency:	907MHz	Polarization:	Vertical
-----------------	--------	---------------	----------

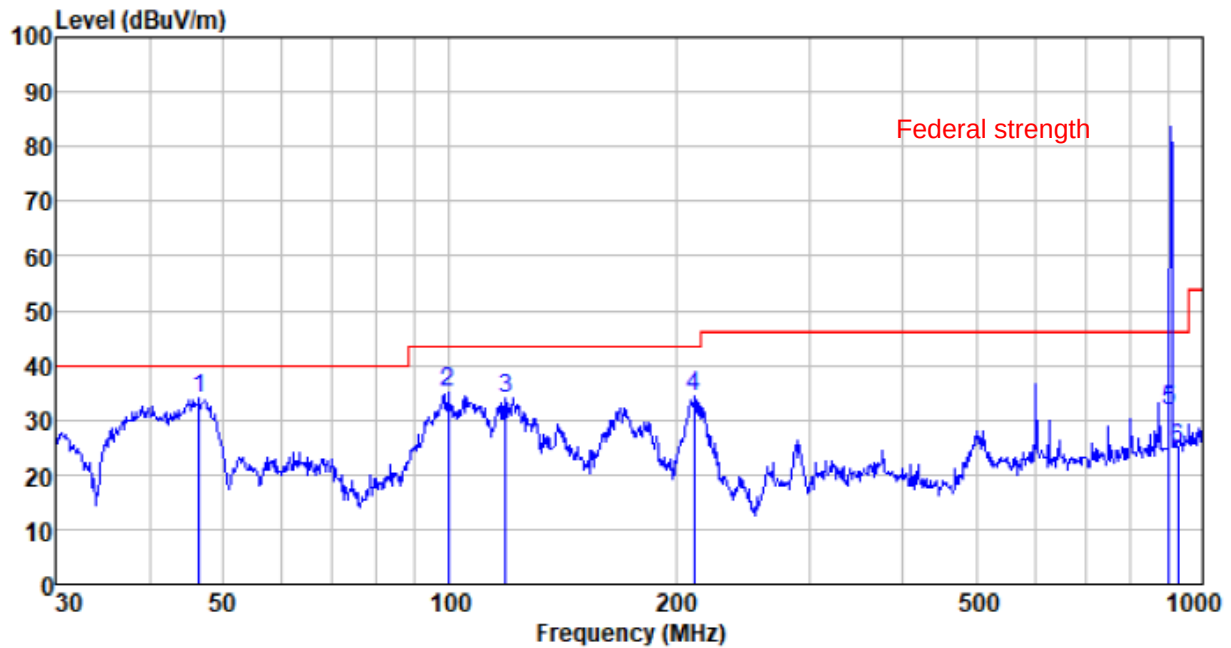


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
46.503	51.54	13.35	1.35	32.30	33.94	40.00	-6.06	QP
99.528	56.51	9.25	1.92	32.50	35.18	43.50	-8.32	QP
118.601	51.70	12.46	2.16	32.48	33.84	43.50	-9.66	QP
211.527	54.00	9.87	2.93	32.39	34.41	43.50	-9.09	QP
902.000	34.18	23.10	5.74	31.10	31.92	46.00	-14.08	QP
928.000	26.63	23.36	5.81	31.10	24.70	46.00	-21.30	QP

Test Frequency:	916MHz	Polarization:	Horizontal
-----------------	--------	---------------	------------

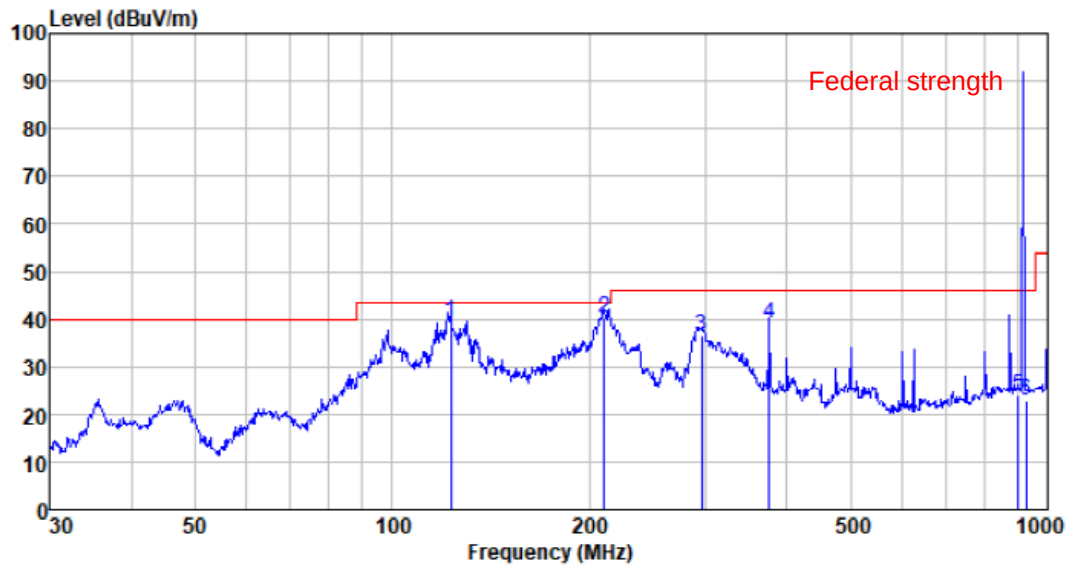


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
122.834	57.28	12.52	2.20	32.48	39.52	43.50	-3.98	QP
210.786	59.72	9.88	2.92	32.39	40.13	43.50	-3.37	QP
296.184	53.09	12.32	3.40	32.30	36.51	46.00	-9.49	QP
375.939	53.55	14.22	3.78	32.26	39.29	46.00	-6.71	QP
902.000	26.35	23.10	5.74	31.10	24.09	46.00	-21.91	QP
928.000	24.94	23.36	5.81	31.10	23.01	46.00	-22.99	QP

Test Frequency:	916MHz	Polarization:	Vertical
-----------------	--------	---------------	----------

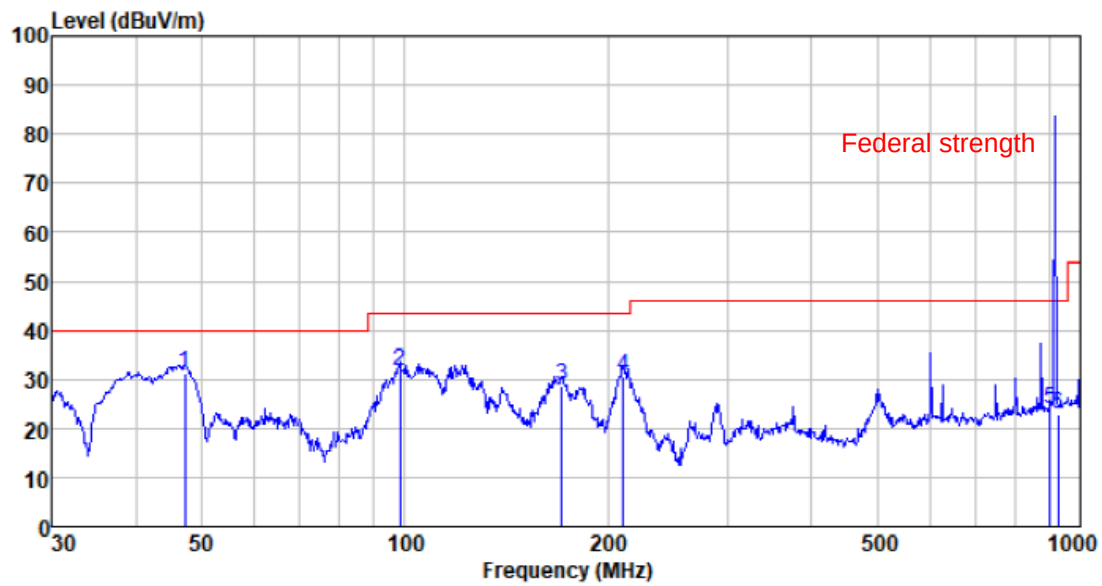


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
47.326	49.07	13.27	1.36	32.30	31.40	40.00	-8.60	QP
98.487	53.03	9.20	1.91	32.49	31.65	43.50	-11.85	QP
170.793	45.32	13.26	2.64	32.43	28.79	43.50	-14.71	QP
210.786	50.22	9.88	2.92	32.39	30.63	43.50	-12.87	QP
902.000	26.18	23.10	5.74	31.10	23.92	46.00	-22.08	QP
928.000	24.63	23.36	5.81	31.10	22.70	46.00	-23.30	QP

Test Frequency:	924MHz	Polarization:	Horizontal
-----------------	--------	---------------	------------

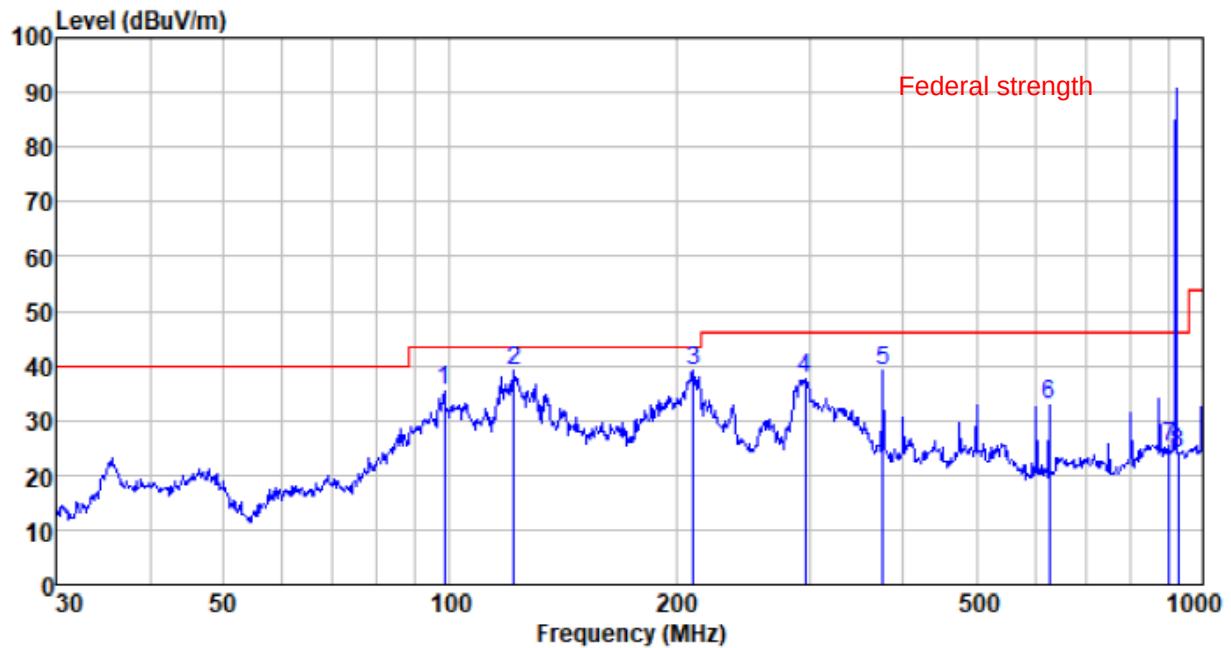

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
98.487	56.88	9.20	1.91	32.49	35.50	43.50	-8.00	QP
121.549	56.75	12.69	2.19	32.48	39.15	43.50	-4.35	QP
210.786	58.72	9.88	2.92	32.39	39.13	43.50	-4.37	QP
296.184	54.09	12.32	3.40	32.30	37.51	46.00	-8.49	QP
375.939	53.55	14.22	3.78	32.26	39.29	46.00	-6.71	QP
625.078	40.15	19.60	4.75	31.74	32.76	46.00	-13.24	QP
902.000	27.35	23.10	5.74	31.10	25.09	46.00	-20.91	QP
928.000	25.94	23.36	5.81	31.10	24.01	46.00	-21.99	QP


Test Frequency:	924MHz	Polarization:	Vertical
-----------------	--------	---------------	----------

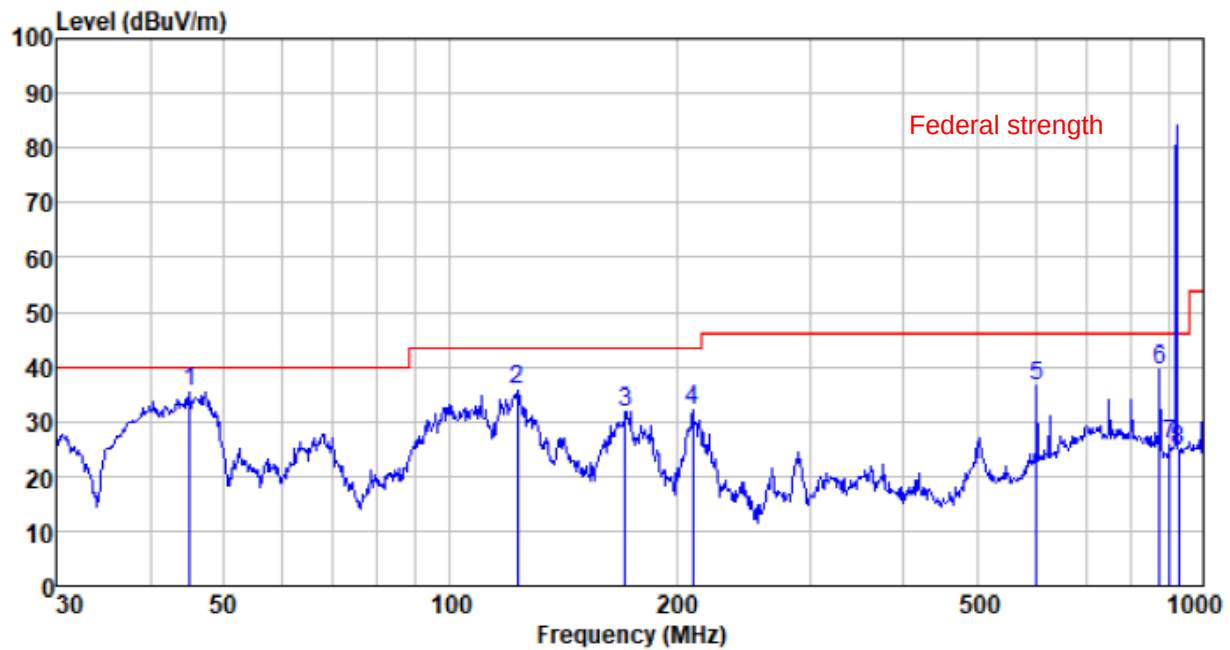

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
45.058	52.95	13.49	1.33	32.30	35.47	40.00	-4.53	QP
122.834	53.71	12.52	2.20	32.48	35.95	43.50	-7.55	QP
170.793	48.32	13.26	2.64	32.43	31.79	43.50	-11.71	QP
210.048	51.51	9.90	2.92	32.39	31.94	43.50	-11.56	QP
601.427	44.53	19.03	4.64	31.83	36.37	46.00	-9.63	QP
875.247	42.00	22.80	5.67	31.10	39.37	46.00	-6.63	QP
902.000	28.18	23.10	5.74	31.10	25.92	46.00	-20.08	QP
928.000	26.63	23.36	5.81	31.10	24.70	46.00	-21.30	QP


■ Above 1GHz

Test Frequency:	907MHz	Polarization:	Horizontal
-----------------	--------	---------------	------------

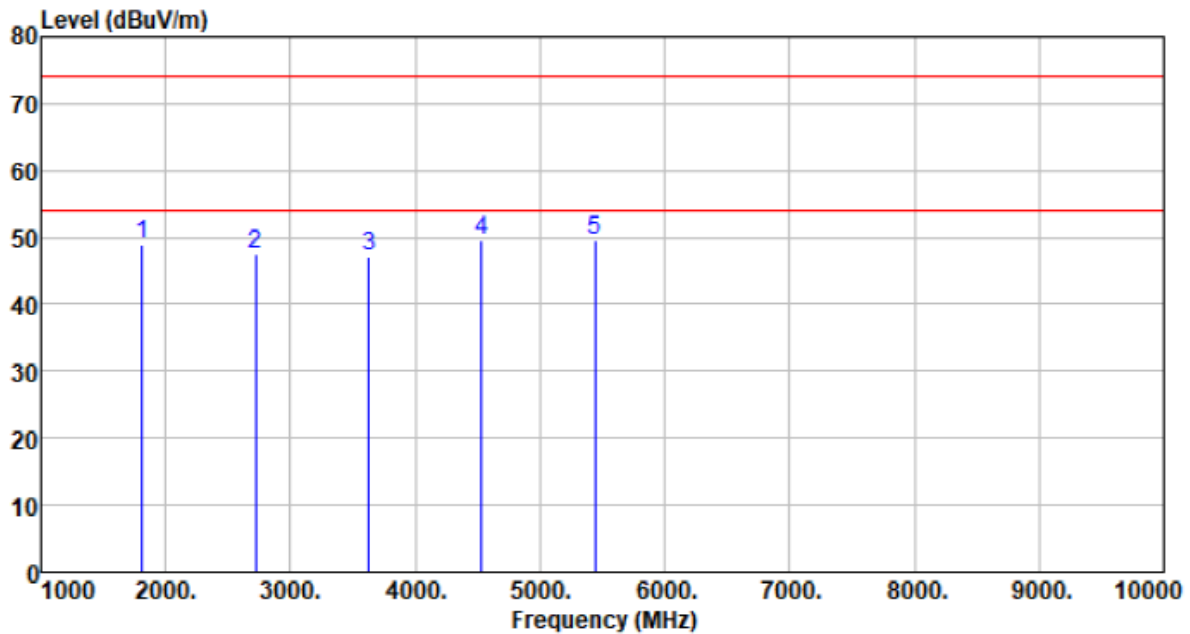


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1814.000	58.16	25.06	4.63	38.85	49.00	74.00	-25.00	Peak
2721.000	54.58	27.98	4.17	39.33	47.40	74.00	-26.60	Peak
3628.000	51.41	29.56	4.99	38.60	47.36	74.00	-26.64	Peak
4535.000	50.85	31.57	5.80	38.59	49.63	74.00	-24.37	Peak
5442.000	48.99	32.68	6.38	38.59	49.46	74.00	-24.54	Peak

Test Frequency:	907MHz	Polarization:	Vertical
-----------------	--------	---------------	----------

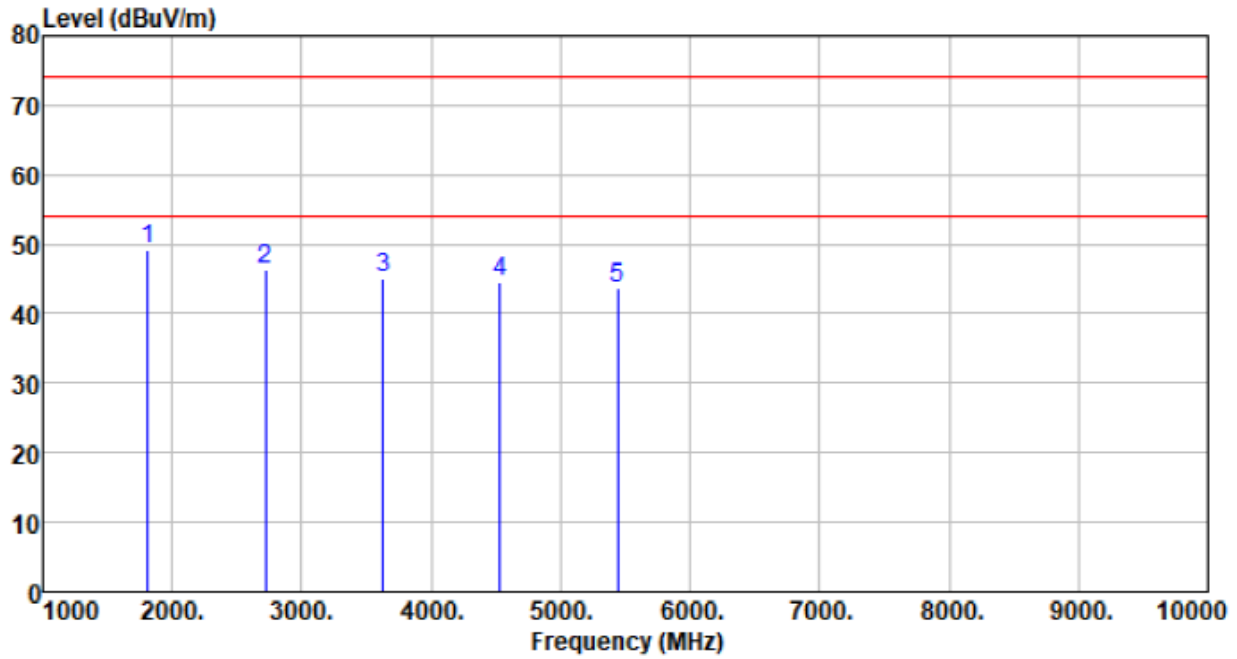


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1814.000	58.49	25.06	4.63	38.85	49.33	74.00	-24.67	Peak
2721.000	53.57	27.98	4.17	39.33	46.39	74.00	-27.61	Peak
3628.000	49.11	29.56	4.99	38.60	45.06	74.00	-28.94	Peak
4535.000	45.82	31.57	5.80	38.59	44.60	74.00	-29.40	Peak
5442.000	43.16	32.68	6.38	38.59	43.63	74.00	-30.37	Peak

Test Frequency:	916MHz	Polarization:	Horizontal
-----------------	--------	---------------	------------

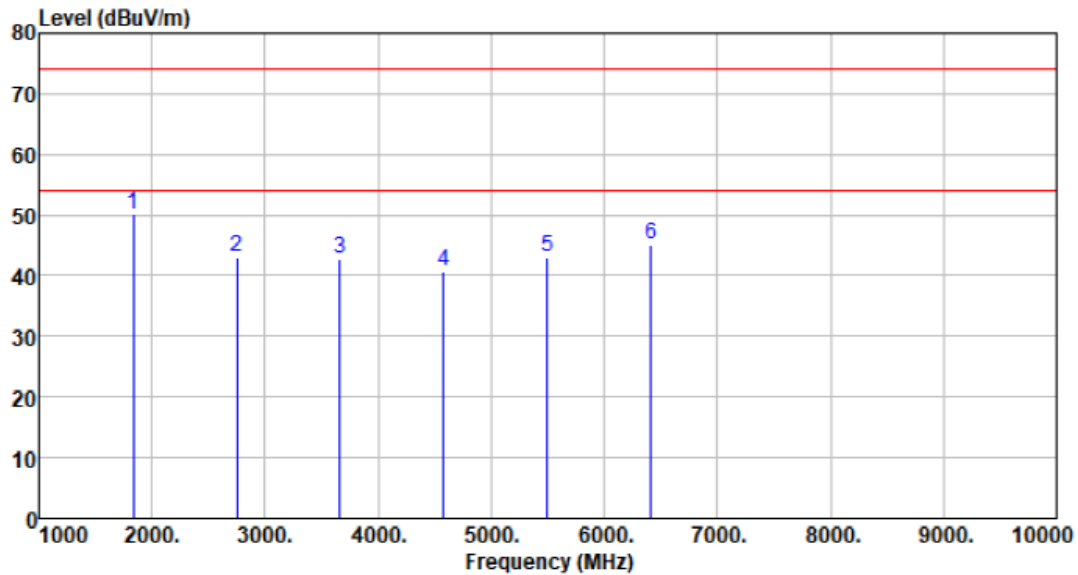


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1832.000	59.12	25.13	4.60	38.80	50.05	74.00	-23.95	Peak
2748.000	50.20	28.09	4.22	39.30	43.21	74.00	-30.79	Peak
3664.000	46.87	29.63	5.01	38.57	42.94	74.00	-31.06	Peak
4580.000	41.77	31.66	5.88	38.58	40.73	74.00	-33.27	Peak
5496.000	42.61	32.79	6.42	38.60	43.22	74.00	-30.78	Peak
6412.000	42.40	34.35	7.40	38.94	45.21	74.00	-28.79	Peak

Test Frequency:	916MHz	Polarization:	Vertical
-----------------	--------	---------------	----------

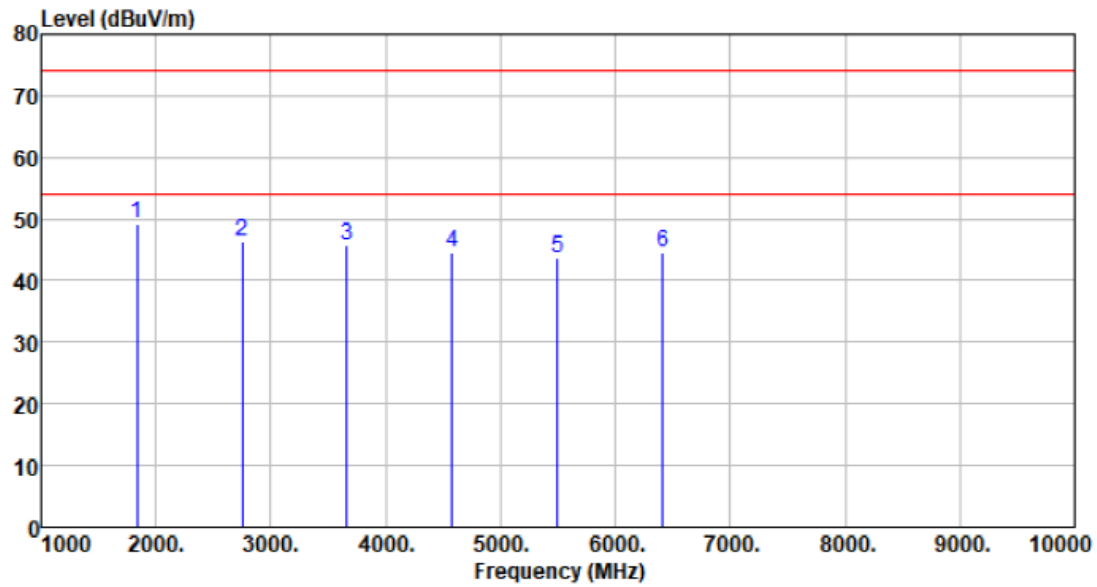


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1832.000	58.28	25.13	4.60	38.80	49.21	74.00	-24.79	Peak
2748.000	53.32	28.09	4.22	39.30	46.33	74.00	-27.67	Peak
3664.000	49.73	29.63	5.01	38.57	45.80	74.00	-28.20	Peak
4580.000	45.65	31.66	5.88	38.58	44.61	74.00	-29.39	Peak
5496.000	43.18	32.79	6.42	38.60	43.79	74.00	-30.21	Peak
6412.000	41.91	34.35	7.40	38.94	44.72	74.00	-29.28	Peak

Test Frequency:	924MHz	Polarization:	Horizontal
-----------------	--------	---------------	------------

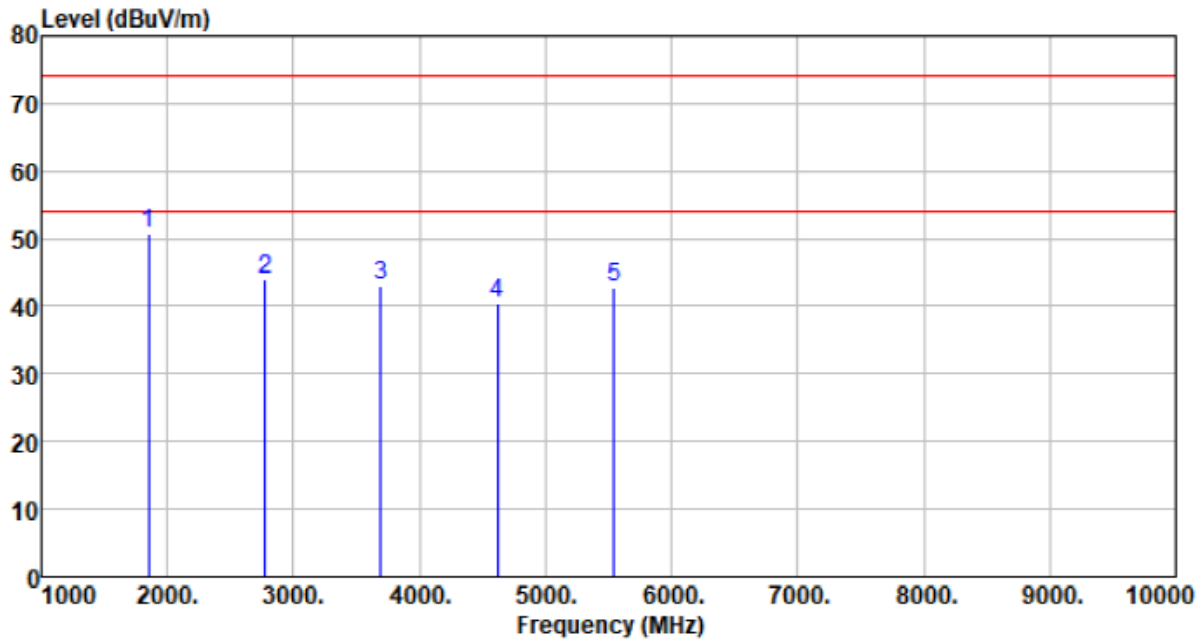

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1848.000	59.77	25.19	4.57	38.76	50.77	74.00	-23.23	Peak
2772.000	50.92	28.19	4.27	39.27	44.11	74.00	-29.89	Peak
3696.000	46.83	29.69	5.03	38.54	43.01	74.00	-30.99	Peak
4620.000	41.26	31.74	5.92	38.58	40.34	74.00	-33.66	Peak
5544.000	42.16	32.89	6.46	38.63	42.88	74.00	-31.12	Peak

Test Frequency:	924MHz	Polarization:	Vertical
-----------------	--------	---------------	----------

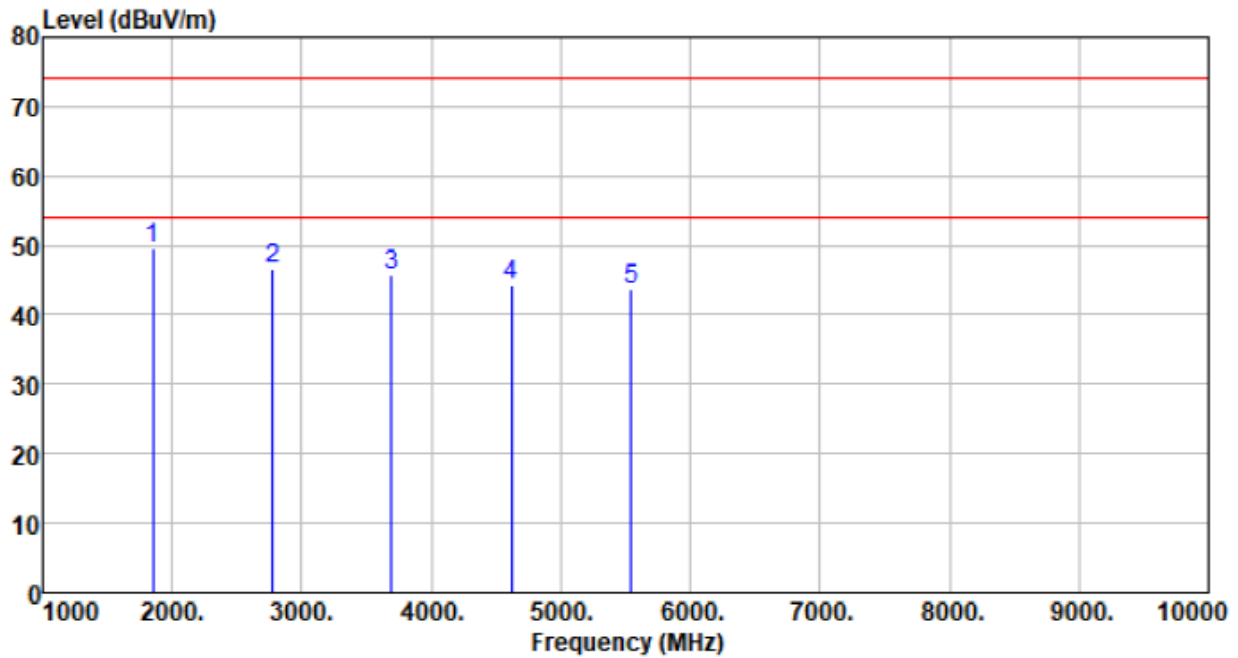


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1848.000	58.69	25.19	4.57	38.76	49.69	74.00	-24.31	Peak
2772.000	53.46	28.19	4.27	39.27	46.65	74.00	-27.35	Peak
3696.000	49.71	29.69	5.03	38.54	45.89	74.00	-28.11	Peak
4620.000	45.32	31.74	5.92	38.58	44.40	74.00	-29.60	Peak
5544.000	43.06	32.89	6.46	38.63	43.78	74.00	-30.22	Peak

Remarks:

1. Final Level (dBuV/m) = Reading level (dBuV)+ Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Factor (dB)

7.3 20dB Occupy Bandwidth

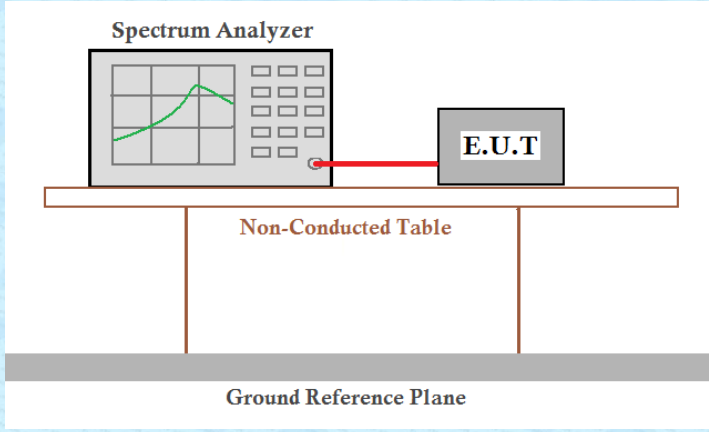
Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2020
Limit:	Operation Frequency range 902MHz~928MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


ANT 1

Test Frequency	20dB bandwidth(kHz)	Result
907MHz	163.2	Pass
916MHz	163.4	Pass
924MHz	163.0	Pass


Test plot as follows:

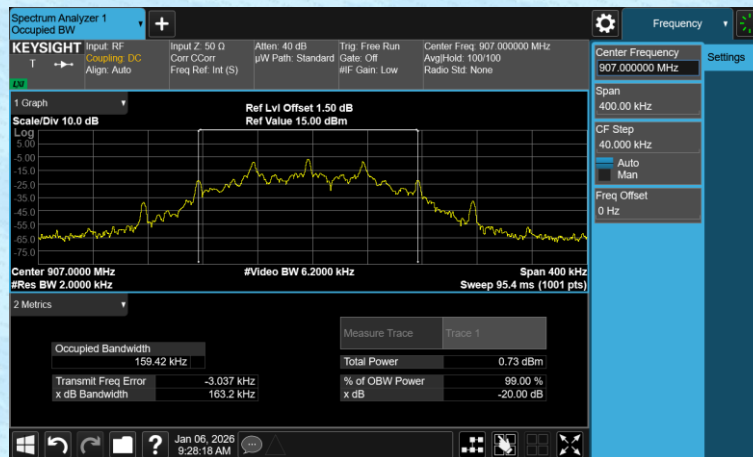

907MHz

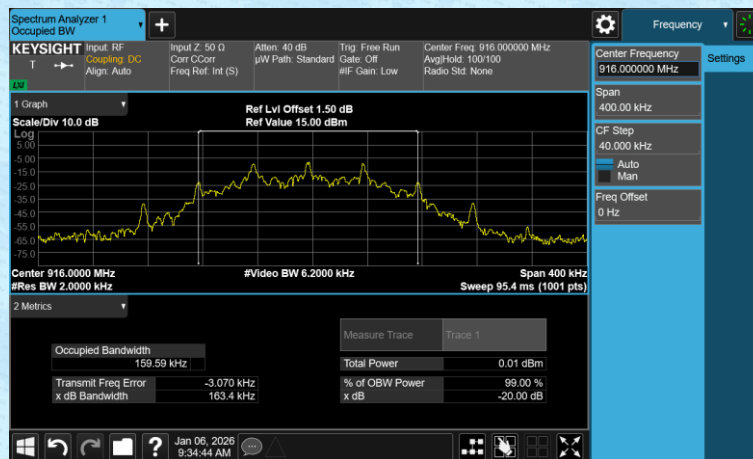

916MHz

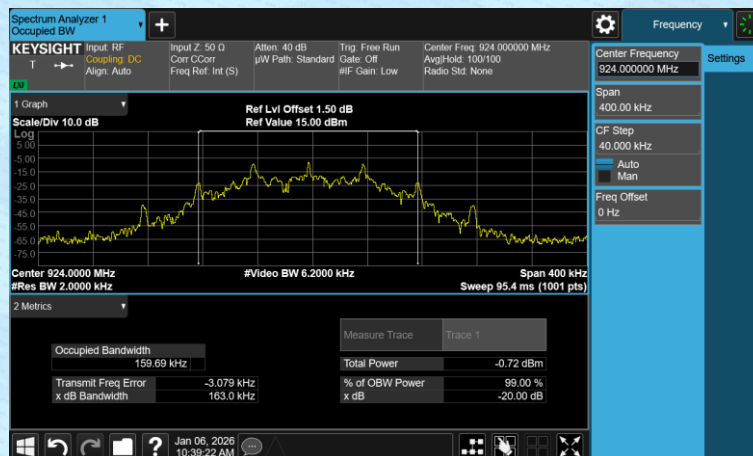


924MHz


ANT 2

Test Frequency	20dB bandwidth(kHz)	Result
907MHz	162.4	Pass
916MHz	162.8	Pass
924MHz	163.1	Pass


Test plot as follows:

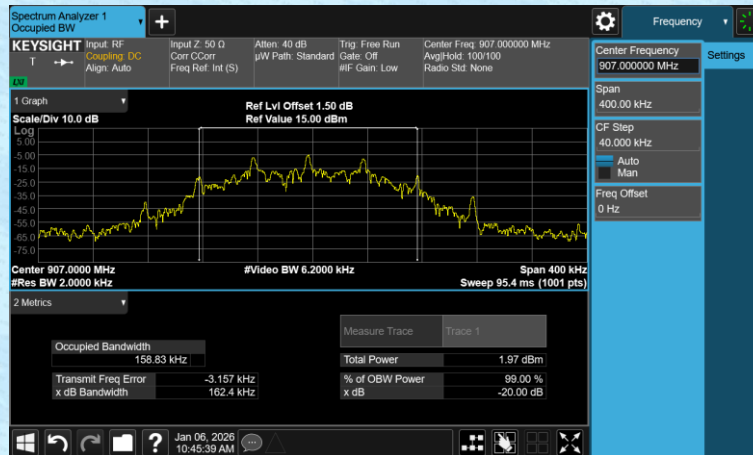

907MHz

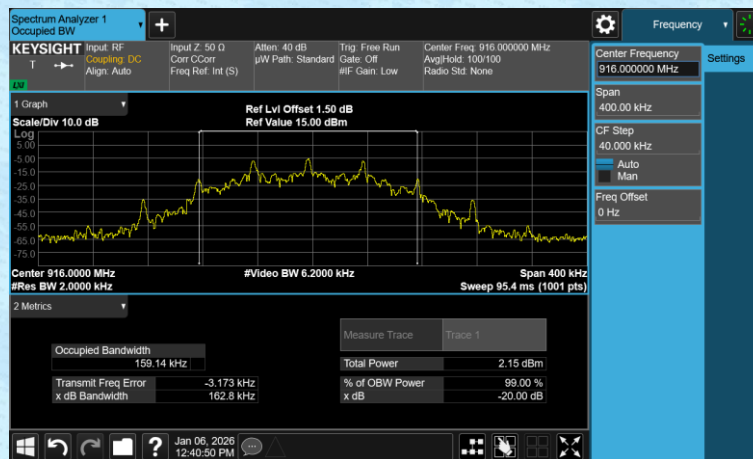

916MHz

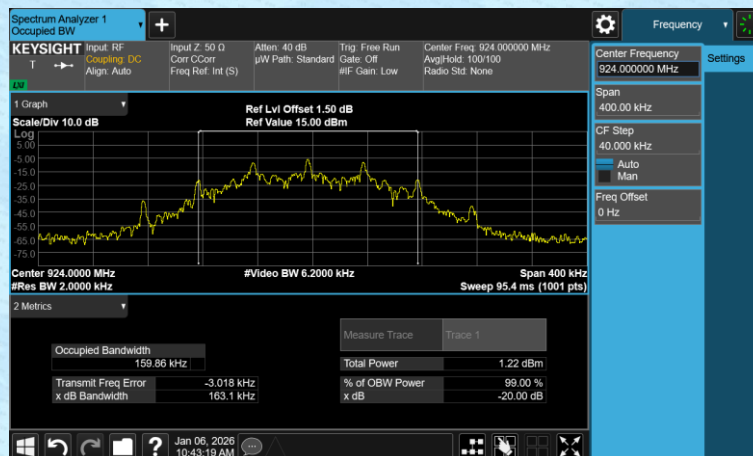

924MHz

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----