

A

B

C

D

E

F

A

B

C

D

E

F

<DETAIL : SERIAL-SEAL-PRODUCT>

2D BARCODE
(DATA MATRIX)







Production month 2026-08
26070060001

PRODUCTION YEAR CODE : 2DIGIT
生産年 : 2桁 2026 = 26

SERIAL CODE : 4 DIGIT
シリアルコード : 4桁
製品ごとの番号管理は行わず、常に通し番号で生産

PRODUCTION WEEK CODE : 2DIGIT
生産週 : 2桁 2026/2/12 = 7


MODEL CODE : 3DIGIT
ATW-R1220 : 006

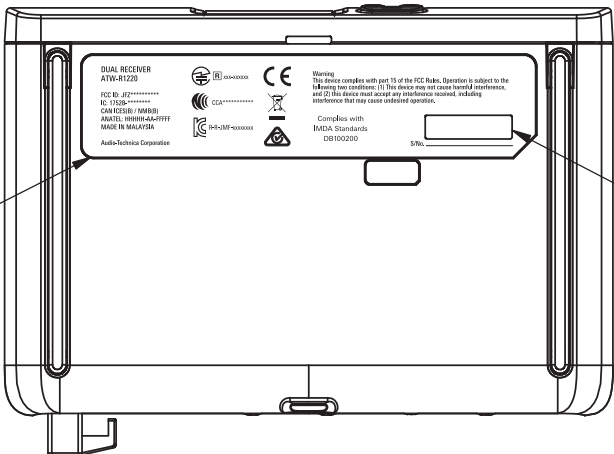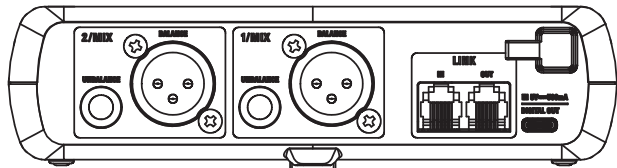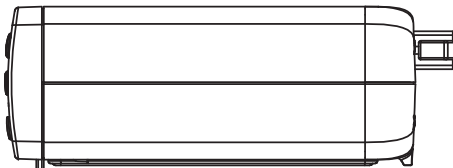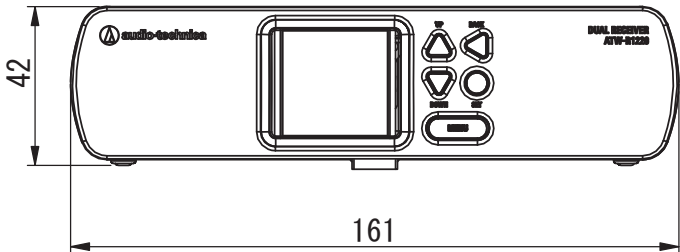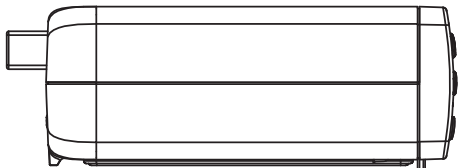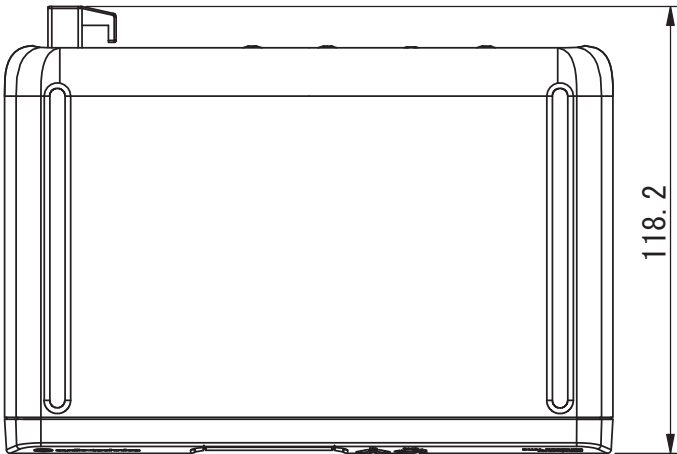

LABEL_MODEL_R1220

SERIAL-SEAL-PRODUCT

重量:269g

				Tolerances for broken edges and angular dimensions: JIS B 0405-m				
				TOLERANCE CLASS		MEDIUM	MATERIAL	MATERIAL SIZE
				CLASSIFICATION OF BASIC DIMENSIONS			FINISH	SUMMARY
				D ≤ 6		±0.1		
				6 < D ≤ 30		±0.2		
				30 < D ≤ 120		±0.3		
				120 < D ≤ 400		±0.5		
A	rin_sato	26/08/21	Release the first edition		400 < D ≤ 1000		±0.8	
REV.	NAME	DATE	DESCRIPTION					
		NAME	DATE	SCALE	1 : 2	MODEL NAME		PART NAME
DESIGNED				UNIT	mm	ATW-R1220		ATW-R1220_ASSY
DRAWN				SHEET	1 of 1	CONFIDENTIAL		PCODE
CHECKED						 audio-technica		REV.
APPROVED								231701420