
COMPLIANCE DOCUMENT
AGENCY CE, IC, FCC, RCM
CHANGING THIS DOCUMENT MAY AFFECT AGENCY APPROVAL AND/OR TECHNICAL FILE.
SEE GRACO ENGINEERING STD.2.7001. 318-163

NUMBER **130881**


PARTS LIST

ITEM	PART NO.	QTY	UNIT

RIGHT SIDE

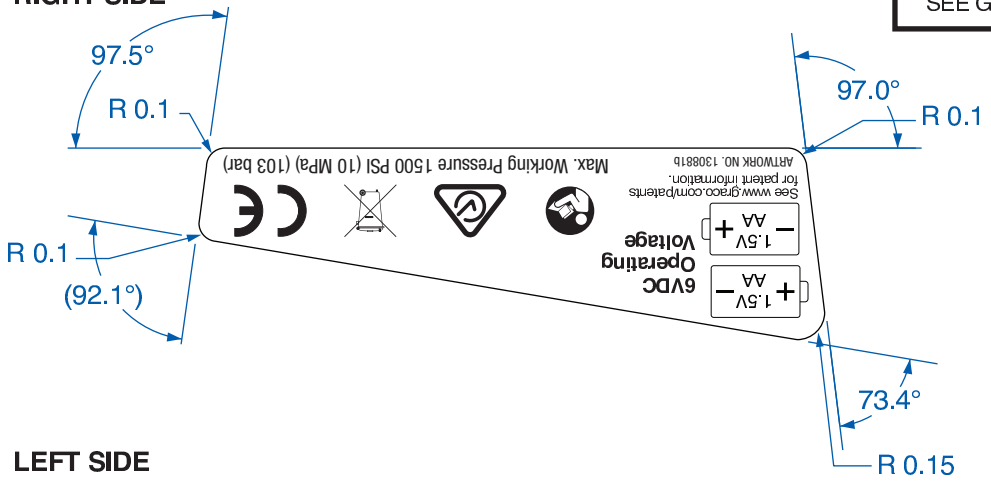

LEFT SIDE

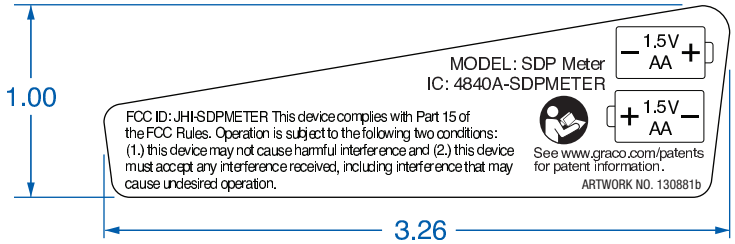

NOTES:

MATERIAL: .002″ matte silver polyester with .001″ clear polyester lamination.

ADHESIVE: Permanent pressure sensitive adhesive

APPLICATION: Die Cast Aluminum

EXPOSURE: Indoor/Outdoor

TEMPERATURE RANGE: 4˚ C (158˚ F) Max
-70˚ C (-15˚ F) Min

MUST BE ROHS COMPLIANT.

MUST BE CSA CERTIFIED.

COLOR KEY

1 Black

INCH: ASME Y14 5M

ADOBE ILLUSTRATOR-DWG

LTR	DESCRIPTION	ECO	DATE
B	REMOVE WORD “CONTAINS”	Z132630	5/6/19
A	RELEASED L141M	Z130858	4/10/19

REVISIONS

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN MILLIMETERS
SILICONE-FREE STD 4.1208
DIM & TOL STD 1.0402 & ASME Y 14.5M-1994
TOLERANCES: SEE GRACO STANDARDS
CENTERLINE VARIANCE STD 1.0406
HOLES STD 1.0407
SHEET METAL STD 4.0100
PLATED & HT TR PARTS STD 1.0409
BURRS & EDGES STD 1.0420
THREADS STD 1.0425
SURFACE ROUGHNESS STD 1.0445

DECIMALS .X ± .03 .XX ± .01 .XXX ± .005 ANGLES ± 1/2°

SCALE 1/1

DESIGNER NAME S.ROLF

DATE 4/10/19

ENGINEER NAME M.BAUCK

MATERIAL SEE NOTES

SPEC. NO.

FINISH

SPEC. NO.

THIS DRAWING SHALL BE USED ONLY AS SPECIFIED BY GRACO. ANY OTHER USE, REPRODUCTION OR DISCLOSURE TO OTHERS WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TITLE

LABEL, METER APPROVAL

SIZE	SHEET	NUMBER	SERIES
A	1 OF 1	130881	