

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBDBG-WTW-P22120773C
FCC ID: JNZMR0097
Product: Wireless Mouse
Brand: logitech G, G
Model No.: MR0097
Received Date: 2025/9/3
Test Date: 2025/9/11 ~ 2025/9/15
Issued Date: 2025/10/2
Applicant: Logitech Far East Ltd.
Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____, **Date:** 2025/10/2
May Chen / Manager

This test report consists of 31 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by: Vito Lung / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description	6
3.2 Antenna Description of EUT	7
3.3 Channel List	8
3.4 Test Mode Applicability and Tested Channel Detail	9
3.5 Duty Cycle of Test Signal	10
3.6 Test Program Used and Operation Descriptions	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
3.8 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 RF Output Power	12
4.2 AC Power Conducted Emissions	12
4.3 Unwanted Emissions below 1 GHz	13
4.4 Unwanted Emissions above 1 GHz	13
5 Limits of Test Items.....	14
5.1 RF Output Power	14
5.2 AC Power Conducted Emissions	14
5.3 Unwanted Emissions below 1 GHz	14
5.4 Unwanted Emissions above 1 GHz	14
6 Test Arrangements	15
6.1 RF Output Power	15
6.1.1 Test Setup	15
6.1.2 Test Procedure	15
6.2 AC Power Conducted Emissions	16
6.2.1 Test Setup	16
6.2.2 Test Procedure	16
6.3 Unwanted Emissions below 1 GHz	17
6.3.1 Test Setup	17
6.3.2 Test Procedure	18
6.4 Unwanted Emissions above 1 GHz	19
6.4.1 Test Setup	19
6.4.2 Test Procedure	19
7 Test Results of Test Item	20
7.1 RF Output Power	20
7.2 AC Power Conducted Emissions	21
7.3 Unwanted Emissions below 1 GHz	23
7.4 Unwanted Emissions above 1 GHz	25
8 Pictures of Test Arrangements	30
9 Information of the Testing Laboratories	31

Release Control Record

Issue No.	Description	Date Issued
RFBDKG-WTW-P22120773C	Original release.	2025/10/2

1 Certificate

Product: Wireless Mouse

Brand: logitech G, G

Test Model: MR0097

Sample Status: Engineering sample

Applicant: Logitech Far East Ltd.

Test Date: 2025/9/11 ~ 2025/9/15

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2020

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	NA	Refer to Note 1 below
15.247(a)(2)	6 dB Bandwidth	NA	Refer to Note 1 below
15.247(d)	Conducted Out of Band Emissions	NA	Refer to Note 1 below
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -17.43 dB at 0.58359 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.5 dB at 32.64 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -7.5 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes:

1. RF Output Power, AC Power Conducted Emissions and Unwanted Emissions test items were performed for this addendum. The others testing data refer to original test report.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Wireless Mouse
Brand	logitech G, G
Test Model	MR0097
Status of EUT	Engineering sample
Power Supply Rating	5 Vdc from USB interface or 3.8 Vdc from battery
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	2 Mbps
Operating Frequency	2.403 GHz ~ 2.479 GHz
Number of Channel	77
Output Power	2.78 mW (4.44 dBm)
Accessory	USB to Type C cable x 1 (Shielded with one core, 1.85 m)

Note:

- This report is prepared for FCC Class II permissive change. The difference compared with the Report No.: RFBDBG-WTW-P22120773B design is as the following information:
 - ◆ Upgraded standard version.
 - ◆ Add New Main Board.
 - ◆ Battery 1 Change Factory name (Springpower to Highpower).
 - ◆ Add Highpower VN battery.
- According to above conditions, there are RF Output Power, AC Power Conducted Emissions and Unwanted Emissions needs to be performed. All data for meeting the requirement is verified.
- The EUT may have a lot of colors for marketing requirement.
- The EUT must be supplied with rechargeable battery as the following table:

Original			
Item	Brand	Model	Specification
Battery 1	Highpower	533-000229 or 521730	Power Rating: 290mAh, 1.102Wh, 3.8Vdc
Battery 2	SYNergy ScienTech Corp.	533-000228 or AHB521630HPJT	Power Rating: 290mAh, 1.102Wh, 3.8Vdc
Newly			
Battery 3	Highpower (VIETNAM EXQUISITE Power)	521730	Power Rating: 290mAh, 1.102Wh, 3.8Vdc

- The EUT SKU information as following table:

Original		
SKU No.	Difference	Remark
1	NA	Old Main Board. (With battery 1 and 2)
Newly		
2	Main Board change non-RF related	New Main Board. (With battery 1, 2 and battery 3)

Note: From the above SKUs: **SKU2** was selected as representative model for the test and its data was recorded in this report.

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
3.02	2.4~2.4835	PIFA	none

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.3 Channel List

77 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460		
19	2421	39	2441	59	2461		
20	2422	40	2442	60	2462		

3.4 Test Mode Applicability and Tested Channel Detail

Following channel(s) was (were) selected for the final test as listed below:


Test Item	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	1, 40, 77	GFSK	2Mb/s
AC Power Conducted Emissions	40	GFSK	2Mb/s
Unwanted Emissions below 1 GHz	40	GFSK	2Mb/s
Unwanted Emissions above 1 GHz	1, 40, 77	GFSK	2Mb/s

Note:

1. The new battery (NO.3) was selected as representative for the report.
2. In the original report:
3. For Unwanted emission& AC conducted item the worst case of power supply: Power from Adapter (Incl. Battery)

3.5 Duty Cycle of Test Signal

GFSK: Duty cycle = 100 ms / 100 ms x 100% = 100.0%

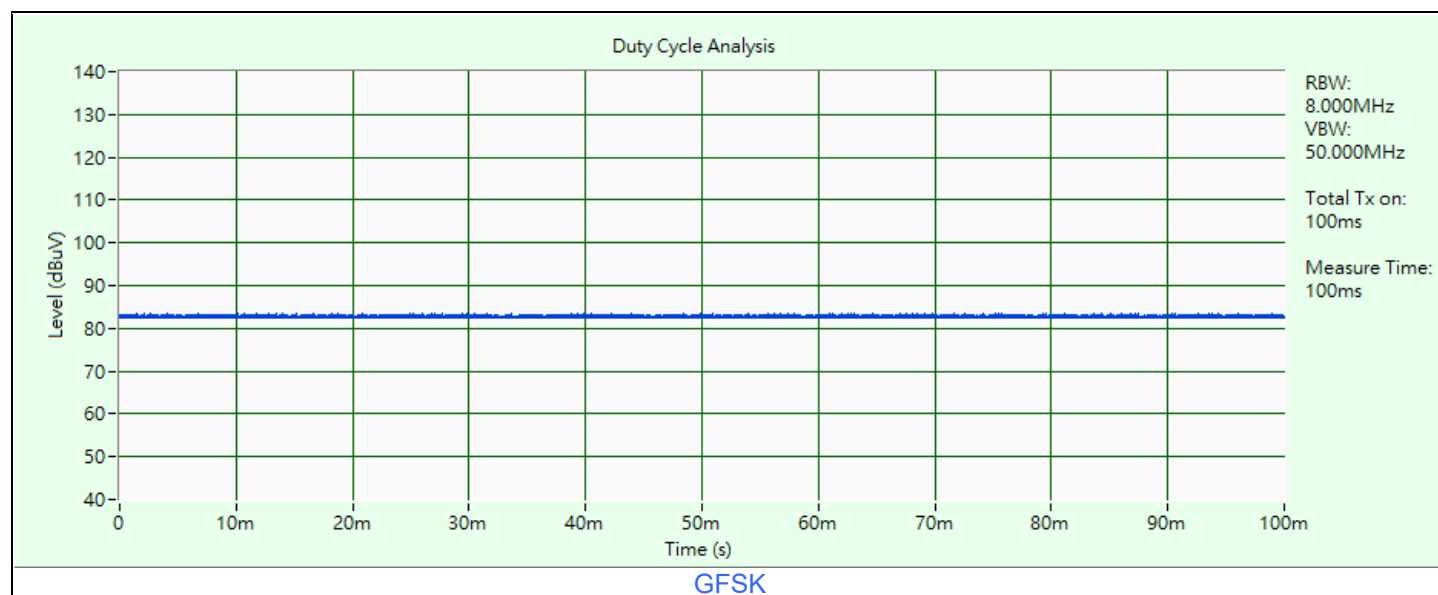


Note: The duty cycle is an operation in the highest to represent the worst case.

3.6 Test Program Used and Operation Descriptions

Controlling software (RF Sample with Receiver [Number Lock]) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

Test Item	Operation Description
RF Output Power / Unwanted Emissions above 1 GHz	LS2 TX Modulated 2403MHz LS2 TX Modulated 2442MHz LS2 TX Modulated 2479MHz
AC Power Conducted Emissions	LS2 TX Modulated 2442MHz
Unwanted Emissions below 1 GHz	LS2 TX Modulated 2442MHz

3.7 Connection Diagram of EUT and Peripheral Devices

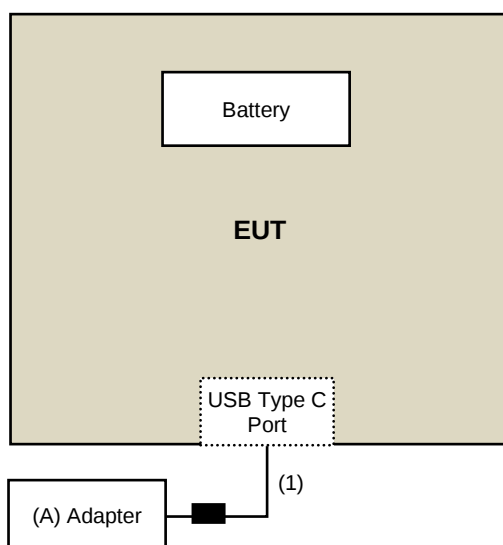

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Aadpter	ASUS	EXA1205UA	N/A	N/A	Provided by Lab
B	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB to Type C cable	1	1.85	Yes	1	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2025/5/23	2026/5/22
Pulse Power Sensor Anritsu	MA2411B	1726434	2025/6/3	2026/6/2
RF Power Meter Anritsu	ML2495A	1529002	2025/6/3	2026/6/2

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/9/11

4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2024/11/1	2025/10/31
EMI Test Receiver R&S	ESCS 30	100375	2025/5/21	2026/5/20
Fixed Attenuator STI	STI02-2200-10	005	2025/2/17	2026/2/16
LISN R&S	ESH3-Z5	835239/001	2025/3/27	2026/3/26
		848773/004	2024/10/7	2025/10/6
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2025/2/17	2026/2/16
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2025/9/15

4.3 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-0842	2024/10/8	2025/10/7
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR7	102026	2025/3/25	2026/3/24
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2025/3/29	2026/3/28
Loop Antenna TESEQ	HLA 6121	63620	2024/10/17	2025/10/16
Preamplifier EMCI	EMC330N	980538	2025/3/29	2026/3/28
	EMC001340	980142	2025/2/17	2026/2/16
PXA Signal Analyzer Keysight	N9030B	MY57141948	2025/5/20	2026/5/19
RF Coaxial Cable PEWC	8D	966-5-1	2025/3/29	2026/3/28
		966-5-2	2025/3/29	2026/3/28
		966-5-3	2025/3/29	2026/3/28
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2025/9/11

4.4 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR7	102026	2025/3/25	2026/3/24
Horn Antenna Schwarzbeck	BBHA 9170	9170-739	2024/11/10	2025/11/9
Preamplifier EMCI	EMC184045SE	980387	2025/8/7	2026/8/6
PXA Signal Analyzer Keysight	N9030B	MY57141948	2025/5/20	2026/5/19
RF Coaxial Cable EMCI	EMC102-KM-KM-1200	160924	2025/1/24	2026/1/23
	EMC102-KM-KM-4000	200214	2025/1/24	2026/1/23
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2025/9/15

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

5.2 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.3 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.4 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



6.1.2 Test Procedure

Peak Power:

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.


The power meter video bandwidth is greater than or equal to the DTS bandwidth and use a fast responding diode detector.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 AC Power Conducted Emissions

6.2.1 Test Setup

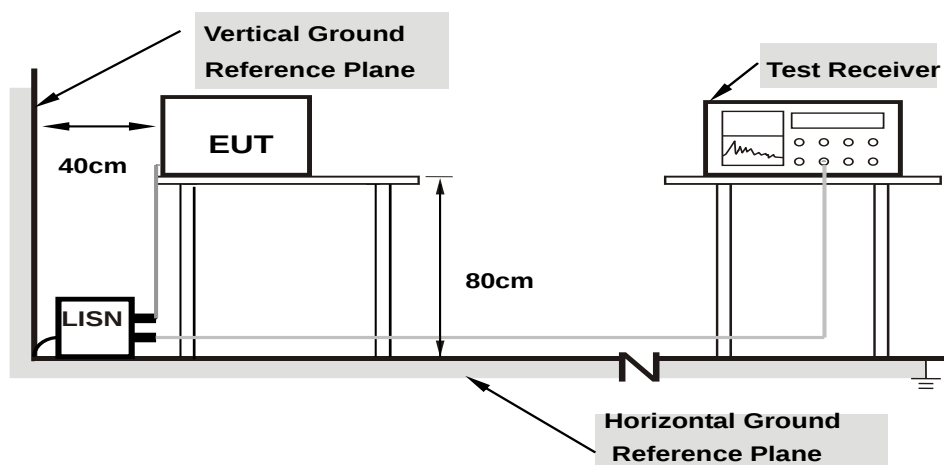

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.3 Unwanted Emissions below 1 GHz

6.3.1 Test Setup

For Radiated emission below 30 MHz

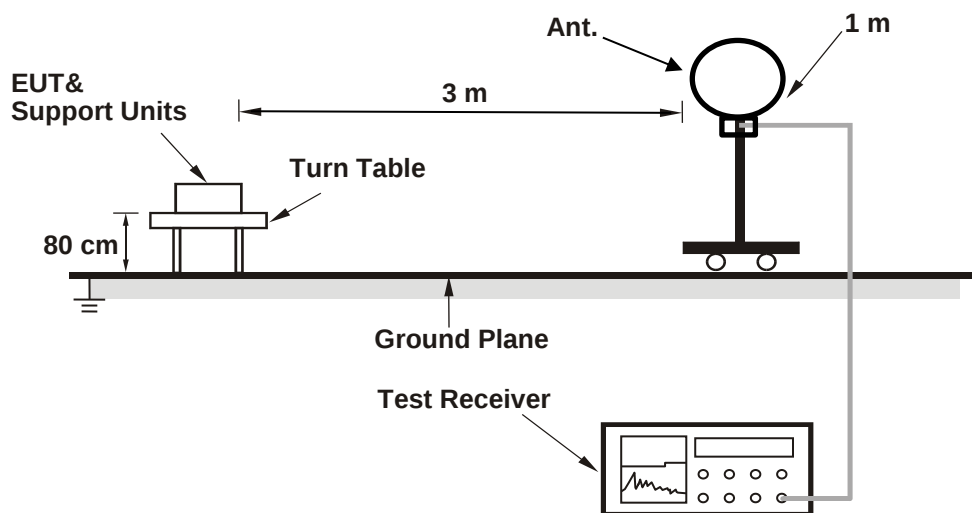

For Radiated emission above 30 MHz

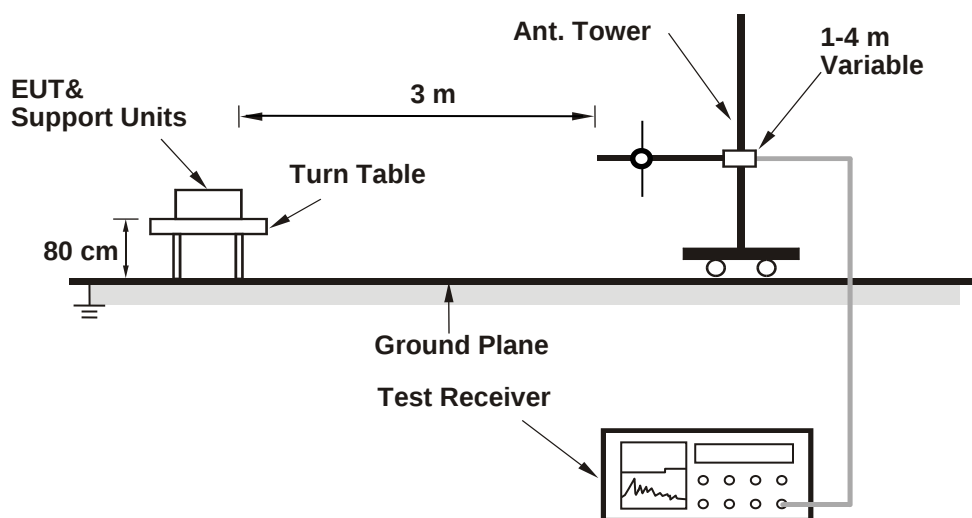

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.4 Unwanted Emissions above 1 GHz

6.4.1 Test Setup

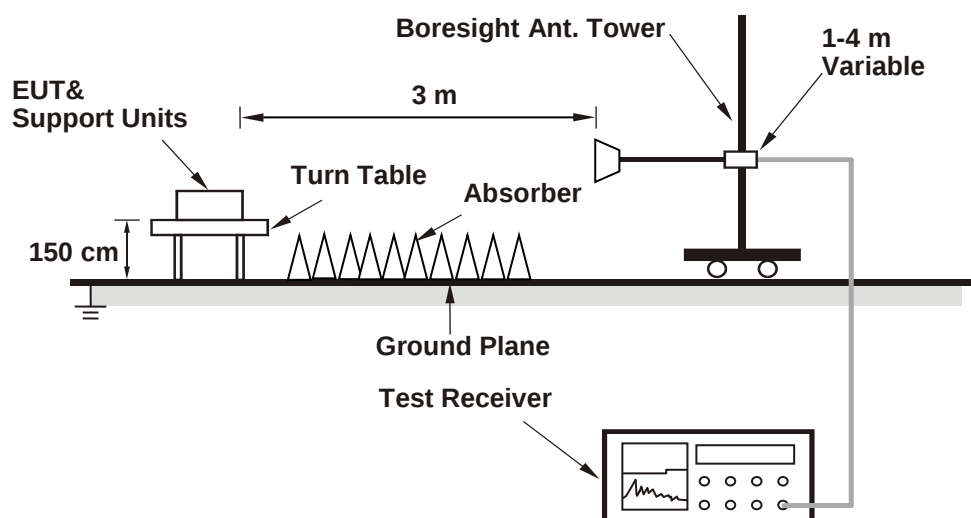

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver/spectrum analyzer was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
-
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.8 Vdc	Environmental Conditions:	24°C, 56% RH	Tested By:	Henry
--------------	---------	---------------------------	--------------	------------	-------

For Peak Power

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2403	2.729	4.36	30	Pass
40	2442	2.78	4.44	30	Pass
77	2479	2.636	4.21	30	Pass

Note: The antenna gain is 3.02 dBi <= 6 dBi, so the output power limit shall not be reduced.

For Average Power

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2403	2.71	4.33
40	2442	2.761	4.41
77	2479	2.618	4.18


7.2 AC Power Conducted Emissions

RF Mode	GFSK	Channel	CH 40 : 2442 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 66% RH
Tested By	Roy Mai		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	9.97	24.56	4.52	34.53	14.49	65.18	55.18	-30.65	-40.69
2	0.29844	9.99	25.66	3.76	35.65	13.75	60.29	50.29	-24.64	-36.54
3	0.58359	10.00	28.57	10.24	38.57	20.24	56.00	46.00	-17.43	-25.76
4	0.90000	10.02	27.60	9.99	37.62	20.01	56.00	46.00	-18.38	-25.99
5	5.45313	10.25	10.50	0.03	20.75	10.28	60.00	50.00	-39.25	-39.72
6	12.52344	10.58	12.30	2.23	22.88	12.81	60.00	50.00	-37.12	-37.19

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

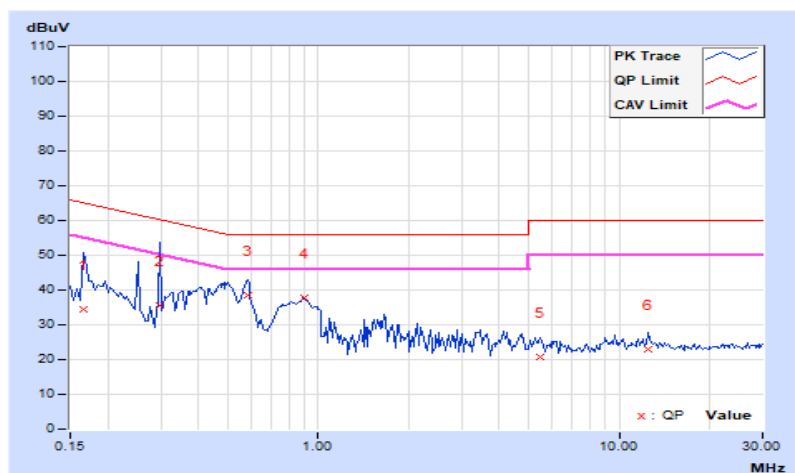


RF Mode	GFSK	Channel	CH 40 : 2442 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 66% RH
Tested By	Roy Mai		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.01	25.80	4.74	35.81	14.75	65.58	55.58	-29.77	-40.83
2	0.33359	10.01	18.83	1.30	28.84	11.31	59.36	49.36	-30.52	-38.05
3	0.38438	10.00	17.33	1.34	27.33	11.34	58.18	48.18	-30.85	-36.84
4	0.50938	10.01	18.41	1.62	28.42	11.63	56.00	46.00	-27.58	-34.37
5	0.94297	10.05	12.06	-3.88	22.11	6.17	56.00	46.00	-33.89	-39.83
6	13.35547	10.54	3.33	-6.57	13.87	3.97	60.00	50.00	-46.13	-46.03

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

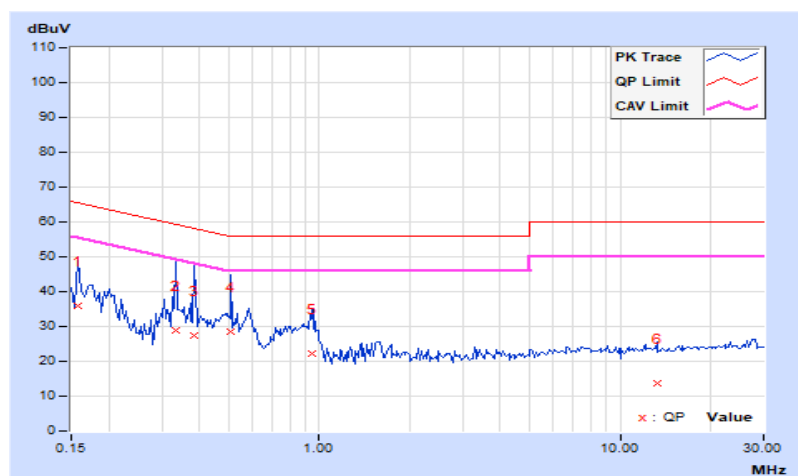


7.3 Unwanted Emissions below 1 GHz

RF Mode	GFSK	Channel	CH 40 : 2442 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.55	25.2 QP	40.0	-14.8	1.50 H	360	38.8	-13.6
2	136.29	18.5 QP	43.5	-25.0	1.50 H	48	31.5	-13.0
3	385.38	21.6 QP	46.0	-24.4	2.00 H	2	30.9	-9.3
4	514.51	28.8 QP	46.0	-17.2	1.00 H	19	35.3	-6.5
5	729.35	30.6 QP	46.0	-15.4	1.00 H	98	32.9	-2.3
6	914.47	39.3 QP	46.0	-6.7	2.00 H	296	38.6	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

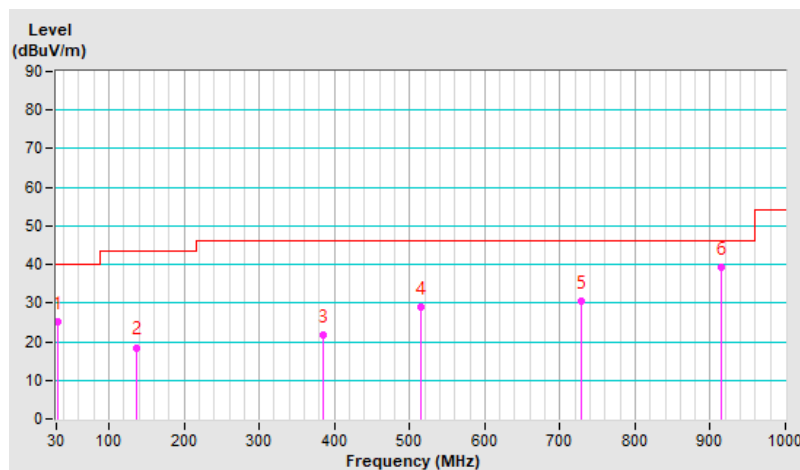


RF Mode	GFSK	Channel	CH 40 : 2442 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.64	35.5 QP	40.0	-4.5	2.00 V	1	49.2	-13.7
2	62.81	30.8 QP	40.0	-9.2	2.00 V	1	44.4	-13.6
3	140.87	19.8 QP	43.5	-23.7	2.00 V	108	32.5	-12.7
4	514.56	27.5 QP	46.0	-18.5	1.00 V	140	34.0	-6.5
5	729.39	31.9 QP	46.0	-14.1	1.50 V	104	34.2	-2.3
6	908.53	40.6 QP	46.0	-5.4	1.00 V	351	40.0	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

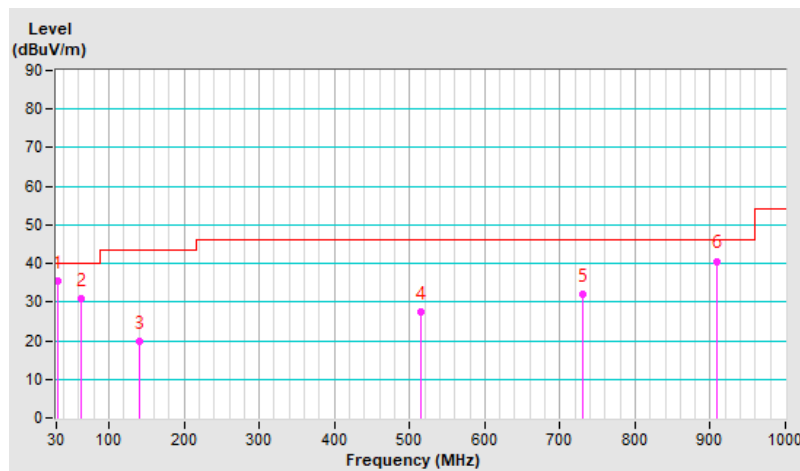

7.4 Unwanted Emissions above 1 GHz

RF Mode	GFSK	Channel	CH 1 : 2403 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.03 H	322	60.0	-3.1
2	2390.00	43.8 AV	54.0	-10.2	1.03 H	322	46.9	-3.1
3	*2403.00	102.9 PK			1.03 H	322	106.1	-3.2
4	*2403.00	101.3 AV			1.03 H	322	104.5	-3.2
5	4806.00	50.1 PK	74.0	-23.9	1.26 H	333	47.9	2.2
6	4806.00	41.9 AV	54.0	-12.1	1.26 H	333	39.7	2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	2.25 V	258	58.4	-3.1
2	2390.00	43.6 AV	54.0	-10.4	2.25 V	258	46.7	-3.1
3	*2403.00	95.7 PK			2.25 V	258	98.9	-3.2
4	*2403.00	93.7 AV			2.25 V	258	96.9	-3.2
5	4806.00	48.9 PK	74.0	-25.1	3.26 V	146	46.7	2.2
6	4806.00	40.5 AV	54.0	-13.5	3.26 V	146	38.3	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	GFSK	Channel	CH 40 : 2442 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2442.00	103.5 PK			1.20 H	320	106.8	-3.3
2	*2442.00	101.9 AV			1.20 H	320	105.2	-3.3
3	4884.00	51.7 PK	74.0	-22.3	2.51 H	150	49.6	2.1
4	4884.00	41.3 AV	54.0	-12.7	2.51 H	150	39.2	2.1
5	7326.00	49.8 PK	74.0	-24.2	1.06 H	344	42.4	7.4
6	7326.00	40.2 AV	54.0	-13.8	1.06 H	344	32.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2442.00	99.0 PK			3.23 V	68	102.3	-3.3
2	*2442.00	97.3 AV			3.23 V	68	100.6	-3.3
3	4884.00	47.5 PK	74.0	-26.5	1.58 V	255	45.4	2.1
4	4884.00	39.5 AV	54.0	-14.5	1.58 V	255	37.4	2.1
5	7326.00	45.7 PK	74.0	-28.3	1.97 V	343	38.3	7.4
6	7326.00	38.4 AV	54.0	-15.6	1.97 V	343	31.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	GFSK	Channel	CH 77 : 2479 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Roy Mai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2479.00	103.8 PK			1.02 H	318	106.9	-3.1
2	*2479.00	102.3 AV			1.02 H	318	105.4	-3.1
3	2483.50	58.7 PK	74.0	-15.3	1.02 H	318	61.8	-3.1
4	2483.50	46.5 AV	54.0	-7.5	1.02 H	318	49.6	-3.1
5	4958.00	51.4 PK	74.0	-22.6	2.56 H	146	49.0	2.4
6	4958.00	41.2 AV	54.0	-12.8	2.56 H	146	38.8	2.4
7	7437.00	50.1 PK	74.0	-23.9	1.02 H	332	42.4	7.7
8	7437.00	40.4 AV	54.0	-13.6	1.02 H	332	32.7	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2479.00	98.2 PK			3.44 V	62	101.3	-3.1
2	*2479.00	96.7 AV			3.44 V	62	99.8	-3.1
3	2483.50	56.7 PK	74.0	-17.3	3.44 V	62	59.8	-3.1
4	2483.50	44.2 AV	54.0	-9.8	3.44 V	62	47.3	-3.1
5	4958.00	47.2 PK	74.0	-26.8	1.60 V	248	44.8	2.4
6	4958.00	39.2 AV	54.0	-14.8	1.60 V	248	36.8	2.4
7	7437.00	45.5 PK	74.0	-28.5	1.94 V	354	37.8	7.7
8	7437.00	38.1 AV	54.0	-15.9	1.94 V	354	30.4	7.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.


Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=RMS
-----------------	--------------------	-------------------------------	---


GFSK Channel 1

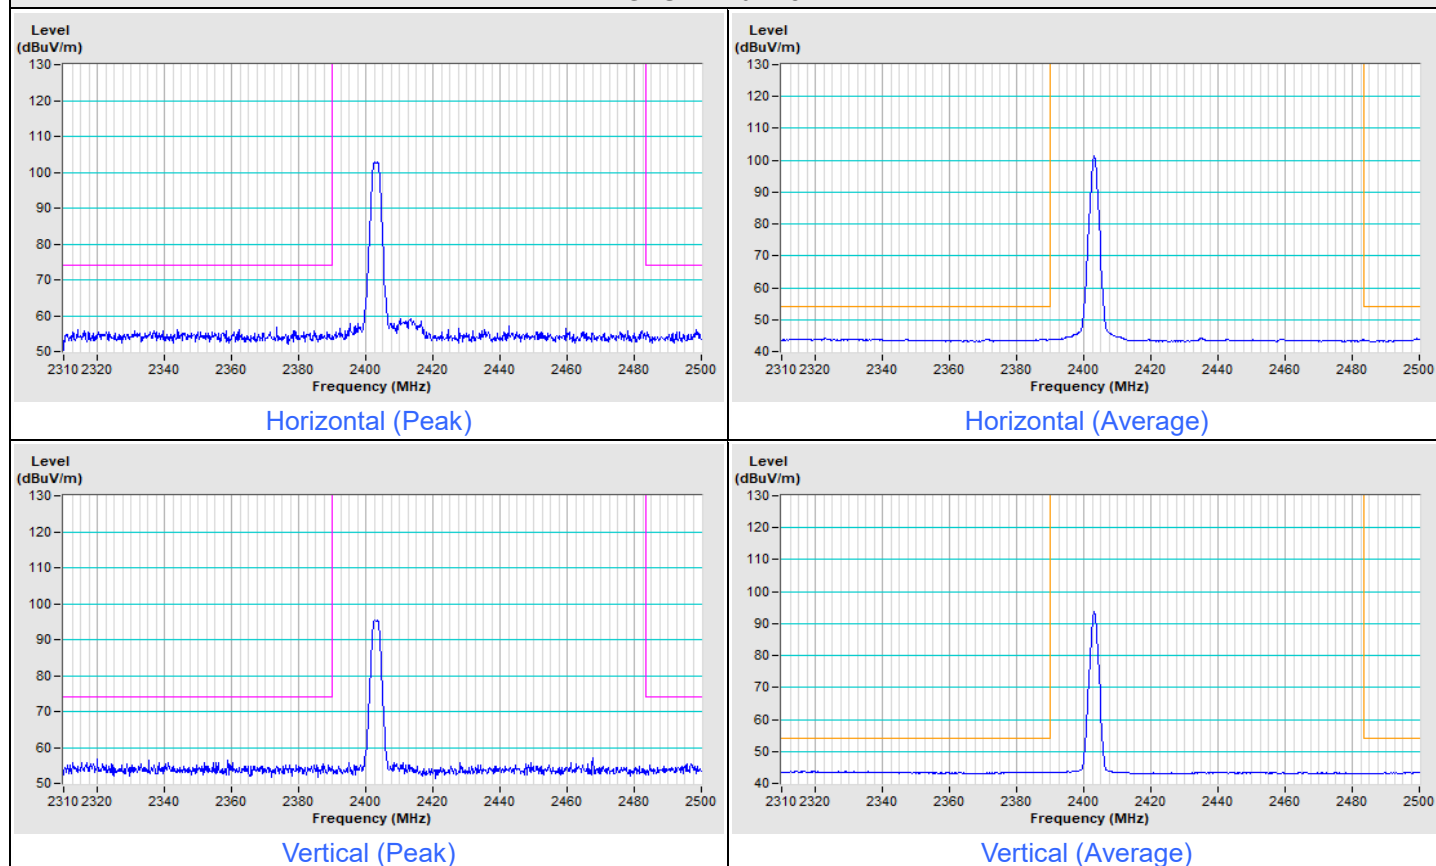


GFSK Channel 77

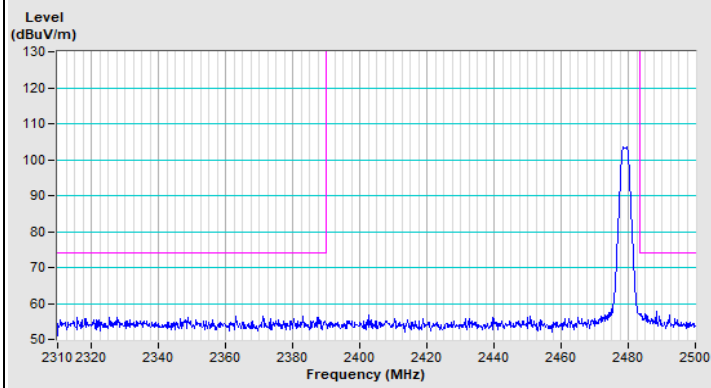


Horizontal (Peak)

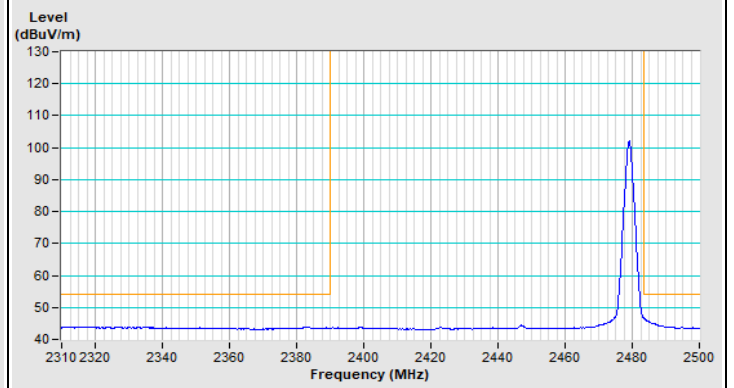

Horizontal (Average)

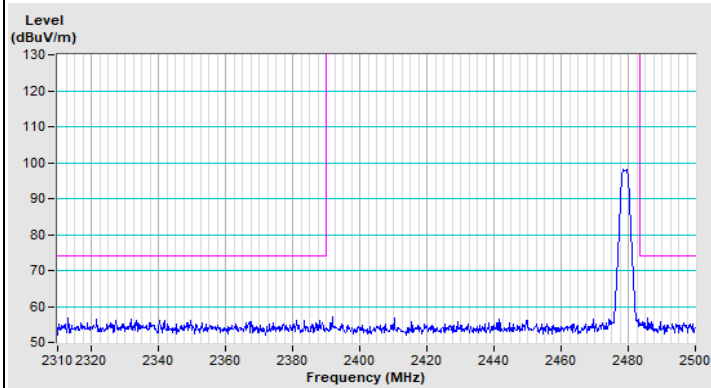

Vertical (Peak)

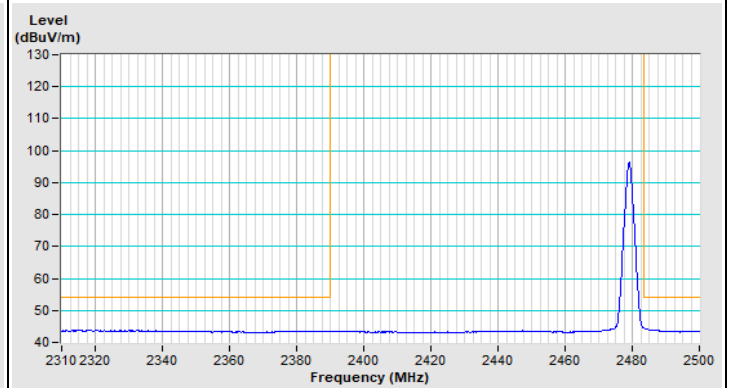

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---