

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBDKG-WTW-P24090144-3
FCC ID: JNZVR0039
Product: Video conference Equipment
Brand: Logitech, logi, logitech
Model No.: VR0039
Received Date: 2024/12/21
Test Date: 2024/12/24 ~ 2025/1/13
Issued Date: 2025/2/26
Applicant: Logitech Far East Ltd.
Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan
FCC Registration /
Designation Number: 788550 / TW0003

Approved by:

Jeremy Lin

, Date:

2025/2/26

Jeremy Lin / Project Engineer

This test report consists of 125 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Pettie Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	11
3.5 Duty Cycle of Test Signal.....	12
3.6 Test Program Used and Operation Descriptions	14
3.7 Connection Diagram of EUT and Peripheral Devices	14
3.8 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 26 dB Bandwidth	15
4.2 RF Output Power.....	15
4.3 Power Spectral Density	15
4.4 6 dB Bandwidth	15
4.5 Occupied Bandwidth.....	15
4.6 AC Power Conducted Emissions	16
4.7 Unwanted Emissions below 1 GHz	16
4.8 Unwanted Emissions above 1 GHz.....	17
5 Limits of Test Items.....	18
5.1 26 dB Bandwidth	18
5.2 RF Output Power.....	18
5.3 Power Spectral Density	18
5.4 6 dB Bandwidth	18
5.5 Occupied Bandwidth.....	18
5.6 AC Power Conducted Emissions	19
5.7 Unwanted Emissions below 1 GHz	19
5.8 Unwanted Emissions above 1 GHz.....	20
6 Test Arrangements.....	21
6.1 26 dB Bandwidth	21
6.1.1 Test Setup	21
6.1.2 Test Procedure.....	21
6.2 RF Output Power.....	22
6.2.1 Test Setup	22
6.2.2 Test Procedure.....	22
6.3 Power Spectral Density	23
6.3.1 Test Setup	23
6.3.2 Test Procedure.....	23
6.4 6 dB Bandwidth	24
6.4.1 Test Setup	24
6.4.2 Test Procedure.....	24
6.5 Occupied Bandwidth.....	24
6.5.1 Test Setup	24
6.5.2 Test Procedure.....	24
6.6 AC Power Conducted Emissions	25
6.6.1 Test Setup	25
6.6.2 Test Procedure.....	25
6.7 Unwanted Emissions below 1 GHz	26
6.7.1 Test Setup	26
6.7.2 Test Procedure.....	27

6.8	Unwanted Emissions above 1 GHz.....	28
6.8.1	Test Setup	28
6.8.2	Test Procedure	28
7	Test Results of Test Item	29
7.1	26 dB Bandwidth	29
7.2	RF Output Power.....	33
7.3	Power Spectral Density	39
7.4	6 dB Bandwidth	45
7.5	Occupied Bandwidth.....	47
7.6	AC Power Conducted Emissions	53
7.7	Unwanted Emissions below 1 GHz	55
7.8	Unwanted Emissions above 1 GHz.....	57
8	Pictures of Test Arrangements	124
9	Information of the Testing Laboratories	125

Release Control Record

Issue No.	Description	Date Issued
RFBDKG-WTW-P24090144-3	Original release.	2025/2/26

1 Certificate

Product: Video conference Equipment

Brand: Logitech, logi, logitech

Test Model: VR0039

Sample Status: Engineering sample

Applicant: Logitech Far East Ltd.

Test Date: 2024/12/24 ~ 2025/1/13

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement Procedure: ANSI C63.10-2013

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	-	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -5.26 dB at 0.63382 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.5 dB at 233.70 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -3.3 dB at 5470.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

Notes:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- The "Dynamic Frequency Selection measurement" was recorded in DFS test report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
26 dB Bandwidth	-	206.5 Hz
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Occupied Bandwidth	-	72 Hz
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.6 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Video conference Equipment
Brand	Logitech, logi, logitech
Test Model	VR0039
Status of EUT	Engineering sample
Power Supply Rating	120Vac
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 1201.0 Mbps
Operating Frequency	5.18 GHz ~ 5.24 GHz 5.26 GHz ~ 5.32 GHz 5.5 GHz ~ 5.72 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6
Output Power	5.18 GHz ~ 5.24 GHz : 34.246 mW (15.35 dBm) 5.26 GHz ~ 5.32 GHz : 34.56 mW (15.39 dBm) 5.5 GHz ~ 5.72 GHz : 35.119 mW (15.46 dBm) 5.745 GHz ~ 5.825 GHz : 34.242 mW (15.35 dBm)
EUT Category	Client device

Note:

1. The EUT uses following accessories.

Item	Brand	Model
Stylus pen	Logitech, logi, logitech	-

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	*Cable Length
BT & WLAN	0	INPAQ	46050019332	4.68	2.4 GHz ~ 2.4835 GHz	PIFA	ipex(MHF)	380mm
					5.15 GHz ~ 5.85 GHz			
WLAN	1	INPAQ	46050019432	3.96	2.4 GHz ~ 2.4835 GHz	PIFA	ipex(MHF)	465mm
				4.97	5.15 GHz ~ 5.85 GHz			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz). Therefore, the investigated worst case is the representative mode in test report.

3.3 Channel List

FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
-----------	--

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
26 dB Bandwidth	802.11a	52, 60, 64, 100, 116, 140, 144	BPSK	6Mb/s
	802.11ax (HE20)	52, 60, 64, 100, 116, 140, 144	BPSK	MCS0
	802.11ax (HE40)	54, 62, 102, 110, 134, 142	BPSK	MCS0
	802.11ax (HE80)	58, 106, 122, 138	BPSK	MCS0
RF Output Power	802.11a	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
	802.11ax (HE40)	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
	802.11ax (HE80)	42, 58, 106, 122, 138, 155	BPSK	MCS0
Power Spectral Density	802.11a	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
	802.11ax (HE40)	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
	802.11ax (HE80)	42, 58, 106, 122, 138, 155	BPSK	MCS0
6 dB Bandwidth	802.11a	144, 149, 157, 165	BPSK	6Mb/s
	802.11ax (HE20)	144, 149, 157, 165	BPSK	MCS0
	802.11ax (HE40)	142, 151, 159	BPSK	MCS0
	802.11ax (HE80)	138, 155	BPSK	MCS0
Occupied Bandwidth	802.11a	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
	802.11ax (HE40)	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
	802.11ax (HE80)	42, 58, 106, 122, 138, 155	BPSK	MCS0
AC Power Conducted Emissions	802.11a	100	BPSK	6Mb/s
Unwanted Emissions below 1 GHz	802.11a	100	BPSK	6Mb/s
Unwanted Emissions above 1 GHz	802.11a	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
	802.11ax (HE40)	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
	802.11ax (HE80)	42, 58, 106, 122, 138, 155	BPSK	MCS0


3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = $1.4 \text{ ms} / 1.49 \text{ ms} \times 100\% = 94.0\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.27 \text{ dB}$


802.11ax (HE20): Duty cycle = $1.495 \text{ ms} / 1.515 \text{ ms} \times 100\% = 98.7\%$

802.11ax (HE40): Duty cycle = $0.777 \text{ ms} / 0.798 \text{ ms} \times 100\% = 97.4\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.12 \text{ dB}$


802.11ax (HE80): Duty cycle = $0.404 \text{ ms} / 0.428 \text{ ms} \times 100\% = 94.4\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.25 \text{ dB}$

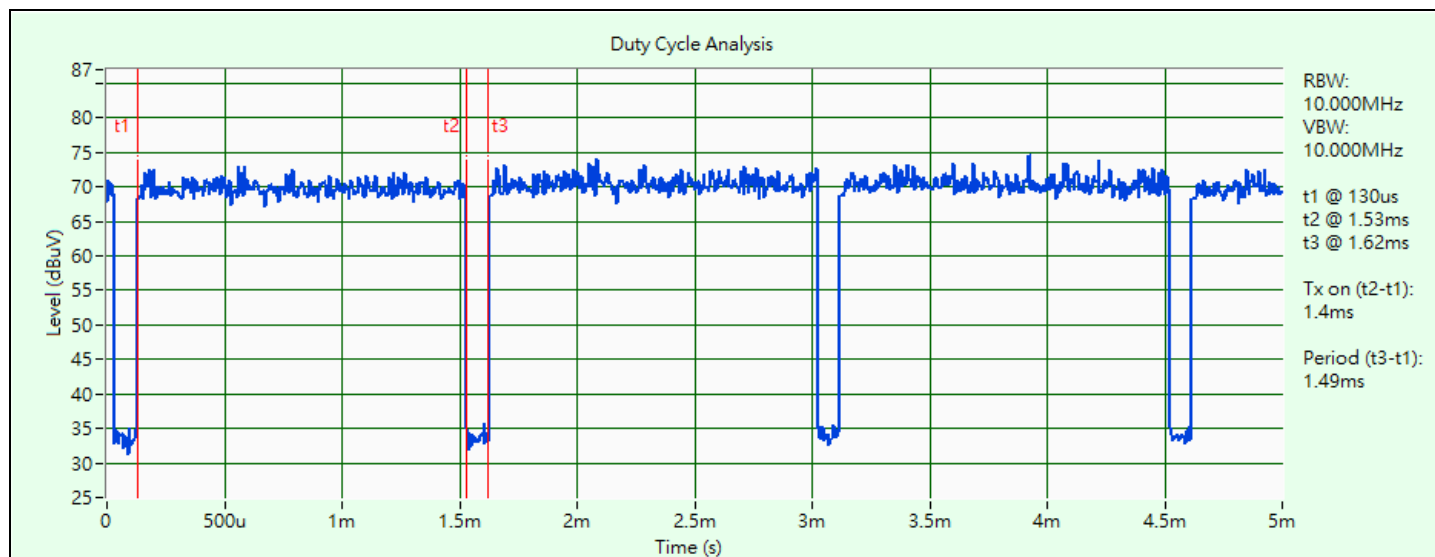


802.11a

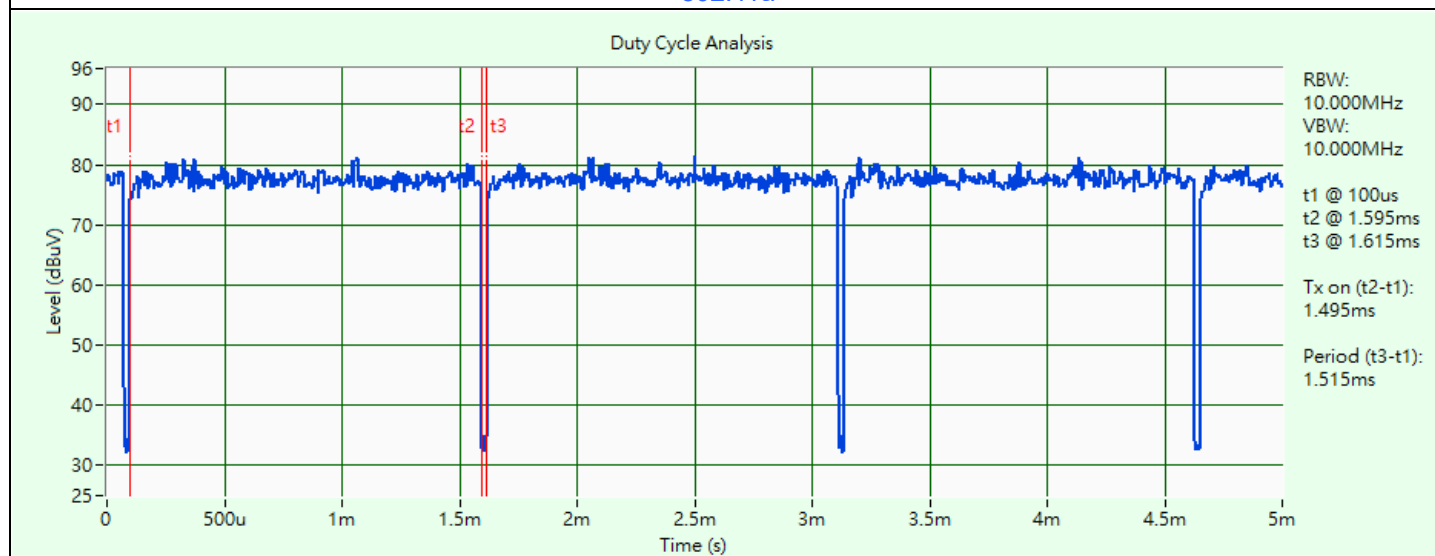

802.11ax (HE20)

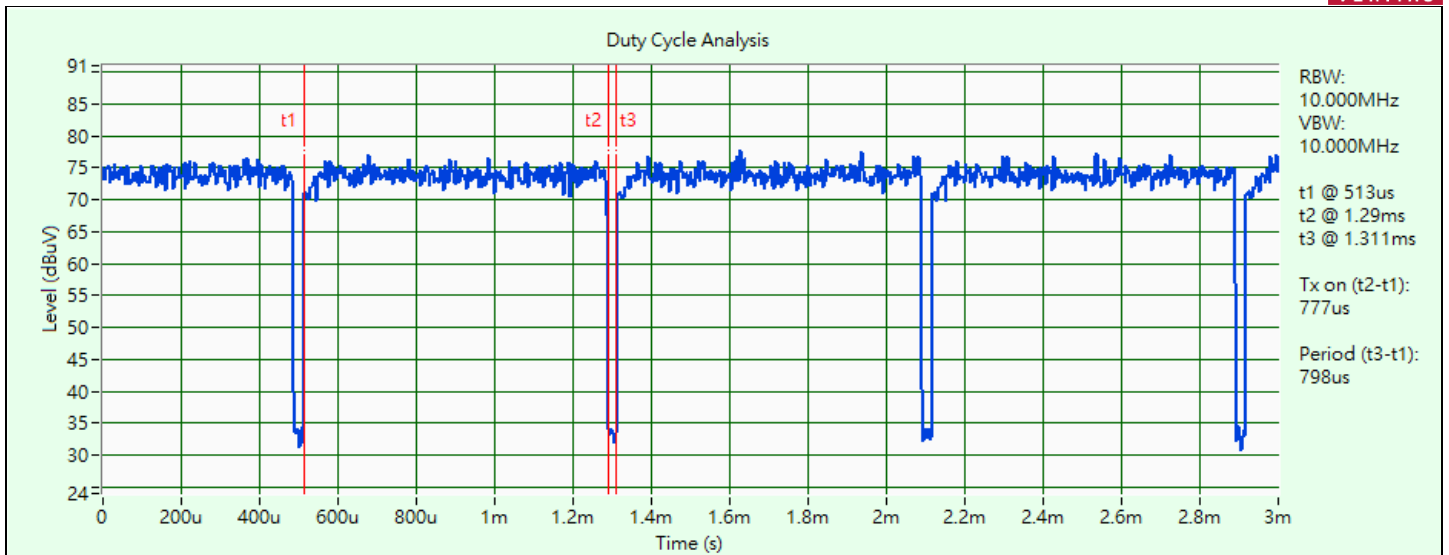

802.11ax (HE40)

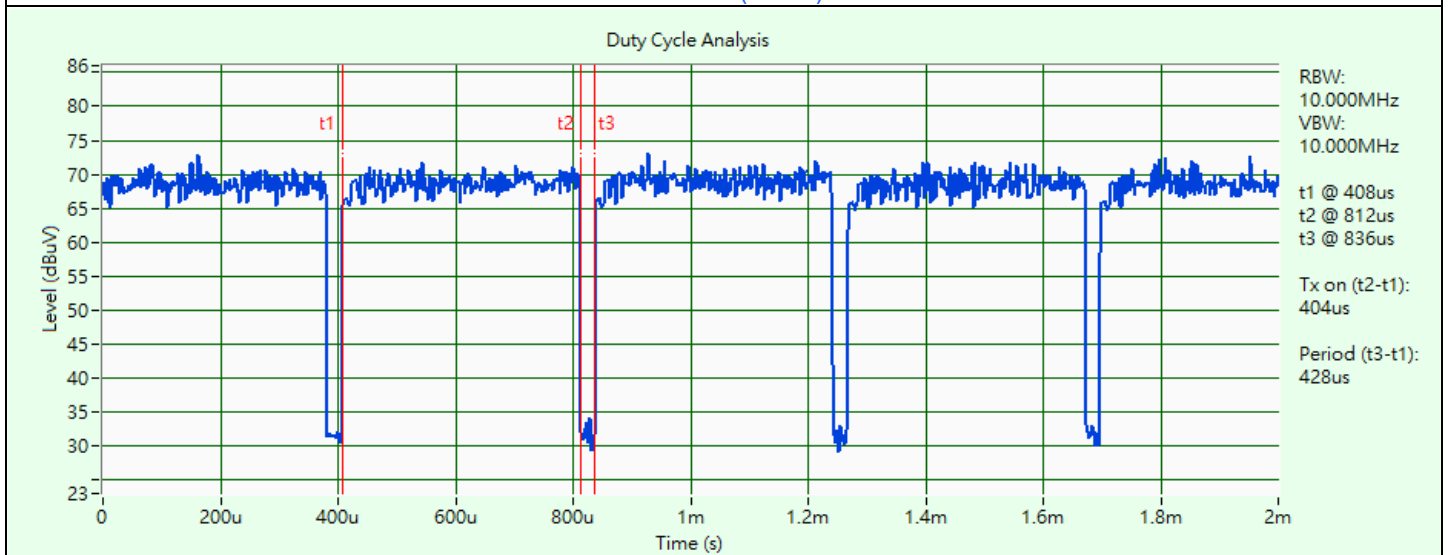


802.11ax (HE80)

3.6 Test Program Used and Operation Descriptions

Controlling software CMD has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

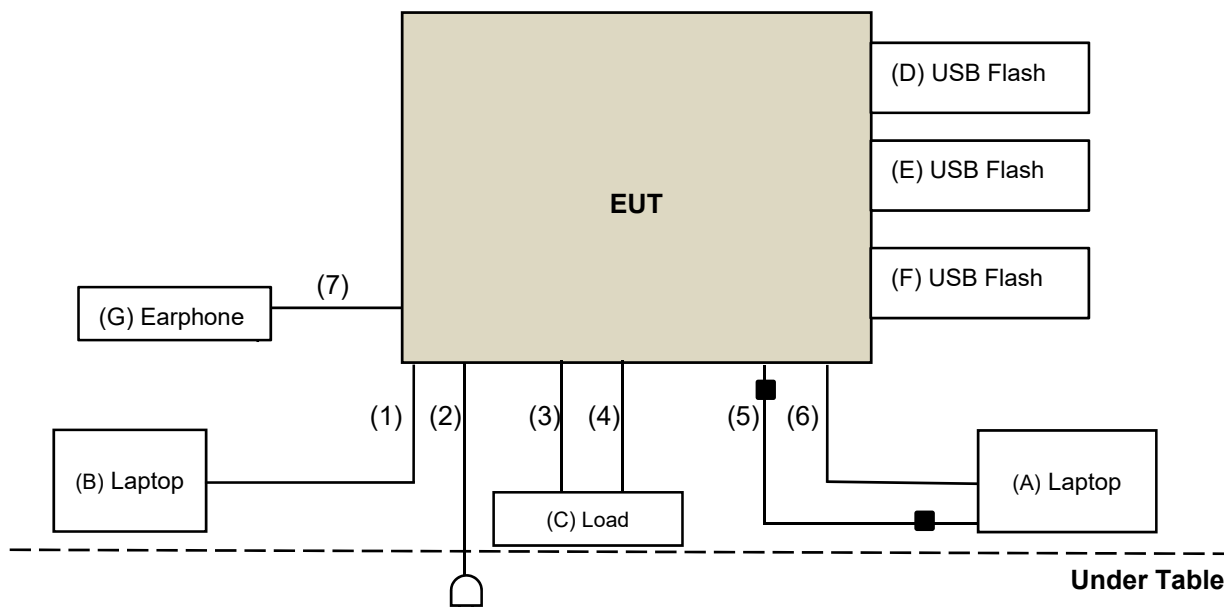

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	14UR-4528LTW	GJ22NC2	N/A	Provided by Lab
B	Laptop	DELL	Inspiron 14R	8LRKKW1	N/A	Provided by Lab
C	Load	N/A	N/A	N/A	N/A	Provided by Lab
D	USB Flash	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
E	USB Flash	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
F	USB Flash	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
G	Earphone	APPLE	MB77PFEB	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	HDMI Cable	1	1.5	Yes	0	Provided by Lab
2	AC Power Cable	1	3	No	0	Supplied by applicant
3	RJ-45 Cable	1	1.5	No	0	Provided by Lab
4	RJ-45 Cable	1	1.5	No	0	Provided by Lab
5	HDMI Cable	1	1.5	Yes	2	Provided by Lab
6	Type C to A Cable	1	1.5	Yes	0	Provided by Lab
7	Earphone cable	1	1.2	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101105	2024/2/27	2025/2/26
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/1/7

4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Signal & Spectrum Analyzer R&S	FSV3044	101105	2024/2/27	2025/2/26
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/1/7

4.3 Power Spectral Density

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 6 dB Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.6 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011277	02	2024/10/25	2025/10/24
	E1-011313	11	2024/2/1	2025/1/31
	E1-011595	21	2024/3/8	2025/3/7
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2024/11/5	2025/11/4
EMI Test Receiver R&S	ESR3	102783	2024/12/17	2025/12/16
Fixed Attenuator STI	BNC5W10dB	PAD-COND2-01	2024/8/25	2025/8/24
LISN R&S	ESH2-Z5	100100	2024/3/6	2025/3/5
	ESH3-Z5	100312	2024/9/9	2025/9/8
RF Coaxial Cable Woken	5D-FB	Cable-cond2-01	2024/8/25	2025/8/24
Software BVADT	BVADT_Cond_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2024/8/28	2025/8/27

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2025/1/13

4.7 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-160	2024/10/9	2025/10/8
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXE EMI Receiver Keysight	N9038B	MY60180018	2024/3/13	2025/3/12
Preamplifier Agilent	8447D	2944A10638	2024/5/1	2025/4/30
RF Coaxial Cable Woken	8D-FB	Cable-CH9-01	2024/5/1	2025/4/30
Signal & Spectrum Analyzer R&S	FSW43	101866	2024/3/26	2025/3/25
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2025/1/13

4.8 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1169	2024/11/10	2025/11/9
	BBHA 9170	9170-480	2024/11/10	2025/11/9
		BBHA9170243	2024/11/10	2025/11/9
MXE EMI Receiver Keysight	N9038B	MY60180018	2024/3/13	2025/3/12
Preamplifier Agilent	8449B	3008A02367	2024/1/6	2025/1/5
Preamplifier EMCI	EMC 184045	980116	2024/9/24	2025/9/23
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2024/7/6	2025/7/5
	EMC102-KM-KM-3000	150929	2024/7/6	2025/7/5
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2024/1/6	2025/1/5
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2024/1/6	2025/1/5
Signal & Spectrum Analyzer R&S	FSW43	101866	2024/3/26	2025/3/25
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2024/12/24 ~ 2024/12/26

5 Limits of Test Items

5.1 26 dB Bandwidth

The results are for reference only.

5.2 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.7 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.8 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1}	PK: 68.2 (dBμV/m) ^{*1}
	PK: 10 (dBm/MHz) ^{*2}	PK: 105.2 (dBμV/m) ^{*2}
	PK: 15.6 (dBm/MHz) ^{*3}	PK: 110.8 (dBμV/m) ^{*3}
	PK: 27 (dBm/MHz) ^{*4}	PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 26 dB Bandwidth

6.1.1 Test Setup




6.1.2 Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.2 RF Output Power

6.2.1 Test Setup



For channel straddling:



6.2.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq$ RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

For channel straddling:


Method SA-2A

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq$ RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- Perform a single sweep.
- Record the max value and add 10 log (1/duty cycle).

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

6.3 Power Spectral Density

6.3.1 Test Setup



6.3.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

For specified measurement bandwidth 1 MHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add 10 log (1/duty cycle).

For specified measurement bandwidth 500 kHz:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value


For specified measurement bandwidth 500 kHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

6.4 6 dB Bandwidth

6.4.1 Test Setup




6.4.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.5 Occupied Bandwidth

6.5.1 Test Setup




6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.6 AC Power Conducted Emissions

6.6.1 Test Setup

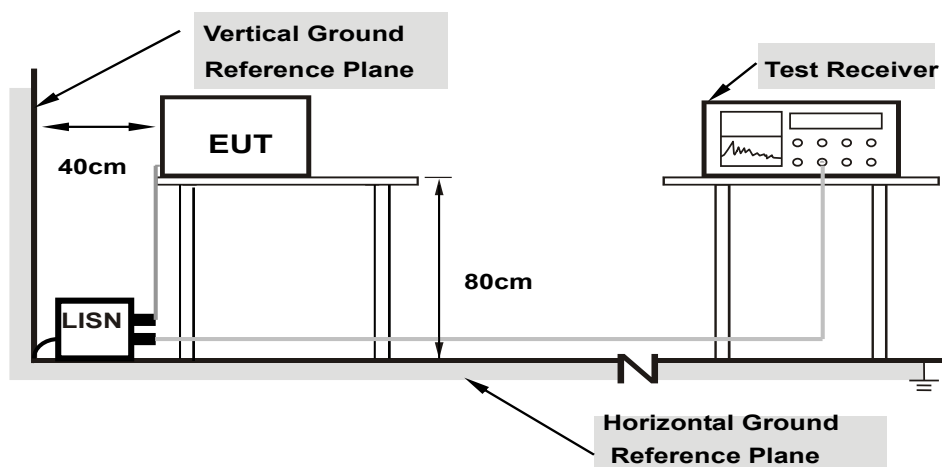

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.7 Unwanted Emissions below 1 GHz

6.7.1 Test Setup

For Radiated emission below 30 MHz

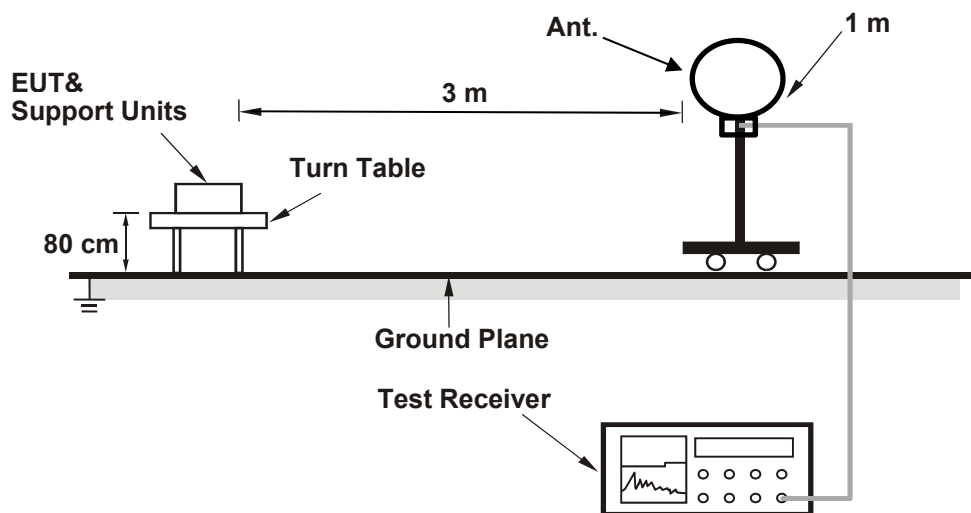

For Radiated emission above 30 MHz

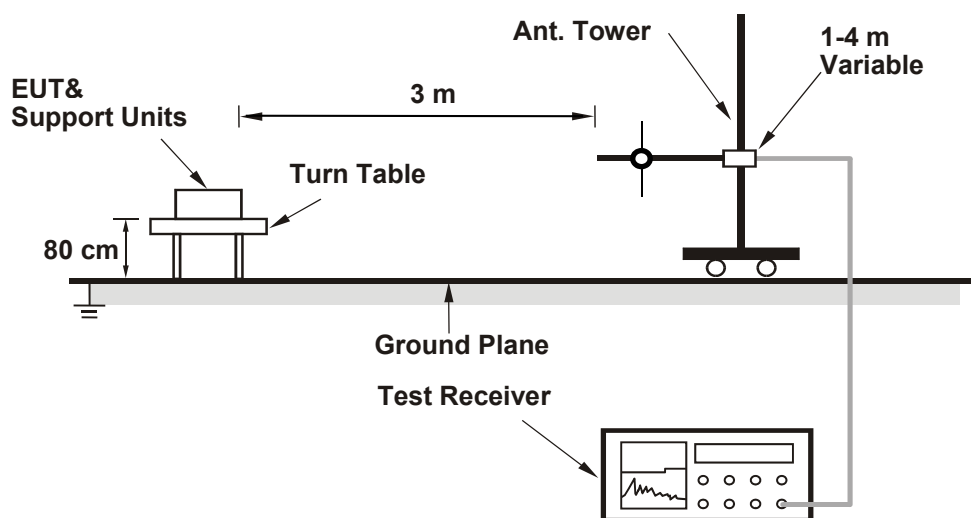

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.8 Unwanted Emissions above 1 GHz

6.8.1 Test Setup

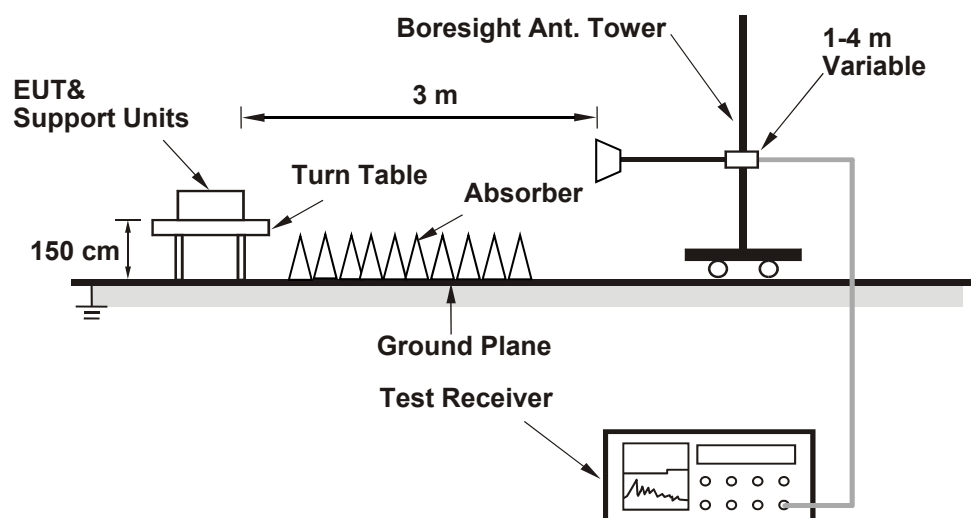

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 26 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Alan Wu
--------------	----------------	---------------------------	--------------	------------	---------

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	21.23	20.89
60	5300	21.11	20.98
64	5320	21.03	20.88
100	5500	21.11	20.82
116	5580	20.94	20.92
140	5700	21.11	21.11
144 (U-NII-2C)	5720	15.36	15.20
144 (U-NII-3)	5720	5.59	5.47

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	20.89	24.19 > 24
60	5300	20.98	24.21 > 24
64	5320	20.88	24.19 > 24
100	5500	20.82	24.18 > 24
116	5580	20.92	24.2 > 24
140	5700	21.11	24.24 > 24
144 (U-NII-2C)	5720	15.20	22.81 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11ax (HE20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	21.63	21.55
60	5300	21.36	21.51
64	5320	21.45	21.44
100	5500	21.43	21.49
116	5580	21.37	21.26
140	5700	21.51	21.27
144 (U-NII-2C)	5720	15.66	15.55
144 (U-NII-3)	5720	5.74	5.72

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	21.55	24.33 > 24
60	5300	21.36	24.29 > 24
64	5320	21.44	24.31 > 24
100	5500	21.43	24.31 > 24
116	5580	21.26	24.27 > 24
140	5700	21.27	24.27 > 24
144 (U-NII-2C)	5720	15.55	22.91 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11ax (HE40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	40.96	40.77
62	5310	40.60	40.69
102	5510	40.76	40.67
110	5550	40.58	40.71
134	5670	40.83	40.78
142 (U-NII-2C)	5710	35.45	35.35
142 (U-NII-3)	5710	5.62	5.50

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
54	5270	40.77	27.1 > 24
62	5310	40.60	27.08 > 24
102	5510	40.67	27.09 > 24
110	5550	40.58	27.08 > 24
134	5670	40.78	27.1 > 24
142 (U-NII-2C)	5710	35.35	26.48 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.





802.11ax (HE80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	83.00	82.91
106	5530	83.04	82.75
122	5610	83.30	82.72
138 (U-NII-2C)	5690	76.26	76.25
138 (U-NII-3)	5690	7.12	6.49

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
58	5290	82.91	30.18 > 24
106	5530	82.75	30.17 > 24
122	5610	82.72	30.17 > 24
138 (U-NII-2C)	5690	76.25	29.82 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Spectrum Plot of Minimum Value

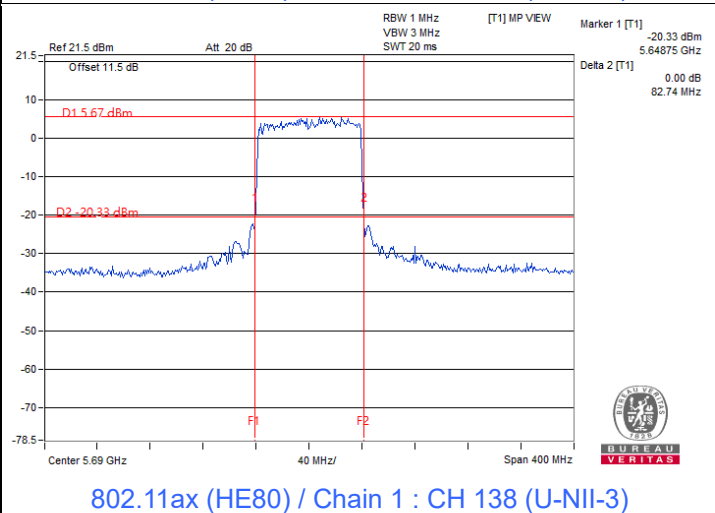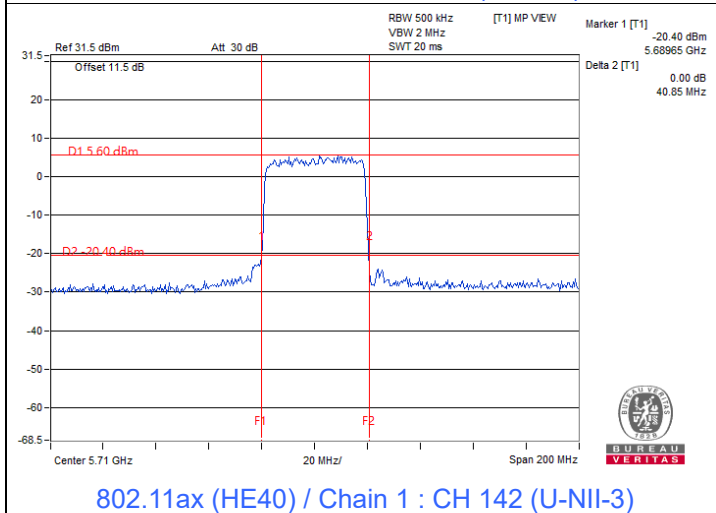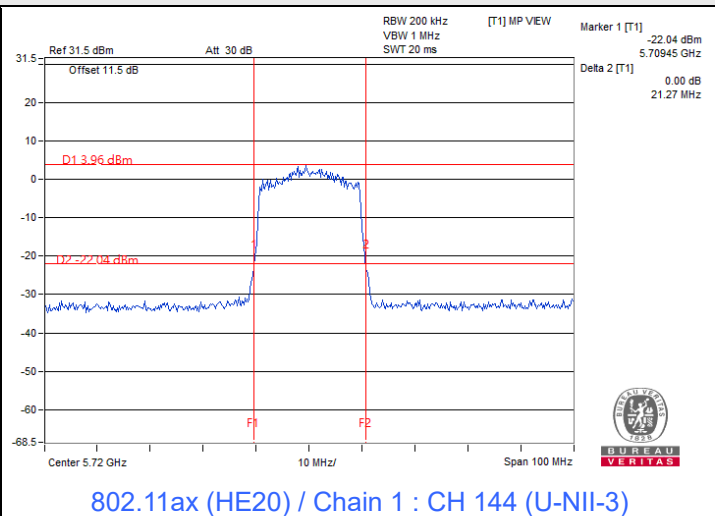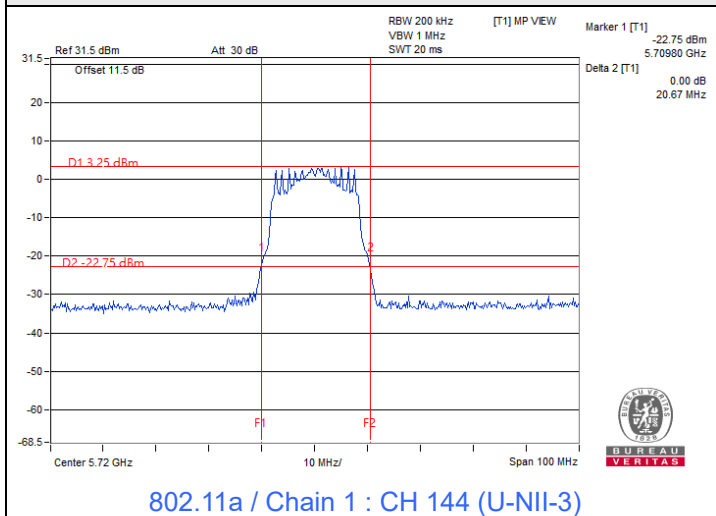

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

7.2 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Alan Wu
--------------	----------------	---------------------------	--------------	------------	---------

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	12.29	11.91	32.467	15.11	24	Pass
40	5200	12.40	12.19	33.936	15.31	24	Pass
48	5240	12.42	12.25	34.246	15.35	24	Pass
52	5260	12.44	12.31	34.56	15.39	24	Pass
60	5300	12.25	12.20	33.384	15.24	24	Pass
64	5320	12.41	12.30	34.401	15.37	24	Pass
100	5500	12.48	12.41	35.119	15.46	24	Pass
116	5580	12.34	12.17	33.621	15.27	24	Pass
140	5700	12.41	11.68	32.141	15.07	24	Pass
*144 (U-NII-2C)	5720	11.00	10.45	25.203	14.01	22.81	Pass
*144 (U-NII-3)	5720	2.23	1.70	3.353	5.25	30	Pass
149	5745	12.29	12.27	33.809	15.29	30	Pass
157	5785	12.32	12.19	33.619	15.27	30	Pass
165	5825	12.38	12.29	34.242	15.35	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	12.33	12.01	32.986	15.18	24	Pass
40	5200	12.08	11.92	31.703	15.01	24	Pass
48	5240	12.40	12.08	33.522	15.25	24	Pass
52	5260	12.25	12.09	32.969	15.18	24	Pass
60	5300	12.35	12.22	33.852	15.30	24	Pass
64	5320	12.34	12.09	33.32	15.23	24	Pass
100	5500	11.28	11.03	26.104	14.17	24	Pass
116	5580	12.24	11.68	31.473	14.98	24	Pass
140	5700	12.15	11.58	30.794	14.88	24	Pass
*144 (U-NII-2C)	5720	10.69	10.19	22.169	13.46	22.91	Pass
*144 (U-NII-3)	5720	3.70	3.60	4.635	6.66	30	Pass
149	5745	12.36	11.95	32.886	15.17	30	Pass
157	5785	12.42	12.08	33.602	15.26	30	Pass
165	5825	12.45	12.15	33.985	15.31	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	10.51	10.45	22.338	13.49	24	Pass
46	5230	12.34	12.02	33.062	15.19	24	Pass
54	5270	12.29	12.08	33.087	15.20	24	Pass
62	5310	11.82	11.63	29.76	14.74	24	Pass
102	5510	11.02	10.66	24.289	13.85	24	Pass
110	5550	12.38	11.96	33.002	15.19	24	Pass
134	5670	12.42	11.98	33.234	15.22	24	Pass
*142 (U-NII-2C)	5710	10.58	10.35	22.87	13.59	24	Pass
*142 (U-NII-3)	5710	2.98	2.59	3.904	5.92	30	Pass
151	5755	12.25	11.60	31.242	14.95	30	Pass
159	5795	12.31	11.71	31.847	15.03	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	11.32	11.11	26.464	14.23	24	Pass
58	5290	11.43	11.31	27.42	14.38	24	Pass
106	5530	11.37	11.27	27.106	14.33	24	Pass
122	5610	12.35	11.67	31.868	15.03	24	Pass
*138 (U-NII-2C)	5690	10.77	10.42	24.319	13.86	24	Pass
*138 (U-NII-3)	5690	-1.50	-1.82	1.4467	1.60	30	Pass
155	5775	12.34	12.22	33.812	15.29	30	Pass


Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.97 dBi < 6 dBi, so the output power limit shall not be reduced.


Spectrum Plot for channel straddling

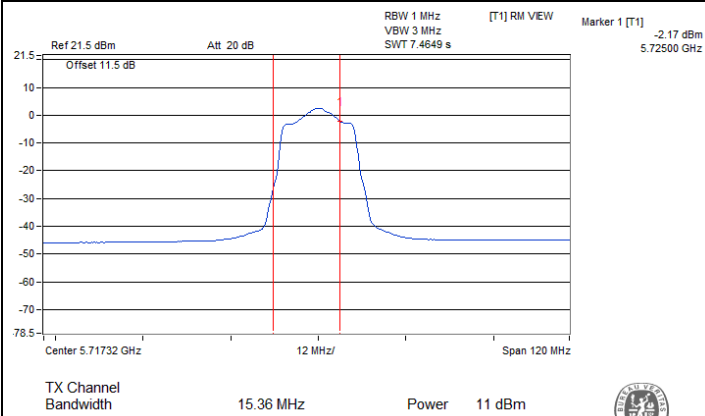


802.11a / Chain 0 : CH 144 (U-NII-2C)

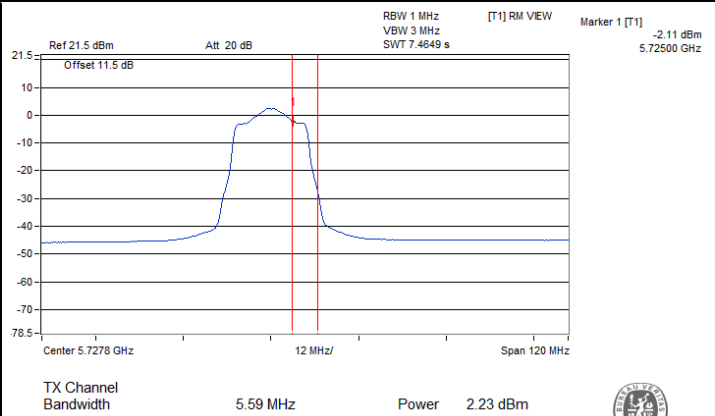


802.11a / Chain 0 : CH 144 (U-NII-3)

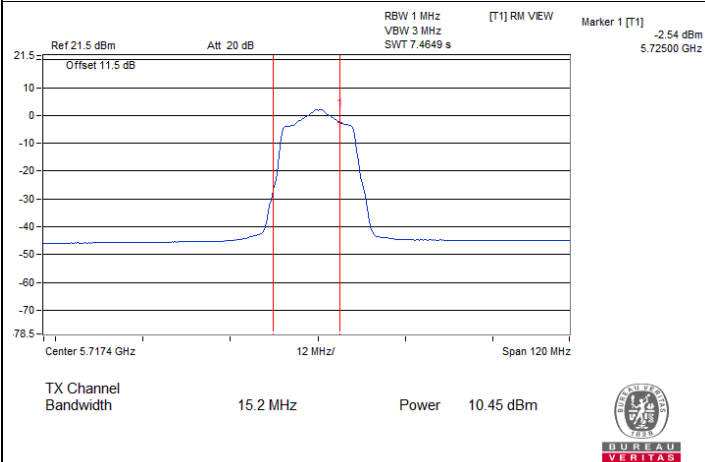


802.11a / Chain 1 : CH 144 (U-NII-2C)

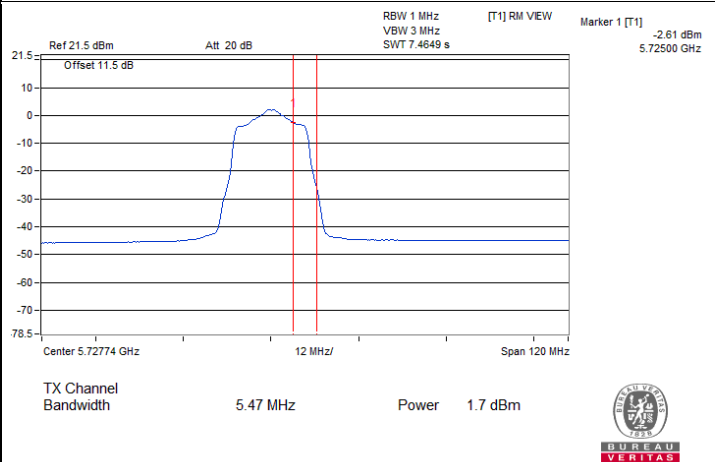

802.11a / Chain 1 : CH 144 (U-NII-3)

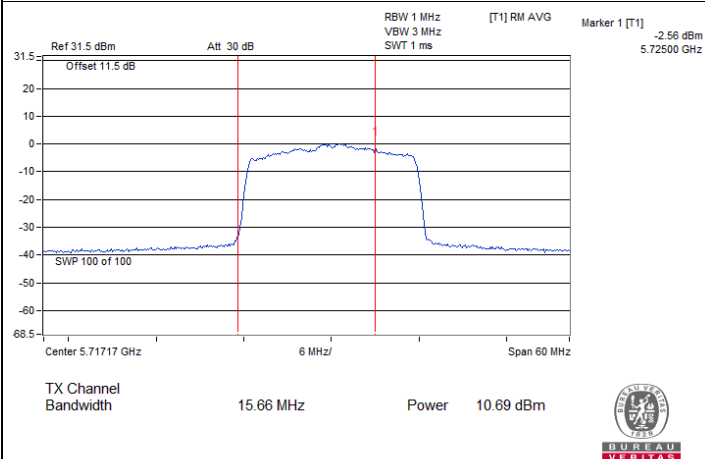


802.11ax (HE20) / Chain 0 : CH 144 (U-NII-2C)

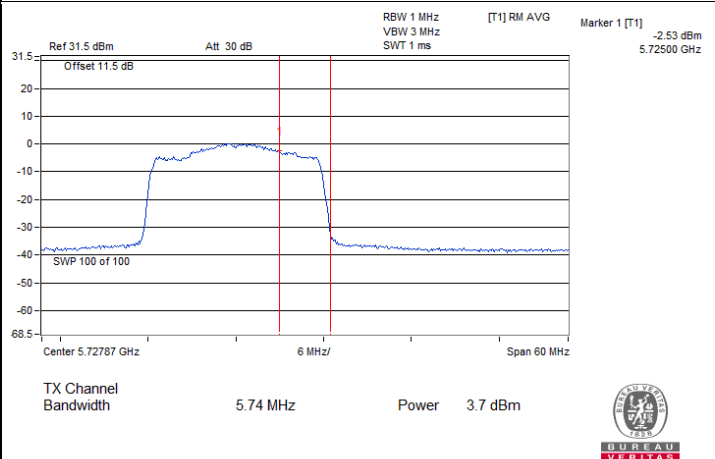


802.11ax (HE20) / Chain 0 : CH 144 (U-NII-3)


Spectrum Plot for channel straddling

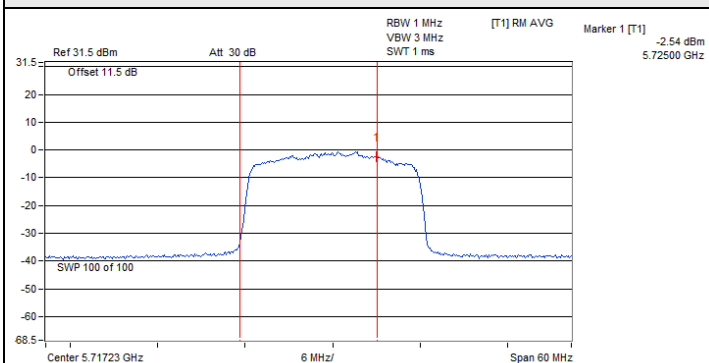


802.11ax (HE20) / Chain 1 : CH 144 (U-NII-2C)

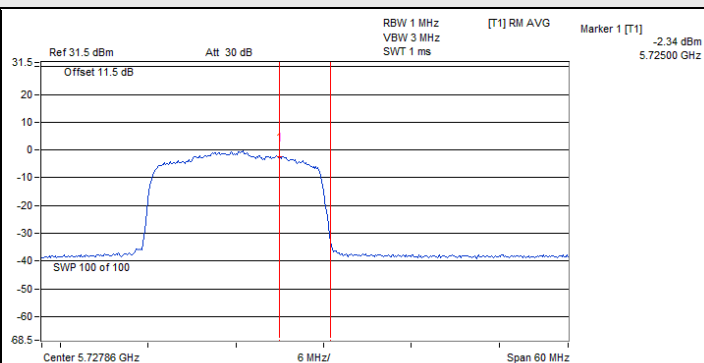


802.11ax (HE20) / Chain 1 : CH 144 (U-NII-3)

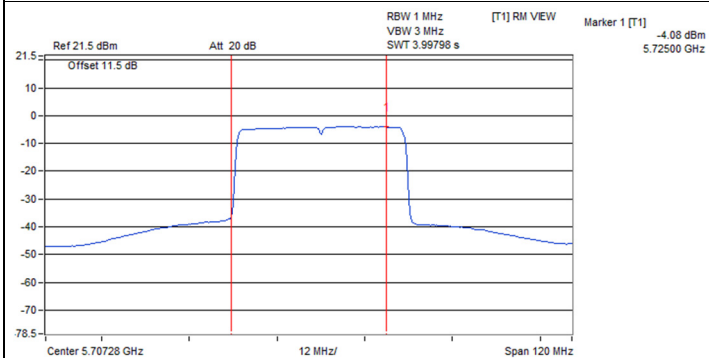


802.11ax (HE40) / Chain 0 : CH 142 (U-NII-2C)

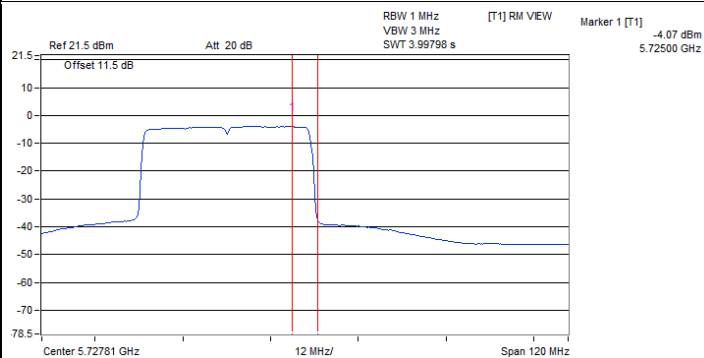

802.11ax (HE40) / Chain 0 : CH 142 (U-NII-3)

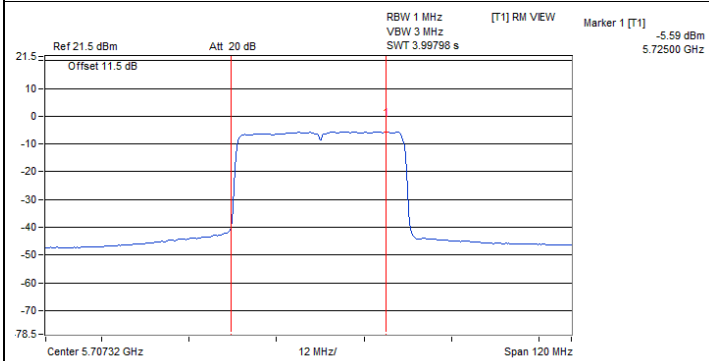


802.11ax (HE40) / Chain 1 : CH 142 (U-NII-2C)

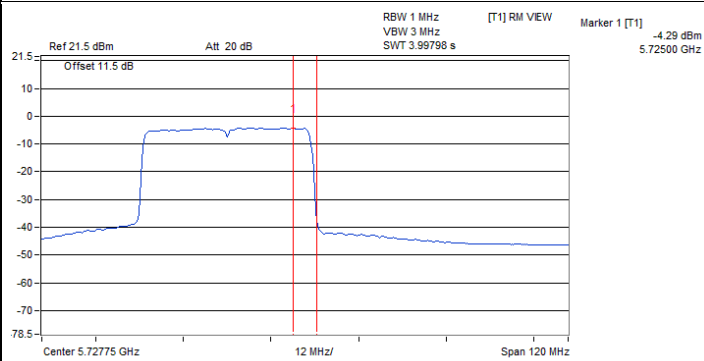


802.11ax (HE40) / Chain 1 : CH 142 (U-NII-3)


Spectrum Plot for channel straddling

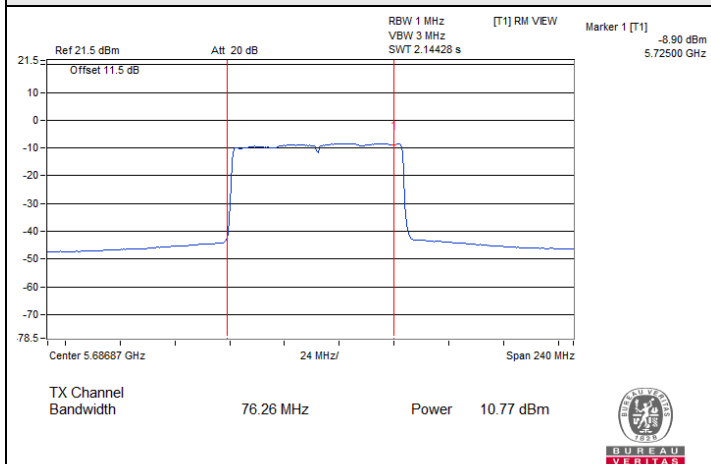


802.11ax (HE80) / Chain 0 : CH 138 (U-NII-2C)

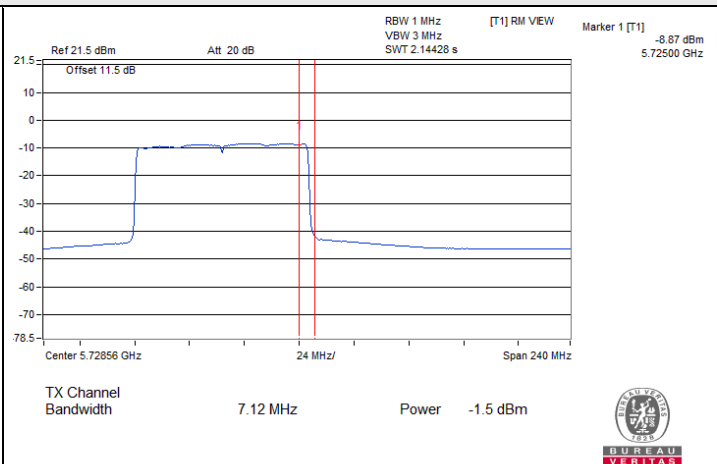

802.11ax (HE80) / Chain 0 : CH 138 (U-NII-3)

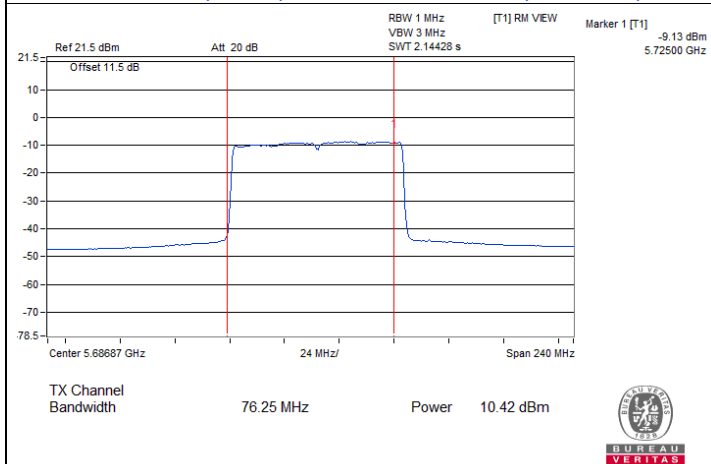

802.11ax (HE80) / Chain 1 : CH 138 (U-NII-2C)

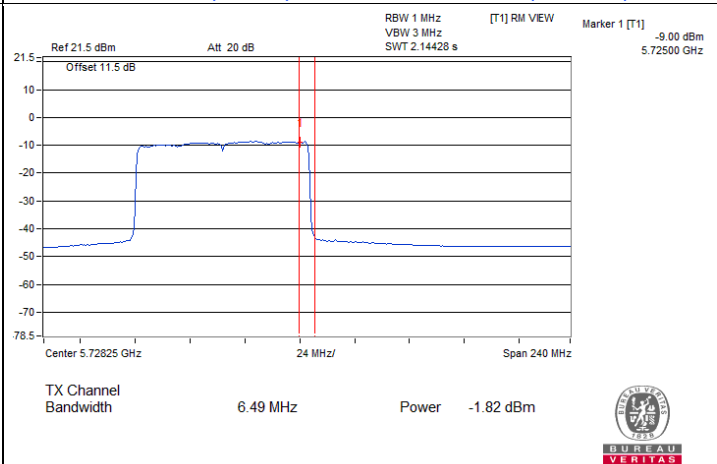

802.11ax (HE80) / Chain 1 : CH 138 (U-NII-3)

7.3 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Alan Wu
--------------	----------------	---------------------------	--------------	------------	---------

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
36	5180	1.00	0.52	0.27	4.05	9.16	Pass
40	5200	1.04	0.62	0.27	4.12	9.16	Pass
48	5240	1.19	0.95	0.27	4.35	9.16	Pass
52	5260	1.57	1.12	0.27	4.63	9.16	Pass
60	5300	1.50	1.00	0.27	4.54	9.16	Pass
64	5320	1.49	1.37	0.27	4.71	9.16	Pass
100	5500	1.43	1.35	0.27	4.67	9.16	Pass
116	5580	1.36	1.14	0.27	4.53	9.16	Pass
140	5700	1.57	0.74	0.27	4.46	9.16	Pass
144 (U-NII-2C)	5720	1.39	0.75	0.27	4.36	9.16	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 7.84 dBi > 6dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
4. For U-NII-2A, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
5. For U-NII-2C, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	-0.49	-0.72	2.41	9.16	Pass
40	5200	-0.68	-0.73	2.31	9.16	Pass
48	5240	-0.19	-0.70	2.57	9.16	Pass
52	5260	-0.28	-0.63	2.56	9.16	Pass
60	5300	-0.29	-0.58	2.58	9.16	Pass
64	5320	-0.23	-0.77	2.52	9.16	Pass
100	5500	-1.32	-1.53	1.59	9.16	Pass
116	5580	-0.35	-0.76	2.46	9.16	Pass
140	5700	-0.52	-0.90	2.30	9.16	Pass
144 (U-NII-2C)	5720	-0.35	-0.73	2.47	9.16	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 7.84 dBi > 6dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
- For U-NII-2A, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
- For U-NII-2C, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
38	5190	-5.99	-6.24	0.12	-2.98	9.16	Pass
46	5230	-4.08	-4.39	0.12	-1.10	9.16	Pass
54	5270	-4.34	-4.43	0.12	-1.25	9.16	Pass
62	5310	-4.53	-4.69	0.12	-1.48	9.16	Pass
102	5510	-5.39	-5.44	0.12	-2.28	9.16	Pass
110	5550	-3.93	-3.99	0.12	-0.83	9.16	Pass
134	5670	-3.63	-3.80	0.12	-0.58	9.16	Pass
142 (U-NII-2C)	5710	-4.08	-4.30	0.12	-1.06	9.16	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 7.84 dBi > 6dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
- For U-NII-2A, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
- For U-NII-2C, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
42	5210	-8.66	-8.72	0.25	-5.43	9.16	Pass
58	5290	-8.32	-8.50	0.25	-5.15	9.16	Pass
106	5530	-8.37	-8.73	0.25	-5.29	9.16	Pass
122	5610	-7.49	-7.68	0.25	-4.32	9.16	Pass
138 (U-NII-2C)	5690	-7.49	-7.57	0.25	-4.27	9.16	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 7.84 dBi > 6dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
- For U-NII-2A, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.
- For U-NII-2C, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $11-(7.84-6) = 9.16$ dBm/MHz.

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
144 (U-NII-3)	5720	-12.25	-12.57	-9.4	0.27	-6.91	28.16	Pass
149	5745	-5.29	-5.52	-2.39	0.27	0.10	28.16	Pass
157	5785	-5.21	-5.56	-2.37	0.27	0.12	28.16	Pass
165	5825	-4.98	-5.45	-2.2	0.27	0.29	28.16	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (7.84 - 6) = 28.16$ dBm/500kHz.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-11.51	-11.68	-8.58	-6.36	28.16	Pass
149	5745	-6.97	-7.22	-4.08	-1.86	28.16	Pass
157	5785	-6.96	-7.05	-3.99	-1.77	28.16	Pass
165	5825	-6.77	-6.92	-3.83	-1.61	28.16	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (7.84 - 6) = 28.16$ dBm/500kHz.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
142 (U-NII-3)	5710	-13.31	-13.40	-10.34	0.12	-8.00	28.16	Pass
151	5755	-10.94	-11.34	-8.13	0.12	-5.79	28.16	Pass
159	5795	-10.85	-11.25	-8.04	0.12	-5.70	28.16	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (7.84 - 6) = 28.16$ dBm/500kHz.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
138 (U-NII-3)	5690	-16.65	-16.78	-13.7	0.25	-11.23	28.16	Pass
155	5775	-14.72	-15.14	-11.91	0.25	-9.44	28.16	Pass


Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-3, the directional gain is 7.84 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (7.84 - 6) = 28.16 \text{ dBm/500kHz}$.


Spectrum Plot of Maximum Value

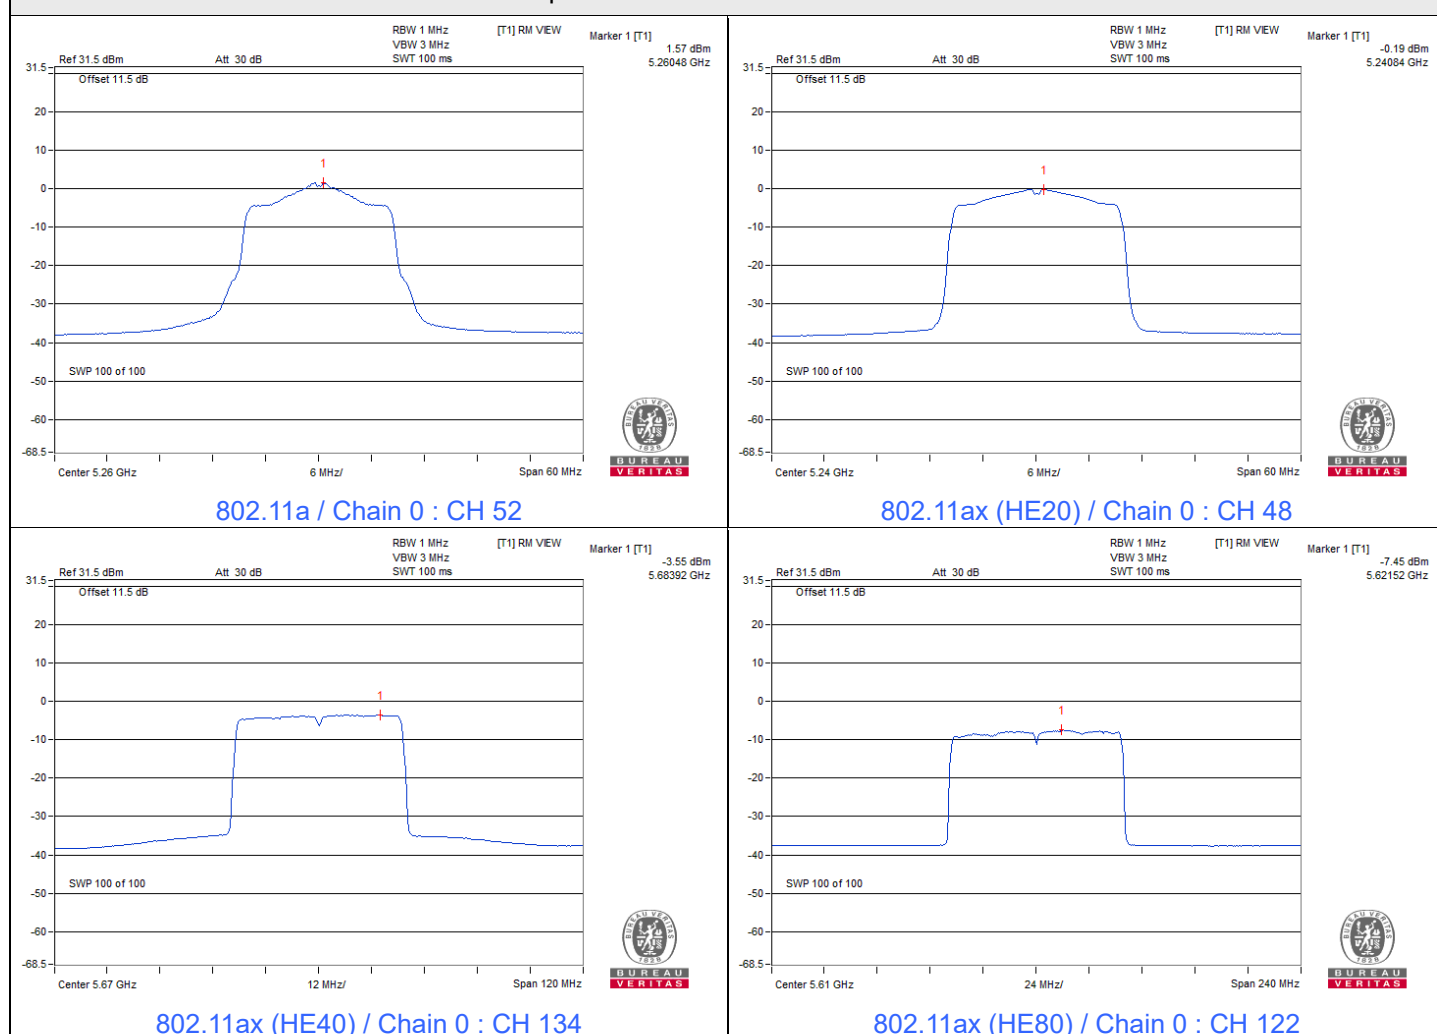


Spectrum Plot of Maximum Value

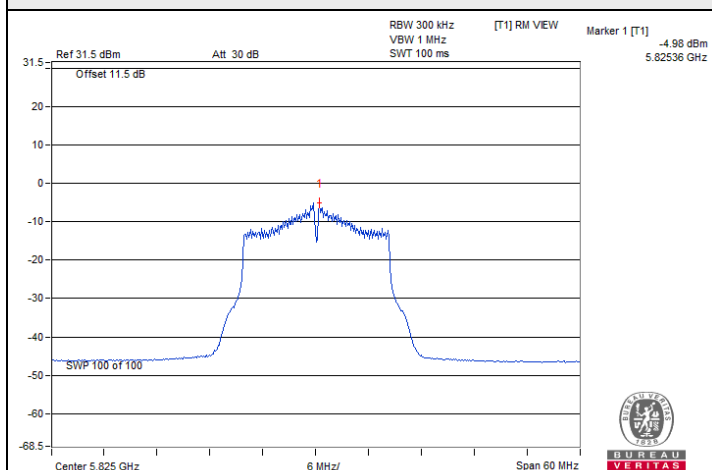


802.11a / Chain 0 : CH 165

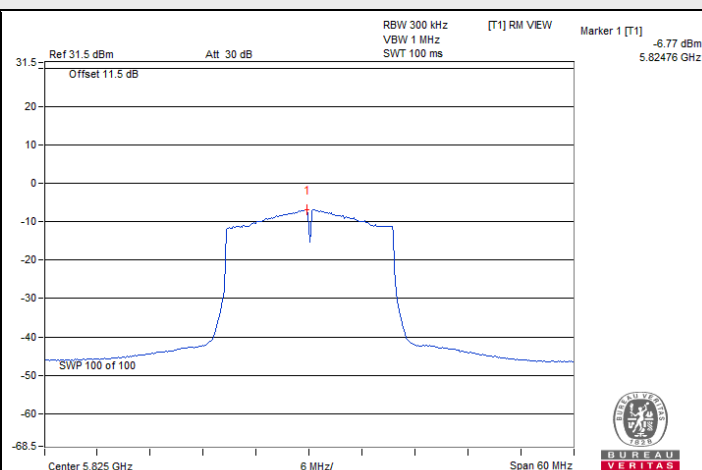

802.11ax (HE20) / Chain 0 : CH 165

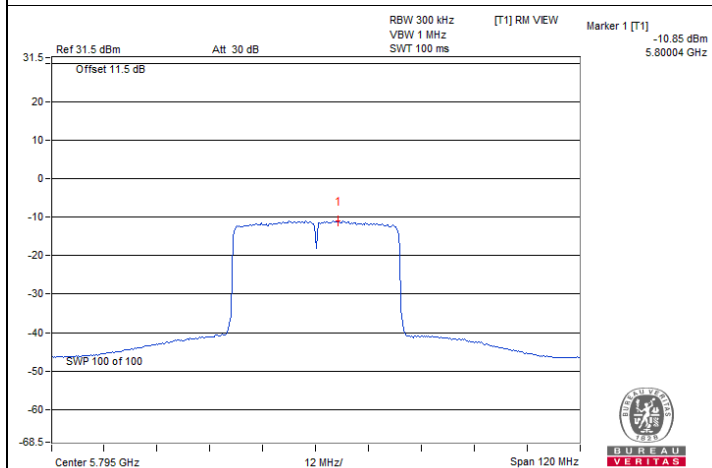

802.11ax (HE40) / Chain 0 : CH 159

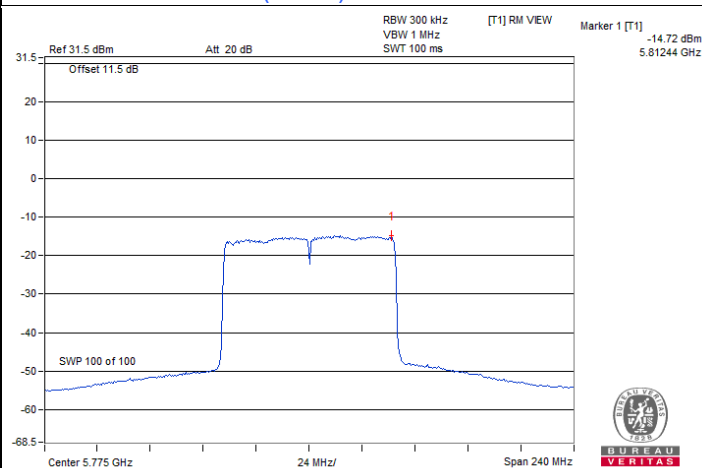

802.11ax (HE80) / Chain 0 : CH 155

7.4 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Alan Wu
--------------	----------------	---------------------------	--------------	------------	---------

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	2.67	2.67	0.5	Pass
149	5745	15.24	15.24	0.5	Pass
157	5785	15.24	15.22	0.5	Pass
165	5825	15.24	15.22	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.45	4.41	0.5	Pass
149	5745	18.68	17.48	0.5	Pass
157	5785	18.77	18.26	0.5	Pass
165	5825	18.69	18.16	0.5	Pass


802.11ax (HE40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
142 (U-NII-3)	5710	3.93	3.81	0.5	Pass
151	5755	37.85	37.43	0.5	Pass
159	5795	37.63	37.17	0.5	Pass


802.11ax (HE80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	4.13	3.84	0.5	Pass
155	5775	77.99	77.76	0.5	Pass


Spectrum Plot of Minimum Value

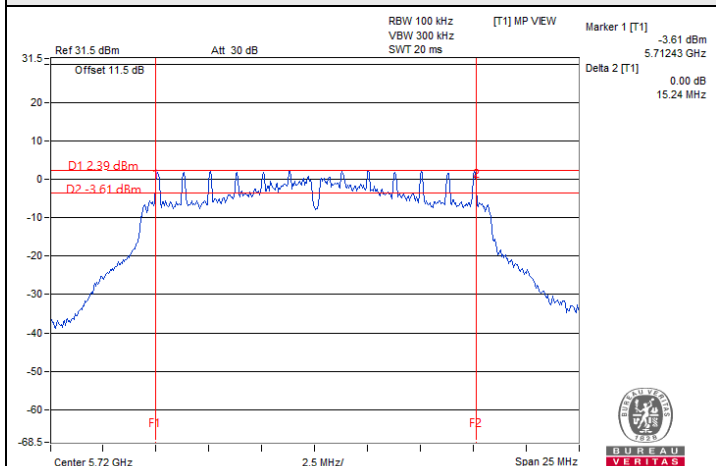


802.11a / Chain 0 : CH 144 (U-NII-3)

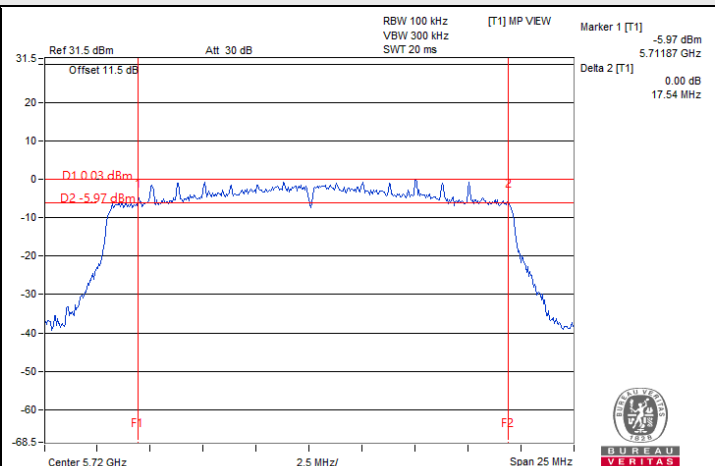

802.11ax (HE20) / Chain 1 : CH 144 (U-NII-3)

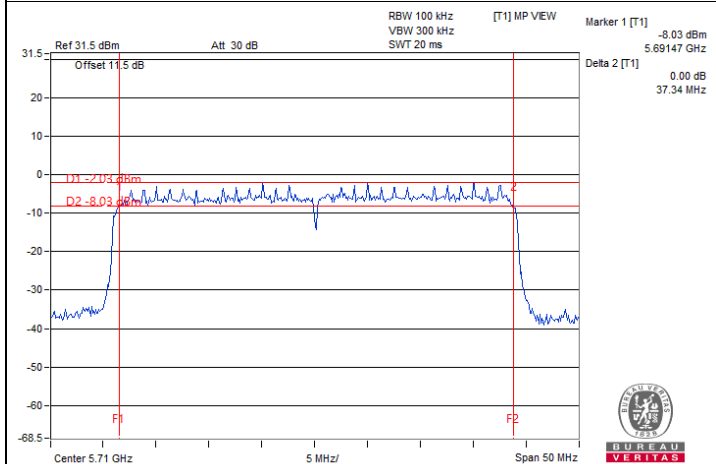

802.11ax (HE40) / Chain 1 : CH 142 (U-NII-3)

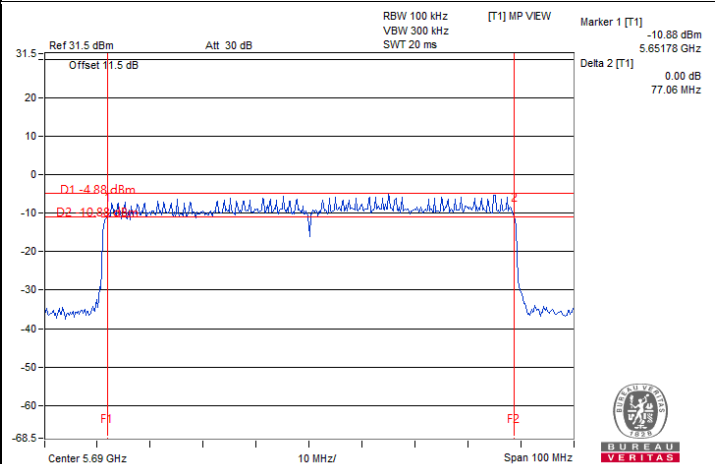

802.11ax (HE80) / Chain 1 : CH 138 (U-NII-3)

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Alan Wu
--------------	----------------	---------------------------	--------------	------------	---------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.68	16.56
40	5200	16.80	16.44
48	5240	16.80	16.44
52	5260	16.80	16.56
60	5300	16.80	16.56
64	5320	16.80	16.44
100	5500	16.68	16.44
116	5580	16.68	16.56
140	5700	16.68	16.44
144 (U-NII-2C)	5720	13.28	13.28
144 (U-NII-3)	5720	3.40	3.28
149	5745	16.68	16.44
157	5785	16.68	16.44
165	5825	16.56	16.44

802.11ax (HE20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.96	18.96
40	5200	19.08	18.96
48	5240	19.08	19.08
52	5260	19.08	18.96
60	5300	18.96	18.96
64	5320	18.96	18.96
100	5500	18.96	19.08
116	5580	18.96	19.08
140	5700	18.96	18.96
144 (U-NII-2C)	5720	14.48	14.48
144 (U-NII-3)	5720	4.60	4.60
149	5745	18.96	18.96
157	5785	19.08	19.08
165	5825	18.96	18.96





802.11ax (HE40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	38.40	38.88
46	5230	37.92	37.92
54	5270	37.92	38.16
62	5310	37.92	37.92
102	5510	37.92	38.16
110	5550	38.16	37.92
134	5670	37.92	37.92
142 (U-NII-2C)	5710	33.96	33.96
142 (U-NII-3)	5710	3.96	3.96
151	5755	37.92	38.16
159	5795	37.92	37.92



802.11ax (HE80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	77.76	78.72
58	5290	77.76	77.76
106	5530	77.76	77.76
122	5610	77.76	77.76
138 (U-NII-2C)	5690	73.88	73.88
138 (U-NII-3)	5690	3.88	3.88
155	5775	77.76	76.80


Spectrum Plot of Maximum Value

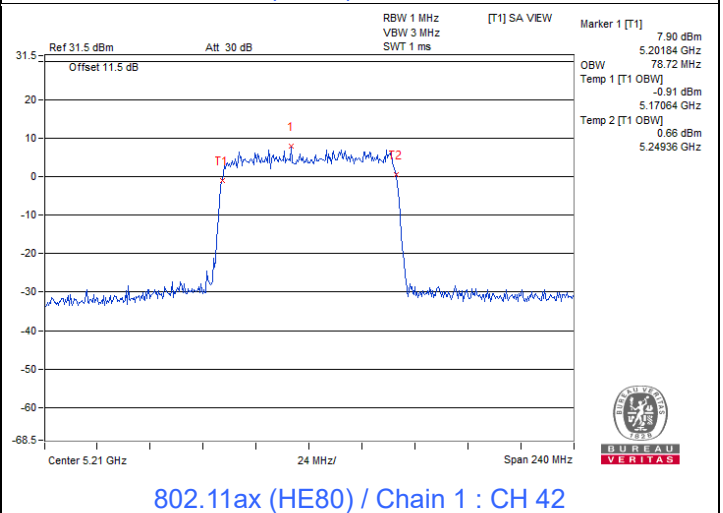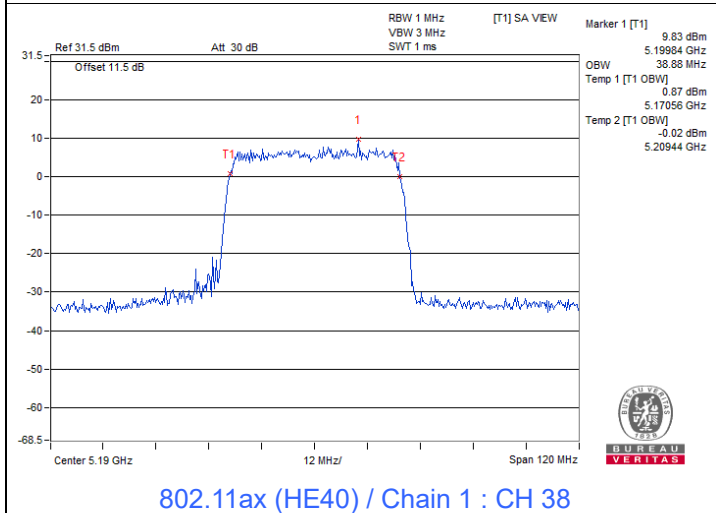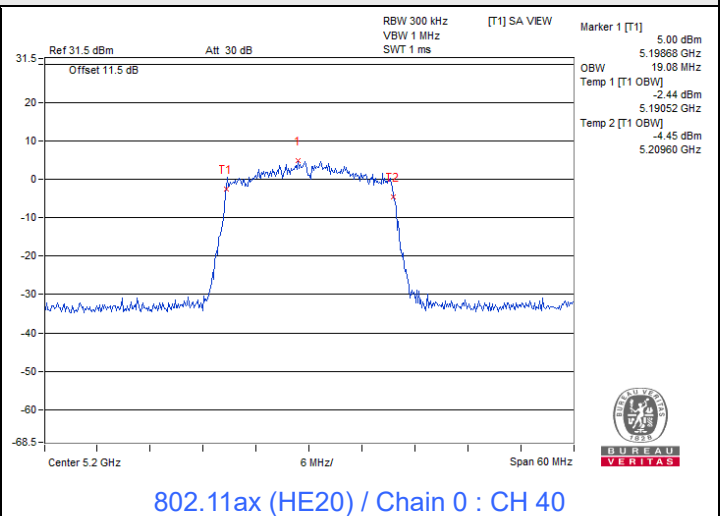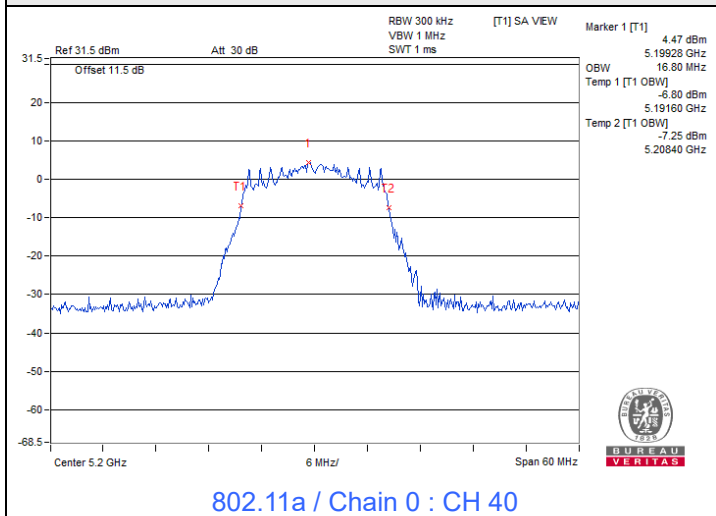


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

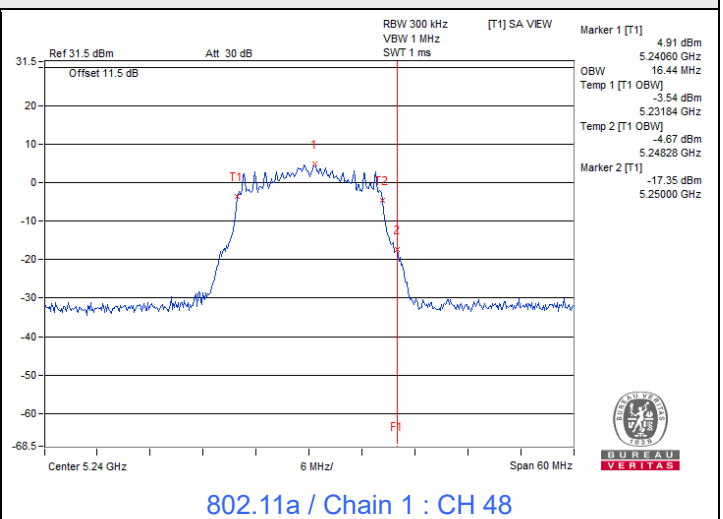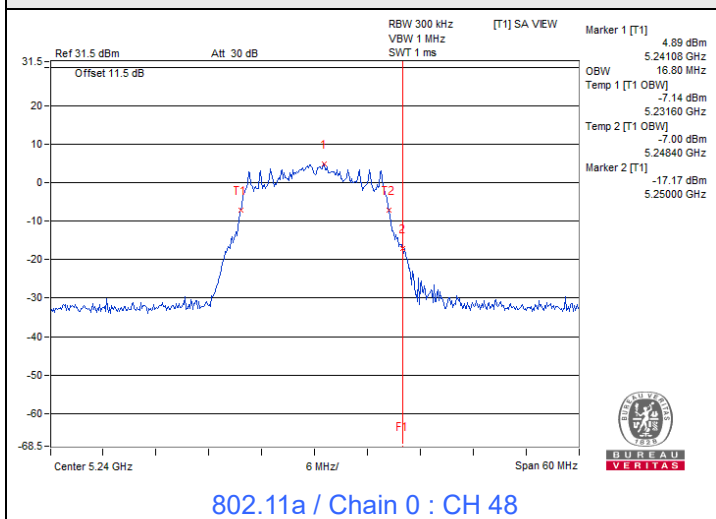


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

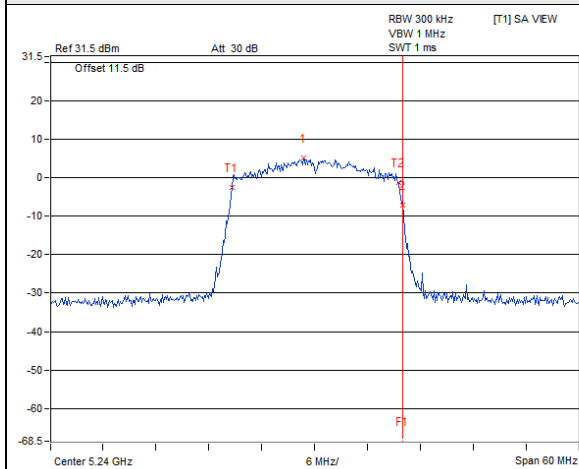


802.11ax (HE20) / Chain 0 : CH 48

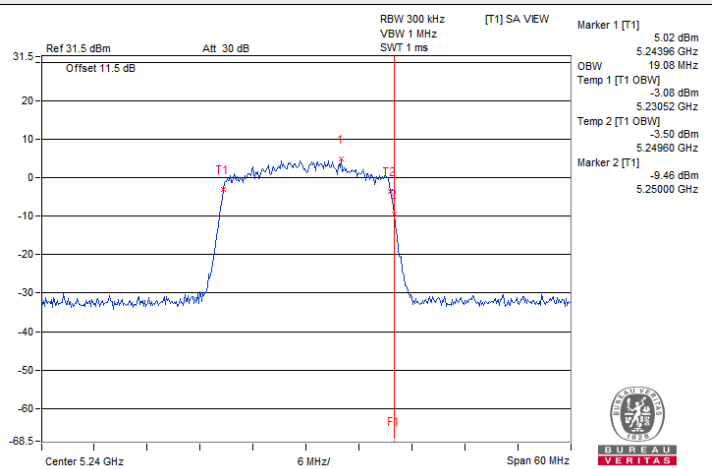


802.11ax (HE20) / Chain 1 : CH 48

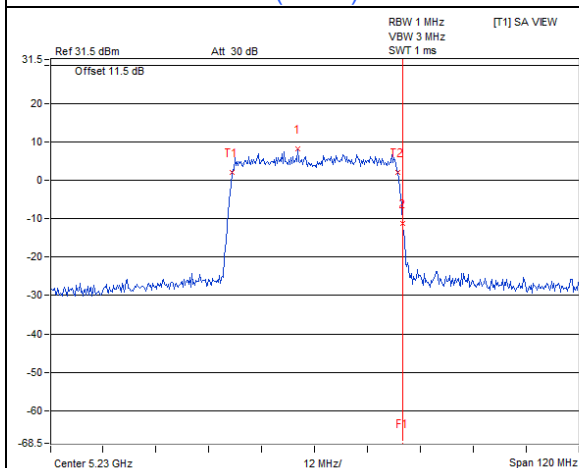


802.11ax (HE40) / Chain 0 : CH 46

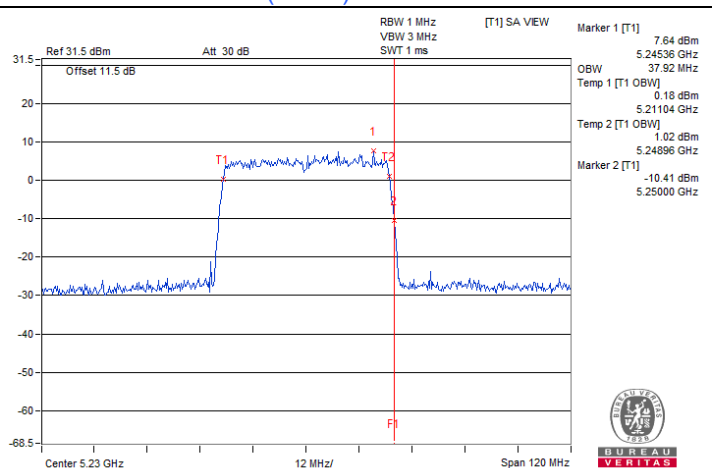

802.11ax (HE40) / Chain 1 : CH 46

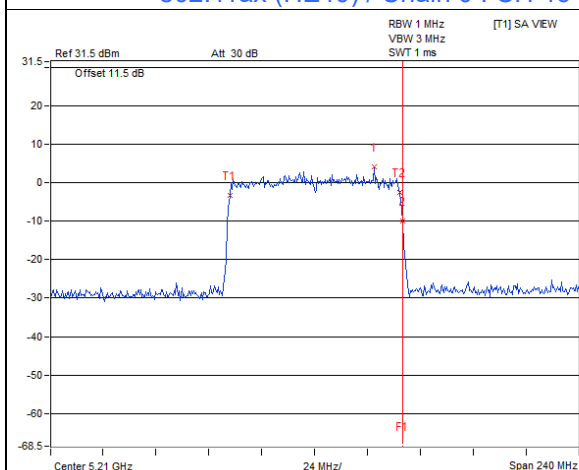


802.11ax (HE80) / Chain 0 : CH 42

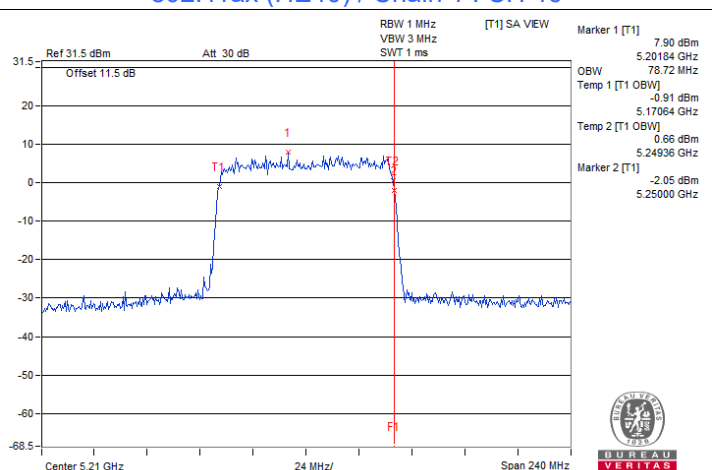


802.11ax (HE80) / Chain 1 : CH 42


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

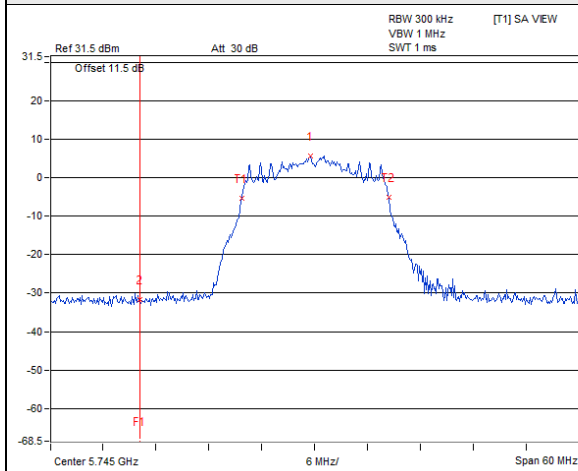


802.11a / Chain 0 : CH 149

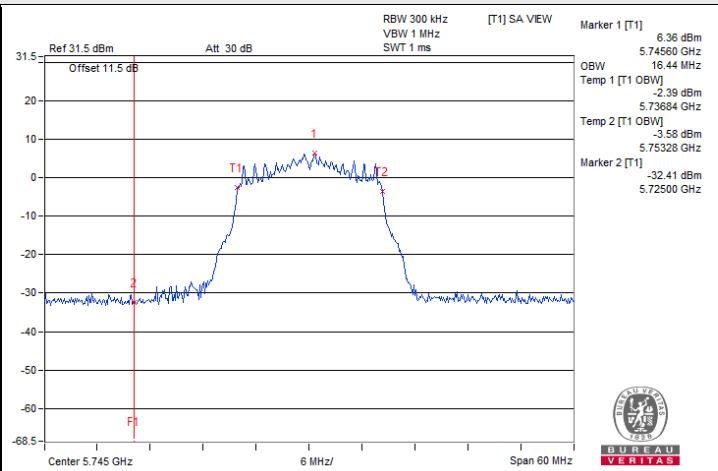


802.11a / Chain 1 : CH 149

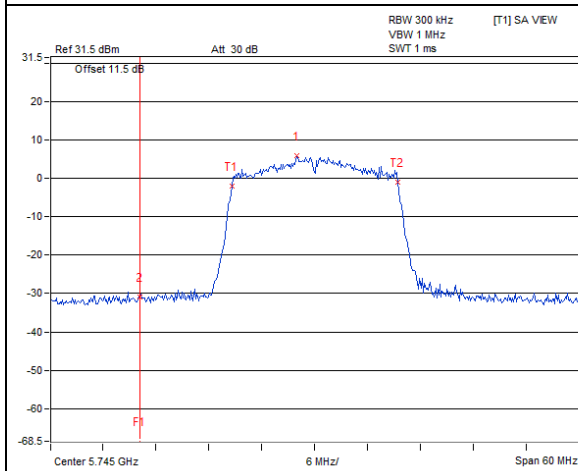


802.11ax (HE20) / Chain 0 : CH 149

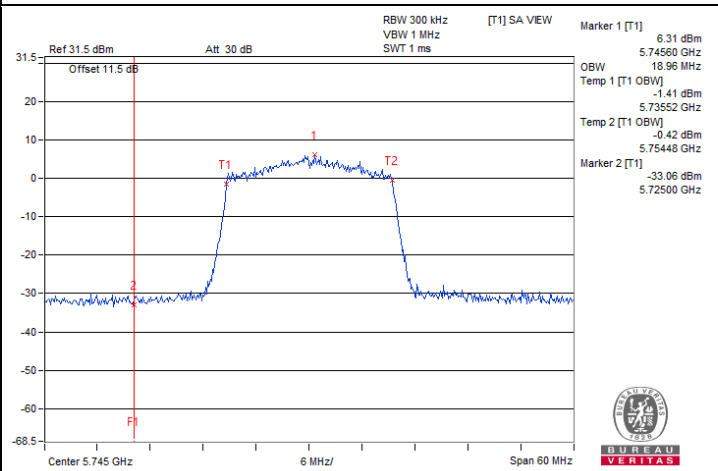

802.11ax (HE20) / Chain 1 : CH 149


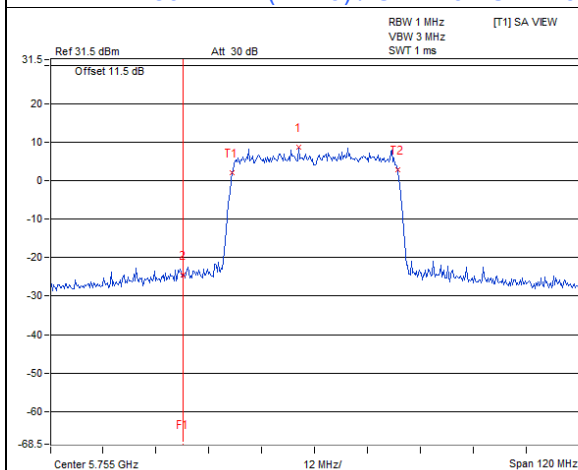


802.11ax (HE40) / Chain 0 : CH 151

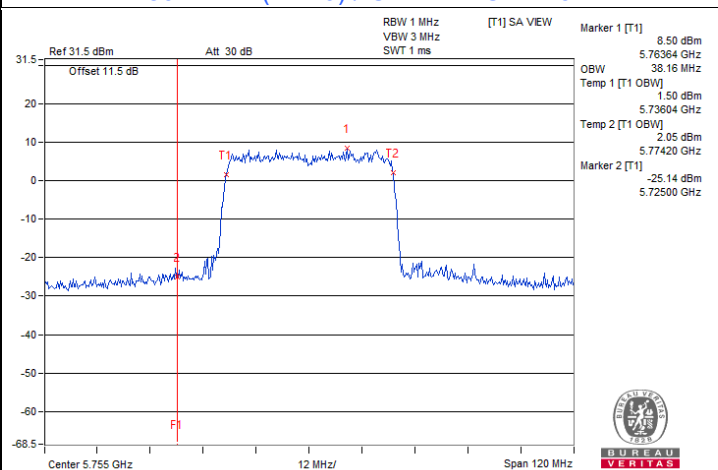

802.11ax (HE40) / Chain 1 : CH 151

Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C)

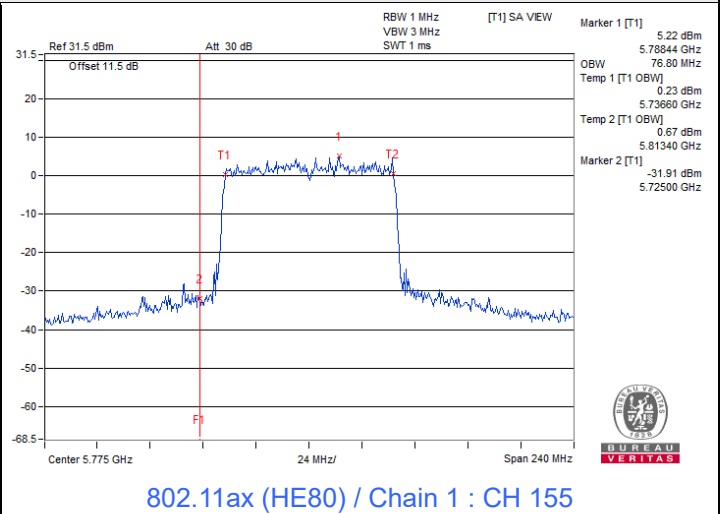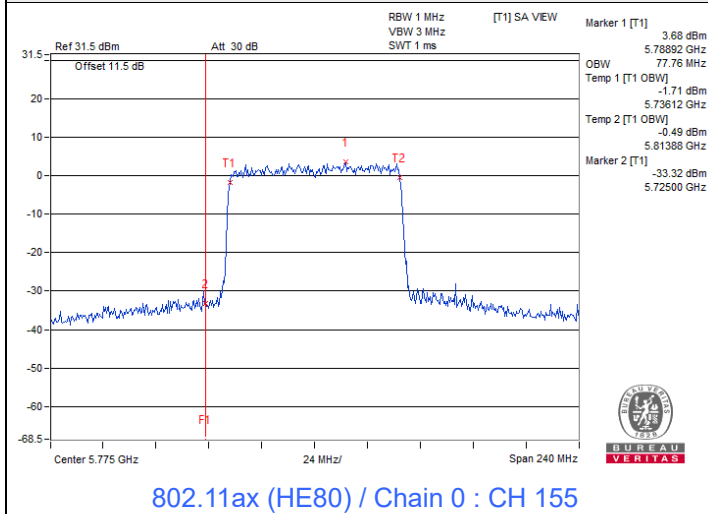


7.6 AC Power Conducted Emissions

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.10	43.81	30.26	53.91	40.36	66.00	56.00	-12.09	-15.64
2	0.16579	10.10	40.97	26.93	51.07	37.03	65.17	55.17	-14.10	-18.14
3	0.63382	10.12	33.07	30.62	43.19	40.74	56.00	46.00	-12.81	-5.26
4	1.26600	10.15	25.88	22.54	36.03	32.69	56.00	46.00	-19.97	-13.31
5	9.31800	10.30	37.84	29.23	48.14	39.53	60.00	50.00	-11.86	-10.47
6	12.12600	10.36	35.15	29.38	45.51	39.74	60.00	50.00	-14.49	-10.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

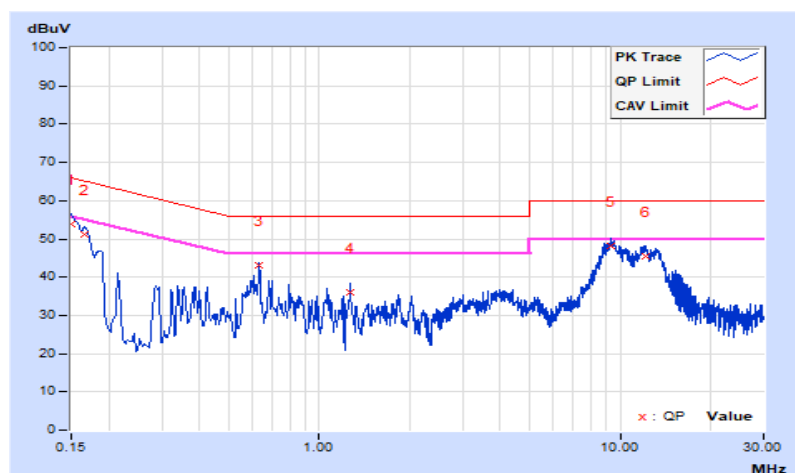


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.13	44.25	30.72	54.38	40.85	66.00	56.00	-11.62	-15.15
2	0.19400	10.14	32.98	17.68	43.12	27.82	63.86	53.86	-20.74	-26.04
3	0.63382	10.15	32.03	29.36	42.18	39.51	56.00	46.00	-13.82	-6.49
4	4.05000	10.29	23.10	17.40	33.39	27.69	56.00	46.00	-22.61	-18.31
5	9.21800	10.36	37.97	29.14	48.33	39.50	60.00	50.00	-11.67	-10.50
6	11.95800	10.43	35.54	29.67	45.97	40.10	60.00	50.00	-14.03	-9.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

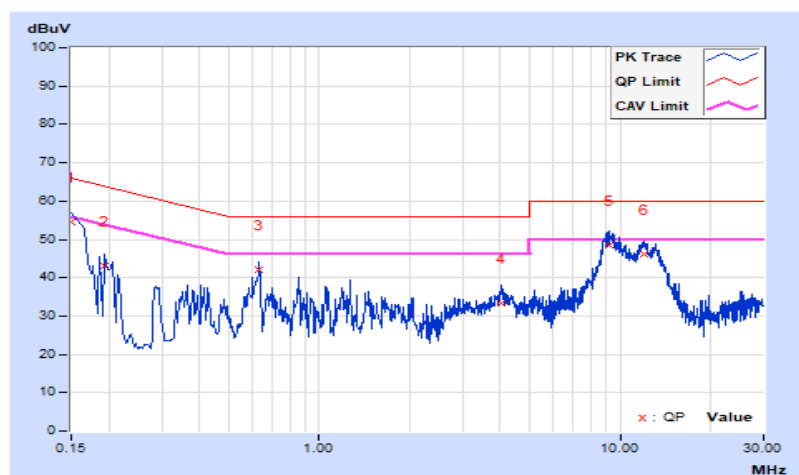


7.7 Unwanted Emissions below 1 GHz

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	95.96	34.1 QP	43.5	-9.4	1.00 H	169	48.0	-13.9
2	144.46	34.2 QP	43.5	-9.3	2.00 H	224	42.9	-8.7
3	233.70	40.5 QP	46.0	-5.5	1.00 H	51	50.6	-10.1
4	304.51	34.9 QP	46.0	-11.1	1.50 H	285	41.6	-6.7
5	376.29	32.9 QP	46.0	-13.1	2.00 H	303	38.3	-5.4
6	593.57	31.3 QP	46.0	-14.7	1.00 H	319	32.5	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

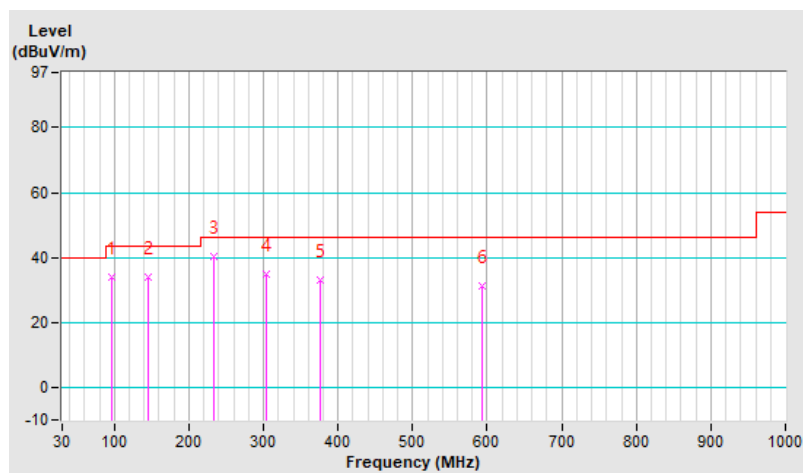


RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.25	33.9 QP	40.0	-6.1	1.00 V	350	43.1	-9.2
2	106.63	33.0 QP	43.5	-10.5	1.00 V	168	45.2	-12.2
3	167.74	34.1 QP	43.5	-9.4	1.50 V	96	42.6	-8.5
4	233.70	36.1 QP	46.0	-9.9	1.50 V	82	46.2	-10.1
5	304.51	37.0 QP	46.0	-9.0	1.00 V	133	43.7	-6.7
6	500.45	35.9 QP	46.0	-10.1	1.00 V	178	39.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

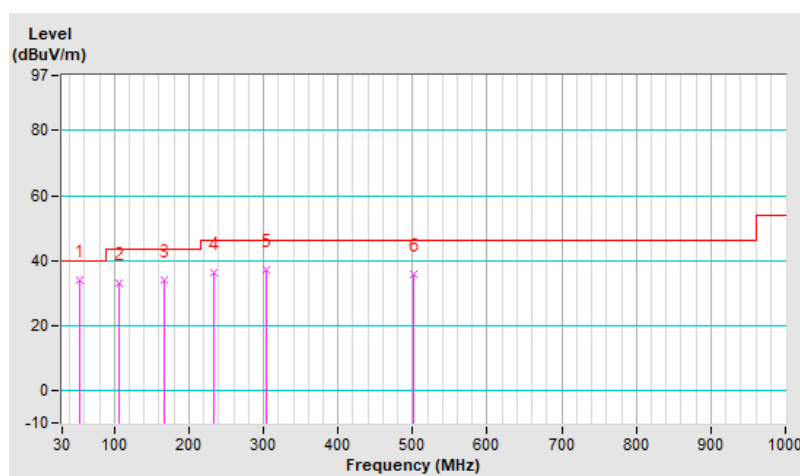

7.8 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	3.75 H	187	62.7	5.5
2	5150.00	45.8 AV	54.0	-8.2	3.75 H	187	40.3	5.5
3	*5180.00	110.6 PK			3.75 H	187	70.9	39.7
4	*5180.00	101.6 AV			3.75 H	187	61.9	39.7
5	#10360.00	57.7 PK	68.2	-10.5	2.79 H	245	41.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.5 PK	74.0	-4.5	1.40 V	64	64.0	5.5
2	5150.00	46.5 AV	54.0	-7.5	1.40 V	64	41.0	5.5
3	*5180.00	113.9 PK			1.40 V	64	74.2	39.7
4	*5180.00	104.5 AV			1.40 V	64	64.8	39.7
5	#10360.00	57.9 PK	68.2	-10.3	1.89 V	126	41.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.7 PK			3.49 H	202	72.1	39.6
2	*5200.00	103.0 AV			3.49 H	202	63.4	39.6
3	#10400.00	57.0 PK	68.2	-11.2	2.79 H	244	40.5	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	113.0 PK			1.25 V	64	73.4	39.6
2	*5200.00	103.5 AV			1.25 V	64	63.9	39.6
3	#10400.00	58.1 PK	68.2	-10.1	1.93 V	131	41.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.0 PK			3.35 H	202	71.7	39.3
2	*5240.00	101.9 AV			3.35 H	202	62.6	39.3
3	5350.00	55.8 PK	74.0	-18.2	3.35 H	202	50.8	5.0
4	5350.00	42.6 AV	54.0	-11.4	3.35 H	202	37.6	5.0
5	#10480.00	57.6 PK	68.2	-10.6	2.79 H	246	41.1	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.0 PK			1.17 V	64	72.7	39.3
2	*5240.00	102.5 AV			1.17 V	64	63.2	39.3
3	5350.00	56.2 PK	74.0	-17.8	1.17 V	64	51.2	5.0
4	5350.00	42.7 AV	54.0	-11.3	1.17 V	64	37.7	5.0
5	#10480.00	58.0 PK	68.2	-10.2	1.84 V	122	41.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.7 PK	74.0	-12.3	3.26 H	201	56.2	5.5
2	5150.00	44.8 AV	54.0	-9.2	3.26 H	201	39.3	5.5
3	*5180.00	112.5 PK			3.26 H	201	72.8	39.7
4	*5180.00	101.0 AV			3.26 H	201	61.3	39.7
5	#10360.00	58.0 PK	68.2	-10.2	2.82 H	244	41.5	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.8 PK	74.0	-4.2	1.40 V	64	64.3	5.5
2	5150.00	48.4 AV	54.0	-5.6	1.40 V	64	42.9	5.5
3	*5180.00	113.4 PK			1.40 V	64	73.7	39.7
4	*5180.00	101.3 AV			1.40 V	64	61.6	39.7
5	#10360.00	58.3 PK	68.2	-9.9	1.93 V	136	41.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.8 PK			3.24 H	200	72.2	39.6
2	*5200.00	100.6 AV			3.24 H	200	61.0	39.6
3	#10400.00	57.5 PK	68.2	-10.7	2.77 H	243	41.0	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	112.4 PK			1.34 V	63	72.8	39.6
2	*5200.00	100.7 AV			1.34 V	63	61.1	39.6
3	#10400.00	57.8 PK	68.2	-10.4	1.87 V	128	41.3	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.0 PK			3.15 H	201	72.7	39.3
2	*5240.00	100.3 AV			3.15 H	201	61.0	39.3
3	5350.00	55.8 PK	74.0	-18.2	3.15 H	201	50.8	5.0
4	5350.00	42.4 AV	54.0	-11.6	3.15 H	201	37.4	5.0
5	#10480.00	57.7 PK	68.2	-10.5	2.76 H	242	41.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.5 PK			1.31 V	63	73.2	39.3
2	*5240.00	100.5 AV			1.31 V	63	61.2	39.3
3	5350.00	56.0 PK	74.0	-18.0	1.31 V	63	51.0	5.0
4	5350.00	42.5 AV	54.0	-11.5	1.31 V	63	37.5	5.0
5	#10480.00	58.0 PK	68.2	-10.2	1.79 V	130	41.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	3.15 H	201	58.5	5.5
2	5150.00	49.1 AV	54.0	-4.9	3.15 H	201	43.6	5.5
3	*5190.00	107.3 PK			3.15 H	201	67.6	39.7
4	*5190.00	94.7 AV			3.15 H	201	55.0	39.7
5	#10380.00	57.1 PK	68.2	-11.1	2.78 H	245	40.5	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.36 V	64	58.7	5.5
2	5150.00	50.5 AV	54.0	-3.5	1.36 V	64	45.0	5.5
3	*5190.00	107.5 PK			1.36 V	64	67.8	39.7
4	*5190.00	94.8 AV			1.36 V	64	55.1	39.7
5	#10380.00	57.5 PK	68.2	-10.7	1.82 V	135	40.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	108.6 PK			3.46 H	201	69.3	39.3
2	*5230.00	96.0 AV			3.46 H	201	56.7	39.3
3	5350.00	56.0 PK	74.0	-18.0	3.46 H	201	51.0	5.0
4	5350.00	42.7 AV	54.0	-11.3	3.46 H	201	37.7	5.0
5	#10460.00	57.8 PK	68.2	-10.4	2.75 H	244	41.4	16.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	109.0 PK			1.35 V	64	69.7	39.3
2	*5230.00	96.2 AV			1.35 V	64	56.9	39.3
3	5350.00	56.2 PK	74.0	-17.8	1.35 V	64	51.2	5.0
4	5350.00	42.8 AV	54.0	-11.2	1.35 V	64	37.8	5.0
5	#10460.00	58.3 PK	68.2	-9.9	1.90 V	130	41.9	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	3.17 H	201	58.5	5.5
2	5150.00	49.9 AV	54.0	-4.1	3.17 H	201	44.4	5.5
3	*5210.00	105.2 PK			3.46 H	200	65.6	39.6
4	*5210.00	92.6 AV			3.46 H	200	53.0	39.6
5	#10420.00	57.0 PK	68.2	-11.2	2.77 H	245	40.5	16.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.33 V	65	58.7	5.5
2	5150.00	50.0 AV	54.0	-4.0	1.33 V	65	44.5	5.5
3	*5210.00	105.5 PK			1.33 V	65	65.9	39.6
4	*5210.00	92.7 AV			1.33 V	65	53.1	39.6
5	#10420.00	57.2 PK	68.2	-11.0	1.77 V	128	40.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	3.60 H	200	51.8	5.5
2	5150.00	43.1 AV	54.0	-10.9	3.60 H	200	37.6	5.5
3	*5260.00	109.8 PK			3.60 H	200	70.6	39.2
4	*5260.00	101.2 AV			3.60 H	200	62.0	39.2
5	#10520.00	57.1 PK	68.2	-11.1	2.77 H	243	40.6	16.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.51 V	62	52.0	5.5
2	5150.00	43.3 AV	54.0	-10.7	1.51 V	62	37.8	5.5
3	*5260.00	110.1 PK			1.51 V	62	70.9	39.2
4	*5260.00	101.4 AV			1.51 V	62	62.2	39.2
5	#10520.00	57.3 PK	68.2	-10.9	1.88 V	124	40.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	109.7 PK			3.59 H	202	70.6	39.1
2	*5300.00	101.1 AV			3.59 H	202	62.0	39.1
3	10600.00	58.0 PK	74.0	-16.0	2.82 H	244	41.0	17.0
4	10600.00	45.4 AV	54.0	-8.6	2.82 H	244	28.4	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.1 PK			1.64 V	68	71.0	39.1
2	*5300.00	101.3 AV			1.64 V	68	62.2	39.1
3	10600.00	58.2 PK	74.0	-15.8	1.89 V	124	41.2	17.0
4	10600.00	45.6 AV	54.0	-8.4	1.89 V	124	28.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.0 PK			3.24 H	202	70.8	39.2
2	*5320.00	101.7 AV			3.24 H	202	62.5	39.2
3	5350.00	56.5 PK	74.0	-17.5	3.24 H	202	51.5	5.0
4	5350.00	43.6 AV	54.0	-10.4	3.24 H	202	38.6	5.0
5	10640.00	58.0 PK	74.0	-16.0	2.76 H	249	41.0	17.0
6	10640.00	45.3 AV	54.0	-8.7	2.76 H	249	28.3	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.6 PK			1.64 V	69	71.4	39.2
2	*5320.00	101.8 AV			1.64 V	69	62.6	39.2
3	5350.00	56.7 PK	74.0	-17.3	1.64 V	69	51.7	5.0
4	5350.00	44.7 AV	54.0	-9.3	1.64 V	69	39.7	5.0
5	10640.00	58.3 PK	74.0	-15.7	2.92 V	128	41.3	17.0
6	10640.00	45.6 AV	54.0	-8.4	2.92 V	128	28.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	3.13 H	202	51.5	5.5
2	5150.00	43.1 AV	54.0	-10.9	3.13 H	202	37.6	5.5
3	*5260.00	112.9 PK			3.13 H	202	73.7	39.2
4	*5260.00	100.5 AV			3.13 H	202	61.3	39.2
5	#10520.00	57.5 PK	68.2	-10.7	2.73 H	245	41.0	16.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.35 V	66	51.6	5.5
2	5150.00	43.3 AV	54.0	-10.7	1.35 V	66	37.8	5.5
3	*5260.00	113.0 PK			1.35 V	66	73.8	39.2
4	*5260.00	100.8 AV			1.35 V	66	61.6	39.2
5	#10520.00	57.6 PK	68.2	-10.6	1.85 V	124	41.1	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.8 PK			3.13 H	202	71.7	39.1
2	*5300.00	99.4 AV			3.13 H	202	60.3	39.1
3	10600.00	58.1 PK	74.0	-15.9	2.75 H	247	41.1	17.0
4	10600.00	45.4 AV	54.0	-8.6	2.75 H	247	28.4	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.4 PK			1.35 V	64	72.3	39.1
2	*5300.00	99.6 AV			1.35 V	64	60.5	39.1
3	10600.00	58.3 PK	74.0	-15.7	1.88 V	124	41.3	17.0
4	10600.00	45.6 AV	54.0	-8.4	1.88 V	124	28.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.6 PK			3.08 H	202	71.4	39.2
2	*5320.00	98.7 AV			3.08 H	202	59.5	39.2
3	5350.00	57.2 PK	74.0	-16.8	3.08 H	202	52.2	5.0
4	5350.00	43.9 AV	54.0	-10.1	3.08 H	202	38.9	5.0
5	10640.00	58.0 PK	74.0	-16.0	2.78 H	245	41.0	17.0
6	10640.00	45.4 AV	54.0	-8.6	2.78 H	245	28.4	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.2 PK			1.32 V	68	72.0	39.2
2	*5320.00	100.0 AV			1.32 V	68	60.8	39.2
3	5350.00	58.0 PK	74.0	-16.0	1.32 V	68	53.0	5.0
4	5350.00	44.6 AV	54.0	-9.4	1.32 V	68	39.6	5.0
5	10640.00	58.2 PK	74.0	-15.8	1.90 V	125	41.2	17.0
6	10640.00	45.6 AV	54.0	-8.4	1.90 V	125	28.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	3.17 H	202	50.5	5.5
2	5150.00	43.8 AV	54.0	-10.2	3.17 H	202	38.3	5.5
3	*5270.00	108.4 PK			3.17 H	202	69.2	39.2
4	*5270.00	95.8 AV			3.17 H	202	56.6	39.2
5	#10540.00	57.1 PK	68.2	-11.1	2.79 H	244	40.5	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.35 V	64	50.7	5.5
2	5150.00	44.0 AV	54.0	-10.0	1.35 V	64	38.5	5.5
3	*5270.00	108.6 PK			1.35 V	64	69.4	39.2
4	*5270.00	96.4 AV			1.35 V	64	57.2	39.2
5	#10540.00	57.4 PK	68.2	-10.8	1.92 V	126	40.8	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.2 PK			3.14 H	202	67.0	39.2
2	*5310.00	94.3 AV			3.14 H	202	55.1	39.2
3	5350.00	62.2 PK	74.0	-11.8	3.14 H	202	57.2	5.0
4	5350.00	48.6 AV	54.0	-5.4	3.14 H	202	43.6	5.0
5	10620.00	58.0 PK	74.0	-16.0	2.76 H	247	41.0	17.0
6	10620.00	45.4 AV	54.0	-8.6	2.76 H	247	28.4	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.3 PK			1.40 V	67	67.1	39.2
2	*5310.00	94.5 AV			1.40 V	67	55.3	39.2
3	5350.00	65.6 PK	74.0	-8.4	1.40 V	67	60.6	5.0
4	5350.00	50.5 AV	54.0	-3.5	1.40 V	67	45.5	5.0
5	10620.00	58.1 PK	74.0	-15.9	1.84 V	123	41.1	17.0
6	10620.00	45.6 AV	54.0	-8.4	1.84 V	123	28.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	103.5 PK			3.23 H	202	64.4	39.1
2	*5290.00	91.4 AV			3.23 H	202	52.3	39.1
3	5350.00	60.5 PK	74.0	-13.5	3.23 H	202	55.5	5.0
4	5350.00	48.5 AV	54.0	-5.5	3.23 H	202	43.5	5.0
5	#10580.00	58.0 PK	68.2	-10.2	2.80 H	247	41.0	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	103.6 PK			1.40 V	66	64.5	39.1
2	*5290.00	91.5 AV			1.40 V	66	52.4	39.1
3	5350.00	65.1 PK	74.0	-8.9	1.40 V	66	60.1	5.0
4	5350.00	50.4 AV	54.0	-3.6	1.40 V	66	45.4	5.0
5	#10580.00	58.1 PK	68.2	-10.1	1.87 V	128	41.1	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	3.10 H	206	51.1	5.4
2	5460.00	43.6 AV	54.0	-10.4	3.10 H	206	38.2	5.4
3	#5470.00	58.6 PK	68.2	-9.6	3.10 H	206	53.2	5.4
4	*5500.00	111.0 PK			3.10 H	206	71.1	39.9
5	*5500.00	101.4 AV			3.10 H	206	61.5	39.9
6	11000.00	58.6 PK	74.0	-15.4	2.80 H	246	41.2	17.4
7	11000.00	45.8 AV	54.0	-8.2	2.80 H	246	28.4	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.40 V	68	51.8	5.4
2	5460.00	44.4 AV	54.0	-9.6	1.40 V	68	39.0	5.4
3	#5470.00	61.4 PK	68.2	-6.8	1.40 V	68	56.0	5.4
4	*5500.00	111.8 PK			1.40 V	68	71.9	39.9
5	*5500.00	101.7 AV			1.40 V	68	61.8	39.9
6	11000.00	58.9 PK	74.0	-15.1	1.95 V	124	41.5	17.4
7	11000.00	46.1 AV	54.0	-7.9	1.95 V	124	28.7	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	110.4 PK			3.15 H	202	70.5	39.9
2	*5580.00	101.1 AV			3.15 H	202	61.2	39.9
3	11160.00	57.5 PK	74.0	-16.5	2.76 H	245	40.8	16.7
4	11160.00	45.0 AV	54.0	-9.0	2.76 H	245	28.3	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	110.6 PK			1.35 V	67	70.7	39.9
2	*5580.00	101.4 AV			1.35 V	67	61.5	39.9
3	11160.00	58.0 PK	74.0	-16.0	1.83 V	125	41.3	16.7
4	11160.00	45.3 AV	54.0	-8.7	1.83 V	125	28.6	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.1 PK			2.50 H	200	69.0	40.1
2	*5700.00	100.3 AV			2.50 H	200	60.2	40.1
3	#5725.00	57.1 PK	68.2	-11.1	2.50 H	200	51.3	5.8
4	11400.00	57.3 PK	74.0	-16.7	2.70 H	252	40.2	17.1
5	11400.00	45.2 AV	54.0	-8.8	2.70 H	252	28.1	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.6 PK			1.35 V	44	69.5	40.1
2	*5700.00	100.8 AV			1.35 V	44	60.7	40.1
3	#5725.00	59.3 PK	68.2	-8.9	1.35 V	44	53.5	5.8
4	11400.00	57.8 PK	74.0	-16.2	1.85 V	127	40.7	17.1
5	11400.00	45.8 AV	54.0	-8.2	1.85 V	127	28.7	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.4 PK	68.2	-11.8	2.50 H	200	51.0	5.4
2	*5720.00	109.7 PK			2.50 H	200	69.5	40.2
3	*5720.00	100.9 AV			2.50 H	200	60.7	40.2
4	#5850.00	57.2 PK	68.2	-11.0	2.50 H	200	51.3	5.9
5	11440.00	57.4 PK	74.0	-16.6	2.72 H	252	40.3	17.1
6	11440.00	45.3 AV	54.0	-8.7	2.72 H	252	28.2	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.6 PK	68.2	-11.6	1.34 V	44	51.2	5.4
2	*5720.00	110.8 PK			1.34 V	44	70.6	40.2
3	*5720.00	101.4 AV			1.34 V	44	61.2	40.2
4	#5850.00	57.5 PK	68.2	-10.7	1.34 V	44	51.6	5.9
5	11440.00	57.7 PK	74.0	-16.3	1.86 V	128	40.6	17.1
6	11440.00	45.5 AV	54.0	-8.5	1.86 V	128	28.4	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	3.06 H	205	51.1	5.4
2	5460.00	42.8 AV	54.0	-11.2	3.06 H	205	37.4	5.4
3	#5470.00	57.2 PK	68.2	-11.0	3.06 H	205	51.8	5.4
4	*5500.00	109.1 PK			3.06 H	205	69.2	39.9
5	*5500.00	97.1 AV			3.06 H	205	57.2	39.9
6	11000.00	58.2 PK	74.0	-15.8	2.75 H	241	40.8	17.4
7	11000.00	45.6 AV	54.0	-8.4	2.75 H	241	28.2	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.8 PK	74.0	-17.2	1.73 V	42	51.4	5.4
2	5460.00	42.9 AV	54.0	-11.1	1.73 V	42	37.5	5.4
3	#5470.00	64.9 PK	68.2	-3.3	1.73 V	42	59.5	5.4
4	*5500.00	109.2 PK			1.73 V	42	69.3	39.9
5	*5500.00	97.3 AV			1.73 V	42	57.4	39.9
6	11000.00	58.5 PK	74.0	-15.5	1.86 V	128	41.1	17.4
7	11000.00	45.8 AV	54.0	-8.2	1.86 V	128	28.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	110.1 PK			3.11 H	200	70.2	39.9
2	*5580.00	98.1 AV			3.11 H	200	58.2	39.9
3	11160.00	57.6 PK	74.0	-16.4	2.74 H	256	40.9	16.7
4	11160.00	44.9 AV	54.0	-9.1	2.74 H	256	28.2	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	110.3 PK			1.54 V	43	70.4	39.9
2	*5580.00	98.4 AV			1.54 V	43	58.5	39.9
3	11160.00	57.9 PK	74.0	-16.1	1.90 V	124	41.2	16.7
4	11160.00	45.2 AV	54.0	-8.8	1.90 V	124	28.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.1 PK			3.03 H	204	67.0	40.1
2	*5700.00	95.7 AV			3.03 H	204	55.6	40.1
3	#5725.00	61.5 PK	68.2	-6.7	3.03 H	204	55.7	5.8
4	11400.00	57.8 PK	74.0	-16.2	2.78 H	255	40.7	17.1
5	11400.00	45.5 AV	54.0	-8.5	2.78 H	255	28.4	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.2 PK			1.23 V	43	70.1	40.1
2	*5700.00	98.1 AV			1.23 V	43	58.0	40.1
3	#5725.00	62.8 PK	68.2	-5.4	1.23 V	43	57.0	5.8
4	11400.00	58.3 PK	74.0	-15.7	1.92 V	128	41.2	17.1
5	11400.00	45.7 AV	54.0	-8.3	1.92 V	128	28.6	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.7 PK	68.2	-12.5	2.69 H	202	50.3	5.4
2	*5720.00	109.4 PK			2.69 H	202	69.2	40.2
3	*5720.00	97.4 AV			2.69 H	202	57.2	40.2
4	#5850.00	56.9 PK	68.2	-11.3	2.69 H	202	51.0	5.9
5	11440.00	58.0 PK	74.0	-16.0	2.74 H	250	40.9	17.1
6	11440.00	45.6 AV	54.0	-8.4	2.74 H	250	28.5	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.0 PK	68.2	-12.2	1.28 V	42	50.6	5.4
2	*5720.00	110.6 PK			1.28 V	42	70.4	40.2
3	*5720.00	97.9 AV			1.28 V	42	57.7	40.2
4	#5850.00	57.0 PK	68.2	-11.2	1.28 V	42	51.1	5.9
5	11440.00	58.4 PK	74.0	-15.6	1.80 V	128	41.3	17.1
6	11440.00	45.8 AV	54.0	-8.2	1.80 V	128	28.7	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	2.88 H	203	51.8	5.4
2	5460.00	44.2 AV	54.0	-9.8	2.88 H	203	38.8	5.4
3	#5470.00	62.3 PK	68.2	-5.9	2.88 H	203	56.9	5.4
4	*5510.00	104.1 PK			2.88 H	203	64.2	39.9
5	*5510.00	92.9 AV			2.88 H	203	53.0	39.9
6	11020.00	58.1 PK	74.0	-15.9	2.76 H	254	40.7	17.4
7	11020.00	45.7 AV	54.0	-8.3	2.76 H	254	28.3	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.75 V	42	53.5	5.4
2	5460.00	45.3 AV	54.0	-8.7	1.75 V	42	39.9	5.4
3	#5470.00	64.7 PK	68.2	-3.5	1.75 V	42	59.3	5.4
4	*5510.00	106.3 PK			1.75 V	42	66.4	39.9
5	*5510.00	93.1 AV			1.75 V	42	53.2	39.9
6	11020.00	58.4 PK	74.0	-15.6	1.88 V	127	41.0	17.4
7	11020.00	45.9 AV	54.0	-8.1	1.88 V	127	28.5	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	107.9 PK			2.90 H	202	67.9	40.0
2	*5550.00	94.5 AV			2.90 H	202	54.5	40.0
3	11100.00	57.9 PK	74.0	-16.1	2.74 H	254	40.8	17.1
4	11100.00	45.6 AV	54.0	-8.4	2.74 H	254	28.5	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	108.1 PK			1.62 V	43	68.1	40.0
2	*5550.00	94.8 AV			1.62 V	43	54.8	40.0
3	11100.00	58.3 PK	74.0	-15.7	1.92 V	122	41.2	17.1
4	11100.00	45.8 AV	54.0	-8.2	1.92 V	122	28.7	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	106.9 PK			2.71 H	201	66.8	40.1
2	*5670.00	93.7 AV			2.71 H	201	53.6	40.1
3	#5725.00	57.2 PK	68.2	-11.0	2.71 H	201	51.4	5.8
4	11340.00	57.9 PK	74.0	-16.1	2.72 H	253	40.5	17.4
5	11340.00	45.8 AV	54.0	-8.2	2.72 H	253	28.4	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	107.6 PK			1.29 V	44	67.5	40.1
2	*5670.00	95.3 AV			1.29 V	44	55.2	40.1
3	#5725.00	57.4 PK	68.2	-10.8	1.29 V	44	51.6	5.8
4	11340.00	58.2 PK	74.0	-15.8	1.94 V	126	40.8	17.4
5	11340.00	46.1 AV	54.0	-7.9	1.94 V	126	28.7	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.5 PK	68.2	-11.7	2.72 H	201	51.1	5.4
2	*5710.00	105.5 PK			2.72 H	201	65.3	40.2
3	*5710.00	93.3 AV			2.72 H	201	53.1	40.2
4	#5850.00	57.4 PK	68.2	-10.8	2.72 H	201	51.5	5.9
5	11420.00	57.5 PK	74.0	-16.5	2.72 H	258	40.4	17.1
6	11420.00	45.4 AV	54.0	-8.6	2.72 H	258	28.3	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.7 PK	68.2	-11.5	1.22 V	44	51.3	5.4
2	*5710.00	107.1 PK			1.22 V	44	66.9	40.2
3	*5710.00	95.0 AV			1.22 V	44	54.8	40.2
4	#5850.00	57.7 PK	68.2	-10.5	1.22 V	44	51.8	5.9
5	11420.00	57.8 PK	74.0	-16.2	1.92 V	128	40.7	17.1
6	11420.00	45.7 AV	54.0	-8.3	1.92 V	128	28.6	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.9 PK	74.0	-14.1	2.86 H	205	54.5	5.4
2	5460.00	47.6 AV	54.0	-6.4	2.86 H	205	42.2	5.4
3	#5470.00	63.2 PK	68.2	-5.0	2.86 H	205	57.8	5.4
4	*5530.00	103.3 PK			2.86 H	205	63.3	40.0
5	*5530.00	90.8 AV			2.86 H	205	50.8	40.0
6	11060.00	57.6 PK	74.0	-16.4	2.72 H	255	40.3	17.3
7	11060.00	45.3 AV	54.0	-8.7	2.72 H	255	28.0	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.4 PK	74.0	-12.6	1.44 V	69	56.0	5.4
2	5460.00	48.4 AV	54.0	-5.6	1.44 V	69	43.0	5.4
3	#5470.00	64.9 PK	68.2	-3.3	1.44 V	69	59.5	5.4
4	*5530.00	103.7 PK			1.44 V	69	63.7	40.0
5	*5530.00	91.0 AV			1.44 V	69	51.0	40.0
6	11060.00	57.9 PK	74.0	-16.1	1.86 V	129	40.6	17.3
7	11060.00	45.5 AV	54.0	-8.5	1.86 V	129	28.2	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	102.3 PK			2.82 H	205	62.3	40.0
2	*5610.00	90.8 AV			2.82 H	205	50.8	40.0
3	#5725.00	59.4 PK	68.2	-8.8	2.82 H	205	53.6	5.8
4	11220.00	57.3 PK	74.0	-16.7	2.74 H	254	40.6	16.7
5	11220.00	45.0 AV	54.0	-9.0	2.74 H	254	28.3	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	104.7 PK			1.66 V	44	64.7	40.0
2	*5610.00	91.9 AV			1.66 V	44	51.9	40.0
3	#5725.00	60.5 PK	68.2	-7.7	1.66 V	44	54.7	5.8
4	11220.00	57.6 PK	74.0	-16.4	1.86 V	123	40.9	16.7
5	11220.00	45.3 AV	54.0	-8.7	1.86 V	123	28.6	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.7 PK	68.2	-11.5	2.67 H	202	51.3	5.4
2	*5690.00	102.7 PK			2.67 H	202	62.5	40.2
3	*5690.00	90.8 AV			2.67 H	202	50.6	40.2
4	#5850.00	57.7 PK	68.2	-10.5	2.67 H	202	51.8	5.9
5	11380.00	58.3 PK	74.0	-15.7	2.77 H	255	41.0	17.3
6	11380.00	45.5 AV	54.0	-8.5	2.77 H	255	28.2	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.0 PK	68.2	-11.2	1.25 V	45	51.6	5.4
2	*5690.00	104.2 PK			1.25 V	45	64.0	40.2
3	*5690.00	92.4 AV			1.25 V	45	52.2	40.2
4	#5850.00	58.0 PK	68.2	-10.2	1.25 V	45	52.1	5.9
5	11380.00	58.6 PK	74.0	-15.4	1.87 V	124	41.3	17.3
6	11380.00	45.8 AV	54.0	-8.2	1.87 V	124	28.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.00	56.5 PK	68.2	-11.7	1.14 H	237	50.7	5.8
2	*5745.00	109.4 PK			1.14 H	237	69.3	40.1
3	*5745.00	100.4 AV			1.14 H	237	60.3	40.1
4	#5965.60	56.9 PK	68.2	-11.3	1.14 H	237	50.7	6.2
5	11490.00	57.5 PK	74.0	-16.5	2.52 H	273	40.6	16.9
6	11490.00	45.1 AV	54.0	-8.9	2.52 H	273	28.2	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	57.1 PK	68.2	-11.1	1.23 V	43	51.3	5.8
2	*5745.00	110.7 PK			1.23 V	43	70.6	40.1
3	*5745.00	101.7 AV			1.23 V	43	61.6	40.1
4	#5934.80	57.8 PK	68.2	-10.4	1.23 V	43	51.7	6.1
5	11490.00	57.7 PK	74.0	-16.3	1.84 V	128	40.8	16.9
6	11490.00	45.3 AV	54.0	-8.7	1.84 V	128	28.4	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.20	57.4 PK	68.2	-10.8	1.30 H	236	51.7	5.7
2	*5785.00	109.3 PK			1.30 H	236	69.3	40.0
3	*5785.00	100.1 AV			1.30 H	236	60.1	40.0
4	#5986.00	58.7 PK	68.2	-9.5	1.30 H	236	52.4	6.3
5	11570.00	57.3 PK	74.0	-16.7	2.61 H	253	40.7	16.6
6	11570.00	44.6 AV	54.0	-9.4	2.61 H	253	28.0	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.80	57.2 PK	68.2	-11.0	1.24 V	43	51.5	5.7
2	*5785.00	110.2 PK			1.24 V	43	70.2	40.0
3	*5785.00	101.0 AV			1.24 V	43	61.0	40.0
4	#5976.00	57.6 PK	68.2	-10.6	1.24 V	43	51.4	6.2
5	11570.00	57.6 PK	74.0	-16.4	1.83 V	122	41.0	16.6
6	11570.00	44.9 AV	54.0	-9.1	1.83 V	122	28.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.20	57.4 PK	68.2	-10.8	1.26 H	236	51.7	5.7
2	*5825.00	108.9 PK			1.26 H	236	68.7	40.2
3	*5825.00	99.4 AV			1.26 H	236	59.2	40.2
4	#5971.60	57.9 PK	68.2	-10.3	1.26 H	236	51.7	6.2
5	11650.00	57.1 PK	74.0	-16.9	2.61 H	270	40.7	16.4
6	11650.00	44.5 AV	54.0	-9.5	2.61 H	270	28.1	16.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.40	58.2 PK	68.2	-10.0	1.26 V	43	52.4	5.8
2	*5825.00	110.1 PK			1.26 V	43	69.9	40.2
3	*5825.00	101.0 AV			1.26 V	43	60.8	40.2
4	#5994.80	58.8 PK	68.2	-9.4	1.26 V	43	52.5	6.3
5	11650.00	57.2 PK	74.0	-16.8	1.84 V	127	40.8	16.4
6	11650.00	44.8 AV	54.0	-9.2	1.84 V	127	28.4	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.20	57.9 PK	68.2	-10.3	1.40 H	235	52.2	5.7
2	*5745.00	109.7 PK			1.40 H	235	69.6	40.1
3	*5745.00	97.5 AV			1.40 H	235	57.4	40.1
4	#5940.40	58.0 PK	68.2	-10.2	1.40 H	235	51.9	6.1
5	11490.00	58.0 PK	74.0	-16.0	2.67 H	255	41.1	16.9
6	11490.00	45.3 AV	54.0	-8.7	2.67 H	255	28.4	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.20	57.1 PK	68.2	-11.1	1.23 V	44	51.4	5.7
2	*5745.00	111.5 PK			1.23 V	44	71.4	40.1
3	*5745.00	98.2 AV			1.23 V	44	58.1	40.1
4	#5981.60	57.8 PK	68.2	-10.4	1.23 V	44	51.5	6.3
5	11490.00	58.2 PK	74.0	-15.8	1.85 V	129	41.3	16.9
6	11490.00	45.5 AV	54.0	-8.5	1.85 V	129	28.6	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.40	57.3 PK	68.2	-10.9	1.27 H	235	51.5	5.8
2	*5785.00	109.2 PK			1.27 H	235	69.2	40.0
3	*5785.00	97.5 AV			1.27 H	235	57.5	40.0
4	#5956.80	57.9 PK	68.2	-10.3	1.27 H	235	51.7	6.2
5	11570.00	57.9 PK	74.0	-16.1	2.67 H	260	41.3	16.6
6	11570.00	44.8 AV	54.0	-9.2	2.67 H	260	28.2	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.60	57.4 PK	68.2	-10.8	1.20 V	70	51.7	5.7
2	*5785.00	109.3 PK			1.20 V	70	69.3	40.0
3	*5785.00	98.2 AV			1.20 V	70	58.2	40.0
4	#5946.00	57.4 PK	68.2	-10.8	1.20 V	70	51.3	6.1
5	11570.00	58.1 PK	74.0	-15.9	1.91 V	125	41.5	16.6
6	11570.00	45.1 AV	54.0	-8.9	1.91 V	125	28.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.00	57.4 PK	68.2	-10.8	1.40 H	235	51.6	5.8
2	*5825.00	109.0 PK			1.40 H	235	68.8	40.2
3	*5825.00	97.4 AV			1.40 H	235	57.2	40.2
4	#5940.40	57.5 PK	68.2	-10.7	1.40 H	235	51.4	6.1
5	11650.00	57.3 PK	74.0	-16.7	2.73 H	265	40.9	16.4
6	11650.00	44.7 AV	54.0	-9.3	2.73 H	265	28.3	16.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.20	57.8 PK	68.2	-10.4	1.40 V	72	52.1	5.7
2	*5825.00	110.5 PK			1.40 V	72	70.3	40.2
3	*5825.00	98.9 AV			1.40 V	72	58.7	40.2
4	#5980.40	57.4 PK	68.2	-10.8	1.40 V	72	51.2	6.2
5	11650.00	57.5 PK	74.0	-16.5	1.88 V	125	41.1	16.4
6	11650.00	45.0 AV	54.0	-9.0	1.88 V	125	28.6	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.60	57.7 PK	68.2	-10.5	1.29 H	235	51.9	5.8
2	*5755.00	106.0 PK			1.29 H	235	65.9	40.1
3	*5755.00	93.4 AV			1.29 H	235	53.3	40.1
4	#5980.40	58.0 PK	68.2	-10.2	1.29 H	235	51.8	6.2
5	11510.00	57.6 PK	74.0	-16.4	2.52 H	264	40.8	16.8
6	11510.00	44.8 AV	54.0	-9.2	2.52 H	264	28.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.40	57.4 PK	68.2	-10.8	1.15 V	43	51.6	5.8
2	*5755.00	106.9 PK			1.15 V	43	66.8	40.1
3	*5755.00	94.7 AV			1.15 V	43	54.6	40.1
4	#5956.80	57.5 PK	68.2	-10.7	1.15 V	43	51.3	6.2
5	11510.00	57.9 PK	74.0	-16.1	1.83 V	122	41.1	16.8
6	11510.00	45.1 AV	54.0	-8.9	1.83 V	122	28.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.00	58.3 PK	68.2	-9.9	1.31 H	237	52.6	5.7
2	*5795.00	105.8 PK			1.31 H	237	65.8	40.0
3	*5795.00	93.4 AV			1.31 H	237	53.4	40.0
4	#5926.00	58.1 PK	68.2	-10.1	1.31 H	237	52.1	6.0
5	11590.00	57.1 PK	74.0	-16.9	2.60 H	254	40.6	16.5
6	11590.00	44.8 AV	54.0	-9.2	2.60 H	254	28.3	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.80	57.5 PK	68.2	-10.7	1.16 V	43	51.7	5.8
2	*5795.00	106.4 PK			1.16 V	43	66.4	40.0
3	*5795.00	94.5 AV			1.16 V	43	54.5	40.0
4	#5958.00	57.3 PK	68.2	-10.9	1.16 V	43	51.1	6.2
5	11590.00	57.2 PK	74.0	-16.8	1.88 V	121	40.7	16.5
6	11590.00	45.1 AV	54.0	-8.9	1.88 V	121	28.6	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.60	57.7 PK	68.2	-10.5	1.32 H	236	51.9	5.8
2	*5775.00	103.4 PK			1.32 H	236	63.4	40.0
3	*5775.00	90.7 AV			1.32 H	236	50.7	40.0
4	#5998.40	57.5 PK	68.2	-10.7	1.32 H	236	51.1	6.4
5	11550.00	57.6 PK	74.0	-16.4	2.67 H	258	40.8	16.8
6	11550.00	45.4 AV	54.0	-8.6	2.67 H	258	28.6	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.80	58.3 PK	68.2	-9.9	1.22 V	43	52.5	5.8
2	*5775.00	103.6 PK			1.22 V	43	63.6	40.0
3	*5775.00	91.5 AV			1.22 V	43	51.5	40.0
4	#5943.20	57.7 PK	68.2	-10.5	1.22 V	43	51.6	6.1
5	11550.00	58.0 PK	74.0	-16.0	1.87 V	129	41.2	16.8
6	11550.00	45.7 AV	54.0	-8.3	1.87 V	129	28.9	16.8


Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Plot of Band Edge


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11a Channel 36

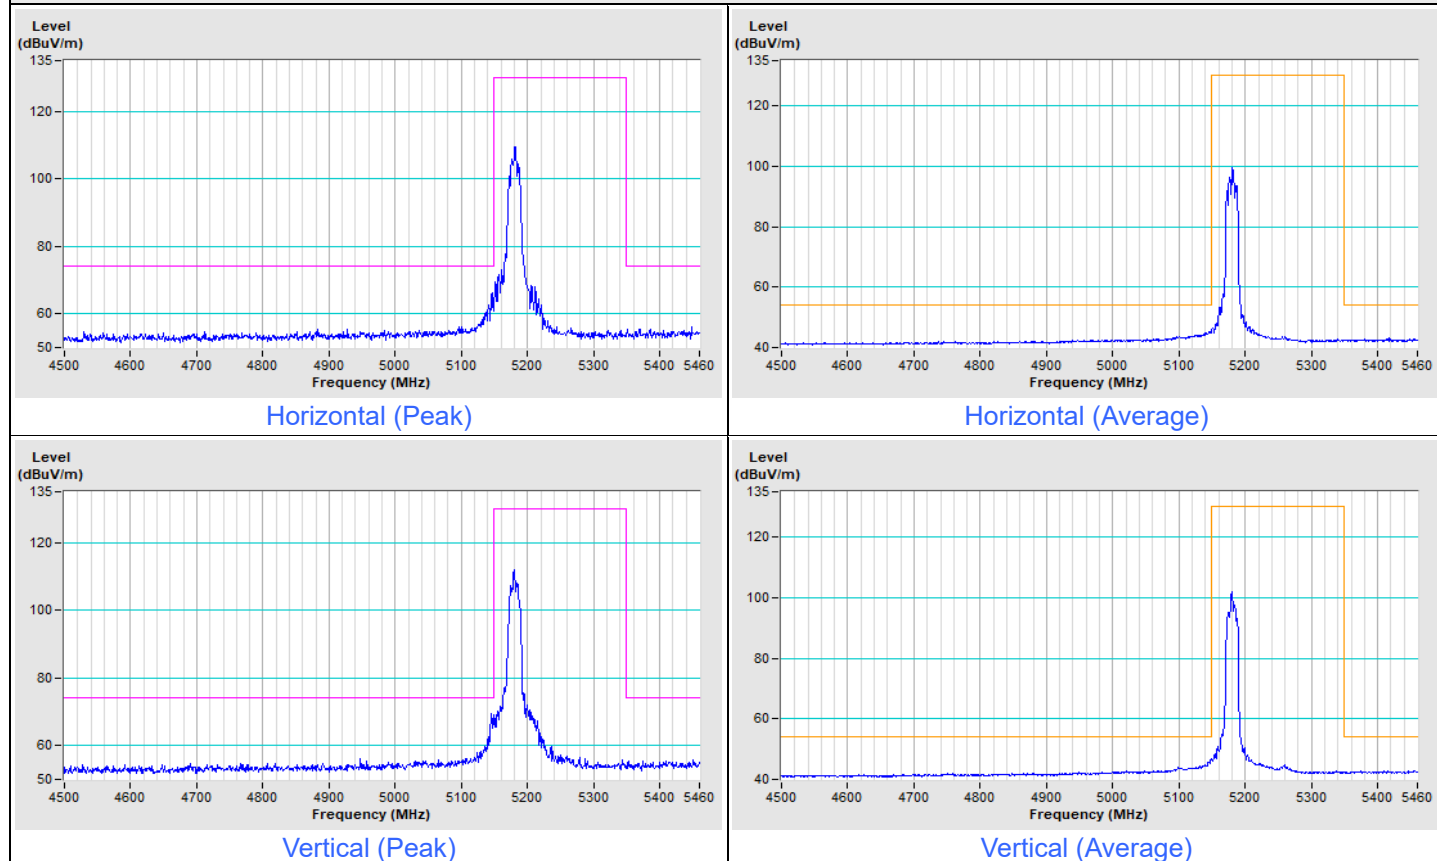


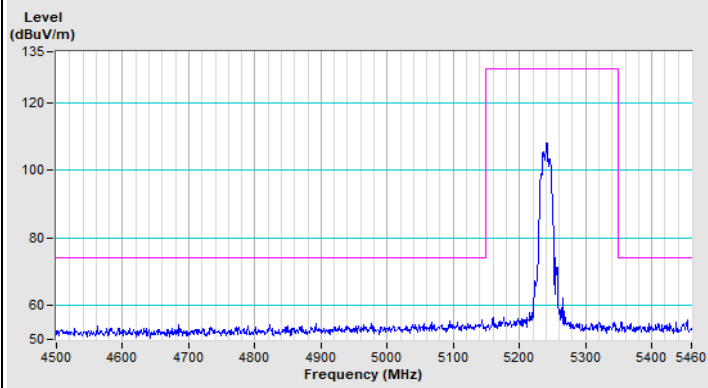802.11a Channel 48


Horizontal (Peak)

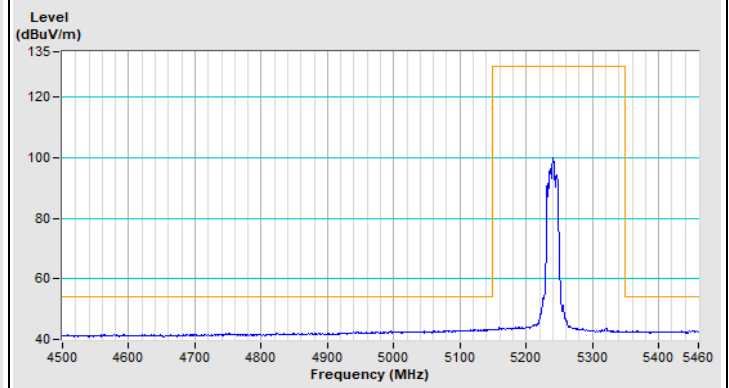

Horizontal (Average)

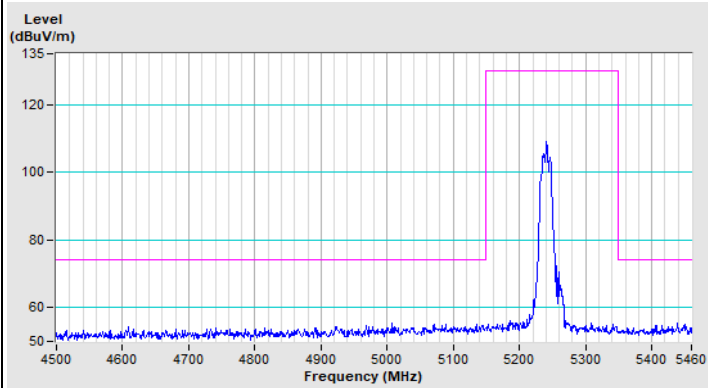


Vertical (Peak)

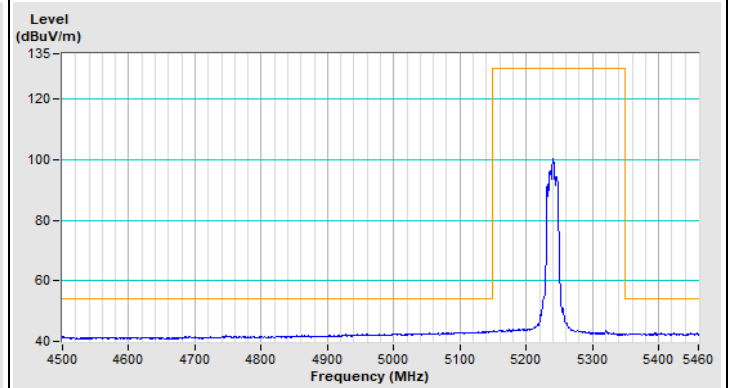


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE20) Channel 36

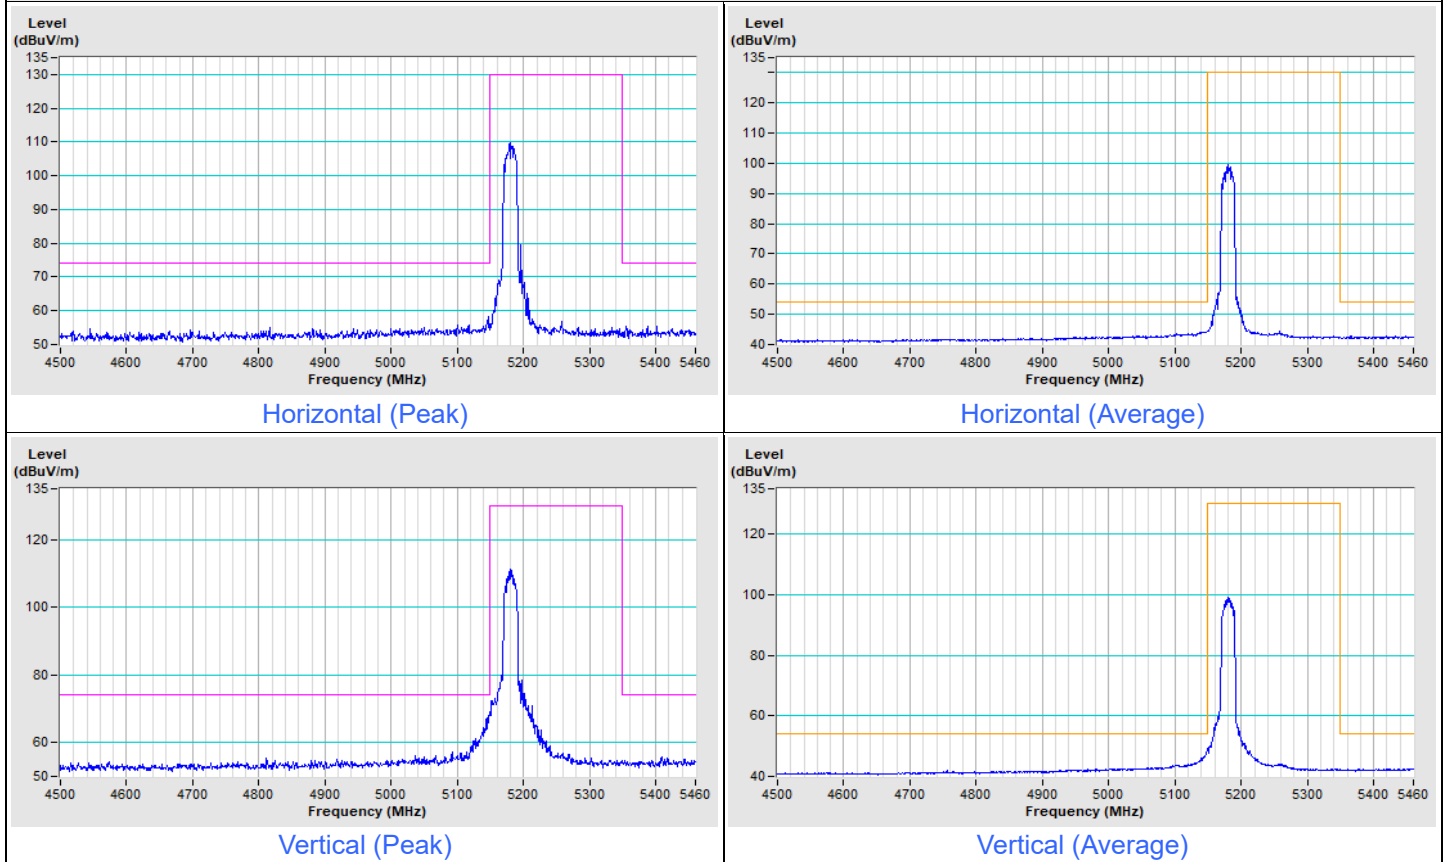


802.11ax (HE20) Channel 48

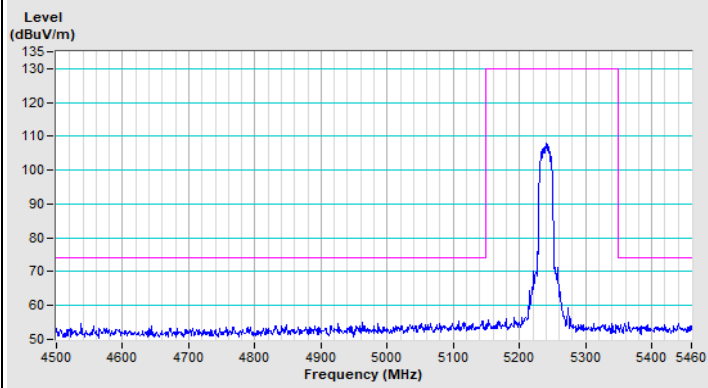


Horizontal (Peak)

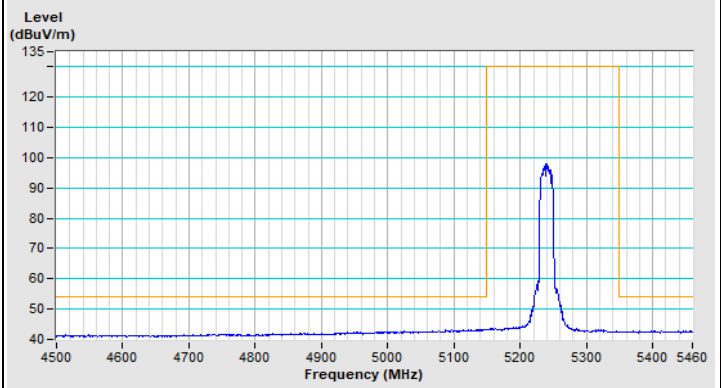

Horizontal (Average)

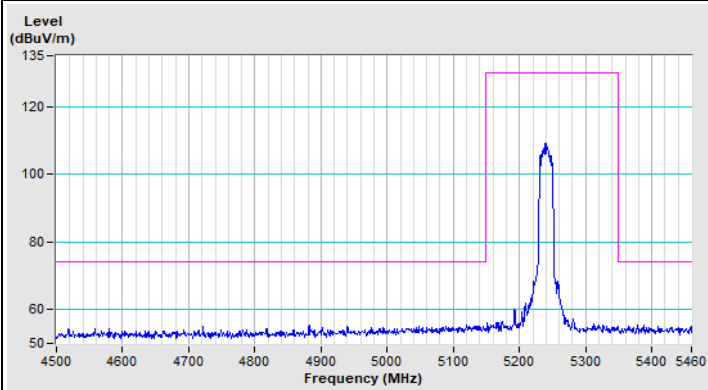


Vertical (Peak)

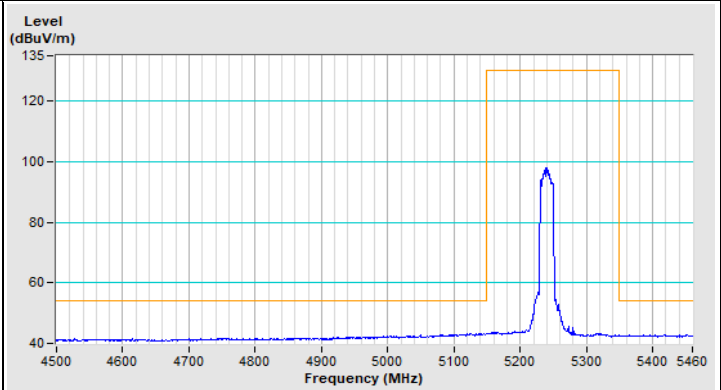


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE40) Channel 38

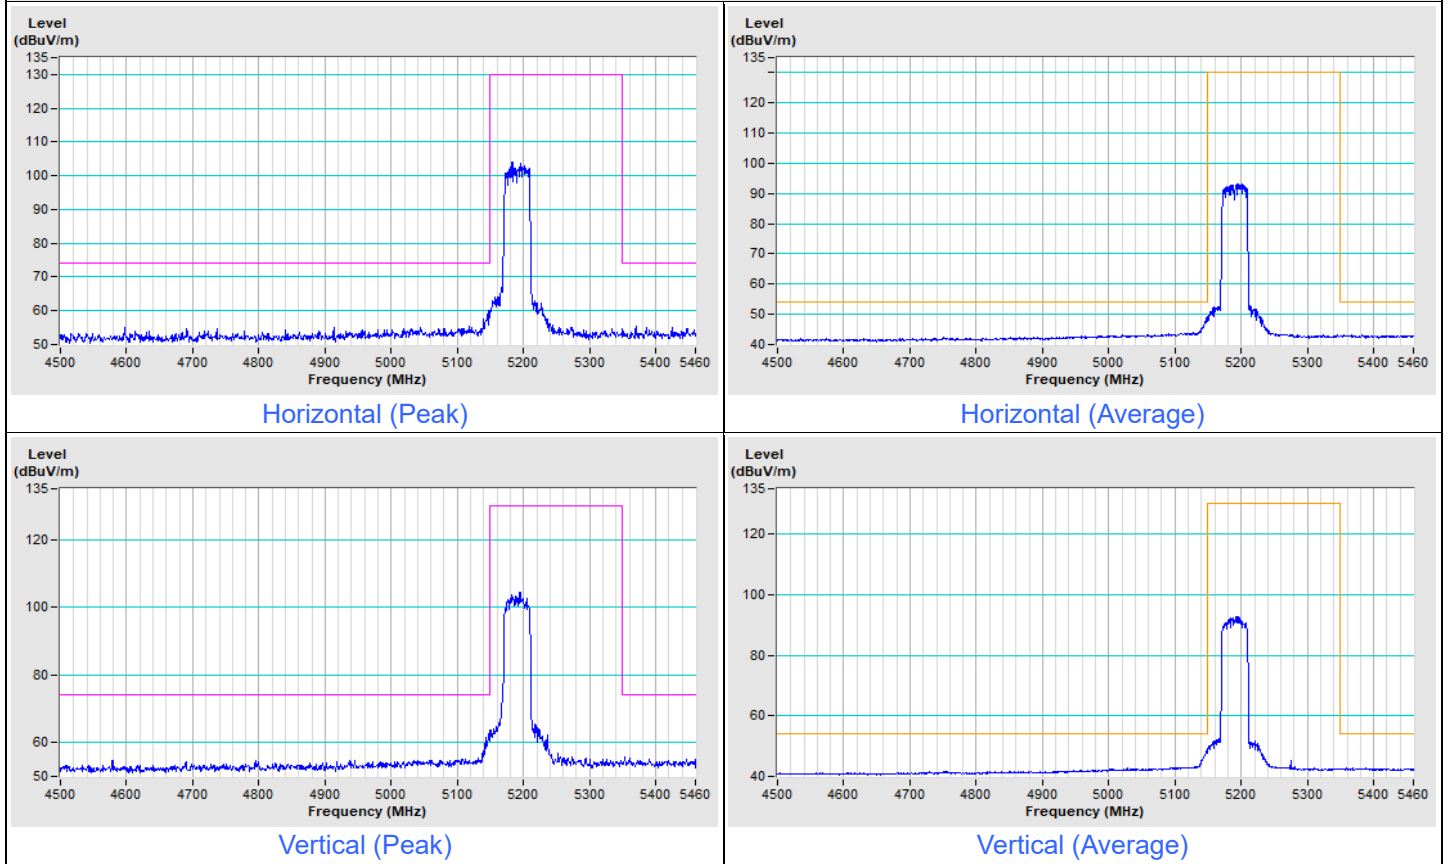


802.11ax (HE40) Channel 46

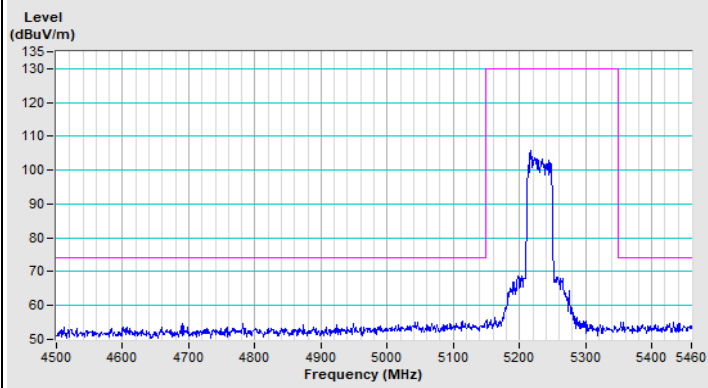


Horizontal (Peak)

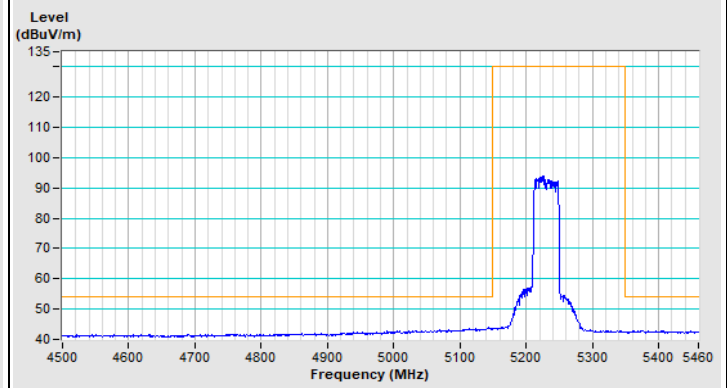

Horizontal (Average)

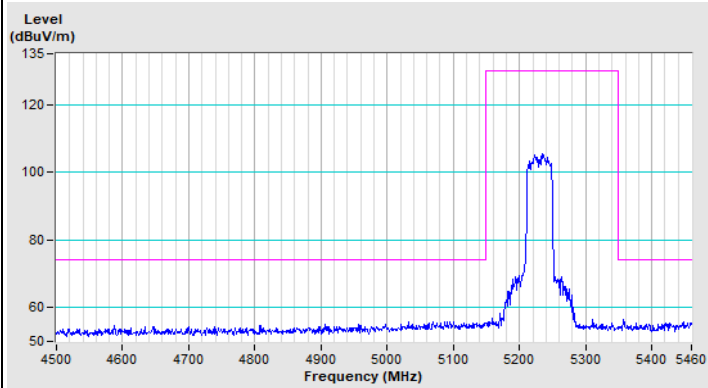


Vertical (Peak)

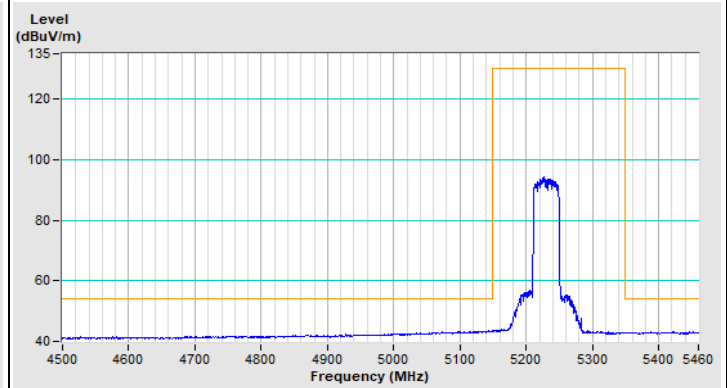

Vertical (Average)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11ax (HE80) Channel 42

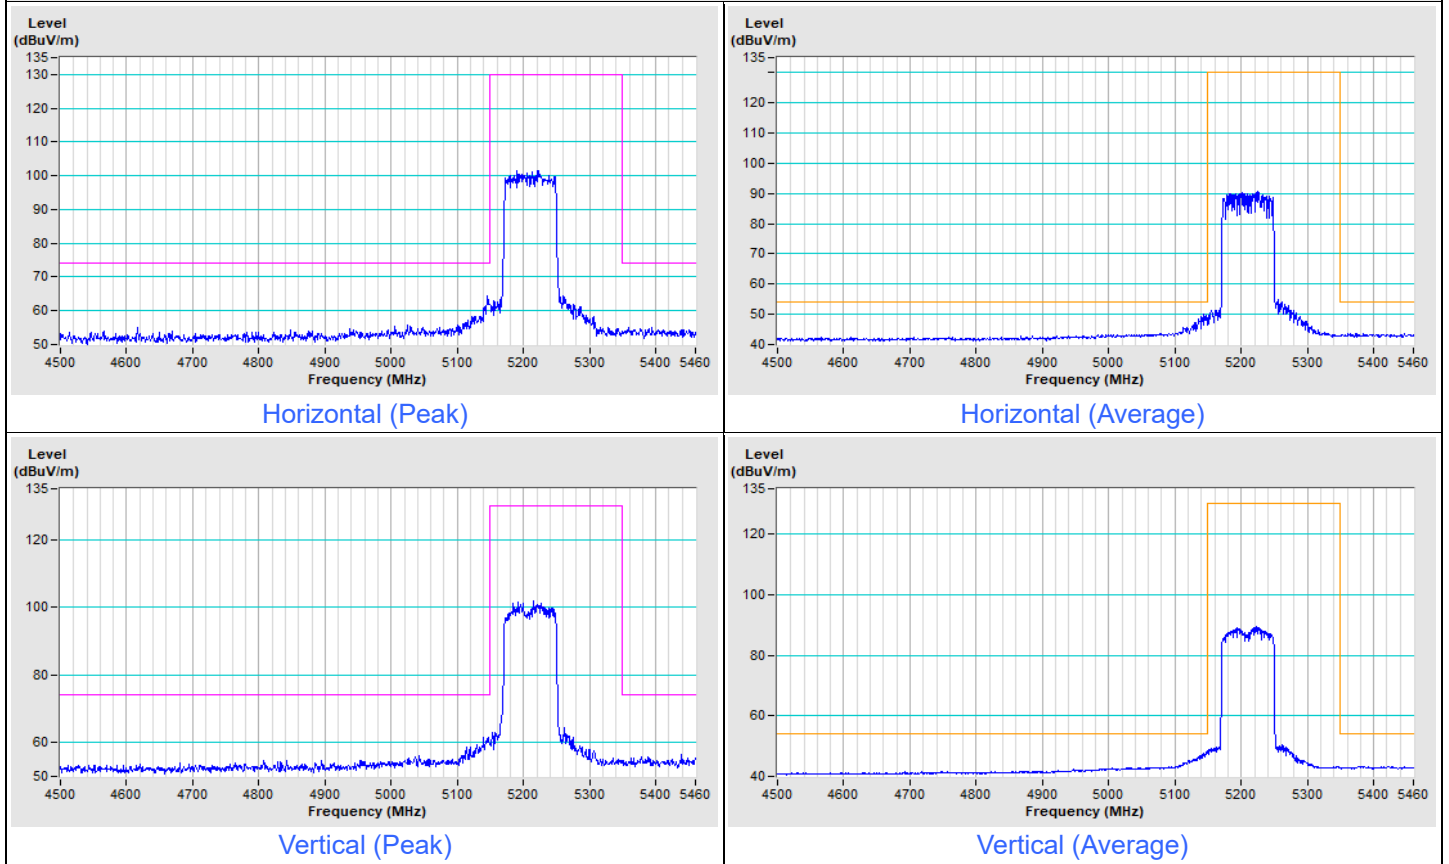


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

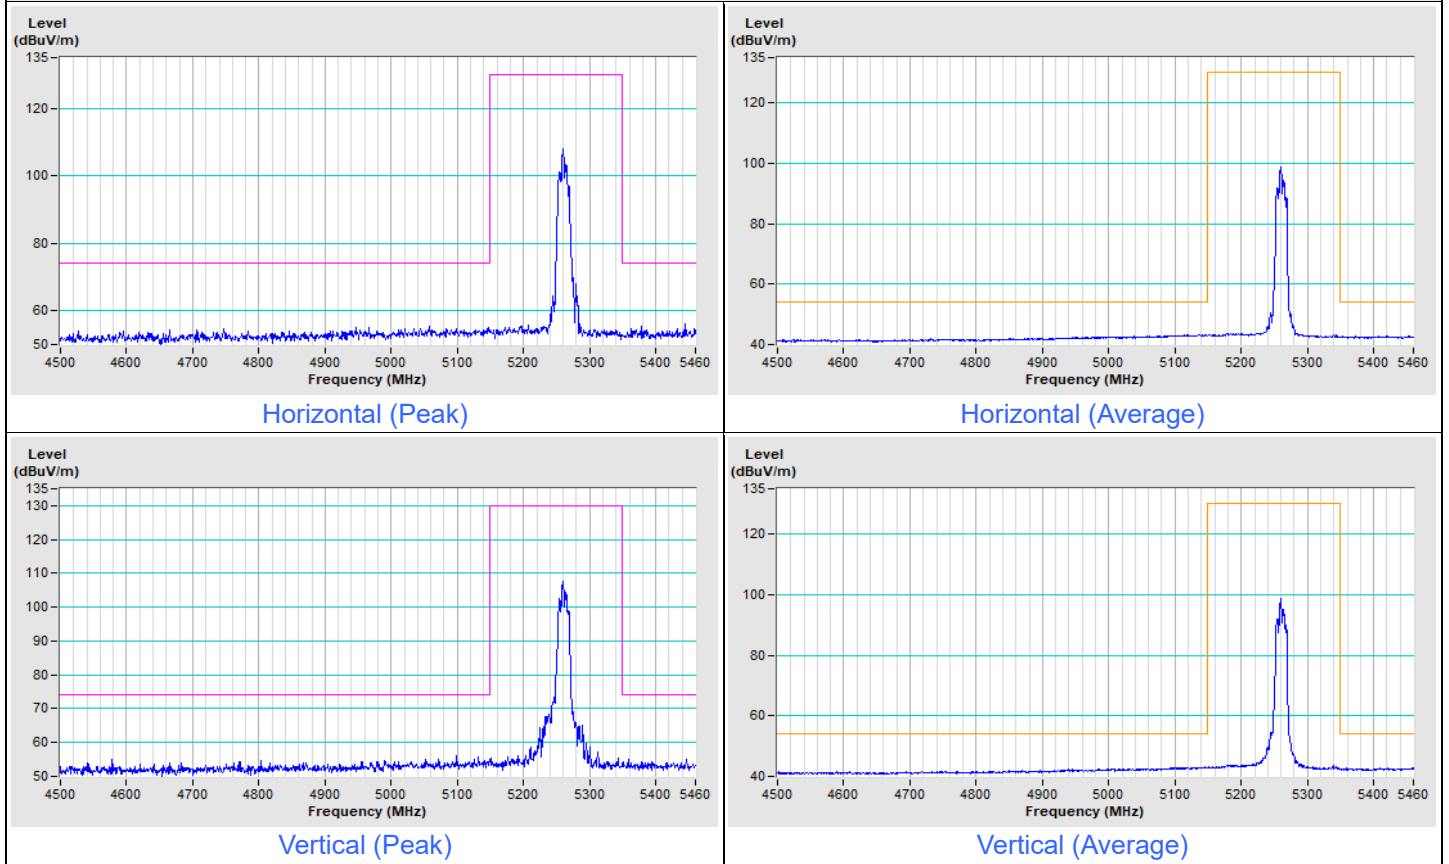


802.11a Channel 64

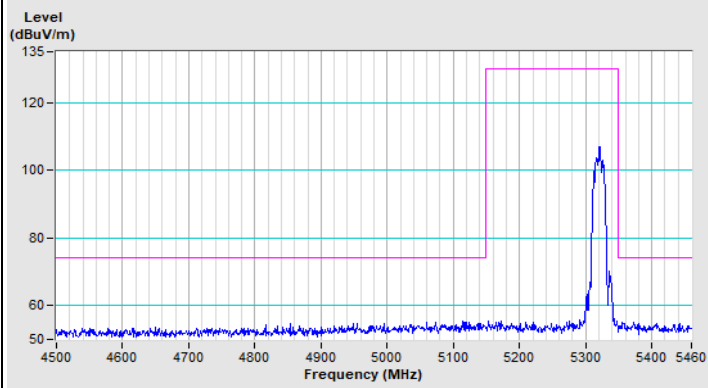


Horizontal (Peak)

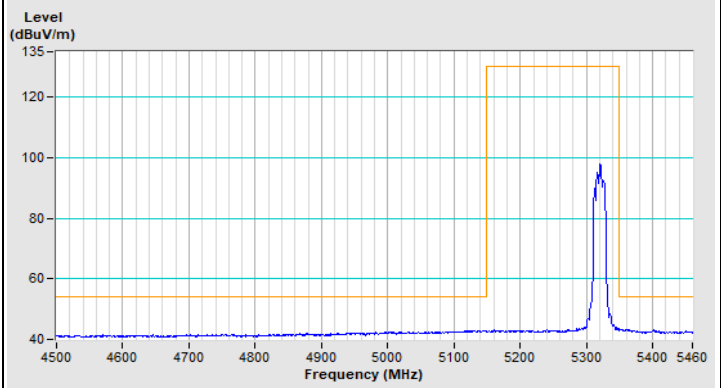

Horizontal (Average)

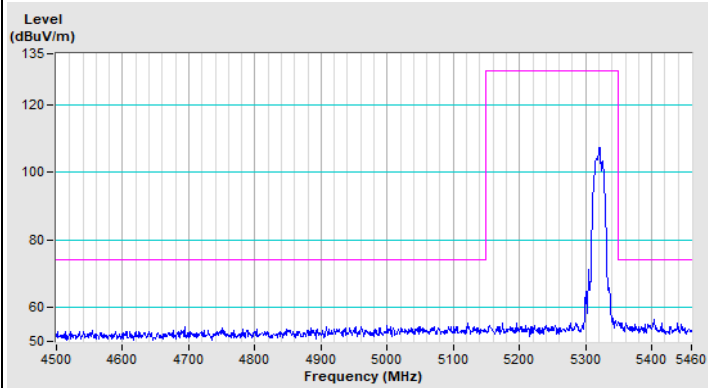


Vertical (Peak)

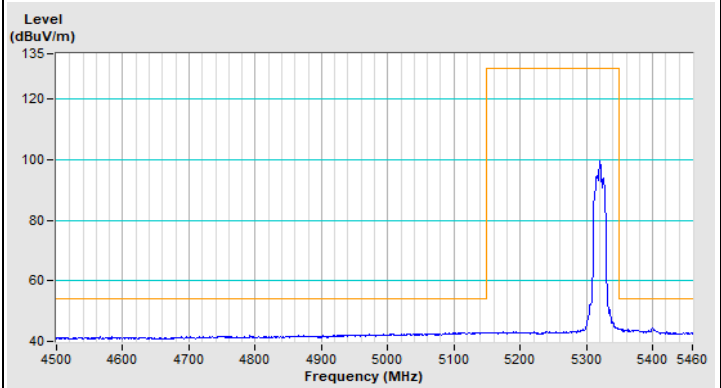


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE20) Channel 52

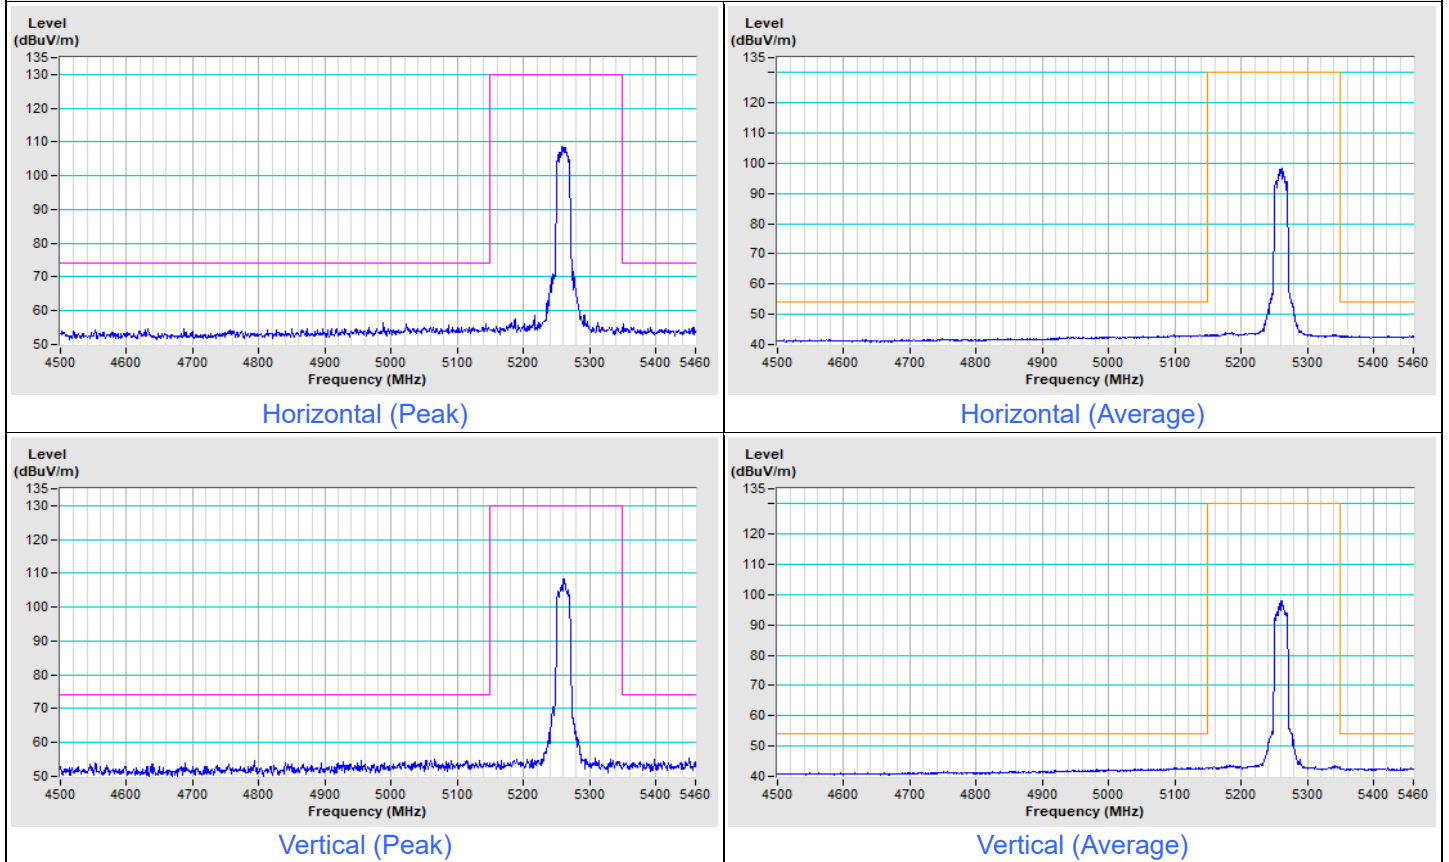


802.11ax (HE20) Channel 64

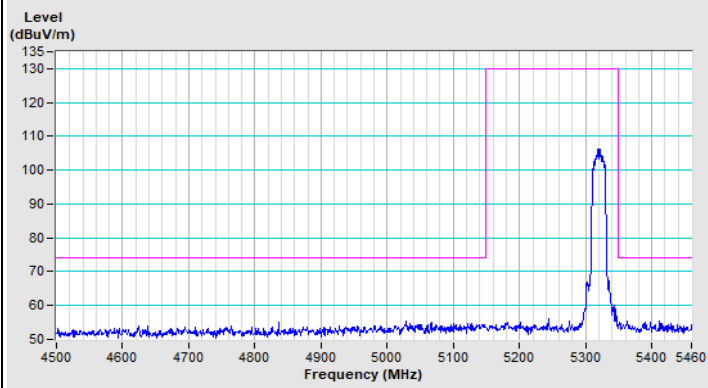


Horizontal (Peak)

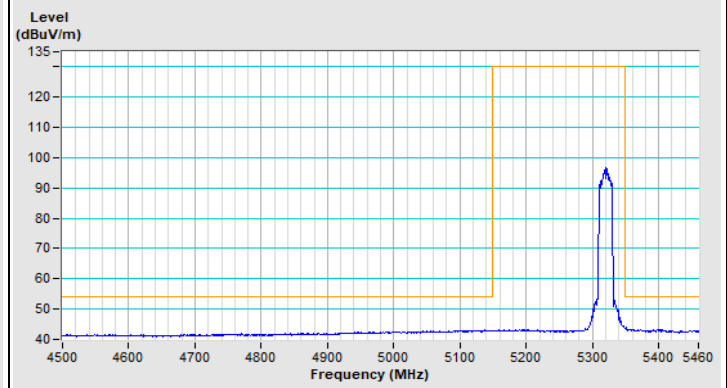

Horizontal (Average)

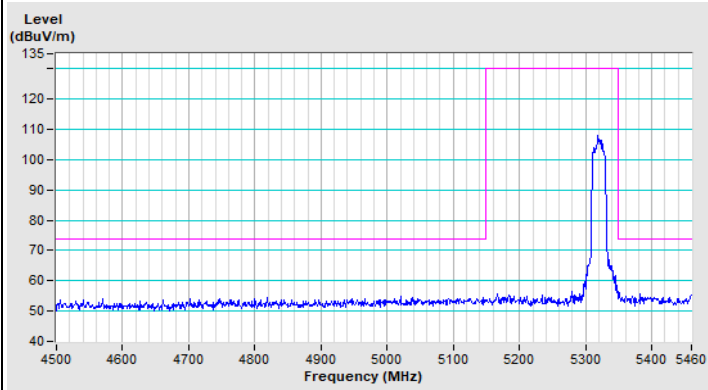


Vertical (Peak)

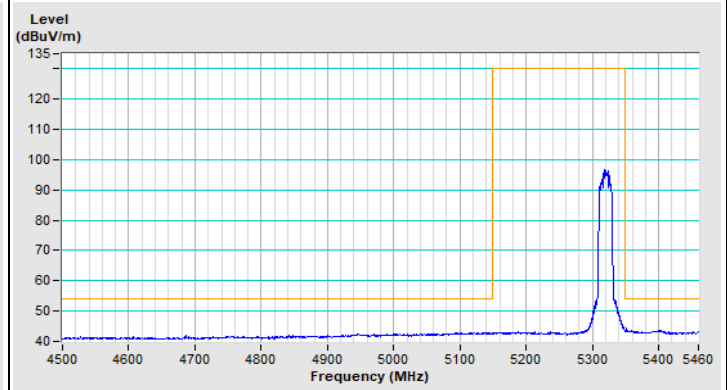


Vertical (Average)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11ax (HE40) Channel 54

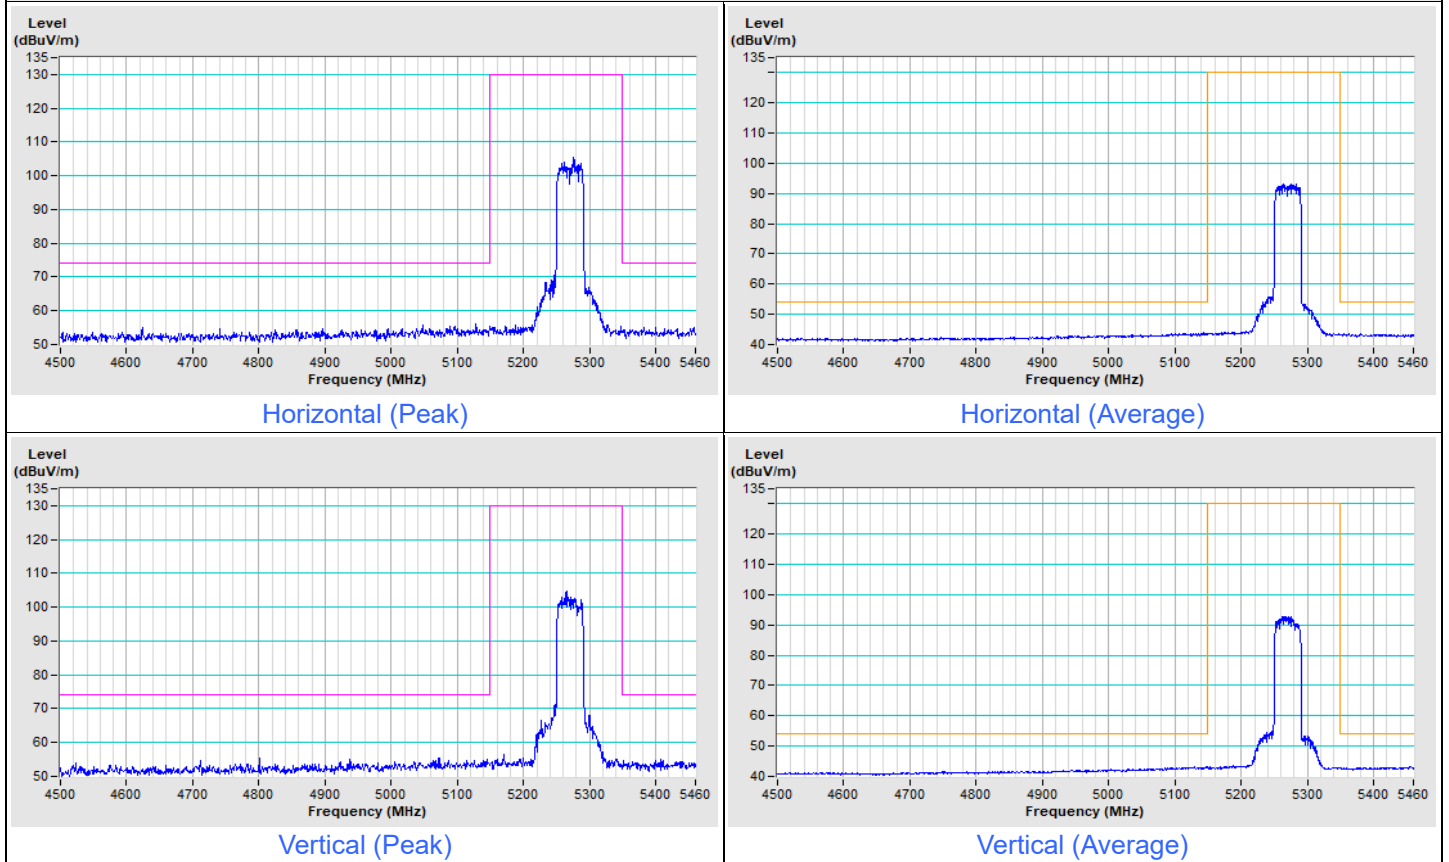


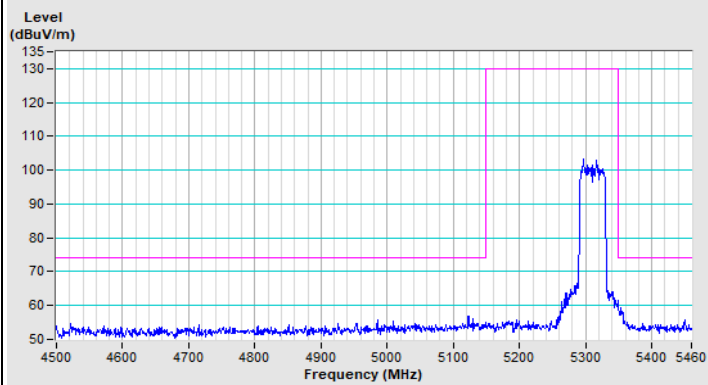802.11ax (HE40) Channel 62


Horizontal (Peak)

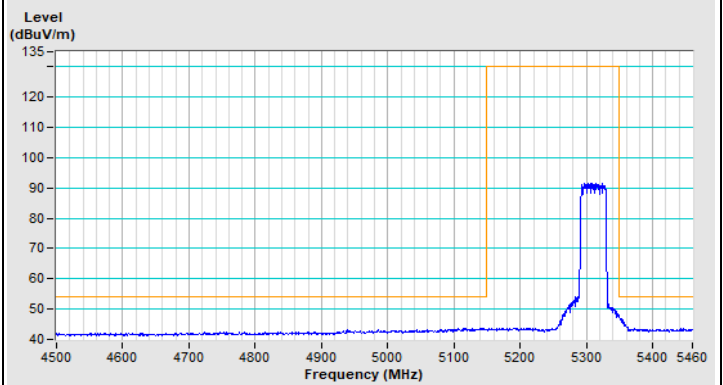

Horizontal (Average)

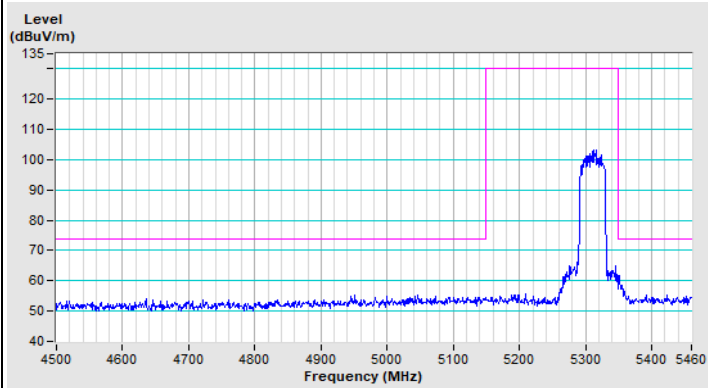


Vertical (Peak)

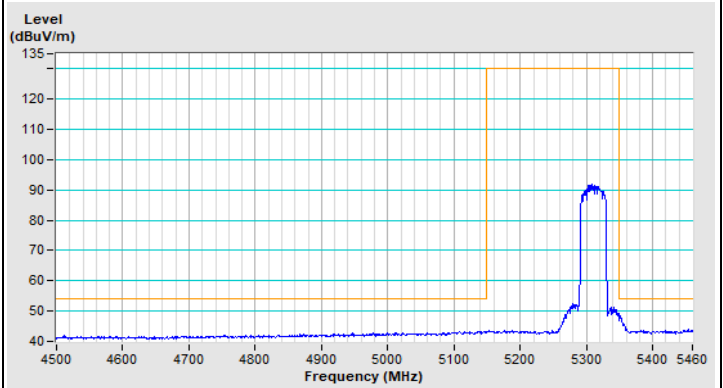

Vertical (Average)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11ax (HE80) Channel 58

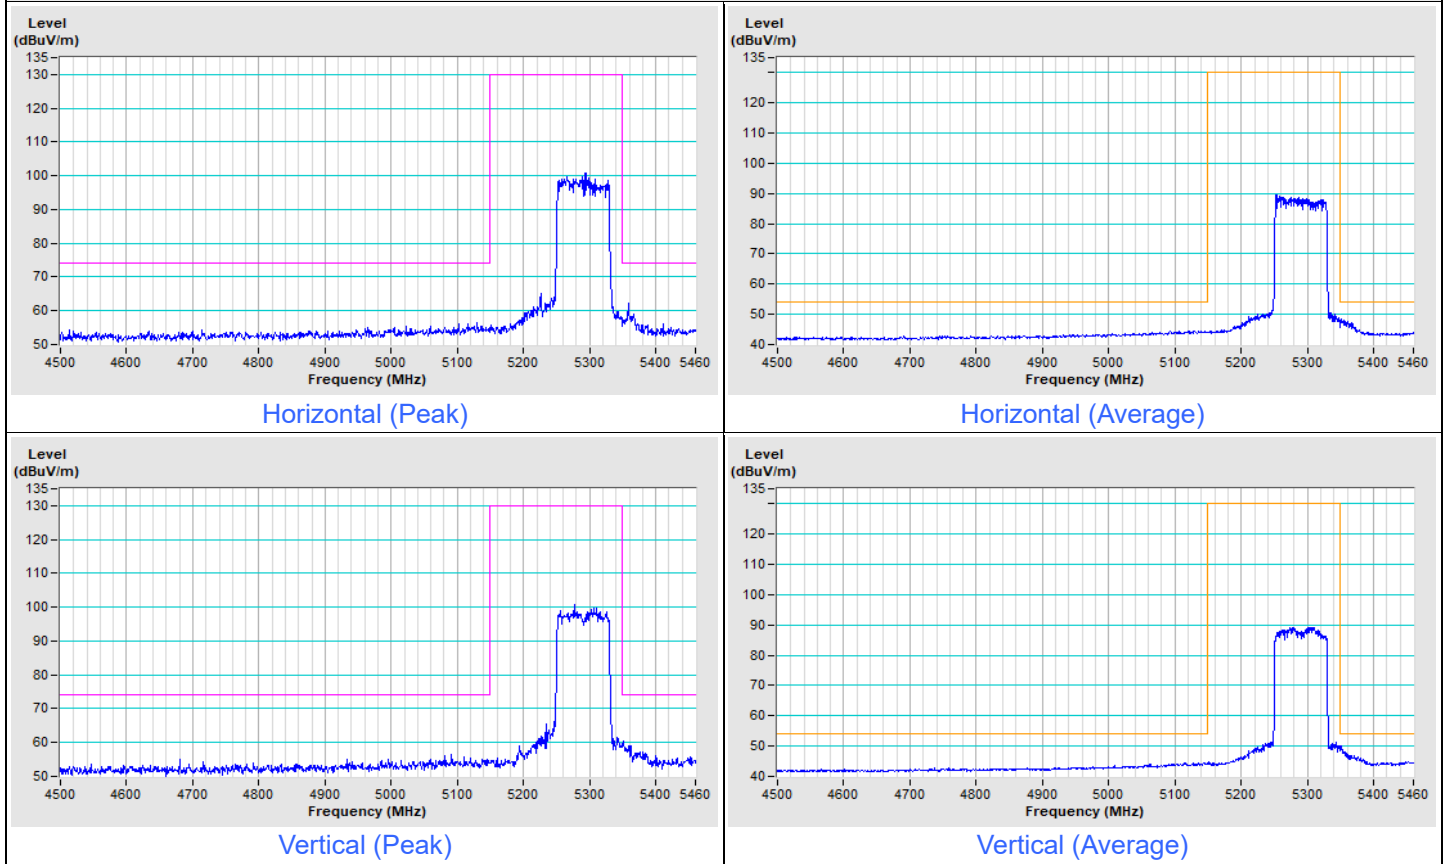


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

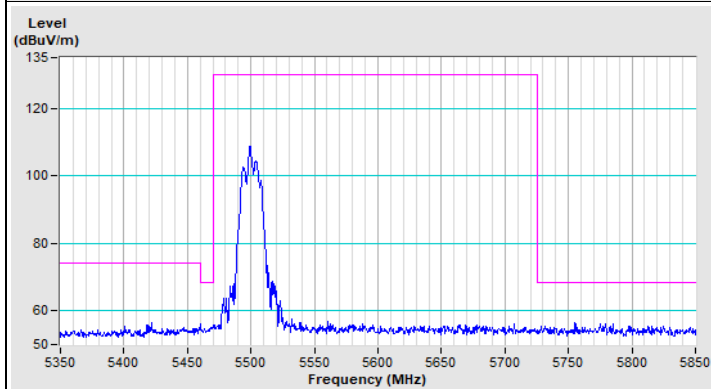


Horizontal (Peak)

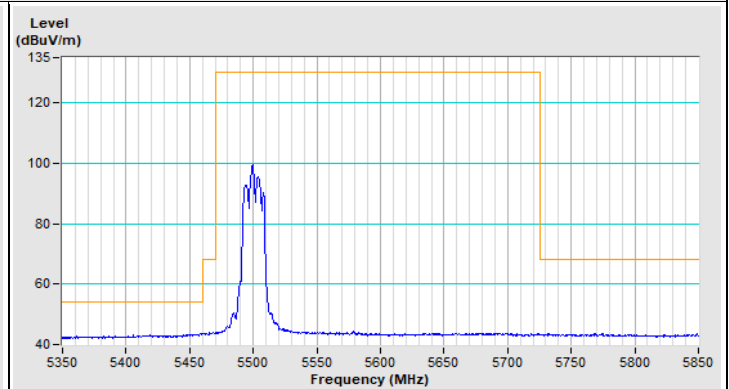

Horizontal (Average)

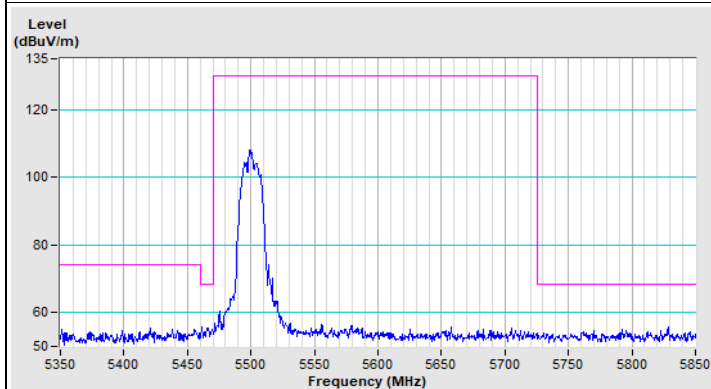


Vertical (Peak)

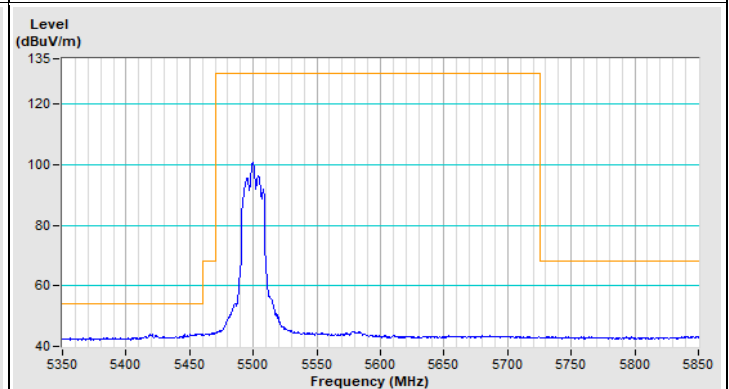


Vertical (Average)

802.11a Channel 140

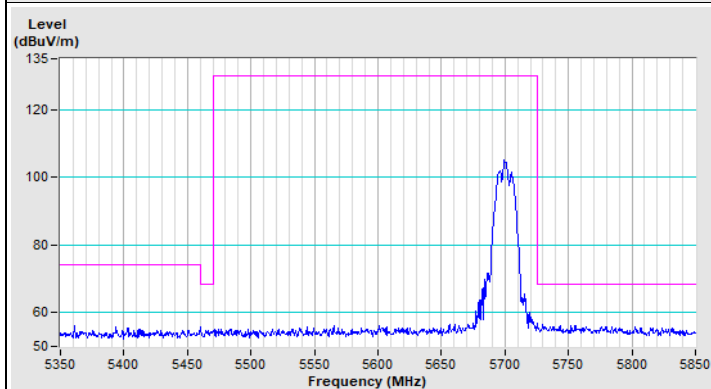


Horizontal (Peak)

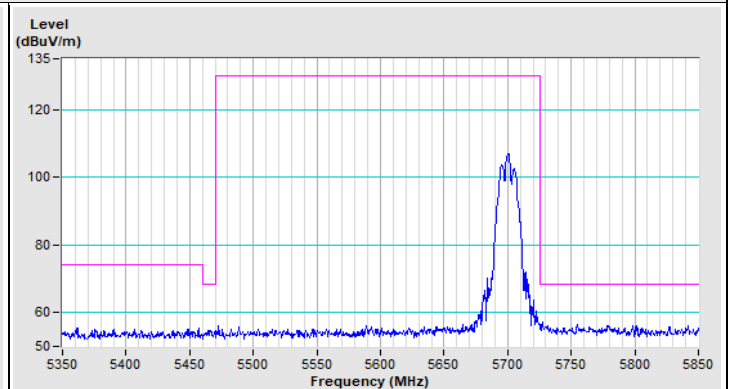

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11a Channel 144

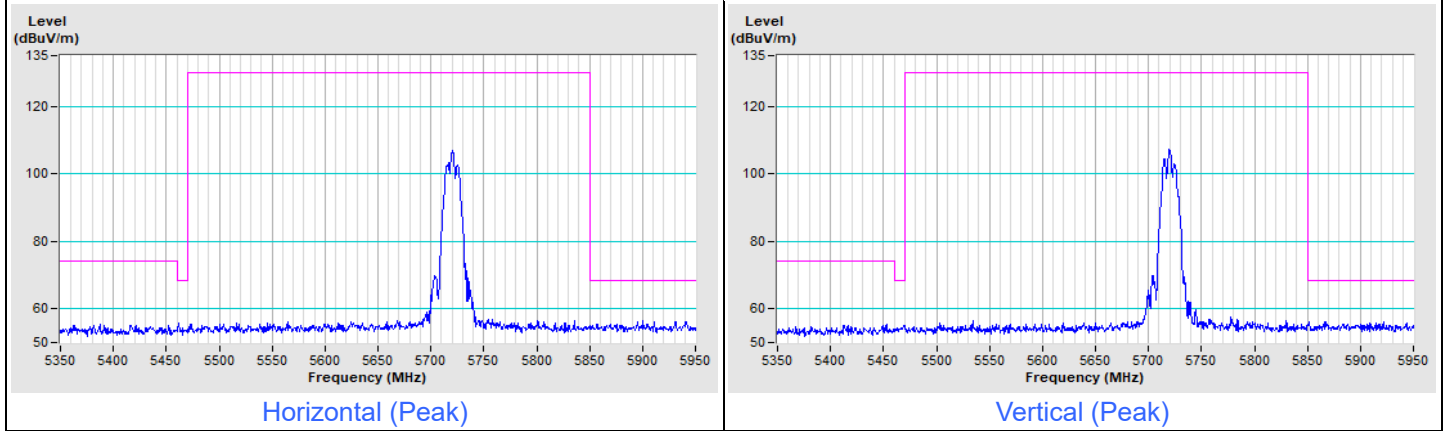


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) Channel 100

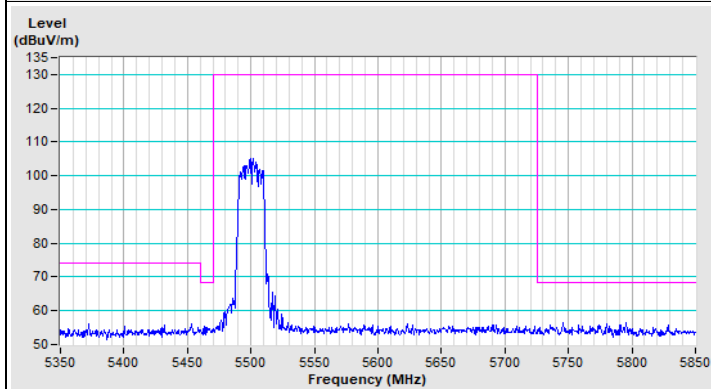


Horizontal (Peak)

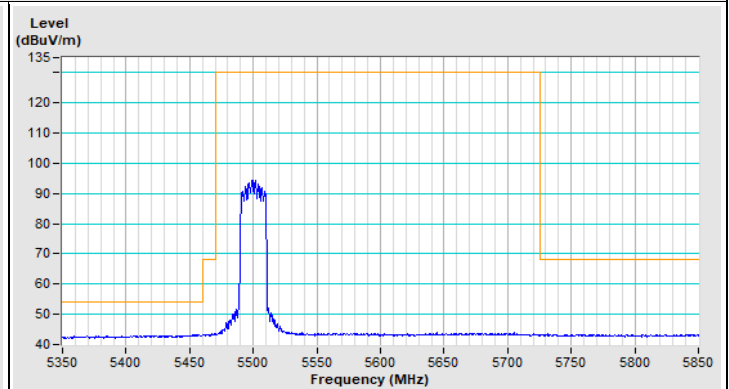

Horizontal (Average)

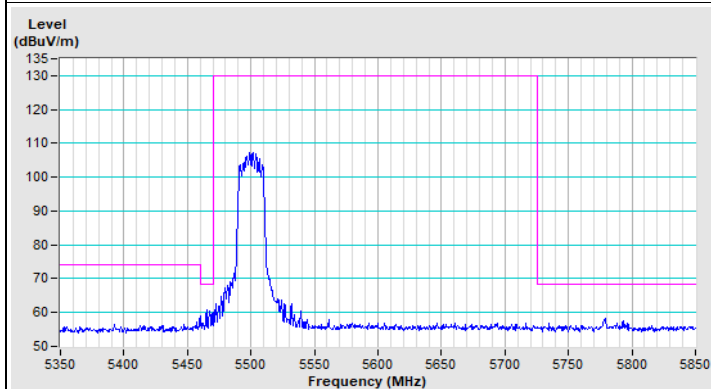


Vertical (Peak)

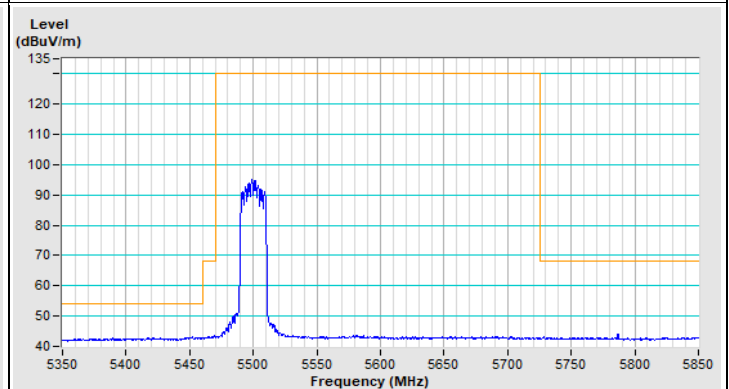


Vertical (Average)

802.11ax (HE20) Channel 140

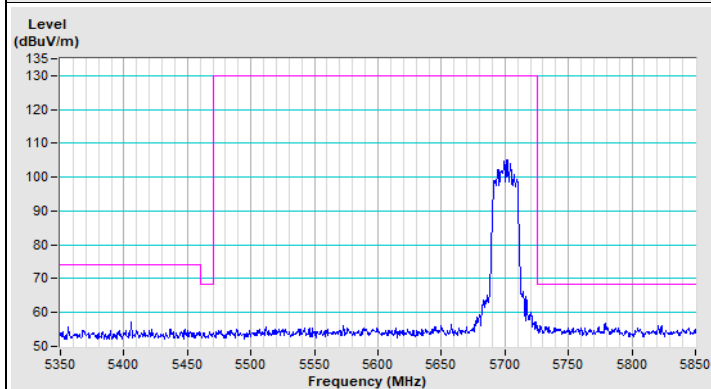


Horizontal (Peak)

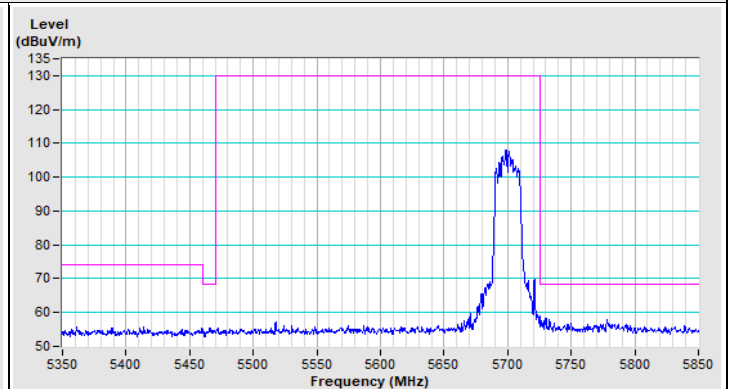

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11ax (HE20) Channel 144

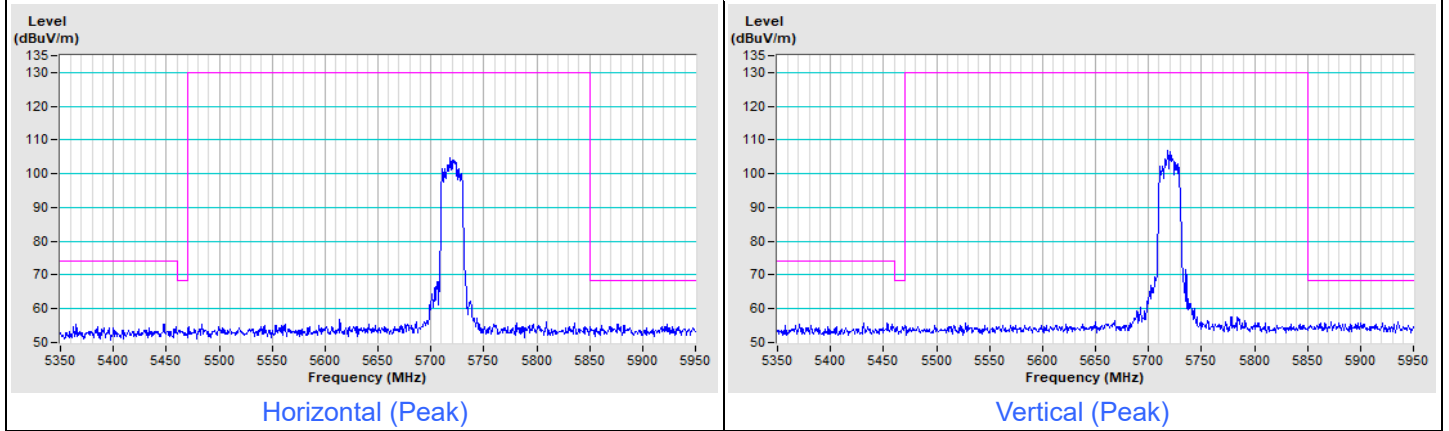


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE40) Channel 102

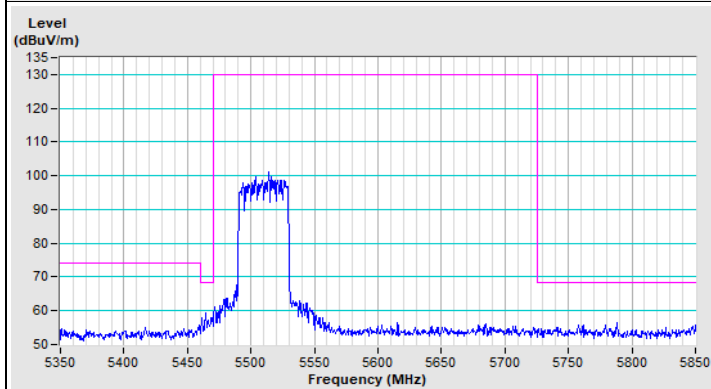


Horizontal (Peak)

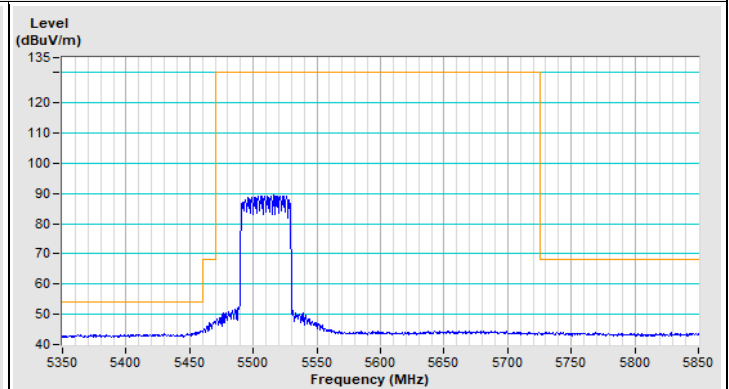

Horizontal (Average)

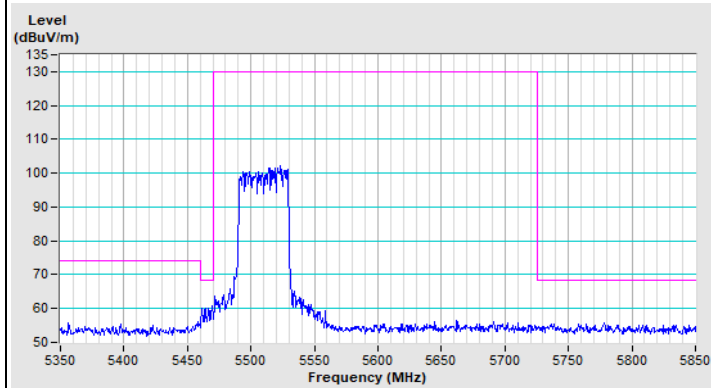


Vertical (Peak)

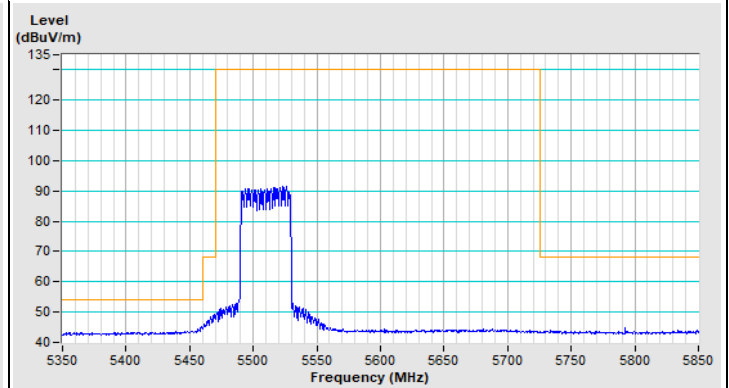


Vertical (Average)


802.11ax (HE40) Channel 134

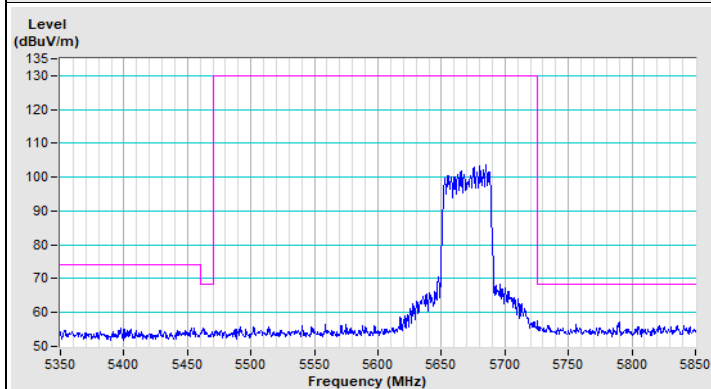


Horizontal (Peak)

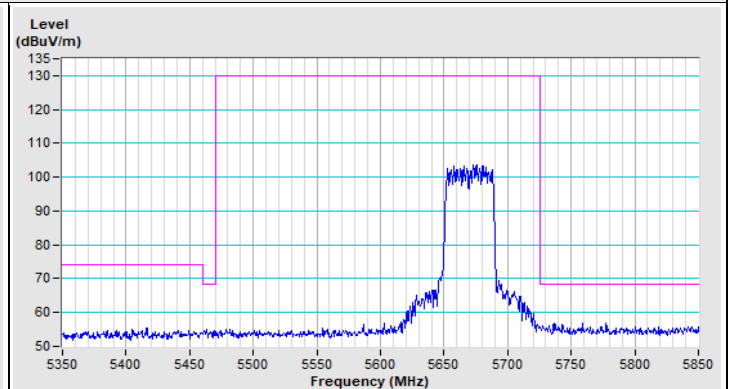

Vertical (Peak)

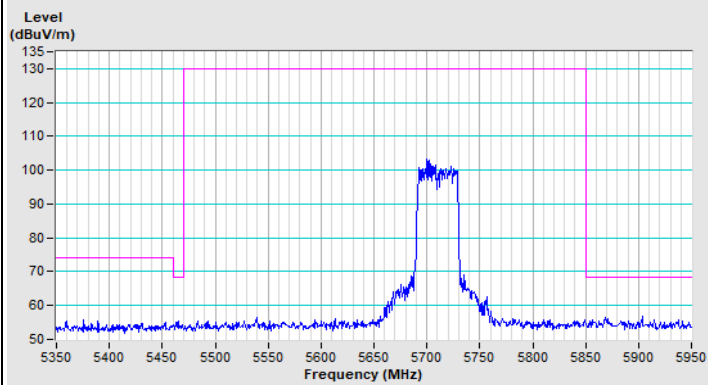802.11ax (HE40) Channel 142


Horizontal (Peak)

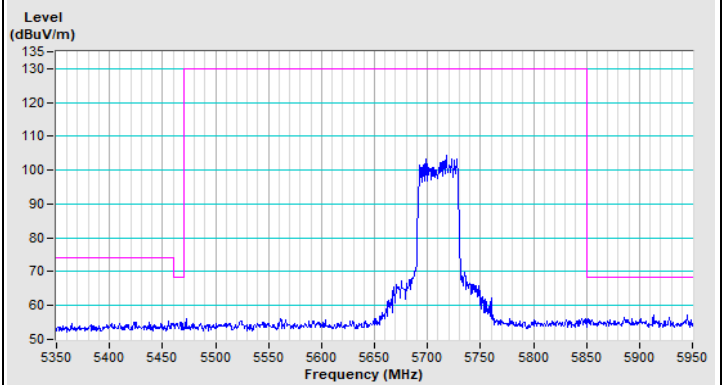


Vertical (Peak)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE80) Channel 106

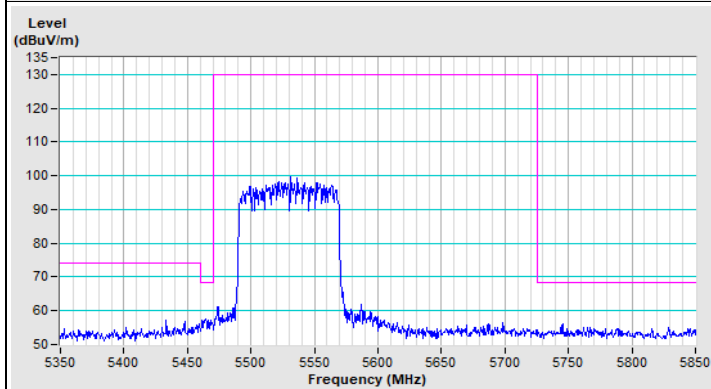


Horizontal (Peak)

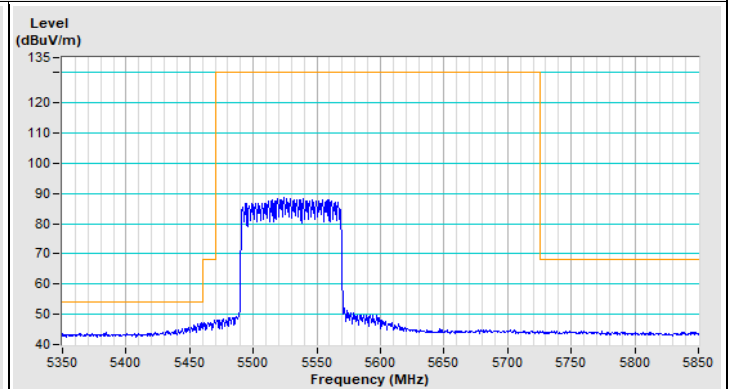

Horizontal (Average)

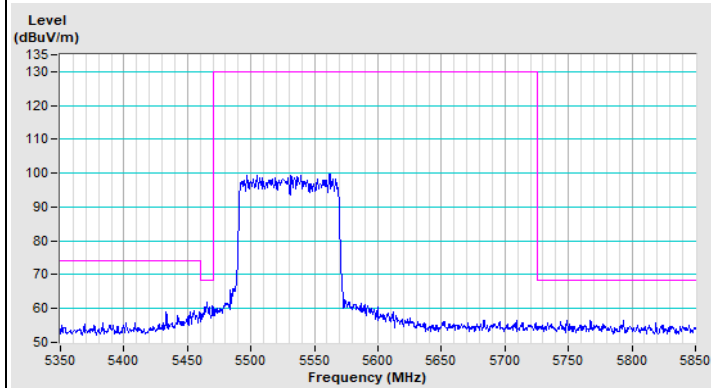


Vertical (Peak)

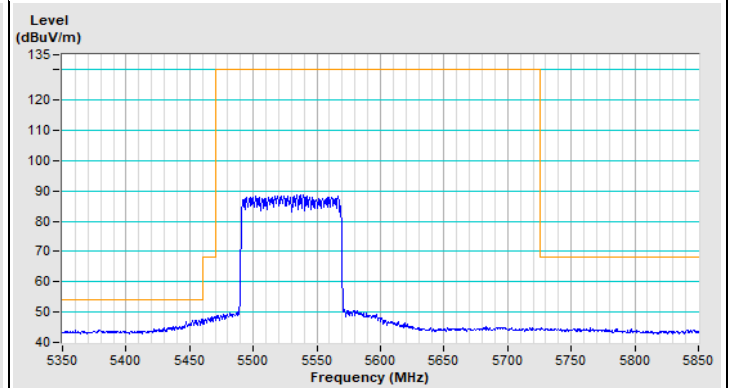


Vertical (Average)

802.11ax (HE80) Channel 122

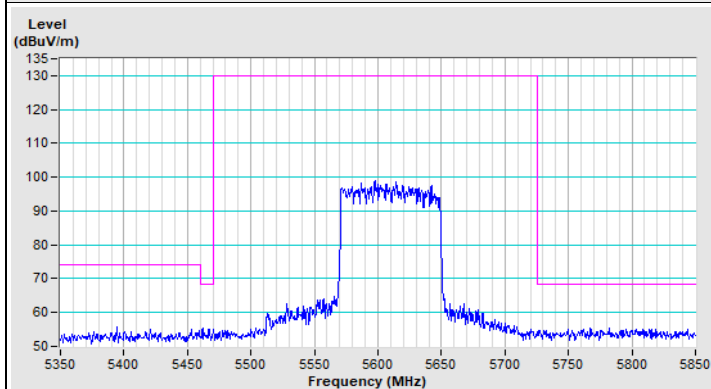


Horizontal (Peak)

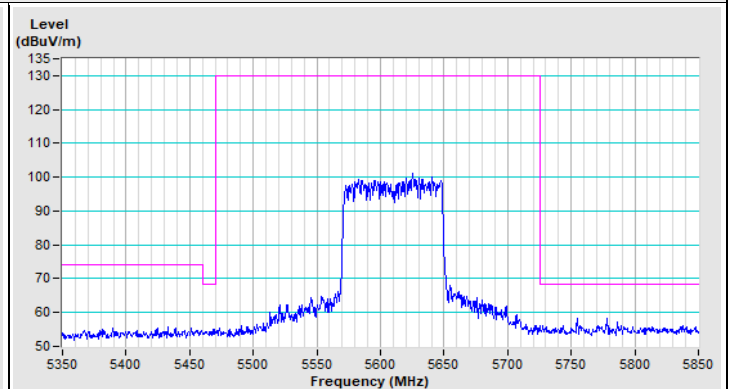

Vertical (Peak)



Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11ax (HE80) Channel 138


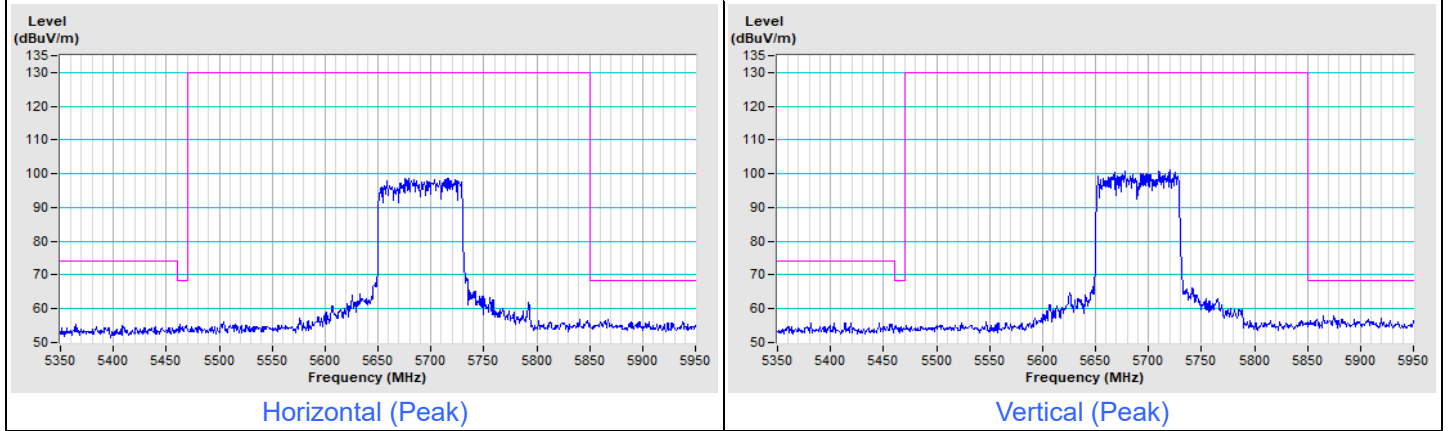


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------



802.11a Channel 149

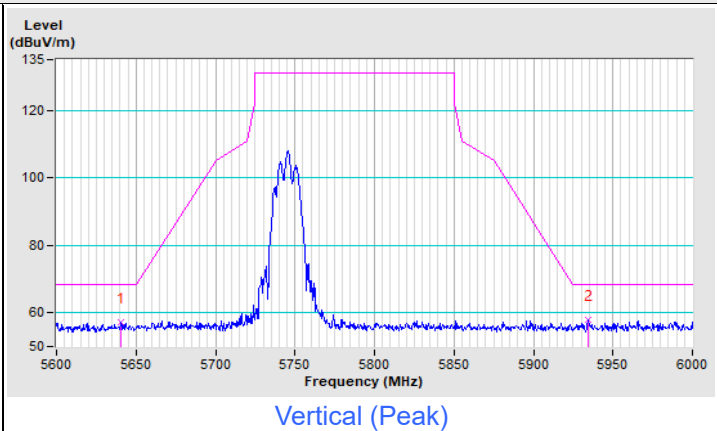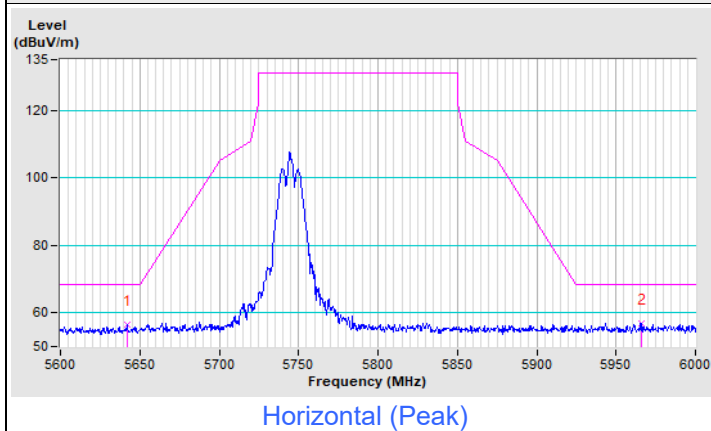

802.11a Channel 157

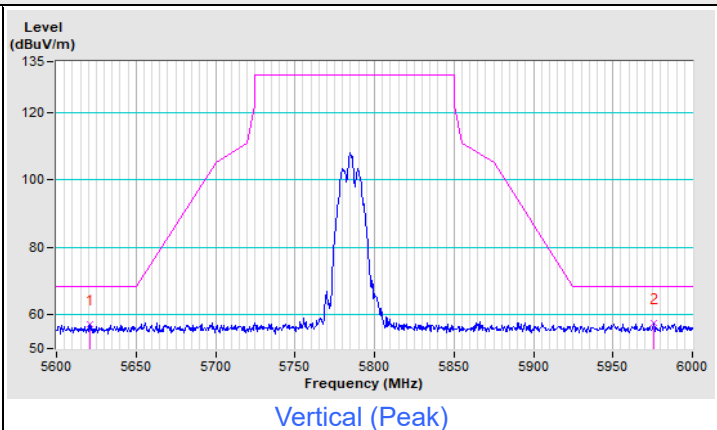
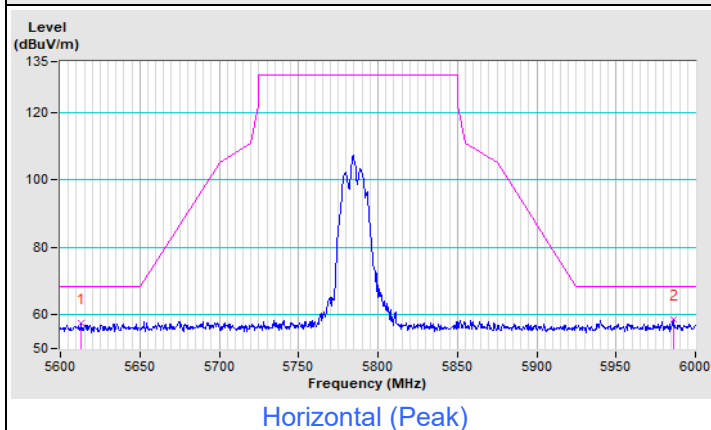


802.11a Channel 165

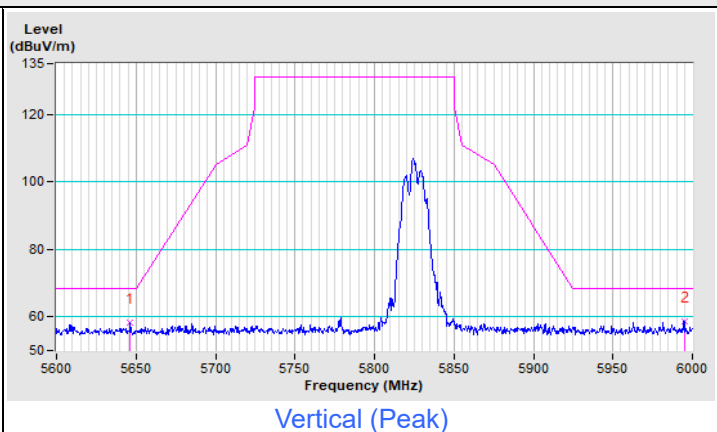
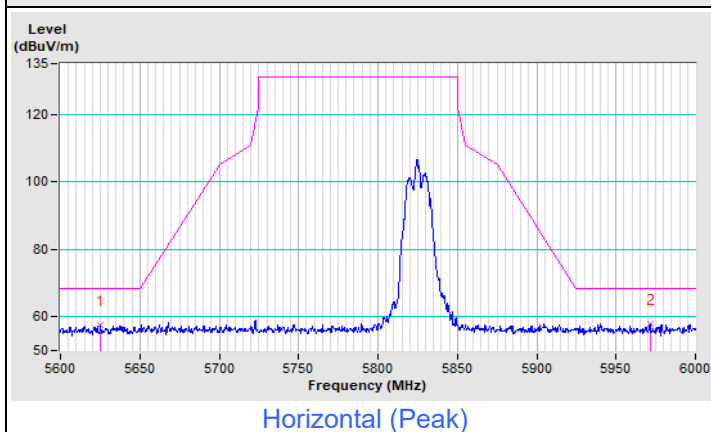


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------



802.11ax (HE20) Channel 149

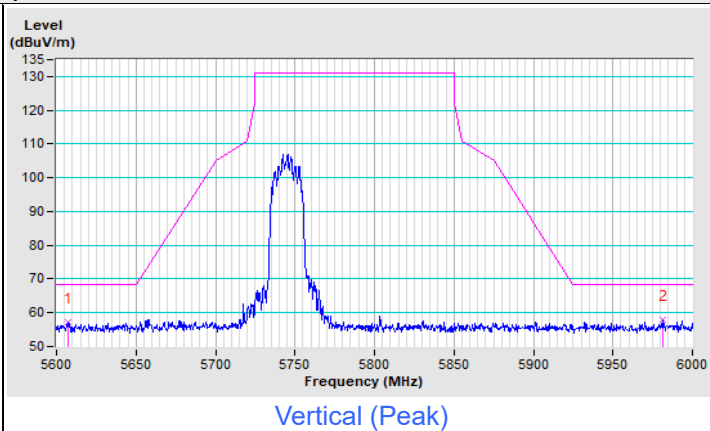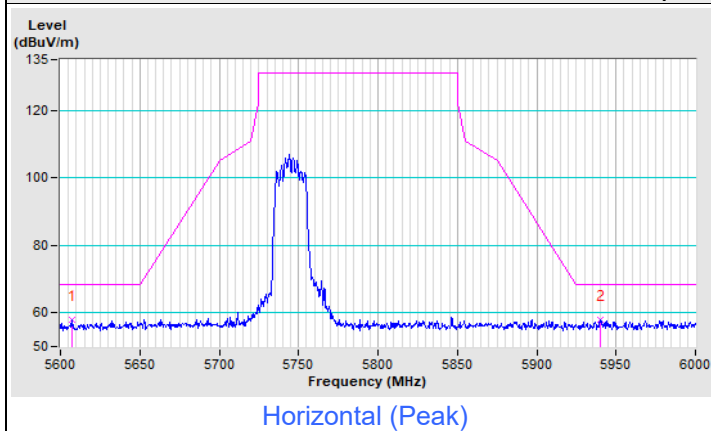

802.11ax (HE20) Channel 157

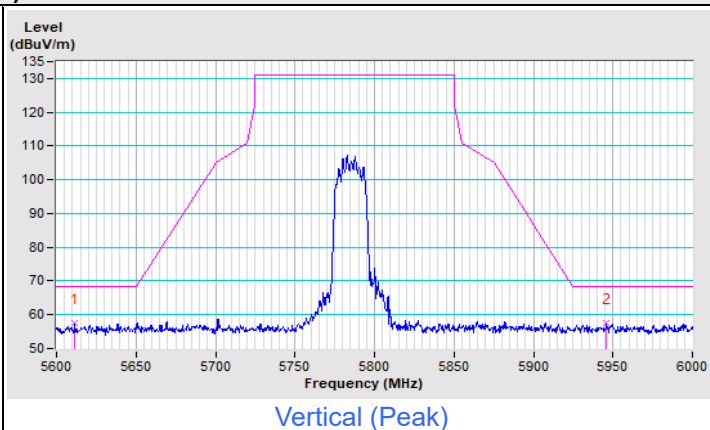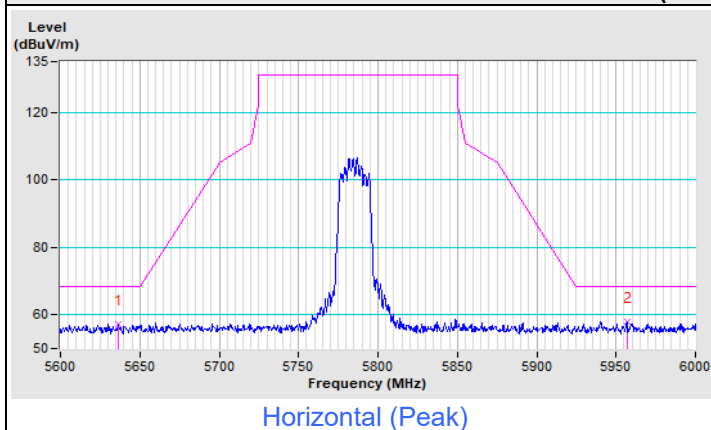


802.11ax (HE20) Channel 165

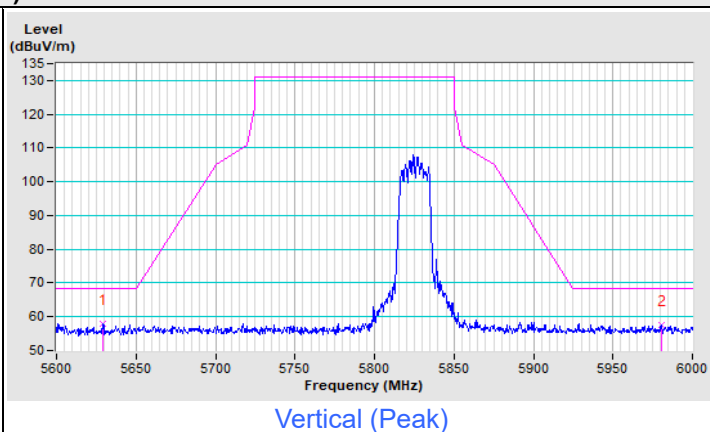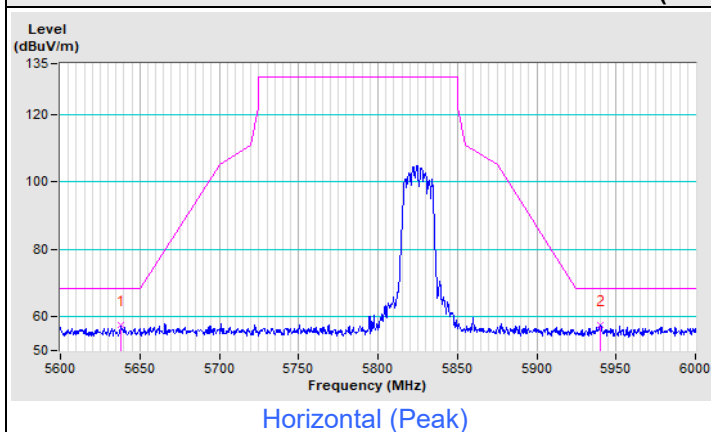


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11ax (HE40) Channel 151

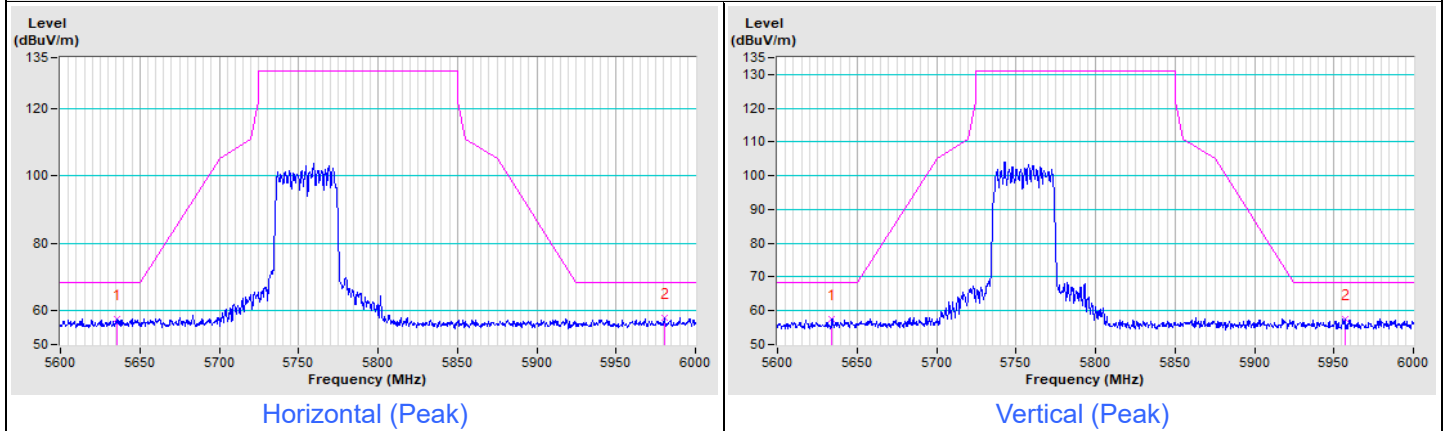


802.11ax (HE40) Channel 159

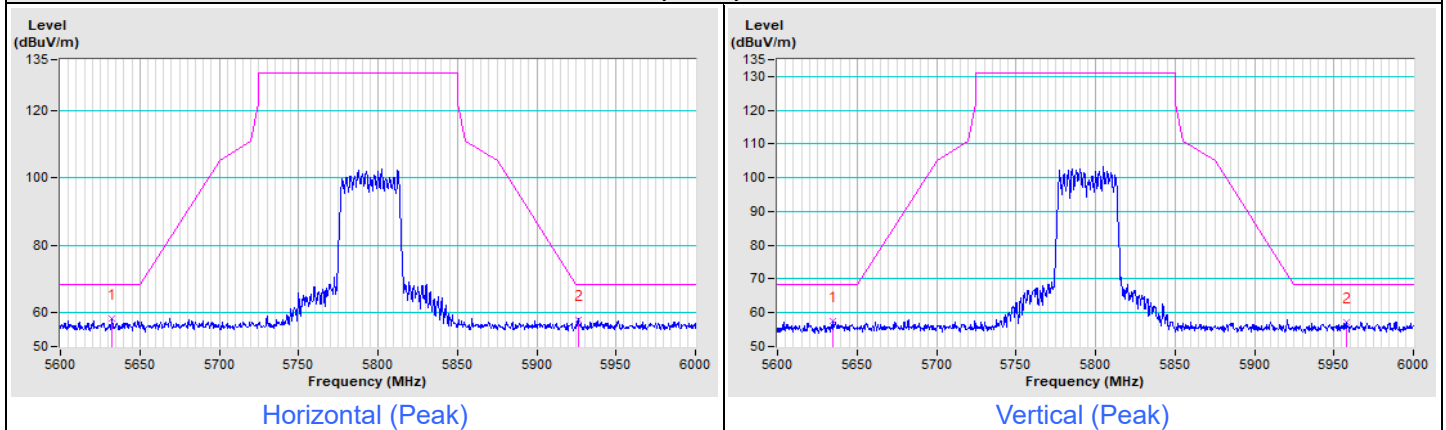

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11ax (HE80) Channel 155

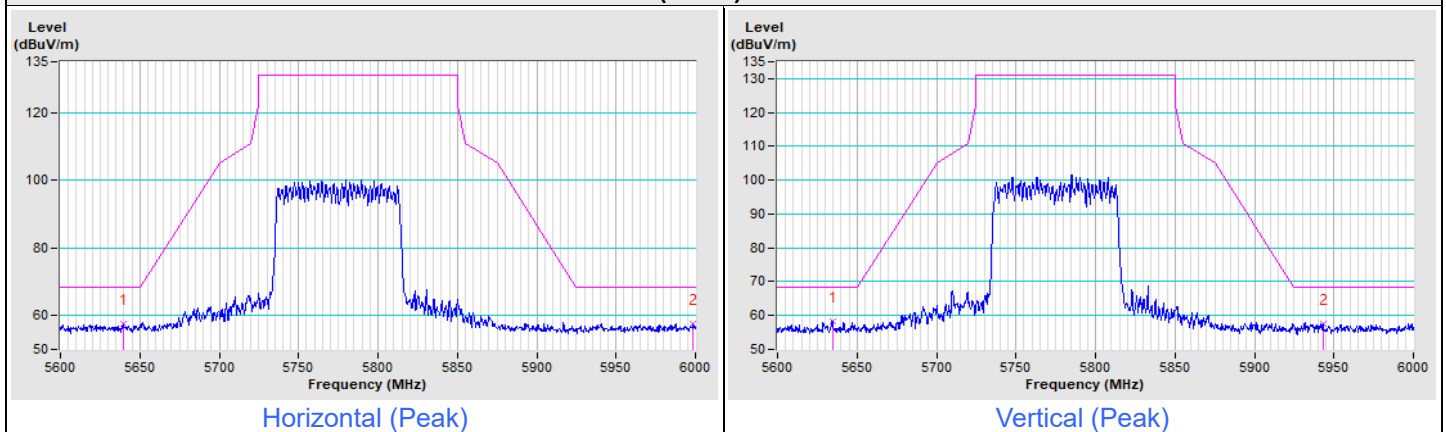

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---