

Project No: TM-2602000265P
Report No.: TMWK2603001434KR

FCC ID: JNZVR0050

Page 1 / 268
Rev. 00

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART E


Test Standard	FCC Part 15.407
Brand Name	logi, logitech, Logitech
Product name	Camera and Speakerphone
Model No.	VR0050
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10-2020 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)

Approved by:



Sehni Hu
Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 2 / 268
Rev. 00

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 10, 2026	Initial Issue	ALL	Allison Chen



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 3 / 268
Rev. 00

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION.....	4
1.2	EUT CHANNEL INFORMATION	5
1.3	ANTENNA INFORMATION	7
1.4	MEASUREMENT UNCERTAINTY.....	8
1.5	FACILITIES AND TEST LOCATION	8
1.6	INSTRUMENT CALIBRATION	9
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	11
1.8	TEST SET UP DIAGRAM.....	12
1.9	TEST PROGRAM.....	12
1.10	TEST METHODOLOGY AND APPLIED STANDARDS	12
2.	TEST SUMMARY	13
3.	DESCRIPTION OF TEST MODES.....	14
3.1	THE WORST MODE OF OPERATING CONDITION	14
3.2	THE WORST MODE OF MEASUREMENT	16
3.3	EUT DUTY CYCLE.....	17
4.	TEST RESULT	20
4.1	AC POWER LINE CONDUCTED EMISSION	20
4.2	26DB BANDWIDTH, 6DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	29
4.3	OUTPUT POWER MEASUREMENT	87
4.4	POWER SPECTRAL DENSITY.....	92
4.5	RADIATION BANEDGE AND SPURIOUS EMISSION	119
4.6	DYNAMIC FREQUENCY SELECTION.....	253
APPENDIX A - PHOTOGRAPHS OF SETUP		



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 4 / 268
Rev. 00

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	Logitech Far East Ltd. #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan
Manufacturer	Logitech Europe S.A. EPFL – Quartier de l'Innovation Daniel Borel Innovation Center, 1015 Lausanne, Switzerland.
Equipment	Camera and Speakerphone
Model No.	VR0050
Model Discrepancy	N/A
Trade Name	logi, logitech, Logitech
Received Date	February 12, 2026
Date of Test	April 28 ~ June 01, 2026
Power Operation	Power from Adapter. Brand / Model: logi / HA-1151-19 I/P: 100-240Vac, 2.0A, 50-60Hz O/P: 19.5Vdc, 7.7A 150.0W
HW Version	PB2-2
SW Version	920.72

Remark:

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

1.2 EUT CHANNEL INFORMATION

Frequency Range (FCC)	UNII-1	
	IEEE 802.11a	5180 ~ 5240 MHz
	IEEE 802.11n HT20	5180 ~ 5240 MHz
	IEEE 802.11n HT40	5190 ~ 5230 MHz
	IEEE 802.11ac VHT20	5180 ~ 5240 MHz
	IEEE 802.11ac VHT40	5190 ~ 5230 MHz
	IEEE 802.11ac VHT80	5210 MHz
	IEEE 802.11ax HE20	5180 ~ 5240 MHz
	IEEE 802.11ax HE40	5190 ~ 5230 MHz
	IEEE 802.11ax HE80	5210 MHz
	UNII-2a	
	IEEE 802.11a	5260 ~ 5320 MHz
	IEEE 802.11n HT20	5260 ~ 5320 MHz
	IEEE 802.11n HT40	5270 ~ 5310 MHz
	IEEE 802.11ac VHT20	5260 ~ 5320 MHz
	IEEE 802.11ac VHT40	5270 ~ 5310 MHz
	IEEE 802.11ac VHT80	5290 MHz
	IEEE 802.11ax HE20	5260 ~ 5320 MHz
	IEEE 802.11ax HE40	5270 ~ 5310 MHz
	IEEE 802.11ax HE80	5290 MHz
	UNII-2c	
	IEEE 802.11a	5500 ~ 5700 MHz
	IEEE 802.11n HT20	5500 ~ 5700 MHz
	IEEE 802.11n HT40	5510 ~ 5670 MHz
	IEEE 802.11ac VHT20	5500 ~ 5700 MHz
	IEEE 802.11ac VHT40	5510 ~ 5670 MHz
	IEEE 802.11ac VHT80	5530 ~ 5610 MHz
	IEEE 802.11ax HE20	5500 ~ 5700 MHz
	IEEE 802.11ax HE40	5510 ~ 5670 MHz
	IEEE 802.11ax HE80	5530 ~ 5610 MHz
	UNII-3	
	IEEE 802.11a	5745 ~ 5825 MHz
	IEEE 802.11n HT20	5745 ~ 5825 MHz
	IEEE 802.11n HT40	5755 ~ 5795 MHz
	IEEE 802.11ac VHT20	5745 ~ 5825 MHz
	IEEE 802.11ac VHT40	5755 ~ 5795 MHz
	IEEE 802.11ac VHT80	5775 MHz
	IEEE 802.11ax HE20	5745 ~ 5825 MHz
	IEEE 802.11ax HE40	5755 ~ 5795 MHz
	IEEE 802.11ax HE80	5775 MHz



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 6 / 268
Rev. 00

Modulation Type	1. IEEE 802.11a mode: OFDM 2. IEEE 802.11n HT 20 mode: OFDM 3. IEEE 802.11n HT 40 mode: OFDM 4. IEEE 802.11ac VHT 20 mode: OFDM 5. IEEE 802.11ac VHT 40 mode: OFDM 6. IEEE 802.11ac VHT 80 mode: OFDM 7. IEEE 802.11ax HE 20 mode: OFDMA 8. IEEE 802.11ax HE 40 mode: OFDMA 9. IEEE 802.11ax HE 80 mode: OFDMA
-----------------	--

Remark:

1. Refer as ANSI C63.10-2020 for test channels.

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom



1.3 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☒ PCB ☐ Dipole ☐ FPC Antenna																							
Antenna Gain	CH0: INPAQ / RFPCA531543IMLB901 CH1: INPAQ / RFPCA451644IMLB901 <table><tr><th></th><th>Band I 5150~5250 MHz</th><th>Band II 5250~5350 MHz</th><th>Band III 5470~5725 MHz</th><th>Band IV 5725~5850 MHz</th></tr><tr><td>CH0 (dBi)</td><td>6.21</td><td>6.21</td><td>6.15</td><td>6.46</td></tr><tr><td>CH1 (dBi)</td><td>6.85</td><td>6.85</td><td>6.02</td><td>7.11</td></tr><tr><td>Total Gain (dBi)</td><td>9.55</td><td>9.55</td><td>9.10</td><td>9.80</td></tr></table>					Band I 5150~5250 MHz	Band II 5250~5350 MHz	Band III 5470~5725 MHz	Band IV 5725~5850 MHz	CH0 (dBi)	6.21	6.21	6.15	6.46	CH1 (dBi)	6.85	6.85	6.02	7.11	Total Gain (dBi)	9.55	9.55	9.10	9.80
	Band I 5150~5250 MHz	Band II 5250~5350 MHz	Band III 5470~5725 MHz	Band IV 5725~5850 MHz																				
CH0 (dBi)	6.21	6.21	6.15	6.46																				
CH1 (dBi)	6.85	6.85	6.02	7.11																				
Total Gain (dBi)	9.55	9.55	9.10	9.80																				
Antenna Connector	IPEX																							

Note:
1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203.

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	$\pm 2.37\text{dB}$
Channel Bandwidth	$\pm 2.85\text{dB}$
RF output power (Spectrum)	$\pm 2.74\text{dB}$
RF output power (Power Meter + Power sensor)	$\pm 0.27\text{dB}$
Power Spectral density	$\pm 2.74\text{dB}$
Radiated Emission_9kHz-30MHz	$\pm 2.750\text{ dB}$
Radiated Emission_30MHz-200MHz	$\pm 3.874\text{ dB}$
Radiated Emission_200MHz-1GHz	$\pm 4.065\text{ dB}$
Radiated Emission_1GHz-6GHz	$\pm 5.594\text{ dB}$
Radiated Emission_6GHz-18GHz	$\pm 5.556\text{ dB}$
Radiated Emission_18GHz-26GHz	$\pm 3.165\text{ dB}$
Radiated Emission_26GHz-40GHz	$\pm 3.216\text{ dB}$

Remark:

- 1.This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Ben Yang	-
Radiation	Ben Yang, Tony Chao	-
RF Conducted	David Li	-
DFS Test	KW Huang	-

Remark: The lab has been recognized as the FCC accredited lab. under the KDB 974614 D01 and is listed in the FCC pubic Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 9 / 268
Rev. 00

1.6 INSTRUMENT CALIBRATION

Conducted_FCC/NCC (All)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY53400256	2025-11-26	2026-11-25
Power Sensor	Anritsu	MA2411B	1911387	2025-08-21	2026-08-20
Power Sensor	Anritsu	MA2411B	1911386	2025-07-07	2026-07-06
Power Meter	Anritsu	ML2496A	2136002	2025-07-07	2026-07-06
Attenuator	Marvelous Microwave Inc	MVE2213-10	08	2025-11-06	2026-11-05
DC Blocks	Marvelous Microwave	MVE6411	MVE-001	2025-08-06	2026-08-05
Software	Radio Test Software Ver. 21				

966A_Radiated					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Analyzer	Agilent	N9010A	MY52220817	2026-03-13	2027-03-12
Active Loop Antenna	COM-POWER	AL-130	121051	2026-02-04	2027-02-03
Thermo-Hygro Meter	HTC	HTC-1	HTC-D06	2025-05-26	2026-05-25
Bi-Log Antenna	Sunol Sciences	JB3	A030105&532	2025-06-26	2026-06-25
Preamplifier	EMEC	EM330	060609	2026-02-13	2027-02-12
Cable	Huber+Suhner	104PEA	20995+21000+182330	2025-08-06	2026-08-05
Horn Antenna	ETC	MCTD 1209	DRH13M02003	2025-12-19	2026-12-18
Preamplifier	HP	8449B	3008A00965	2025-12-17	2026-12-16
Cable	EMCI	EMC101G	1508S0193+230205+250412	2026-01-14	2027-01-13
Site Validation	CCS	966A	N/A	2025-06-12	2026-06-11
High Pass Filters	Titan Microwave	T04H70002600050S01	22011402-6	2026-01-14	2027-01-13
Pre-Amplifier	EMC	EMC184045SE	980860	2025-11-19	2026-11-18
Horn Antenna	SCHWARZBECK	BBHA9170	1047	2025-12-09	2026-12-08
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Software	e3 V9-210616c				

Remark:

1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R. = No Calibration Required.



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 10 / 268
Rev. 00

AC Mains Conduction					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESCI	100064	2025-06-02	2026-06-01
LISN	TESEQ	LN2-16N	22012	2026-02-04	2027-02-03
Cable	Woken	RFC-SMA-100-NMR-084SFL402	MFR-2Y194	2026-03-20	2027-03-19
Software	e3 V9-210616c				

DFS Test					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Signal Analyzer	Keysight	N9010B	MY55460167	2025-06-13	2026-06-12
Vector Signal Generator	KEYSIGHT	N5182B/ N5182BX07	MY61252828/ MY59362552	2025-12-31	2026-12-30
Attenuator	E-INSTRUMENT	EPA-600H	EC1400050	2025-06-13	2026-06-12
Power Divider	Solvang Technology	STI08-0015	008	2025-06-22	2026-06-21
Power Divider	Marvelous Microwave	MVE8586	16011201	2025-06-12	2026-06-11
Power Divider	Marvelous Microwave	MVE8586	16011202	2025-06-12	2026-06-11
Power Divider	Marvelous Microwave	MVE8586	16011205	2025-06-12	2026-06-11
Cable	Woken	SUMITOMO	1	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	2	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	3	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	4	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	5	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	6	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	8	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	9	2026-02-26	2027-02-25
Cable	Woken	SUMITOMO	14	2026-02-26	2027-02-25
Software	Dynamic Frequency Selection Test version 25.03.05				

Remark:

1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R. = No Calibration Required.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				


Support Equipment (Conducted)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(B)	Lenovo	T470	N/A	N/A
2	Type-C Cable	UGREEN	50997	N/A	N/A

Support Equipment (RSE)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB	Lenovo	ThinkPad X260	N/A	N/A
2	Adapter	Lenovo	ADLX45DLC3A	N/A	N/A
3	Type-C Cable	Xiao mi	SJX10ZM	N/A	N/A
4	RJ45	atake	AC6-FL10	N/A	N/A
5	USB	ADATA	C008	N/A	N/A
6	HDMI Cable	PX	HD2-2XC	N/A	N/A
7	Monitor	Lenovo	LED HDTV	N/A	N/A
8	Adapter	Lenovo	1230	N/A	N/A
A	Adapter	logi	HA-1151-19	N/A	N/A
B	HDMI Cable	logi	N/A	N/A	N/A

Support Equipment (Conduction)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB	Lenovo	ThinkPad X260	N/A	N/A
2	Adapter	Lenovo	ADLX45DLC3A	N/A	N/A
3	Type-C Cable	Xiao mi	SJX10ZM	N/A	N/A
4	RJ45	atake	AC6-FL10	N/A	N/A
5	USB	ADATA	C008	N/A	N/A
6	HDMI Cable	PX	HD2-2XC	N/A	N/A
7	Monitor	Lenovo	T24I-20	N/A	N/A
A	Adapter	logi	HA-1151-19	N/A	N/A
B	HDMI Cable	logi	N/A	N/A	N/A

Support Equipment (DFS)					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	AP	ASUS	RT-AX88U	N/A	N/A
2	NB	Lenovo	TP00075A	N/A	N/A
A	Monitor	Lenovo	A20238FT0	N/A	N/A

1.8 TEST SET UP DIAGRAM

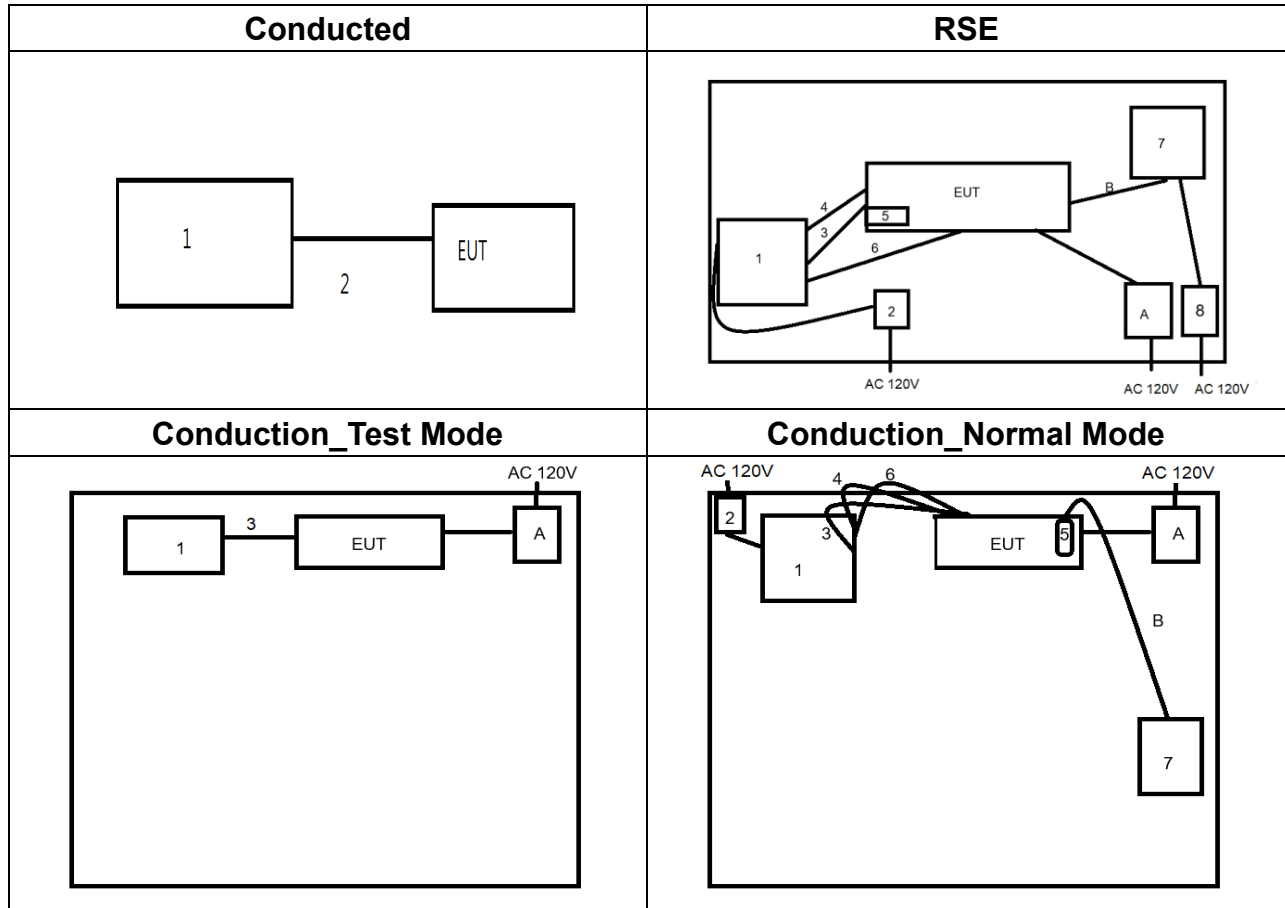

1.9 TEST PROGRAM

This EUT use adb tool and set command to set the frequency, modulation and power to allow continuous transmission of the sample.

adb tool: adb v1.0.32

1.10 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10-2020, FCC Part 2, FCC Part 15.407, KDB 789033 D02 v02r01 and KDB 905462 D02 v02.



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 13 / 268
Rev. 00

2. TEST SUMMARY

FCC Standard Sec.	Chapter	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207	4.1	AC Conducted Emission	Pass
15.407(a)	4.2	26dB Bandwidth	Pass
15.407(e)	4.2	6dB Bandwidth	Pass
2.1049	4.2	Occupied Bandwidth (99%)	Pass
15.407(a)	4.3	Output Power Measurement	Pass
15.407(a)	4.4	Power Spectral Density	Pass
15.407(b)	4.5	Radiation Band Edge	Pass
15.407(b)	4.5	Radiation Spurious Emission	Pass
15.407(h)	4.6	Dynamic Frequency Selection	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	1. IEEE 802.11a mode: 6Mbps 2. IEEE 802.11n HT20 mode: MCS0 3. IEEE 802.11n HT40 mode: MCS0 4. IEEE 802.11ac VHT20 mode: MCS0 5. IEEE 802.11ac VHT40 mode: MCS0 6. IEEE 802.11ac VHT80 mode: MCS0 7. IEEE 802.11ax HE20 mode: MCS0 8. IEEE 802.11ax HE40 mode: MCS0 9. IEEE 802.11ax HE80 mode: MCS0
Operation Transmitter	1. IEEE 802.11a mode: 2T2R(MIMO) 2. IEEE 802.11n HT20 mode: 2T2R(MIMO) 3. IEEE 802.11n HT40 mode: 2T2R(MIMO) 4. IEEE 802.11ac VHT20 mode: 2T2R(MIMO) 5. IEEE 802.11ac VHT40 mode: 2T2R(MIMO) 6. IEEE 802.11ac VHT80 mode: 2T2R(MIMO) 7. IEEE 802.11ax HE20 mode: 2T2R(MIMO) 8. IEEE 802.11ax HE40 mode: 2T2R(MIMO) 9. IEEE 802.11ax HE80 mode: 2T2R(MIMO)

Operating Frequency (FCC)		Mode	Frequency Range (MHz)
	U-NII-1	IEEE 802.11a	5180, 5220, 5240
		IEEE 802.11n HT20	5180, 5220, 5240
		IEEE 802.11n HT40	5190, 5230
		IEEE 802.11ac VHT20	5180, 5220, 5240
		IEEE 802.11ac VHT40	5190, 5230
		IEEE 802.11ac VHT80	5210
		IEEE 802.11ax HE20	5180, 5220, 5240
		IEEE 802.11ax HE40	5190, 5230
		IEEE 802.11ax HE80	5210
	U-NII-2a	IEEE 802.11a	5260, 5300, 5320
		IEEE 802.11n HT20	5260, 5300, 5320
		IEEE 802.11n HT40	5270, 5310
		IEEE 802.11ac VHT20	5260, 5300, 5320
		IEEE 802.11ac VHT40	5270, 5310
		IEEE 802.11ac VHT80	5290
		IEEE 802.11ax HE20	5260, 5300, 5320
		IEEE 802.11ax HE40	5270, 5310
		IEEE 802.11ax HE80	5290
	U-NII-2c	IEEE 802.11a	5500, 5600, 5700
		IEEE 802.11n HT20	5500, 5600, 5700
		IEEE 802.11n HT40	5510, 5590, 5670
		IEEE 802.11ac VHT20	5500, 5600, 5700
		IEEE 802.11ac VHT40	5510, 5590, 5670
		IEEE 802.11ac VHT80	5530, 5610
		IEEE 802.11ax HE20	5500, 5600, 5700
		IEEE 802.11ax HE40	5510, 5590, 5670
		IEEE 802.11ax HE80	5530, 5610
	U-NII-3	IEEE 802.11a	5745, 5785, 5825
		IEEE 802.11n HT20	5745, 5785, 5825
		IEEE 802.11n HT40	5755, 5795
		IEEE 802.11ac VHT20	5745, 5785, 5825
		IEEE 802.11ac VHT40	5755, 5795
		IEEE 802.11ac VHT80	5775
		IEEE 802.11ax HE20	5745, 5785, 5825
		IEEE 802.11ax HE40	5755, 5795
		IEEE 802.11ax HE80	5775

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conduction Emission	
Test Condition	AC Power line conduction emission for line and neutral
Power supply Mode	Mode 1: EUT power by Adapter
Worst Mode	☒ Mode 1

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Adapter
Worst Mode	☒ Mode 1
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☒ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Adapter
Worst Mode	☒ Mode 1

Remark:

1. The worst mode was record in this test report.
2. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the minimum margin for radiated emission(Bandedge & Harmonic) as worse case.
3. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(Z-Plane) were recorded in this report.
4. For Wi-Fi, a/n/ac/ax mode supports both SISO and MIMO. Since MIMO power is higher than SISO power, the MIMO mode is worst-cast mode for radiated testing.
5. For 802.11n/ac/ax, Since the modulation characteristics are the similar. as the power level, ax mode is selected as the worst mode for radiated testing.




Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 17 / 268
Rev. 00


3.3 EUT DUTY CYCLE

Temperature: 24.1~25.4°C **Test Date:** April 29~May 04, 2026
Humidity: 55~60% RH **Tested by:** David Li

Mode	Duty Cycle (%) =Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11a	99.14	0.04	0.48	0.01
802.11n_20	98.97	0.04	0.52	0.01
802.11ac_20	99.08	0.04	0.52	0.01
802.11n_40	98.84	0.05	0.65	0.01
802.11ac_40	98.85	0.05	0.65	0.01
802.11ac_80	99.12	0.04	0.45	0.01
802.11ax_20_SU	98.67	0.06	0.67	0.01
802.11ax_40_SU	98.41	0.07	0.81	0.01
802.11ax_80_SU	93.02	0.31	2.50	3.00

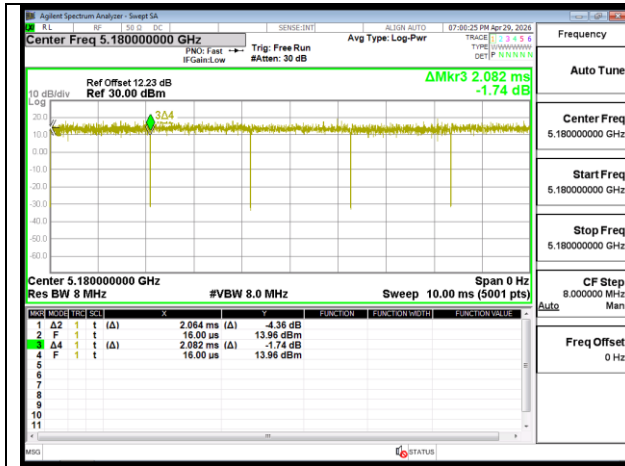


802.11a_20MHz_Chain0_5180MHz

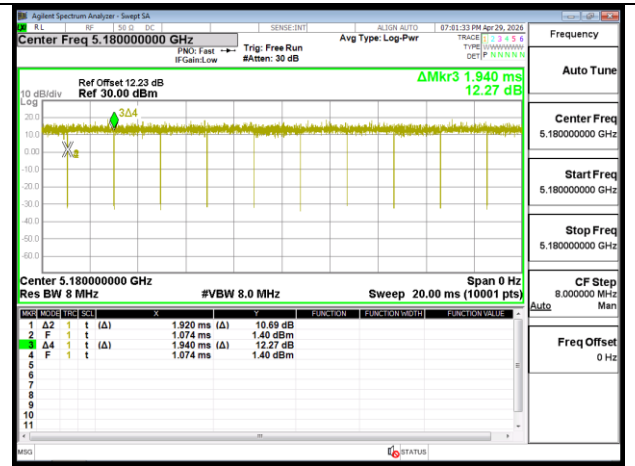

802.11n_20MHz_Chain0_5180MHz



802.11ac_20MHz_Chain0_5180MHz

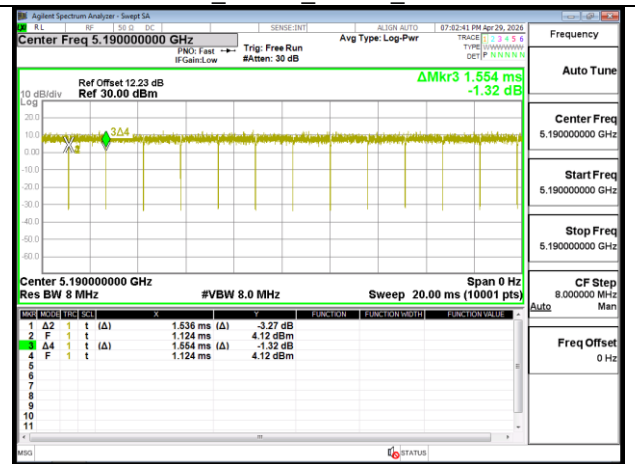

802.11n_40MHz_Chain0_5190MHz



802.11ac_40MHz_Chain0_5190MHz



802.11ac_80MHz_Chain0_5210MHz



802.11ax 20MHz Chain0 5180MHz



802.11ax 40MHz Chain0 5190MHz



802.11ax 80MHz Chain0 5210MHz

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10-2020,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.


4.1.3 Test Setup

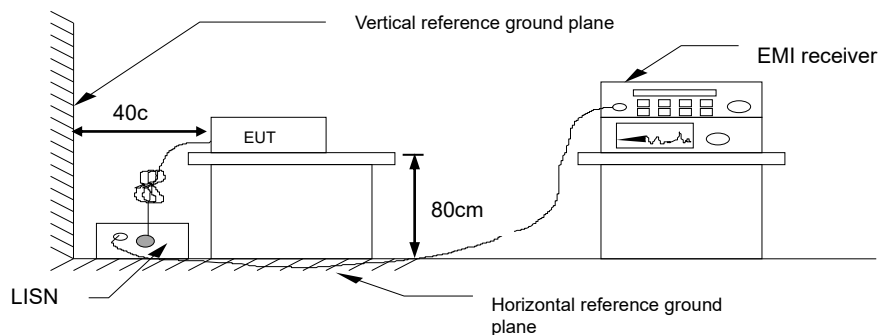

4.1.4 Test Result

Normal Mode

Project No	: TM-2602000265P	Test Date	: 2026-06-01
Operation Band	: System	Temp./Humi.	: 25°C / 65%
Test Chamber	: Conduction	Engineer	: Tony.Chao
Probe	: Line	Test Voltage	: AC 120V/60Hz
Note	:		

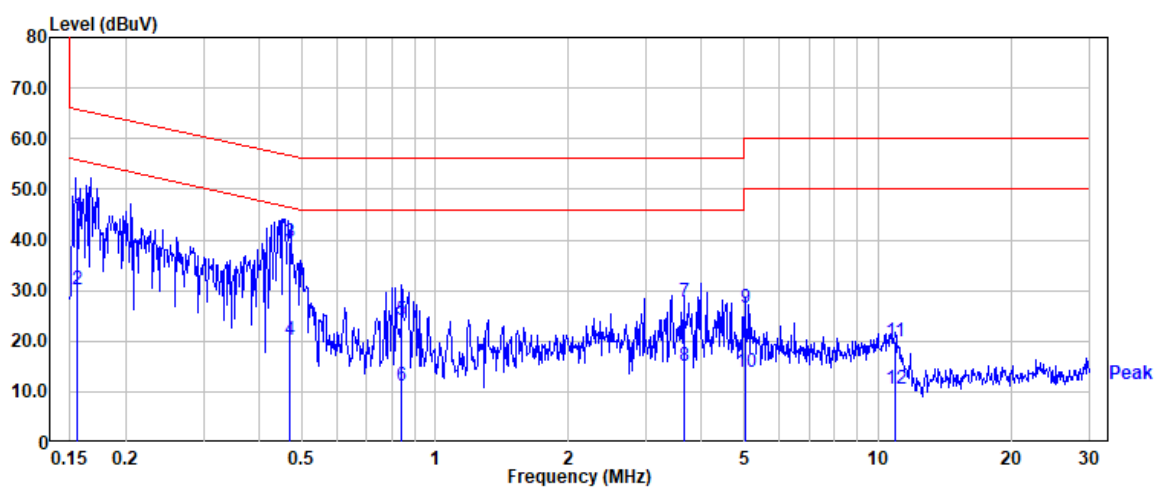

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.156	44.58	0.11	44.69	65.69	-21.00	QP
0.156	30.13	0.11	30.24	55.69	-25.45	Average
0.469	39.46	0.08	39.54	56.53	-16.99	QP
0.469	20.06	0.08	20.14	46.53	-26.39	Average
0.843	23.95	0.09	24.04	56.00	-31.96	QP
0.843	11.08	0.09	11.17	46.00	-34.83	Average
3.659	27.69	0.15	27.84	56.00	-28.16	QP
3.659	14.95	0.15	15.10	46.00	-30.90	Average
5.012	26.32	0.17	26.49	60.00	-33.51	QP
5.012	13.60	0.17	13.77	50.00	-36.23	Average
10.961	19.78	0.26	20.04	60.00	-39.96	QP
10.961	10.41	0.26	10.67	50.00	-39.33	Average


Note: 1. Actual FS= Spectrum Read Level + Factor

Note: 2. Margin= Actual FS – Limit

Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 22 / 268
Rev. 00

Project No : TM-2602000265P Test Date : 2026-06-01
Operation Band : System Temp./Humi. : 25°C / 65%
Test Chamber : Conduction Engineer : Tony.Chao
Probe : Neutral Test Voltage : AC 120V/60Hz
Note :

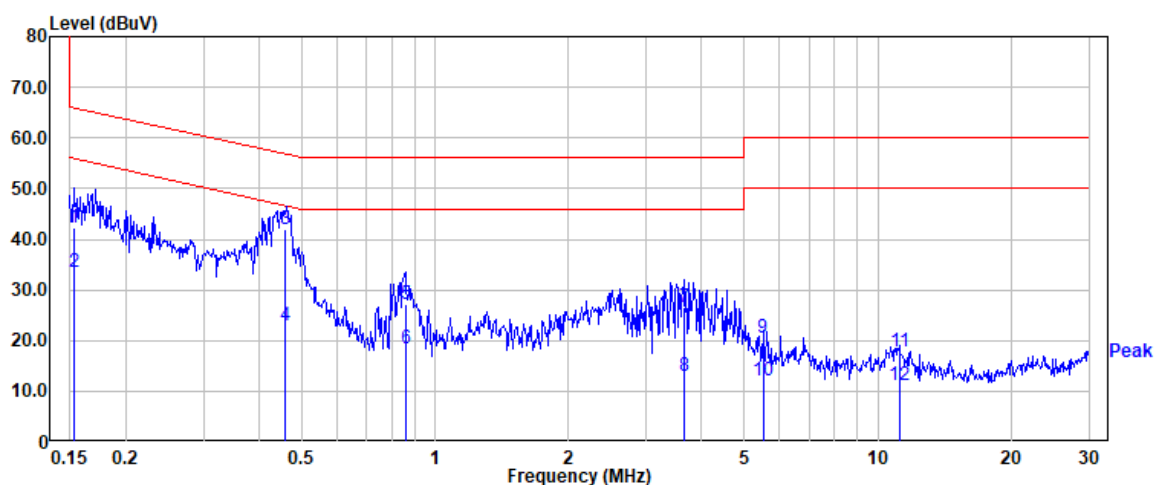

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.154	42.10	0.12	42.22	65.79	-23.57	QP
0.154	33.35	0.12	33.47	55.79	-22.32	Average
0.458	41.88	0.10	41.98	56.72	-14.74	QP
0.458	22.89	0.10	22.99	46.72	-23.73	Average
0.862	27.06	0.11	27.17	56.00	-28.83	QP
0.862	18.31	0.11	18.42	46.00	-27.58	Average
3.644	26.48	0.17	26.65	56.00	-29.35	QP
3.644	12.87	0.17	13.04	46.00	-32.96	Average
5.510	20.49	0.19	20.68	60.00	-39.32	QP
5.510	11.89	0.19	12.08	50.00	-37.92	Average
11.182	17.60	0.26	17.86	60.00	-42.14	QP
11.182	10.90	0.26	11.16	50.00	-38.84	Average

Note: 1. Actual FS= Spectrum Read Level + Factor


Note: 2. Margin= Actual FS – Limit



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 23 / 268
Rev. 00

Project No : TM-2602000265P Test Date : 2026-06-01
Operation Band : System Temp./Humi. : 25°C / 65%
Test Chamber : Conduction Engineer : Tony.Chao
Probe : Line Test Voltage : AC 230V/60Hz
Note :

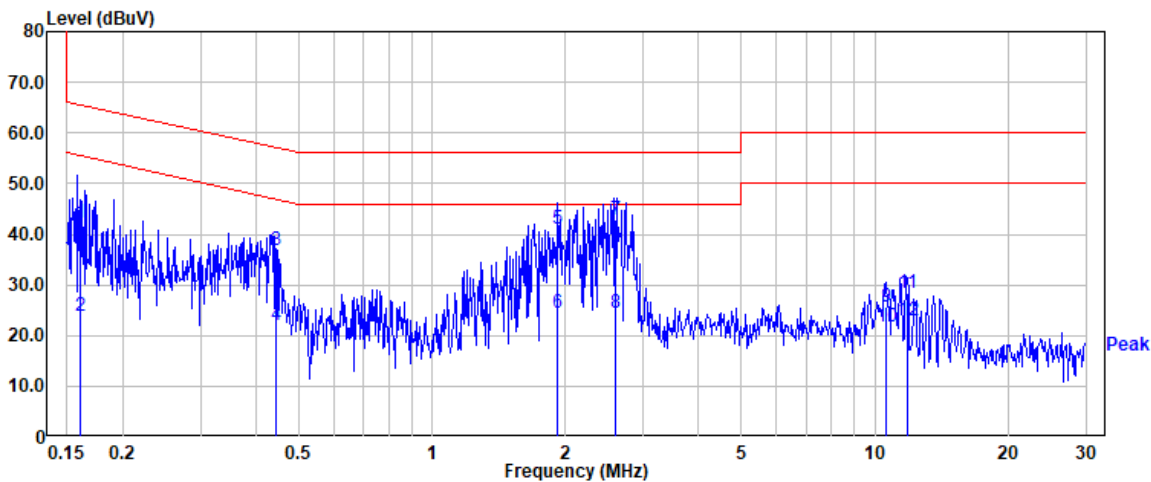


Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.161	42.28	0.11	42.39	65.41	-23.02	QP
0.161	23.76	0.11	23.87	55.41	-31.54	Average
0.446	36.75	0.08	36.83	56.95	-20.12	QP
0.446	21.87	0.08	21.95	46.95	-25.00	Average
1.925	40.87	0.12	40.99	56.00	-15.01	QP
1.925	24.39	0.12	24.51	46.00	-21.49	Average
2.594	42.73	0.13	42.86	56.00	-13.14	QP
2.594	24.27	0.13	24.40	46.00	-21.60	Average
10.585	25.53	0.26	25.79	60.00	-34.21	Peak
10.585	21.56	0.26	21.82	50.00	-28.18	Average
11.826	27.97	0.27	28.24	60.00	-31.76	QP
11.826	22.57	0.27	22.84	50.00	-27.16	Average

Note: 1. Actual FS= Spectrum Read Level + Factor
Note: 2. Margin= Actual FS – Limit

Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 24 / 268
Rev. 00

Project No : TM-2602000265P Test Date : 2026-06-01
Operation Band : System Temp./Humi. : 25°C / 65%
Test Chamber : Conduction Engineer : Tony.Chao
Probe : Neutral Test Voltage : AC 230V/60Hz
Note :

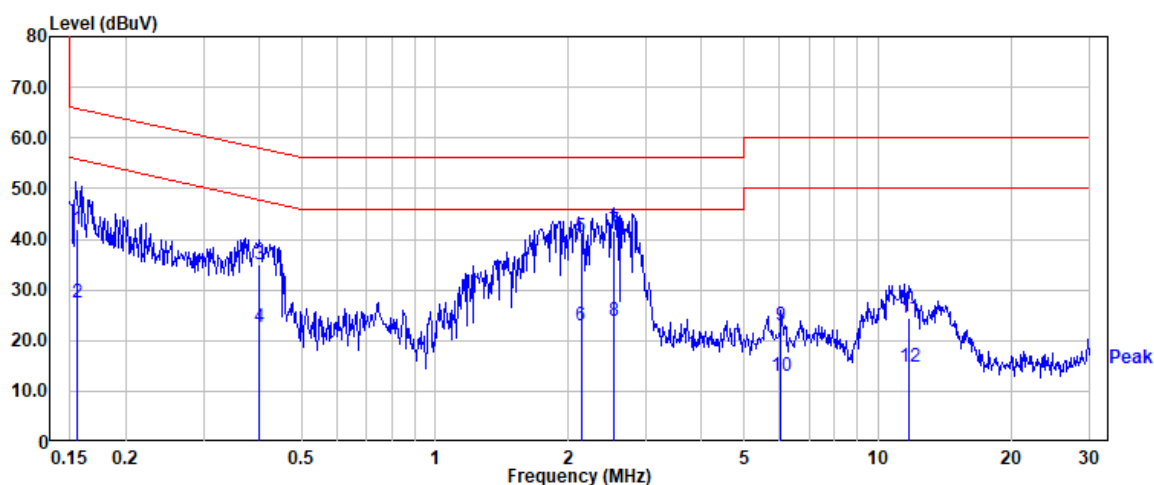

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.156	41.79	0.12	41.91	65.67	-23.76	QP
0.156	27.49	0.12	27.61	55.67	-28.06	Average
0.402	34.90	0.10	35.00	57.81	-22.81	QP
0.402	22.48	0.10	22.58	47.81	-25.23	Average
2.138	40.35	0.14	40.49	56.00	-15.51	QP
2.138	22.95	0.14	23.09	46.00	-22.91	Average
2.542	41.50	0.15	41.65	56.00	-14.35	QP
2.542	23.72	0.15	23.87	46.00	-22.13	Average
6.057	22.66	0.20	22.86	60.00	-37.14	QP
6.057	12.87	0.20	13.07	50.00	-36.93	Average
11.753	24.34	0.26	24.60	60.00	-35.40	QP
11.753	14.41	0.26	14.67	50.00	-35.33	Average

Note: 1. Actual FS= Spectrum Read Level + Factor

Note: 2. Margin= Actual FS – Limit




Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 25 / 268
Rev. 00

WIFI 5GHz

Project No : TM-2602000265P Test Date : 2026-05-22
Operation Band : 5G Temp./Humi. : 25°C / 65%
Test Chamber : Conduction Engineer : Ben.Yang
Probe : Line Test Voltage : AC 120V/60Hz
Note : AX20_Band3_5500 MHz

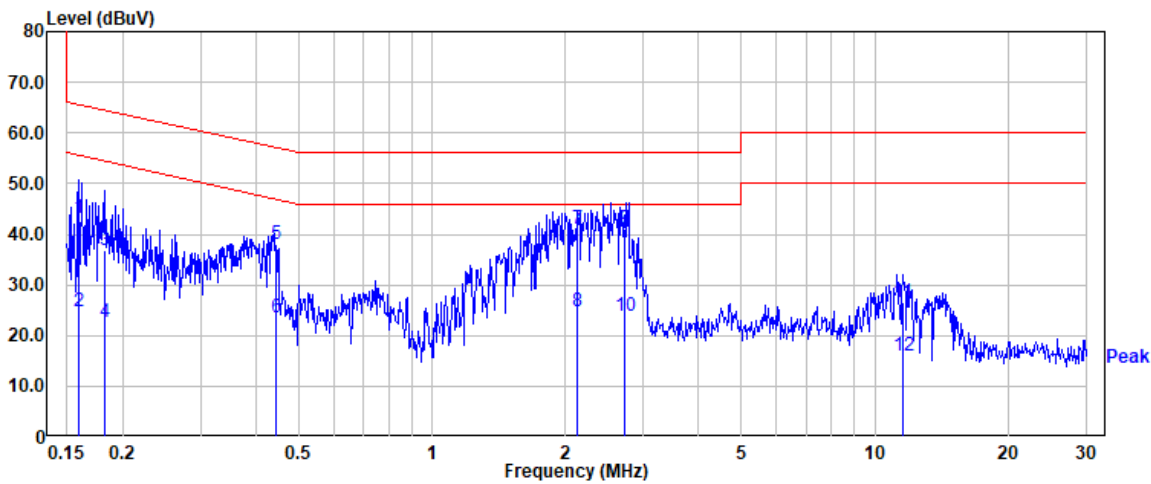

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.159	43.04	0.11	43.15	65.50	-22.35	QP
0.159	24.64	0.11	24.75	55.50	-30.75	Average
0.183	36.59	0.10	36.69	64.36	-27.67	QP
0.183	22.40	0.10	22.50	54.36	-31.86	Average
0.443	37.94	0.08	38.02	57.00	-18.98	QP
0.443	23.38	0.08	23.46	47.00	-23.54	Average
2.130	40.86	0.12	40.98	56.00	-15.02	QP
2.130	24.49	0.12	24.61	46.00	-21.39	Average
2.729	40.92	0.13	41.05	56.00	-14.95	QP
2.729	23.75	0.13	23.88	46.00	-22.12	Average
11.591	26.18	0.26	26.44	60.00	-33.56	QP
11.591	15.73	0.26	15.99	50.00	-34.01	Average


Note: 1. Actual FS= Spectrum Read Level + Factor
Note: 2. Margin= Actual FS – Limit

Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 26 / 268
Rev. 00

Project No : TM-2602000265P
Operation Band : 5G
Test Chamber : Conduction
Probe : Neutral
Note : AX20_Band3_5500 MHz

Test Date : 2026-05-22
Temp./Humi. : 25°C / 65%
Engineer : Ben.Yang
Test Voltage : AC 120V/60Hz

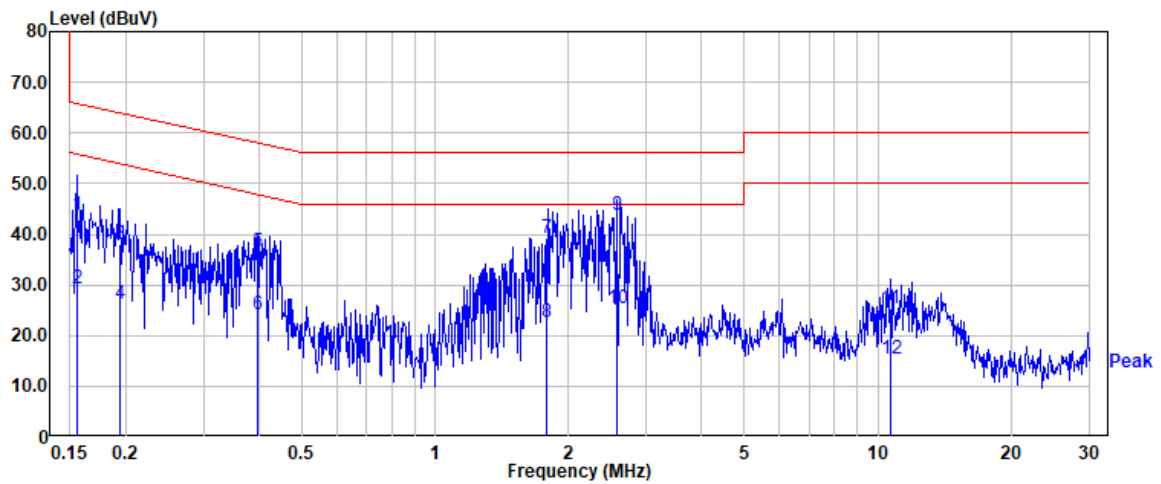

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.156	43.61	0.12	43.73	65.68	-21.95	QP
0.156	29.10	0.12	29.22	55.68	-26.46	Average
0.195	37.96	0.11	38.07	63.82	-25.75	QP
0.195	26.27	0.11	26.38	53.82	-27.44	Average
0.398	36.50	0.10	36.60	57.89	-21.29	QP
0.398	23.93	0.10	24.03	47.89	-23.86	Average
1.794	39.16	0.14	39.30	56.00	-16.70	QP
1.794	22.42	0.14	22.56	46.00	-23.44	Average
2.575	43.61	0.15	43.76	56.00	-12.24	QP
2.575	25.10	0.15	25.25	46.00	-20.75	Average
10.671	25.19	0.26	25.45	60.00	-34.55	QP
10.671	15.28	0.26	15.54	50.00	-34.46	Average

Note: 1. Actual FS= Spectrum Read Level + Factor


Note: 2. Margin= Actual FS – Limit

Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 27 / 268
Rev. 00

Project No : TM-2602000265P
Operation Band : 5G
Test Chamber : Conduction
Probe : Line
Note : AX20_Band3_5500 MHz

Test Date : 2026-05-22
Temp./Humi. : 25°C / 65%
Engineer : Ben.Yang
Test Voltage : AC 230V/60Hz

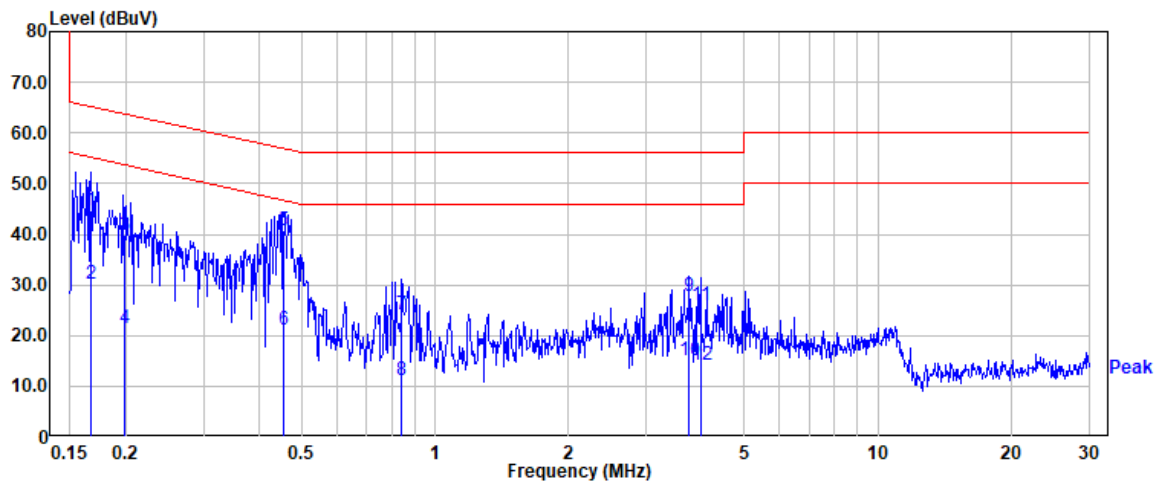

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.167	44.59	0.10	44.69	65.12	-20.43	QP
0.167	30.14	0.10	30.24	55.12	-24.88	Average
0.199	39.62	0.09	39.71	63.65	-23.94	QP
0.199	21.39	0.09	21.48	53.65	-32.17	Average
0.456	40.58	0.08	40.66	56.77	-16.11	QP
0.456	21.19	0.08	21.27	46.77	-25.50	Average
0.839	23.95	0.09	24.04	56.00	-31.96	QP
0.839	11.08	0.09	11.17	46.00	-34.83	Average
3.757	27.68	0.16	27.84	56.00	-28.16	QP
3.757	14.94	0.16	15.10	46.00	-30.90	Average
3.986	25.82	0.16	25.98	56.00	-30.02	QP
3.986	13.89	0.16	14.05	46.00	-31.95	Average

Note: 1. Actual FS= Spectrum Read Level + Factor


Note: 2. Margin= Actual FS – Limit



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 28 / 268
Rev. 00

Project No : TM-2602000265P Test Date : 2026-05-22
Operation Band : 5G Temp./Humi. : 25°C / 65%
Test Chamber : Conduction Engineer : Ben.Yang
Probe : Neutral Test Voltage : AC 230V/60Hz
Note : AX20_Band3_5500 MHz

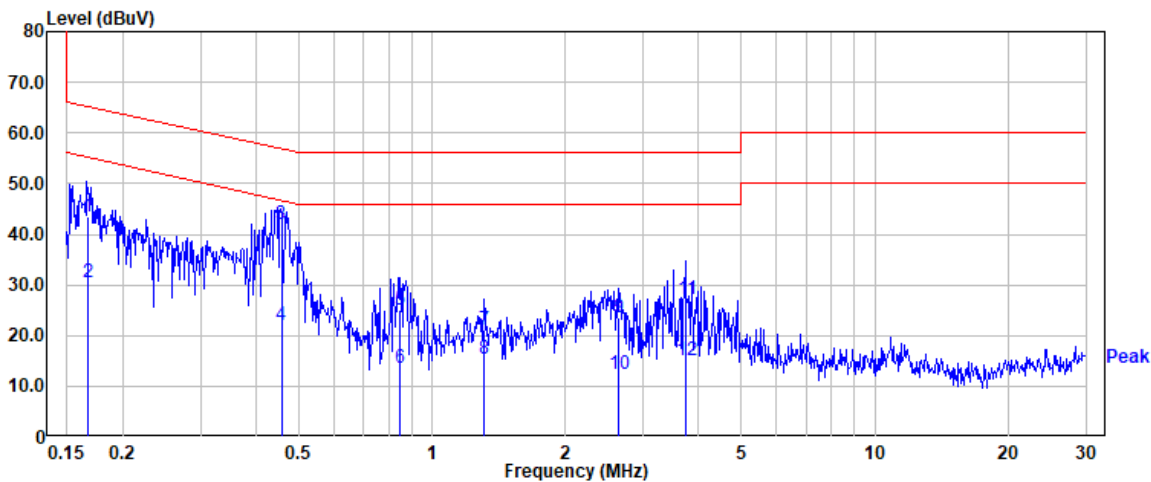

Freq	Read Level	Factor	Actual FS	Limit	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV	dBuV	dB	PK/QP/AV
0.167	43.41	0.12	43.53	65.12	-21.59	QP
0.167	30.34	0.12	30.46	55.12	-24.66	Average
0.457	41.97	0.10	42.07	56.74	-14.67	QP
0.457	21.86	0.10	21.96	46.74	-24.78	Average
0.844	25.06	0.11	25.17	56.00	-30.83	QP
0.844	13.56	0.11	13.67	46.00	-32.33	Average
1.310	20.93	0.12	21.05	56.00	-34.95	QP
1.310	15.21	0.12	15.33	46.00	-30.67	Average
2.640	23.26	0.15	23.41	56.00	-32.59	QP
2.640	12.20	0.15	12.35	46.00	-33.65	Average
3.751	27.09	0.17	27.26	56.00	-28.74	QP
3.751	14.87	0.17	15.04	46.00	-30.96	Average

Note: 1. Actual FS= Spectrum Read Level + Factor
Note: 2. Margin= Actual FS – Limit

4.2 26dB BANDWIDTH, 6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

4.2.1 Test Limit

26 dB Bandwidth : For reporting purposes only.

6 dB Bandwidth : Least 500kHz.

Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

26dB

1. This measurement setting are specified in section D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW: approximately 1% of the emission bandwidth.
3. Set the VBW>RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26dB down from the peak of the emission. Compare this with the RBW setting of the analyser. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6dB

1. This measurement setting are specified in section D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 30 / 268
Rev. 00

99%

1. This measurement setting are specified in section D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set center frequency to the nominal EUT channel center frequency.
3. Set span = 1.5 times to 5.0 times the OBW.
4. Set RBW = 1 % to 5% of the OBW.
5. Set VBW $\geq 3 \times$ RBW

4.2.3 Test Setup

Refer to section 1.8.



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 31 / 268
Rev. 00

4.2.4 Test Result

Temperature: 24.1~25.4°C **Test Date:** April 29~May 04, 2026
Humidity: 55~60% RH **Tested by:** David Li

Note: The measurement results of all 6dBc test channels are greater than 500kHz.

Occupied Bandwidth(99%)

802.11a_Ch0

Frequency (MHz)	99% BW (MHz)
5180	16.411
5220	16.403
5240	16.431
5260	16.389
5300	16.416
5320	16.385
5500	16.465
5600	16.424
5700	16.428

802.11a_Ch1

Frequency (MHz)	99% BW (MHz)
5180	16.385
5220	16.349
5240	16.344
5260	16.358
5300	16.375
5320	16.350
5500	16.385
5600	16.354
5700	16.354

802.11a_Ch0

Frequency (MHz)	99% BW (MHz)
5745	16.438
5785	16.386
5825	16.409

802.11a_Ch1

Frequency (MHz)	99% BW (MHz)
5745	16.416
5785	16.368
5825	16.356

802.11n_HT20_Ch0

Frequency (MHz)	99% BW (MHz)
5180	17.572
5220	17.614
5240	17.572
5260	17.591
5300	17.562
5320	17.571
5500	17.624
5600	17.587
5700	17.578

802.11n_HT20_Ch1

Frequency (MHz)	99% BW (MHz)
5180	17.555
5220	17.569
5240	17.587
5260	17.568
5300	17.542
5320	17.544
5500	17.555
5600	17.530
5700	17.545

802.11n_HT20_Ch0

Frequency (MHz)	99% BW (MHz)
5745	17.599
5785	17.578
5825	17.542

802.11n_HT20_Ch1

Frequency (MHz)	99% BW (MHz)
5745	17.566
5785	17.573
5825	17.540

802.11n_HT40_Ch0

Frequency (MHz)	99% BW (MHz)
5190	36.260
5230	36.298
5270	36.252
5310	36.276
5510	36.279
5590	36.293
5670	36.295

802.11n_HT40_Ch1

Frequency (MHz)	99% BW (MHz)
5190	36.259
5230	36.292
5270	36.273
5310	36.258
5510	36.202
5590	36.285
5670	36.276

802.11n_HT40_Ch0

Frequency (MHz)	99% BW (MHz)
5755	36.292
5795	36.189

802.11n_HT40_Ch1

Frequency (MHz)	99% BW (MHz)
5755	36.262
5795	36.224

802.11ac_VHT80_Ch0

Frequency (MHz)	99% BW (MHz)
5210	75.717
5290	75.802
5530	75.736
5610	75.740

802.11ac_VHT80_Ch1

Frequency (MHz)	99% BW (MHz)
5210	75.797
5290	75.809
5530	75.704
5610	75.725

802.11ac_VHT80_Ch0

Frequency (MHz)	99% BW (MHz)
5775	75.873

802.11ac_VHT80_Ch1

Frequency (MHz)	99% BW (MHz)
5775	75.892



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 34 / 268
Rev. 00

802.11ax_HE20_SU_Ch0

Frequency (MHz)	99% BW (MHz)
5180	18.887
5220	18.886
5240	18.882
5260	18.906
5300	18.888
5320	18.912
5500	18.912
5600	18.913
5700	18.934

802.11ax_HE20_SU_Ch1

Frequency (MHz)	99% BW (MHz)
5180	18.887
5220	18.887
5240	18.890
5260	18.859
5300	18.891
5320	18.877
5500	18.875
5600	18.921
5700	18.883

802.11ax_HE20_SU_Ch0

Frequency (MHz)	99% BW (MHz)
5745	18.905
5785	18.902
5825	18.894

802.11ax_HE20_SU_Ch1

Frequency (MHz)	99% BW (MHz)
5745	18.877
5785	18.862
5825	18.835

802.11ax_HE40_SU_Ch0

Frequency (MHz)	99% BW (MHz)
5190	37.577
5230	37.605
5270	37.573
5310	37.573
5510	37.623
5590	37.501
5670	37.616

802.11ax_HE40_SU_Ch1

Frequency (MHz)	99% BW (MHz)
5190	37.596
5230	37.586
5270	37.497
5310	37.569
5510	37.574
5590	37.498
5670	37.594

802.11ax_HE40_SU_Ch0

Frequency (MHz)	99% BW (MHz)
5755	37.522
5795	37.515

802.11ax_HE40_SU_Ch1

Frequency (MHz)	99% BW (MHz)
5755	37.676
5795	37.487

802.11ax_HE80_SU_Ch0

Frequency (MHz)	99% BW (MHz)
5210	77.137
5290	77.152
5530	77.126
5610	76.893

802.11ax_HE80_SU_Ch1

Frequency (MHz)	99% BW (MHz)
5210	77.091
5290	77.030
5530	76.899
5610	77.063

802.11ax_HE80_SU_Ch0

Frequency (MHz)	99% BW (MHz)
5775	77.286

802.11ax_HE80_SU_Ch1

Frequency (MHz)	99% BW (MHz)
5775	77.053



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 36 / 268
Rev. 00

26dB & 6dB Bandwidth

802.11a_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	20.54	13.130
5220	20.14	13.040
5240	20.57	13.130
5260	20.70	13.160
5300	20.72	13.160
5320	20.35	13.090
5500	21.11	13.240
5600	20.35	13.090
5700	20.75	13.170

802.11a_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	20.66	13.150
5220	20.16	13.040
5240	20.47	13.110
5260	20.64	13.150
5300	20.44	13.100
5320	20.02	13.010
5500	20.66	13.150
5600	20.53	13.120
5700	20.20	13.050

802.11a_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	15.10	11.790
5785	12.36	10.920
5825	12.53	10.980

802.11a_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	9.20	9.640
5785	7.69	8.860
5825	13.88	11.420

802.11a_Ch0

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5240	5248.33	< 5250
5745	5736.87	> 5725

802.11a_Ch1

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5240	5248.34	< 5250
5745	5736.87	> 5725

802.11n_HT20_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	21.11	13.240
5220	21.28	13.280
5240	21.27	13.280
5260	20.51	13.120
5300	20.82	13.180
5320	20.77	13.170
5500	20.85	13.190
5600	20.81	13.180
5700	20.65	13.150

802.11n_HT20_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	20.48	13.110
5220	20.87	13.200
5240	20.92	13.210
5260	20.55	13.130
5300	20.60	13.140
5320	20.88	13.200
5500	20.62	13.140
5600	20.52	13.120
5700	20.62	13.140

802.11n_HT20_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	13.72	11.370
5785	15.07	11.780
5825	13.85	11.410

802.11n_HT20_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	13.96	11.450
5785	12.58	11.000
5825	15.18	11.810

802.11n_HT20_Ch0

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5240	5248.85	< 5250
5745	5736.25	> 5725

802.11n_HT20_Ch1

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5240	5248.85	< 5250
5745	5736.27	> 5725

802.11n_HT40_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	39.69	15.990
5230	40.28	16.050
5270	40.06	16.030
5310	39.96	16.020
5510	40.20	16.040
5590	39.90	16.010
5670	39.63	15.980

802.11n_HT40_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	39.51	15.970
5230	39.47	15.960
5270	39.47	15.960
5310	39.58	15.970
5510	39.21	15.930
5590	39.43	15.960
5670	39.21	15.930

802.11n_HT40_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	36.37	15.610
5795	36.34	15.600

802.11n_HT40_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	36.36	15.610
5795	36.39	15.610

802.11n_HT40_Ch0

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5230	5248.18	< 5250
5755	5736.92	> 5725

802.11n_HT40_Ch1

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5230	5248.18	< 5250
5755	5736.92	> 5725



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 39 / 268
Rev. 00

802.11ac_VHT80_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5210	81.47	19.110
5290	82.24	19.150
5530	81.31	19.100
5610	82.27	19.150

802.11ac_VHT80_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5210	81.46	19.110
5290	81.40	19.110
5530	81.11	19.090
5610	81.22	19.100

802.11ac_VHT80_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	76.36	18.830

802.11ac_VHT80_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	76.39	18.830

802.11ac_VHT80_Ch0

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5210	5248.27	< 5250
5775	5737.16	> 5725

802.11ac_VHT80_Ch1

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5210	5248.22	< 5250
5775	5737.16	> 5725

802.11ax_HE20_SU_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	21.12	13.250
5220	20.84	13.190
5240	20.99	13.220
5260	20.93	13.210
5300	20.74	13.170
5320	20.93	13.210
5500	21.69	13.360
5600	21.37	13.300
5700	21.60	13.340

802.11ax_HE20_SU_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	21.26	13.280
5220	21.16	13.260
5240	21.31	13.290
5260	21.16	13.260
5300	20.69	13.160
5320	21.04	13.230
5500	20.97	13.220
5600	21.03	13.230
5700	21.14	13.250

802.11ax_HE20_SU_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	18.33	12.630
5785	17.93	12.540
5825	18.57	12.690

802.11ax_HE20_SU_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	17.25	12.370
5785	17.86	12.520
5825	17.50	12.430

802.11ax_HE20_SU_Ch0

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5240	5249.48	< 5250
5745	5735.60	> 5725

802.11ax_HE20_SU_Ch1

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5240	5249.54	< 5250
5745	5735.60	> 5725

802.11ax_HE40_SU_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	39.58	15.970
5230	39.79	16.000
5270	40.08	16.030
5310	39.57	15.970
5510	39.56	15.970
5590	39.65	15.980
5670	39.91	16.010

802.11ax_HE40_SU_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	40.04	16.020
5230	39.75	15.990
5270	39.90	16.010
5310	39.56	15.970
5510	39.74	15.990
5590	40.05	16.030
5670	39.50	15.970

802.11ax_HE40_SU_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	37.57	15.750
5795	37.17	15.700

802.11ax_HE40_SU_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	37.29	15.720
5795	36.93	15.670

802.11ax_HE40_SU_Ch0

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5230	5248.84	< 5250
5755	5736.23	> 5725

802.11ax_HE40_SU_Ch1

Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5230	5248.84	< 5250
5755	5736.24	> 5725



Project No: TM-2602000265P
Report No.: TMWK2603001434KR

Page 42 / 268
Rev. 00

802.11ax_HE80_SU_Ch0

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5210	81.85	19.130
5290	81.47	19.110
5530	81.91	19.130
5610	81.63	19.120

802.11ax_HE80_SU_Ch1

Freq. (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5210	81.37	19.100
5290	80.67	19.070
5530	81.35	19.100
5610	81.56	19.110

802.11ax_HE80_SU_Ch0

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	77.71	18.900

802.11ax_HE80_SU_Ch1

Freq. (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	77.00	18.860

802.11ax_HE80_SU_Ch0


Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5210	5248.93	< 5250
5775	5736.51	> 5725

802.11ax_HE80_SU_Ch1


Freq. (MHz)	Measured Freq. (MHz)	Limit (MHz)
5210	5248.88	< 5250
5775	5736.52	> 5725

Test Data


Occupied Bandwidth(99%)

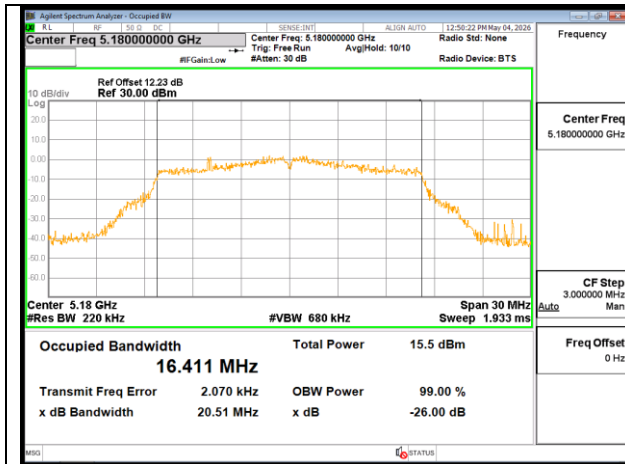


802.11a 20MHz Chain0 5180MHz

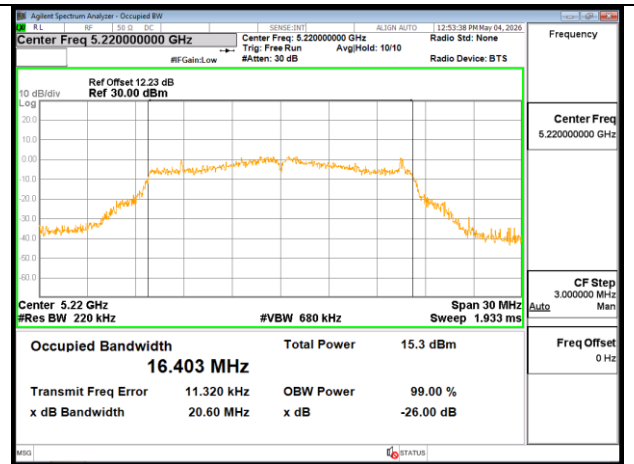


802.11a 20MHz Chain0 5220MHz

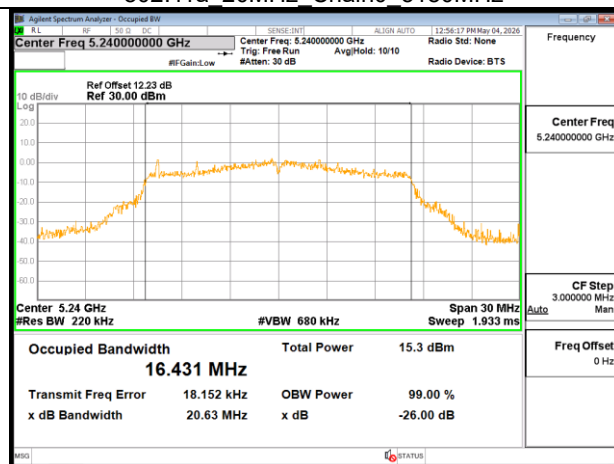


802.11a 20MHz Chain0 5240MHz

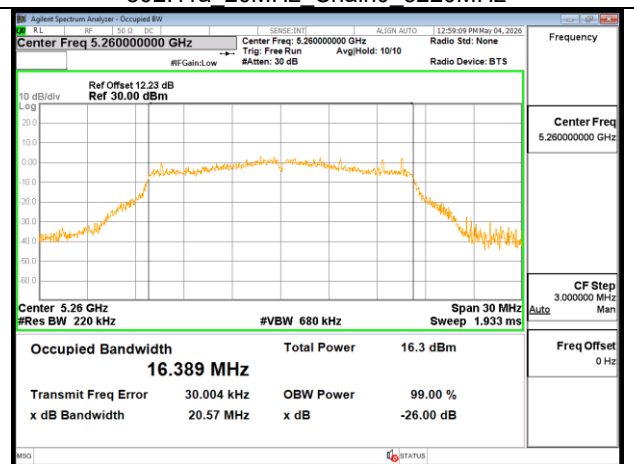


802.11a 20MHz Chain0 5260MHz

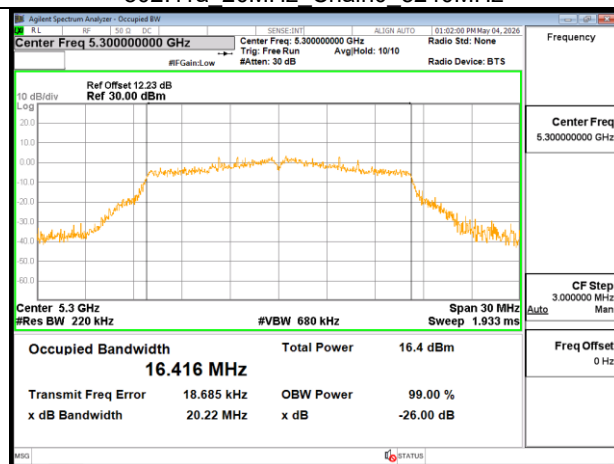


802.11a 20MHz Chain0 5300MHz

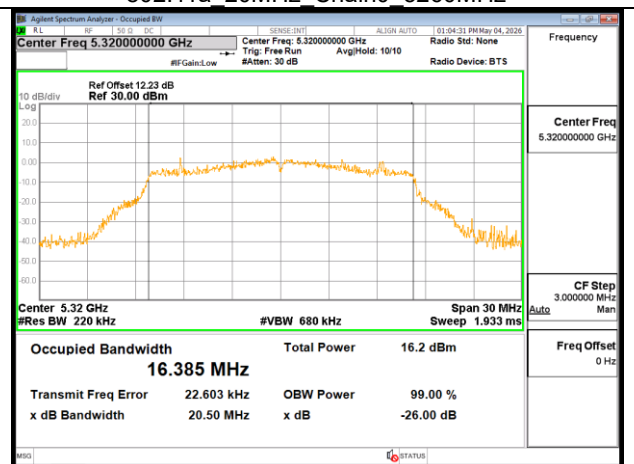


802.11a 20MHz Chain0 5320MHz

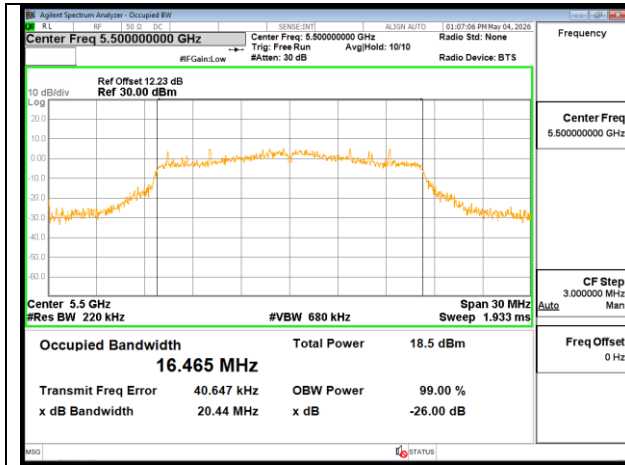


802.11a 20MHz Chain0 5500MHz

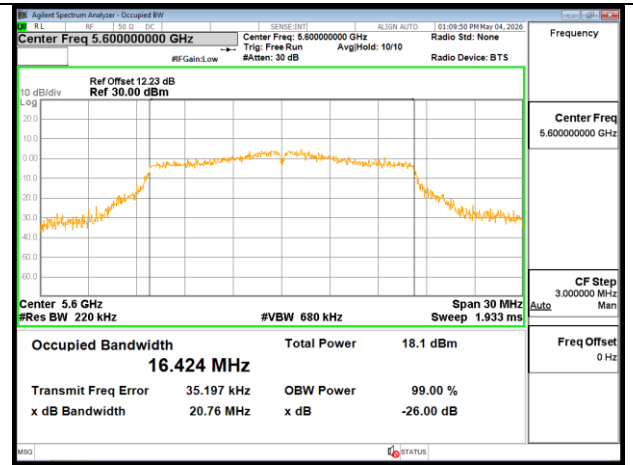


802.11a 20MHz Chain0 5600MHz

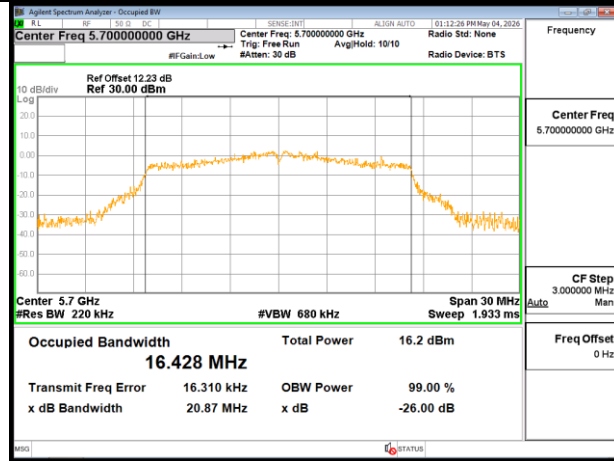


802.11a 20MHz Chain0 5700MHz

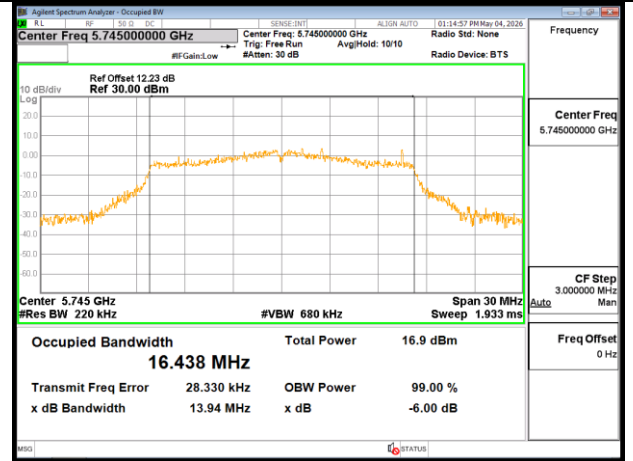


802.11a 20MHz Chain0 5745MHz

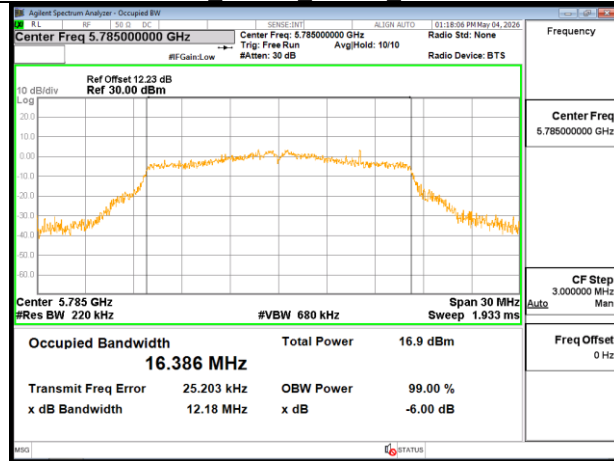


802.11a 20MHz Chain0 5785MHz

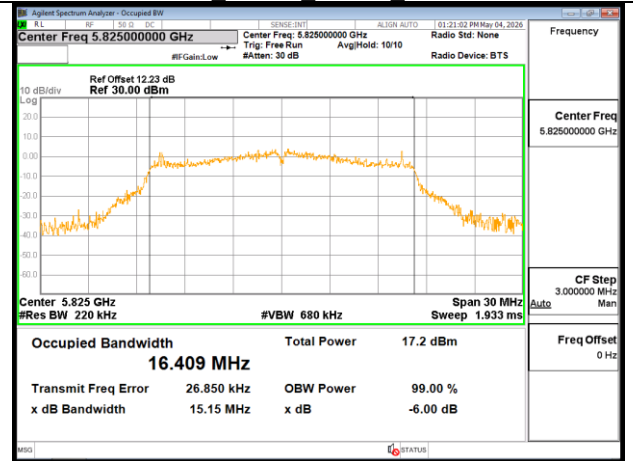


802.11a 20MHz Chain0 5825MHz

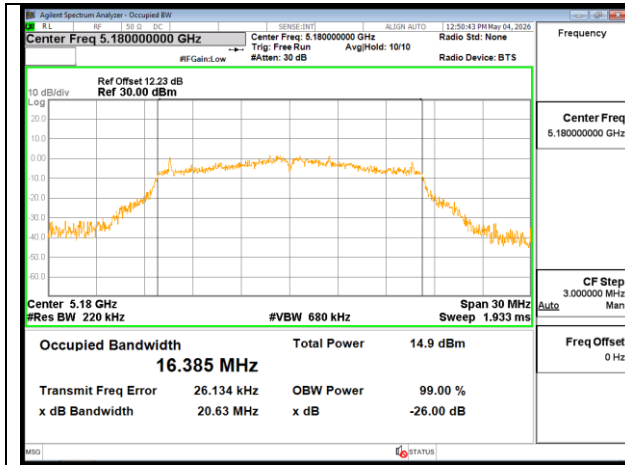


802.11a 20MHz Chain1 5180MHz

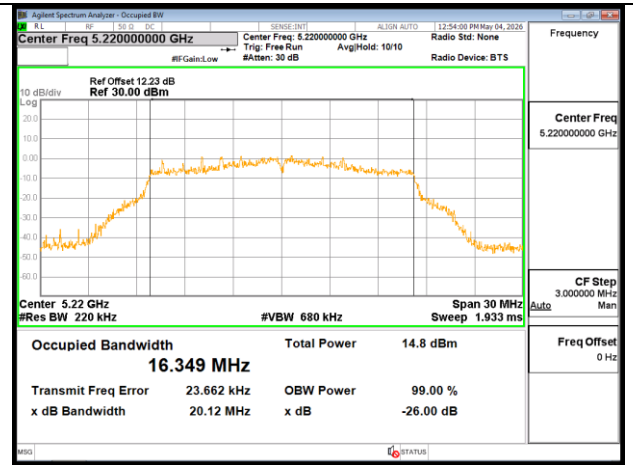


802.11a 20MHz Chain1 5220MHz

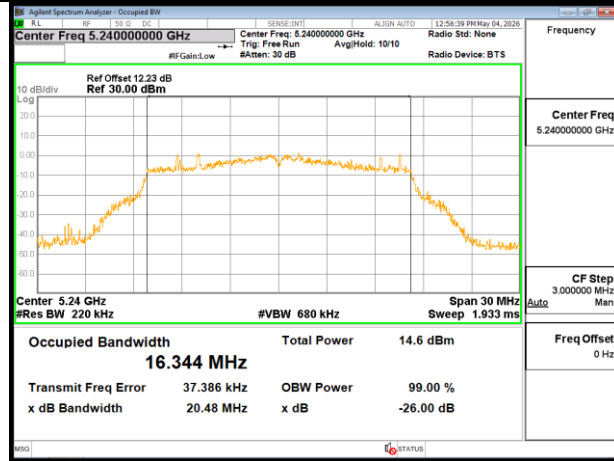


802.11a 20MHz Chain1 5240MHz

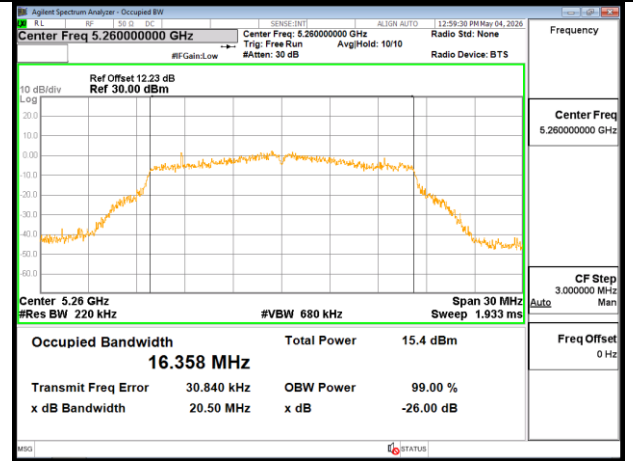


802.11a 20MHz Chain1 5260MHz

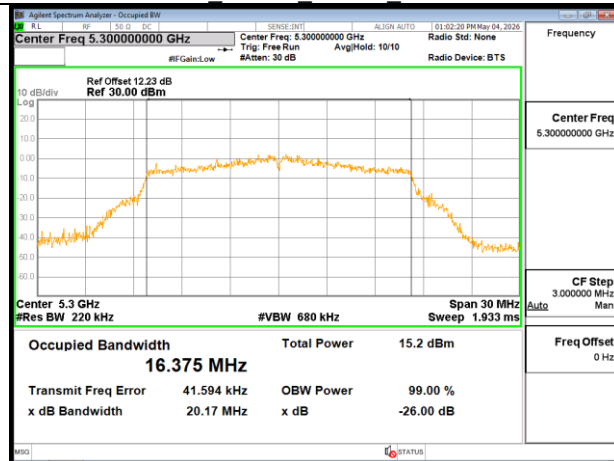


802.11a 20MHz Chain1 5300MHz

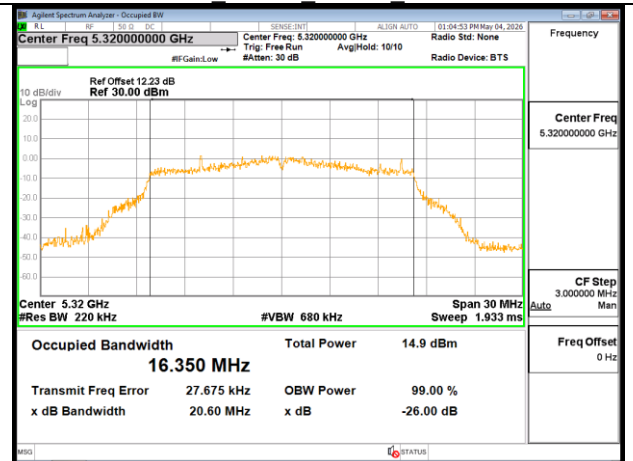


802.11a 20MHz Chain1 5320MHz

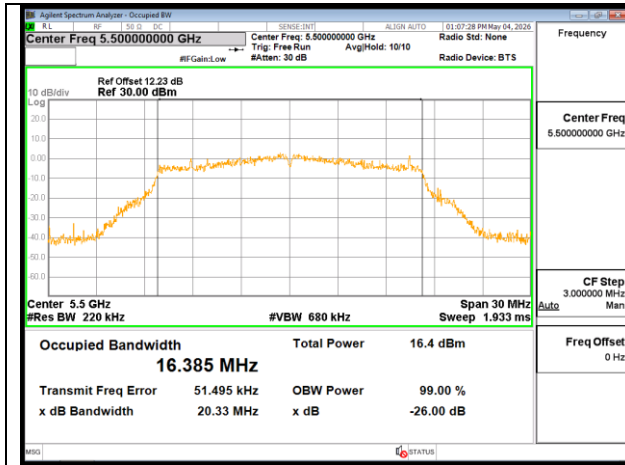


802.11a 20MHz Chain1 5500MHz

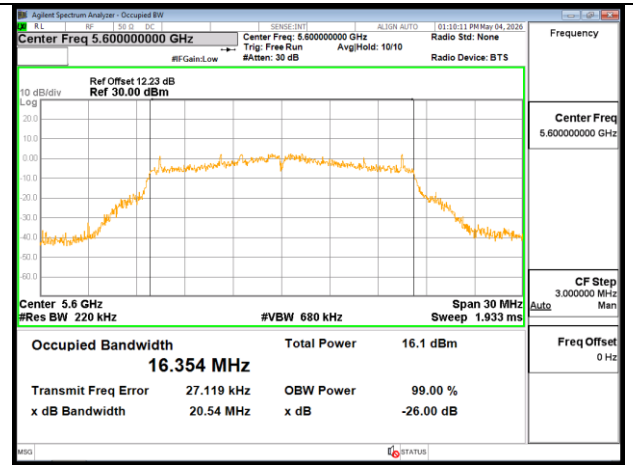


802.11a 20MHz Chain1 5600MHz

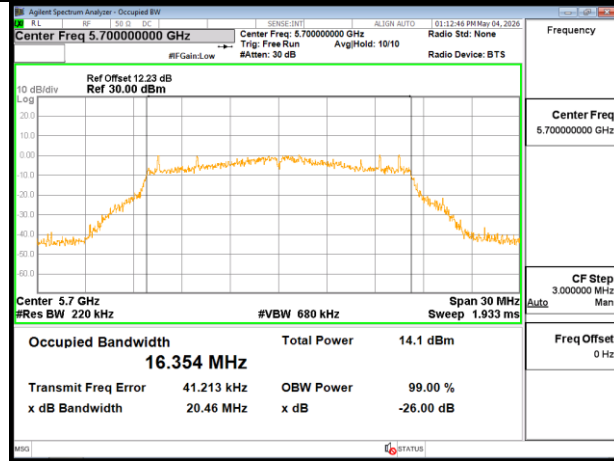


802.11a 20MHz Chain1 5700MHz

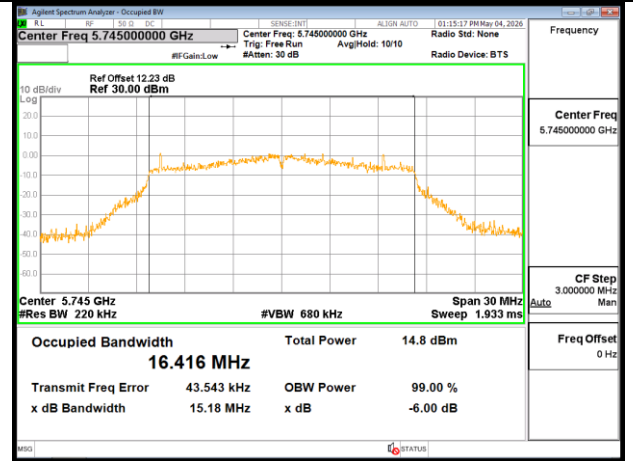


802.11a 20MHz Chain1 5745MHz

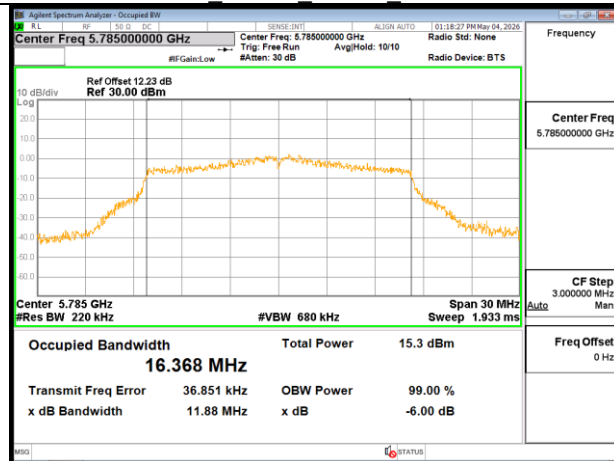


802.11a 20MHz Chain1 5785MHz

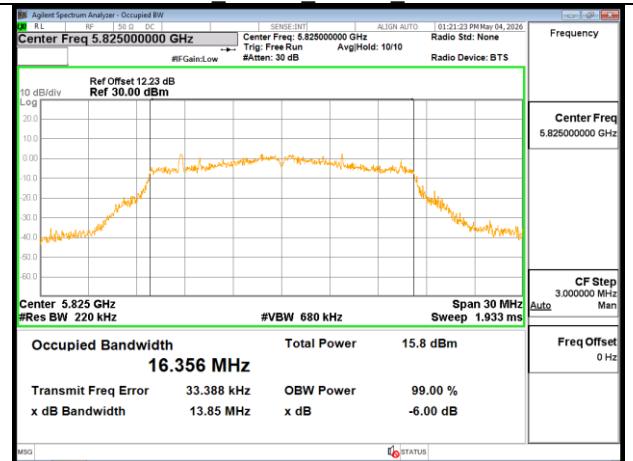


802.11a 20MHz Chain1 5825MHz

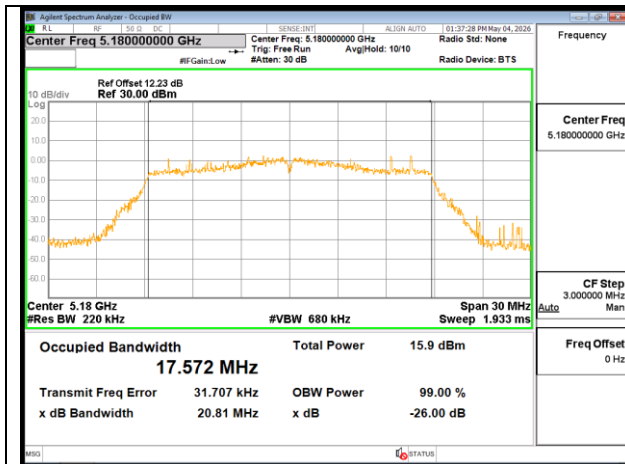


802.11n 20MHz Chain0 5180MHz

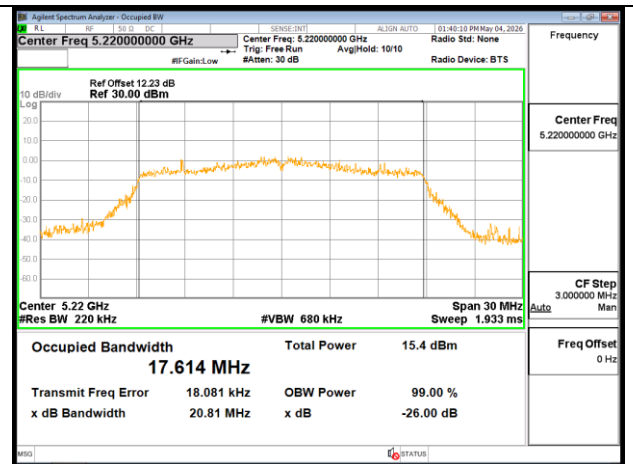


802.11n 20MHz Chain0 5220MHz

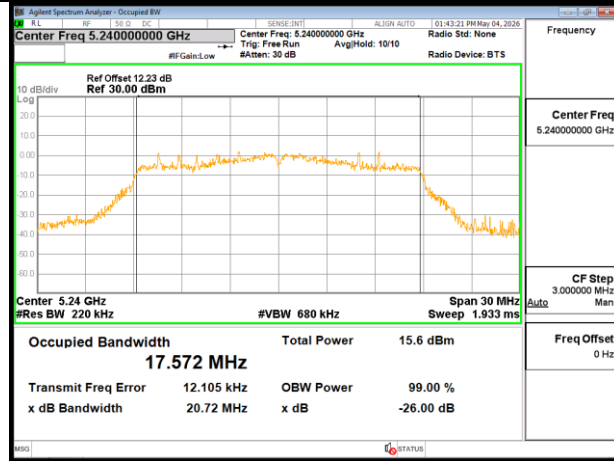


802.11n 20MHz Chain0 5240MHz

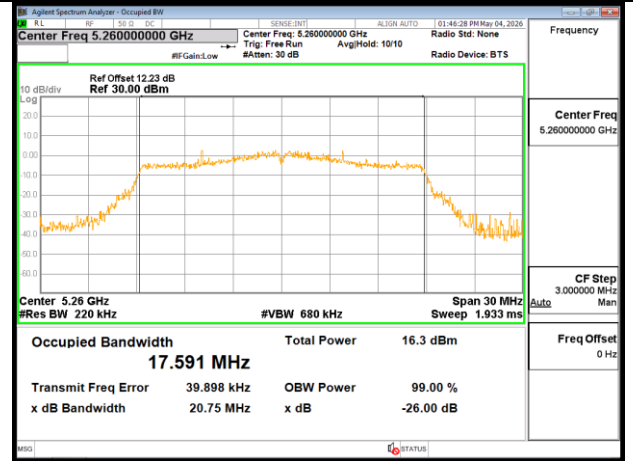


802.11n 20MHz Chain0 5260MHz

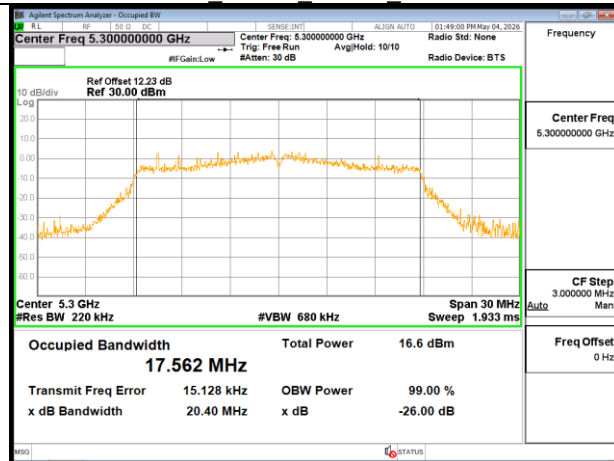


802.11n 20MHz Chain0 5300MHz

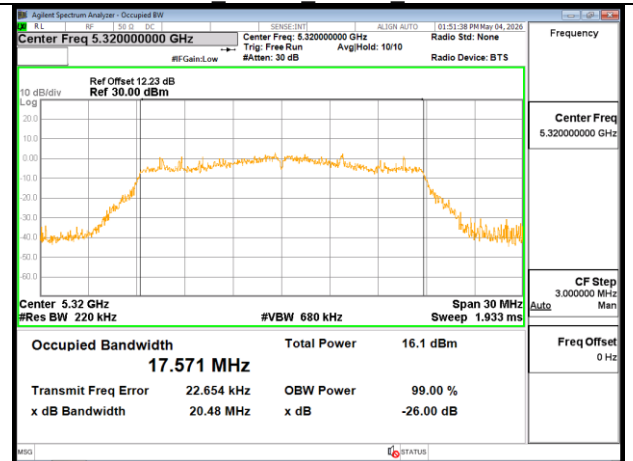


802.11n 20MHz Chain0 5320MHz

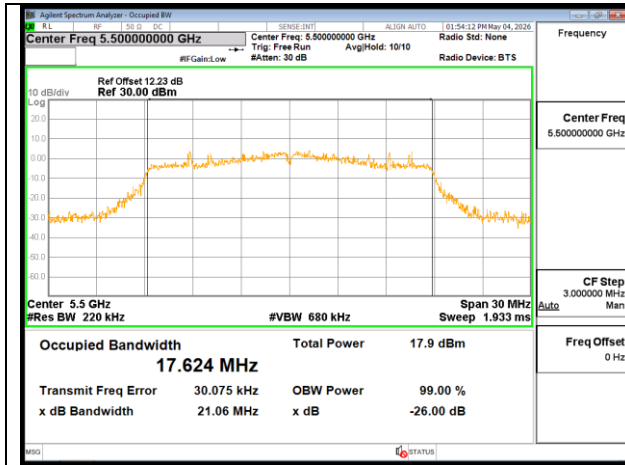


802.11n 20MHz Chain0 5500MHz

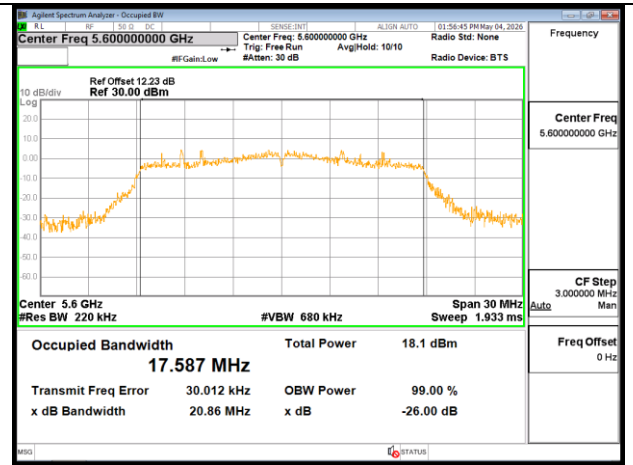


802.11n 20MHz Chain0 5600MHz

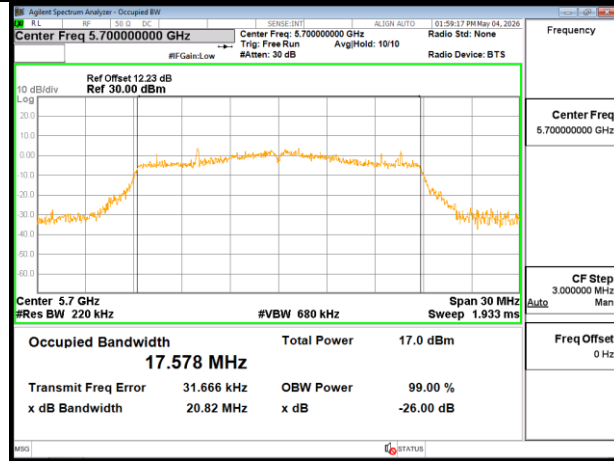


802.11n 20MHz Chain0 5700MHz

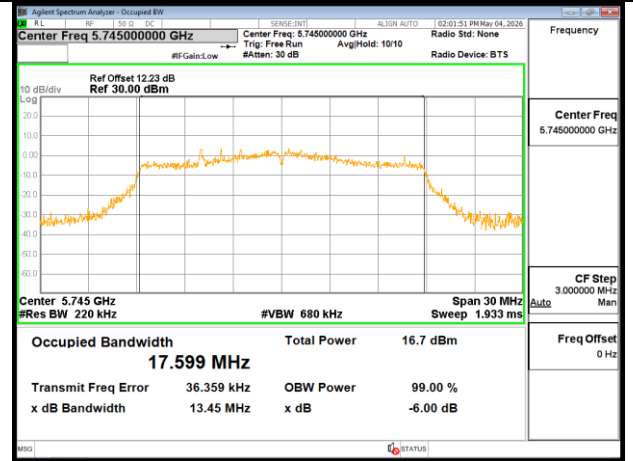


802.11n 20MHz Chain0 5745MHz

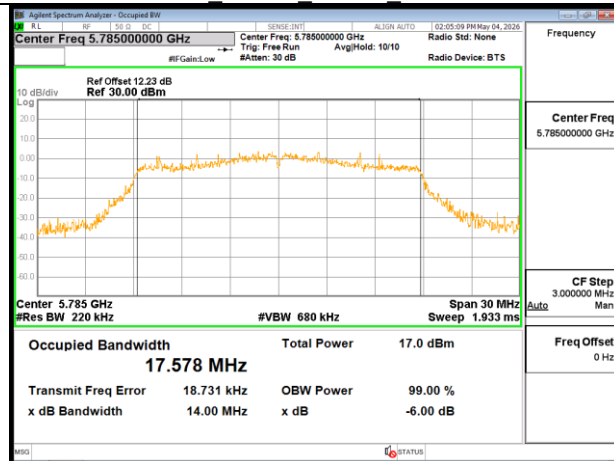


802.11n 20MHz Chain0 5785MHz

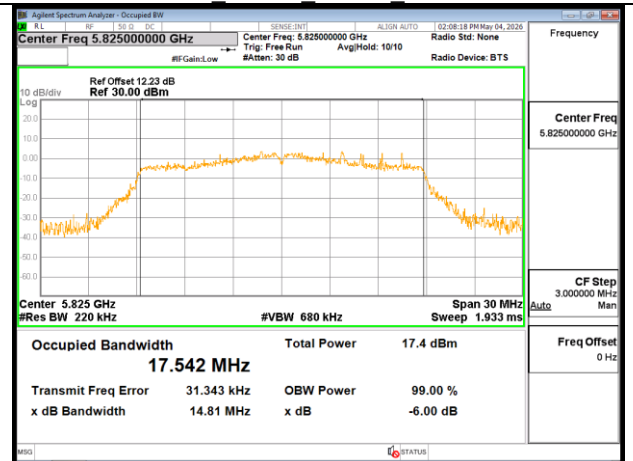


802.11n 20MHz Chain0 5825MHz

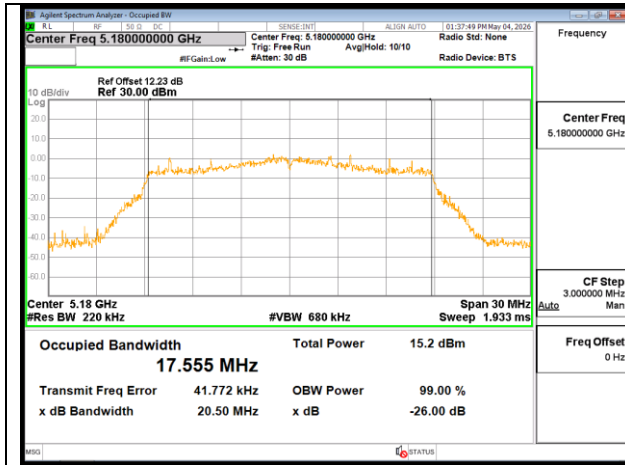


802.11n 20MHz Chain1 5180MHz

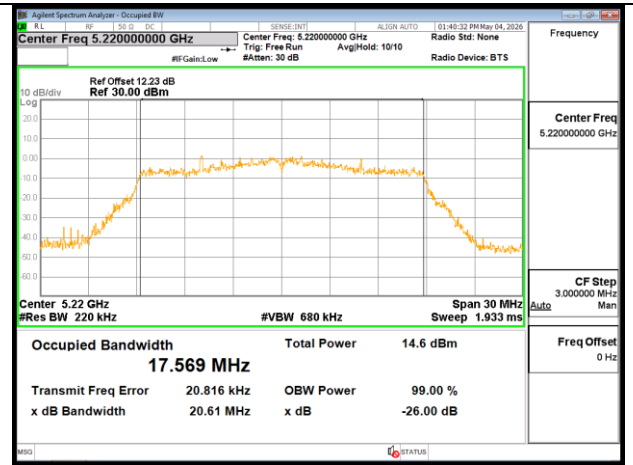


802.11n 20MHz Chain1 5220MHz

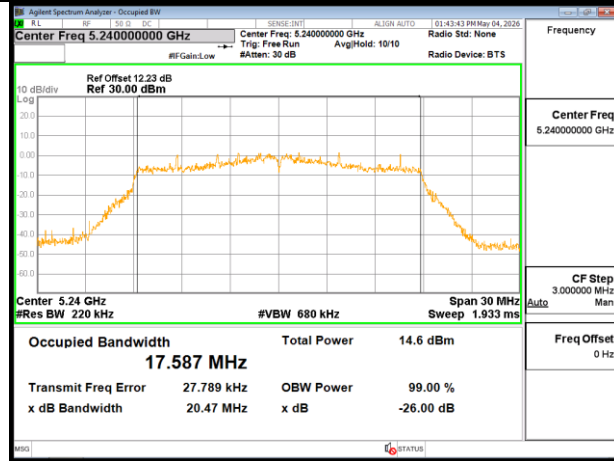


802.11n 20MHz Chain1 5240MHz

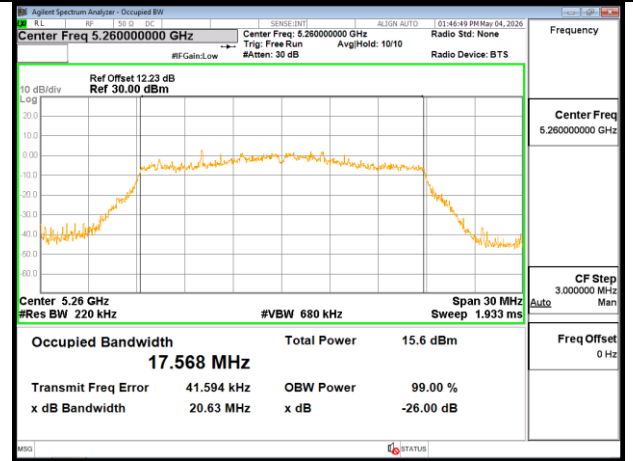


802.11n 20MHz Chain1 5260MHz

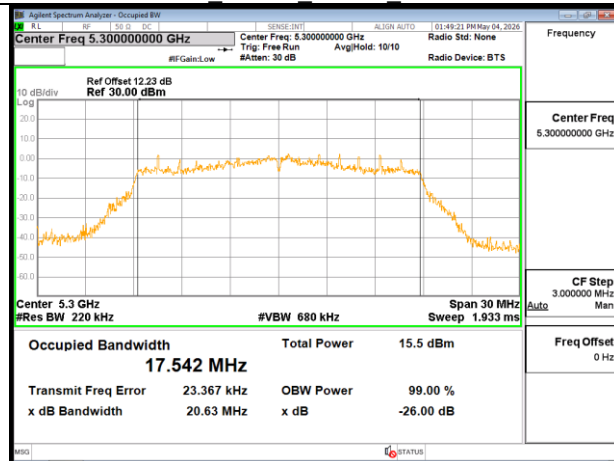


802.11n 20MHz Chain1 5300MHz

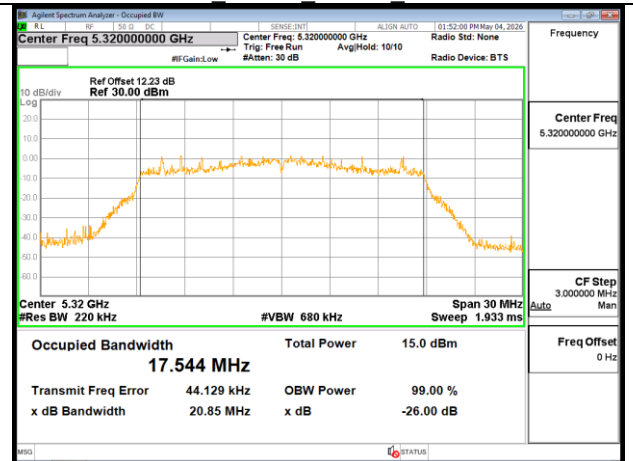


802.11n 20MHz Chain1 5320MHz

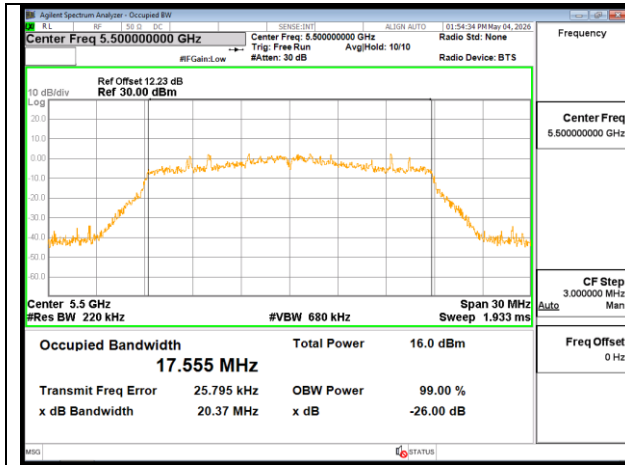


802.11n 20MHz Chain1 5500MHz

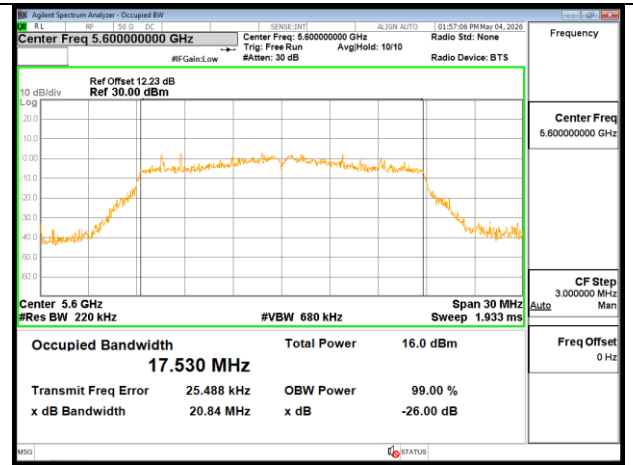


802.11n 20MHz Chain1 5600MHz

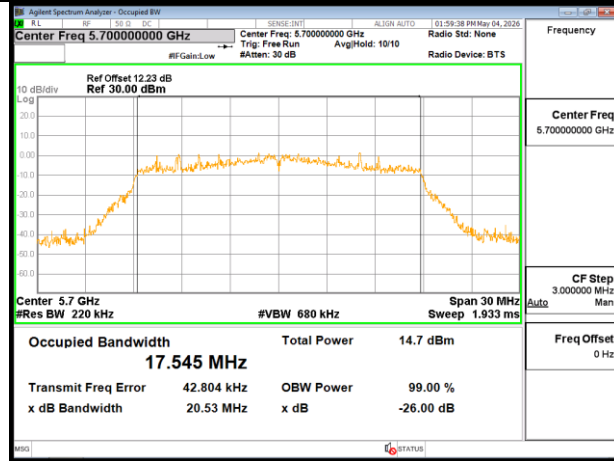


802.11n 20MHz Chain1 5700MHz

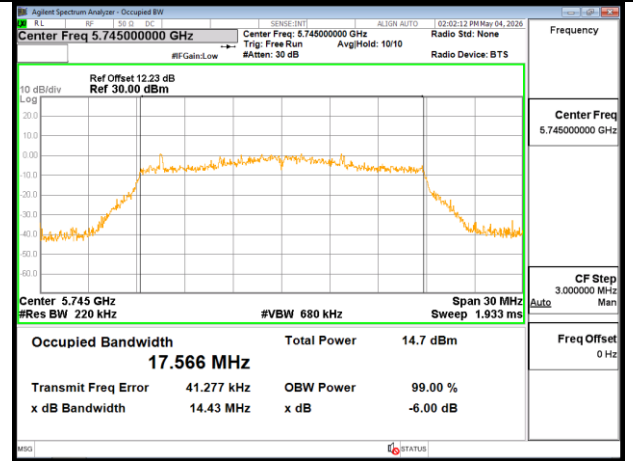


802.11n 20MHz Chain1 5745MHz

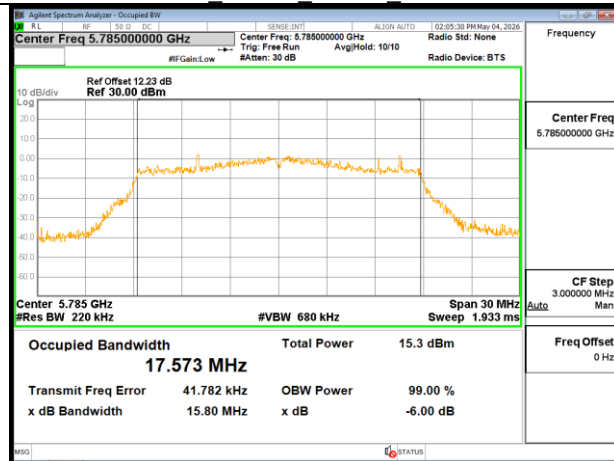


802.11n 20MHz Chain1 5785MHz

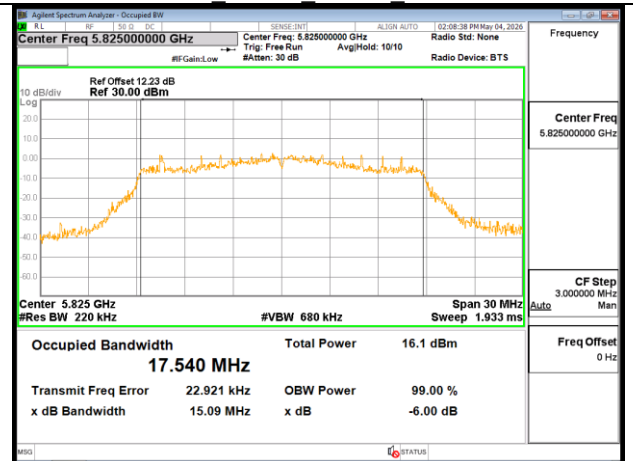


802.11n 20MHz Chain1 5825MHz

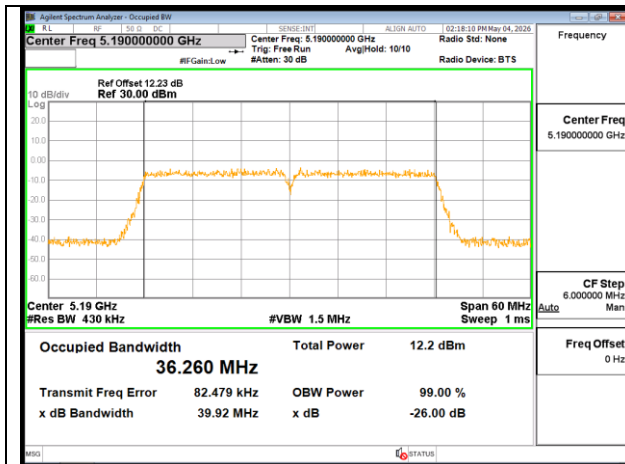


802.11n 40MHz Chain0 5190MHz

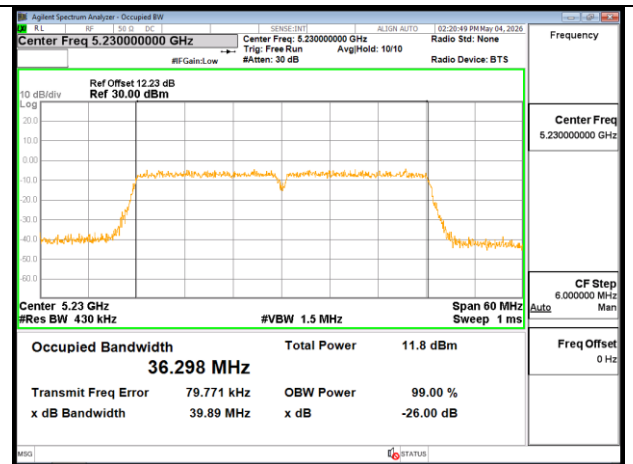


802.11n 40MHz Chain0 5230MHz

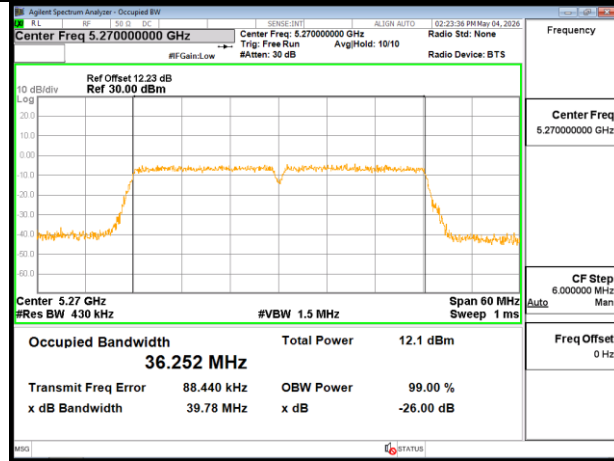


802.11n 40MHz Chain0 5270MHz

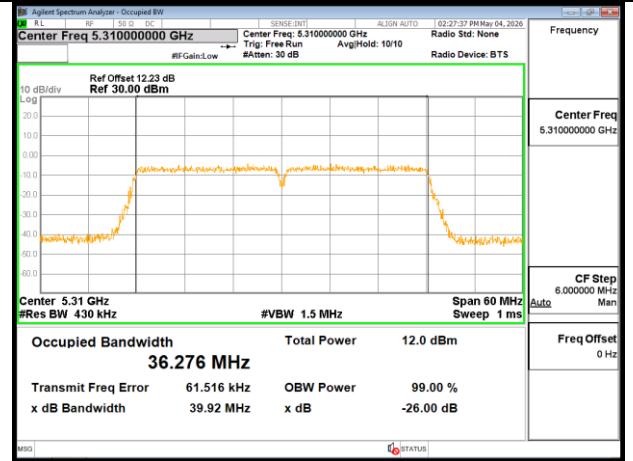

802.11n 40MHz Chain0 5310MHz

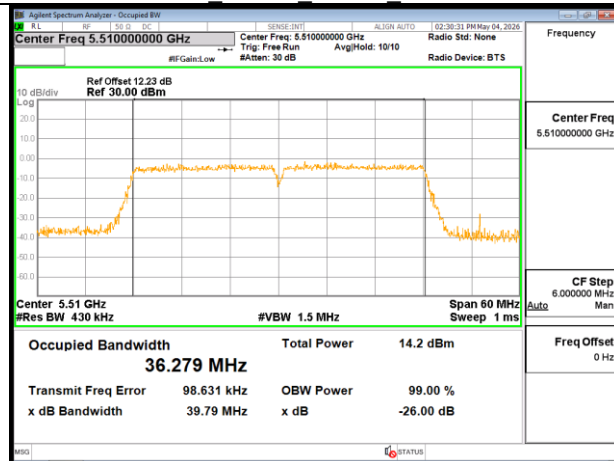

802.11n 40MHz Chain0 5510MHz

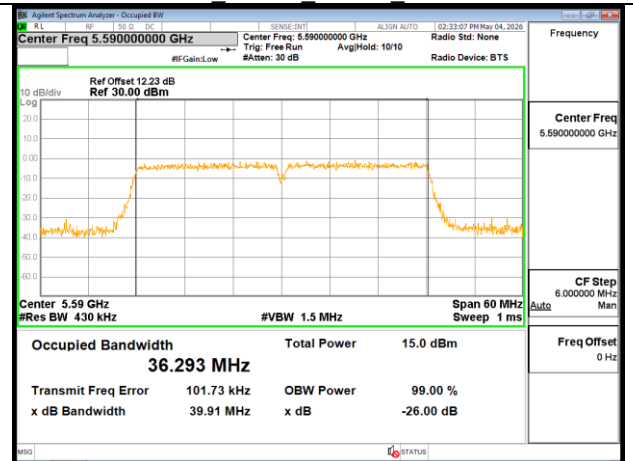

802.11n 40MHz Chain0 5590MHz