




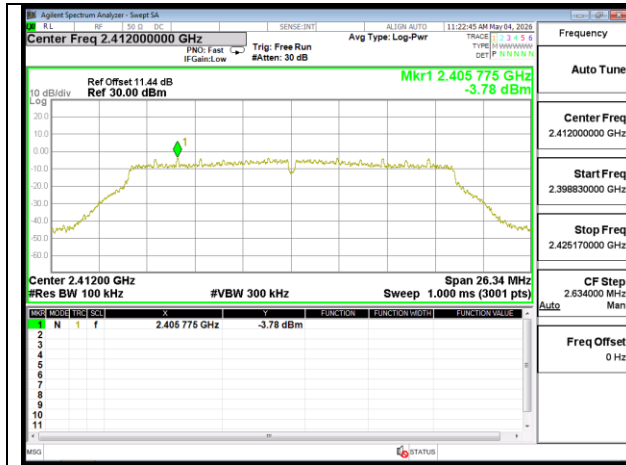

802.11n 20MHz Chain0 2412MHz

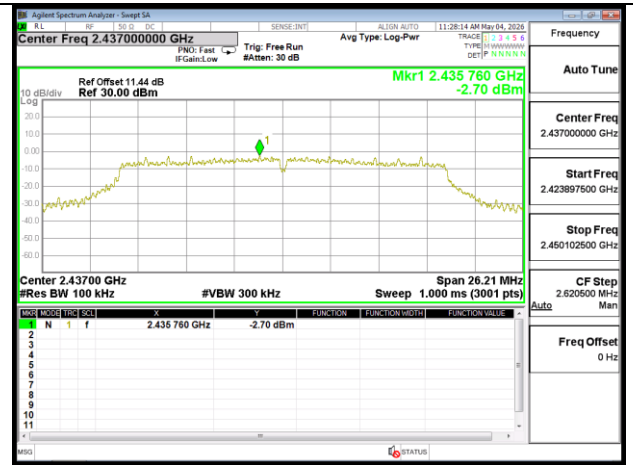


802.11n 20MHz Chain0 2437MHz

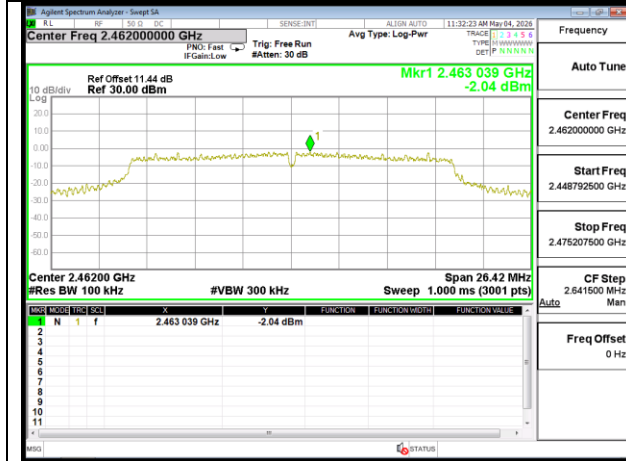


802.11n 20MHz Chain0 2462MHz




802.11n 20MHz Chain1 2412MHz

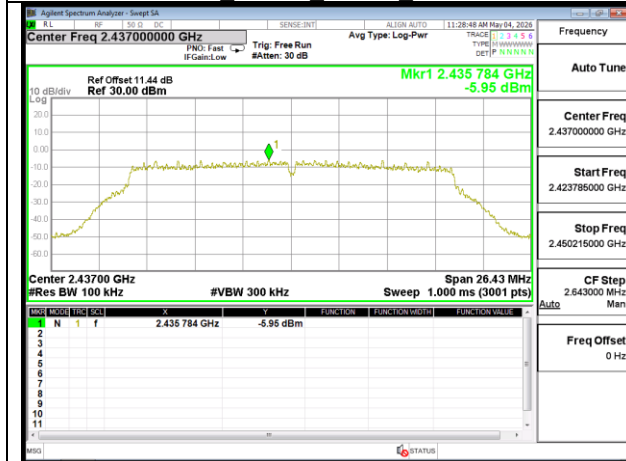


802.11n 20MHz Chain1 2437MHz

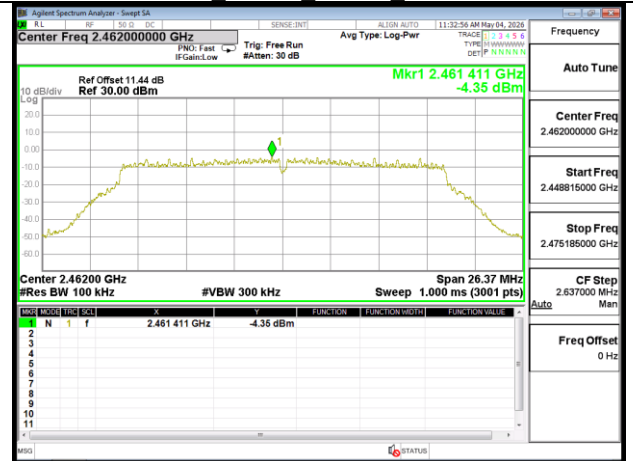


802.11n 20MHz Chain1 2462MHz

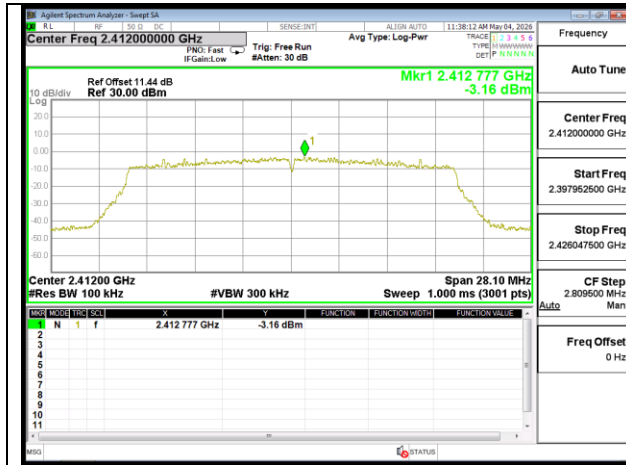


802.11ax 20MHz Chain0 2412MHz

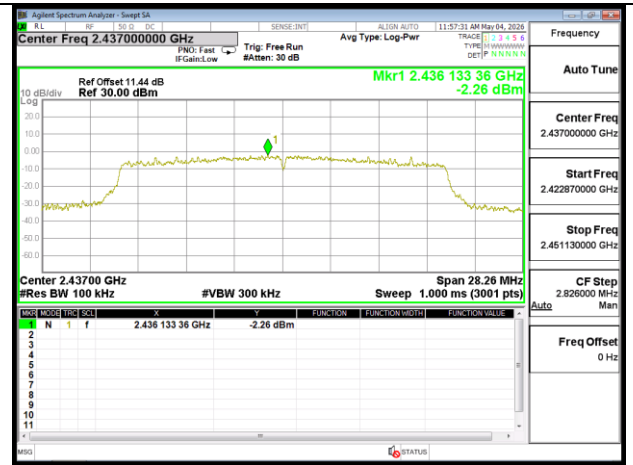


802.11ax 20MHz Chain0 2437MHz

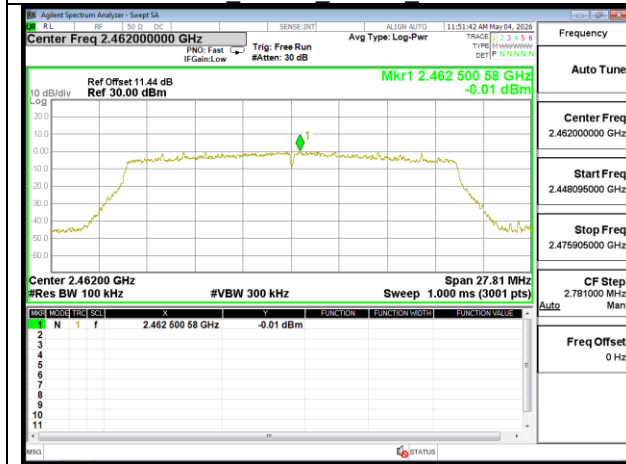


802.11ax 20MHz Chain0 2462MHz

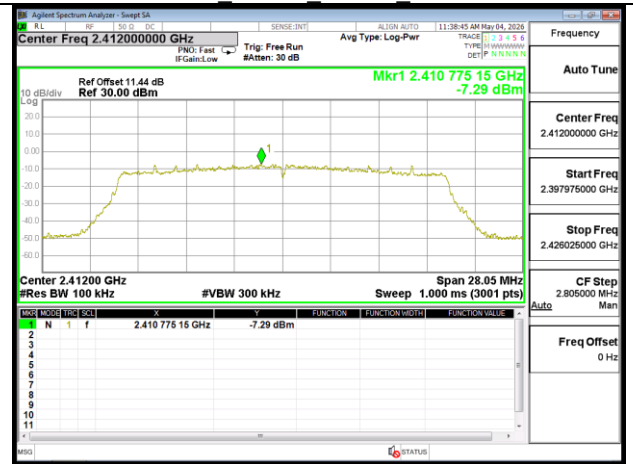

802.11ax 20MHz Chain1 2412MHz

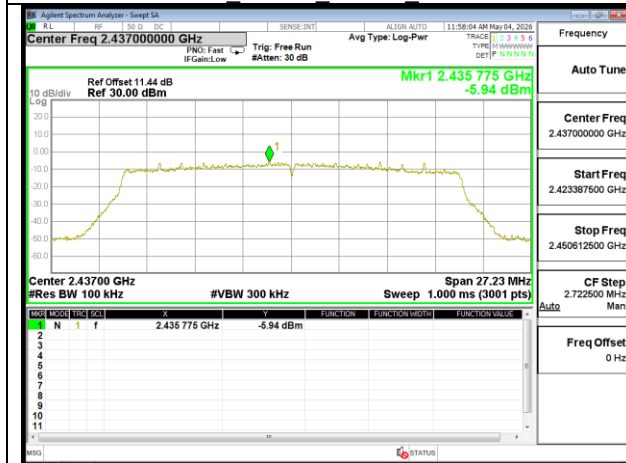


802.11ax 20MHz Chain1 2437MHz

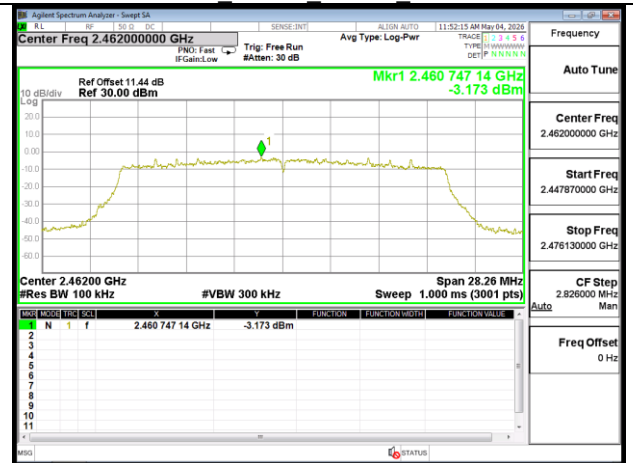


802.11ax 20MHz Chain1 2462MHz


Band Edge

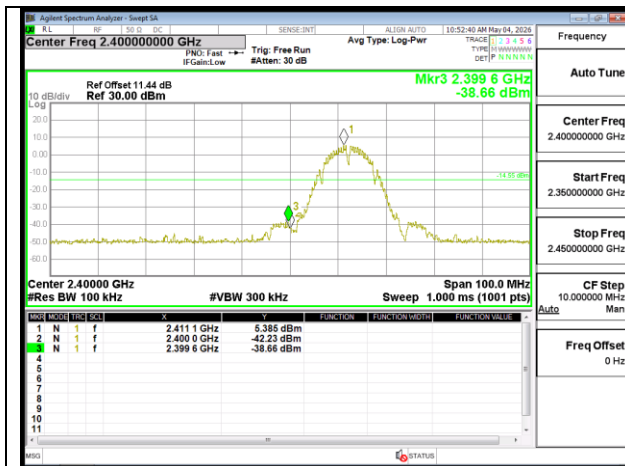


802.11b 20MHz Chain0 2412MHz

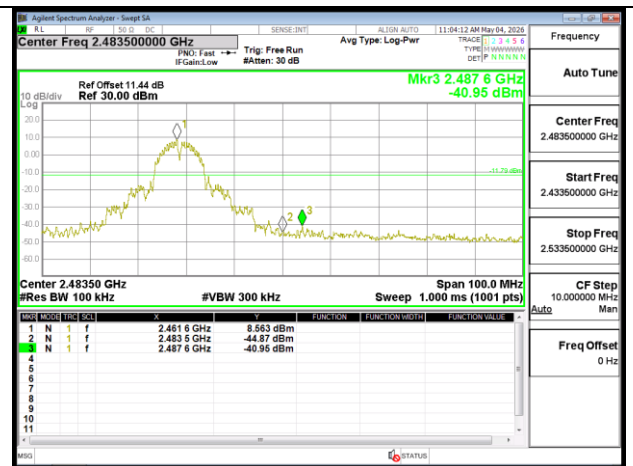


802.11b 20MHz Chain0 2462MHz

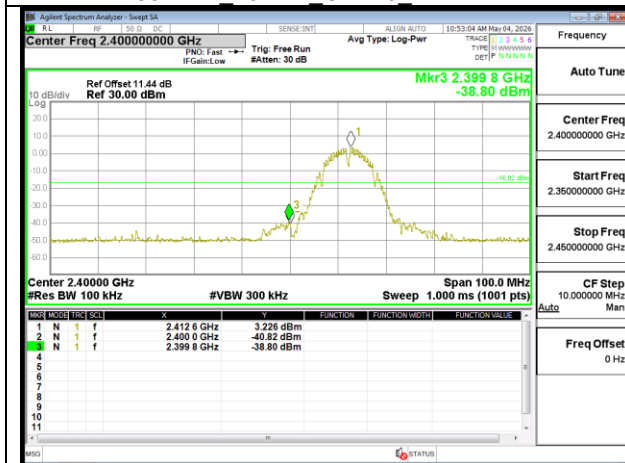


802.11b 20MHz Chain1 2412MHz

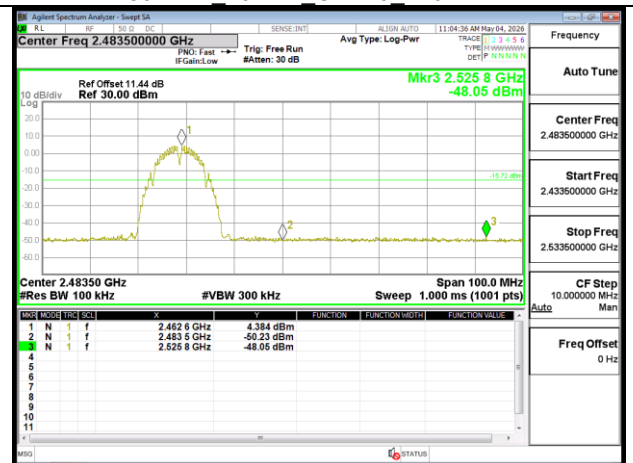


802.11b 20MHz Chain1 2462MHz

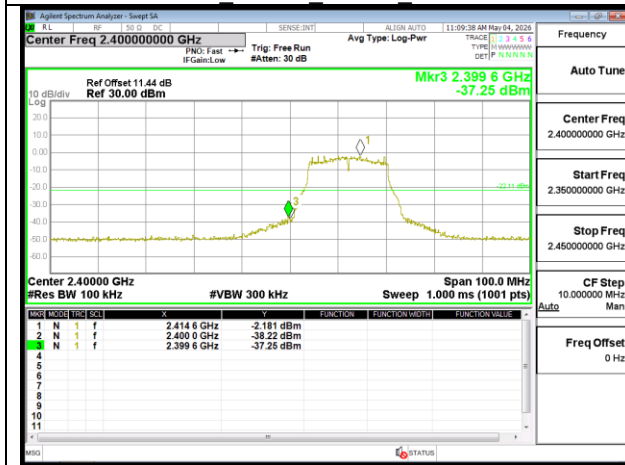


802.11g 20MHz Chain0 2412MHz

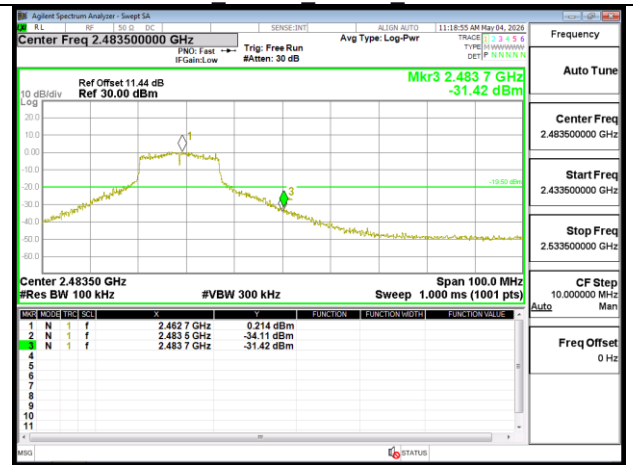


802.11g 20MHz Chain0 2462MHz

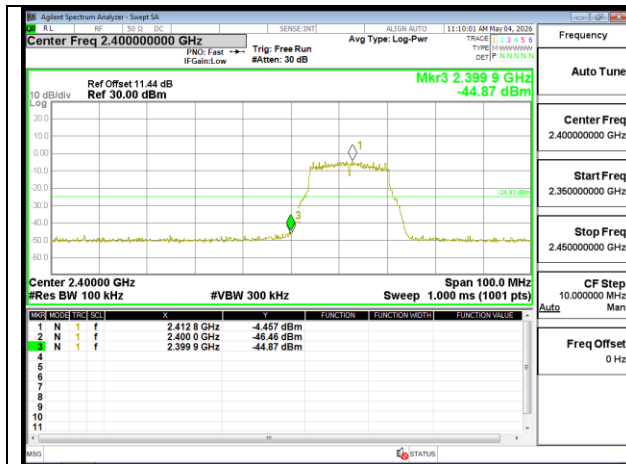


802.11g 20MHz Chain1 2412MHz

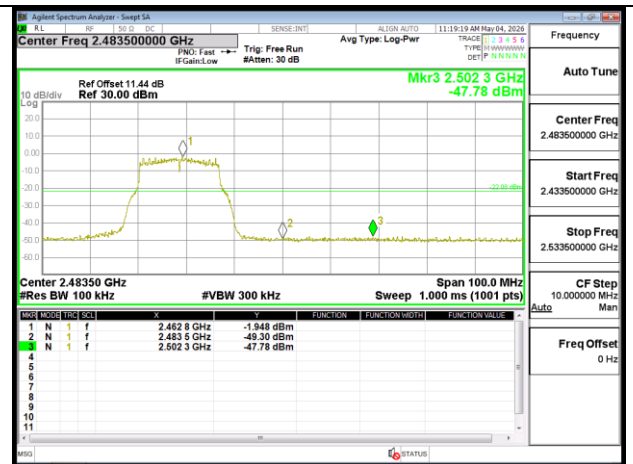


802.11g 20MHz Chain1 2462MHz

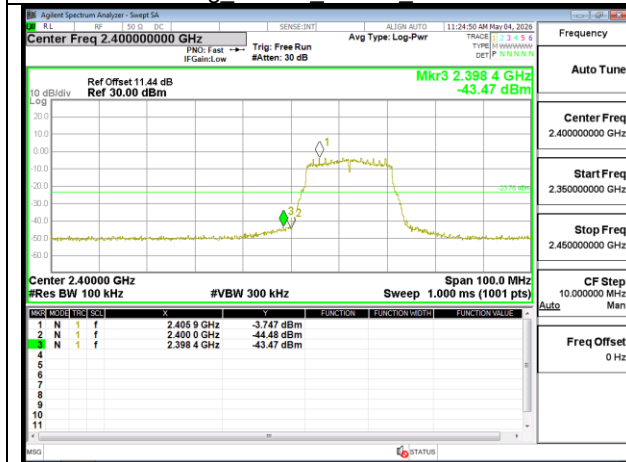


802.11n 20MHz Chain0 2412MHz

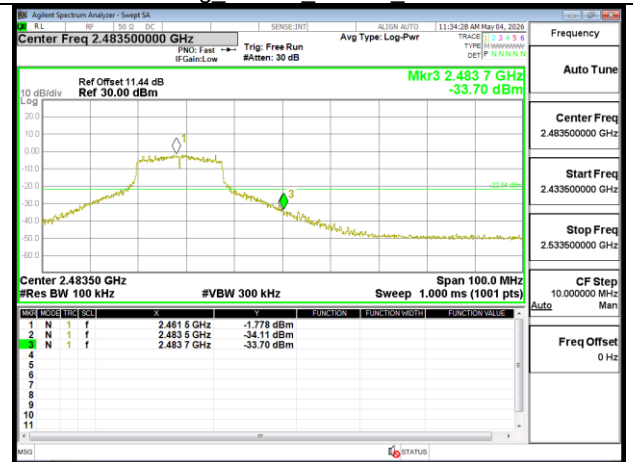

802.11n 20MHz Chain0 2462MHz

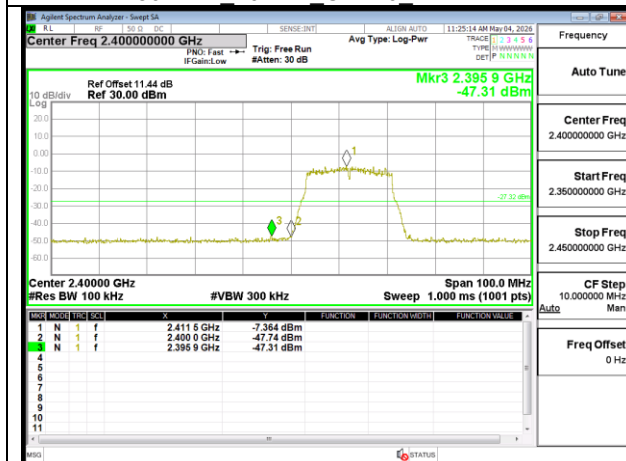

802.11n 20MHz Chain1 2412MHz

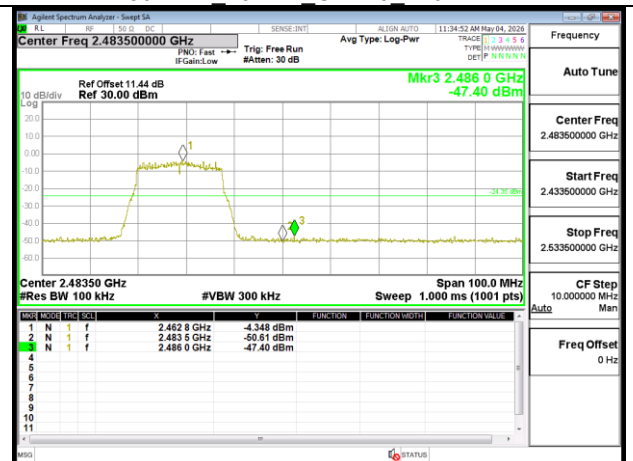


802.11n 20MHz Chain1 2462MHz




Project No: TM-2602000265P
Report No.: TMWK2603001433KR


Page 47 / 87
Rev. 00

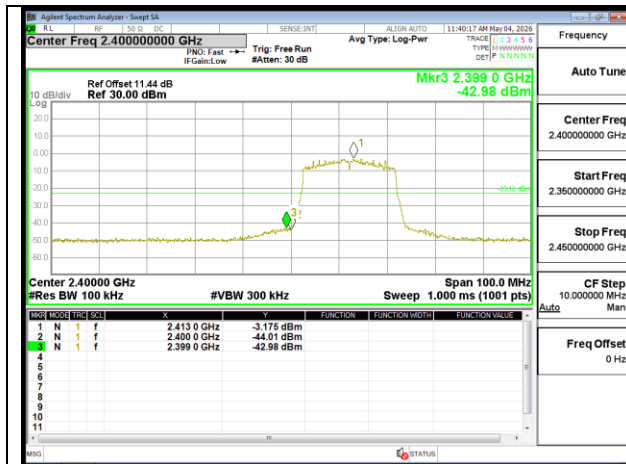


802.11ax 20MHz Chain0 2412MHz

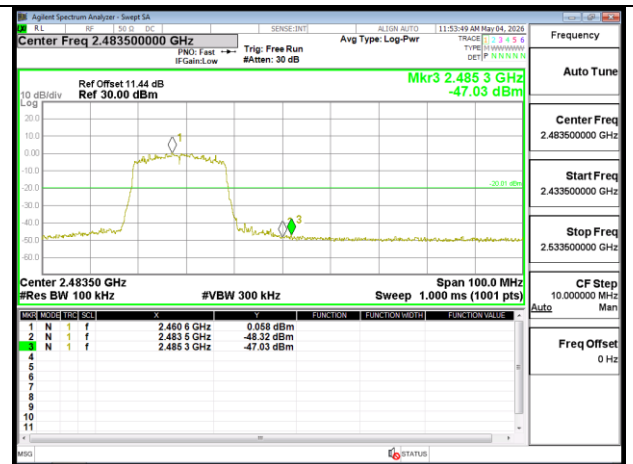

802.11ax 20MHz Chain0 2462MHz

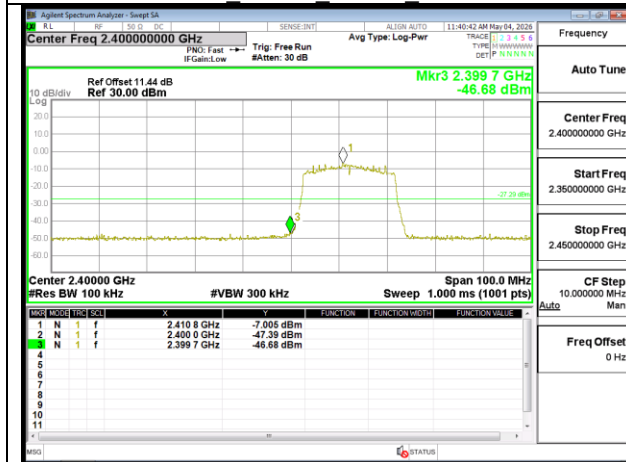


802.11ax 20MHz Chain1 2412MHz

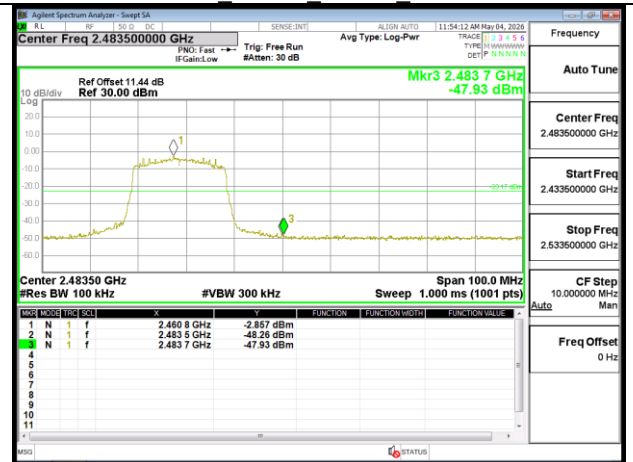


802.11ax 20MHz Chain1 2462MHz


Spurious Emissio

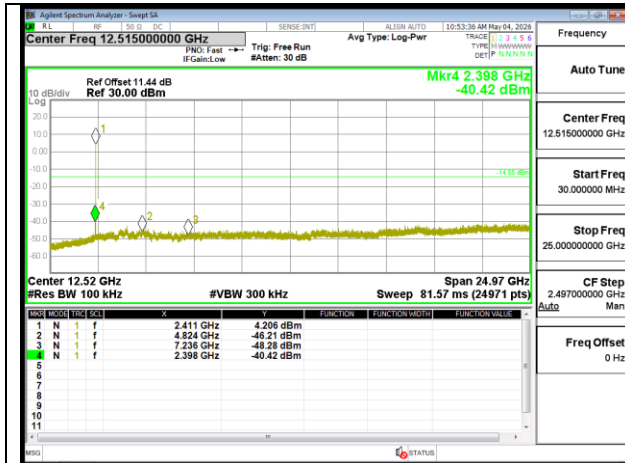


802.11b 20MHz Chain0 2412MHz

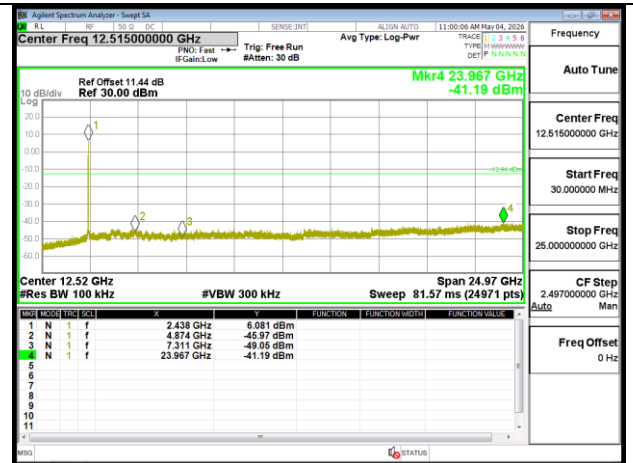


802.11b 20MHz Chain0 2437MHz

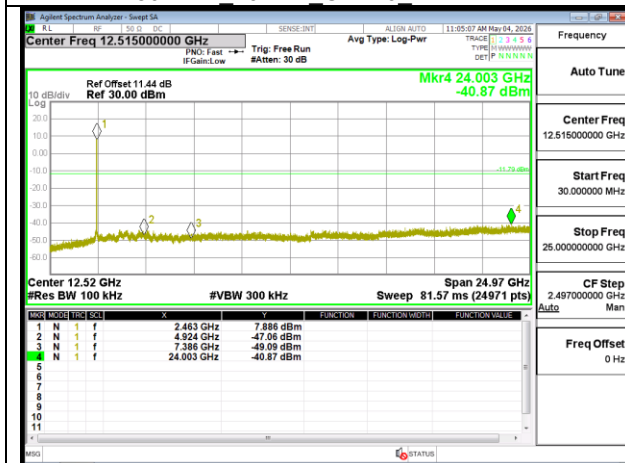


802.11b 20MHz Chain0 2462MHz

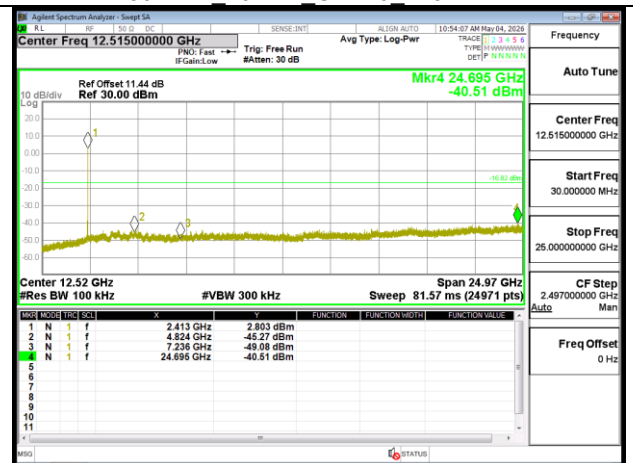


802.11b 20MHz Chain1 2412MHz

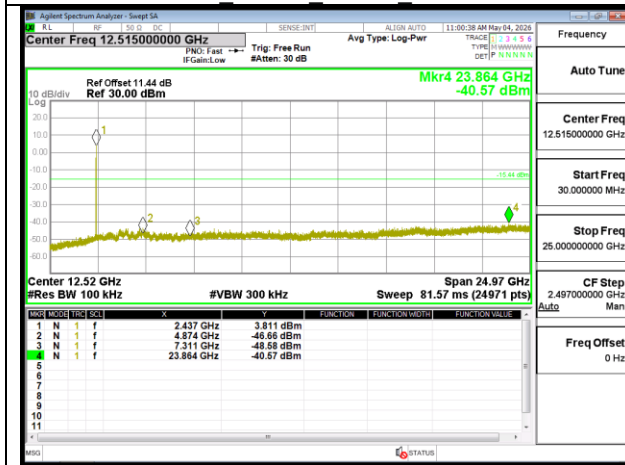


802.11b 20MHz Chain1 2437MHz

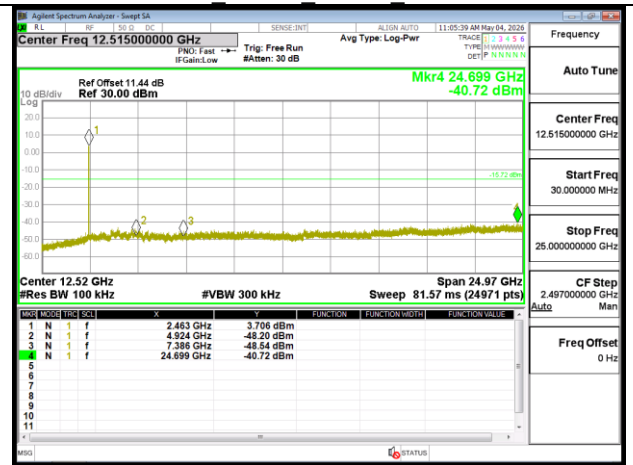


802.11b 20MHz Chain1 2462MHz

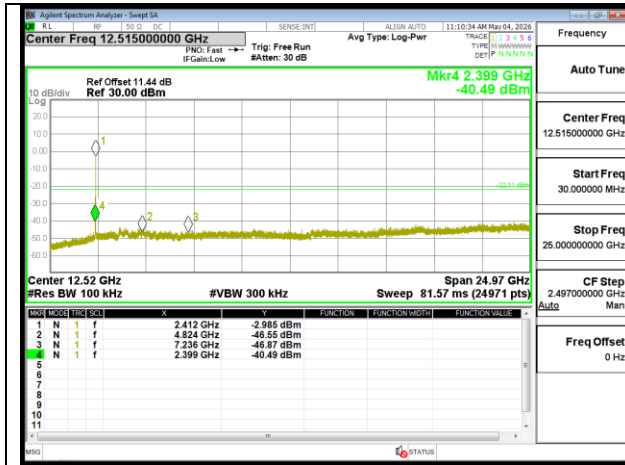


802.11g 20MHz Chain0 2412MHz

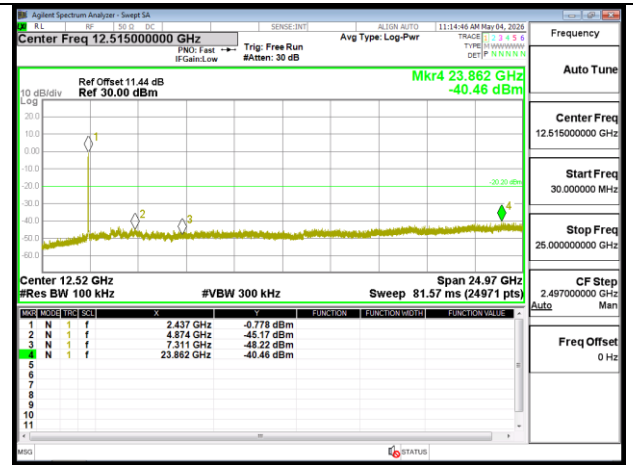


802.11g 20MHz Chain0 2437MHz

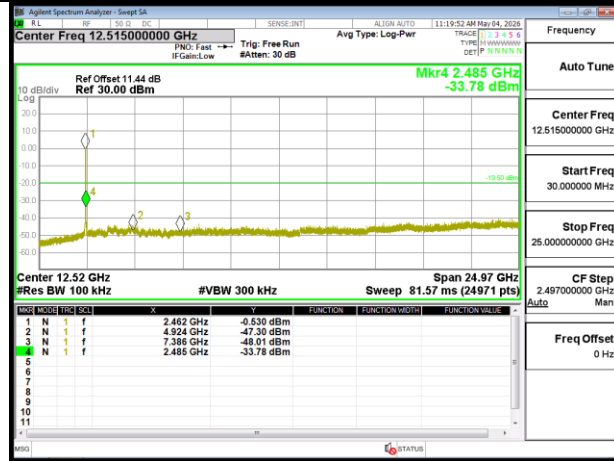


802.11g 20MHz Chain0 2462MHz

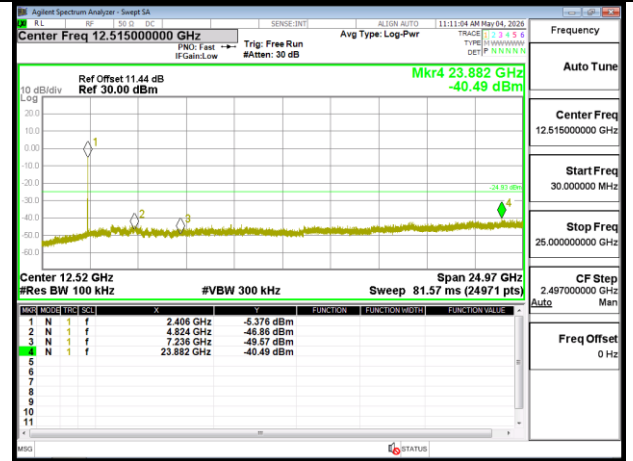


802.11g 20MHz Chain1 2412MHz

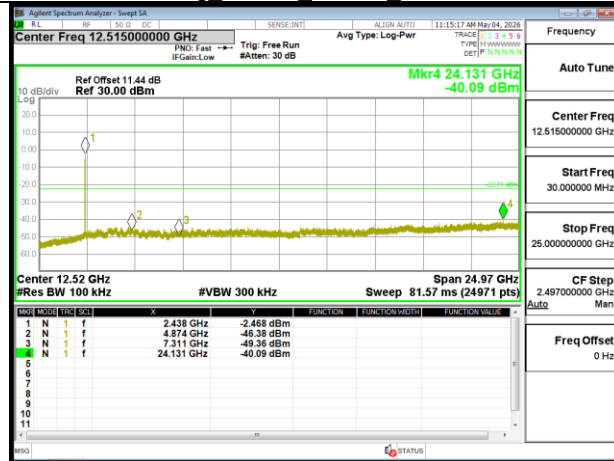


802.11g 20MHz Chain1 2437MHz

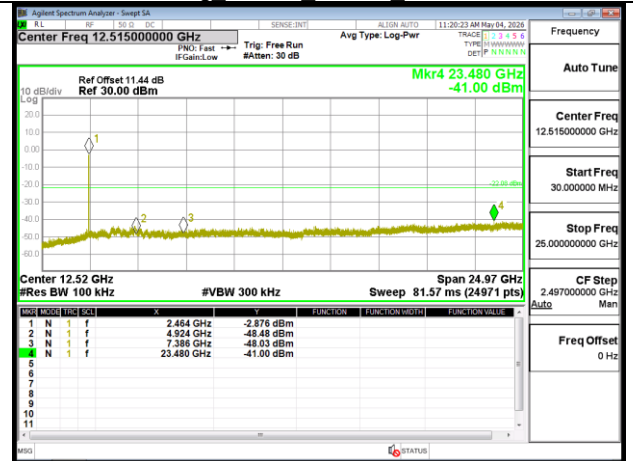


802.11g 20MHz Chain1 2462MHz

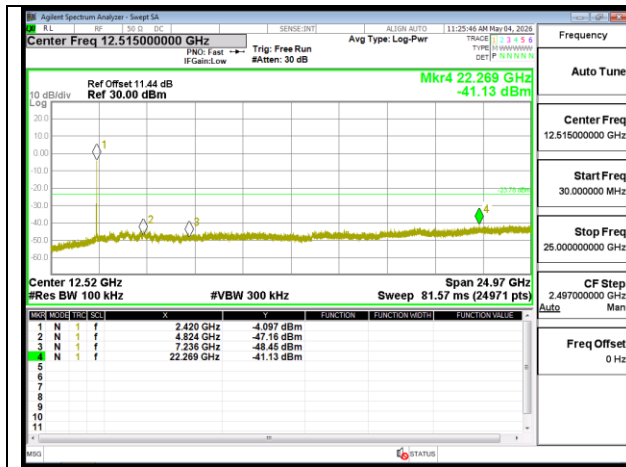


802.11n 20MHz Chain0 2412MHz

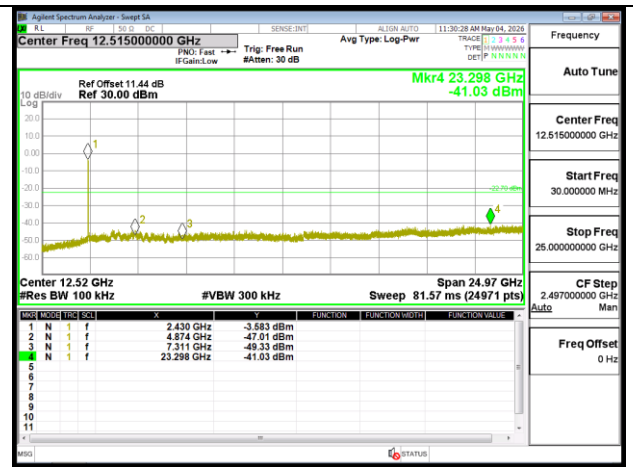


802.11n 20MHz Chain0 2437MHz

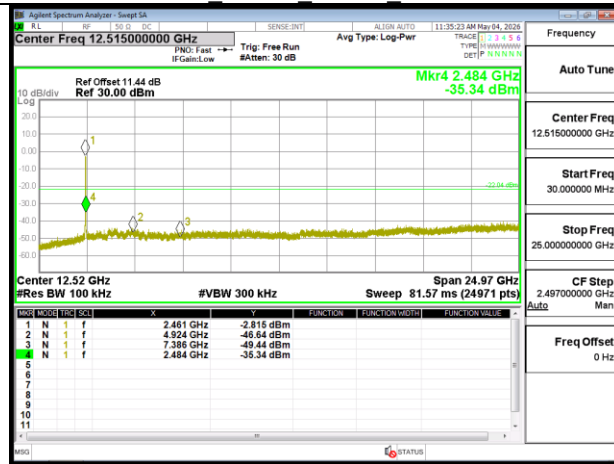


802.11n 20MHz Chain0 2462MHz

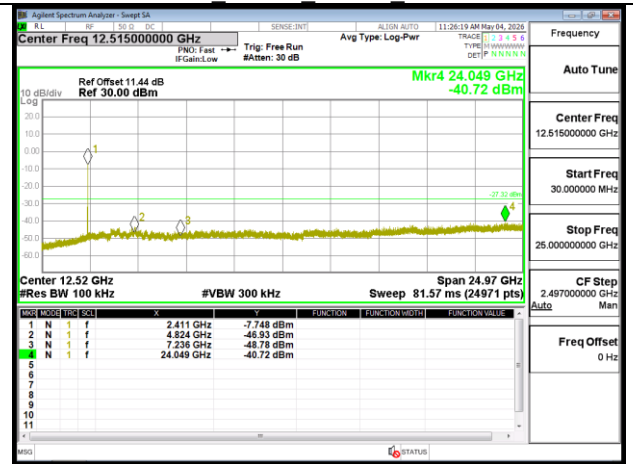


802.11n 20MHz Chain1 2412MHz

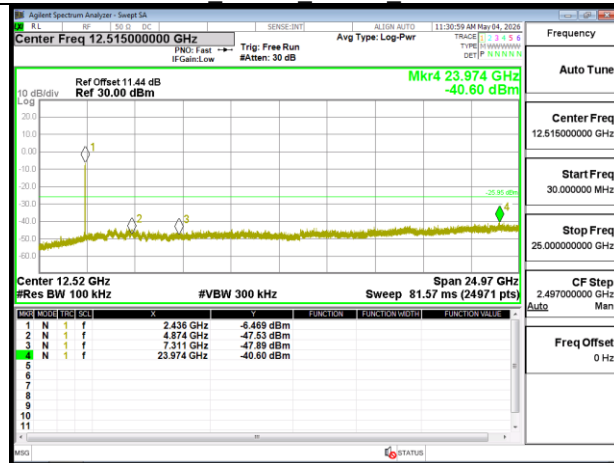


802.11n 20MHz Chain1 2437MHz

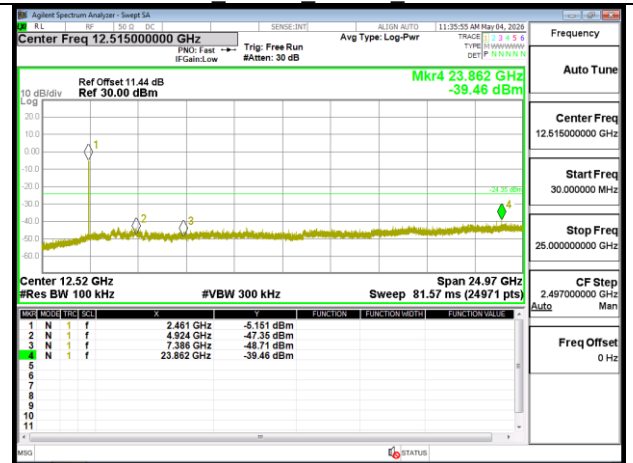


802.11n 20MHz Chain1 2462MHz

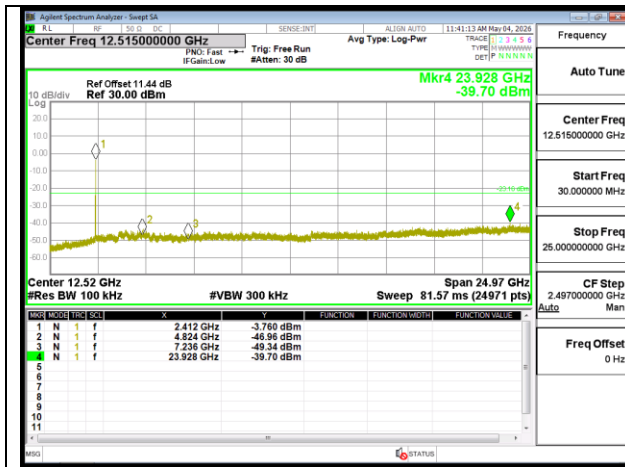


802.11ax 20MHz Chain0 2412MHz

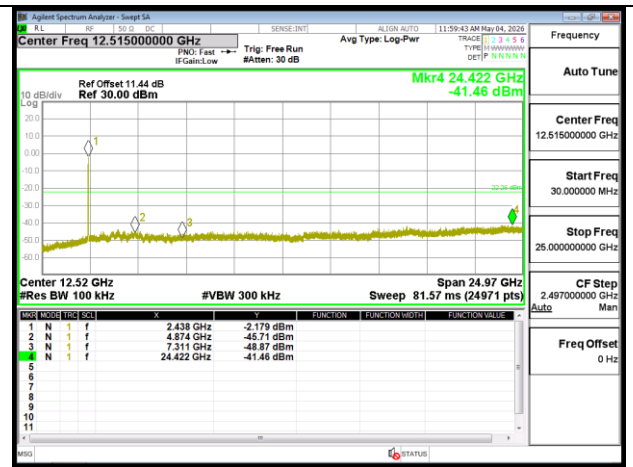


802.11ax 20MHz Chain0 2437MHz

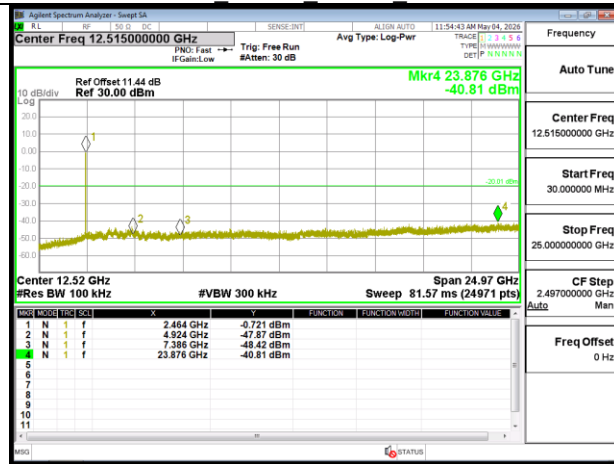


802.11ax 20MHz Chain0 2462MHz

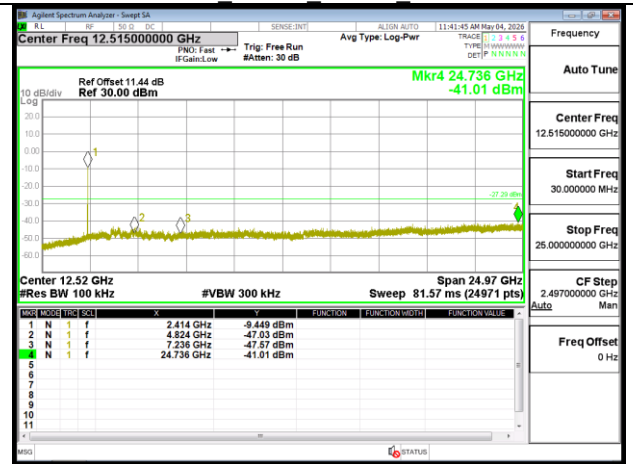

802.11ax 20MHz Chain1 2412MHz

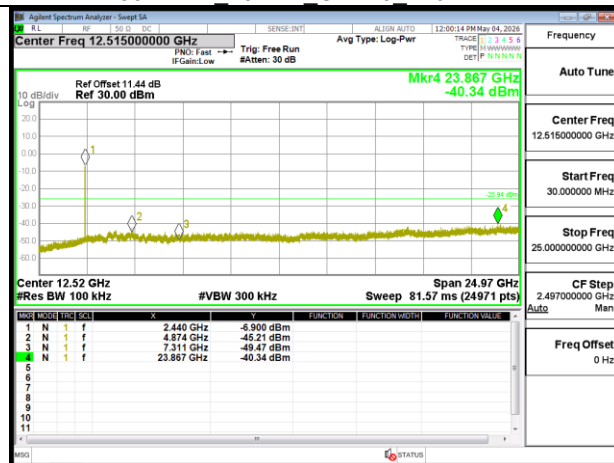

802.11ax 20MHz Chain1 2437MHz

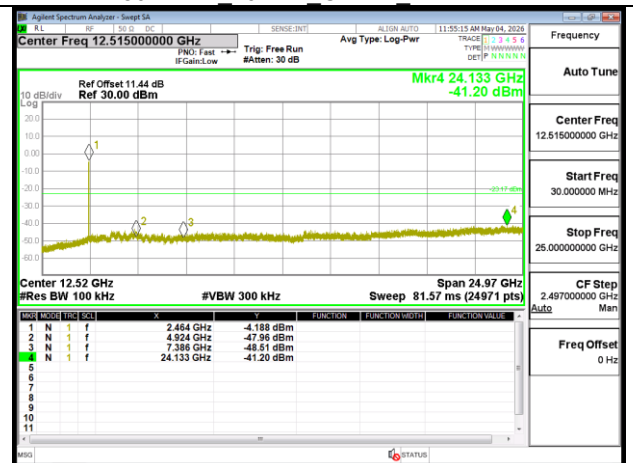

802.11ax 20MHz Chain1 2462MHz

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.6.2 Test Procedure

Test method Refer as ANSI C63.10-2020.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020 and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq 98\%$, VBW=10Hz.

·If Duty Cycle $< 98\%$, VBW=1/T.


6. Data result :

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

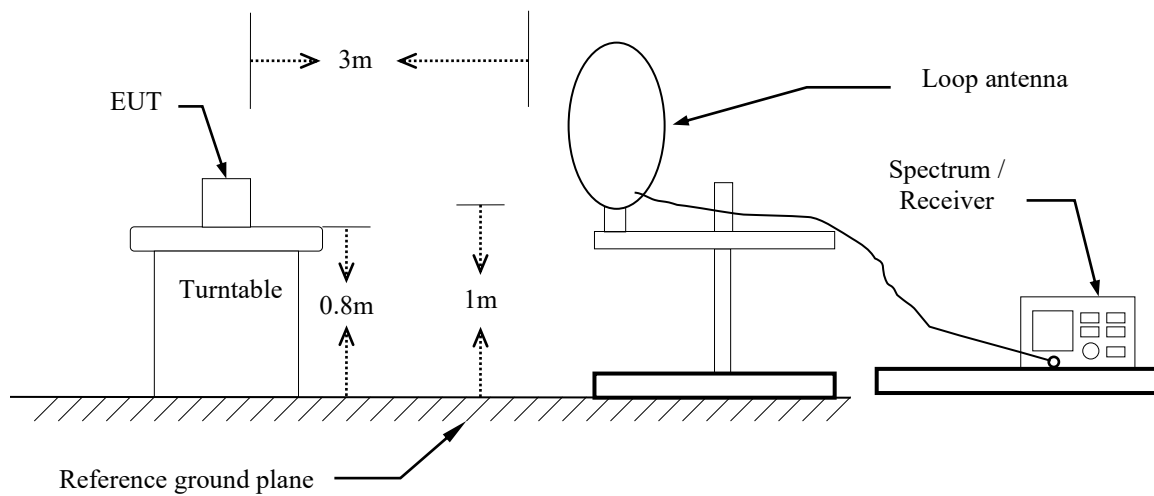

30MHz ~ 1GHz

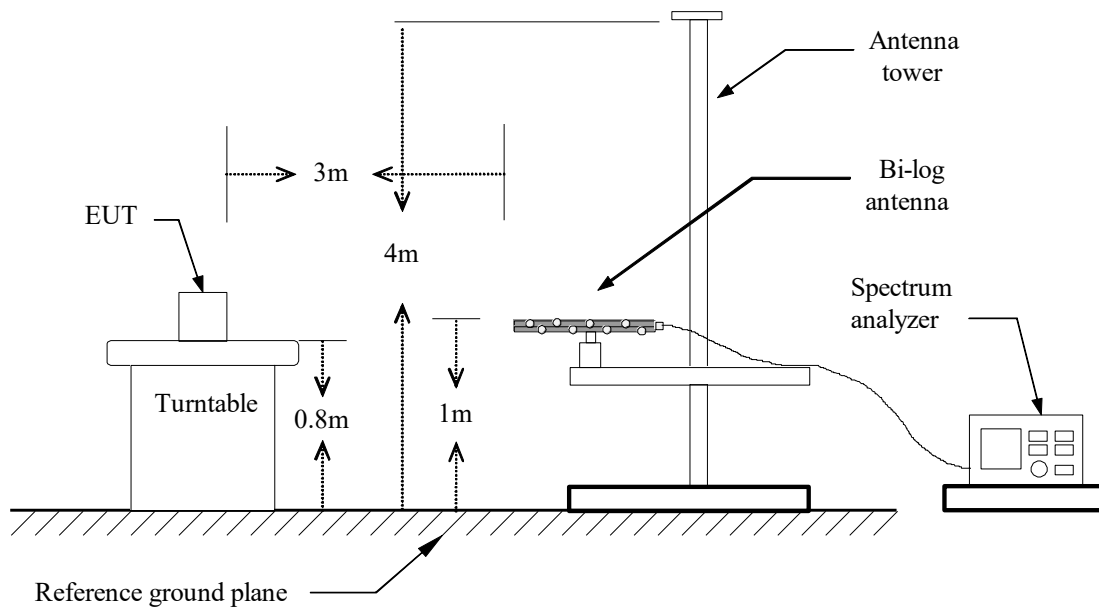

Above 1 GHz

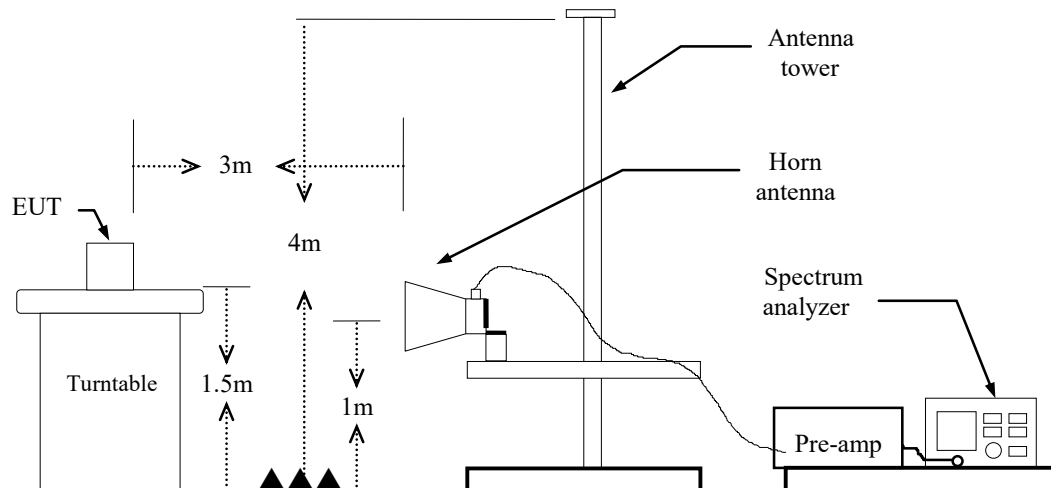


4.6.4 Test Result

Test Data: Bandedge

Project No : TM-2602000265P
Operation Band : B
Frequency : 2412 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 50

Test Date : 2026-05-04
Temp./Humi. : 25.3/56
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

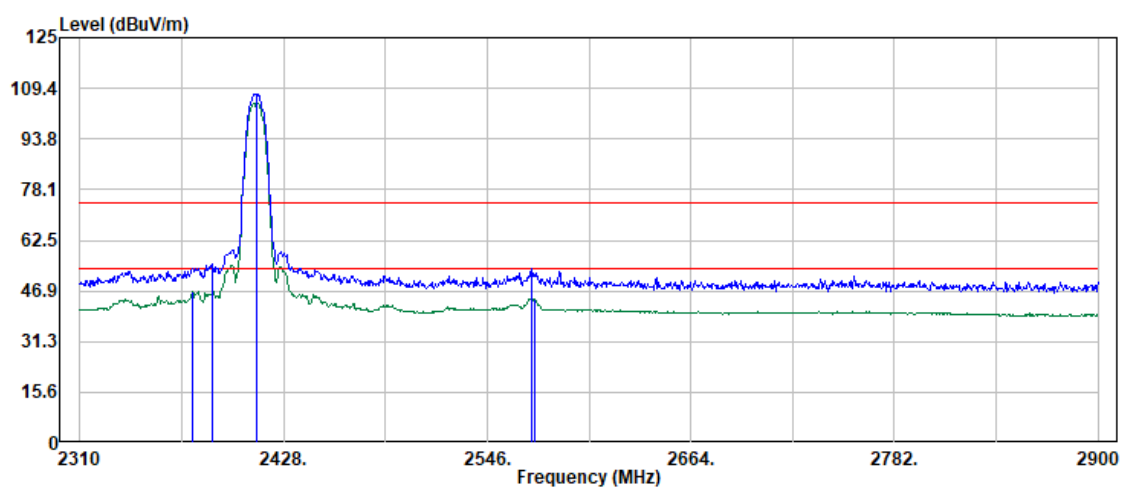

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2375.45	40.42	6.20	46.62	54.00	-7.38	Average
2386.44	48.99	6.19	55.18	74.00	-18.82	Peak
2412.00	101.30	6.22	107.52	--	--	Peak
2412.00	98.73	6.22	104.95	--	--	Average
2571.78	46.49	7.20	53.69	74.00	-20.31	Peak
2573.28	37.23	7.22	44.45	54.00	-9.55	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 57 / 87
Rev. 00

Project No : TM-2602000265P

Operation Band : B

Frequency : 2412 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 50


Test Date : 2026-05-04

Temp./Humi. : 25.3/56

Antenna Pol. : HORIZONTAL

Engineer : Tony.Chao

Test Chamber : 966A

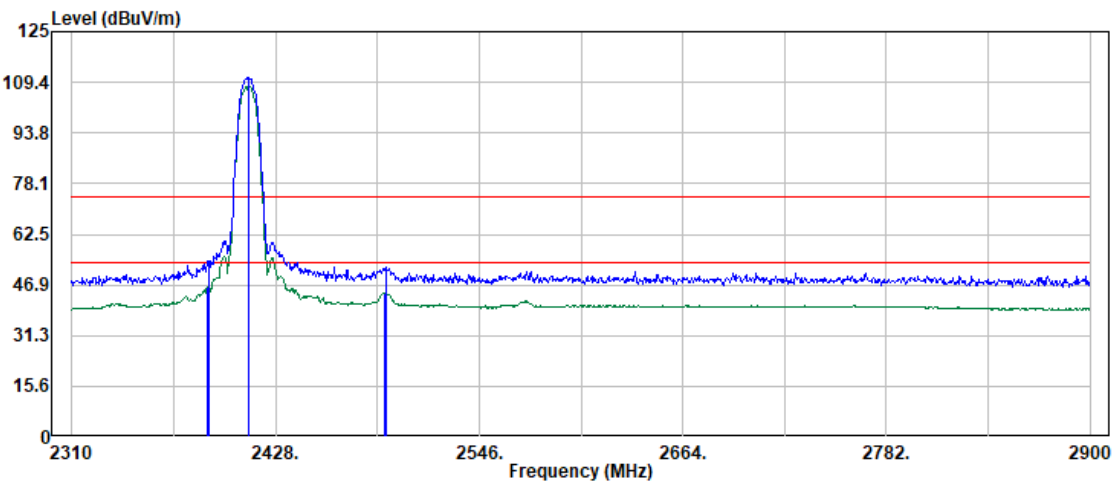


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.43	39.86	6.19	46.05	54.00	-7.95	Average
2389.43	48.00	6.20	54.20	74.00	-19.80	Peak
2412.00	104.70	6.22	110.92	--	--	Peak
2412.00	101.64	6.22	107.86	--	--	Average
2490.85	37.81	6.56	44.37	54.00	-9.63	Average
2492.35	45.87	6.56	52.43	74.00	-21.57	Peak



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 58 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 54		

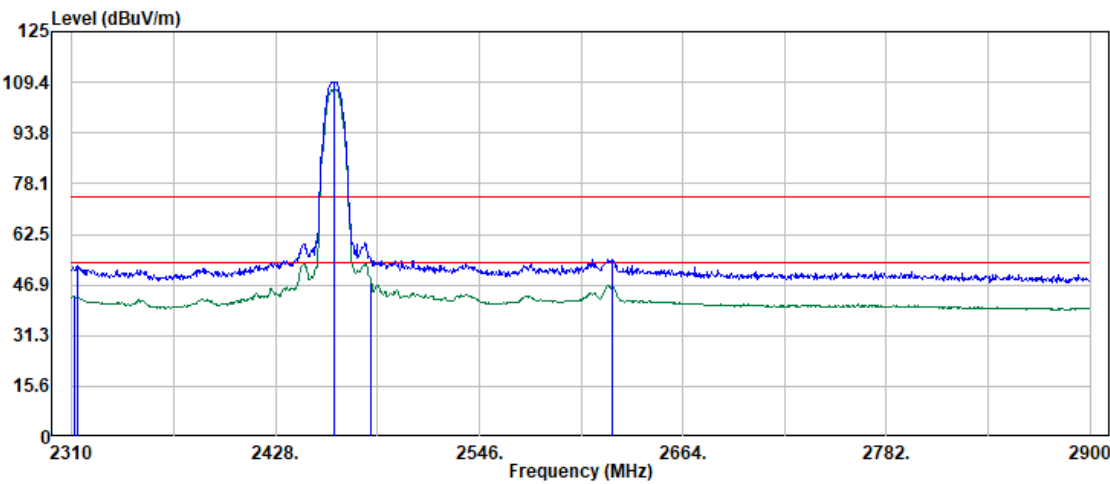


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.50	36.97	6.24	43.21	54.00	-10.79	Average
2313.00	46.57	6.23	52.80	74.00	-21.20	Peak
2462.00	103.34	6.33	109.67	--	--	Peak
2462.00	100.89	6.33	107.22	--	--	Average
2483.50	41.23	6.48	47.71	54.00	-6.29	Average
2622.74	47.45	7.35	54.80	74.00	-19.20	Peak



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 59 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 54		

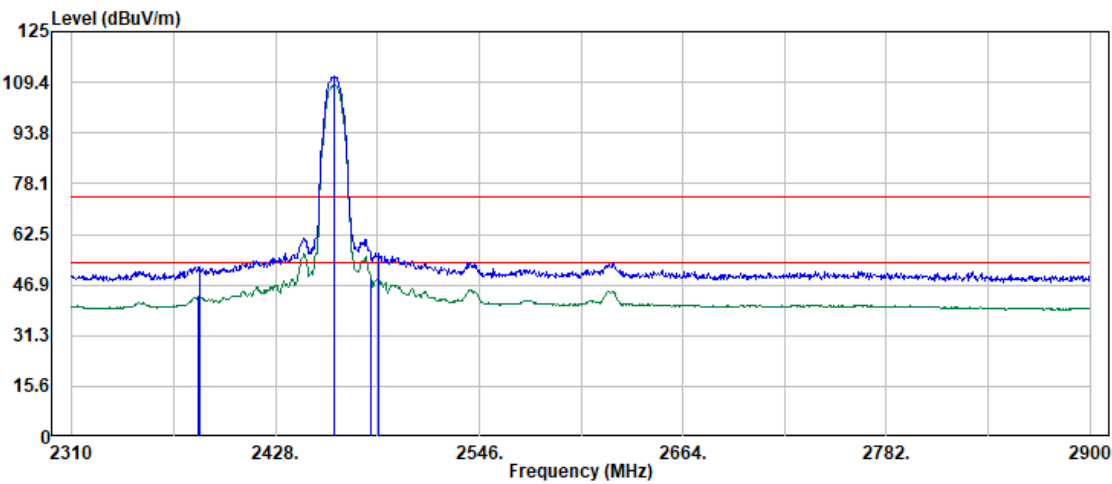


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2382.94	36.97	6.20	43.17	54.00	-10.83	Average
2384.44	46.20	6.20	52.40	74.00	-21.60	Peak
2462.00	104.94	6.33	111.27	--	--	Peak
2462.00	102.13	6.33	108.46	--	--	Average
2483.50	42.75	6.48	49.23	54.00	-4.77	Average
2487.85	49.92	6.53	56.45	74.00	-17.55	Peak



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 60 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 37		

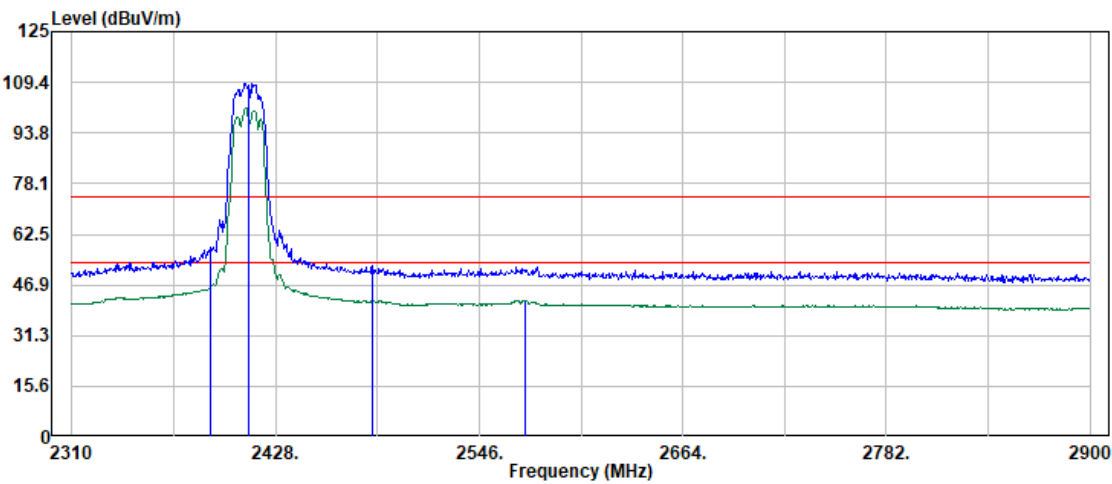


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	51.63	6.20	57.83	74.00	-16.17	Peak
2389.93	39.70	6.20	45.90	54.00	-8.10	Average
2412.00	102.79	6.22	109.01	--	--	Peak
2412.00	95.34	6.22	101.56	--	--	Average
2483.85	46.22	6.49	52.71	74.00	-21.29	Peak
2572.78	34.97	7.22	42.19	54.00	-11.81	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 61 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 37		

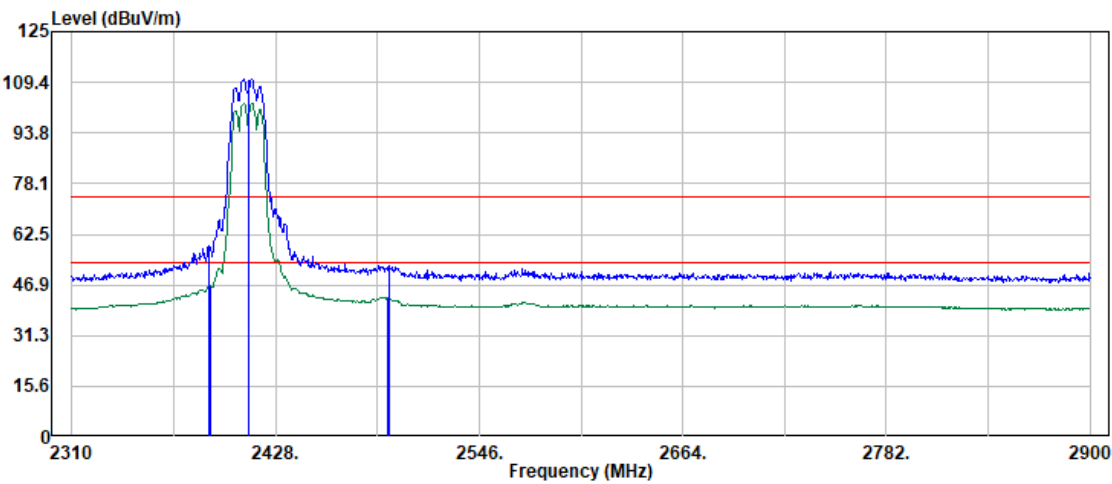

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	52.71	6.20	58.91	74.00	-15.09	Peak
2389.93	40.36	6.20	46.56	54.00	-7.44	Average
2412.00	104.30	6.22	110.52	--	--	Peak
2412.00	96.72	6.22	102.94	--	--	Average
2492.85	36.42	6.56	42.98	54.00	-11.02	Average
2493.84	46.49	6.56	53.05	74.00	-20.95	Peak




Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 62 / 87
Rev. 00

Project No : TM-2602000265P
Operation Band : G
Frequency : 2462 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 42

Test Date : 2026-05-04
Temp./Humi. : 25.3/56
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

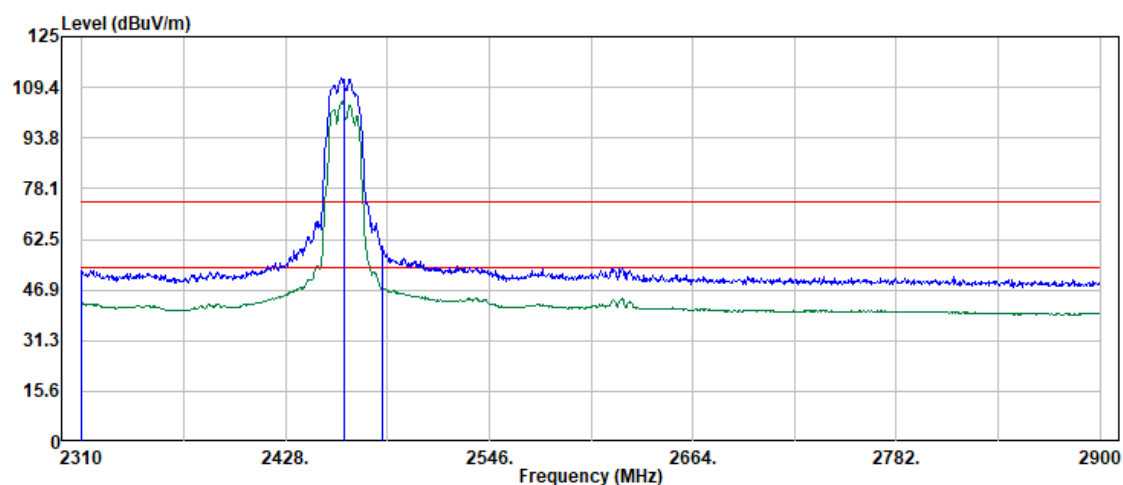

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.00	46.58	6.25	52.83	74.00	-21.17	Peak
2310.00	37.42	6.25	43.67	54.00	-10.33	Average
2462.00	105.93	6.33	112.26	--	--	Peak
2462.00	98.65	6.33	104.98	--	--	Average
2484.35	53.68	6.49	60.17	74.00	-13.83	Peak
2484.35	41.00	6.49	47.49	54.00	-6.51	Average




Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 63 / 87
Rev. 00

Project No : TM-2602000265P
Operation Band : G
Frequency : 2462 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 42

Test Date : 2026-05-04
Temp./Humi. : 25.3/56
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

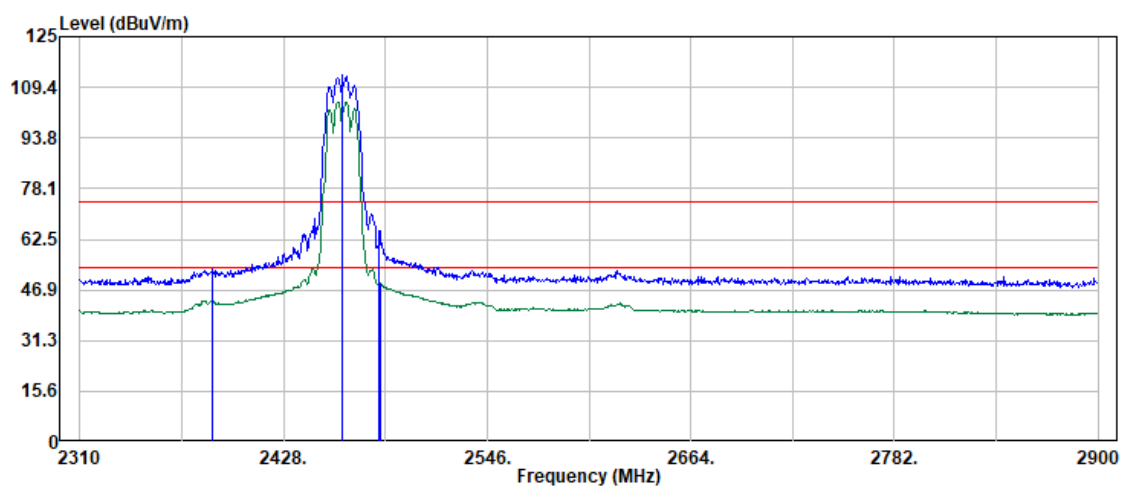


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.44	37.56	6.19	43.75	54.00	-10.25	Average
2386.94	46.93	6.19	53.12	74.00	-20.88	Peak
2462.00	107.24	6.33	113.57	--	--	Peak
2462.00	99.54	6.33	105.87	--	--	Average
2483.50	58.65	6.48	65.13	74.00	-8.87	Peak
2483.85	42.62	6.49	49.11	54.00	-4.89	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 64 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 32		

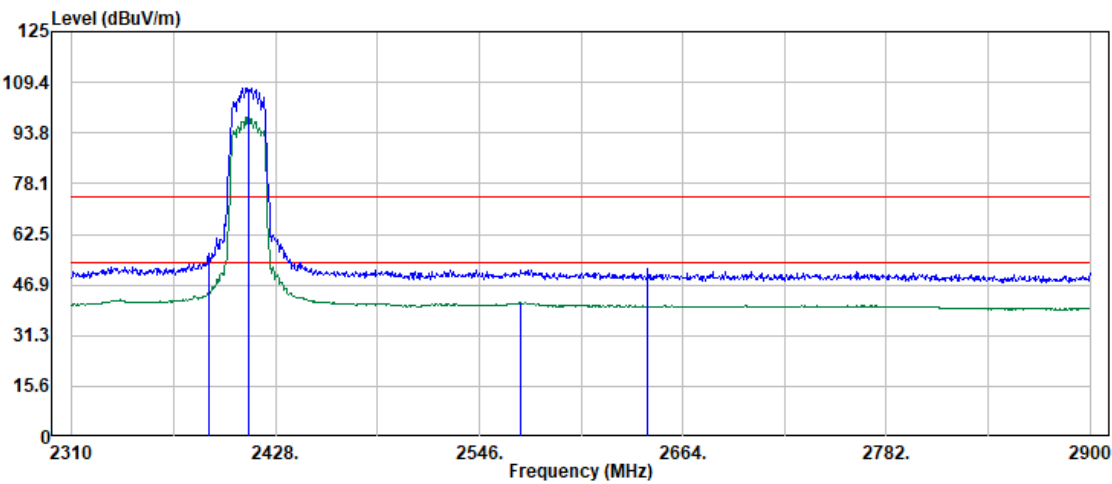

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	50.43	6.20	56.63	74.00	-17.37	Peak
2389.43	38.04	6.20	44.24	54.00	-9.76	Average
2412.00	101.55	6.22	107.77	--	--	Peak
2412.00	92.30	6.22	98.52	--	--	Average
2569.78	34.17	7.18	41.35	54.00	-12.65	Average
2643.72	44.45	7.33	51.78	74.00	-22.22	Peak




Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 65 / 87
Rev. 00

Project No : TM-2602000265P
Operation Band : AX20
Frequency : 2412 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 32

Test Date : 2026-05-04
Temp./Humi. : 25.3/56
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

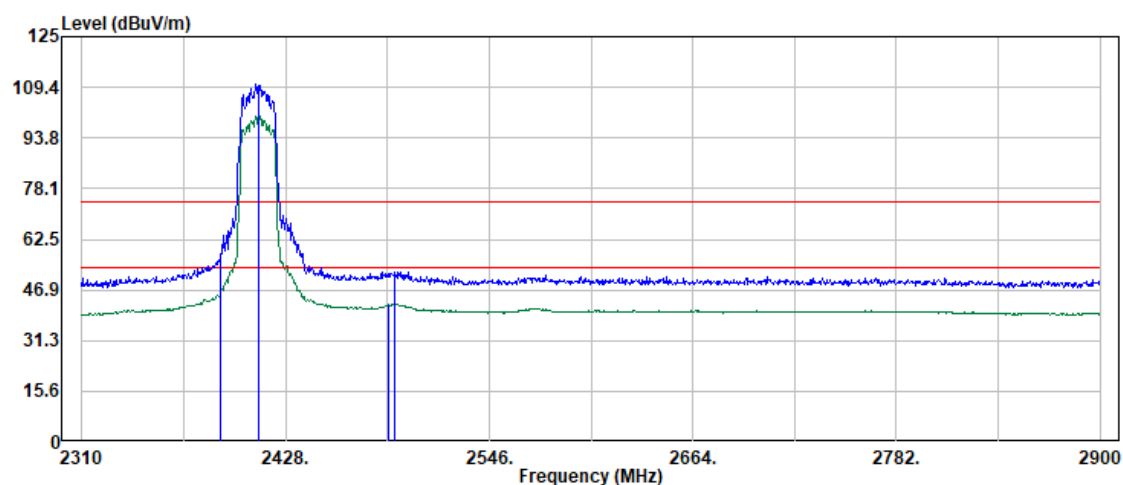

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	50.25	6.20	56.45	74.00	-17.55	Peak
2389.93	39.00	6.20	45.20	54.00	-8.80	Average
2412.00	104.31	6.22	110.53	--	--	Peak
2412.00	94.08	6.22	100.30	--	--	Average
2487.35	35.97	6.52	42.49	54.00	-11.51	Average
2491.35	45.97	6.56	52.53	74.00	-21.47	Peak




Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 66 / 87
Rev. 00

Project No : TM-2602000265P
Operation Band : AX20
Frequency : 2462 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 36

Test Date : 2026-05-04
Temp./Humi. : 25.3/56
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

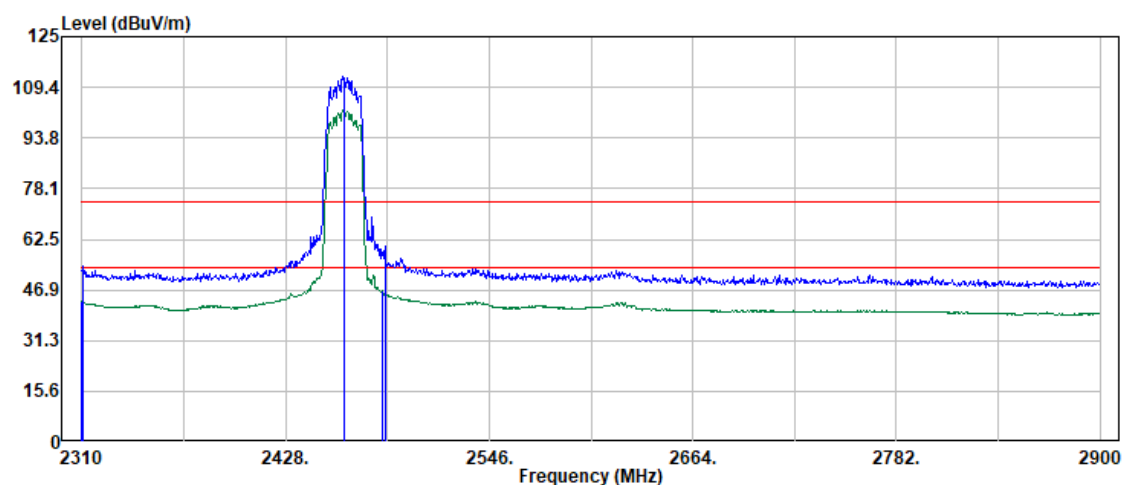


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.00	37.27	6.25	43.52	54.00	-10.48	Average
2311.00	47.89	6.24	54.13	74.00	-19.87	Peak
2462.00	106.27	6.33	112.60	--	--	Peak
2462.00	96.25	6.33	102.58	--	--	Average
2483.85	40.15	6.49	46.64	54.00	-7.36	Average
2485.85	53.96	6.51	60.47	74.00	-13.53	Peak



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 67 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 36		

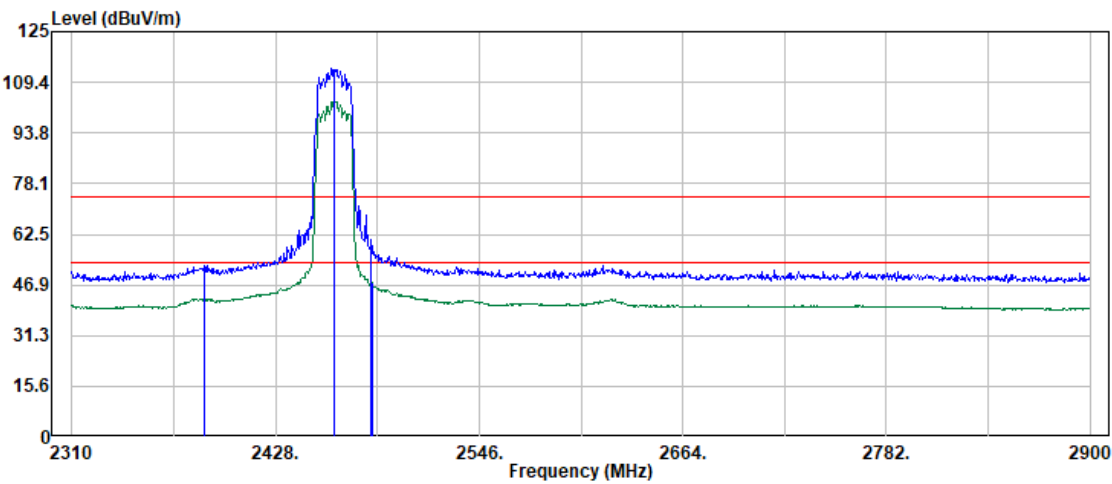

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.44	46.81	6.19	53.00	74.00	-21.00	Peak
2386.94	36.65	6.19	42.84	54.00	-11.16	Average
2462.00	107.40	6.33	113.73	--	--	Peak
2462.00	97.21	6.33	103.54	--	--	Average
2483.50	54.40	6.48	60.88	74.00	-13.12	Peak
2483.85	41.02	6.49	47.51	54.00	-6.49	Average




Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 68 / 87
Rev. 00

Test Data: TX

Project No	: TM-2602000265P	Test Date	: 2026-05-22
Operation Band	: G	Temp./Humi.	: 25.4/52
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

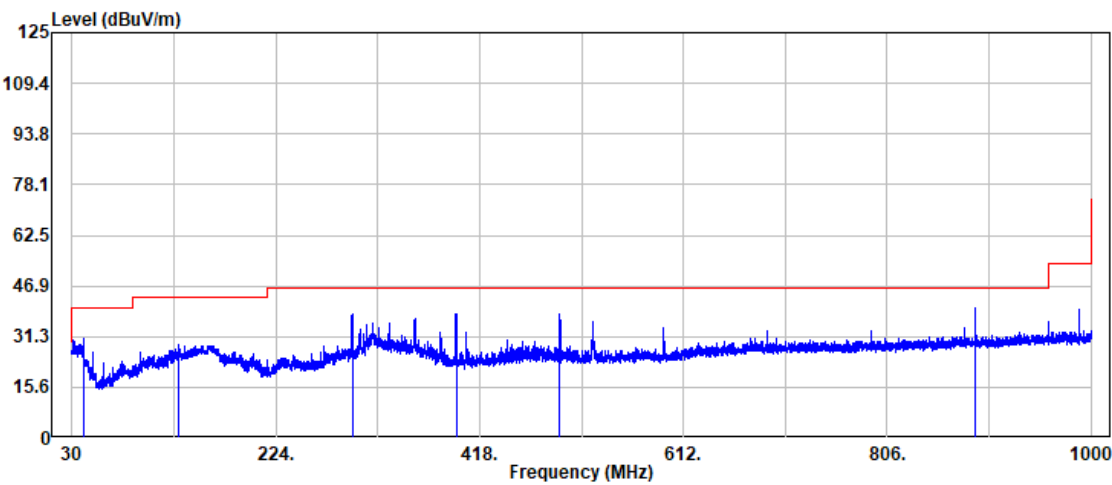


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
41.28	41.88	-11.24	30.64	40.00	-9.36	Peak
131.24	38.69	-9.73	28.96	43.50	-14.54	Peak
296.75	47.65	-9.29	38.36	46.00	-7.64	Peak
395.69	44.86	-6.84	38.02	46.00	-7.98	Peak
494.51	42.71	-4.32	38.39	46.00	-7.61	Peak
890.15	38.52	1.63	40.15	46.00	-5.85	Peak



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 69 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-22
Operation Band	: G	Temp./Humi.	: 25.4/52
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

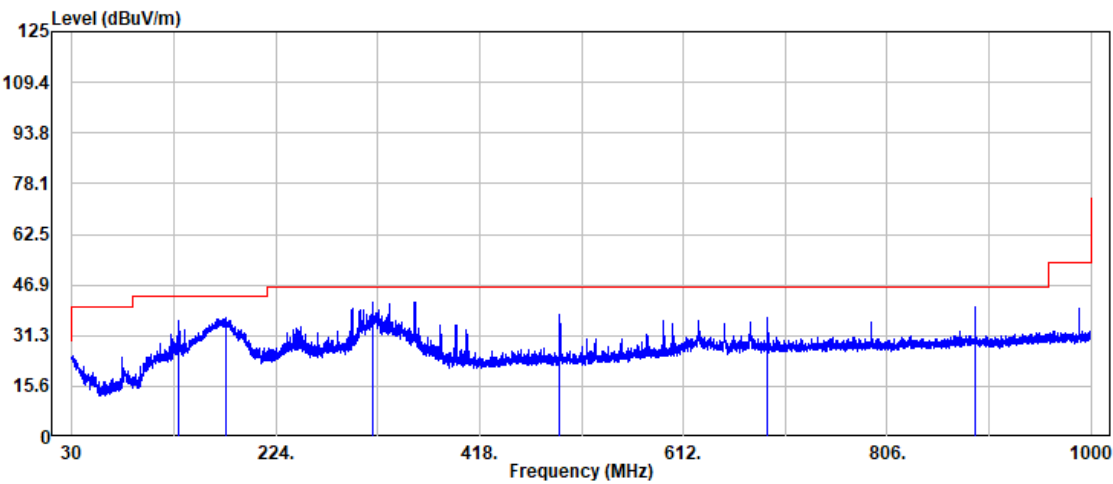


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
131.24	45.72	-9.73	35.99	43.50	-7.51	Peak
176.11	48.53	-11.85	36.68	43.50	-6.82	Peak
316.76	50.42	-8.88	41.54	46.00	-4.46	Peak
494.51	42.07	-4.32	37.75	46.00	-8.25	Peak
692.39	37.96	-1.18	36.78	46.00	-9.22	Peak
890.15	38.38	1.63	40.01	46.00	-5.99	Peak



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 70 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 50		

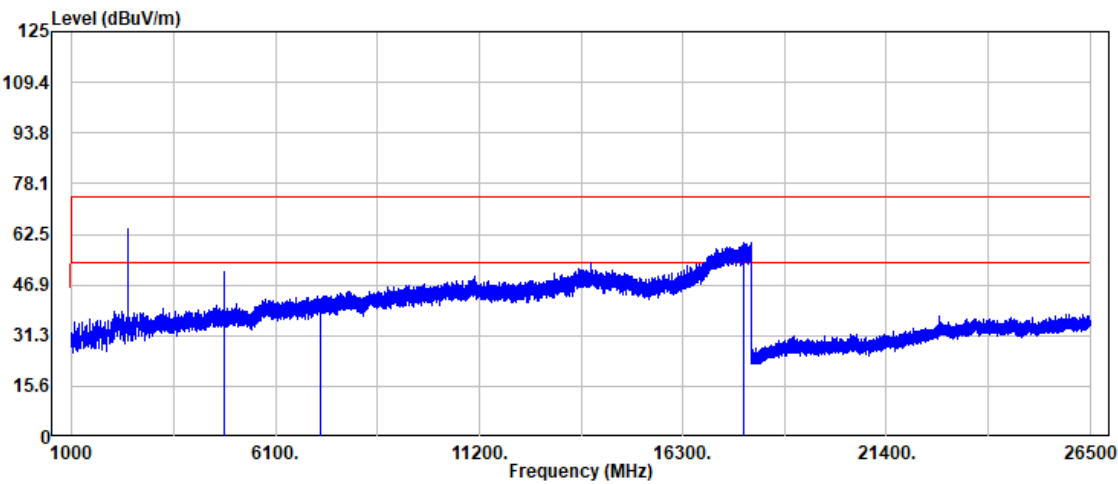


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	48.75	2.33	51.08	74.00	-22.92	Peak
4824.00	47.27	2.33	49.60	54.00	-4.40	Average
7236.00	33.37	9.17	42.54	74.00	-31.46	Peak
7236.00	26.91	9.17	36.08	54.00	-17.92	Average
17816.00	34.29	25.47	59.76	74.00	-14.24	Peak
17816.00	24.16	25.47	49.63	54.00	-4.37	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 71 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 50		

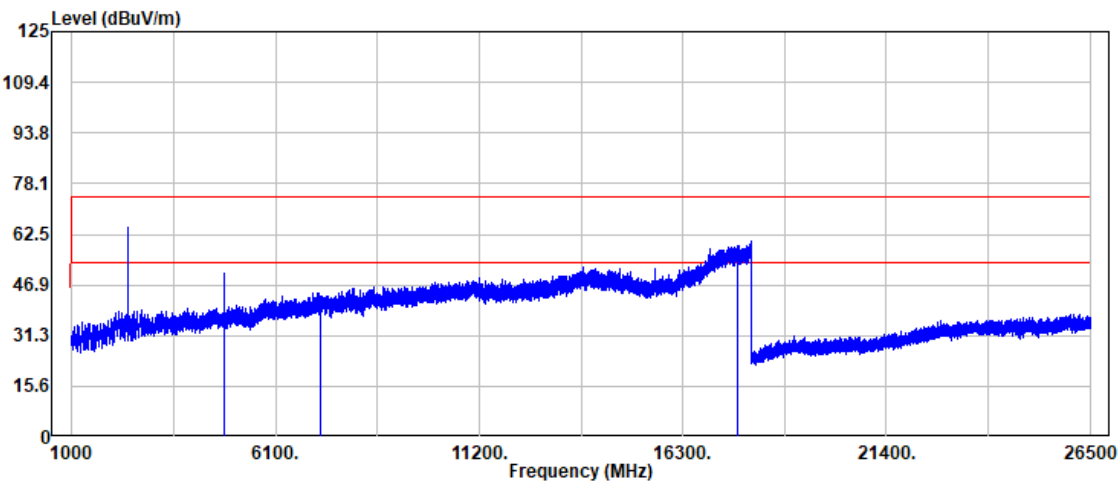


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	47.93	2.33	50.26	74.00	-23.74	Peak
4824.00	46.25	2.33	48.58	54.00	-5.42	Average
7236.00	34.14	9.17	43.31	74.00	-30.69	Peak
7236.00	26.60	9.17	35.77	54.00	-18.23	Average
17675.00	33.11	25.62	58.73	74.00	-15.27	Peak
17675.00	24.10	25.62	49.72	54.00	-4.28	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 72 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 54		

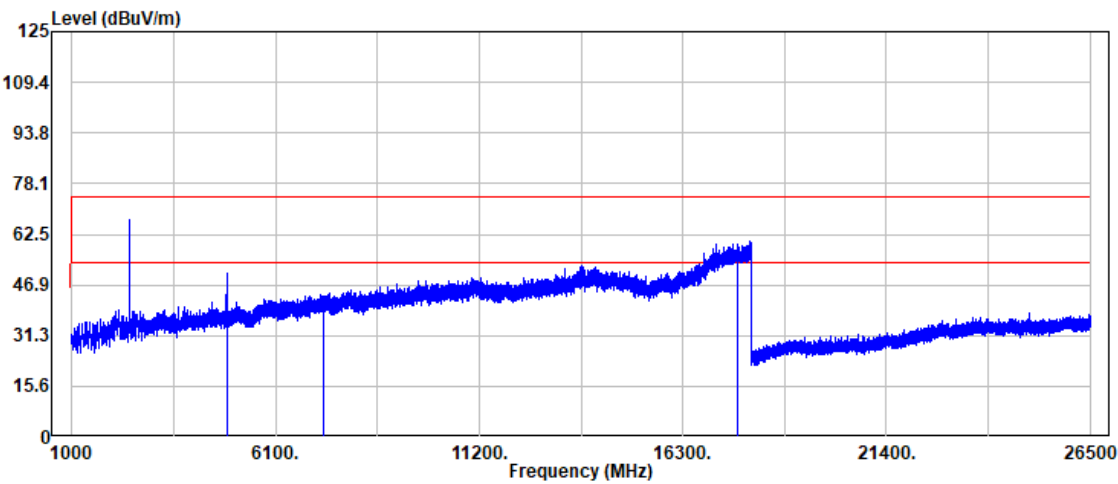


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	48.15	2.49	50.64	74.00	-23.36	Peak
4874.00	46.13	2.49	48.62	54.00	-5.38	Average
7311.00	34.35	9.16	43.51	74.00	-30.49	Peak
7311.00	26.34	9.16	35.50	54.00	-18.50	Average
17689.00	33.61	25.82	59.43	74.00	-14.57	Peak
17689.00	24.09	25.82	49.91	54.00	-4.09	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 73 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 54		

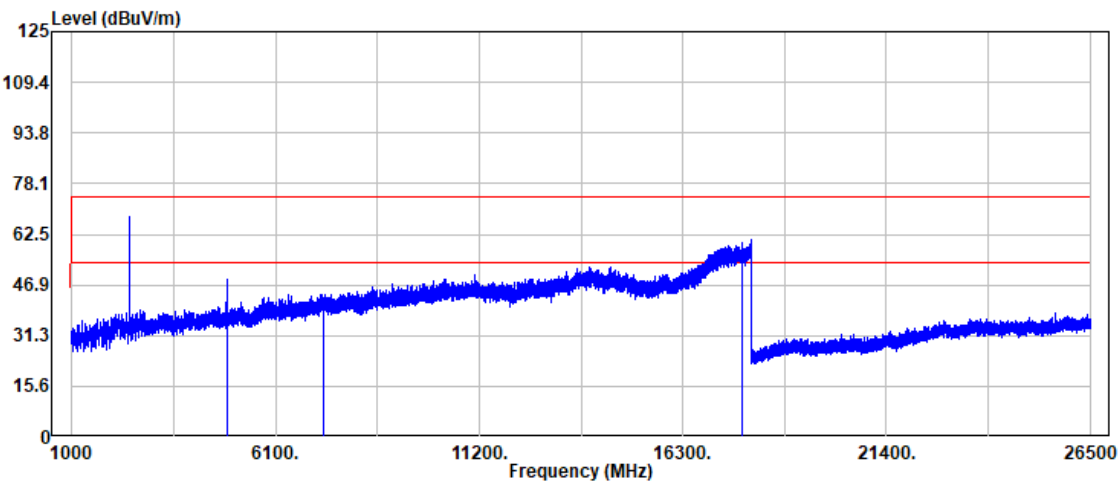


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	46.25	2.49	48.74	74.00	-25.26	Peak
4874.00	44.84	2.49	47.33	54.00	-6.67	Average
7311.00	33.87	9.16	43.03	74.00	-30.97	Peak
7311.00	26.35	9.16	35.51	54.00	-18.49	Average
17772.00	34.74	25.02	59.76	74.00	-14.24	Peak
17772.00	24.01	25.02	49.03	54.00	-4.97	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 74 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 54		

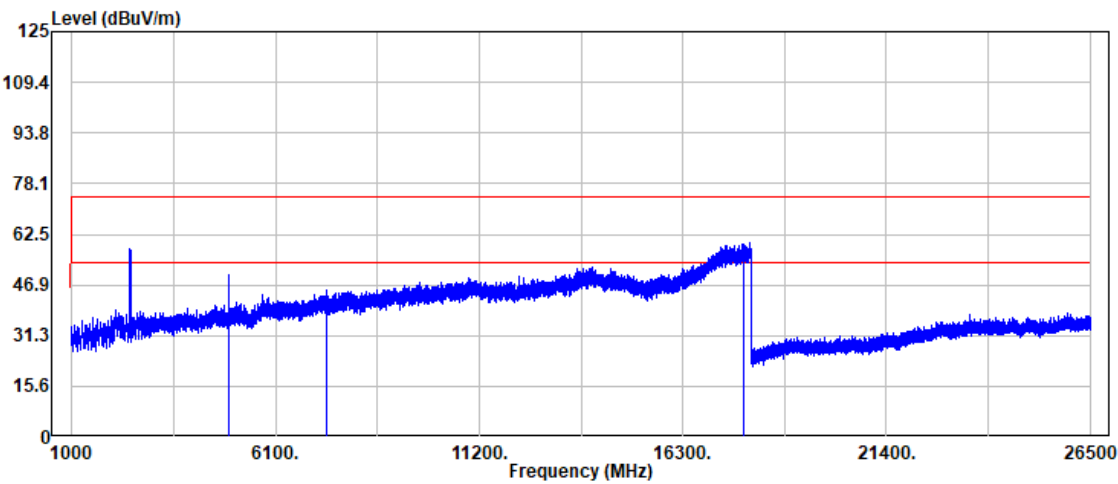


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	47.50	2.99	50.49	74.00	-23.51	Peak
4924.00	46.15	2.99	49.14	54.00	-4.86	Average
7386.00	36.46	9.04	45.50	74.00	-28.50	Peak
7386.00	26.94	9.04	35.98	54.00	-18.02	Average
17818.00	34.16	25.46	59.62	74.00	-14.38	Peak
17818.00	24.19	25.46	49.65	54.00	-4.35	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 75 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: B	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 54		

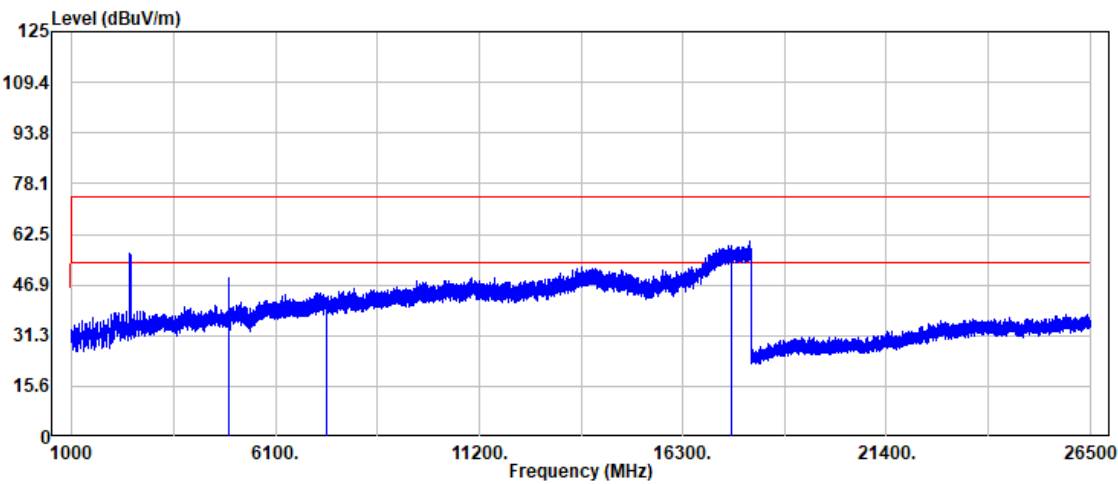


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	46.32	2.99	49.31	74.00	-24.69	Peak
4924.00	44.53	2.99	47.52	54.00	-6.48	Average
7386.00	33.75	9.04	42.79	74.00	-31.21	Peak
7386.00	26.56	9.04	35.60	54.00	-18.40	Average
17520.00	33.79	25.16	58.95	74.00	-15.05	Peak
17520.00	24.05	25.16	49.21	54.00	-4.79	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 76 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 37		

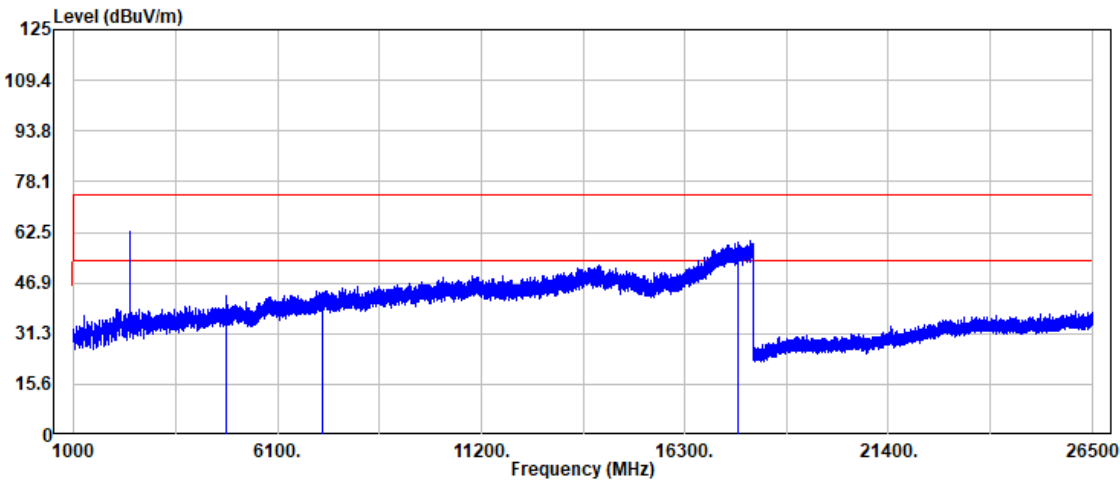


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	40.71	2.33	43.04	74.00	-30.96	Peak
4824.00	35.43	2.33	37.76	54.00	-16.24	Average
7236.00	34.51	9.17	43.68	74.00	-30.32	Peak
7236.00	26.25	9.17	35.42	54.00	-18.58	Average
17630.00	34.00	25.34	59.34	74.00	-14.66	Peak
17630.00	24.66	25.34	50.00	54.00	-4.00	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 77 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 37		

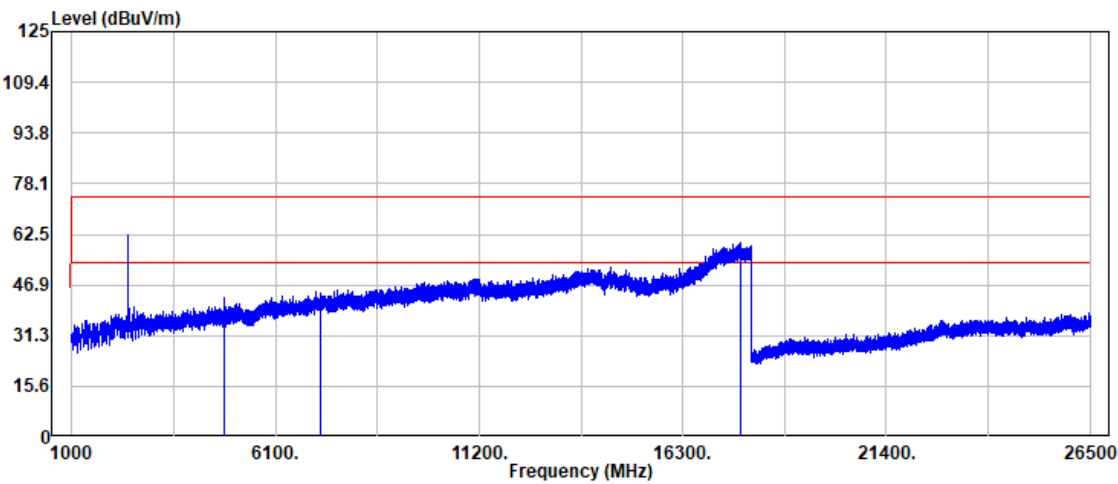


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	40.42	2.33	42.75	74.00	-31.25	Peak
4824.00	33.31	2.33	35.64	54.00	-18.36	Average
7236.00	35.26	9.17	44.43	74.00	-29.57	Peak
7236.00	26.48	9.17	35.65	54.00	-18.35	Average
17739.00	35.00	24.90	59.90	74.00	-14.10	Peak
17739.00	24.31	24.90	49.21	54.00	-4.79	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 78 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 42		

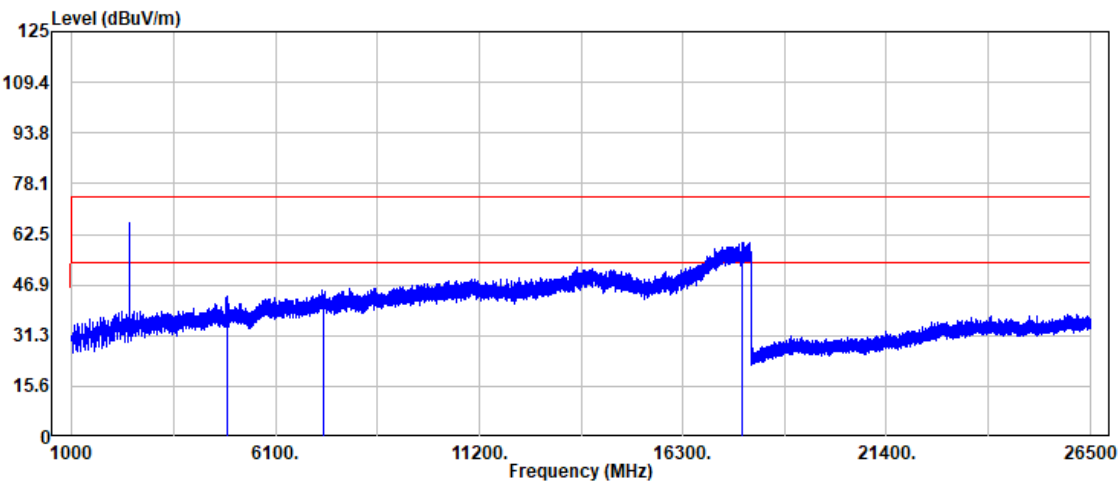


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	40.75	2.49	43.24	74.00	-30.76	Peak
4874.00	34.10	2.49	36.59	54.00	-17.41	Average
7311.00	34.45	9.16	43.61	74.00	-30.39	Peak
7311.00	26.36	9.16	35.52	54.00	-18.48	Average
17794.00	34.23	25.45	59.68	74.00	-14.32	Peak
17794.00	24.12	25.45	49.57	54.00	-4.43	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 79 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 42		

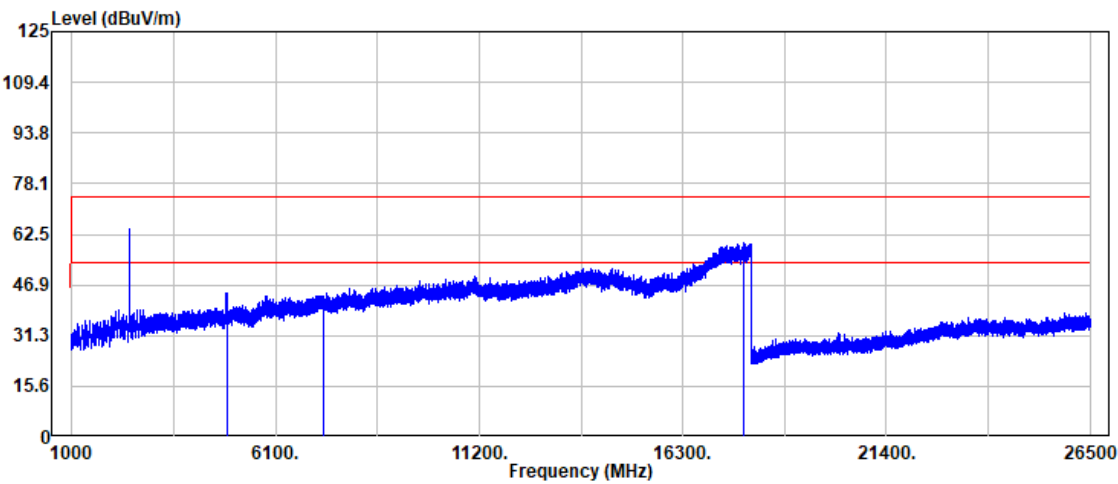


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	41.94	2.49	44.43	74.00	-29.57	Peak
4874.00	33.85	2.49	36.34	54.00	-17.66	Average
7311.00	34.22	9.16	43.38	74.00	-30.62	Peak
7311.00	26.73	9.16	35.89	54.00	-18.11	Average
17809.00	34.33	25.51	59.84	74.00	-14.16	Peak
17809.00	24.24	25.51	49.75	54.00	-4.25	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 80 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 42		

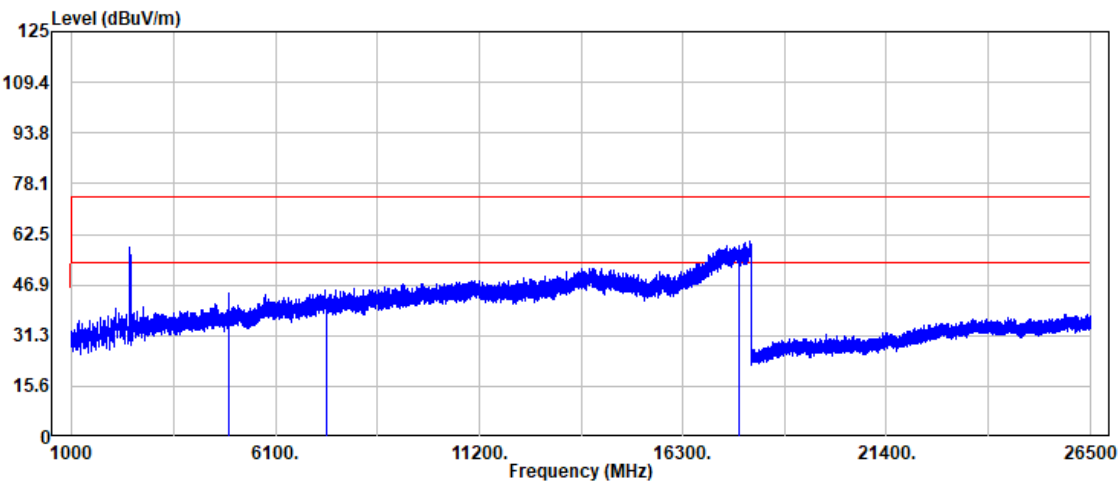


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	41.34	2.99	44.33	74.00	-29.67	Peak
4924.00	34.71	2.99	37.70	54.00	-16.30	Average
7386.00	33.55	9.04	42.59	74.00	-31.41	Peak
7386.00	26.24	9.04	35.28	54.00	-18.72	Average
17706.00	33.30	25.81	59.11	74.00	-14.89	Peak
17706.00	24.17	25.81	49.98	54.00	-4.02	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 81 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: G	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 42		

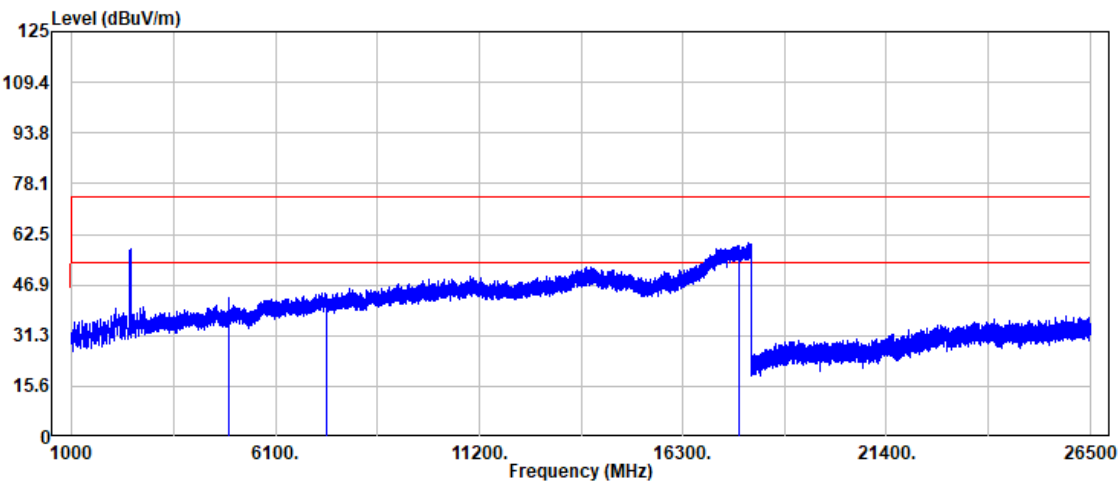


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	39.72	2.99	42.71	74.00	-31.29	Peak
4924.00	33.02	2.99	36.01	54.00	-17.99	Average
7386.00	34.80	9.04	43.84	74.00	-30.16	Peak
7386.00	26.34	9.04	35.38	54.00	-18.62	Average
17707.00	33.22	25.78	59.00	74.00	-15.00	Peak
17707.00	24.15	25.78	49.93	54.00	-4.07	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 82 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 32		

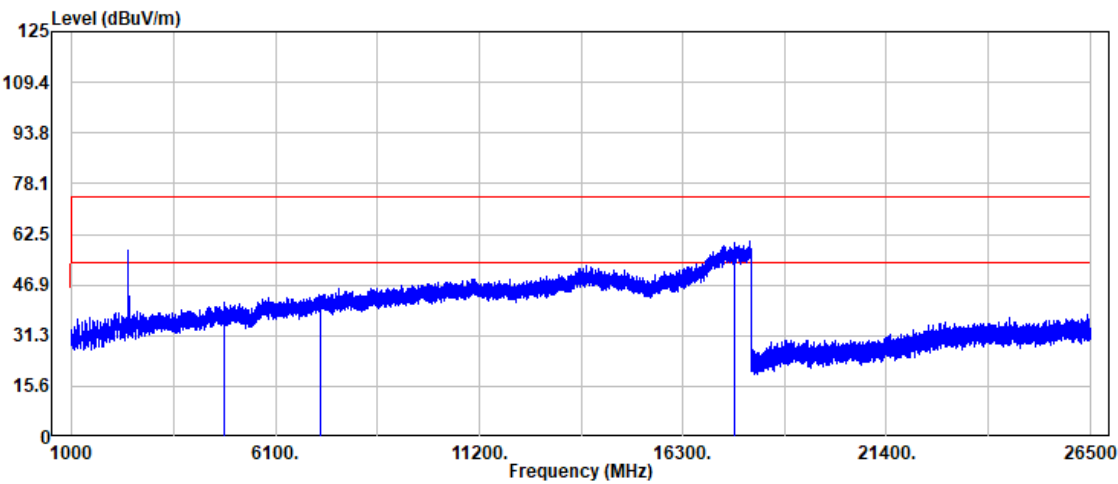


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	39.16	2.33	41.49	74.00	-32.51	Peak
4824.00	31.80	2.33	34.13	54.00	-19.87	Average
7236.00	34.23	9.17	43.40	74.00	-30.60	Peak
7236.00	26.55	9.17	35.72	54.00	-18.28	Average
17597.00	34.44	25.44	59.88	74.00	-14.12	Peak
17597.00	24.10	25.44	49.54	54.00	-4.46	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 83 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 32		

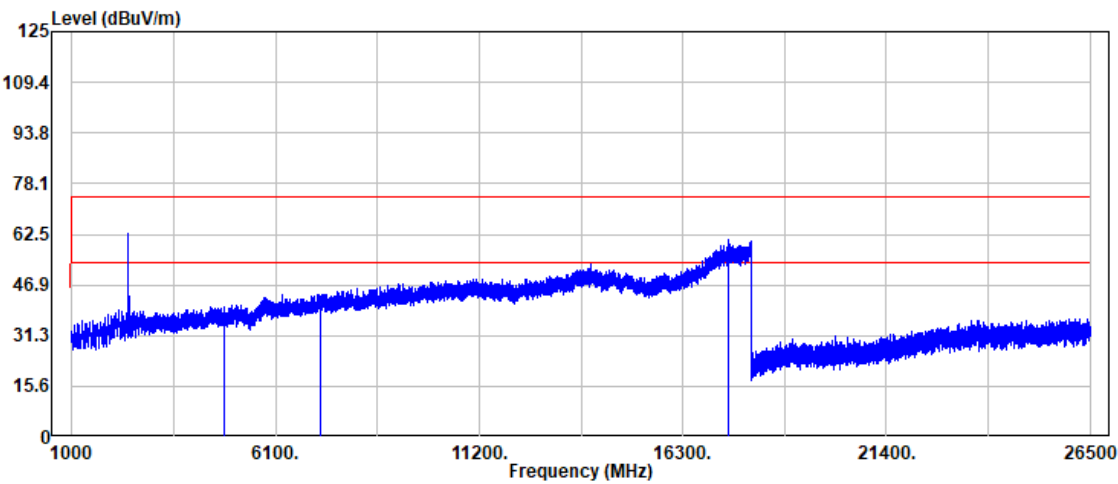


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	37.65	2.33	39.98	74.00	-34.02	Peak
4824.00	30.96	2.33	33.29	54.00	-20.71	Average
7236.00	33.89	9.17	43.06	74.00	-30.94	Peak
7236.00	26.52	9.17	35.69	54.00	-18.31	Average
17434.00	35.51	25.26	60.77	74.00	-13.23	Peak
17434.00	24.20	25.26	49.46	54.00	-4.54	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 84 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 34		

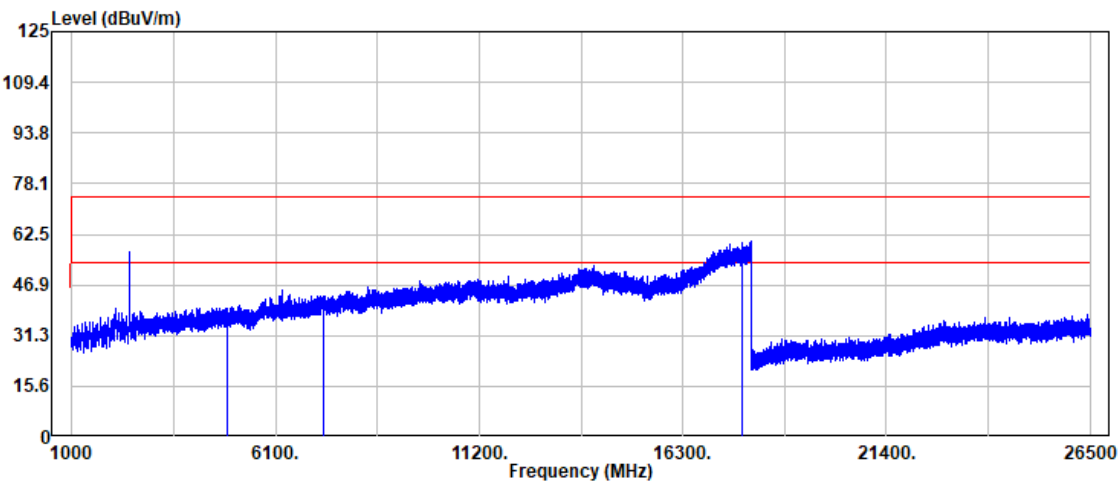


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	37.32	2.49	39.81	74.00	-34.19	Peak
4874.00	31.28	2.49	33.77	54.00	-20.23	Average
7311.00	34.29	9.16	43.45	74.00	-30.55	Peak
7311.00	26.74	9.16	35.90	54.00	-18.10	Average
17780.00	34.81	25.17	59.98	74.00	-14.02	Peak
17780.00	24.12	25.17	49.29	54.00	-4.71	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 85 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 34		

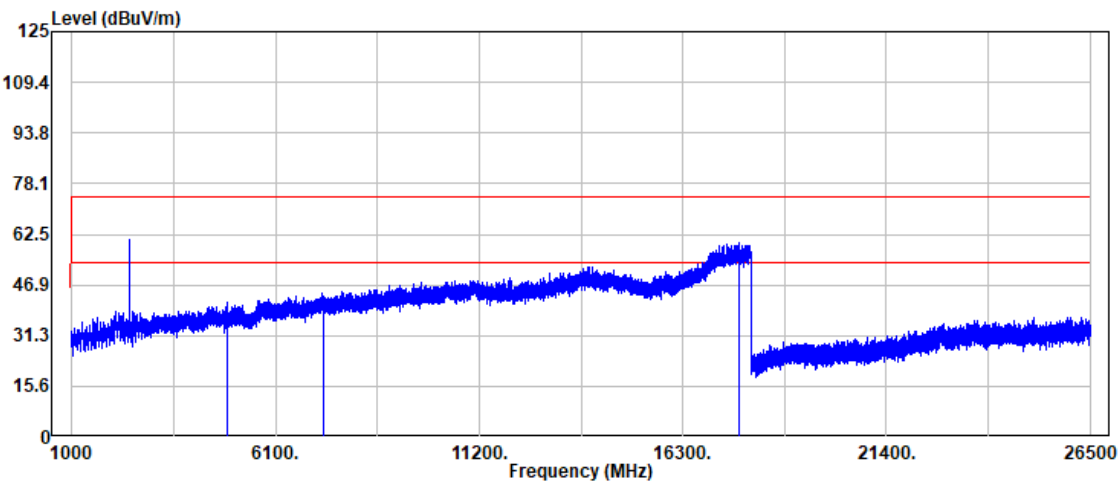


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	38.91	2.49	41.40	74.00	-32.60	Peak
4874.00	34.11	2.49	36.60	54.00	-17.40	Average
7311.00	34.45	9.16	43.61	74.00	-30.39	Peak
7311.00	26.07	9.16	35.23	54.00	-18.77	Average
17710.00	34.24	25.70	59.94	74.00	-14.06	Peak
17710.00	24.15	25.70	49.85	54.00	-4.15	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 86 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 36		

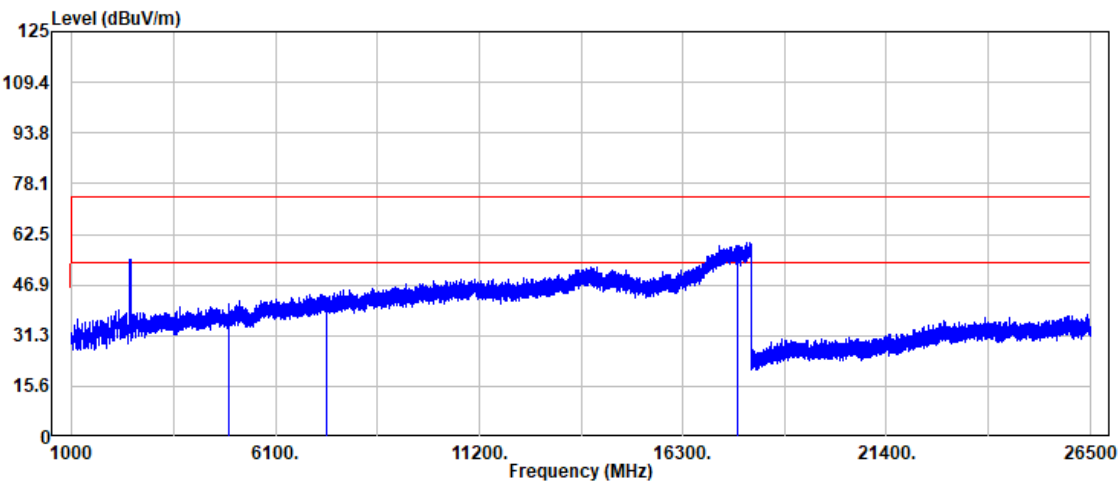


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	38.06	2.99	41.05	74.00	-32.95	Peak
4924.00	32.41	2.99	35.40	54.00	-18.60	Average
7386.00	33.58	9.04	42.62	74.00	-31.38	Peak
7386.00	26.41	9.04	35.45	54.00	-18.55	Average
17666.00	33.50	25.48	58.98	74.00	-15.02	Peak
17666.00	24.16	25.48	49.64	54.00	-4.36	Average



Project No: TM-2602000265P
Report No.: TMWK2603001433KR

Page 87 / 87
Rev. 00

Project No	: TM-2602000265P	Test Date	: 2026-05-04
Operation Band	: AX20	Temp./Humi.	: 25.3/56
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 36		

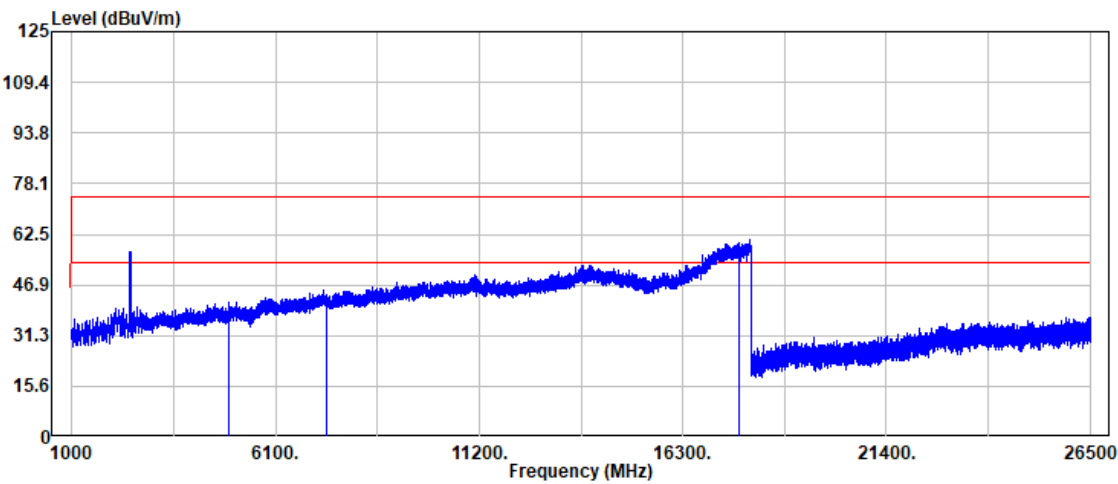

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	38.43	2.99	41.42	74.00	-32.58	Peak
4924.00	31.17	2.99	34.16	54.00	-19.84	Average
7386.00	34.69	9.04	43.73	74.00	-30.27	Peak
7386.00	26.59	9.04	35.63	54.00	-18.37	Average
17705.00	34.09	25.84	59.93	74.00	-14.07	Peak
17705.00	24.06	25.84	49.90	54.00	-4.10	Average

- End of Test Report -