

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1084
FCC ID: JOYEB1084

In accordance with FCC Part 15 Subpart C

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-21219-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY – Result: Complied

A sample of this product was tested and the result above was confirmed in accordance with FCC Part 15 Subpart C.



ACCREDITED
Certificate #3686.03

DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
www.tuvsud.com/ja-jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information	3
1.7	Test set up	3
1.8	Test period	3
2	Equipment Under Test	4
2.1	EUT information	4
2.2	Modification to the EUT	5
2.3	Variation of family model(s)	5
2.4	Operating channels and frequencies	5
2.5	Operating mode	6
2.6	Operating flow	6
3	Configuration of Equipment	7
3.1	Equipment used	7
3.2	Cable(s) used	7
3.3	System configuration	7
4	Test Result	8
4.1	Spurious Emissions - Radiated -	8
4.2	Restricted Band of Operation	38
4.3	AC Power Line Conducted Emissions	48
5	Antenna requirement	51
6	Measurement Uncertainty	52
7	Laboratory Information	53
Appendix A. Test Equipment		54
Appendix B. Duty Cycle		55

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-21219-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.3 Test methods

ANSI C63.10-2013,
KDB 558074 D01 15.247 Meas Guidance v05r02

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
15.247(a)(2)	6dB Bandwidth	Conducted	N/A	*1
15.247(b)(3)	Maximum Peak Output Power	Conducted	N/A	*1
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	N/A	*1
15.247(d) 15.205 15.209	Spurious Emissions	Conducted	N/A	*1
		Radiated	PASS	-
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS	-
15.247(e)	Transmitter Power Spectral Density	Conducted	N/A	*1
15.207	AC Power Line Conducted Emissions	Conducted	PASS	-

*1 Since there is no change in Module from FCC ID: JOYEB1083, only the Radiated test items were performed. Please refer to the test report "JPD-TR-21194-0" of "FCC ID: JOYEB1083".

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

19-October-2021 - 10-November-2021

2 Equipment Under Test

All information in this chapter was provided by the applicant.

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1084
Serial number	359178870020360
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.87 V
Size	(W) 69 mm × (D) 153 mm × (H) 10 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20 °C to 60 °C
Hardware version	DMT
Software version	0039.a
Firmware version	Not applicable
RF Specification	
Protocol	Bluetooth 5.1 + EDR
Frequency range	2402 MHz-2480 MHz
Number of RF Channels	40 Channels
Modulation method/Data rate	GFSK (1 Mbps, 2Mbps), LongRange S2/S8 (500 kbps/125 kbps)
Channel separation	2 MHz
Conducted power	5.962 mW
Antenna type	Internal antenna
Antenna gain	-3.5 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1084, Serial Number: 359178870020360			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2440
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	GFSK	1 Mbps
Low, Middle, High	GFSK	2 Mbps
Low, Middle, High	GFSK, LongRange S2	500 kbp
Low, Middle, High	GFSK, LongRange S8	125 kbps

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z-axis and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

2.6 Operating flow

[Tx mode]

- i) Test program setup to the Software
- ii) Select a Test mode
Operating frequency: Channel Low: 2402 MHz, Channel Middle: 2440 MHz, Channel High: 2480 MHz
- iii) Start test mode

[Rx mode]

- i) Test program setup to the Software
- ii) Select a Test mode
Operating frequency: Channel Low: 2402 MHz, Channel Middle: 2440 MHz, Channel High: 2480 MHz
- iii) Start test mode

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.3 System configuration” correspond to the list in “3.1 Equipment used” and “3.2 Cable(s) used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1084	359178870020360	JOYEB1084	EUT
2	AC Adapter	KDDI	0602PQA	N/A	N/A	*

*:AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Equipment	Length[m]	Shield	Connector	Comment
a	USB cable (for AC Adapter)	1.5	No	Plastic	*

*:AC power line Conducted Emission Test.

3.3 System configuration



4 Test Result

4.1 Spurious Emissions - Radiated -

4.1.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB558074 D01 v05r02]

Test was applied by following conditions.

Test method	: ANSI C63.10
Frequency range	: 9kHz to 25GHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	: RBW=1MHz, VBW=3kHz (1Mbps), 10kHz (2Mbps), 1kHz (LongRange S2, S8), Span=0Hz, Sweep=auto Display mode=Linear


Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
Bluetooth 5.1 LE (1Mbps)	62.46	391	235	2.558	3kHz
Bluetooth 5.1 LE (2Mbps)	32.96	206	419	4.854	10kHz
Bluetooth 5.1 LE (LongRange S2)	57.12	1071	804	0.934	1kHz
Bluetooth 5.1 LE (LongRange S8)	82.72	3102	648	0.322	1kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

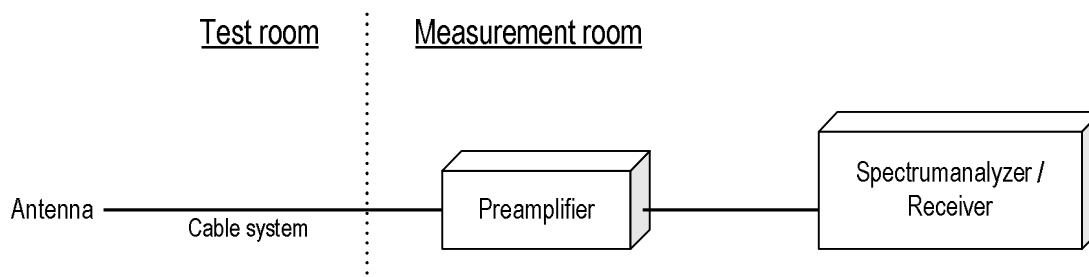**4.1.2 Calculation method**

[9kHz to 150kHz]

Emission level = Reading + (Ant factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant factor + Cable system loss - Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4804.0MHz: 74.0dBuV/m (Peak Limit)

S.A Reading = 39.9dBuV Cable system loss = 8.3dB

Result = 39.9 + 8.3 = 48.2dBuV/m

Margin = 74.0 - 48.2 = 25.8dB

4.1.3 Limit


Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

4.1.4 Test data


Date	: 19-October-2021		
Temperature	: 23.1 [°C]		
Humidity	: 38.7 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 20-October-2021		
Temperature	: 22.1 [°C]		
Humidity	: 42.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 24-October-2021		
Temperature	: 21.9 [°C]		
Humidity	: 33.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Kazunori Saito</u>
Date	: 29-October-2021		
Temperature	: 21.5 [°C]		
Humidity	: 36.3 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 1-November-2021		
Temperature	: 22.0 [°C]		
Humidity	: 37.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

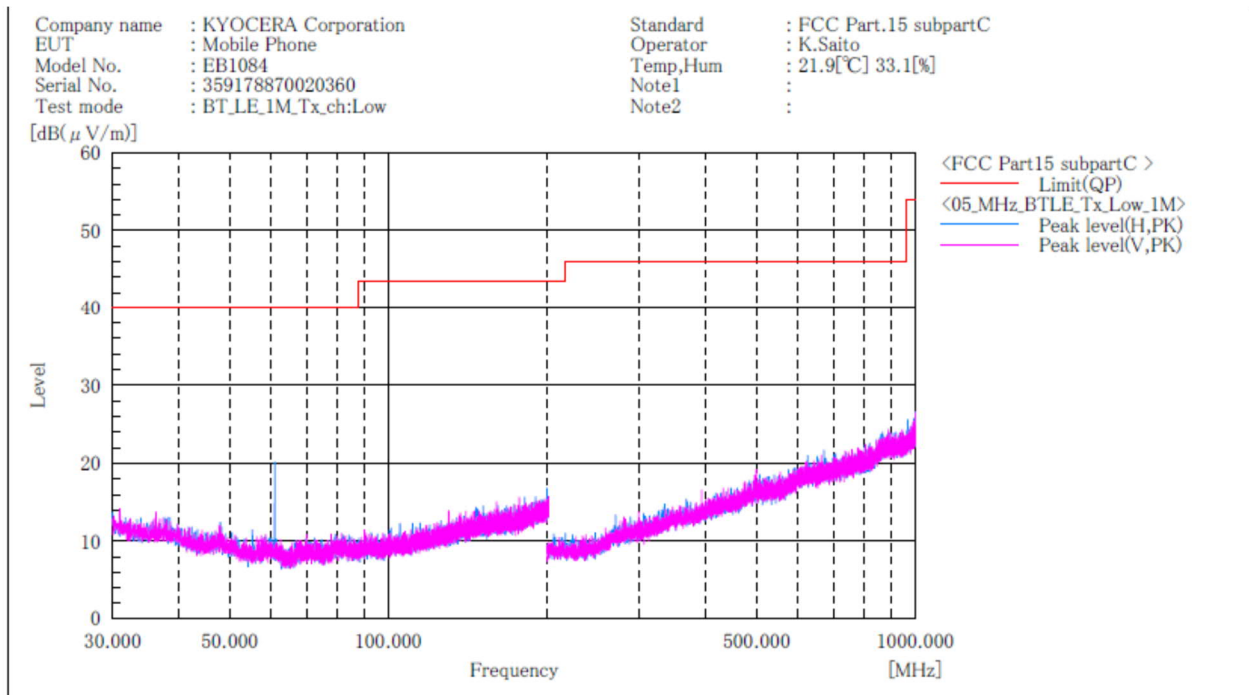[Transmission mode]**[BT_LE (1Mbps)]****Channel: Low****BELOW 1 GHz****Final Result**

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB (1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

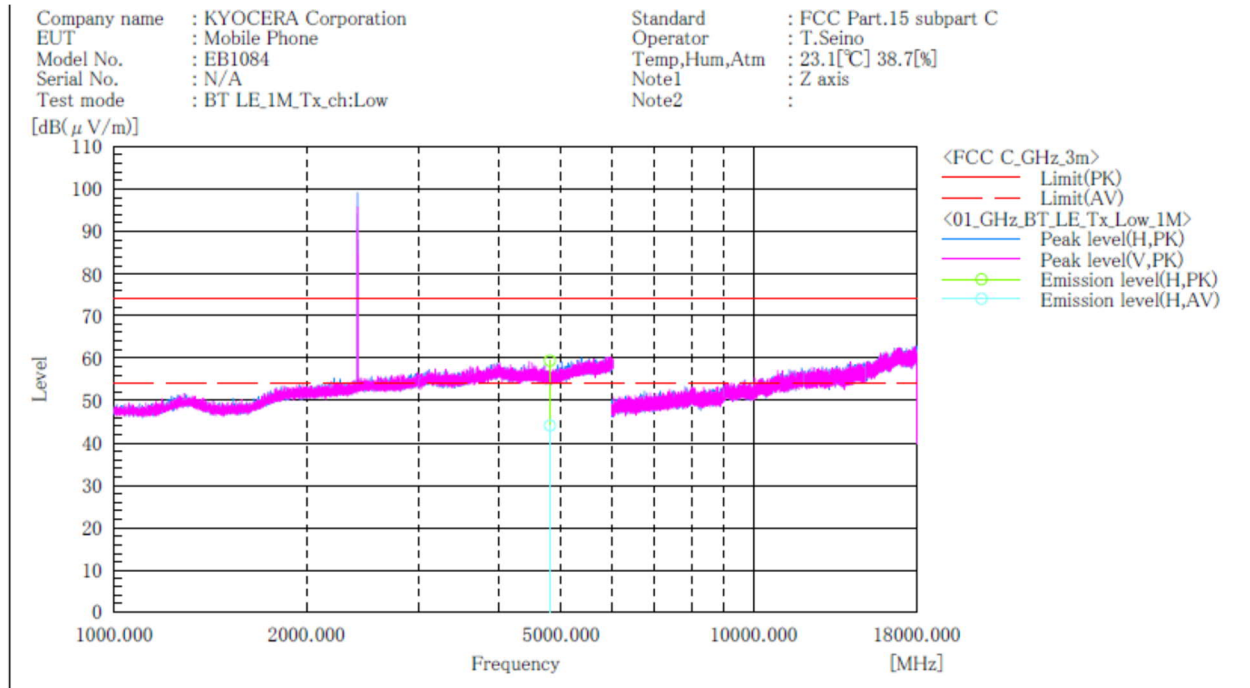[BT_LE (1Mbps)]**Channel: Low****ABOVE 1 GHz**


Final Result

No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4804.000	48.8	33.5	10.6	59.4	44.1	74.0	54.0	14.6	9.9	195.0	210.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (1Mbps)]
Channel: Middle
BELOW 1 GHz

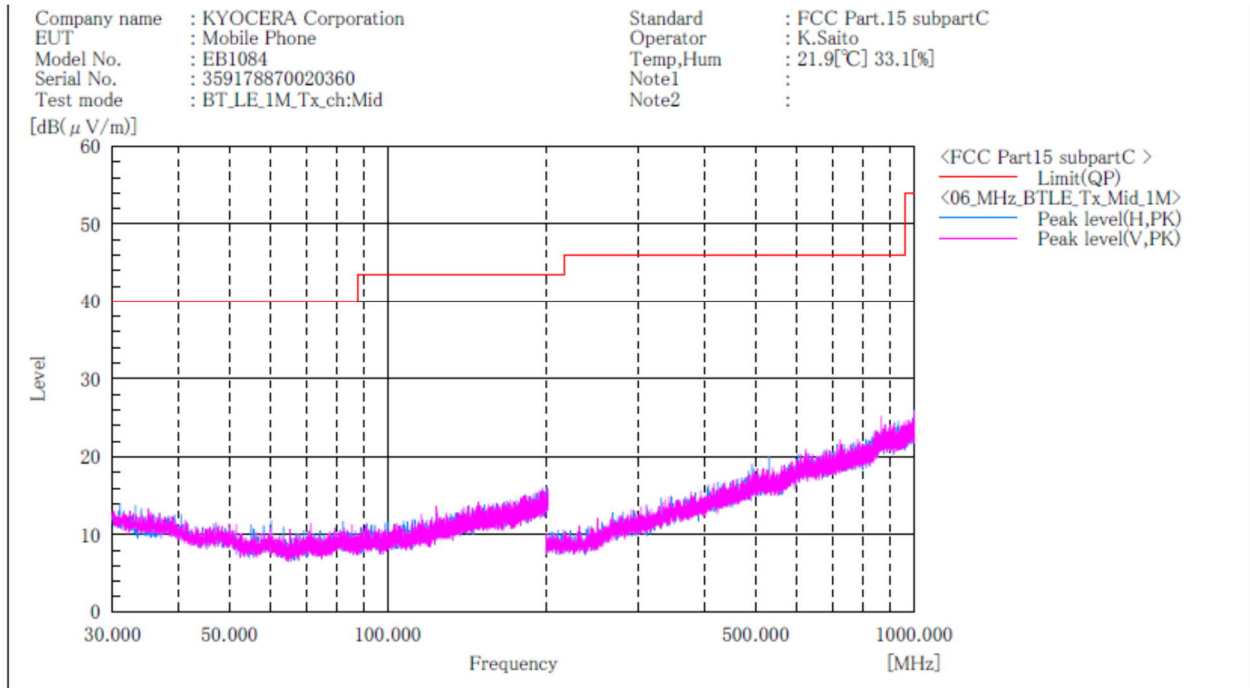


Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

[BT_LE (1Mbps)]
Channel: Middle
ABOVE 1 GHz

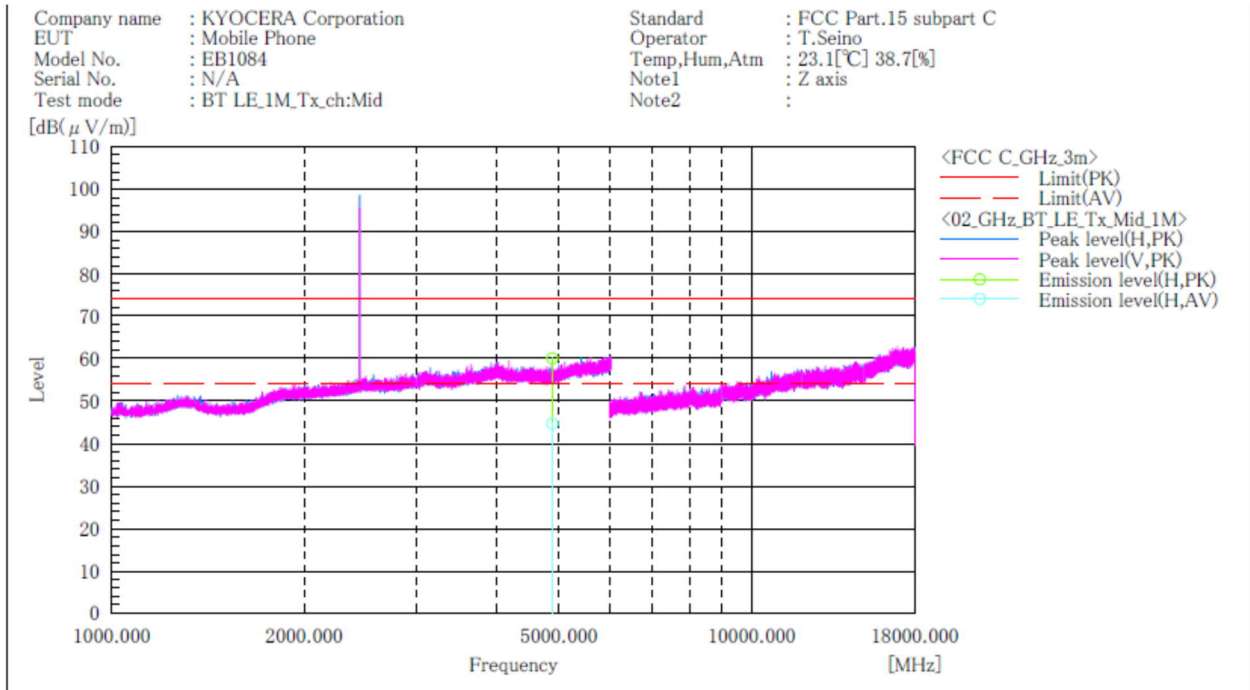

Final Result

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4880.000	H	49.3	34.0	10.7	60.0	44.7	74.0	54.0	14.0	9.3	305.0	206.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (1Mbps)]

Channel: High

BELOW 1 GHz

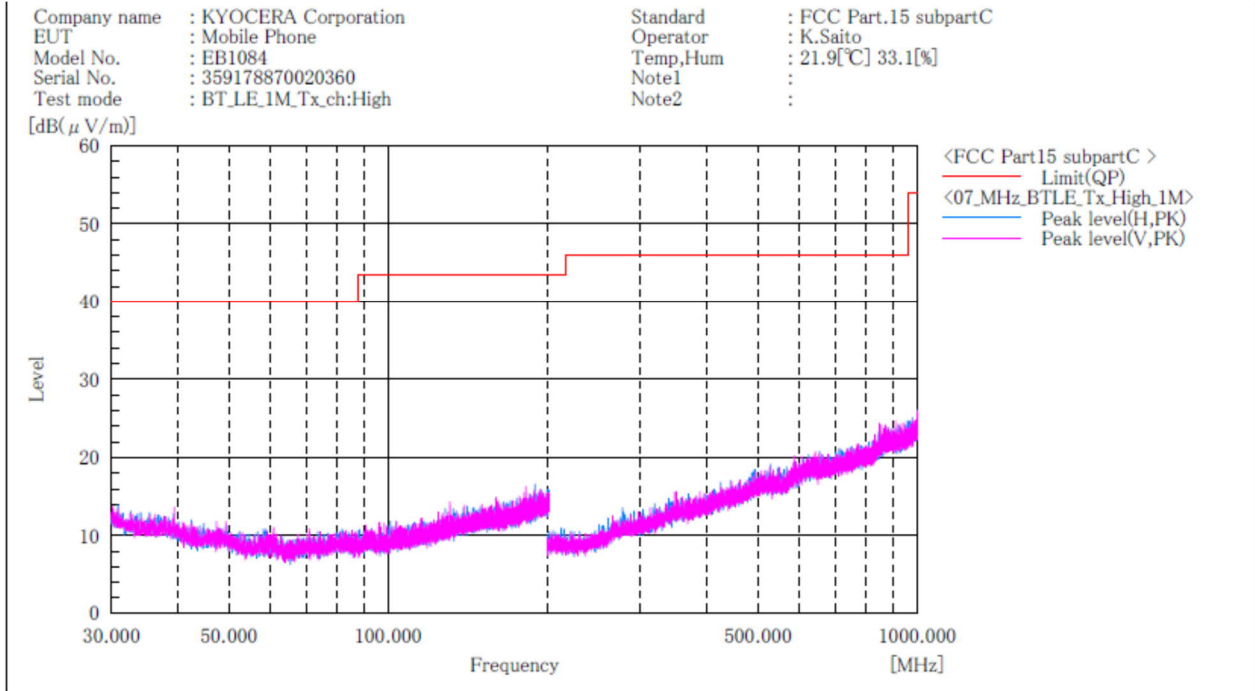


Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

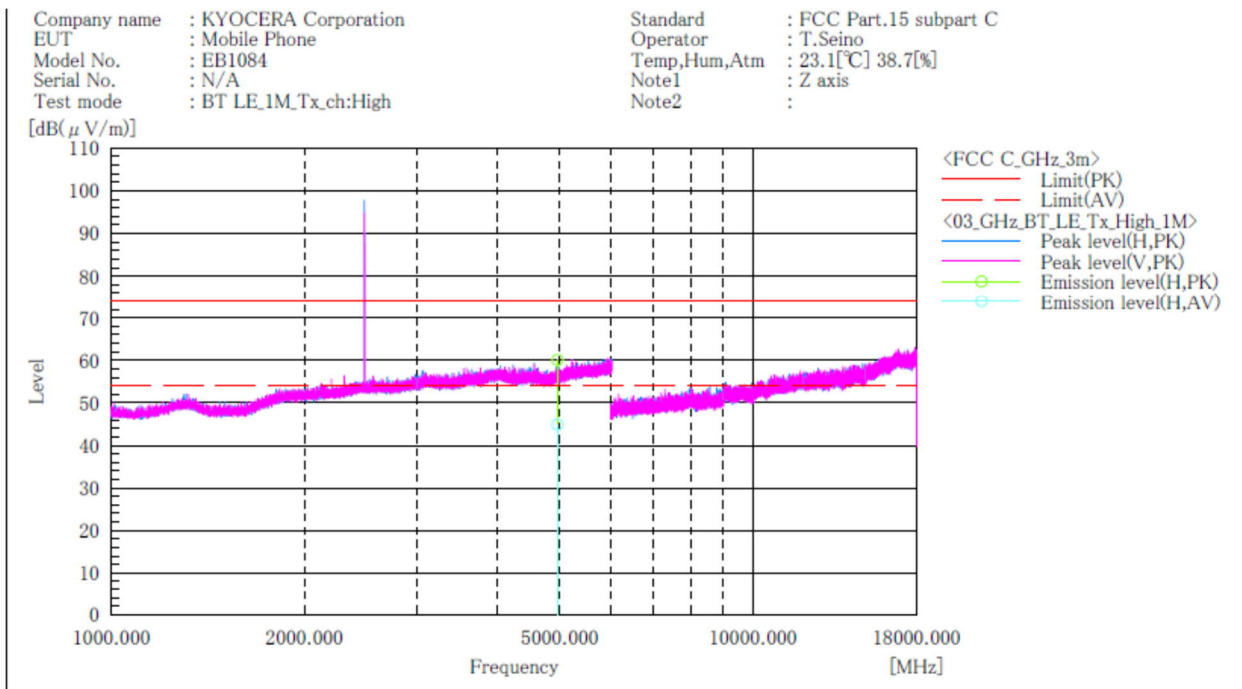[BT_LE (1Mbps)]**Channel: High****ABOVE 1 GHz**


Final Result

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Remark
	[MHz]		PK	AV		PK	AV	PK	AV	PK	AV			
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4960.000	H	49.3	34.1	10.8	60.1	44.9	74.0	54.0	13.9	9.1	265.0	200.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (2Mbps)]
Channel: Low
BELOW 1 GHz

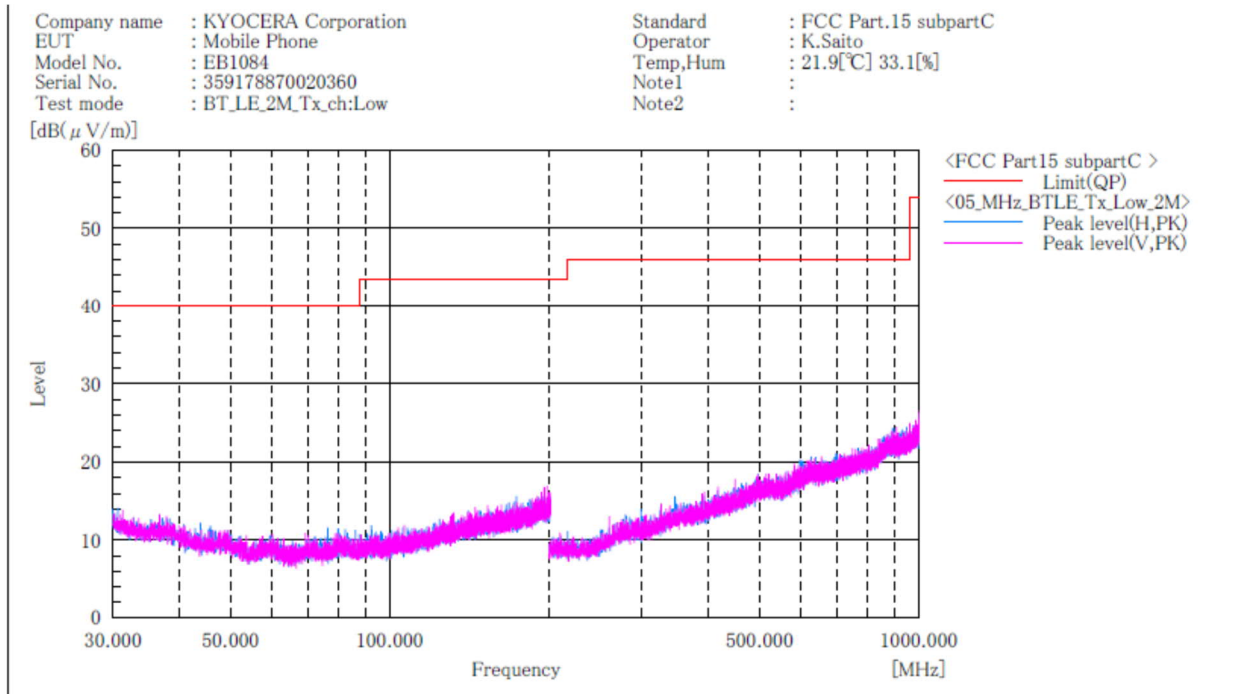


Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

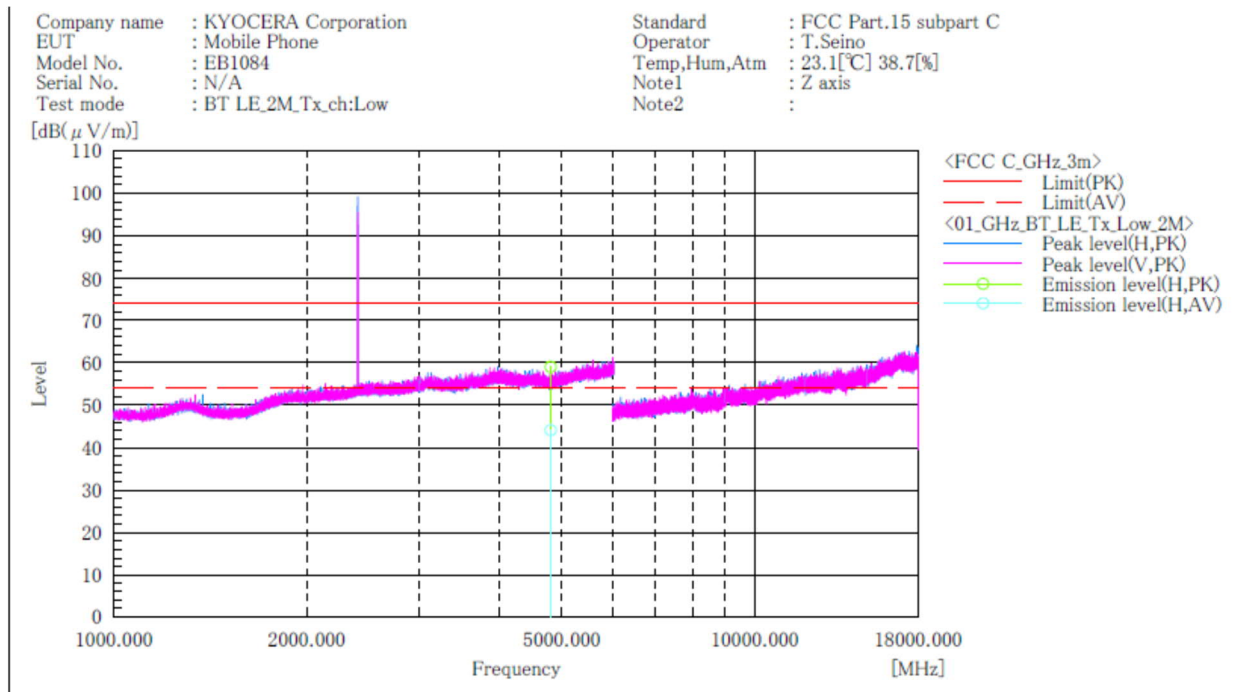[BT_LE (2Mbps)]**Channel: Low****ABOVE 1 GHz**


Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4804.000	H	48.4	33.5	10.6	59.0	44.1	74.0	64.0	15.0	9.9	123.0	212.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (2Mbps)]
Channel: Middle
BELOW 1 GHz

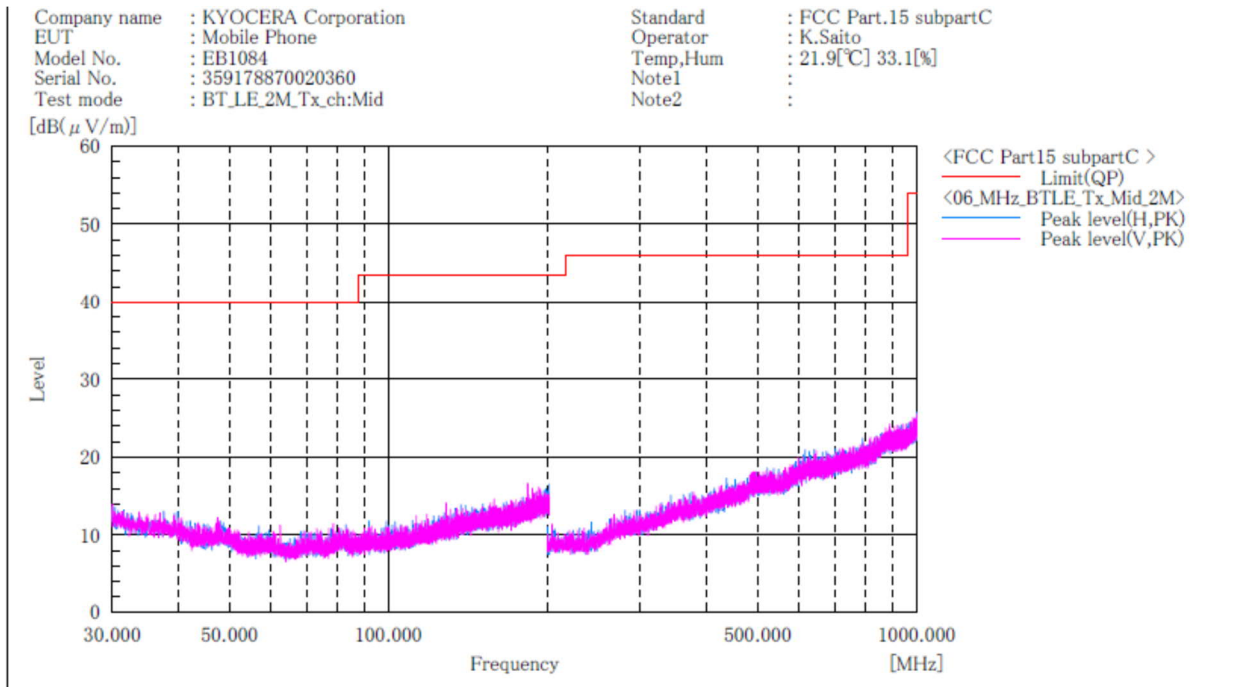


Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

[BT_LE (2Mbps)]
Channel: Middle
ABOVE 1 GHz

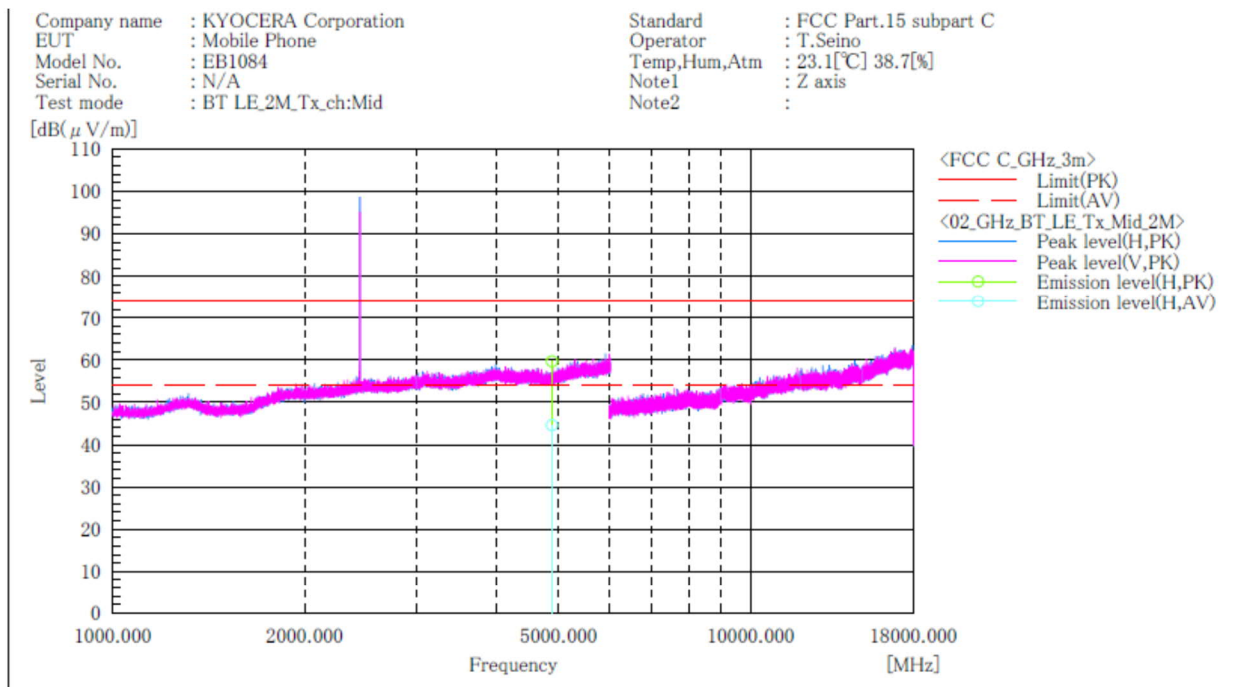


Final Result

No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4880.000	H	49.0	33.9	10.7	59.7	44.6	74.0	54.0	14.3	9.4	169.0	215.0

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (2Mbps)]
Channel: High
BELOW 1 GHz

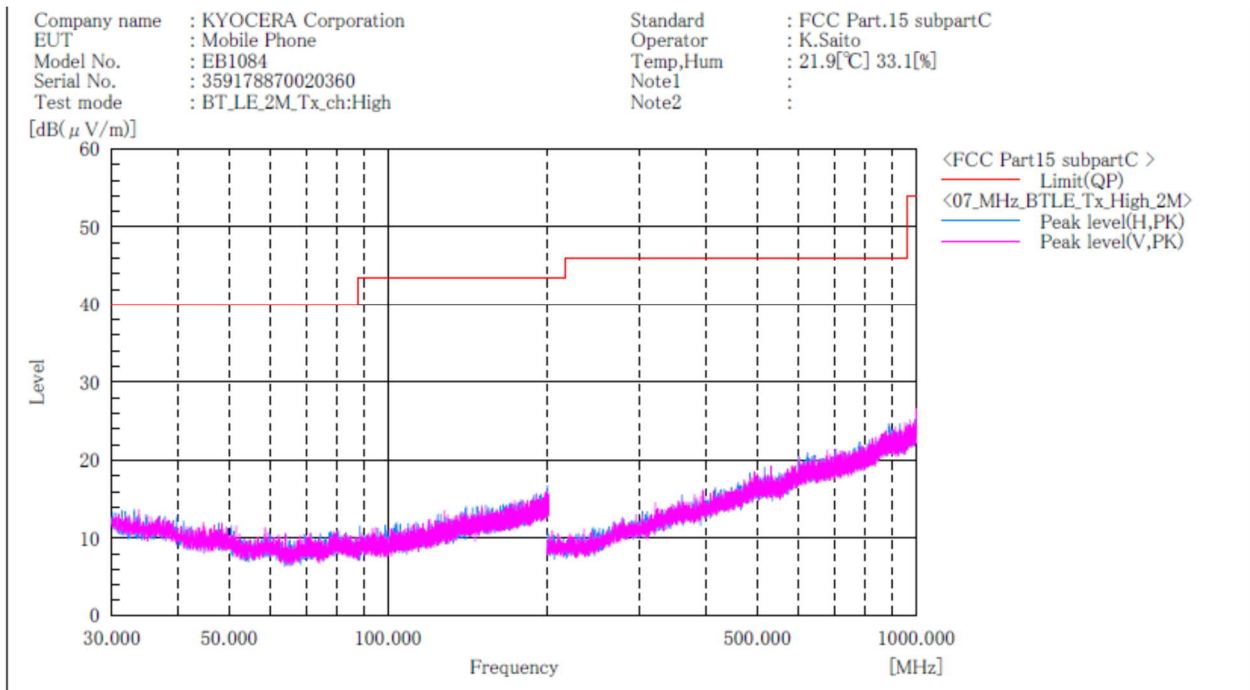

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

[BT_LE (2Mbps)]**Channel: High****ABOVE 1 GHz**

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1084
 Serial No. : N/A
 Test mode : BT LE_2M_Tx_ch:High

Standard : FCC Part.15 subpart C
 Operator : T.Seino
 Temp,Hum,Atm : 23.1[°C] 38.7[%]
 Note1 : Z axis
 Note2 :

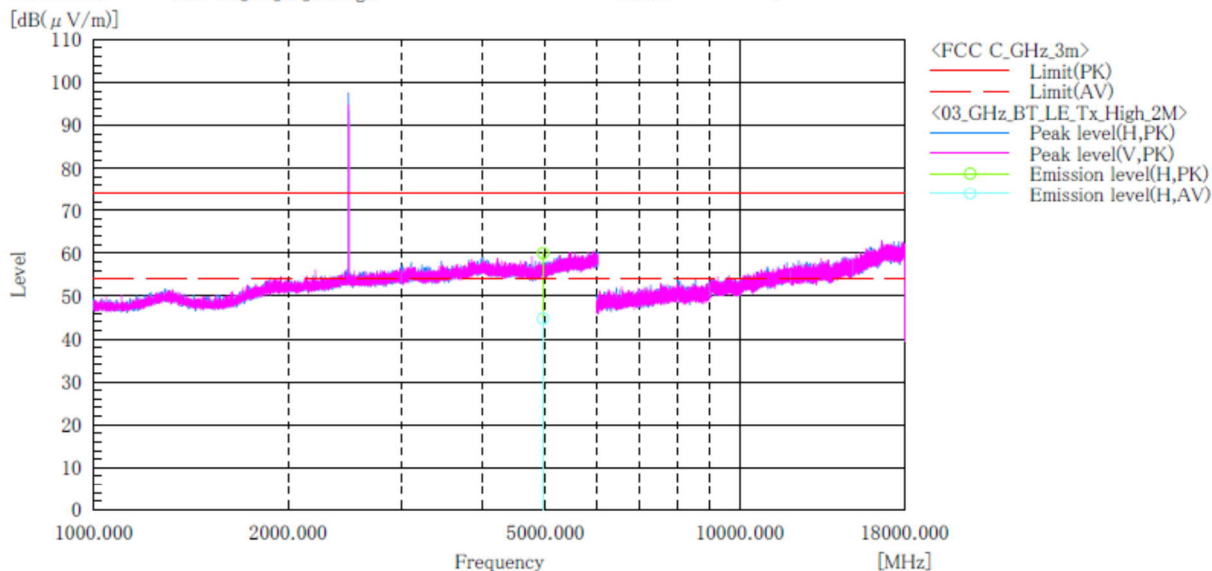


Final Result

No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4960.000	H	49.2	34.0	10.8	60.0	44.8	74.0	54.0	14.0	9.2	100.0	203.0

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

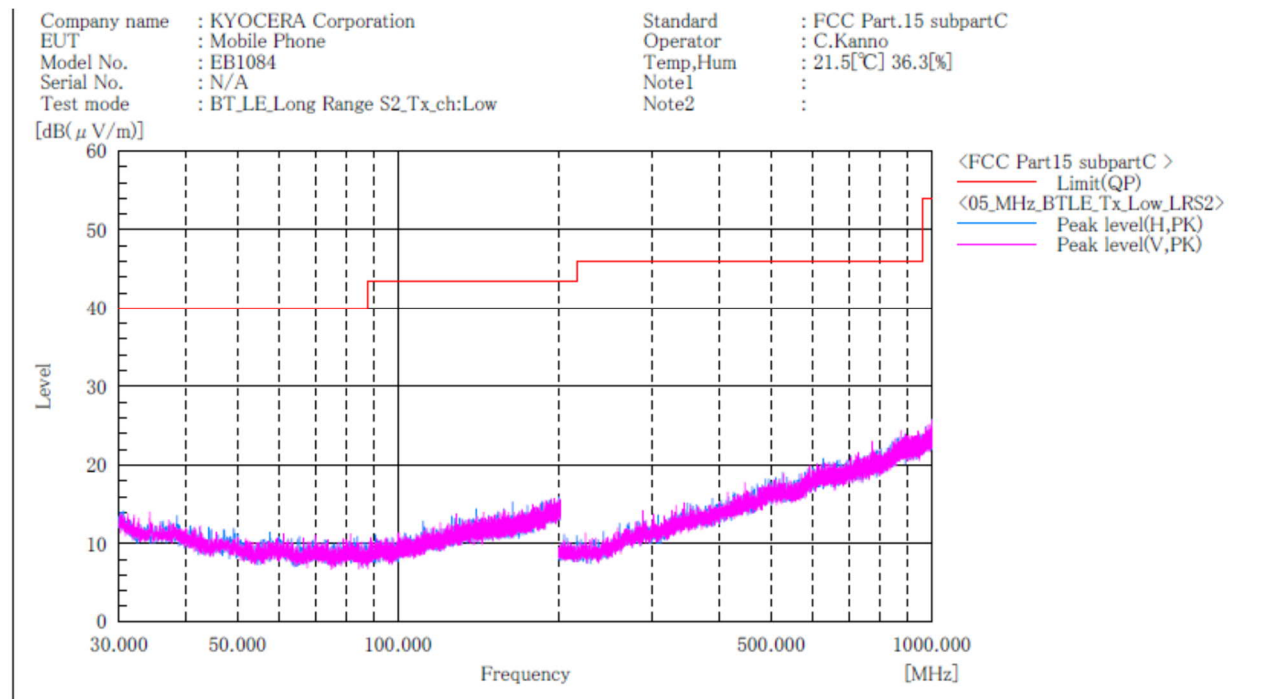[BT_LE (LongRange S2)]**Channel: Low****BELOW 1 GHz****Final Result**

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

[BT_LE (LongRange S2)]**Channel: Low****ABOVE 1 GHz**

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1084
 Serial No. : N/A
 Test mode : BT LE_Long Range S2_Tx_ch:Low

Standard : FCC Part.15 subpart C
 Operator : T.Seino
 Temp,Hum,Atm : 22.1[°C] 42.9[%]
 Note1 : Z axis
 Note2 :

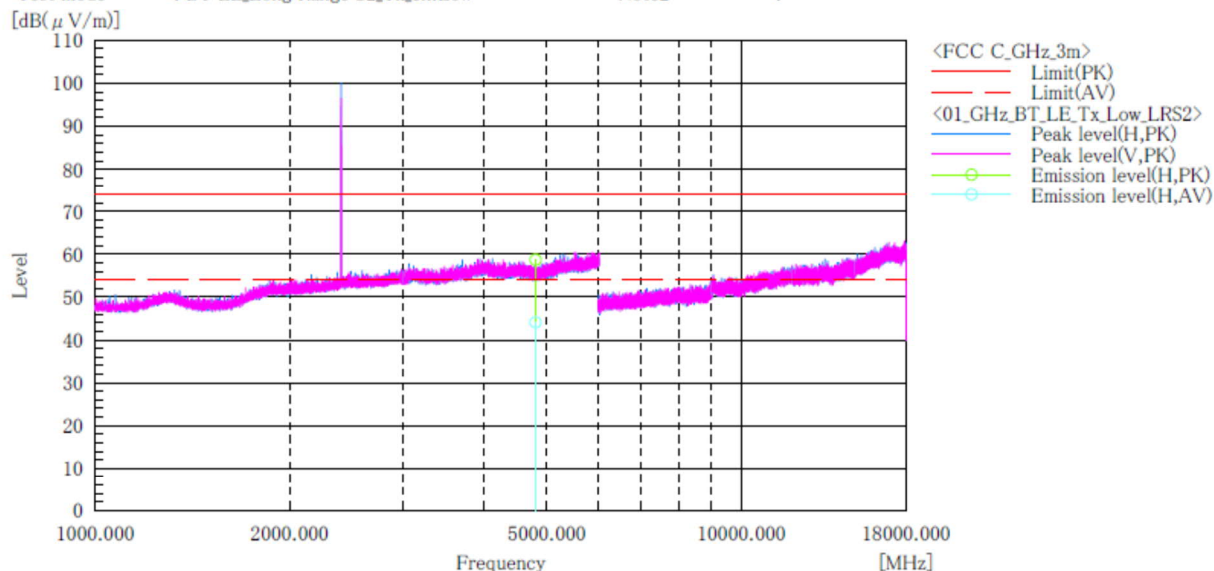

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4804.000	H	48.1	33.5	10.6	58.7	44.1	74.0	54.0	15.3	9.9	103.0	211.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (LongRange S2)]
Channel: Middle
BELOW 1 GHz

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1084
 Serial No. : N/A
 Test mode : BT_LE_Long Range S2_Tx_ch:Mid

Standard : FCC Part.15 subpartC
 Operator : C.Kanno
 Temp,Hum : 21.5[°C] 36.3[%]
 Note1 :
 Note2 :

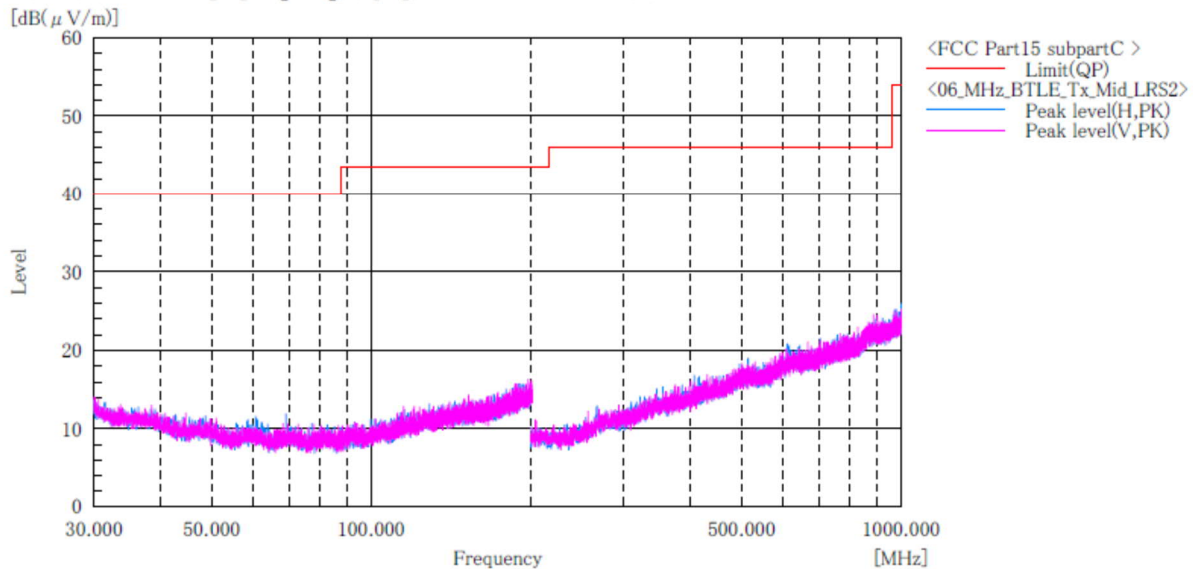

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

[BT_LE (LongRange S2)]
Channel: Middle
ABOVE 1 GHz

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1084
 Serial No. : N/A
 Test mode : BT LE_Long Range S2_Tx_ch:Mid

Standard : FCC Part.15 subpart C
 Operator : T.Seino
 Temp,Hum,Atm : 22.1[°C] 42.9[%]
 Note1 : Z axis
 Note2 :

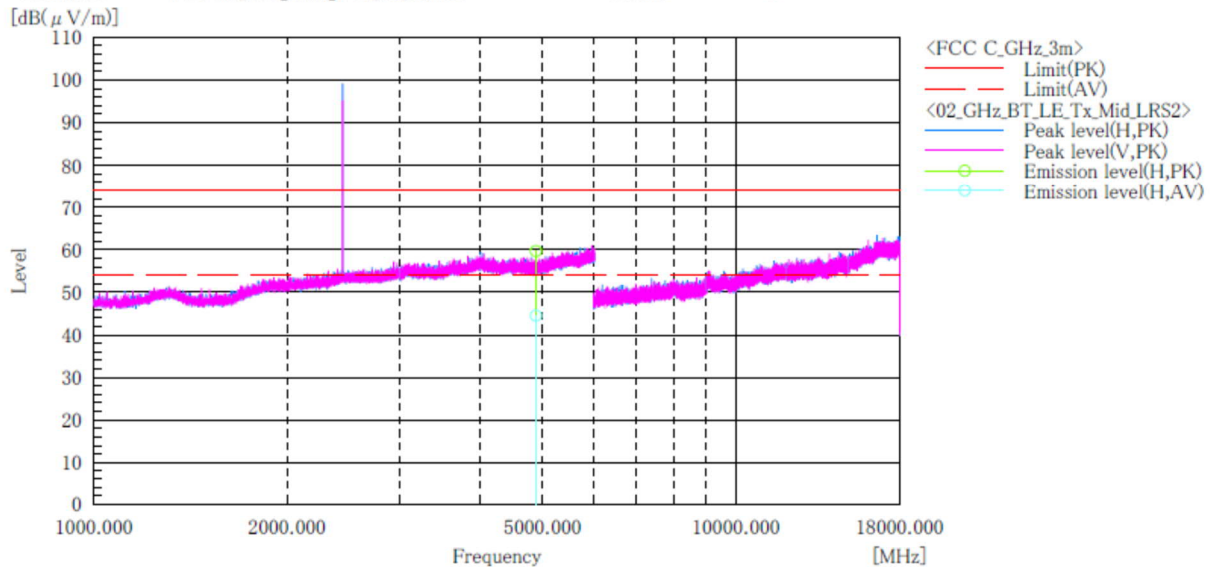


Final Result

No.	Frequency	(P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4880.000	H	49.0	33.8	10.7	59.7	44.5	74.0	54.0	14.3	9.5	149.0	195.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

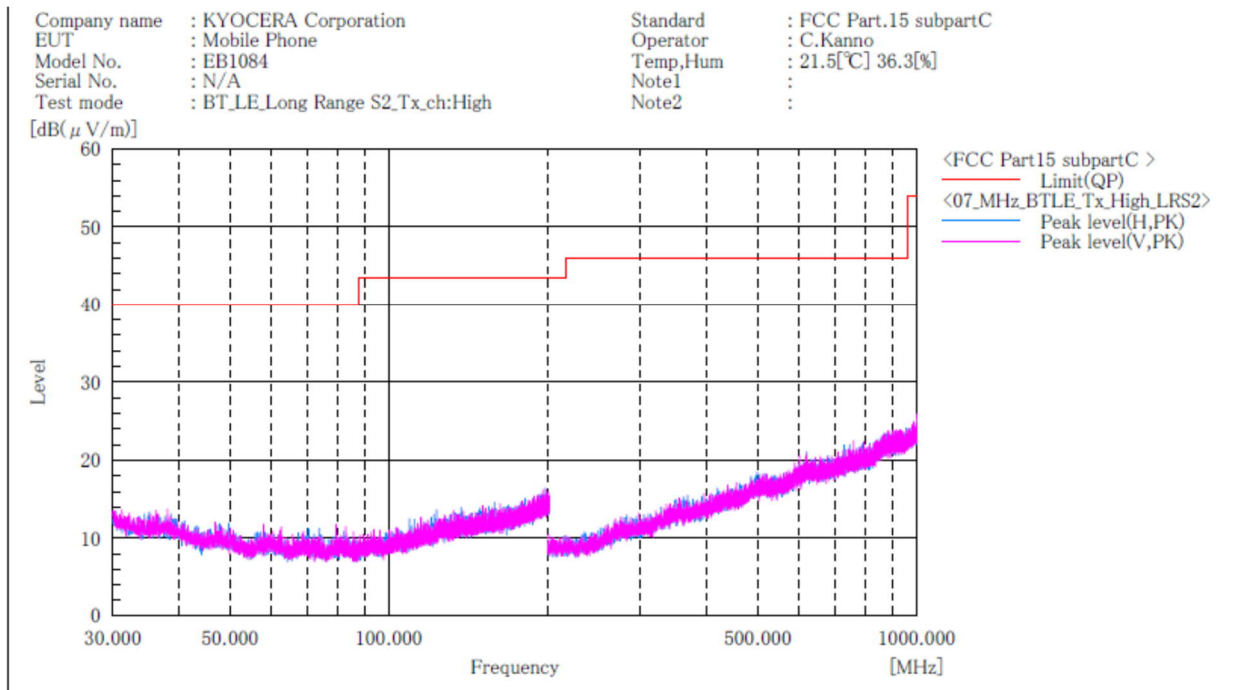[BT_LE (LongRange S2)]**Channel: High****BELOW 1 GHz****Final Result**

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

[BT_LE (LongRange S2)]**Channel: High****ABOVE 1 GHz**

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1084
 Serial No. : N/A
 Test mode : BT LE_Long Range S2_Tx_ch:High

Standard : FCC Part.15 subpart C
 Operator : T.Seino
 Temp,Hum,Atm : 22.1[°C] 42.9[%]
 Note1 : Z axis
 Note2 :

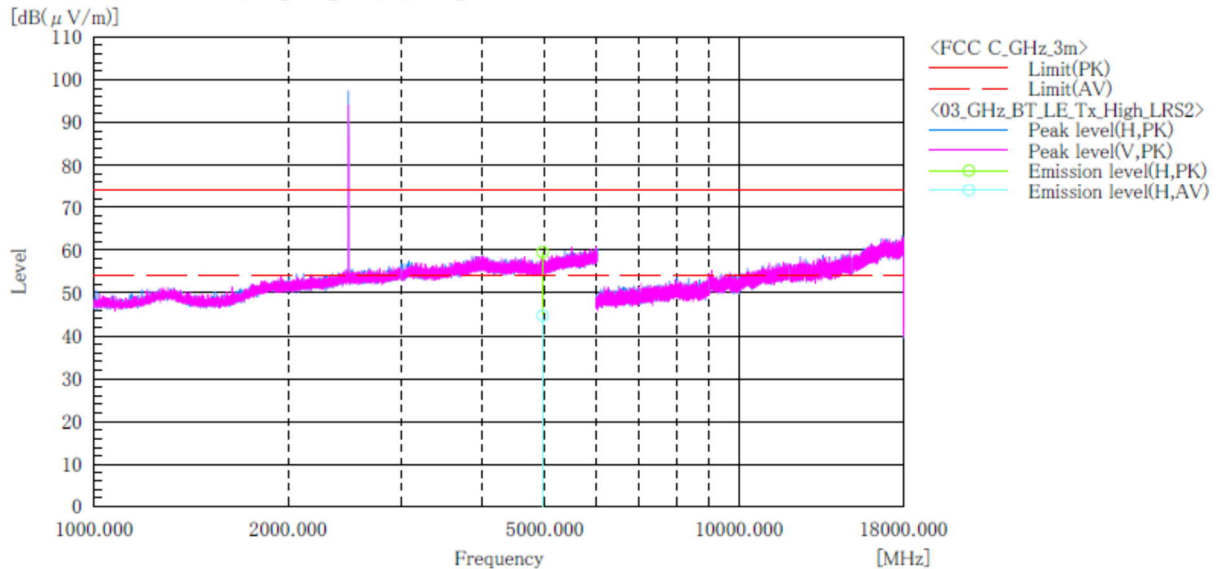


Final Result

No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4960.000	H	48.7	33.9	10.8	59.5	44.7	74.0	54.0	14.5	9.3	119.0	202.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

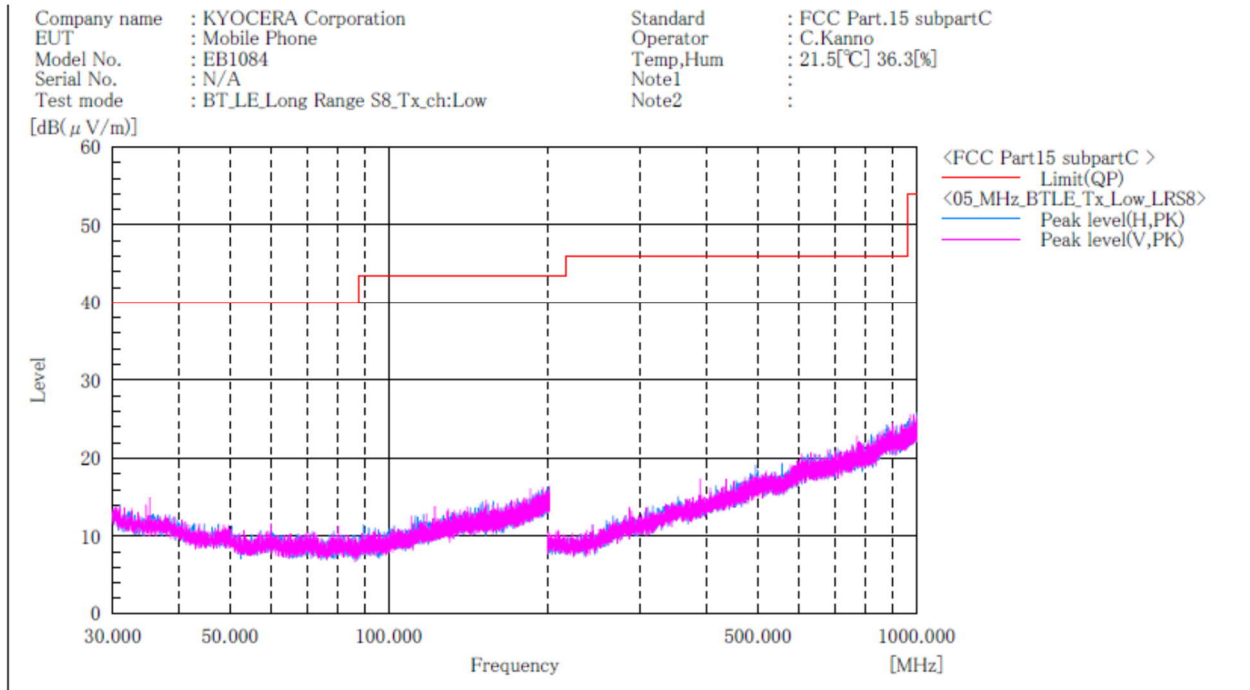
[BT_LE (LongRange S8)]**Channel: Low****BELOW 1 GHz****Final Result**

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

ABOVE 1 GHz



1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (LongRange S8)]
Channel: Middle
BELOW 1 GHz

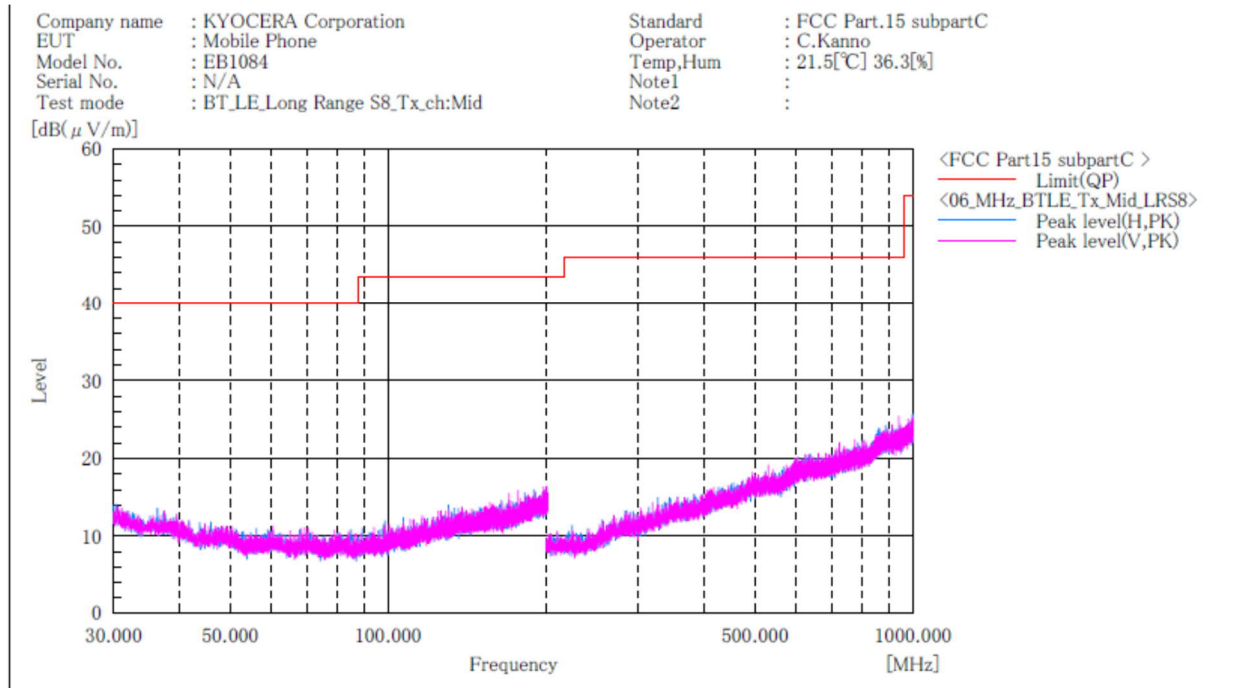


Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

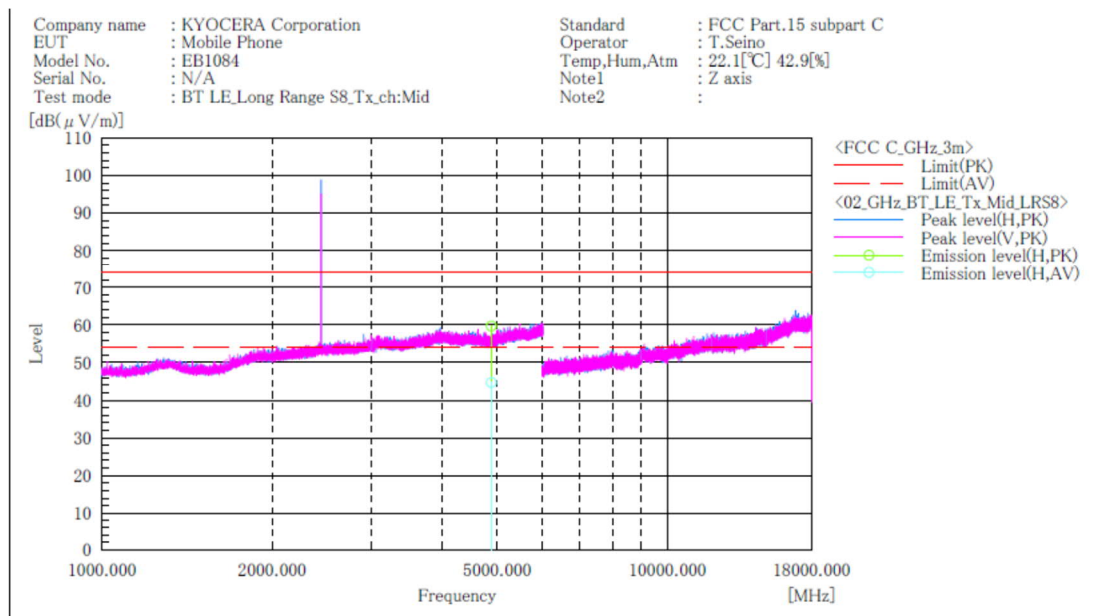[BT_LE (LongRange S8)]**Channel: Middle****ABOVE 1 GHz**

Final Result

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4880.000	H	49.0	34.0	10.7	59.7	44.7	74.0	54.0	14.3	9.3	147.0	202.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[BT_LE (LongRange S8)]**Channel: High****BELOW 1 GHz**

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1084
 Serial No. : N/A
 Test mode : BT_LE_Long Range S8_Tx_ch:High


Standard : FCC Part.15 subpartC
 Operator : C.Kanno
 Temp,Hum : 21.5[°C] 36.3[%]
 Note1 :
 Note2 :

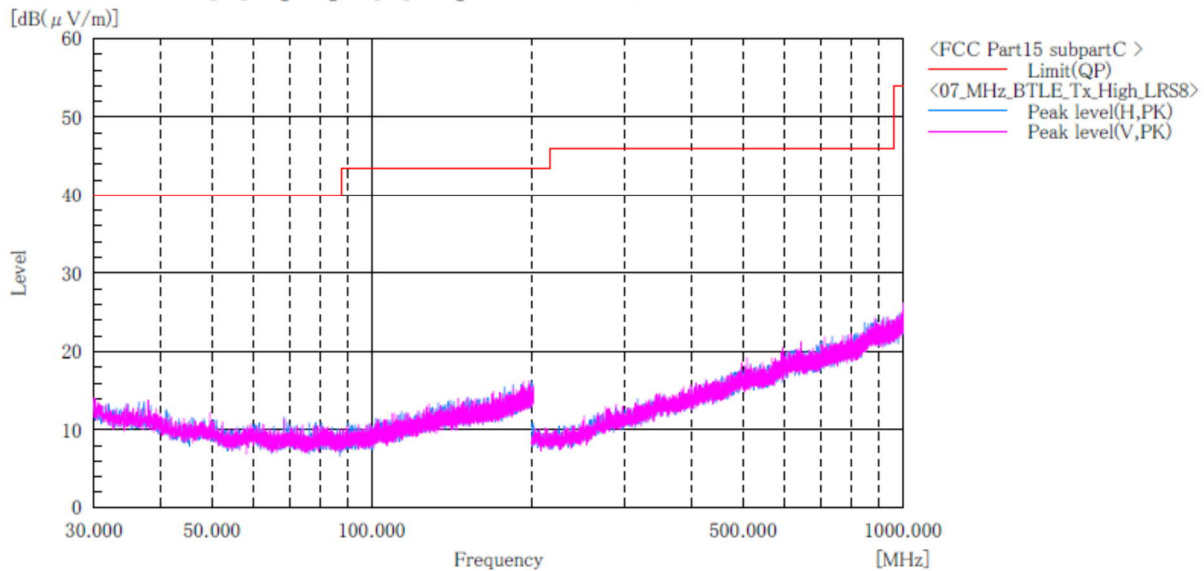**Final Result**

No.	Frequency (P) [MHz]	c.f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

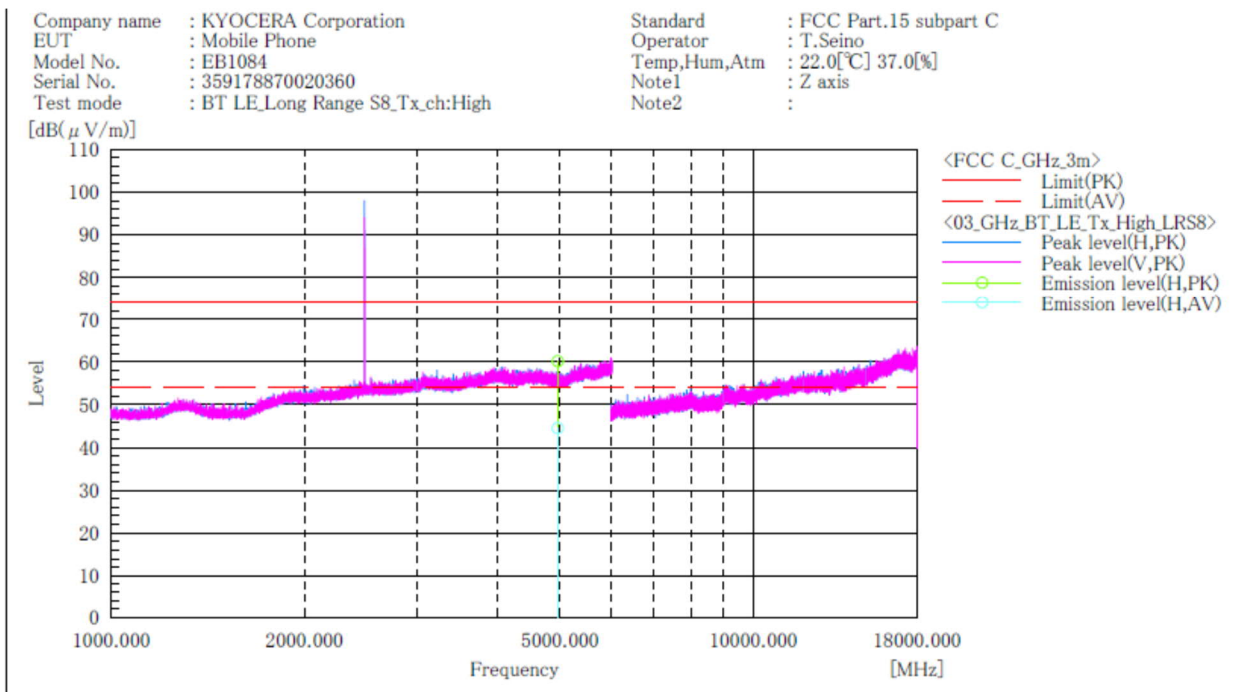[BT_LE (LongRange S8)]**Channel: High****ABOVE 1 GHz**

Final Result


No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Remark
	[MHz]		PK	AV	[dB(1/m)]	PK	AV	PK	AV	PK	AV	[cm]	[°]	
			[dB(μV)]	[dB(μV)]		[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]			
1	4960.000	H	49.4	33.7	10.8	60.2	44.5	74.0	54.0	13.8	9.5	100.0	196.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[Receive mode]

Channel: Low
BELOW 1 GHz

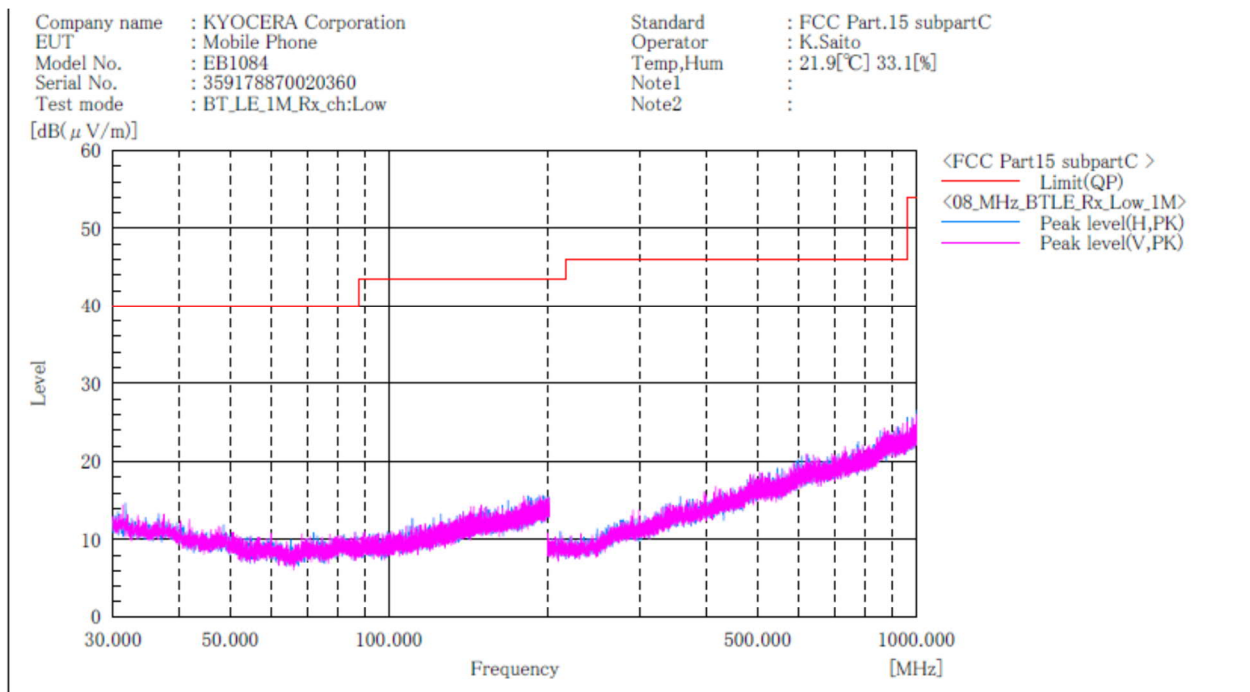
**Final Result**

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz and 1GHz to 25GHz at the 3 meters distance.

Channel: Middle
BELOW 1 GHz

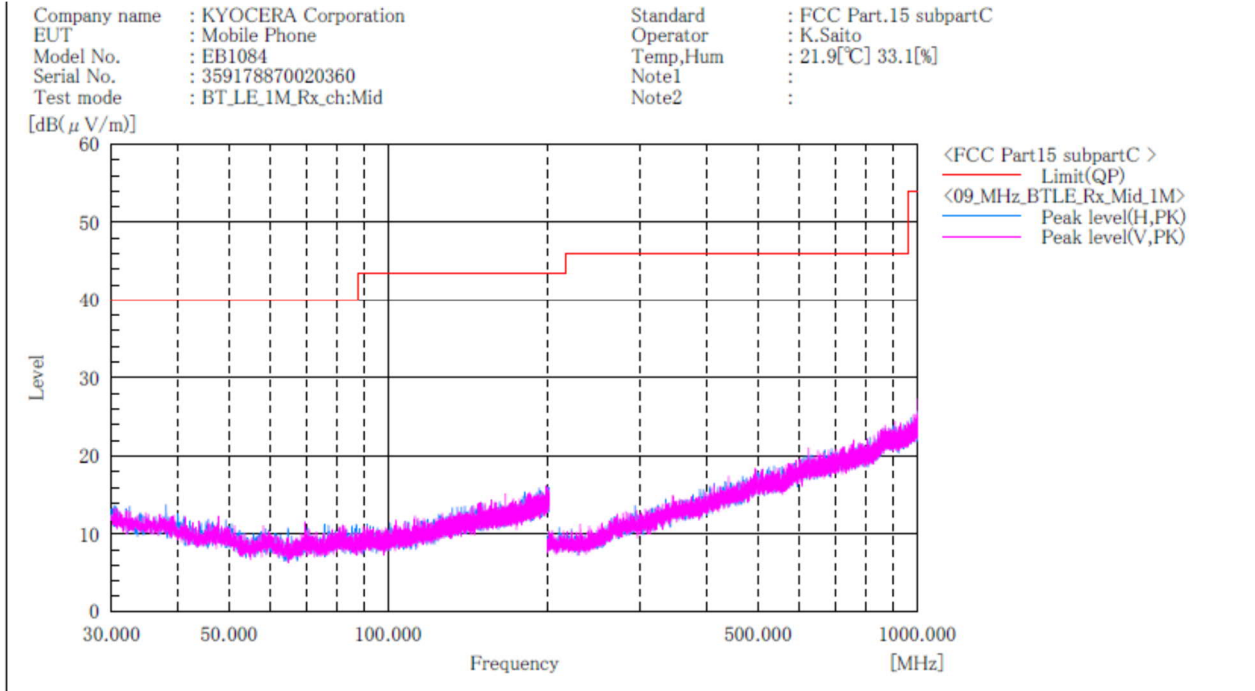


Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB (1/m)]	[cm]	[°]	

- Note:
1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
 2. No emission were detected in frequency range 9kHz to 30MHz and 1GHz to 25GHz at the 3 meters distance.

Channel: High
BELOW 1 GHz

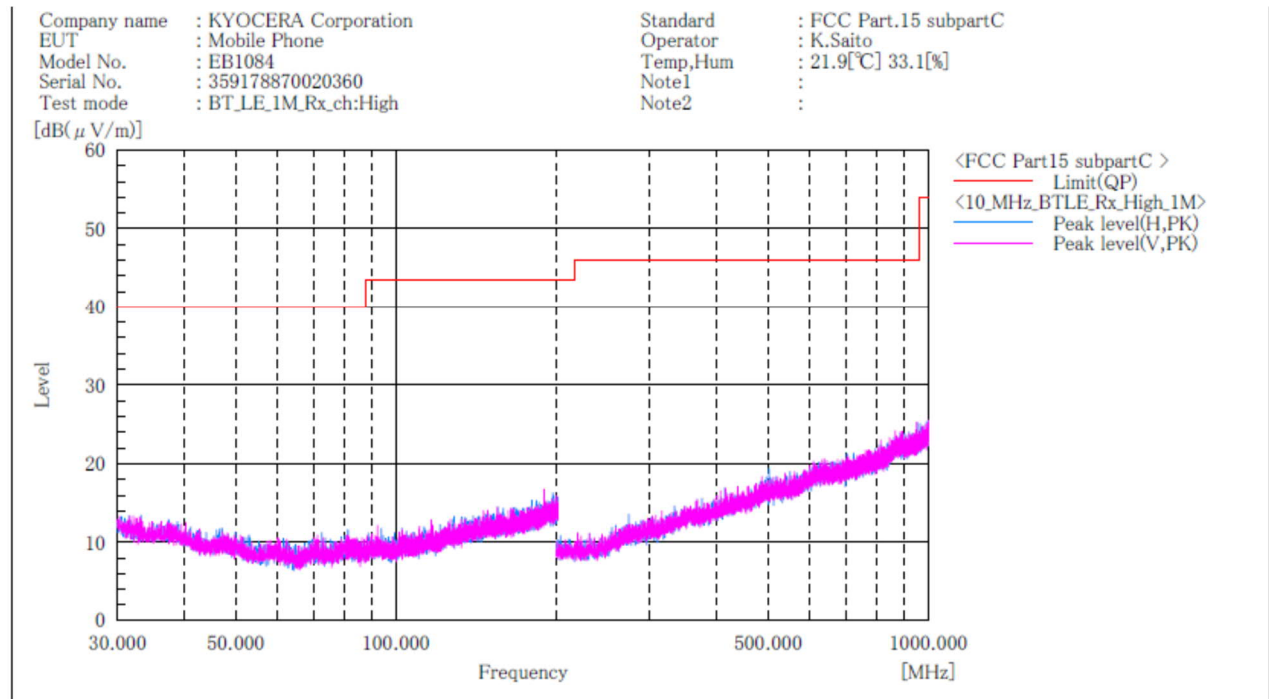

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

- Note:
1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
 2. No emission were detected in frequency range 9kHz to 30MHz and 1GHz to 25GHz at the 3 meters distance.

4.2 Restricted Band of Operation

4.2.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB558074 D01 v05r02]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	:	3m
Spectrum analyzer setting		
- Peak	:	RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
- Average	:	RBW=1MHz, VBW=3kHz (1Mbps), 10kHz (2Mbps), 1kHz (LongRange S2, S8), Span=0Hz, Sweep=auto

Display mode=Linear


Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
Bluetooth 5.1 LE (1Mbps)	62.46	391	235	2.558	3kHz
Bluetooth 5.1 LE (2Mbps)	32.96	206	419	4.854	10kHz
Bluetooth 5.1 LE (LongRange S2)	57.12	1071	804	0.934	1kHz
Bluetooth5.1 LE (LongRange S8)	82.72	3102	648	0.322	1kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

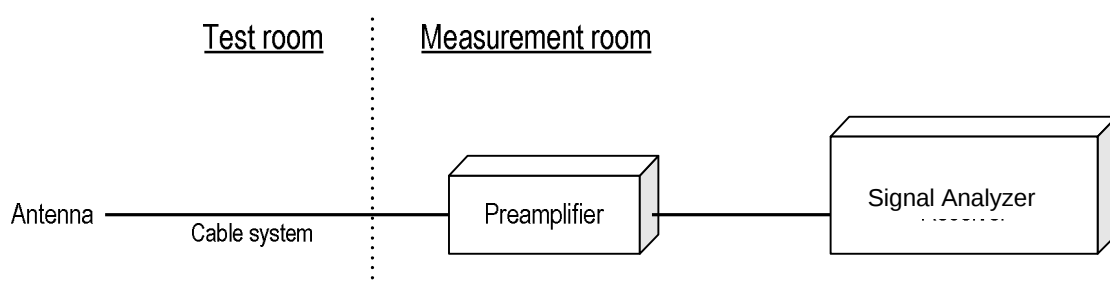

4.2.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

4.2.3 Measurement result

Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

4.2.4 Test data

Date : 10-November-2021

Temperature : 23.1 [°C]

Humidity : 39.9 [%]

Test place : 3m Semi-anechoic chamber

Test engineer :


Tadahiro Seino

[BT_LE (1Mbps)]


Channel: Low

Horizontal

Peak

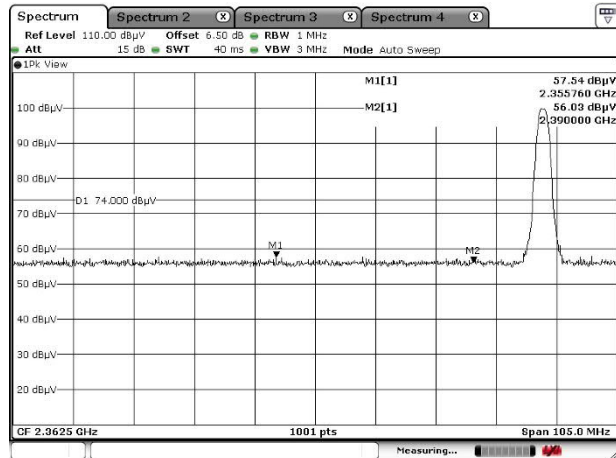


Average

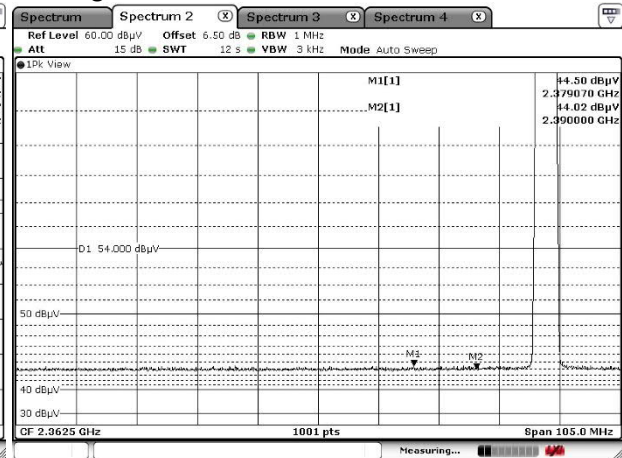


Vertical


Peak

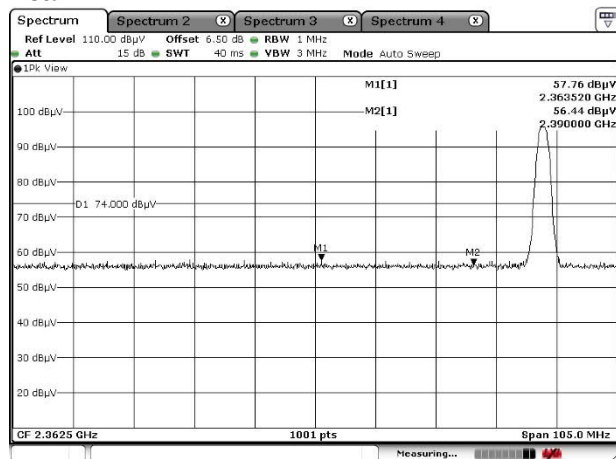


Average

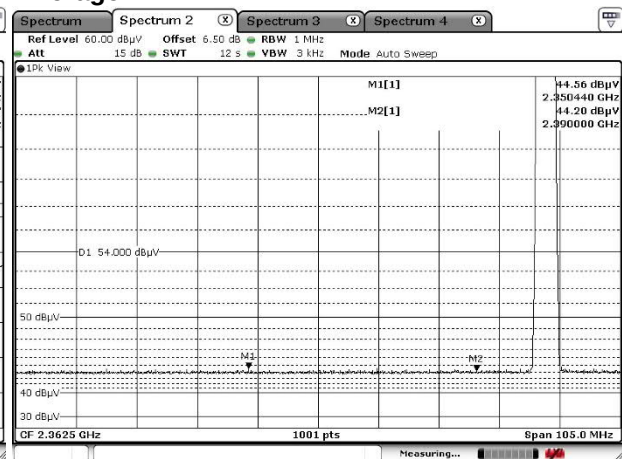


Channel: High Horizontal Peak

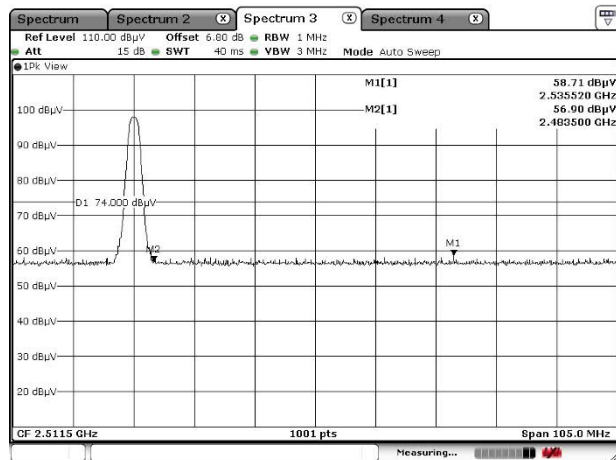


Average

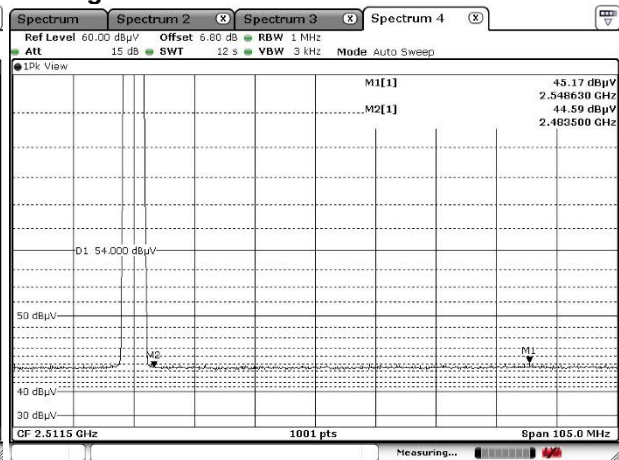

Vertical Peak

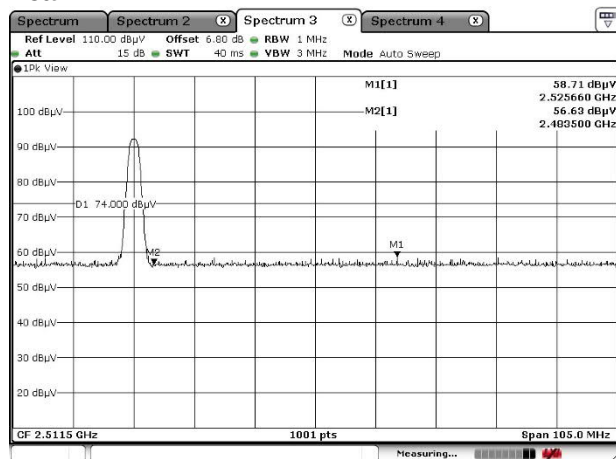

Average

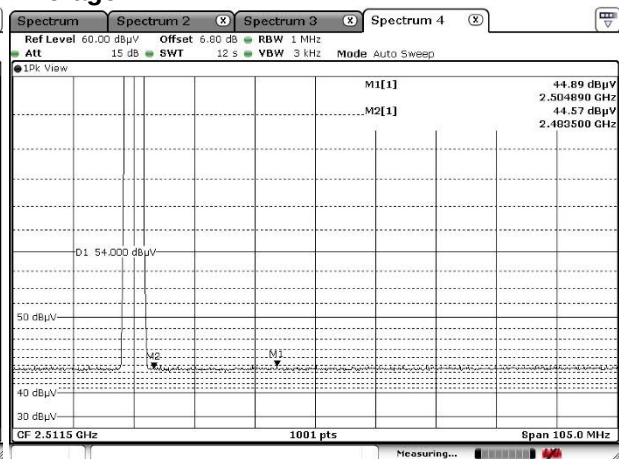


[BT_LE (2Mbps)]


Channel: Low

Horizontal

Peak

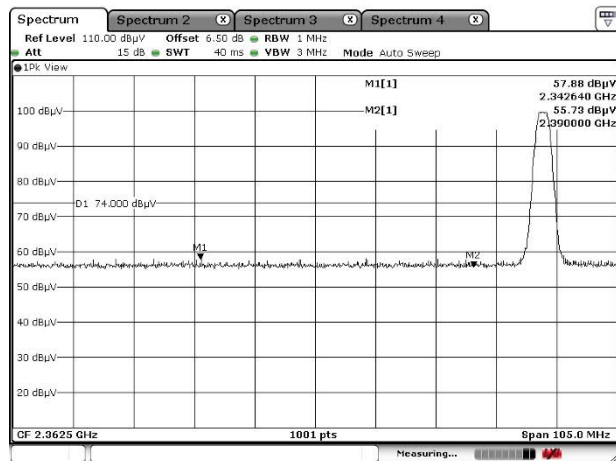


Average

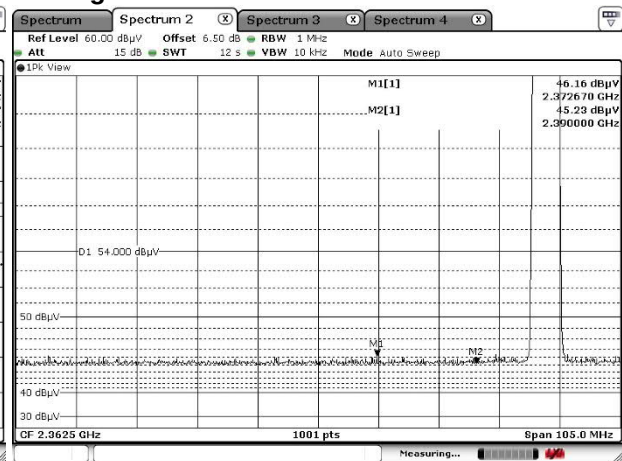


Vertical


Peak

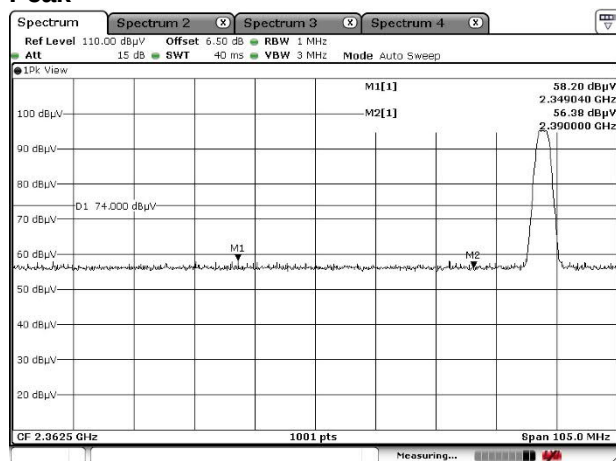


Average

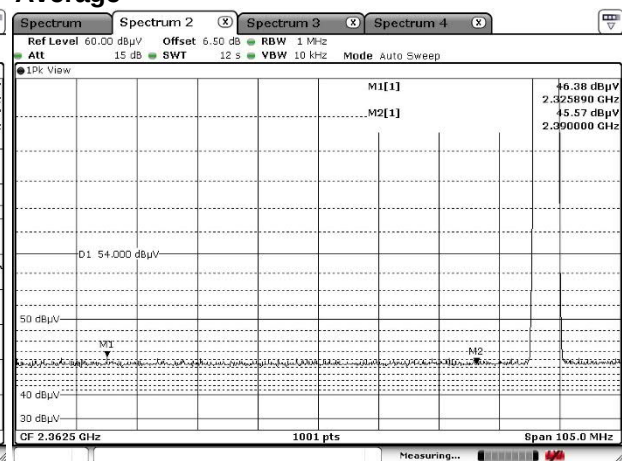


Channel: High Horizontal Peak

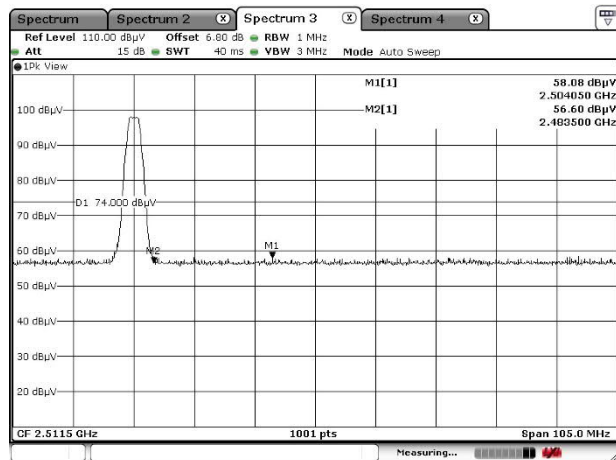


Average




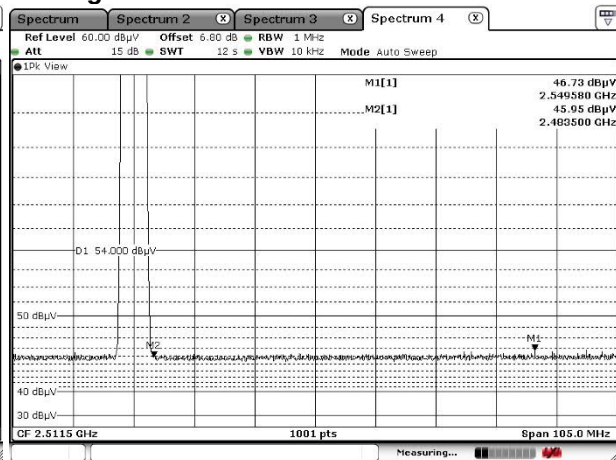


Vertical Peak

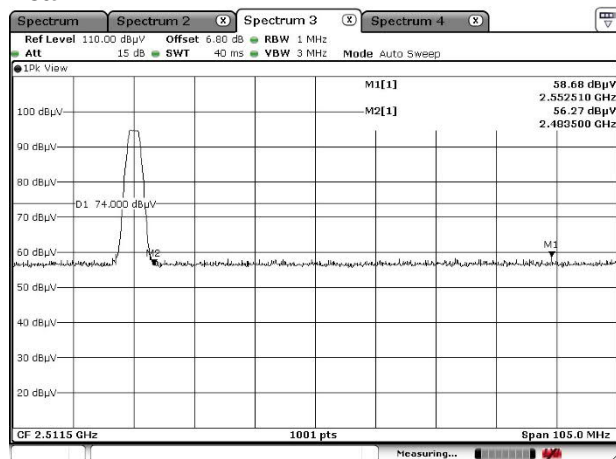


Average

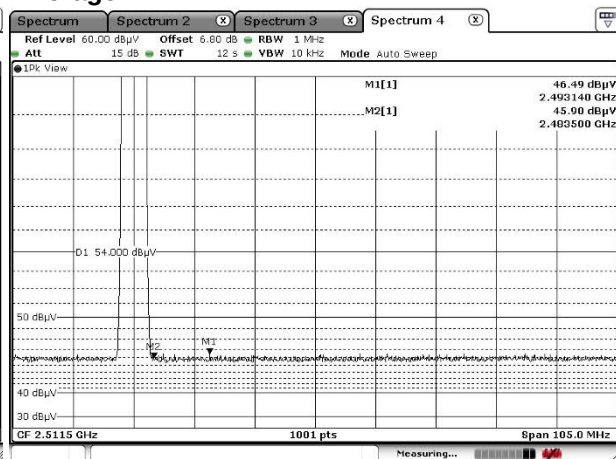


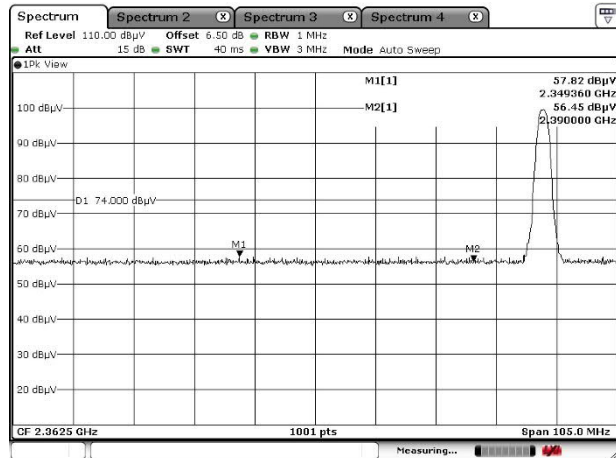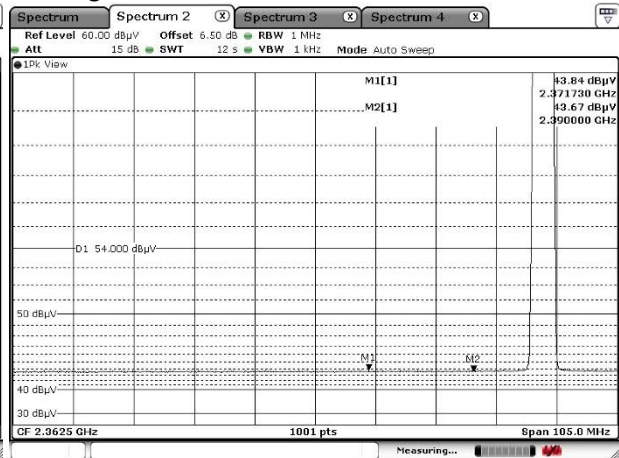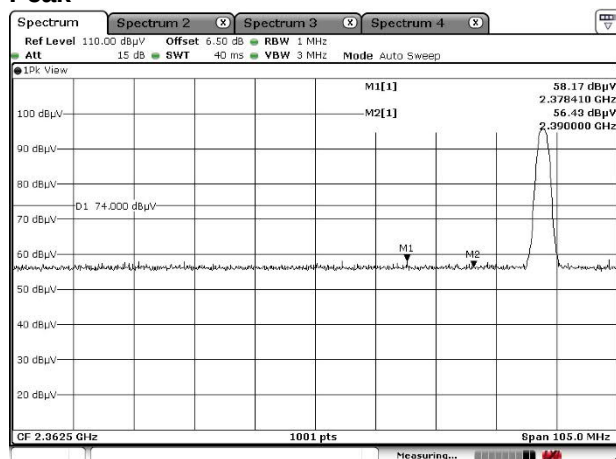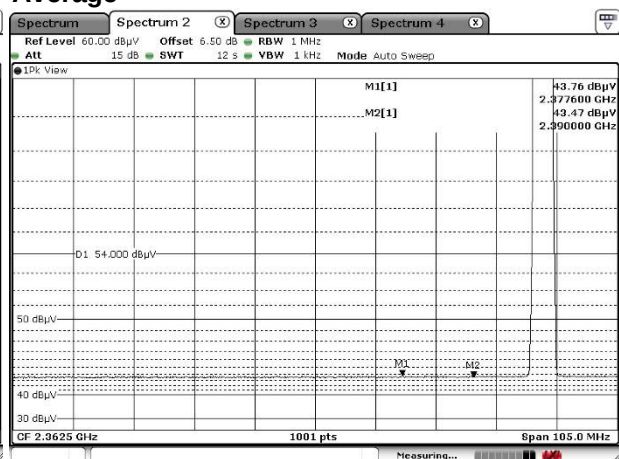[BT_LE (LongRange S2)]**Channel: Low****Horizontal****Peak****Average****Vertical****Peak****Average**


Channel: High Horizontal Peak

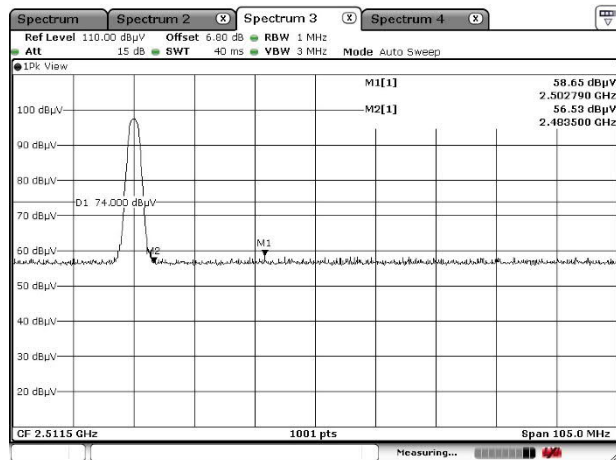


Average




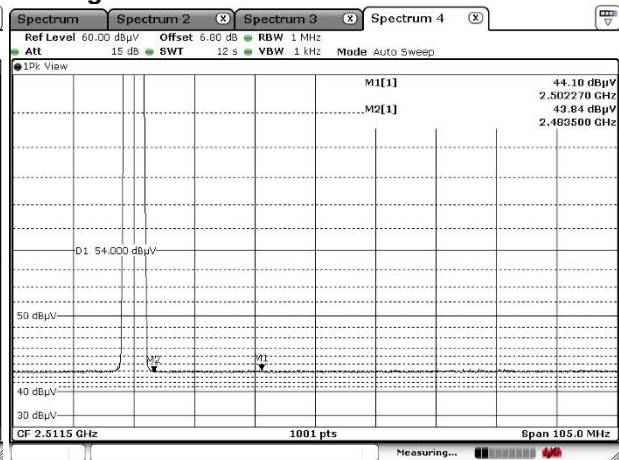


Vertical Peak

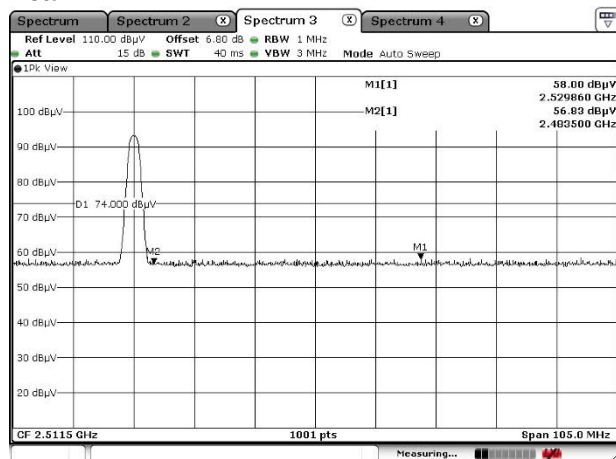


Average

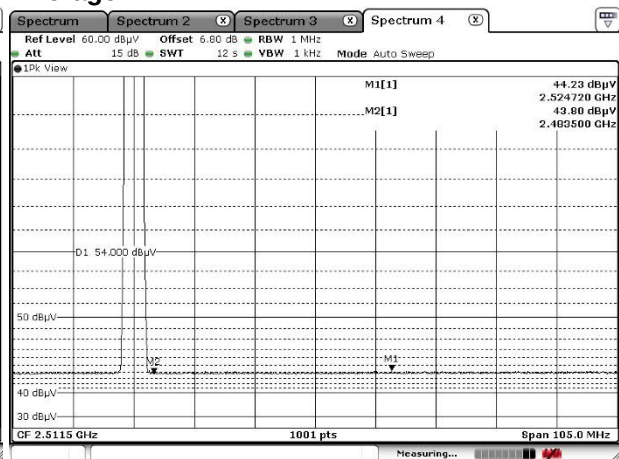


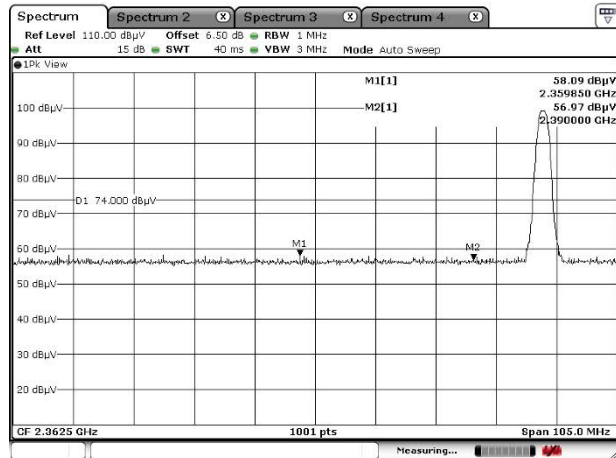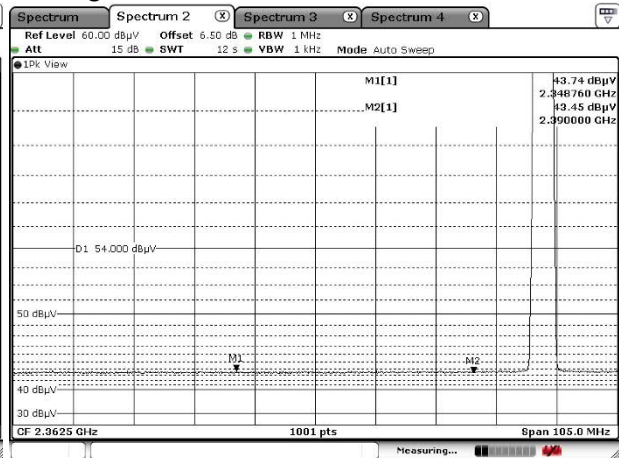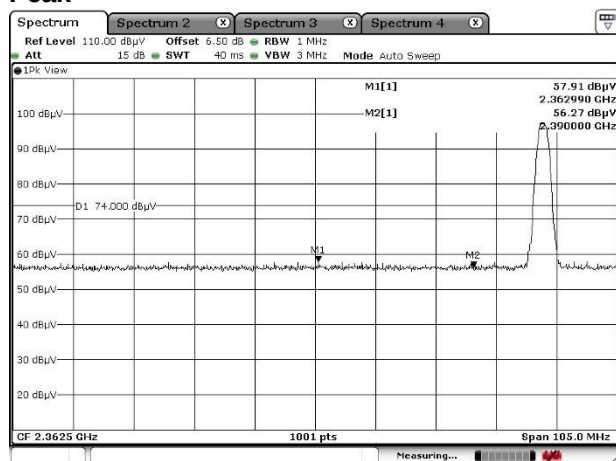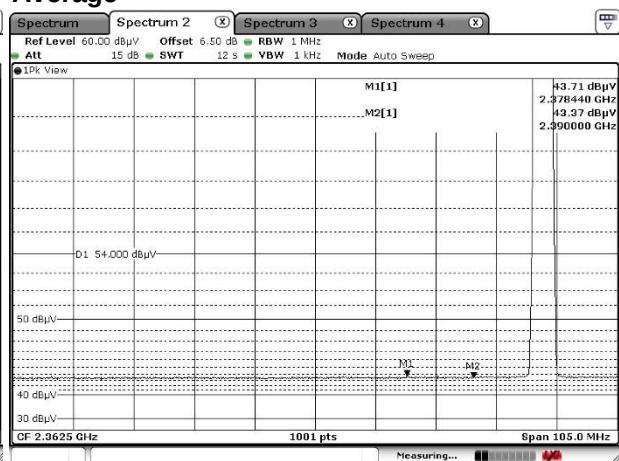[BT_LE (LongRange S8)]**Channel: Low****Horizontal****Peak****Average****Vertical****Peak****Average**


Channel: High Horizontal Peak

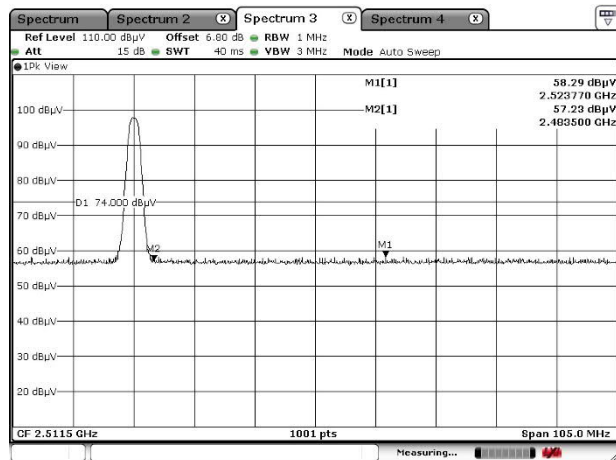


Average

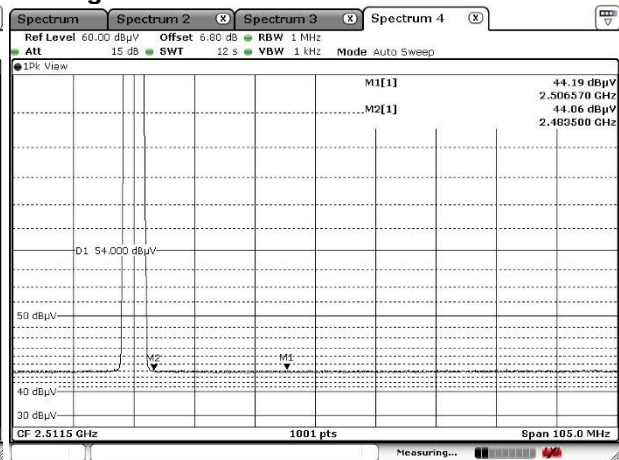

Vertical Peak

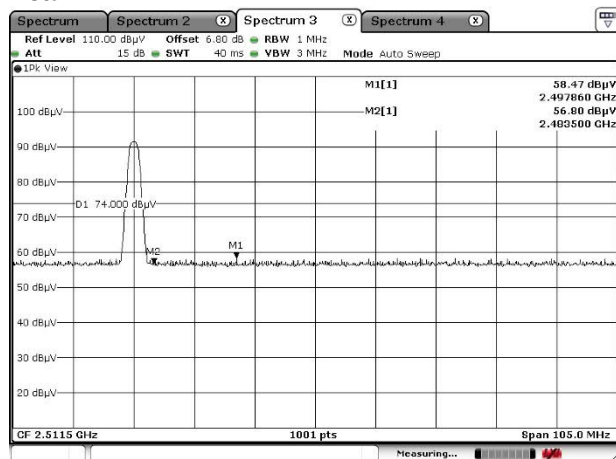

Average

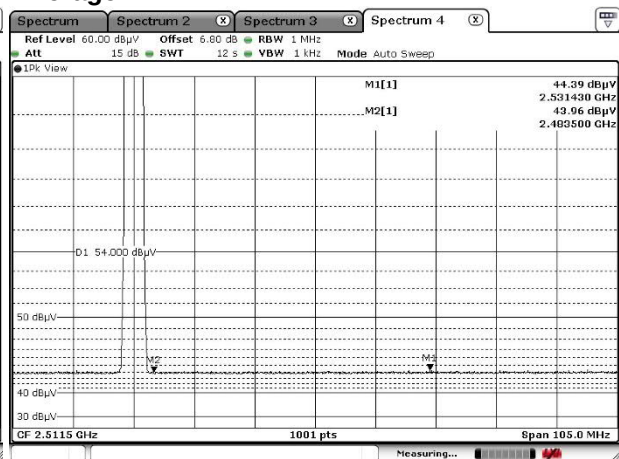

4.3 AC Power Line Conducted Emissions

4.3.1 Measurement procedure

[FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 0.15 MHz to 30 MHz
Test place	: 3 m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0 m × (D)1.0 m × (H)0.8 m
Vertical Metal Reference Plane	: (W)2.0 m × (H)2.0 m 0.4 m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9 kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

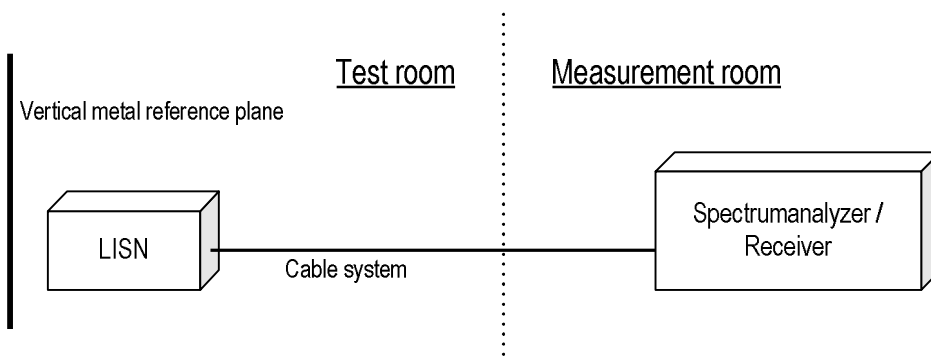

4.3.2 Calculation method

Emission level = Reading + (LISN. Factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 6.770 MHz: 60.0 dBμV(Quasi-peak)

: 50.0 dBμV(Average)

(Quasi peak) Reading = 41.2 dBμV c.f = 10.3 dB

Emission level = 41.2 + 10.3 = 51.5 dBμV

Margin = 60.0 – 51.5 = 8.5 dB

(Average) Reading = 35.0 dBμV c.f = 10.3 dB

Emission level = 35.0 + 10.3 = 45.3 dBμV

Margin = 50.0 – 45.3 = 4.7 dB

4.3.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

4.3.4 Test data

Date : 9-November-2021


Temperature : 21.4 [°C]

Humidity : 45.3 [%]

Test place : 3m Semi-anechoic chamber

Test engineer :

Chiaki Kanno

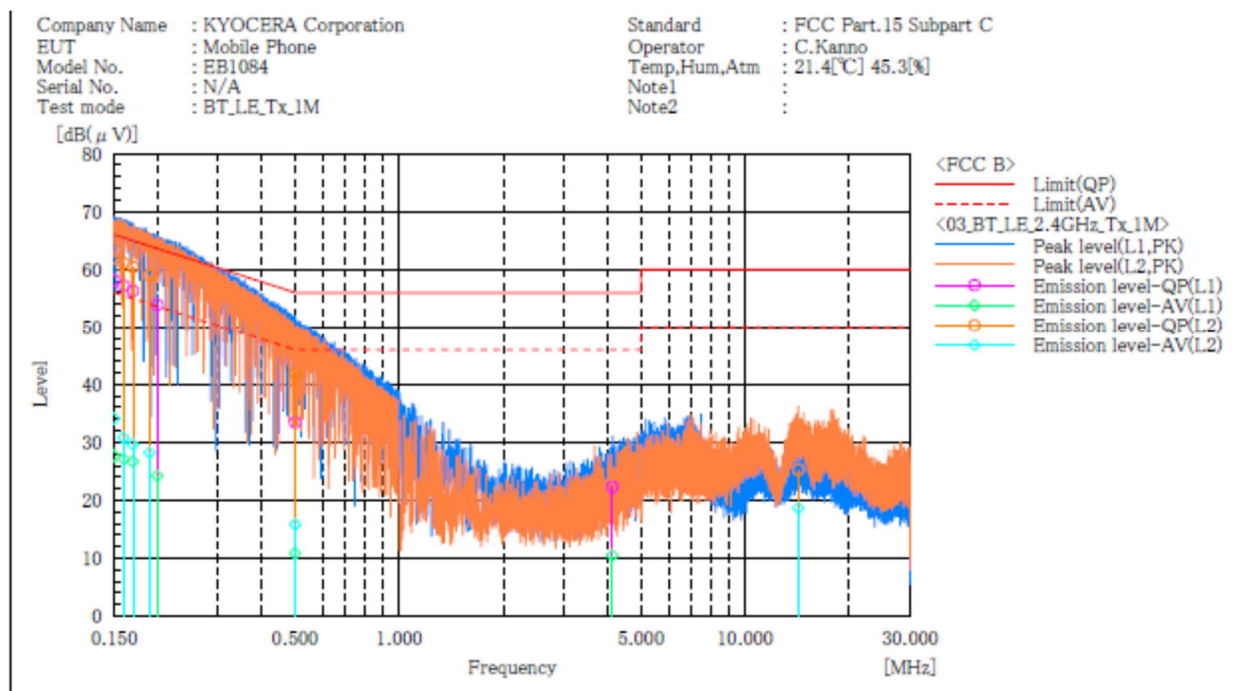[BT_LE (1Mbps)]**Final Result**

— L1 Phase —										
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.150	47.6	17.2	10.5	58.1	27.7	66.0	56.0	7.9	28.3
2	0.160	46.7	16.6	10.5	57.2	27.1	65.5	55.5	8.3	28.4
3	0.170	45.9	16.3	10.4	56.3	26.7	65.0	55.0	8.7	28.3
4	0.200	43.5	13.8	10.4	53.9	24.2	63.6	53.6	9.7	29.4
5	0.500	23.1	0.6	10.3	33.4	10.9	56.0	46.0	22.6	35.1
6	4.131	11.8	0.0	10.5	22.3	10.5	56.0	46.0	33.7	35.5

— L2 Phase —										
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.150	51.6	23.7	10.4	62.0	34.1	66.0	56.0	4.0	21.9
2	0.160	50.7	20.4	10.4	61.1	30.8	65.5	55.5	4.4	24.7
3	0.170	50.0	19.2	10.4	60.4	29.6	65.0	55.0	4.6	25.4
4	0.190	48.6	17.8	10.4	59.0	28.2	64.0	54.0	5.0	25.8
5	0.500	31.6	5.5	10.3	41.9	15.8	56.0	46.0	14.1	30.2
6	14.237	14.5	7.9	10.8	25.3	18.7	60.0	50.0	34.7	31.3



Japan





5 Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

6 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.7 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9kHz – 30 MHz)	± 3.2 dB
Radiated emission (30 MHz – 1000 MHz)	± 5.3 dB
Radiated emission (1 GHz – 6 GHz)	± 4.8 dB
Radiated emission (6 GHz – 18 GHz)	± 4.5 dB
Radiated emission (18 GHz – 40 GHz)	± 6.4 dB
Radio Frequency	$\pm 1.4 \times 10^{-8}$
RF power, conducted	± 0.8 dB
Adjacent channel power	± 2.4 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Standard limit value +Uncertainty -Uncertainty Measured value Case1  Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case2  Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	
FAIL	Standard limit value +Uncertainty -Uncertainty Measured value Case3  Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case4  Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	



Japan

7 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

Appendix A. Test Equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2022	15-Sep-2021
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	31-Mar-2022	11-Mar-2021
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Dec-2021	11-Dec-2020
Spectrum analyzer	ROHDE&SCHWARZ	FSV40	101731	30-Jun-2022	08-Jun-2021
Preamplifier	SONOMA	310	372170	30-Sep-2022	15-Sep-2021
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	30-Apr-2022	27-Apr-2021
Attenuator	TOYO Connector	NA-PJ-6	N/A(S507)	28-Feb-2022	03-Feb-2021
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1333	31-Dec-2021	15-Dec-2020
Log periodic antenna	Schwarzbeck	VUSLP9111B	345	31-Oct-2021	19-Oct-2020
Log periodic antenna	Schwarzbeck	VUSLP9111B	346	31-Oct-2022	19-Oct-2021
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2022	16-Sep-2021
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2022	20-Jul-2021
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2021	15-Dec-2020
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2021	14-Dec-2020
Double ridged guide antenna	ETS LINDGREN	3117	00224193	31-Mar-2022	30-Mar-2021
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2021	15-Dec-2020
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2022	02-Aug-2021
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2022	02-Aug-2021
Band rejection filter	Micro-Tronics	BRC50702	G433	30-Sep-2021	15-Sep-2021
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/1m	my24610/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/8m	SN MY30033/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/1m	MY32976/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/2m	SN MY28404/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/7m	41625/6	31-Dec-2021	15-Dec-2020
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
Absorber	RIKEN	PPF30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2022	20-May-2021
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2022	20-May-2021

Conducted emission at mains port


Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2022	15-Sep-2021
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	31-Dec-2021	15-Dec-2020
Line impedance stabilization network	Kyoritsu Electrical Works, Ltd.	TNW-407F2	12-17-110-2	30-Jun-2022	17-Jun-2021
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	31-Dec-2021	15-Dec-2020
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	31-Dec-2021	15-Dec-2020
Coaxial cable	HUBER+SUHNER	RG214/U/10m	N/A (S194)	31-Dec-2021	15-Dec-2020
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

Appendix B. Duty Cycle


[Plot & Calculation]

BT_LE (1Mbps)

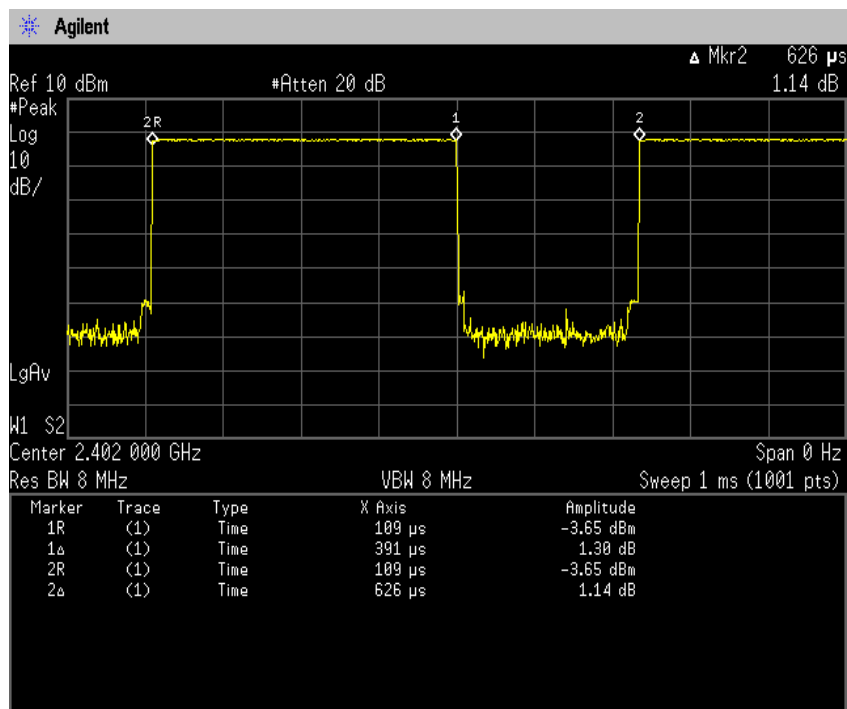


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 391[\mu\text{s}] / (391[\mu\text{s}] + 235[\mu\text{s}]) = 62.46\%$$

BT_LE (2Mbps)

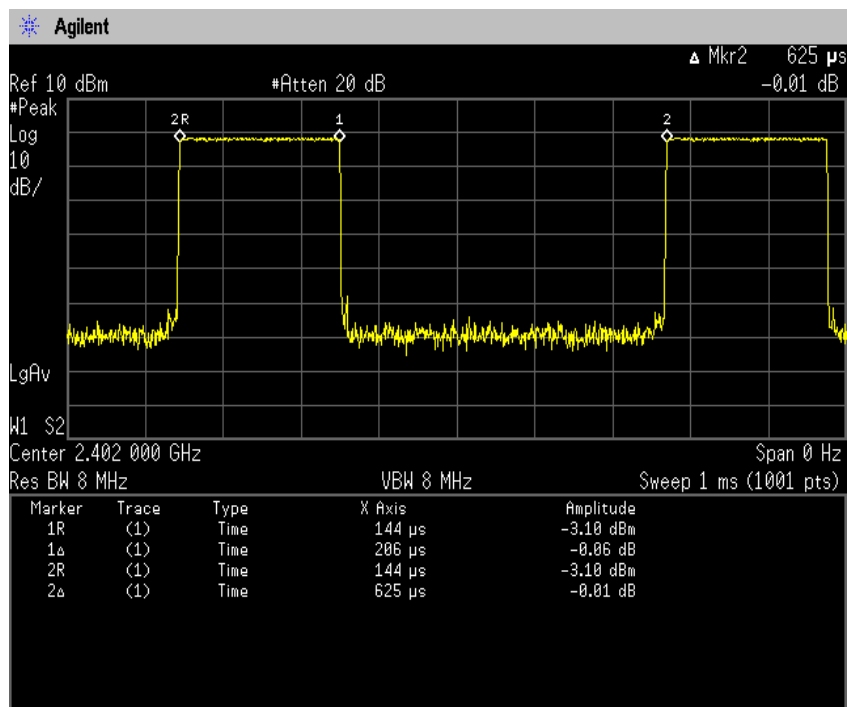


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 206[\mu\text{s}] / (206[\mu\text{s}] + 419[\mu\text{s}]) = 32.96\%$$

BT_LE (LongRage S2)

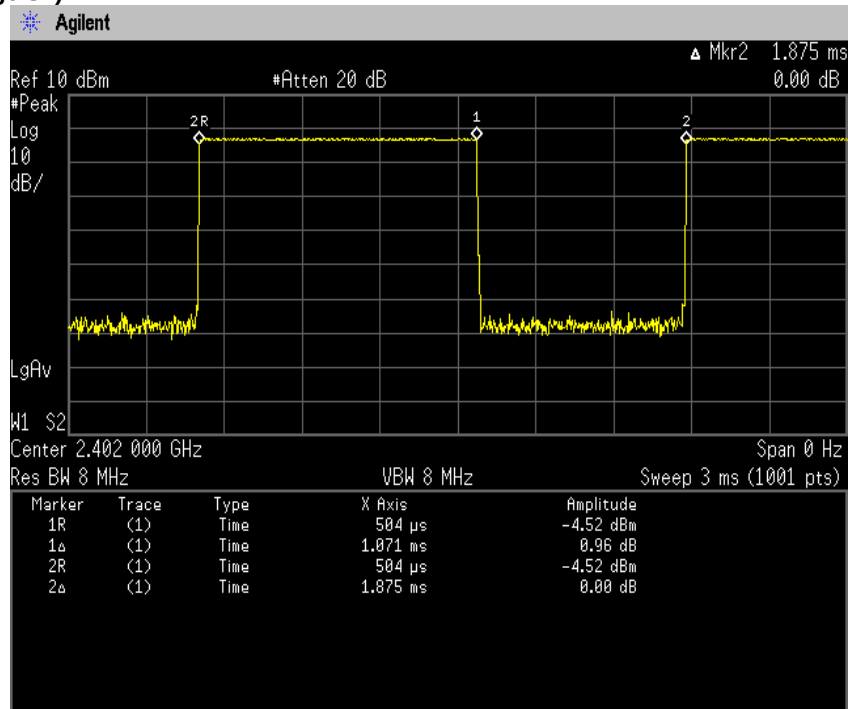

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1071[\mu\text{s}] / (1071[\mu\text{s}] + 804[\mu\text{s}]) = 57.12[\%]$$

BT_LE (LongRage S8)

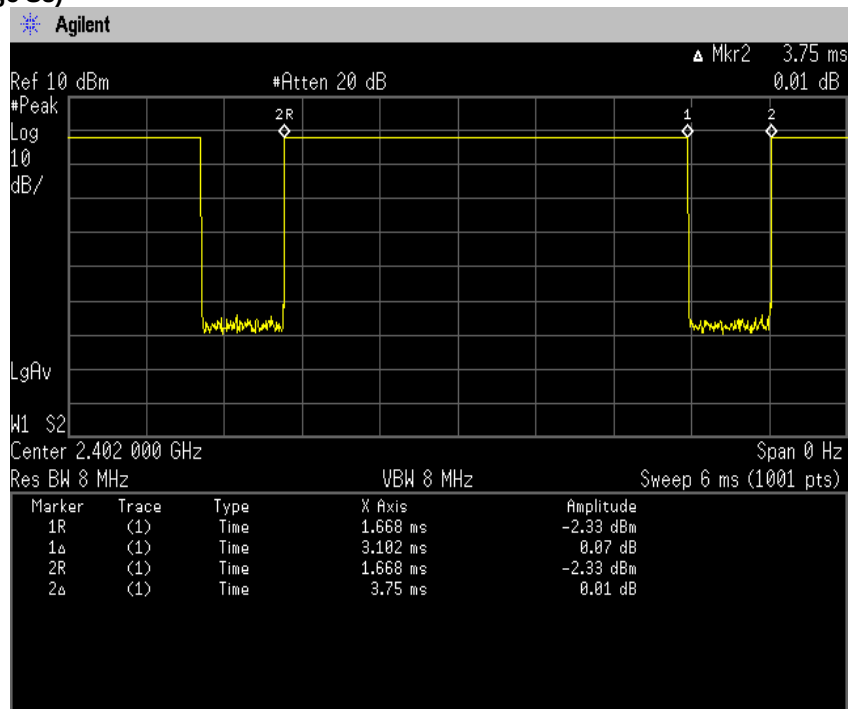

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 3102[\mu\text{s}] / (3102[\mu\text{s}] + 648[\mu\text{s}]) = 82.72[\%]$$