

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1049

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 42.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(10.05, 10.05, 10.05); Calibrated: 2021-06-23; Electronics: DAE4 Sn1453

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-08-24; Ambient Temp: 21.3; Tissue Temp: 21.2

750 MHz System Verification (250 mW)


Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.39 W/kg

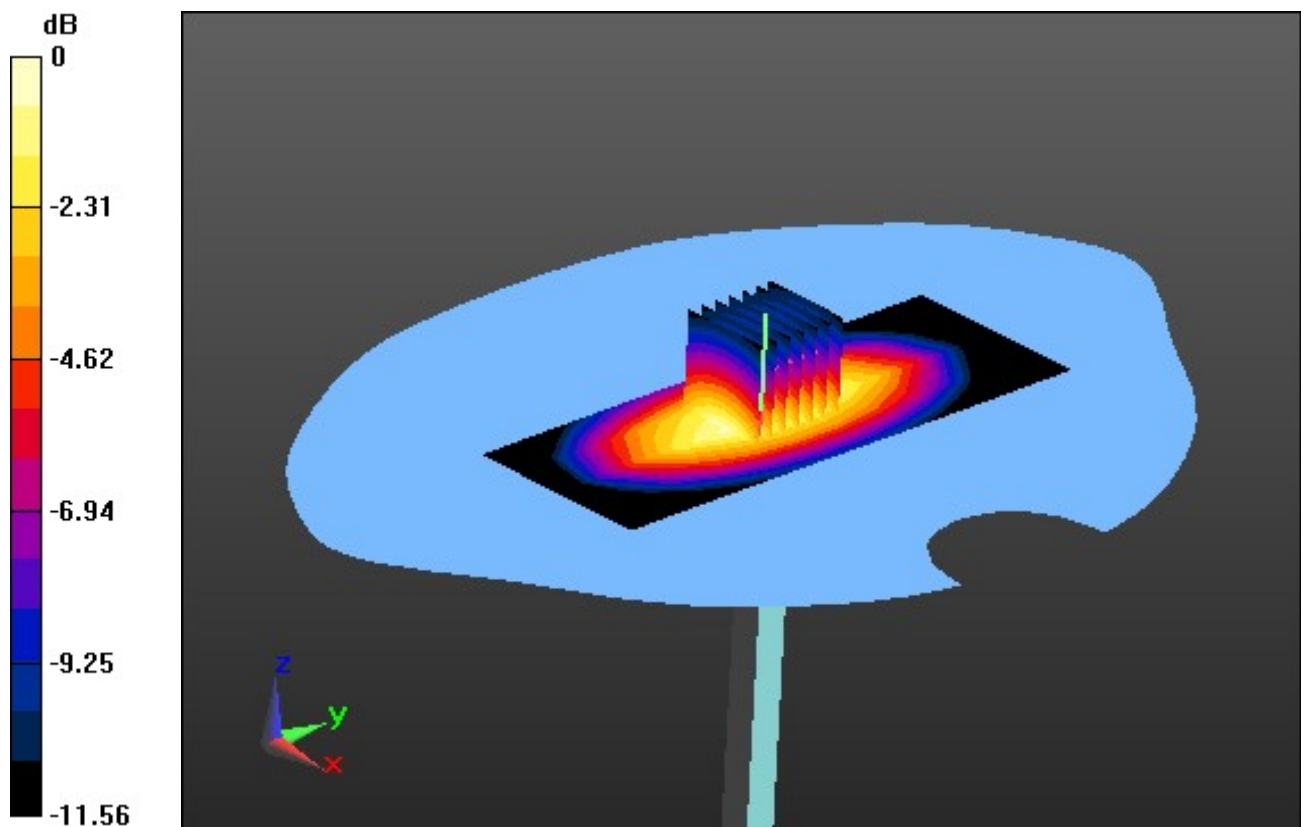

DT&C Co., Ltd.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 40.879$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

835 MHz System Verification (250 mW)


Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.76 W/kg

SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.69 W/kg

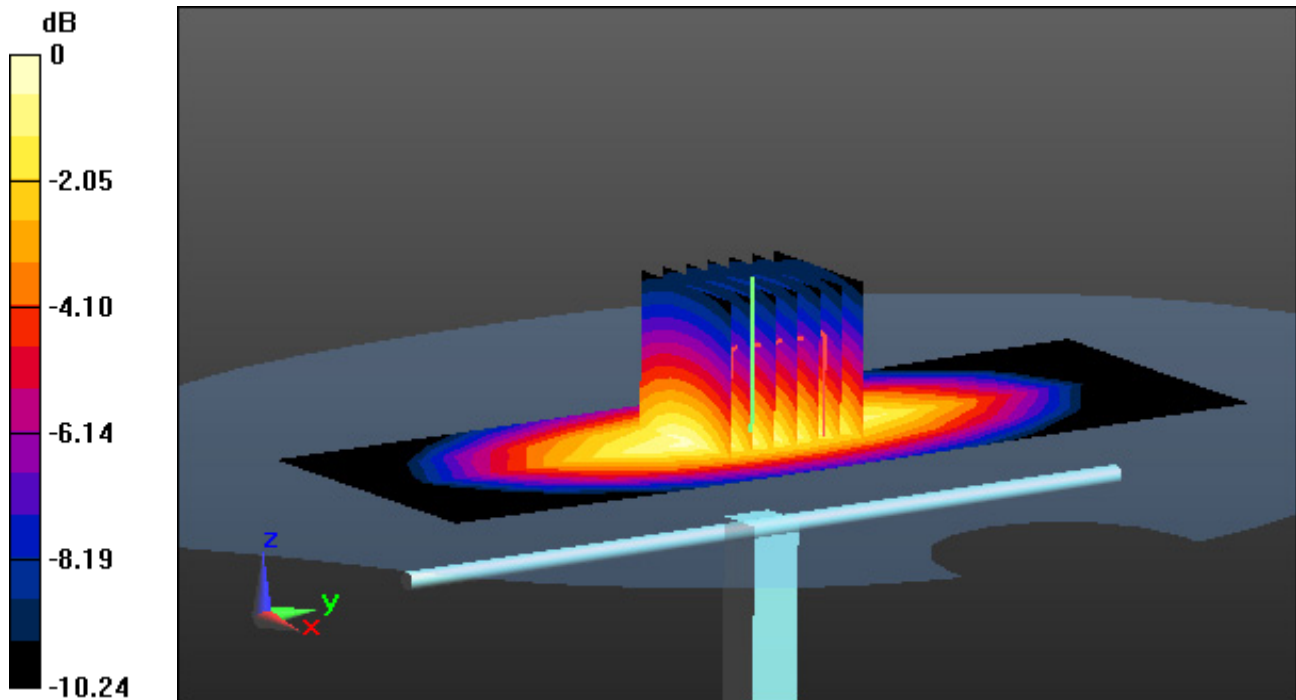

0 dB = 3.21 W/kg

DT&C Co., Ltd.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.621$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 2021-06-23 Electronics: DAE4
Sn1453

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-08-23; Ambient Temp: 21.3; Tissue Temp: 21.0

835 MHz System Verification (250 mW)


Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.51 W/kg

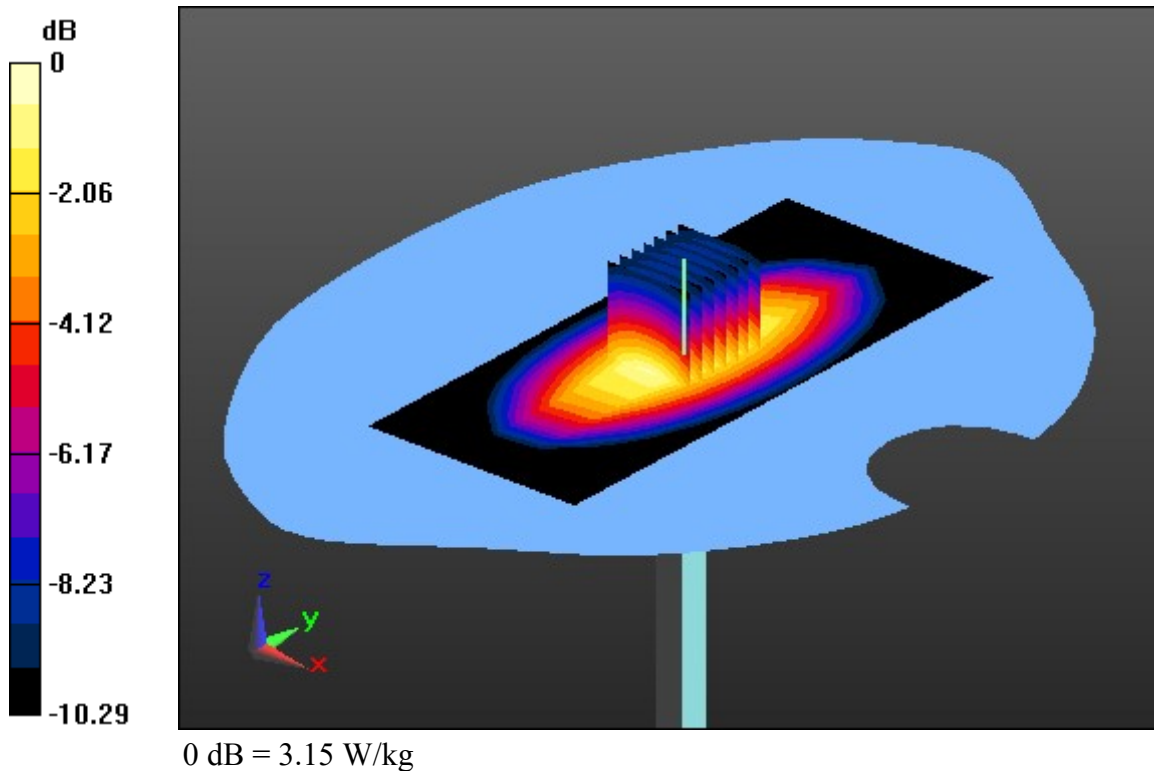

DT&C Co., Ltd.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 41.111$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-30; Ambient Temp: 20.8; Tissue Temp: 20.7

1900 MHz System Verification (100 mW)


Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.86 W/kg

SAR(1 g) = 4.13 W/kg; SAR(10 g) = 2.17 W/kg

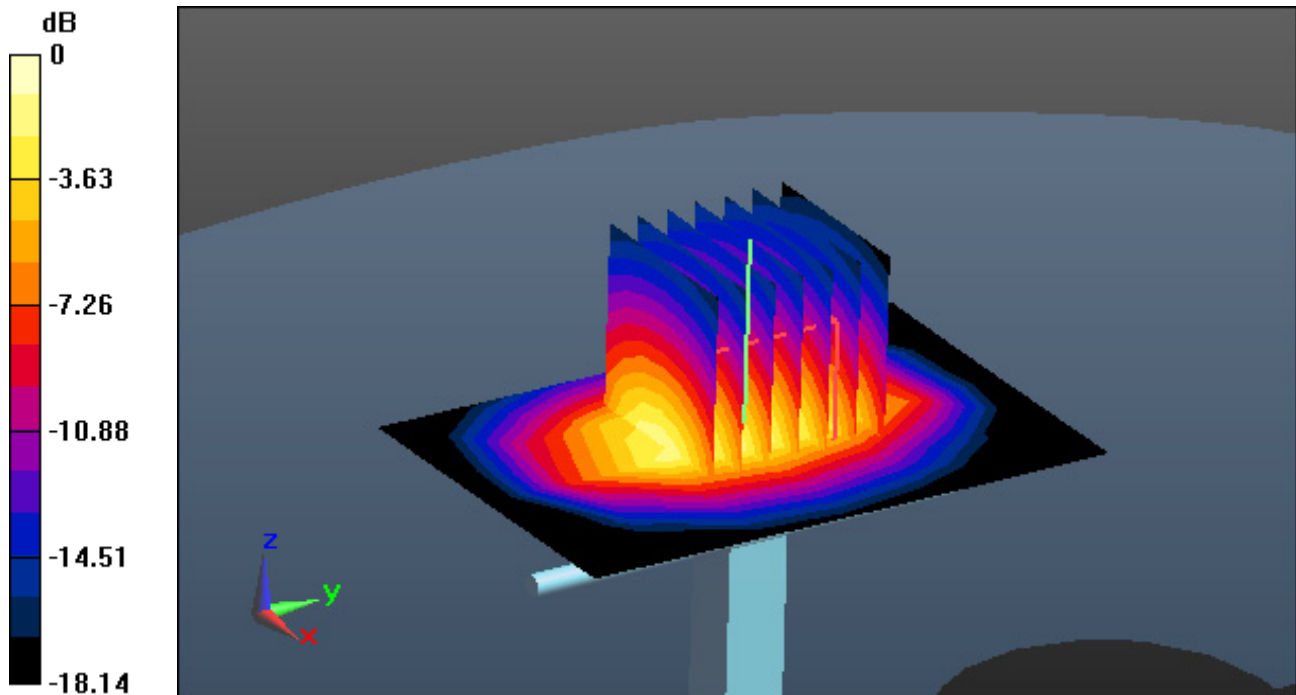

0 dB = 5.46 W/kg

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:716

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.136$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-27; Ambient Temp: 21.8; Tissue Temp: 21.7

2450 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.71 W/kg; SAR(10 g) = 2.58 W/kg

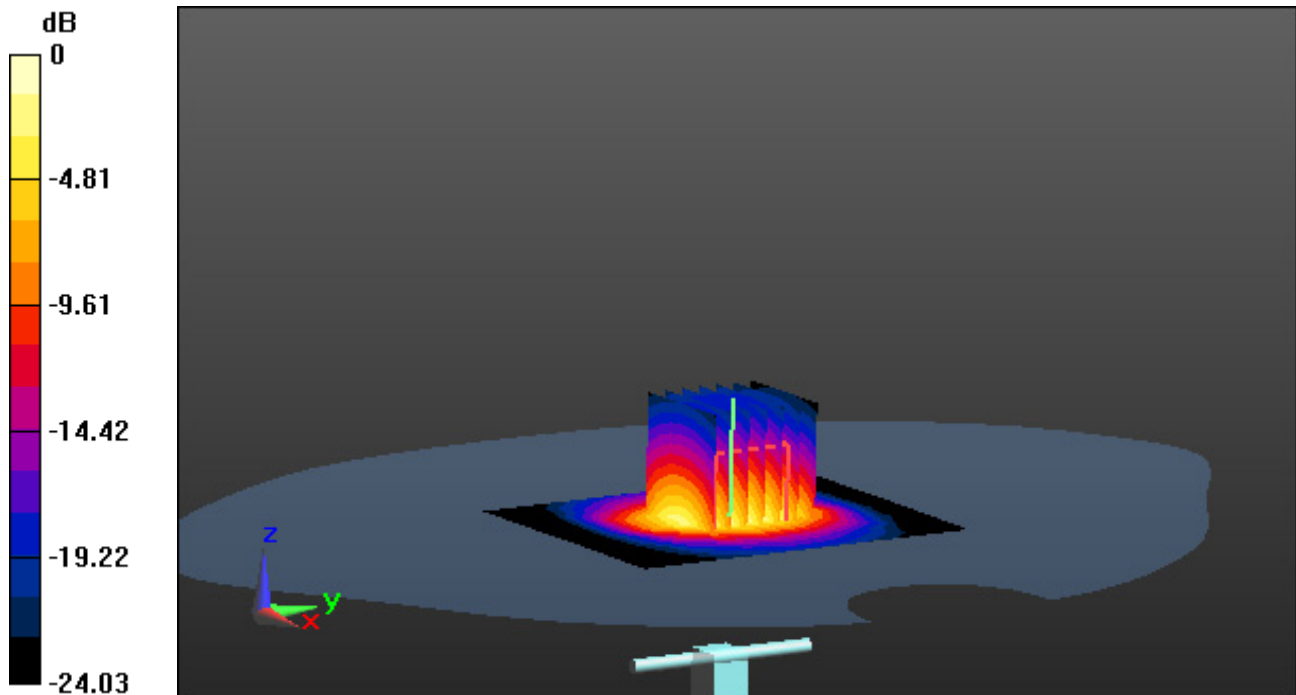

0 dB = 8.81 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.712$ S/m; $\epsilon_r = 35.329$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.39, 5.39, 5.39); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-03; Ambient Temp: 21.4; Tissue Temp: 21.1

5300 MHz System Verification (100 mW)


Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = 0.14 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 8.56 W/kg; SAR(10 g) = 2.46 W/kg

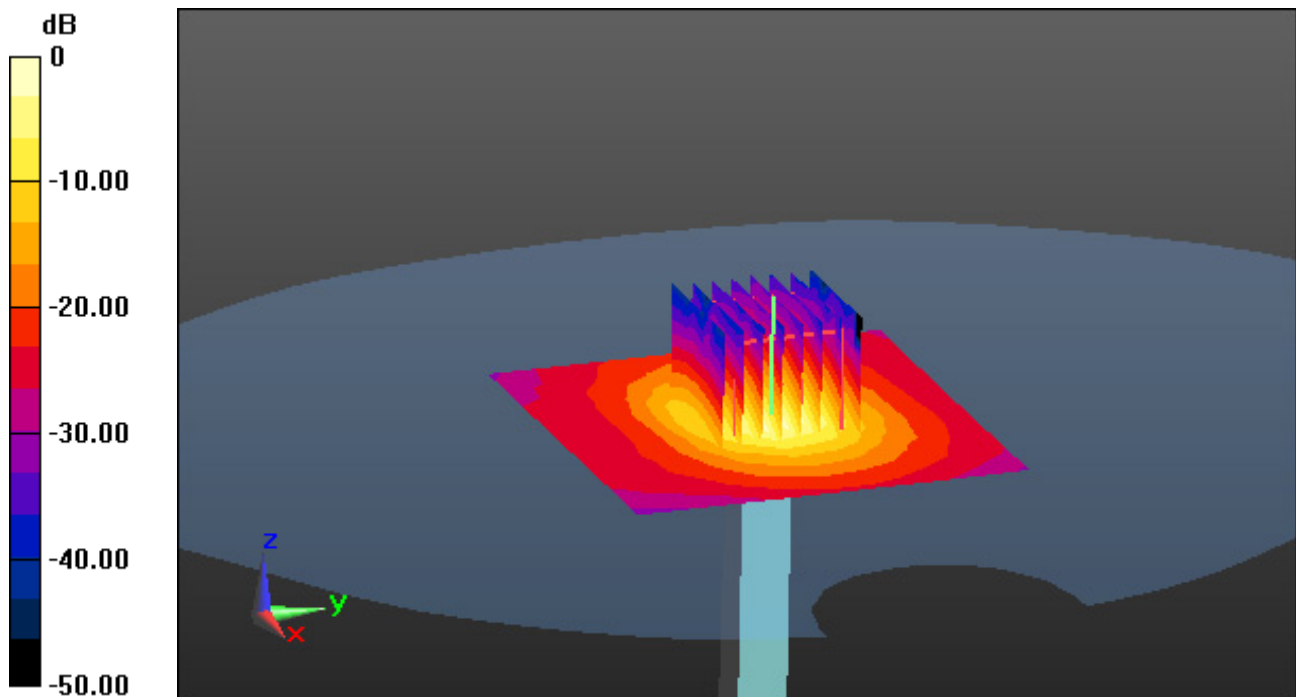

0 dB = 20.6 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.163$ S/m; $\epsilon_r = 35.37$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.84, 4.84, 4.84); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-06; Ambient Temp: 20.7; Tissue Temp: 20.6

5600 MHz System Verification (100 mW)


Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = -0.15 dB

Peak SAR (extrapolated) = 36.8 W/kg

SAR(1 g) = 8.81 W/kg; SAR(10 g) = 2.51 W/kg

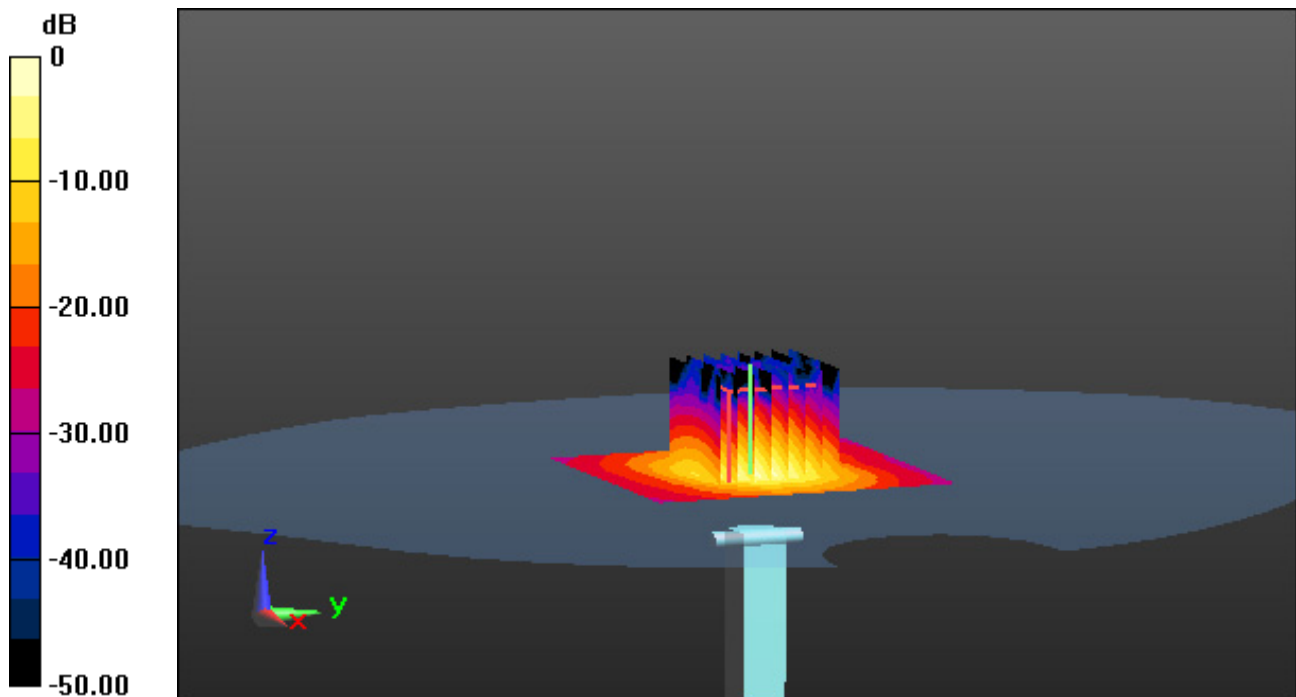

0 dB = 21.3 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.425$ S/m; $\epsilon_r = 34.496$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.03, 5.03, 5.03); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-07; Ambient Temp: 21.0; Tissue Temp: 20.9

5800 MHz System Verification (100 mW)


Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = -0.04 dB

Peak SAR (extrapolated) = 35.3 W/kg

SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.33 W/kg

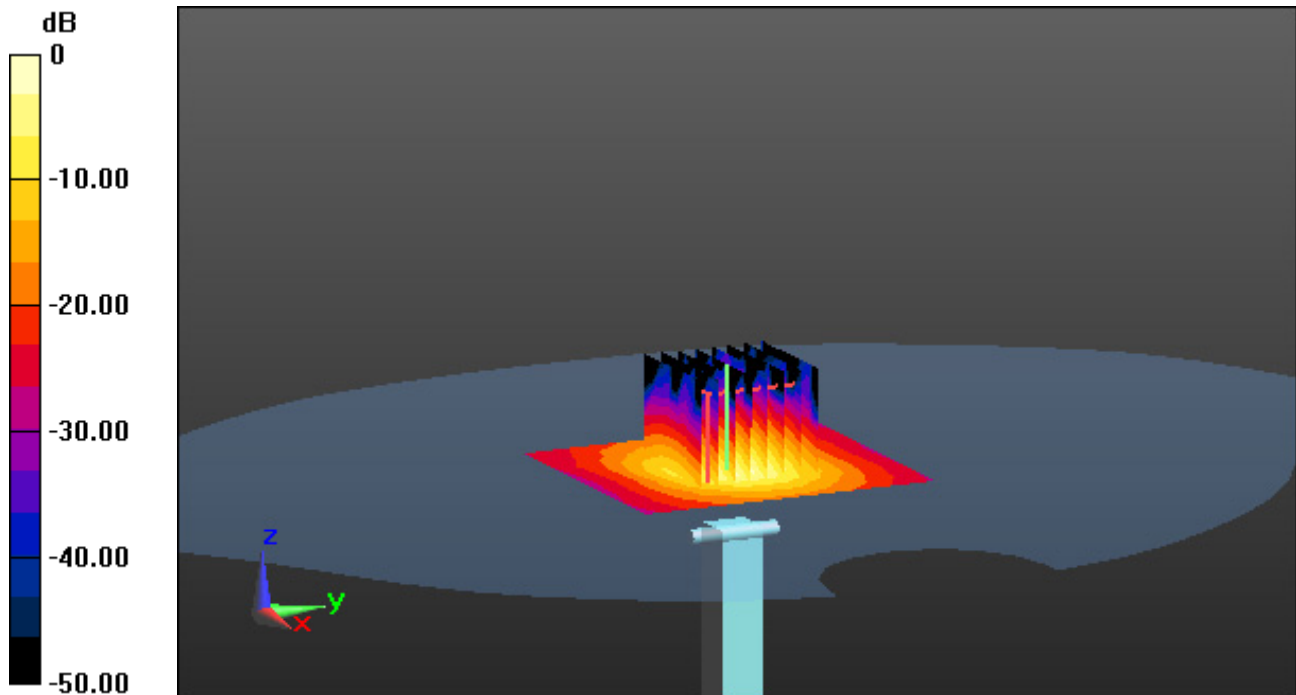

0 dB = 19.7 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 40.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.202 W/kg

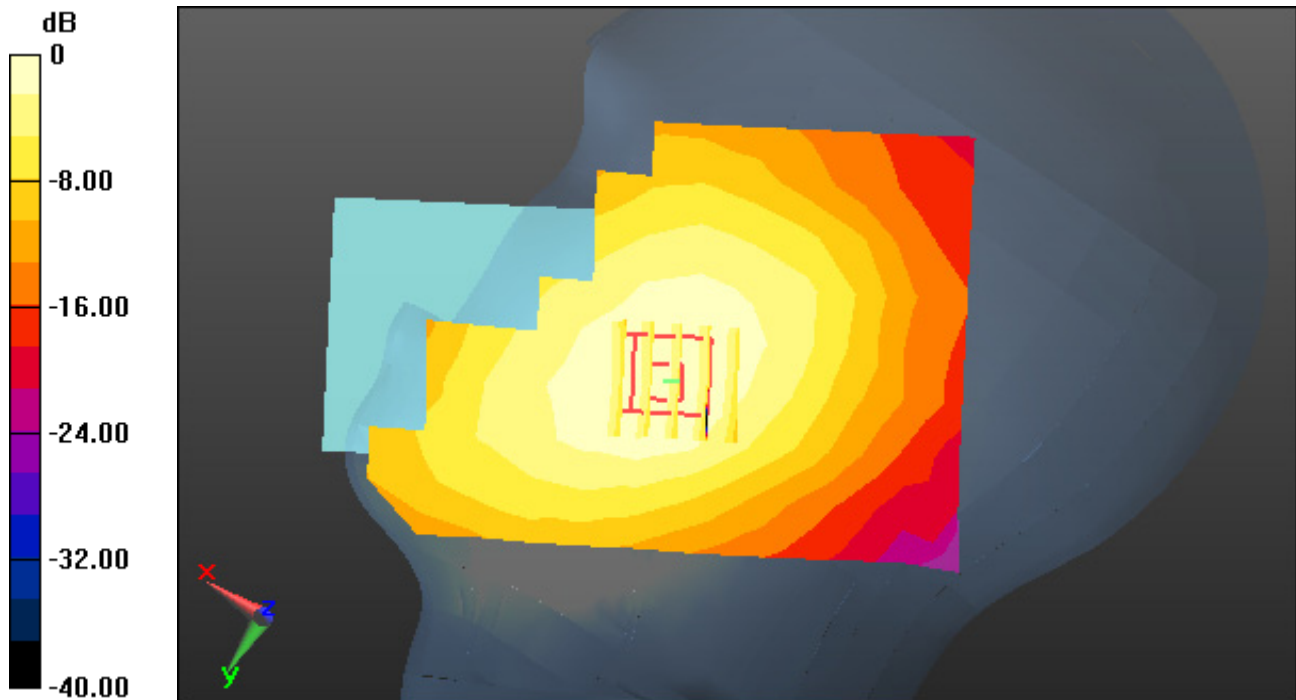

0 dB = 0.308 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, GSM 850_4Tx (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 40.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

Right Touch, GSM850 GPRS 4TX Ch. 190, Ant Internal, Standard Battery


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.231 W/kg

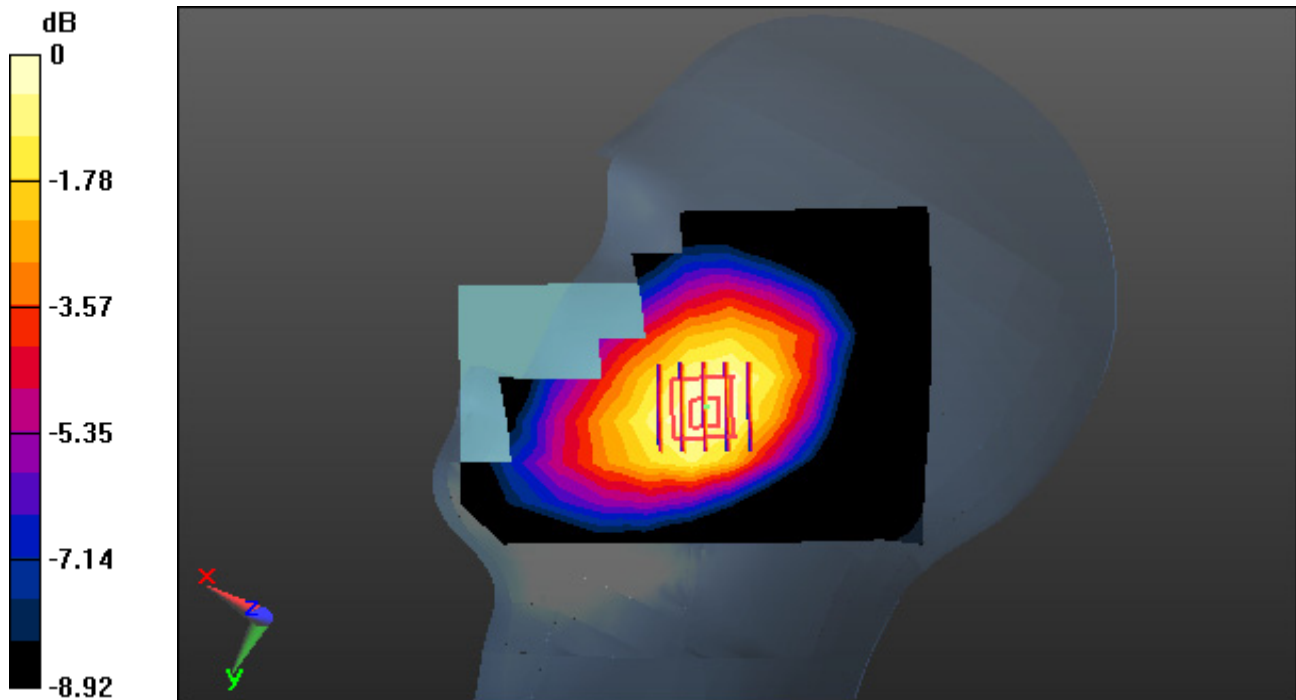

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, PCS 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 41.186$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-30; Ambient Temp: 20.8; Tissue Temp: 20.7

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.144 W/kg

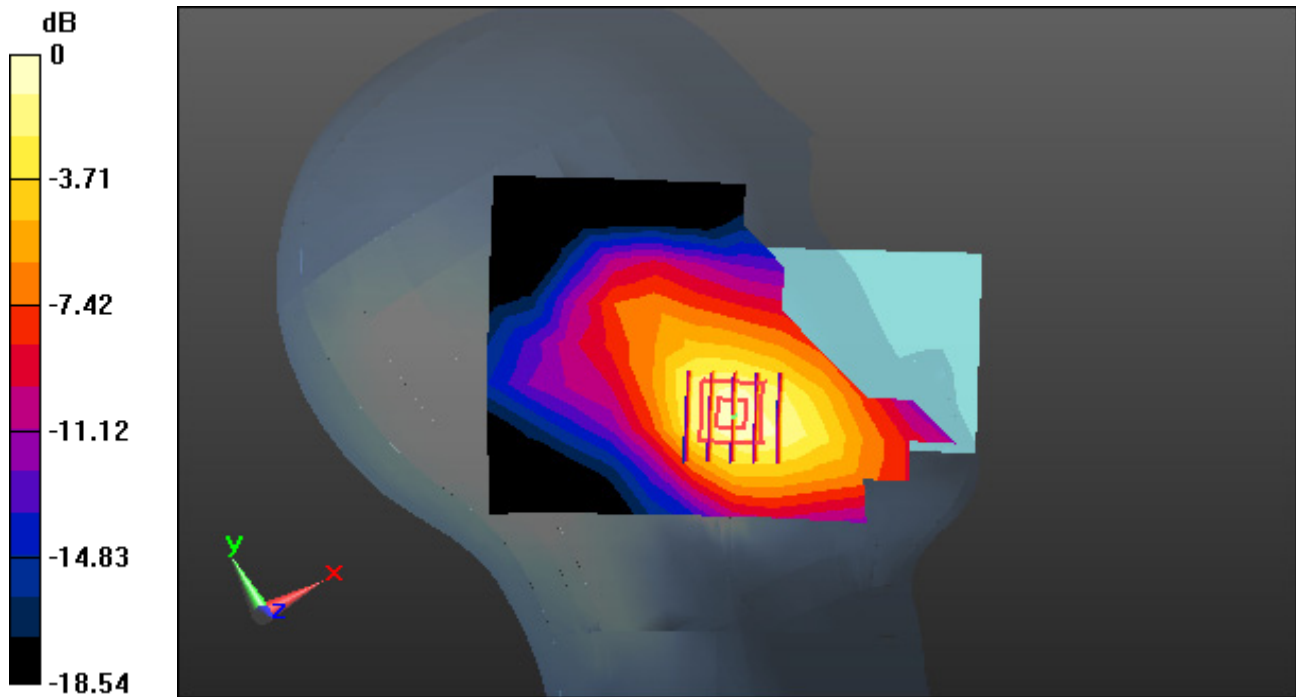

0 dB = 0.289 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, PCS1900_4Tx (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 41.186$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-30; Ambient Temp: 20.8; Tissue Temp: 20.7

Left Touch, PCS1900 GPRS 4TX Ch. 661, Ant Internal, Standard Battery


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.155 W/kg

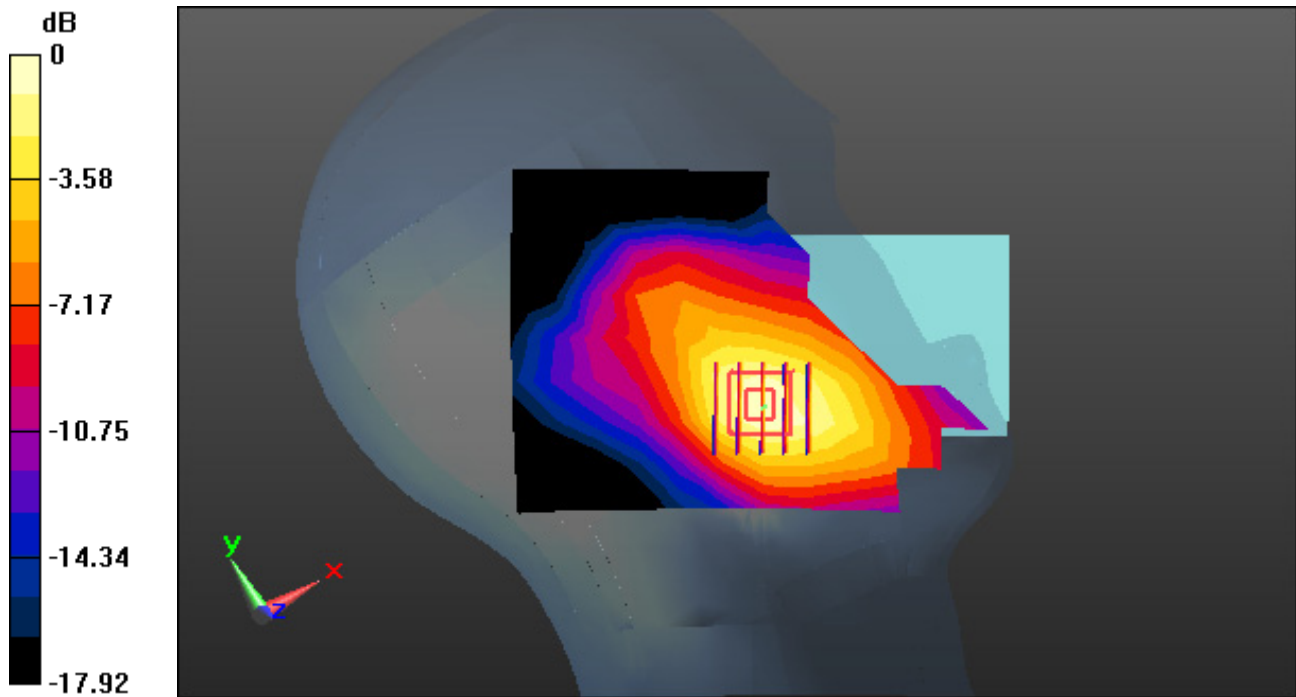

0 dB = 0.307 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 40.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

Right Touch, WCDMA Band 5 Ch. 4183, Ant Internal, Standard Battery


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.135 W/kg

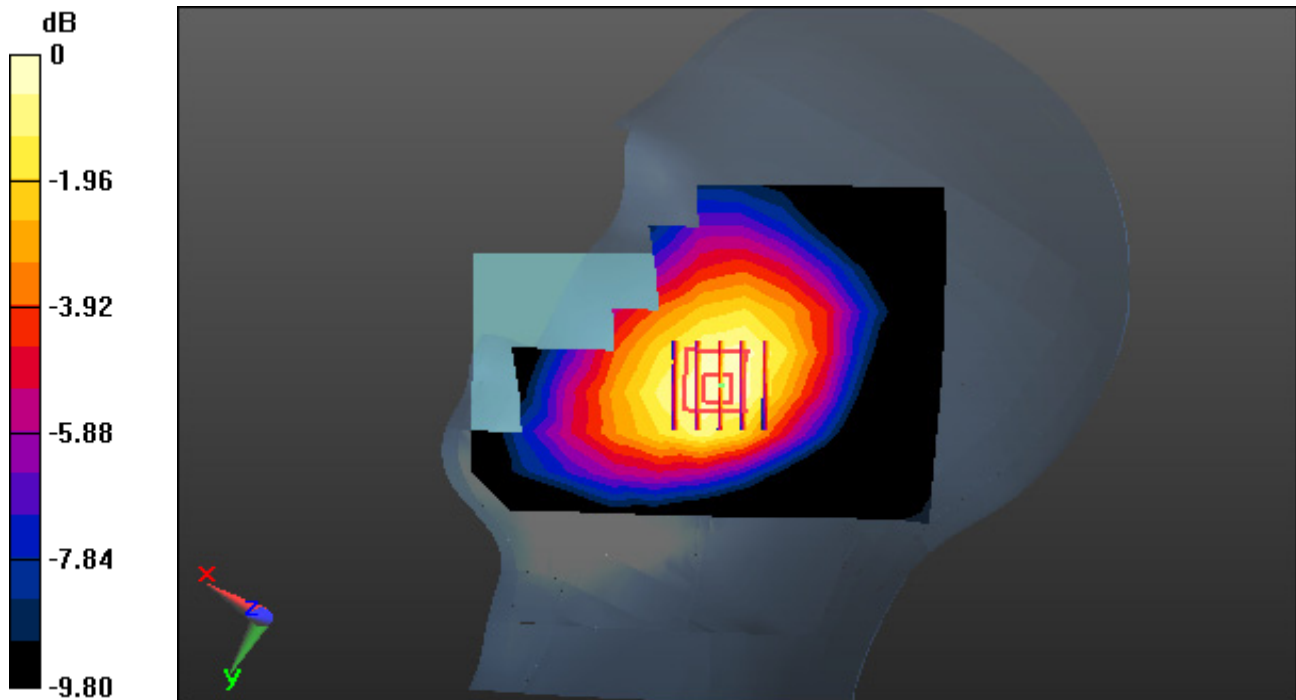

0 dB = 0.202 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, LTE Band 12 (FCC) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.866 \text{ S/m}$; $\epsilon_r = 42.887$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(10.05, 10.05, 10.05); Calibrated: 2021-06-23 Electronics: DAE4 Sn1453

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-08-24; Ambient Temp: 21.3; Tissue Temp: 21.2

Right Touch, LTE Band 12 Ch. 23095, Ant Internal, Standard Battery

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.126 W/kg

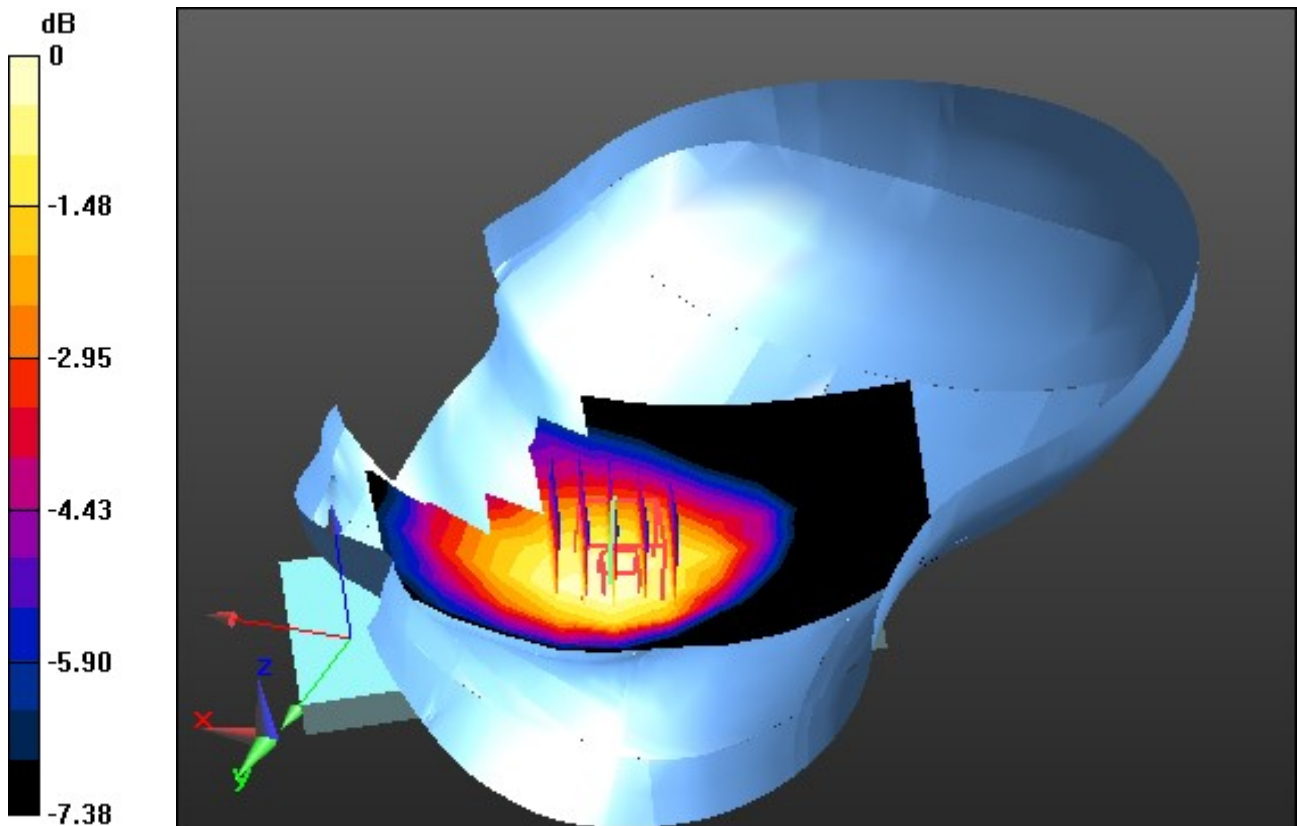

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, LTE Band 5(FCC) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.910 \text{ S/m}$; $\epsilon_r = 42.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 2021-06-23 Electronics: DAE4 Sn1453

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-08-23; Ambient Temp: 21.3; Tissue Temp: 21.0

Right Touch, LTE Band 5 Ch. 20525, Ant Internal, Standard Battery

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.170 W/kg

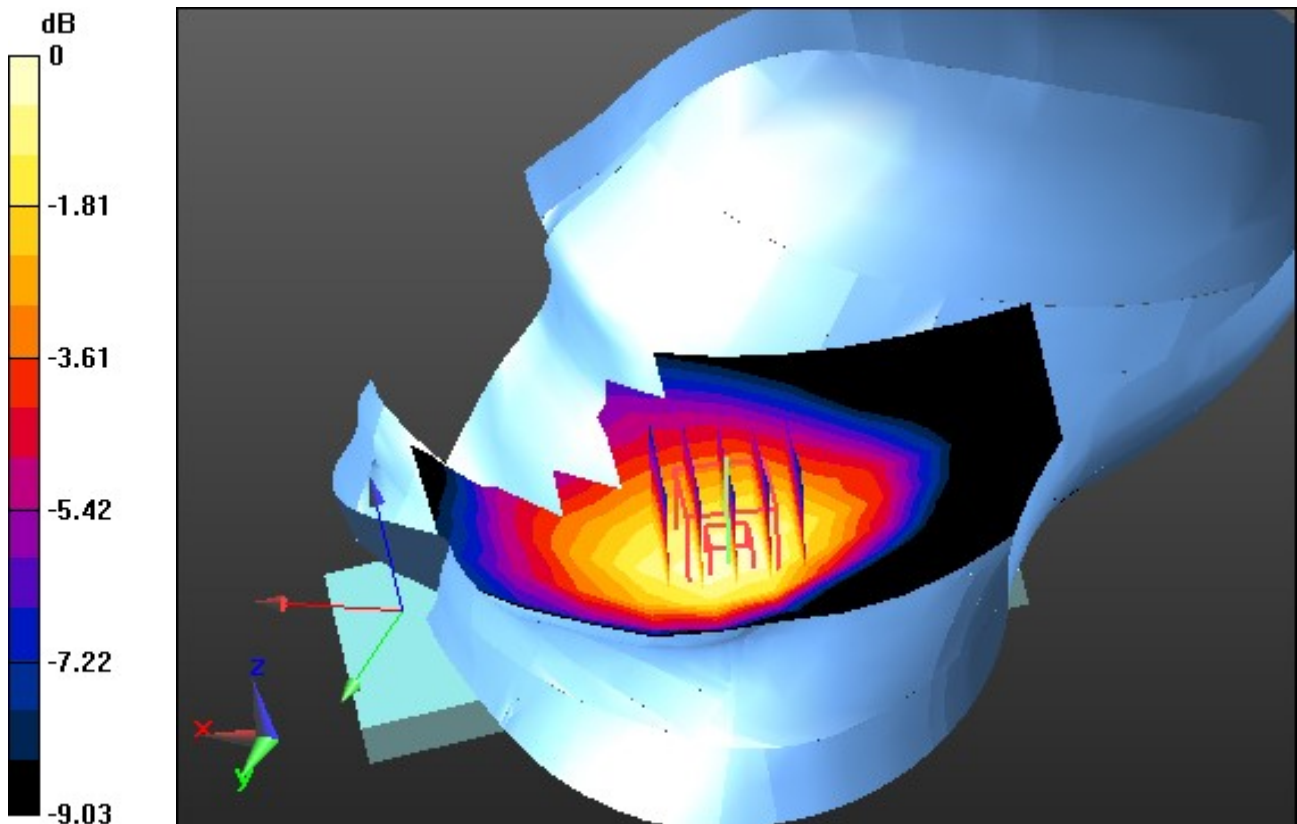

0 dB = 0.254 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, 1. W-LAN 2.4G(802.11b/g/n20, 40) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 39.178$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-27; Ambient Temp: 21.8; Tissue Temp: 21.7

Right Touch, WLAN(802.11b) Ch. 6, Ant Internal, Standard Battery


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.037 W/kg

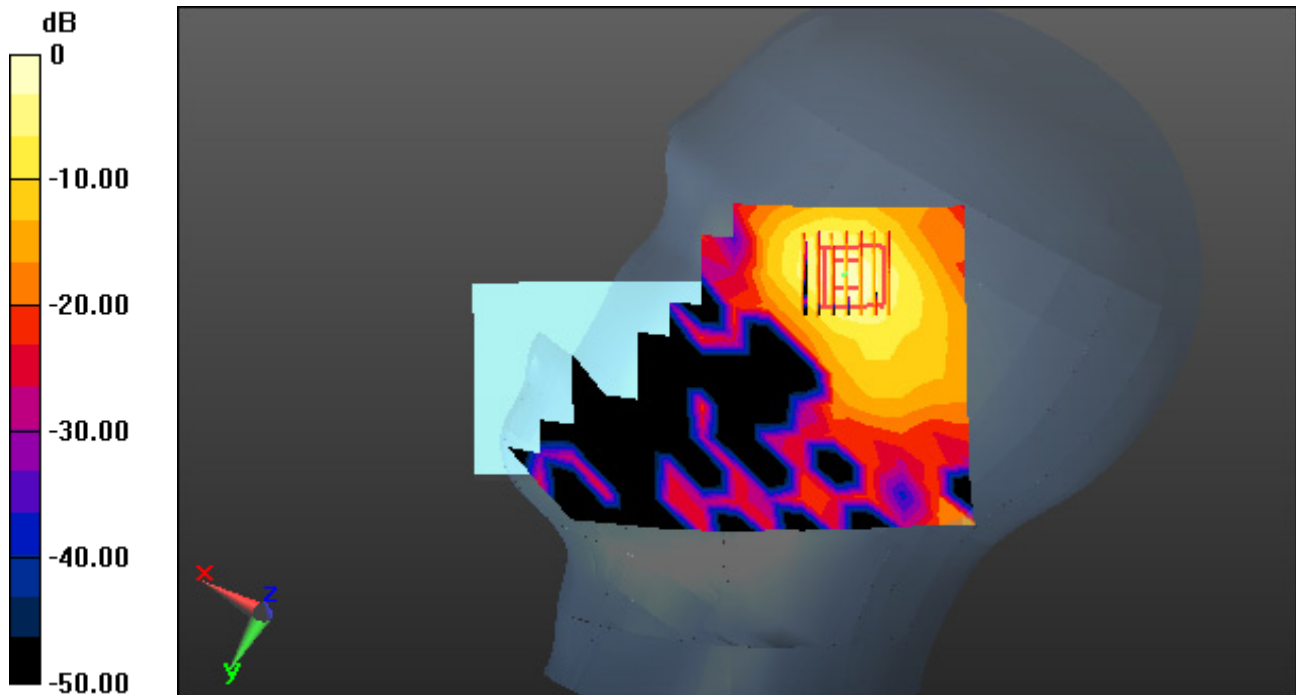

0 dB = 0.148 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.3G(802.11a/n/ac) (0); Frequency: 5290 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.702 \text{ S/m}$; $\epsilon_r = 35.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.39, 5.39, 5.39); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-03; Ambient Temp: 21.4; Tissue Temp: 21.1

Right Touch, WLAN(802.11ac VHT80) Ch. 58, Ant Internal, Standard Battery


Area Scan (13x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.021 W/kg

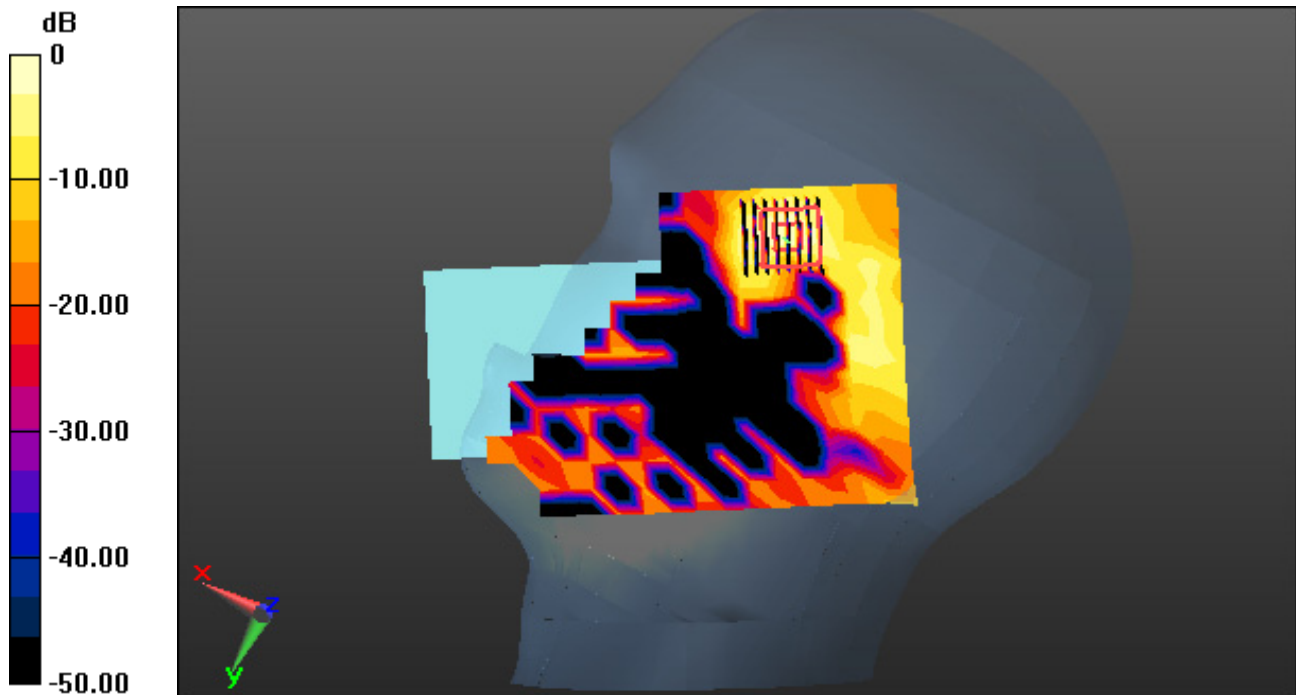

0 dB = 0.179 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.6G(802.11a/n/ac) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.17 \text{ S/m}$; $\epsilon_r = 35.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.84, 4.84, 4.84); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-06; Ambient Temp: 20.7; Tissue Temp: 20.6

Right Tilt, WLAN(802.11ac VHT80) Ch. 122, Ant Internal, Standard Battery


Area Scan (13x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.018 W/kg

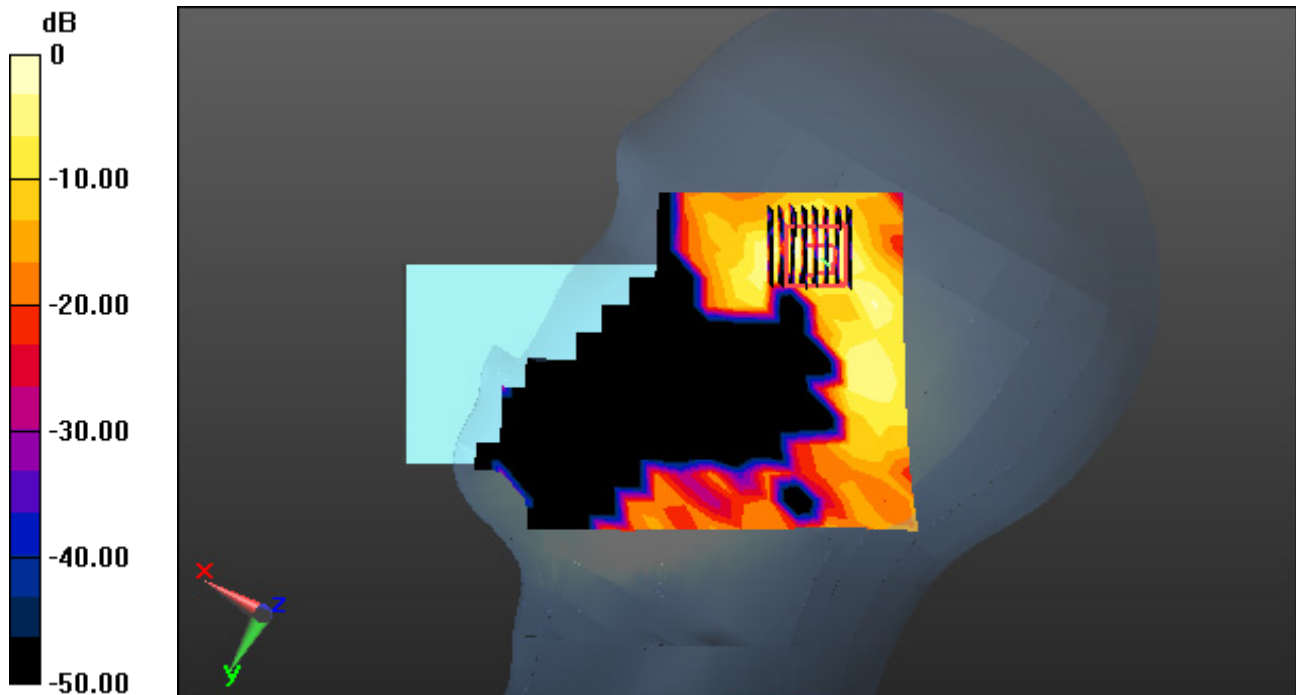

0 dB = 0.267 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.8G(802.11a/n/ac) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.39 \text{ S/m}$; $\epsilon_r = 34.544$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.03, 5.03, 5.03); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-07; Ambient Temp: 21.0; Tissue Temp: 20.9

Right Touch, WLAN(802.11ac VHT80) Ch. 155, Ant Internal, Standard Battery


Area Scan (13x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.028 W/kg

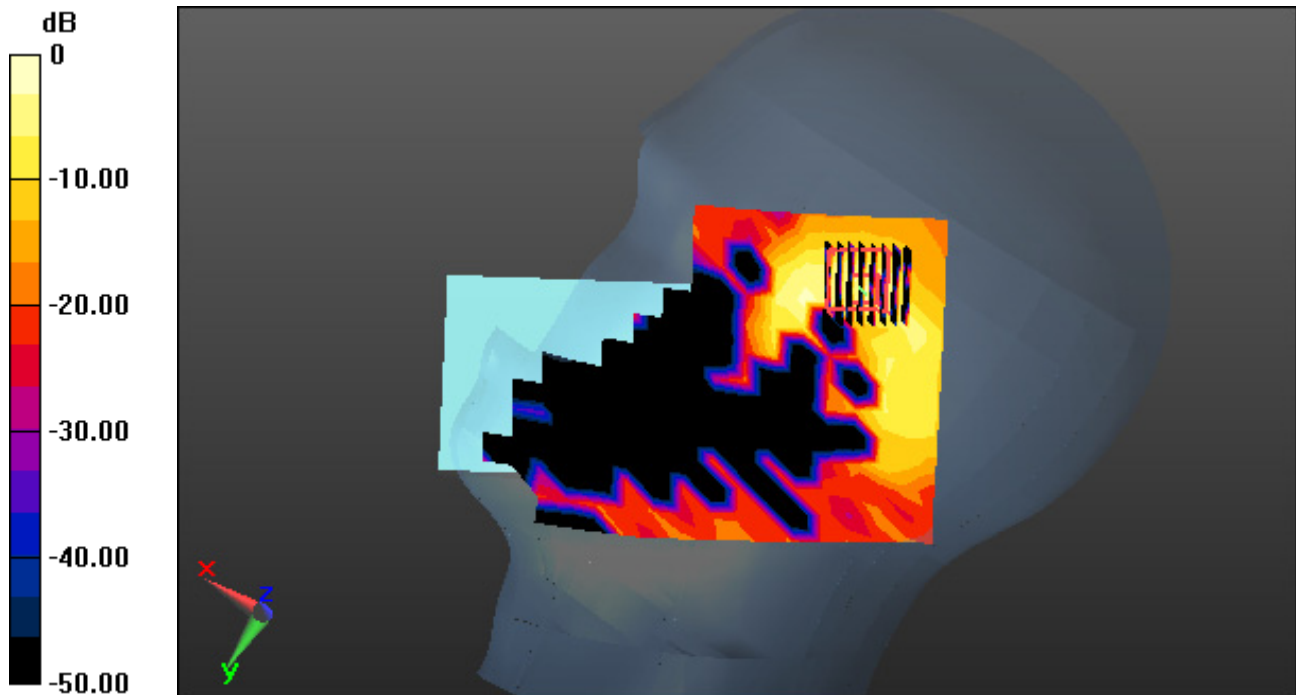

0 dB = 0.363 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 39.166$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-27; Ambient Temp: 21.8; Tissue Temp: 21.7

Right Touch, Bluetooth 1Mbps Ch. 39, Ant Internal, Standard Battery


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.026 W/kg

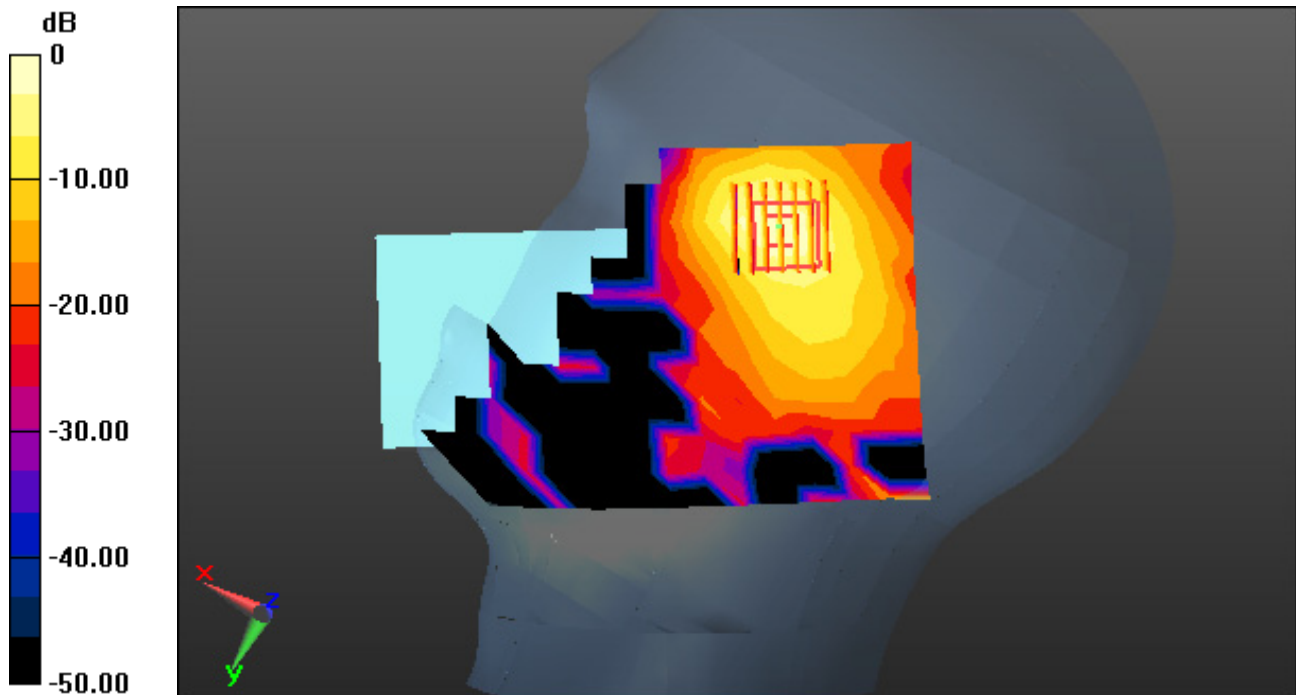

0 dB = 0.095 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 40.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

1 cm space from Body, Rear, GSM850 Ch. 190, Ant Internal


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.579 W/kg; SAR(10 g) = 0.338 W/kg

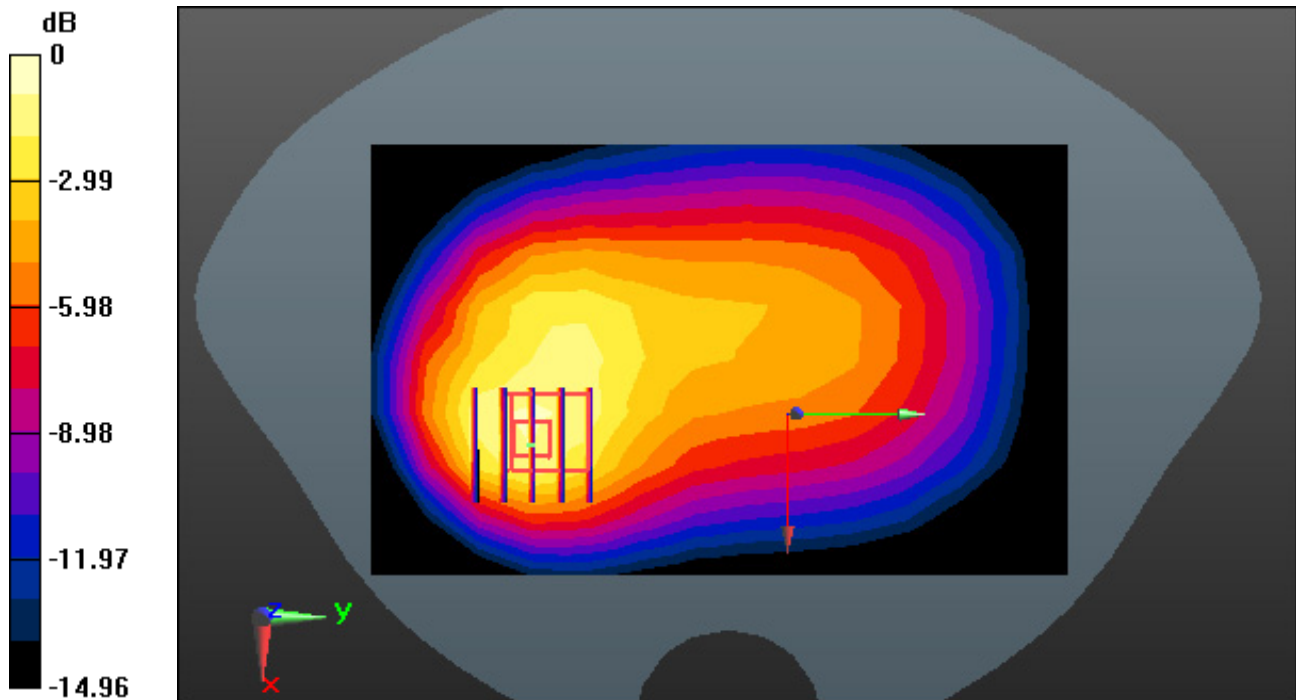

0 dB = 0.796 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, GSM 850_4Tx (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 40.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

1 cm space from Body, Rear, GSM850 GPRS 4TX Ch. 190, Ant Internal


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.370 W/kg

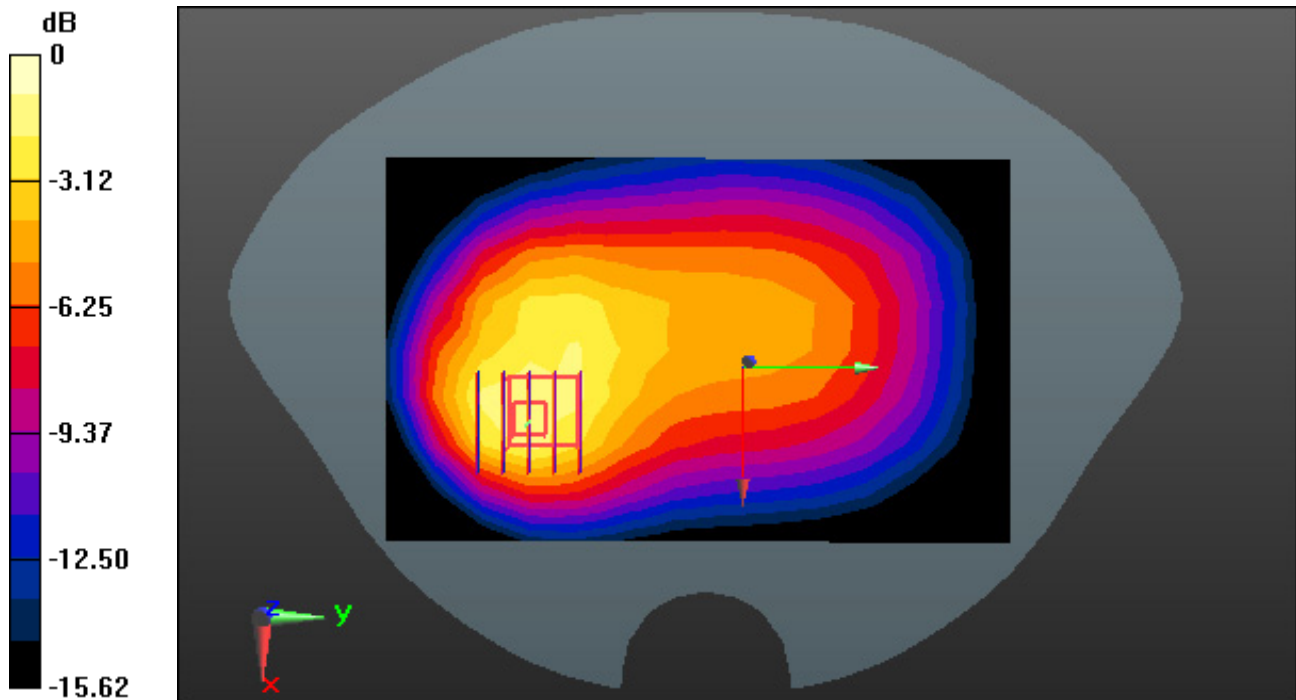

0 dB = 0.879 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, PCS 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 41.186$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-30; Ambient Temp: 20.8; Tissue Temp: 20.7

1 cm space from Body, Rear, PCS1900 Ch. 661, Ant Internal


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.187 W/kg

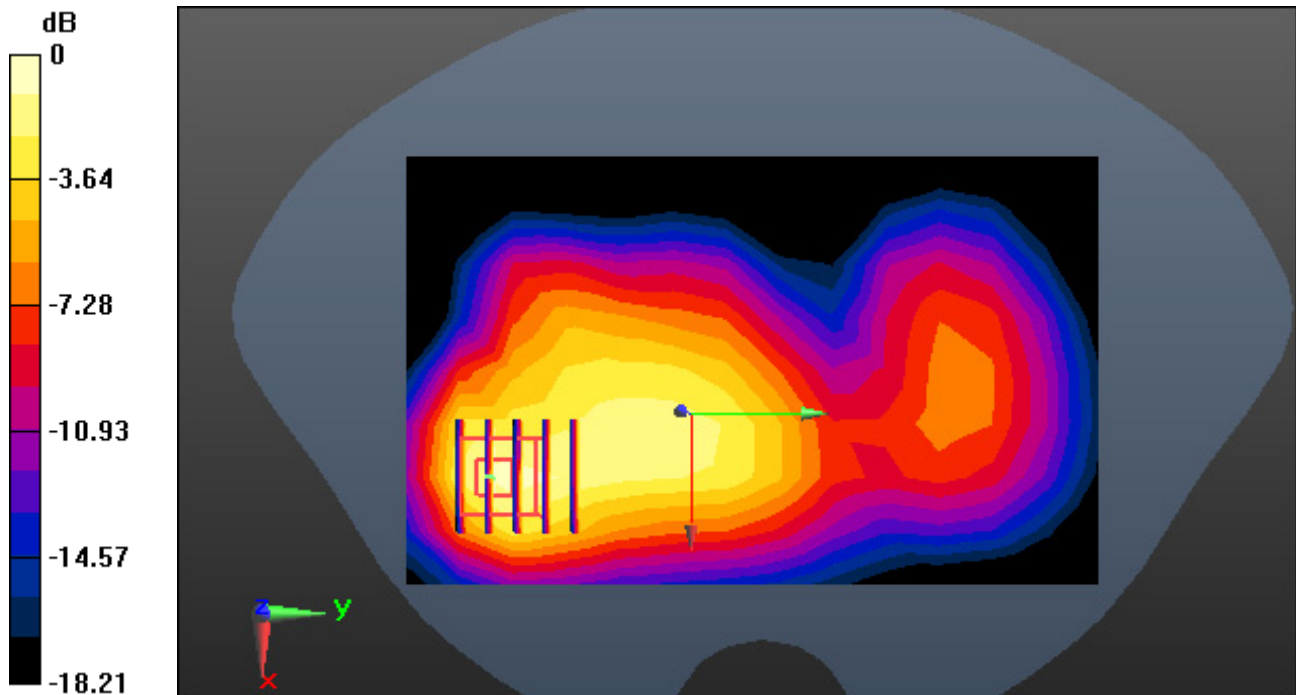

0 dB = 0.473 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar;

Communication System: UID 0, PCS1900_4Tx (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 41.186$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-30; Ambient Temp: 20.8; Tissue Temp: 20.7

1 cm space from Body, Rear, PCS1900 GPRS 4TX Ch. 661, Ant Internal


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.741 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.219 W/kg

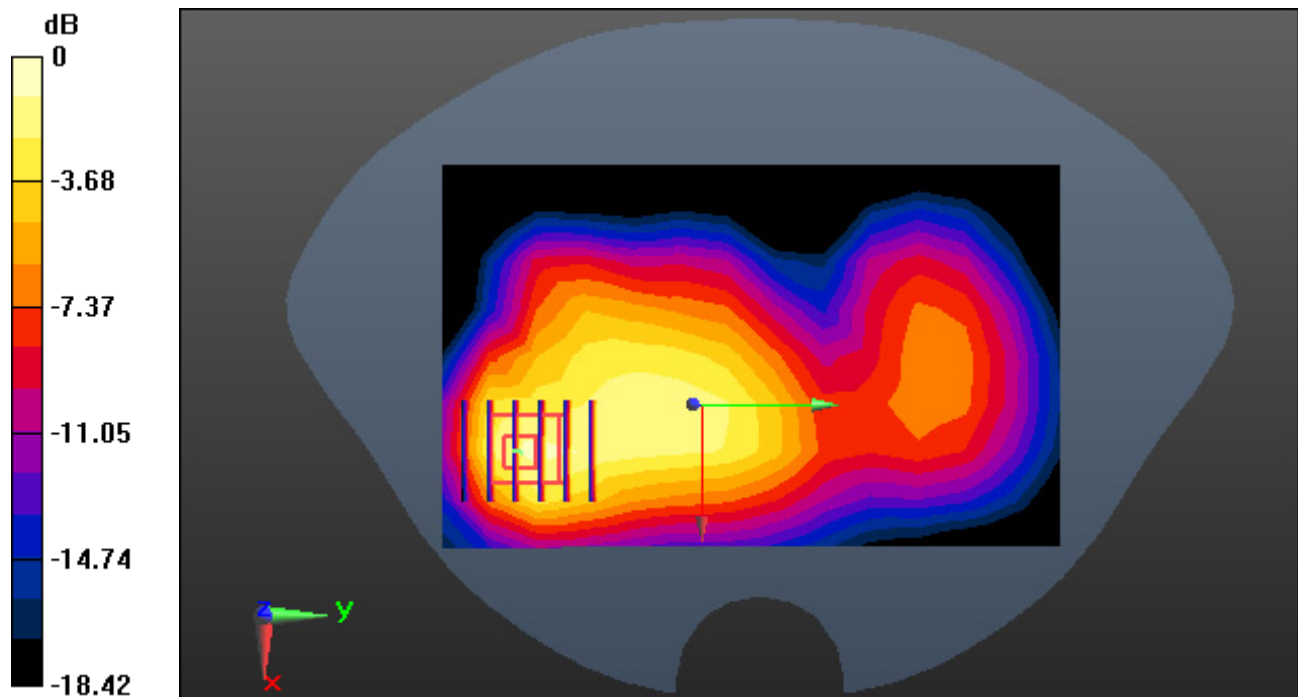

0 dB = 0.521 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 40.859$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 6/23/2021 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-25; Ambient Temp: 21.2; Tissue Temp: 21.1

1 cm space from Body, Rear, WCDMA Band 5 Ch. 4183, Ant Internal


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.348 W/kg

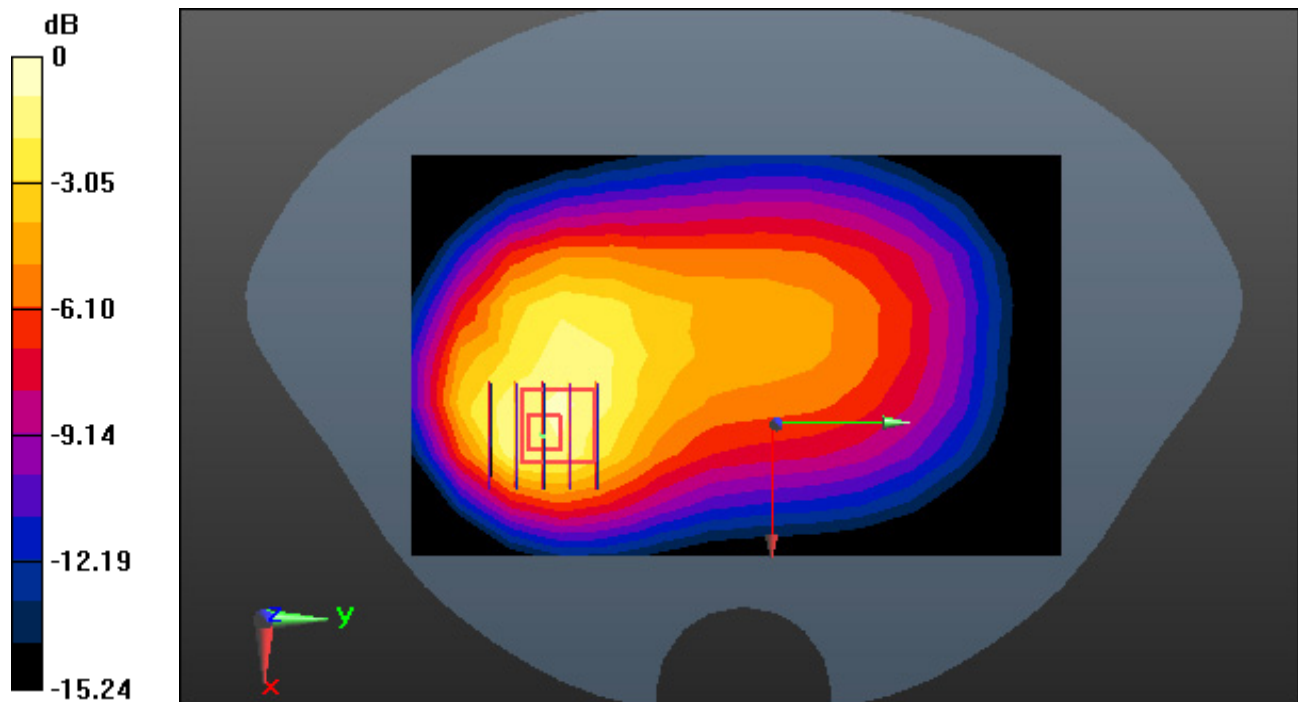

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, LTE Band 12 (FCC) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.887$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(10.05, 10.05, 10.05); Calibrated: 2021-06-23 Electronics: DAE4 Sn1453

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-08-24; Ambient Temp: 21.3; Tissue Temp: 21.2

1 cm space from Body, Rear, LTE Band 12 Ch. 23095, Ant Internal

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.230 W/kg

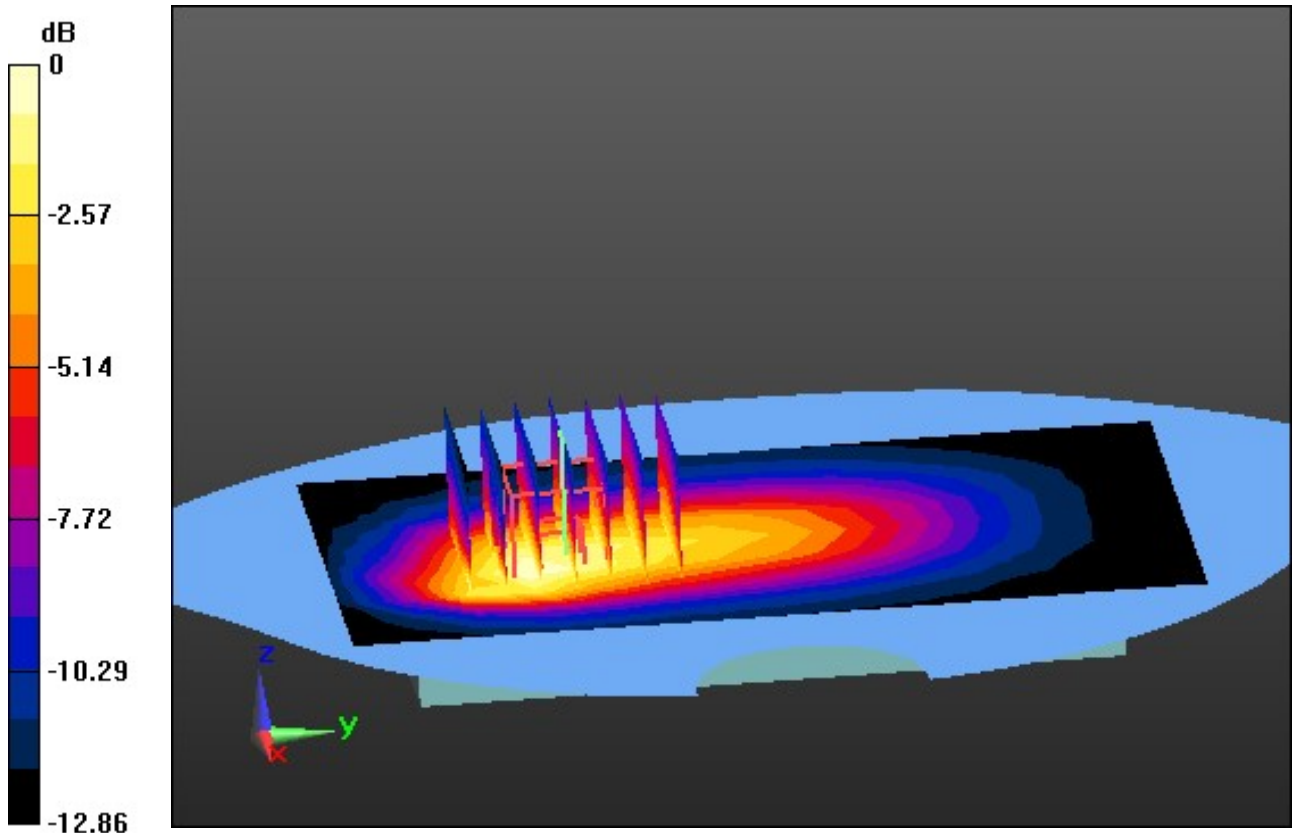

0 dB = 0.403 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, LTE Band 5(FCC) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.910 \text{ S/m}$; $\epsilon_r = 42.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7337; ConvF(9.76, 9.76, 9.76); Calibrated: 2021-06-23 Electronics: DAE4 Sn1453

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM_Right_20170922; Type: QD000P40CD; Serial: 1895

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Test Date: 2021-08-23; Ambient Temp: 21.3; Tissue Temp: 21.0

1 cm space from Body, Rear, LTE Band 5 Ch. 20525, Ant Internal

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.319 W/kg

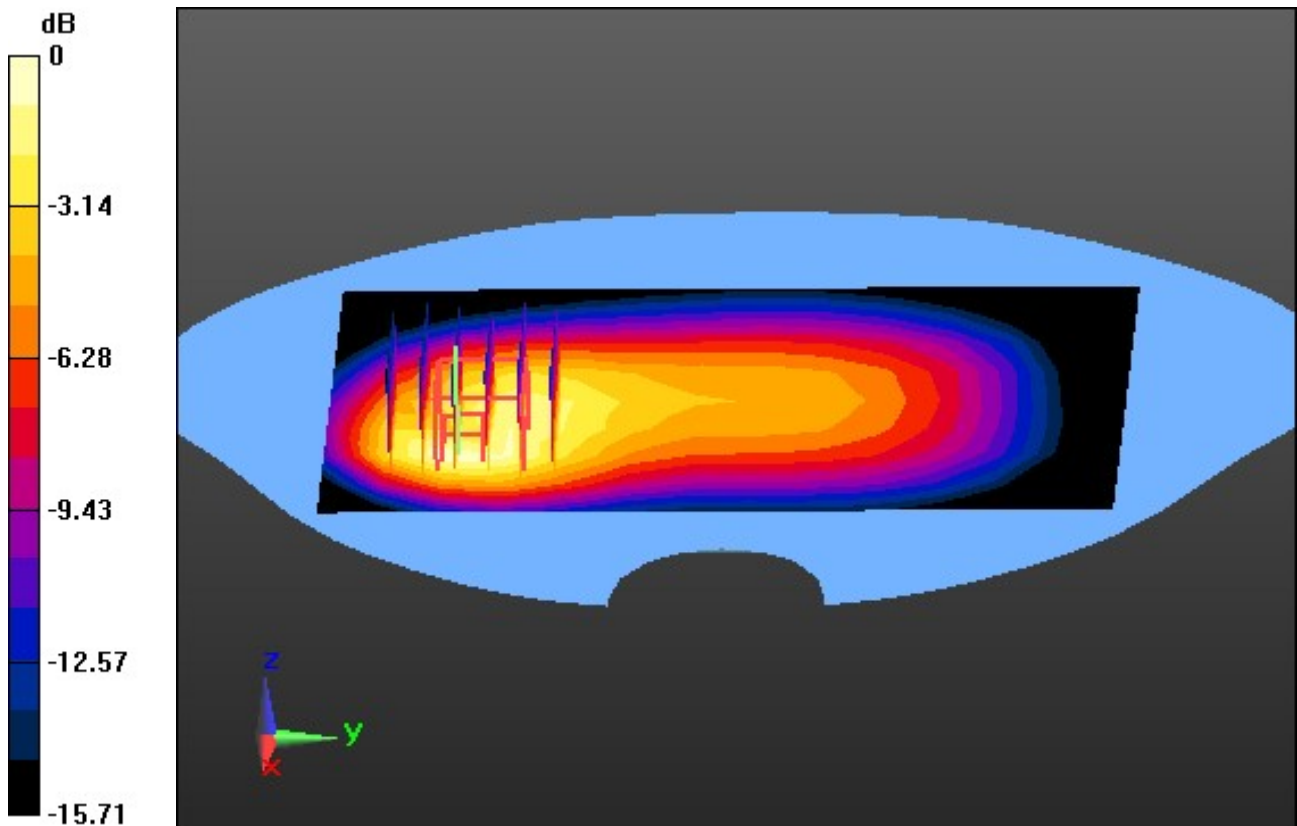

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, 1. W-LAN 2.4G(802.11b/g/n20, 40) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 39.178$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-27; Ambient Temp: 21.8; Tissue Temp: 21.7

1 cm space from Body, Rear, WLAN(802.11b) Ch. 6, Ant Internal


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.056 W/kg

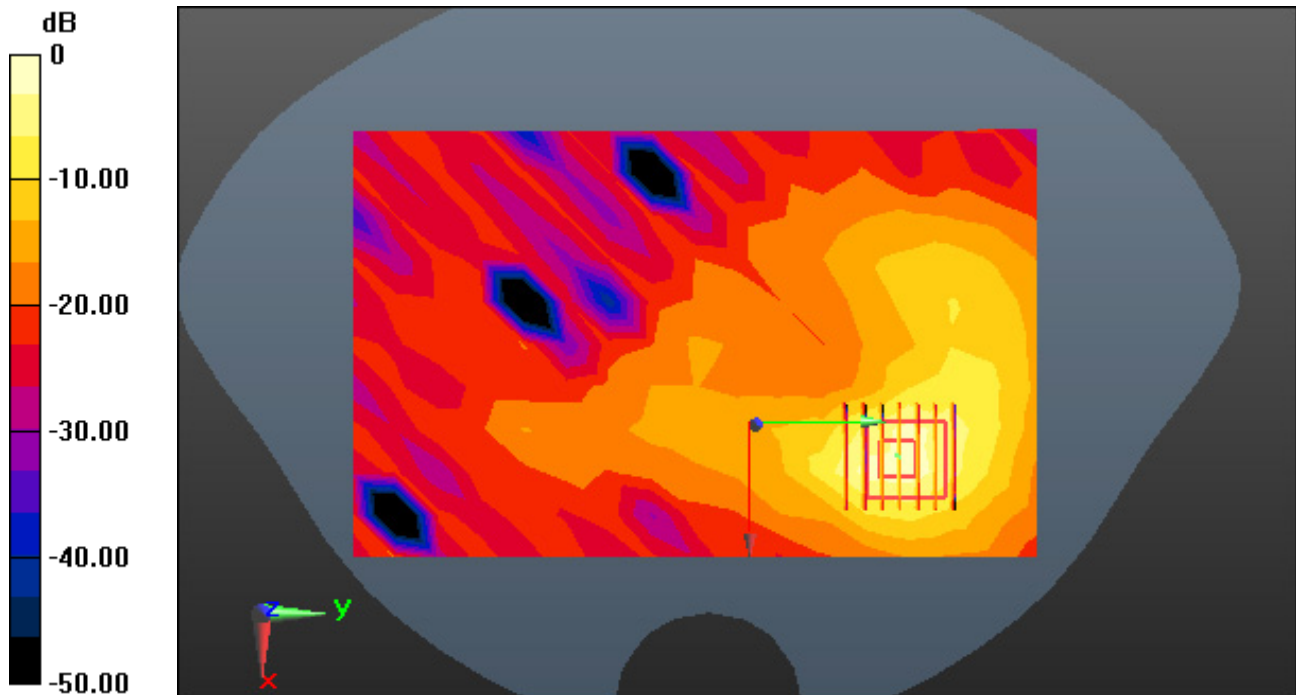

0 dB = 0.222 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.3G(802.11a/n/ac) (0); Frequency: 5290 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.702 \text{ S/m}$; $\epsilon_r = 35.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.39, 5.39, 5.39); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-03; Ambient Temp: 21.4; Tissue Temp: 21.1

1 cm space from Body, Rear, WLAN(802.11ac VHT80) Ch. 58, Ant Internal


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.055 W/kg

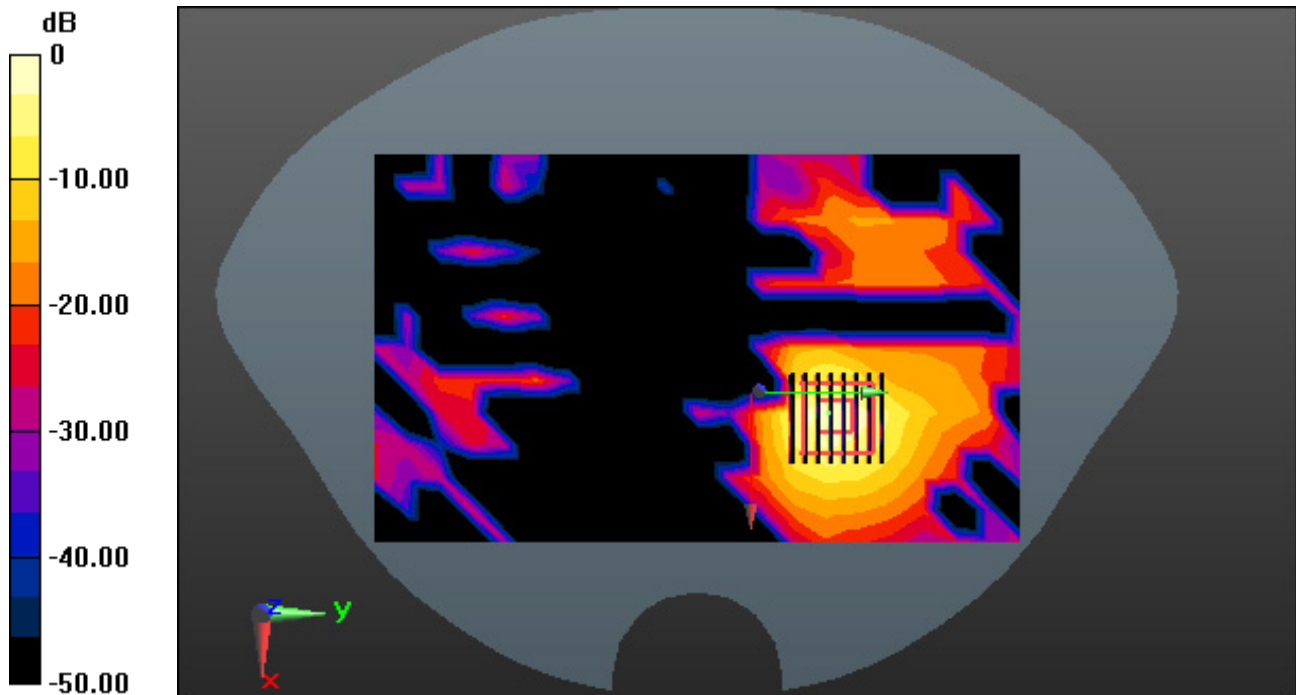

0 dB = 0.421 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.6G(802.11a/n/ac) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.17 \text{ S/m}$; $\epsilon_r = 35.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.84, 4.84, 4.84); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-06; Ambient Temp: 20.7; Tissue Temp: 20.6

1 cm space from Body, Rear, WLAN(802.11ac VHT80) Ch. 122, Ant Internal


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio: 1.4

Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.062 W/kg

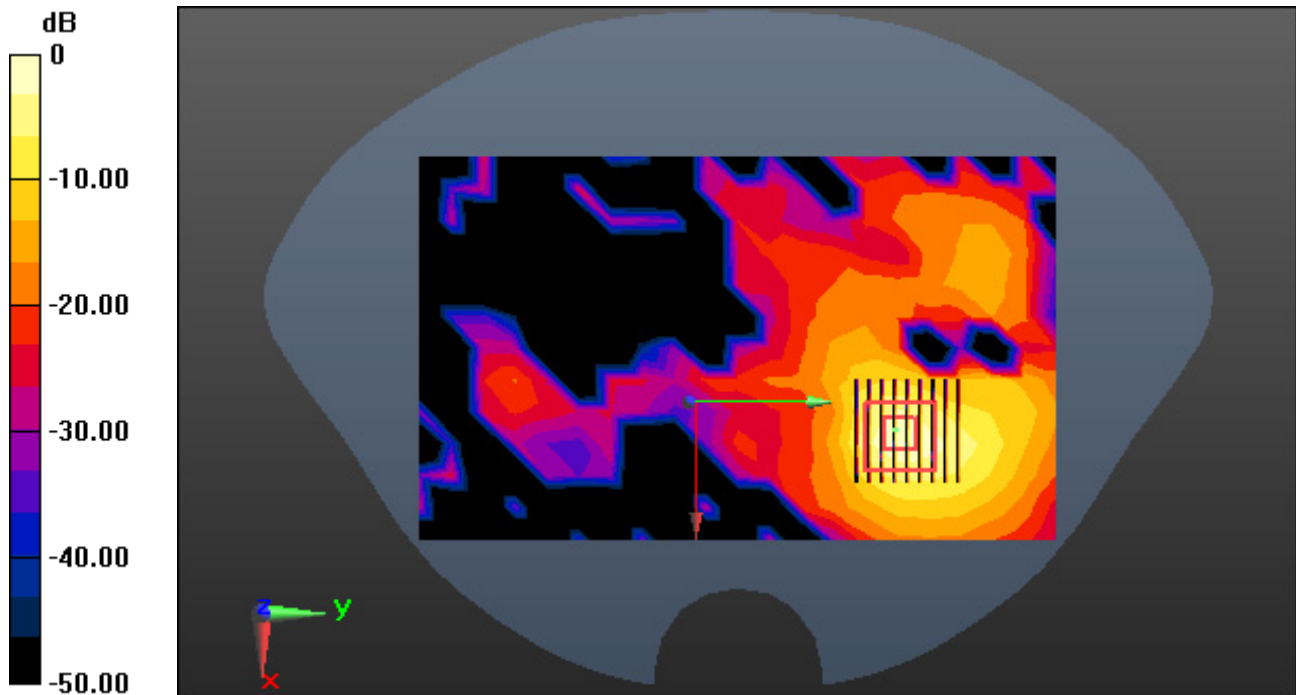

0 dB = 0.498 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.8G(802.11a/n/ac) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.39 \text{ S/m}$; $\epsilon_r = 34.544$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.03, 5.03, 5.03); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-07; Ambient Temp: 21.0; Tissue Temp: 20.9

1 cm space from Body, Rear, WLAN(802.11ac VHT80) Ch. 155, Ant Internal


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.044 W/kg

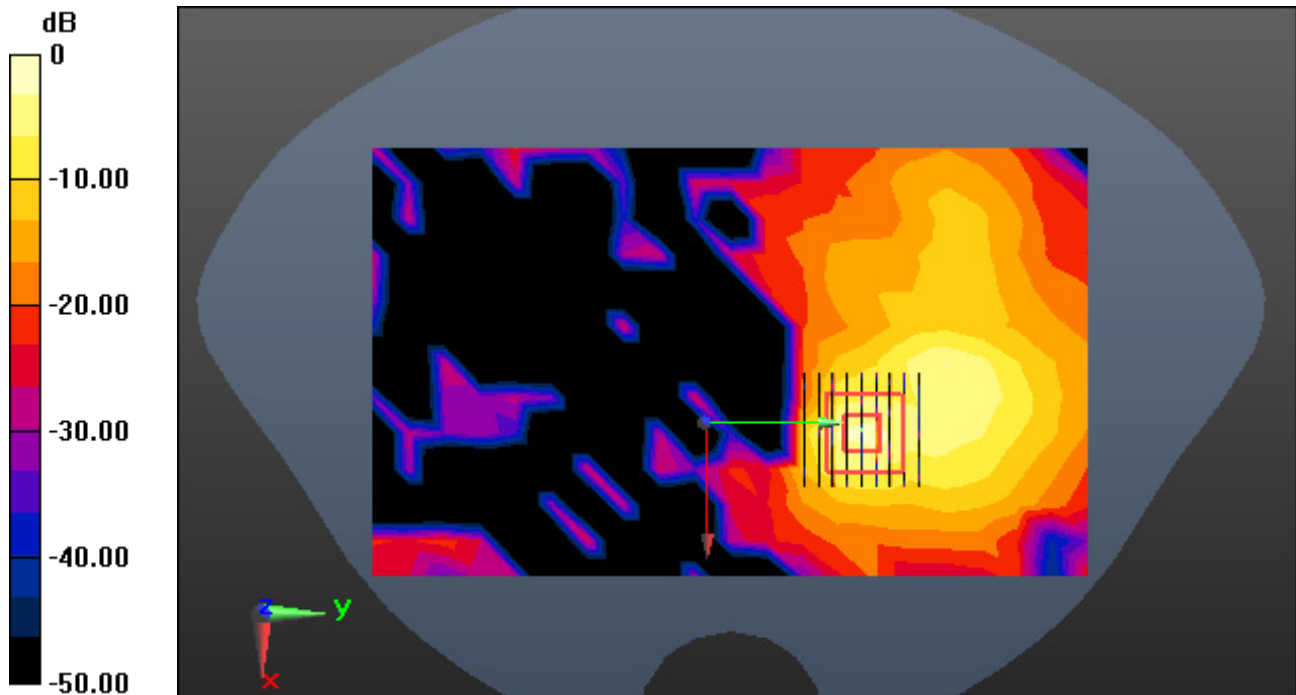

0 dB = 0.550 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.771 \text{ S/m}$; $\epsilon_r = 39.166$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2021_07_13; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-08-27; Ambient Temp: 21.8; Tissue Temp: 21.7

1 cm space from Body, Rear, Bluetooth 1Mbps Ch. 39, Ant Internal


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.032 W/kg

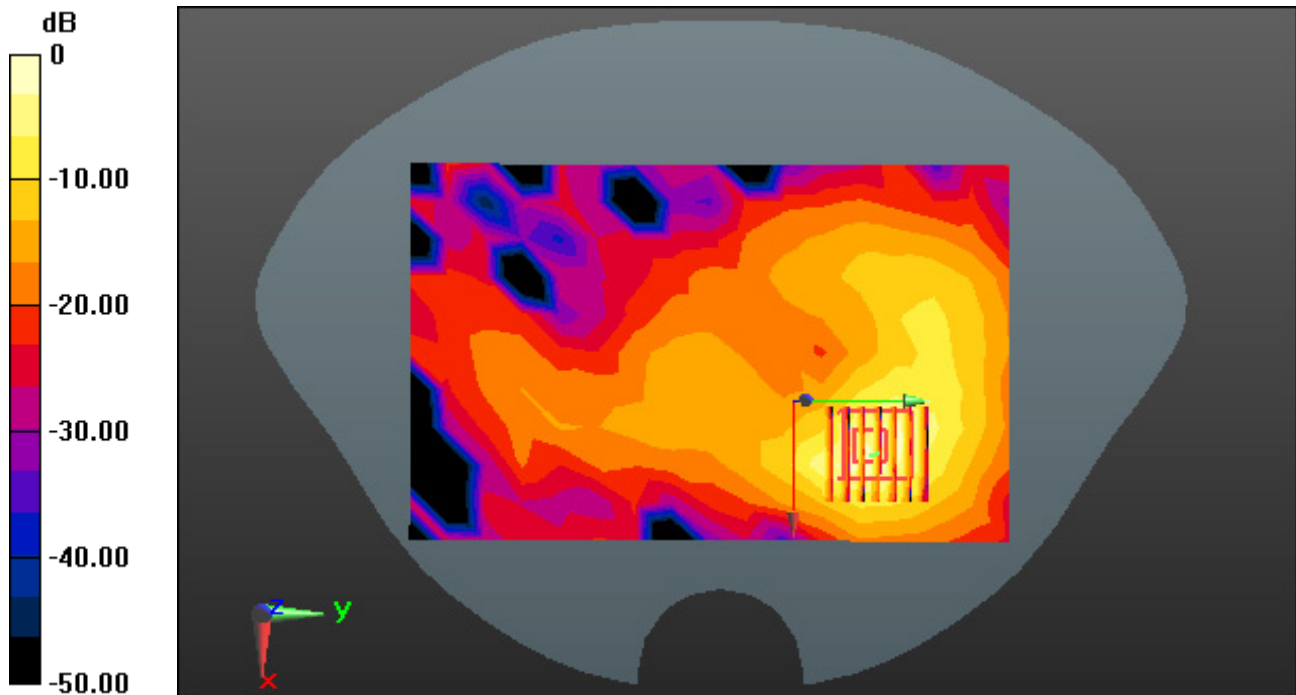

0 dB = 0.139 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.3G(802.11a/n/ac) (0); Frequency: 5290 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.702 \text{ S/m}$; $\epsilon_r = 35.352$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.39, 5.39, 5.39); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-03; Ambient Temp: 21.4; Tissue Temp: 21.1

Touch from Body, Rear, WLAN(802.11ac VHT80) Ch. 58, Ant Internal


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio: 1.4

Power Drift = 0.02 dB

Peak SAR (extrapolated) = 9.46 W/kg

SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.318 W/kg

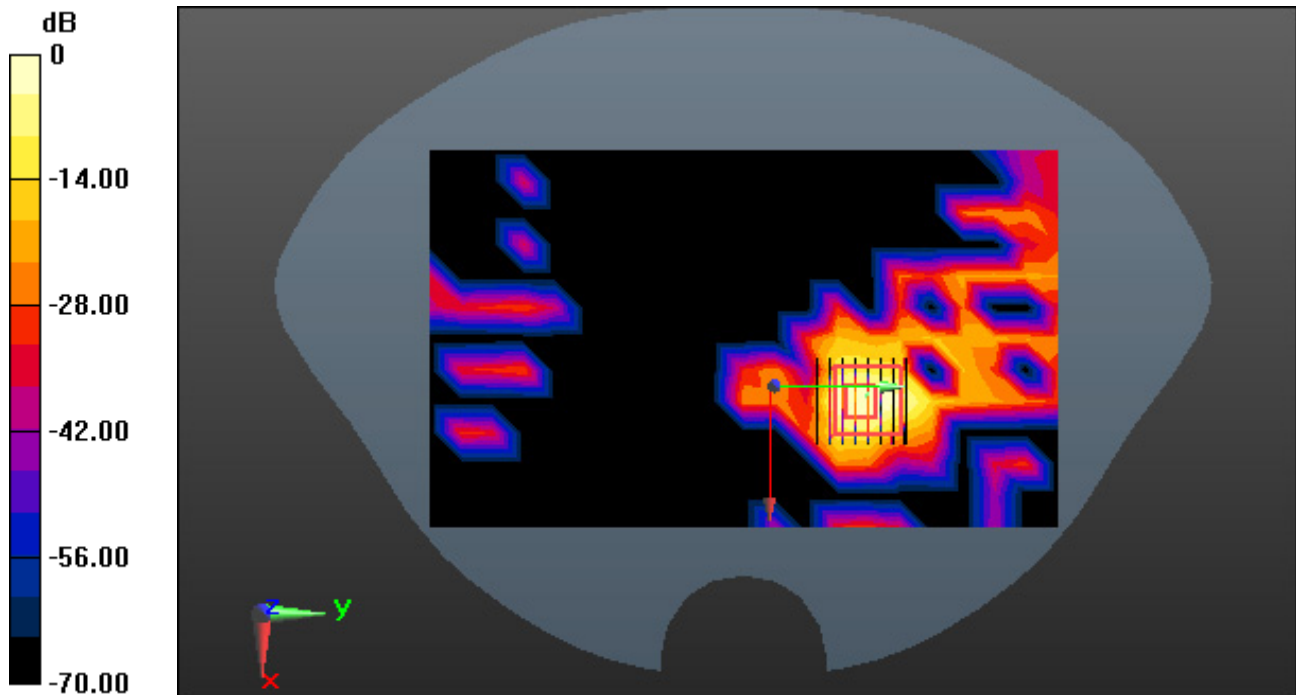

0 dB = 2.00 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.6G(802.11a/n/ac) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.17 \text{ S/m}$; $\epsilon_r = 35.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.84, 4.84, 4.84); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-06; Ambient Temp: 20.7; Tissue Temp: 20.6

Touch from Body, Rear, WLAN(802.11ac VHT80) Ch. 122, Ant Internal


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio: 1.4

Power Drift = -0.07 dB

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 1.89 W/kg; SAR(10 g) = 0.415 W/kg

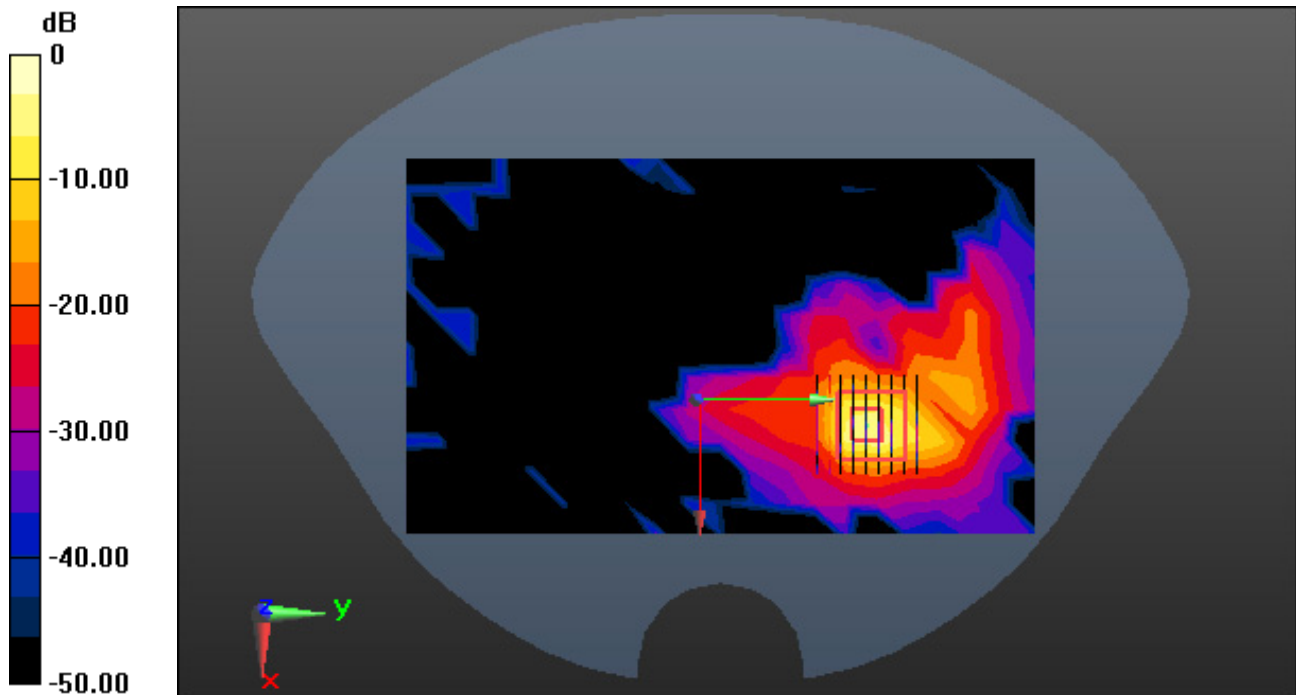

0 dB = 6.15 W/kg

DT&C Co., Ltd.

DUT: EB1086; Type: Bar

Communication System: UID 0, W-LAN 5.8G(802.11a/n/ac) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.39 \text{ S/m}$; $\epsilon_r = 34.544$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(5.03, 5.03, 5.03); Calibrated: 11/27/2020 Electronics: DAE4 Sn1485

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM-twin middle_2013_09_24; Type: QD000P40CD; Serial: 1782

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-09-07; Ambient Temp: 21.0; Tissue Temp: 20.9

Touch from Body, Rear, WLAN(802.11ac VHT80) Ch. 155, Ant Internal


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio: 1.4

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 2.36 W/kg; SAR(10 g) = 0.512 W/kg

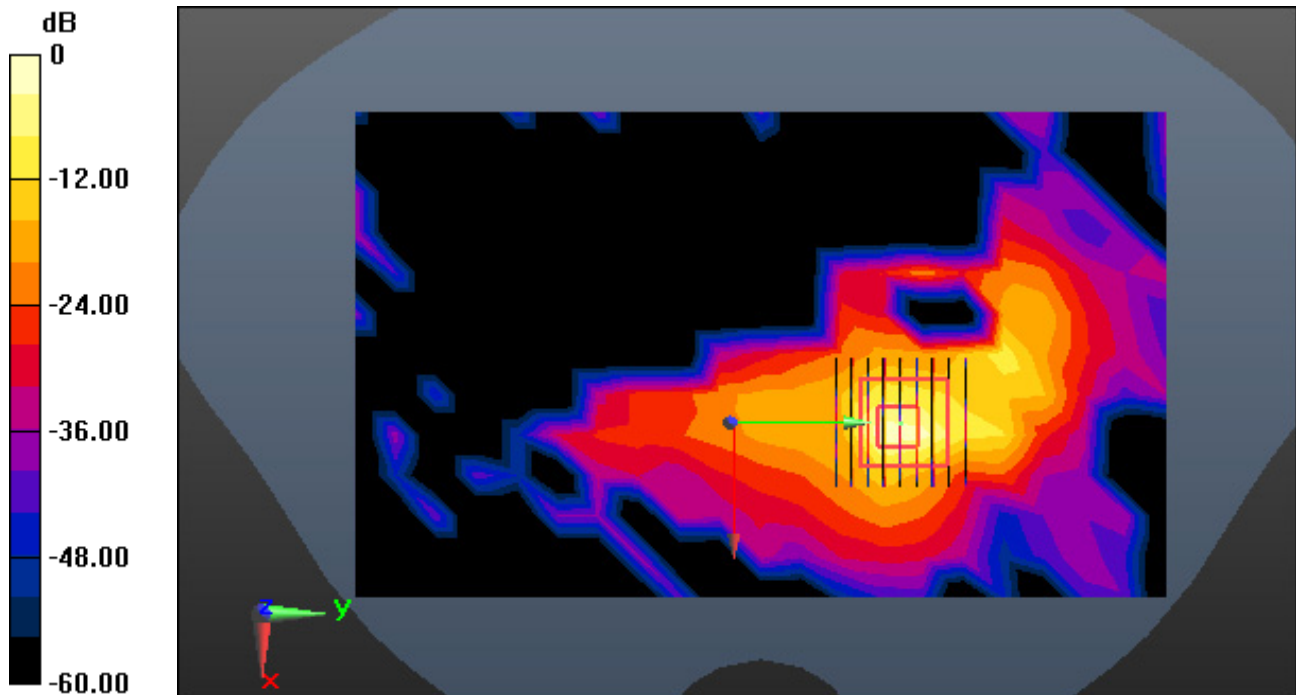

0 dB = 7.74 W/kg