

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1147
FCC ID: JOYEB1147

In accordance with FCC Part 15 Subpart C (15.225)

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-22210-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	2022.11.28

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY – Result: Complied

A sample of this product was tested and the result above was confirmed in accordance with FCC Part 15 Subpart C (15.225).



Certificate #3686.03

DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
www.tuvsud.com/ja-jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information	3
1.7	Test set up	3
1.8	Test period	3
2	Equipment Under Test	4
2.1	EUT information	4
2.2	Modification to the EUT	4
2.3	Variation of family model(s)	5
2.4	Operating mode	5
2.5	Operating flow	5
3	Configuration of Equipment	6
3.1	Equipment used	6
3.2	Cable(s) used	6
3.3	System configuration	6
4	Test Result	7
4.1	Operation within the band 13.110-14.010MHz	7
4.2	Radiated Emissions	11
4.3	AC Power Line Conducted Emissions	15
5	Antenna requirement	19
6	Measurement Uncertainty	20
7	Laboratory Information	21
	Appendix A. Test Equipment	22

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-22210-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 15 Subpart C (15.225)

1.3 Test methods

ANSI C63.10-2013

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1049 RSS-Gen 6.7	Occupied Bandwidth	Conducted	PASS	*1
15.209 15.225 (a)(b)(c)(d)	Operation within the band 13.110-14.010MHz	Radiated	PASS	*1
15.209 15.225 (d)	Transmitter Radiated Spurious Emissions	Radiated	PASS	-
15.225 (e)	Frequency Tolerance	Conducted	PASS	*1
15.207	AC Power Line Conducted Emissions	Conducted	PASS	-

*1 Since there is no change in Module from FCC ID: JOYEB1146, only the Radiated test items were performed. Please refer to the test report "JPD-TR-22194-0" of "FCC ID: JOYEB1146".

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

8-November-2022 - 14-November-2022

2 Equipment Under Test

All information in this chapter was provided by the applicant.

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1147
Serial number	358067760004090
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.87 V
Size	(W) 72 mm × (D) 156 mm × (H) 8.9 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20 °C to 60 °C
Hardware version	DMT
Software version	0.100CX.9011.a
Firmware version	Not applicable
RF Specification	
Frequency range	13.56MHz
Modulation method	ASK
Antenna type	Loop antenna

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1147, Serial Number: 358067760004090			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Operating mode

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Y-axis and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

2.5 Operating flow

[Tx mode]

- i) NFC test program setup to the Software
- ii) Start test mode

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.3 System configuration” correspond to the list in “3.1 Equipment used” and “3.2 Cable(s) used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1147	358067760004090	JOYEB1147	EUT
2	AC Adapter	KDDI	0602PQA	N/A	N/A	*


*:AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Equipment	Length[m]	Shield	Connector	Comment
a	USB cable (for AC Adapter)	1.5	No	Plastic	*

*:AC power line Conducted Emission Test.

3.3 System configuration

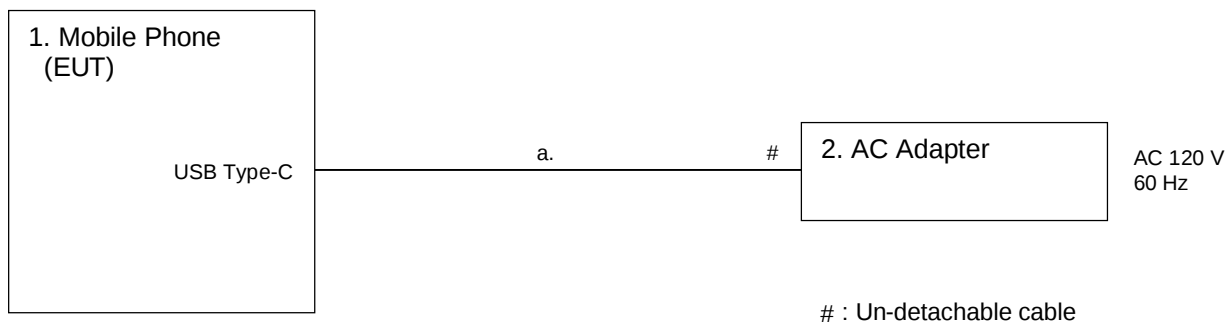

4 Test Result

4.1 Operation within the band 13.110-14.010MHz

4.1.1 Measurement procedure

[FCC 15.209, 15.225 (a)(b)(c)(d)]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 13.110MHz to 14.010MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m

Test receiver setting

- Detector	: Quasi-peak
- Bandwidth	: 9kHz

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Then, emission measurements frequency range 13.110MHz to 14.010MHz were performed with test receiver in above setting. The turntable and the Loop antenna are rotated by 360 degrees and stopped at azimuth of producing the maximum emission. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition.

- Test configuration

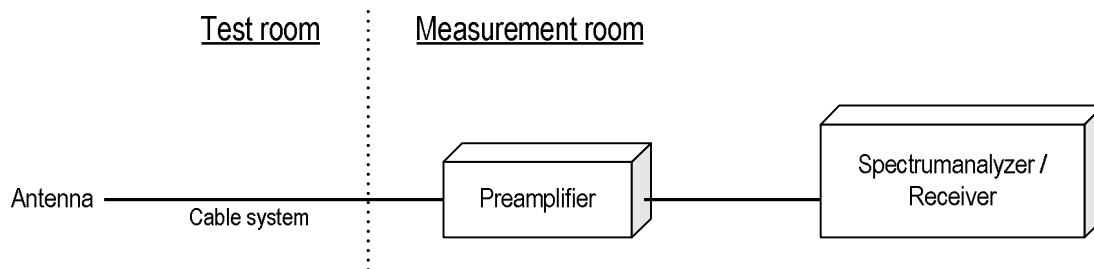

4.1.2 Calculation method

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)
Margin = Limit – Emission level

4.1.3 Limit

- (a) The field strength of any emissions within the band 13.553-13.567MHz shall not exceed 15,848uV/m at 30m.
- (b) Within the band 13.410-13.553MHz and 13.567-13.710MHz, the field strength of any emissions shall not exceed 334uV/m at 30m.
- (c) Within the band 13.110-13.410MHz and 13.710-14.010MHz, the field strength of any emissions shall not exceed 106uV/m at 30m.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010MHz and shall not exceed the general radiated emission limits in FCC 15.209.

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. Measurements were corrected to 30m using $40\log(3/30) = -40.0\text{dB}$

4.1.4 Test data

Date : 14-November-2022
 Temperature : 22.1 [°C]
 Humidity : 31.2 [%]
 Test place : 3m Semi-anechoic chamber


Test engineer : Chiaki Kanno

Frequency range (MHz)	Frequency (MHz)	Level		Limit (dBuV/m)	Margin (dB)	Result
		Measured at 3m (dBuV/m)	Measured at 30m (dBuV/m)			
13.553-13.567	13.560	53.3	13.3	84.0	70.7	PASS
13.41-13.553	13.552	46.0	6.0	50.5	44.5	PASS
13.567-13.71	13.568	45.5	5.5	50.5	45.0	PASS
13.11-13.41	13.347	36.8	-3.2	40.5	43.7	PASS
13.71-14.01	13.771	36.1	-3.9	40.5	44.4	PASS
12.66-13.11	12.876	31.5	-8.5	29.5	38.0	PASS
14.01-14.46	14.400	30.1	-9.9	29.5	39.4	PASS

4.1.5 Trace data

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1147
 Serial No. : 358067760004090
 Test mode : FeijCa

Sheet No. : 02
 Standard : FCC 15.225
 Operator : C.Kanno
 Temp,Hum,Atm : 22.1[°C] 31.2[%]
 Note1 : Vertical(Z axis)

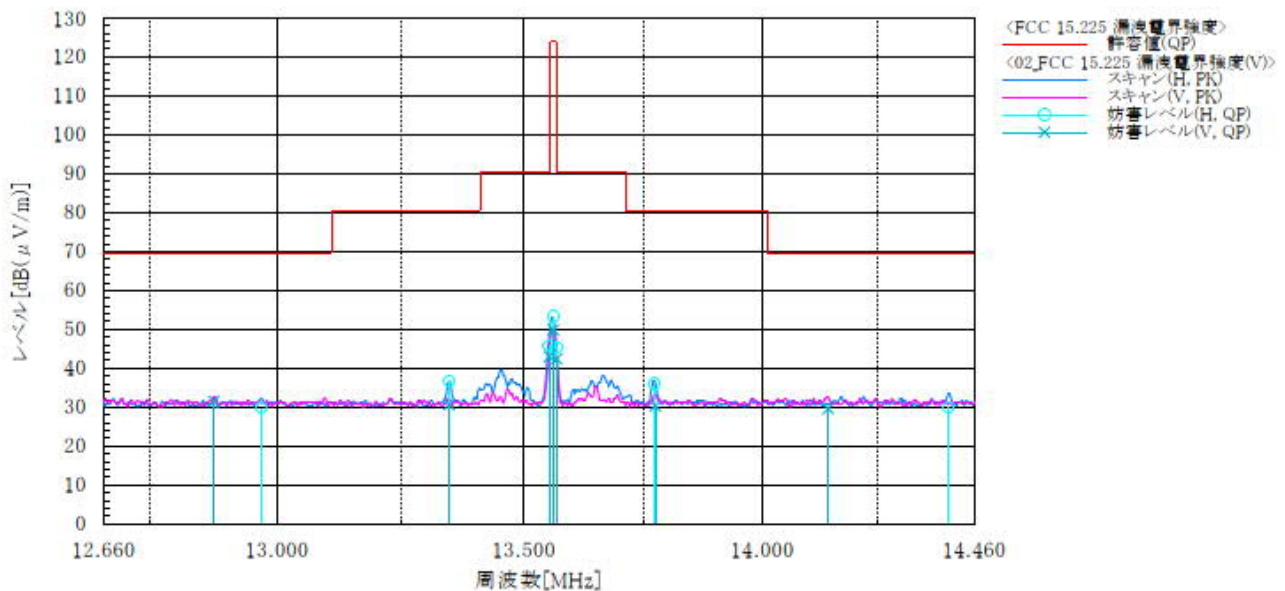


Final Result

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[deg]	
1	13.560	V	56.4	-6.5	49.9	124.0	74.1	100.0	274.0	
2	13.552	V	49.5	-6.5	43.0	90.5	47.5	100.0	274.0	
3	13.568	V	49.0	-6.5	42.5	90.5	48.0	100.0	274.0	
4	13.347	V	37.2	-6.5	30.7	80.5	49.8	100.0	240.0	
5	13.773	V	36.7	-6.4	30.3	80.5	50.2	100.0	322.0	
6	12.876	V	38.0	-6.5	31.5	69.5	38.0	100.0	68.0	
7	14.142	V	36.0	-6.4	29.6	69.5	39.9	100.0	232.0	
8	13.560	H	59.8	-6.5	53.3	124.0	70.7	100.0	350.0	
9	13.552	H	52.5	-6.5	46.0	90.5	44.5	100.0	350.0	
10	13.568	H	52.0	-6.5	45.5	90.5	45.0	100.0	350.0	
11	13.347	H	43.3	-6.5	36.8	80.5	43.7	100.0	9.0	
12	13.771	H	42.5	-6.4	36.1	80.5	44.4	100.0	319.0	
13	12.969	H	36.4	-6.5	29.9	69.5	39.6	100.0	355.0	
14	14.405	H	36.5	-6.4	30.1	69.5	39.4	100.0	341.0	

Company name : KYOCERA Corporation
EUT : Mobile Phone
Model No. : EB1147
Serial No. : 358067760004090
Test mode : FeLiCa

Sheet No. : 01
Standard : FCC 15.225
Operator : C.Kanno
Temp,Hum,Atm : 22.1[°C] 31.2[%]
Note1 : Horizontal(X axis)

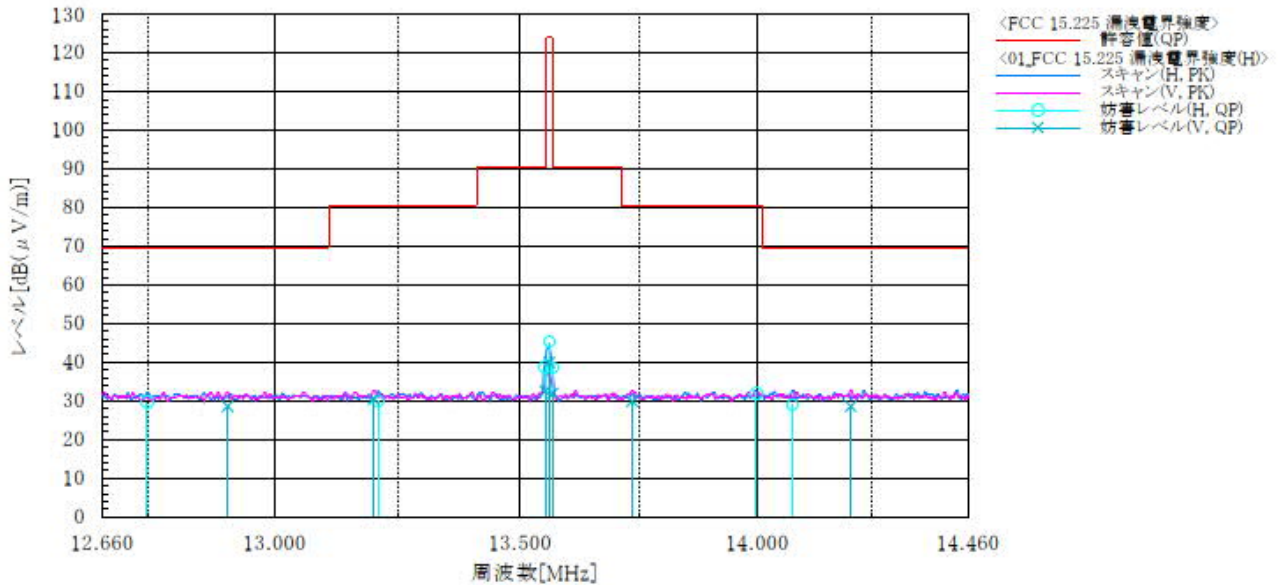

Final Result

No.	Frequency [MHz]	Pol	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	13.560	V	46.5	-6.5	40.0	124.0	84.0	100.0	320.0	
2	13.552	V	39.0	-6.5	32.5	90.5	58.0	100.0	320.0	
3	13.568	V	38.4	-6.5	31.9	90.5	58.6	100.0	320.0	
4	13.200	V	37.0	-6.5	30.5	80.5	50.0	100.0	12.0	
5	13.734	V	36.4	-6.5	29.9	80.5	50.6	100.0	155.0	
6	12.907	V	35.1	-6.5	28.6	69.5	40.9	100.0	41.0	
7	14.203	V	35.0	-6.4	28.6	69.5	40.9	100.0	25.0	
8	13.560	H	51.8	-6.5	45.3	124.0	78.7	100.0	214.0	
9	13.552	H	45.3	-6.5	38.8	90.5	51.7	100.0	214.0	
10	13.568	H	45.2	-6.5	38.7	90.5	51.8	100.0	214.0	
11	13.209	H	36.6	-6.5	30.1	80.5	50.4	100.0	113.0	
12	13.998	H	38.4	-6.4	32.0	80.5	48.5	100.0	120.0	
13	12.749	H	36.3	-6.5	29.8	69.5	39.7	100.0	341.0	
14	14.076	H	35.4	-6.4	29.0	69.5	40.5	100.0	116.0	

4.2 Radiated Emissions

4.2.1 Measurement procedure

[FCC 15.209, 15.225 (d)]

Test was applied by following conditions.

Test method	: ANSI C63.10
Frequency range	: 9kHz to 30MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m

Test receiver setting


- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 9kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Then, emission measurements up to 30MHz were performed with test receiver in above setting. The turntable and the Loop antenna are rotated by 360 degrees and stopped at azimuth of producing the maximum emission. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition.

- Test configuration

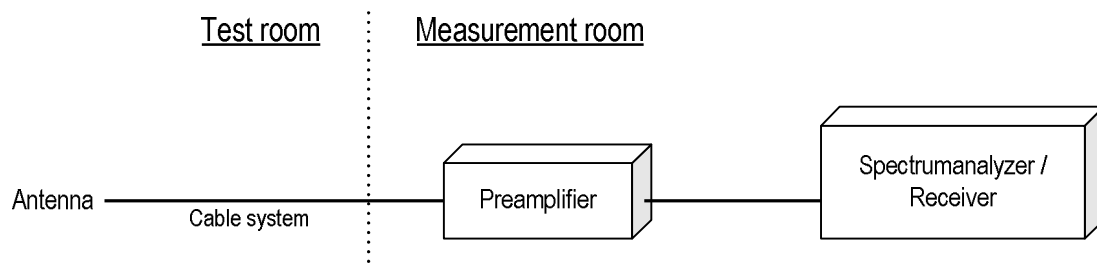


Test was applied by following conditions.

Test method	: ANSI C63.10
Frequency range	: 30MHz to 1000MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m

Test receiver setting	
- Detector	: Quasi-peak
- Bandwidth	: 120kHz

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Then, emission measurements up to 1000MHz were performed with test receiver in above setting. In order to find the maximum emissions, antenna is adjusted between 1m and 4m in height and varied its polarization (horizontal and vertical), and EUT azimuth was also varied by rotating turntable 0 to 360 degrees. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition.

- Test configuration

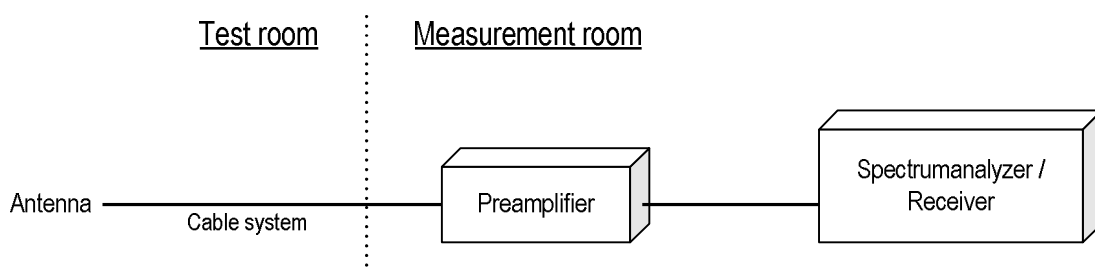

4.2.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 1000MHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

4.2.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	$2400 / F$ [kHz]	$20\log E$ [uV/m]	300
0.490-1.705	$24000 / F$ [kHz]	$20\log E$ [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = $20\log$ Emission [uV/m]
3. Measurements were corrected to 300m using $40\log (3/300) = -80.0\text{dB}$
Measurements were corrected to 30m using $40\log (3/30) = -40.0\text{dB}$

4.2.4 Test data

Date : 14-November-2022
 Temperature : 22.1 [°C]
 Humidity : 31.2 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno


[9kHz to 30MHz]

Frequency (MHz)	Reading [dBuV] At 3m	c.f [dB(1/m)]	Result [dBuV/m] At 3m	Result [dBuV/m] At 30m	Limit [dBuV/m] At 30m	Margin (dB)	Result
27.12	37.3	-5.5	31.8	-8.2	29.5	37.7	PASS

[30MHz to 1000MHz]

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1147
 Serial No. : 358067760004090
 Test mode : NFC

Sheet No. : 03
 Standard : FCC 15.225
 Operator : C.Kanno
 Temp,Hum,Atm : 22.1[°C] 31.2[%]
 Note1 : Z axis

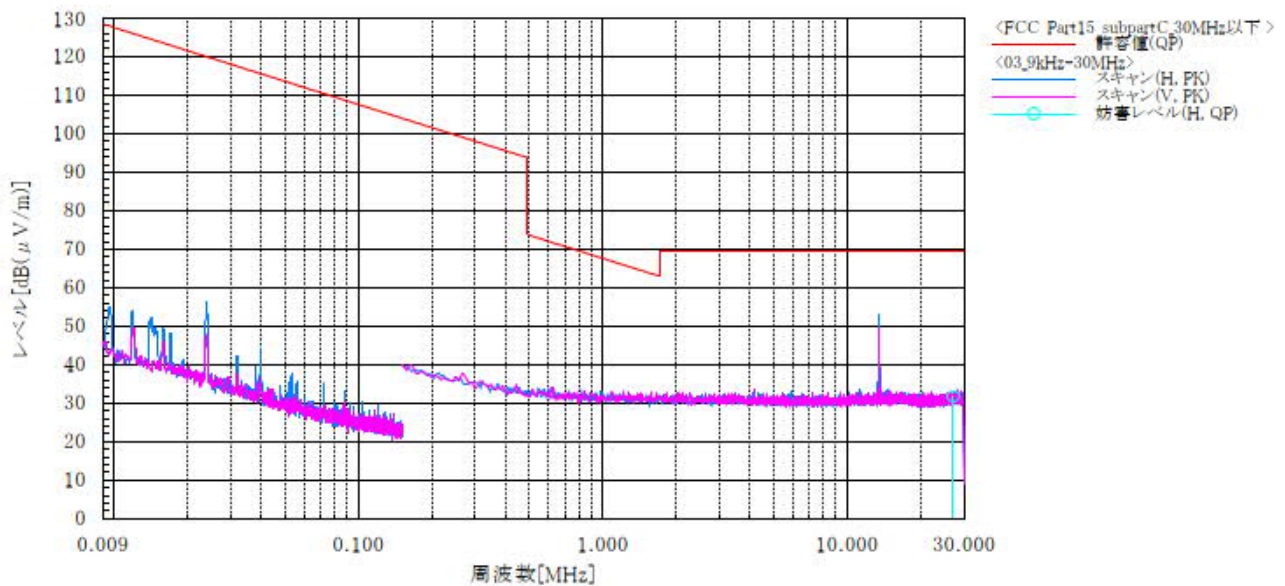

Final Result

No.	Frequency [MHz]	Pol	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	27.120	H	37.3	-5.5	31.8	69.5	37.7	100.0	0.0	

4.3 AC Power Line Conducted Emissions

4.3.1 Measurement procedure

[FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 0.15 MHz to 30 MHz
Test place	: 3 m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0 m × (D)1.0 m × (H)0.8 m
Vertical Metal Reference Plane	: (W)2.0 m × (H)2.0 m 0.4 m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9 kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

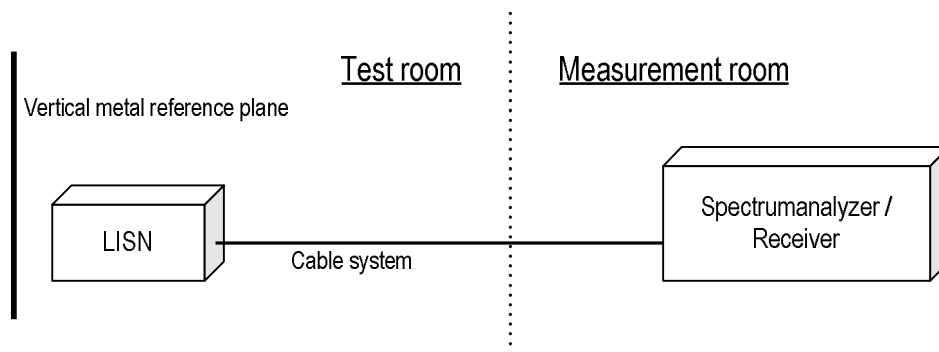

4.3.2 Calculation method

Emission level = Reading + (LISN. Factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 6.770 MHz: 60.0 dBμV(Quasi-peak)

: 50.0 dBμV(Average)

(Quasi peak) Reading = 41.2 dBμV c.f = 10.3 dB

Emission level = 41.2 + 10.3 = 51.5 dBμV

Margin = 60.0 – 51.5 = 8.5 dB

(Average) Reading = 35.0 dBμV c.f = 10.3 dB

Emission level = 35.0 + 10.3 = 45.3 dBμV

Margin = 50.0 – 45.3 = 4.7 dB

4.3.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

4.3.4 Measurement result

Date : 8-November-2022

Temperature : 21.3 [°C]

Humidity : 31.1 [%]

Test place : 3m Semi-anechoic chamber


Test engineer :

Tadahiro Seino

4.3.5 Test data

[Transmit ON]

Company name	: KYOCERA Corporation	Standard	: FCC Part 15 Subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1147	Temp,Hum,Atm	: 21.3 [°C], 31.1 [%]
Serial No.	: 358067760004090	Note1	:
Test mode	: NFC_13.56MHz_Transmit_ON	Note2	:

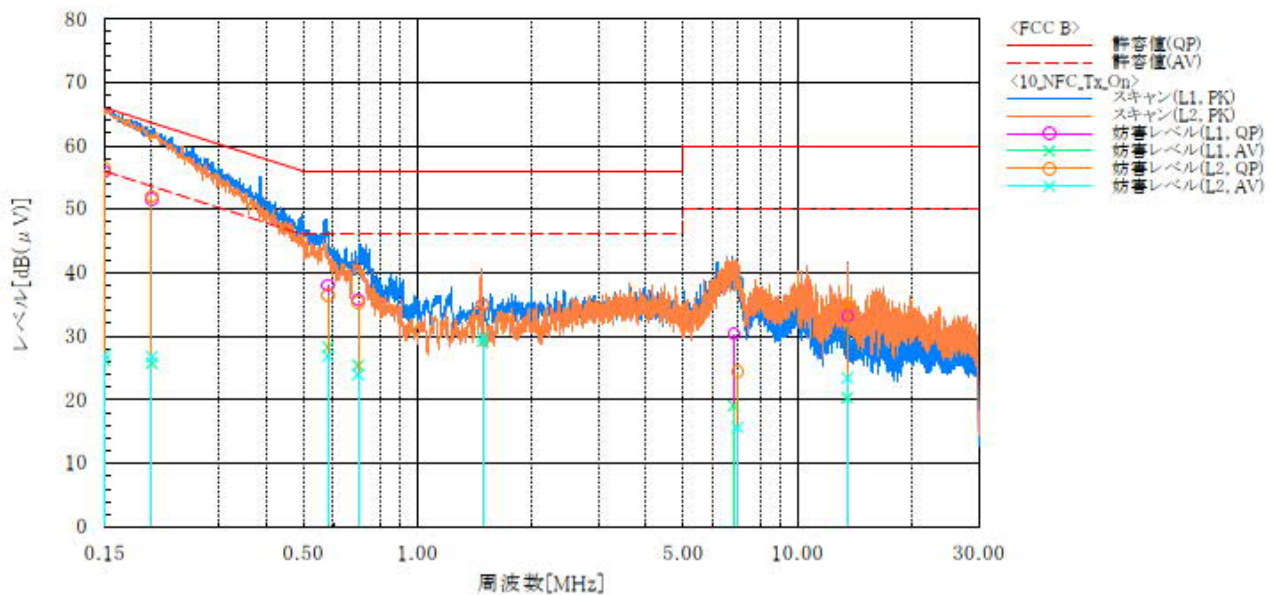


Final Result

--- L1 ---											
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Remark
	[MHz]	QP	AV		QP	AV	QP	AV	QP	AV	
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.150	45.3	15.6	10.6	55.9	26.2	66.0	56.0	10.1	29.8	
2	0.200	41.1	15.3	10.5	51.6	25.8	63.6	53.6	12.0	27.8	
3	0.583	27.6	17.9	10.4	38.0	28.3	56.0	46.0	18.0	17.7	
4	0.700	25.3	15.0	10.4	35.7	25.4	56.0	46.0	20.3	20.6	
5	1.486	24.5	18.7	10.5	35.0	29.2	56.0	46.0	21.0	16.8	
6	6.808	19.5	8.1	10.9	30.4	19.0	60.0	50.0	29.6	31.0	
7	13.560	21.7	8.8	11.5	33.2	20.3	60.0	50.0	26.8	29.7	
--- L2 ---											
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Remark
	[MHz]	QP	AV		QP	AV	QP	AV	QP	AV	
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.150	45.8	16.4	10.6	56.4	27.0	66.0	56.0	9.6	29.0	
2	0.200	41.5	16.2	10.5	52.0	26.7	63.6	53.6	11.6	26.9	
3	0.582	26.0	16.4	10.4	36.4	26.8	56.0	46.0	19.6	19.2	
4	0.700	24.9	13.6	10.4	35.3	24.0	56.0	46.0	20.7	22.0	
5	1.486	24.4	19.4	10.5	34.9	29.9	56.0	46.0	21.1	16.1	
6	6.960	13.5	4.7	10.9	24.4	15.6	60.0	50.0	35.6	34.4	
7	13.560	23.6	11.8	11.6	35.2	23.4	60.0	50.0	24.8	26.6	

[Transmit OFF]

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : EB1147
 Serial No. : 358067760004090
 Test mode : NFC_13.56MHz_Transmit_OFF

Standard : FCC Part 15 Subpart C
 Operator : T.Seino
 Temp.Hum.Attn : 21.3 [°C], 31.1 [%]
 Note1 :
 Note2 :

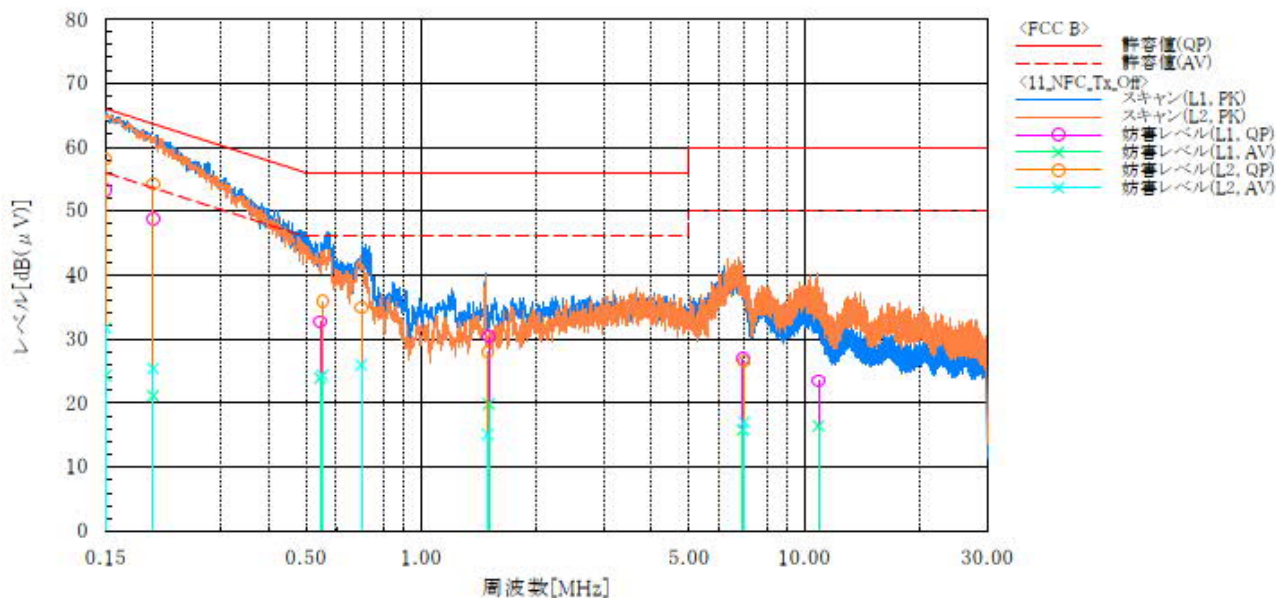**Final Result**

--- L1 ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	0.150	42.7	13.6	10.6	53.3	24.2	66.0	56.0	12.7	31.8	
2	0.200	38.3	10.6	10.5	48.8	21.1	63.6	53.6	14.8	32.5	
3	0.546	22.3	13.5	10.4	32.7	23.9	56.0	46.0	23.3	22.1	
4	1.502	19.9	9.3	10.5	30.4	19.8	56.0	46.0	25.6	26.2	
5	6.915	16.0	4.9	10.9	26.9	15.8	60.0	50.0	33.1	34.2	
6	10.904	12.2	5.1	11.3	23.5	16.4	60.0	50.0	36.5	33.6	

--- L2 ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	0.150	47.5	21.2	10.6	58.1	31.8	66.0	56.0	7.9	24.2	
2	0.200	43.7	14.9	10.5	54.2	25.4	63.6	53.6	9.4	28.2	
3	0.553	25.5	13.9	10.4	35.9	24.3	56.0	46.0	20.1	21.7	
4	0.700	24.5	15.5	10.4	34.9	25.9	56.0	46.0	21.1	20.1	
5	1.491	17.5	4.6	10.5	28.0	15.1	56.0	46.0	28.0	30.9	
6	6.973	15.6	6.1	10.9	26.5	17.0	60.0	50.0	33.5	33.0	



Japan



5 Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

6 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.7 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9kHz – 30 MHz)	± 3.2 dB
Radiated emission (30 MHz – 1000 MHz)	± 5.3 dB
Radiated emission (1 GHz – 6 GHz)	± 4.8 dB
Radiated emission (6 GHz – 18 GHz)	± 4.5 dB
Radiated emission (18 GHz – 40 GHz)	± 6.4 dB
Radio Frequency	$\pm 1.4 \times 10^{-8}$
RF power, conducted	± 0.8 dB
Adjacent channel power	± 2.4 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Standard limit value +Uncertainty -Uncertainty Measured value Case1  Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case2  Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	
FAIL	Standard limit value +Uncertainty -Uncertainty Measured value Case3  Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case4  Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	



Japan

7 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

Appendix A. Test Equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2023	14-Sep-2022
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	30-Sep-2023	05-Sep-2022
Spectrum analyzer	ROHDE&SCHWARZ	FSV40	101731	31-Mar-2023	03-Mar-2022
Preamplifier	SONOMA	310	372170	30-Sep-2023	28-Sep-2022
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	30-Apr-2023	18-Apr-2022
Attenuator	TOYO Connector	NA-PJ-6	N/A(S507)	28-Feb-2023	03-Feb-2022
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1333	31-Dec-2022	15-Dec-2021
Log periodic antenna	Schwarzbeck	VUSLP9111B	346	30-Nov-2022	08-Nov-2021
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2023	28-Sep-2022
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2023	14-Jul-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	my24610/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/2m	SN MY28404/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/7m	41625/6	31-Dec-2022	22-Dec-2021
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2023	28-May-2022
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2023	28-May-2022

Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2023	14-Sep-2022
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	31-Dec-2022	22-Dec-2021
Line impedance stabilization network	Kyoritsu Electrical Works, Ltd.	TNW-407F2	12-17-110-2	30-Jun-2023	15-Jun-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/5m	MY33601/4	31-Oct-2023	22-Oct-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	MY37268/4	31-Oct-2023	22-Oct-2022
Coaxial cable	HUBER+SUHNER	RG214/U/10m	N/A (S194)	31-Dec-2022	22-Dec-2021
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.