

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1155
FCC ID: JOYEB1155

In accordance with FCC Part 24 Subpart E

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-22224-1

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	2023.01.06

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY - Result: Complied

A sample(s) of this product was tested and the result above was confirmed in accordance with FCC Part 24 Subpart E.



ACCREDITED
Certificate #3686.03

DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
www.tuvsud.com/ja-jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information	3
1.7	Test set up	3
1.8	Test period	4
2	Equipment Under Test	5
2.1	EUT information	5
2.2	Modification to the EUT	7
2.3	Variation of family model(s)	7
2.4	Description of test mode	7
3	Configuration of Equipment	8
3.1	Equipment used	8
3.2	System configuration	8
4	Test Result	9
4.1	Equivalent Isotropic Radiated Power	9
4.2	Peak to Average Ratio	15
4.3	Occupied Bandwidth	25
4.4	Band Edge Spurious and Harmonic at Antenna Terminals	35
4.5	Radiated Emissions and Harmonic Emissions	85
4.6	Frequency Stability	94
5	Measurement Uncertainty	97
6	Laboratory Information	98
	Appendix A. Test Equipment	99

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-22224-0	First Issue	20-December-2022
JPD-TR-22224-1	Conducted test results for EB1146 added.	Refer to the cover page

1.2 Standards

CFR47 FCC Part 24 Subpart E

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA 603-E-2016
ANSI C63.26-2015

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
24.232(c)	Equivalent Isotropic Radiated Power	Radiated	PASS	-
24.232(d)	Peak to Average Ratio	Conducted	PASS	*2
24.238(a) 2.1049	Occupied Bandwidth	Conducted	PASS	*2
24.238(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	*2
24.238(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
24.235 2.1055	Frequency Stability	Conducted	PASS	*2

*1 Refer to RF Exposure Report (Test Report SAR).

*2 Since there is no change in Module from FCC ID: JOYEB1146, only the Radiated test items were performed. Conduction test results are listed as "JPD-TR-22196-0" of "FCC ID: JOYEB1146".

1.6 Test information

None

1.7 Test set up

Table-top



Japan

1.8 Test period

29-November-2022 - 8-December-2022

2 Equipment Under Test

All information in this chapter was provided by the applicant.

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1155
Serial number	352034010006446, 352034010006495
Trade name	Kyocera
Number of sample(s)	2
EUT condition	Pre-Production
Power rating	Battery: DC 3.87 V
Size	(W) 70 mm × (D) 161 mm × (H) 8.9 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20 °C to 60 °C
Hardware version	DMT
Software version	0.100ML.9013.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link GSM1900: 1850.2-1909.8 MHz WCDMA Band II: 1852.4-1907.6MHz LTE Band II: 1850.7-1909.3MHz Down Link GSM1900: 1930.2-1989.8 MHz WCDMA Band II: 1932.4-1987.6MHz LTE Band II: 1930.7-1989.3MHz
Modulation type	GSM1900: GMSK WCDMA Band II: QPSK, 16QAM LTE Band II: QPSK, 16QAM, 64QAM
Emission designator	GSM1900: 244KGXW WCDMA Band II: 4M14F9W LTE Band II: BW 1.4M QPSK: 1M10G7D, 16QAM: 1M10W7D, 64QAM: 1M09W7D BW 3M QPSK: 2M71G7D, 16QAM: 2M70W7D, 64QAM: 2M71W7D BW 5M QPSK: 4M51G7D, 16QAM: 4M50W7D, 64QAM: 4M50W7D BW 10M QPSK: 8M98G7D, 16QAM: 8M99W7D, 64QAM: 8M98W7D BW 15M QPSK: 13M5G7D, 16QAM: 13M4W7D, 64QAM: 13M5W7D BW 20M QPSK: 18M0G7D, 16QAM: 17M9W7D, 64QAM: 17M9W7D



Japan

Equivalent Isotropic Radiated Power (E.I.R.P)	GSM1900: 1.778 W (32.5dBm) WCDMA Band II: 0.447W (26.5dBm) LTE Band II: 0.427W (26.3dBm)
Antenna type	Internal antenna
Antenna gain	GSM1900: -1.2 dBi WCDMA Band II: -1.2 dBi LTE Band II: -1.2 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1155, Serial Number: 352034010006446, 352034010006495			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
GSM1900	GMSK	-	512, 661, 810	1850.2, 1880.0, 1909.8
WCDMA Band II	QPSK, 16QAM	-	9262, 9400, 9538	1852.4, 1880.0, 1907.6
LTE Band II	QPSK, 16QAM, 64QAM	1.4	18607, 18900, 19193	1850.7, 1880.0, 1909.3
		3	18615, 18900, 19185	1851.5, 1880.0, 1908.5
		5	18625, 18900, 19175	1852.5, 1880.0, 1907.5
		10	18650, 18900, 19150	1855.0, 1880.0, 1905.0
		15	18675, 18900, 19125	1857.5, 1880.0, 1902.5
		20	18700, 18900, 19100	1860.0, 1880.0, 1900.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis (GSM1900, WCDMA Band II and LTE Band II) and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1155	352034010006446 352034010006495	JOYEB1155	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Equivalent Isotropic Radiated Power

4.1.1 Measurement procedure

[FCC 24.232(c)]

<Step 1>

The EUT and support equipment are placed on a 0.6 meter x 0.6 meter surface, 1.5 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- Span = 1.5 times the OBW
- RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of sweep points $\geq 2 \times$ span / RBW
- Sweep time = auto-couple
- Detector = RMS (power averaging)
- If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

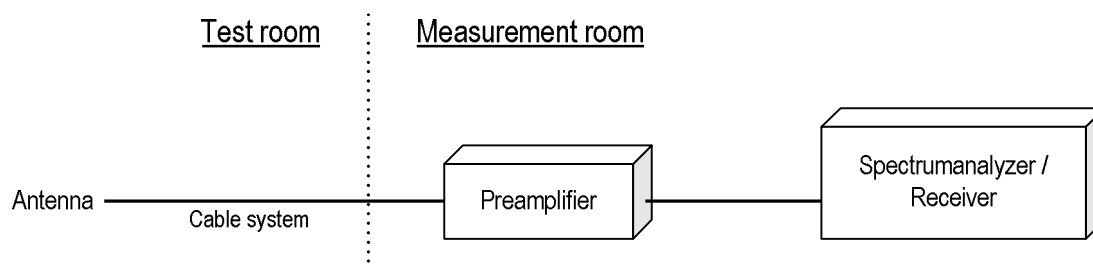

4.1.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1880 MHz: 33.0 dBm

Ant. Input = 25.0 dBm Cable loss = 1.1dB Ant. Gain = 4.7 dBi

Result = 25.0 - 1.1 + 4.7 = 28.6 dBm

Margin = 33.0 - 28.6 = 4.4 dB

4.1.3 Limit

2 W (33 dBm)

4.1.4 Test data

Date : 29~30-November-2022
 Temperature : 23.6 [°C]
 Humidity : 32.9 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 30-November~1-December-2022
 Temperature : 23.7 [°C]
 Humidity : 29.7 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 1~2-December-2022
 Temperature : 22.4 [°C]
 Humidity : 31.2 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 3~4-December-2022
 Temperature : 21.9 [°C]
 Humidity : 31.5 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

[GSM1900]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1850.2	-49.7	28.7	1.2	4.9	32.5	1.778	33.0	0.5
H	1880.0	-50.4	27.2	1.2	4.8	30.8	1.202	33.0	2.2
H	1909.8	-49.8	27.7	1.2	4.6	31.1	1.288	33.0	1.9

[WCDMA Band II]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1852.4	-26.7	22.4	1.2	4.9	26.2	0.417	33.0	6.8
H	1880.0	-26.0	22.6	1.2	4.8	26.2	0.417	33.0	6.8
H	1907.6	-25.8	23.1	1.2	4.6	26.5	0.447	33.0	6.5

[LTE Band II]
QPSK, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1850.7	-27.2	22.2	1.2	4.9	26.0	0.398	33.0	7.0
H	1880.0	-26.4	22.4	1.2	4.8	26.0	0.398	33.0	7.0
H	1909.3	-26.9	22.3	1.2	4.6	25.7	0.372	33.0	7.3

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1850.7	-28.3	21.1	1.2	4.9	24.9	0.309	33.0	8.1
H	1880.0	-27.3	21.5	1.2	4.8	25.1	0.324	33.0	7.9
H	1909.3	-27.5	21.7	1.2	4.6	25.1	0.324	33.0	7.9

64QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1850.7	-28.9	20.5	1.2	4.9	24.3	0.269	33.0	8.7
H	1880.0	-28.0	20.8	1.2	4.8	24.4	0.275	33.0	8.6
H	1909.3	-28.7	20.5	1.2	4.6	23.9	0.245	33.0	9.1

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1851.5	-27.2	22.4	1.2	4.9	26.2	0.417	33.0	6.8
H	1880.0	-26.6	22.2	1.2	4.8	25.8	0.380	33.0	7.2
H	1908.5	-27.1	21.9	1.2	4.6	25.3	0.339	33.0	7.7

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1851.5	-28.3	21.3	1.2	4.9	25.1	0.324	33.0	7.9
H	1880.0	-27.2	21.6	1.2	4.8	25.2	0.331	33.0	7.8
H	1908.5	-27.9	21.1	1.2	4.6	24.5	0.282	33.0	8.5

64QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1851.5	-29.0	20.6	1.2	4.9	24.4	0.275	33.0	8.6
H	1880.0	-28.3	20.5	1.2	4.8	24.1	0.257	33.0	8.9
H	1908.5	-29.0	20.0	1.2	4.6	23.4	0.219	33.0	9.6

[LTE Band II]**QPSK, BW 5MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1852.5	-27.2	22.3	1.2	4.9	26.0	0.398	33.0	7.0
H	1880.0	-26.4	22.4	1.2	4.8	26.0	0.398	33.0	7.0
H	1907.5	-27.1	22.1	1.2	4.6	25.5	0.355	33.0	7.5

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1852.5	-28.0	21.5	1.2	4.9	25.2	0.331	33.0	7.8
H	1880.0	-27.4	21.4	1.2	4.8	25.0	0.316	33.0	8.0
H	1907.5	-27.6	21.6	1.2	4.6	25.0	0.316	33.0	8.0

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1852.5	-28.9	20.6	1.2	4.9	24.3	0.269	33.0	8.7
H	1880.0	-28.1	20.7	1.2	4.8	24.3	0.269	33.0	8.7
H	1907.5	-28.5	20.7	1.2	4.6	24.1	0.257	33.0	8.9

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1855.0	-27.3	21.9	1.2	4.9	25.6	0.363	33.0	7.4
H	1880.0	-26.5	22.3	1.2	4.8	25.9	0.389	33.0	7.1
H	1905.0	-27.0	22.3	1.2	4.6	25.7	0.372	33.0	7.3

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1855.0	-28.2	21.0	1.2	4.9	24.7	0.295	33.0	8.3
H	1880.0	-27.7	21.1	1.2	4.8	24.7	0.295	33.0	8.3
H	1905.0	-27.8	21.5	1.2	4.6	24.9	0.309	33.0	8.1

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1855.0	-29.0	20.2	1.2	4.9	23.9	0.245	33.0	9.1
H	1880.0	-28.7	20.1	1.2	4.8	23.7	0.234	33.0	9.3
H	1905.0	-28.9	20.4	1.2	4.6	23.8	0.240	33.0	9.2

[LTE Band II]**QPSK, BW 15MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1857.5	-27.2	21.9	1.2	4.9	25.6	0.363	33.0	7.4
H	1880.0	-26.6	22.2	1.2	4.8	25.8	0.380	33.0	7.2
H	1902.5	-26.8	22.9	1.2	4.6	26.3	0.427	33.0	6.7

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1857.5	-28.0	21.1	1.2	4.9	24.8	0.302	33.0	8.2
H	1880.0	-27.5	21.3	1.2	4.8	24.9	0.309	33.0	8.1
H	1902.5	-27.7	22.0	1.2	4.6	25.4	0.347	33.0	7.6

64QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1857.5	-29.0	20.1	1.2	4.9	23.8	0.240	33.0	9.2
H	1880.0	-28.5	20.3	1.2	4.8	23.9	0.245	33.0	9.1
H	1902.5	-28.6	21.1	1.2	4.6	24.5	0.282	33.0	8.5

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1860.0	-27.4	21.4	1.2	4.9	25.1	0.324	33.0	7.9
H	1880.0	-26.7	22.1	1.2	4.8	25.7	0.372	33.0	7.3
H	1900.0	-27.3	22.4	1.2	4.7	25.9	0.389	33.0	7.1

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1860.0	-28.4	20.4	1.2	4.9	24.1	0.257	33.0	8.9
H	1880.0	-27.3	21.5	1.2	4.8	25.1	0.324	33.0	7.9
H	1900.0	-27.9	21.8	1.2	4.7	25.3	0.339	33.0	7.7

64QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1860.0	-29.0	19.8	1.2	4.9	23.5	0.224	33.0	9.5
H	1880.0	-28.4	20.4	1.2	4.8	24.0	0.251	33.0	9.0
H	1900.0	-29.0	20.7	1.2	4.7	24.2	0.263	33.0	8.8

All other emissions measured were greater than 20dB below the specification limit.

4.2 Peak to Average Ratio

4.2.1 Measurement procedure

[FCC 24.232(d)]


The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

[GSM1900]

- a) Span = 5 MHz
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Detector = Peak / Average
- e) Sweep time = auto-couple
- f) Trace mode=Max hold

- Test configuration

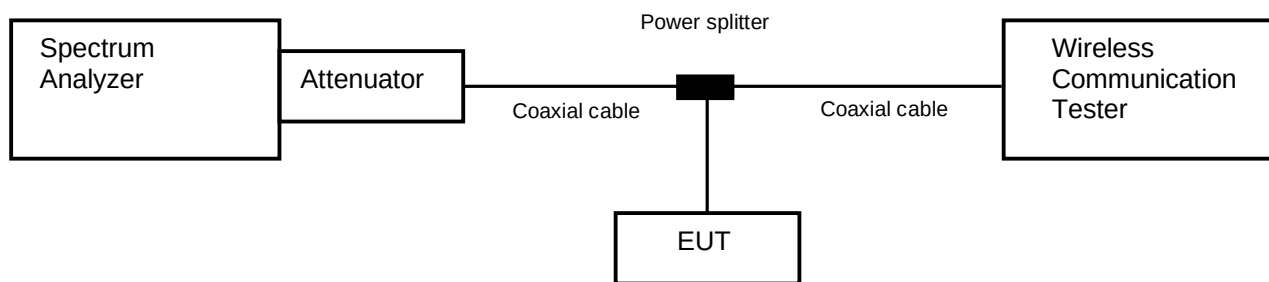

4.2.2 Limit

13 dB or less

4.2.3 Measurement result

Date : 17-October-2022

Temperature : 23.1 [°C]

Humidity : 51.0 [%]

Test place : Shielded room No.4

Test engineer :

Kazunori Saito

Band	Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
GSM1900	512	1850.2	0.01	13.0
	661	1880.0	0.01	
	810	1909.8	0.01	
WCDMA Band II	9262	1852.4	3.25	13.0
	9400	1880.0	3.43	
	9538	1907.6	3.15	

*: Tested by EB1146


Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band II	18900	1880.0	QPSK	1.4	6-0	5.88	13.0
				3	15-0	6.06	
				5	25-0	5.96	
				10	50-0	4.61	
				15	75-0	5.79	
				20	100-0	6.47	
			16QAM	1.4	6-0	6.65	
				3	15-0	6.98	
				5	25-0	6.66	
				10	50-0	6.33	
				15	75-0	6.96	
				20	100-0	7.29	
			64QAM	1.4	6-0	6.98	
				3	15-0	7.18	
				5	25-0	6.97	
				10	50-0	6.72	
				15	75-0	7.17	
				20	100-0	7.30	

*: Tested by EB1146


4.2.4 Trace data

[GSM1900]


Channel: 512

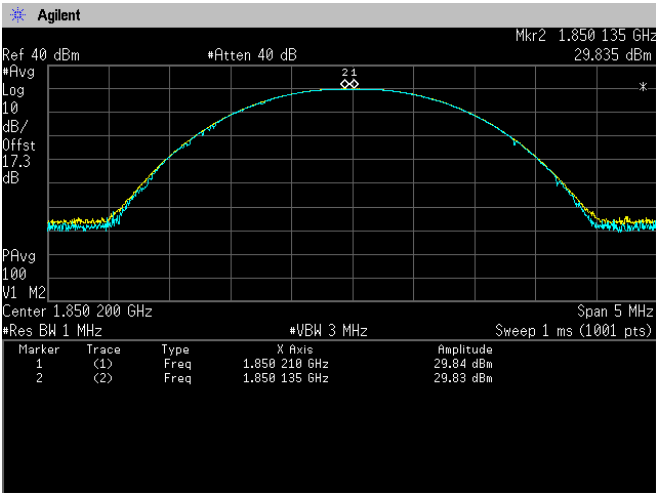


Channel: 661

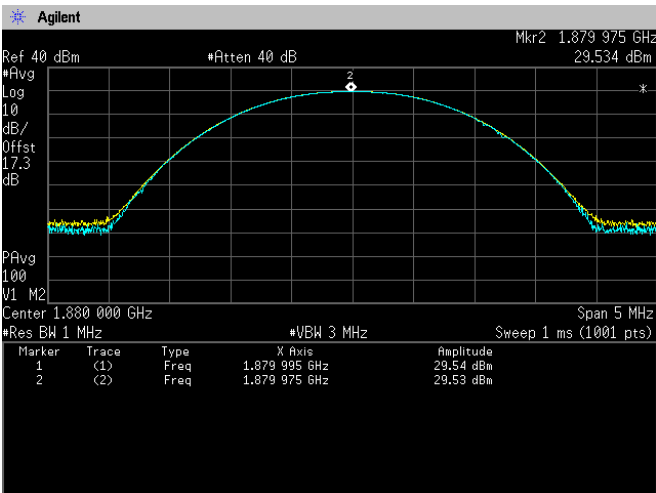


Channel: 810

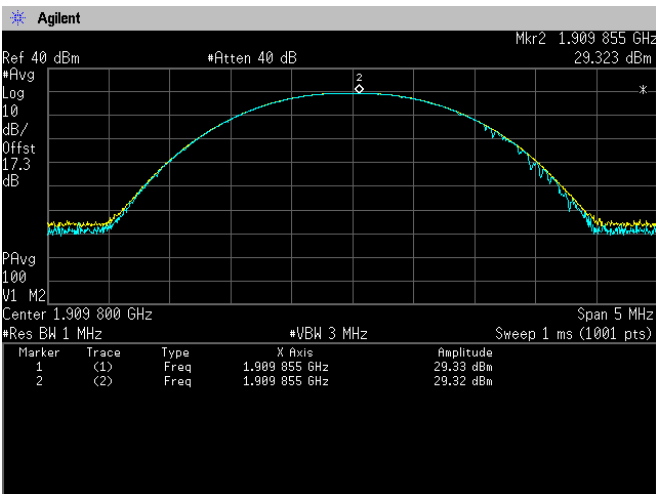


[WCDMA Band II]
Channel: 9262

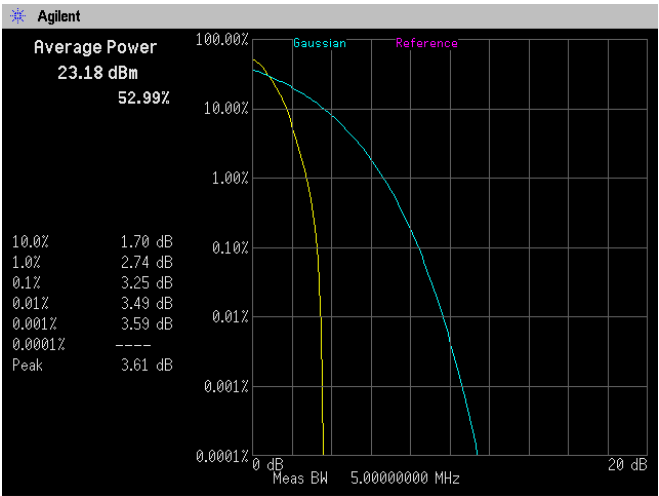

Channel: 9400

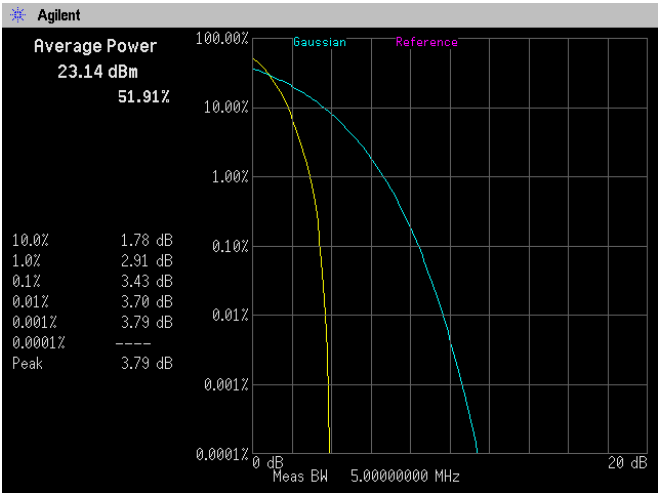


Channel: 9538

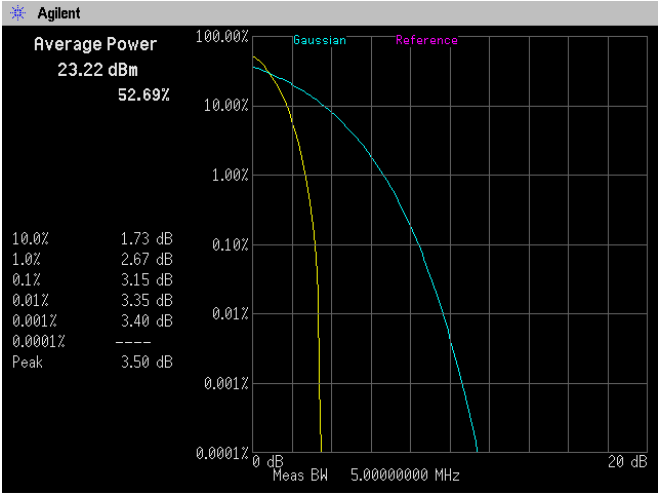


[LTE Band II]

Channel: 18900


QPSK, BW 1.4MHz, RB6-0

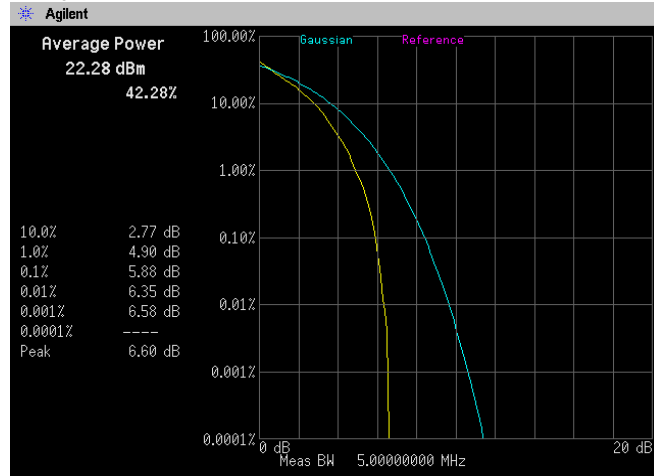


QPSK, BW 3MHz, RB15-0

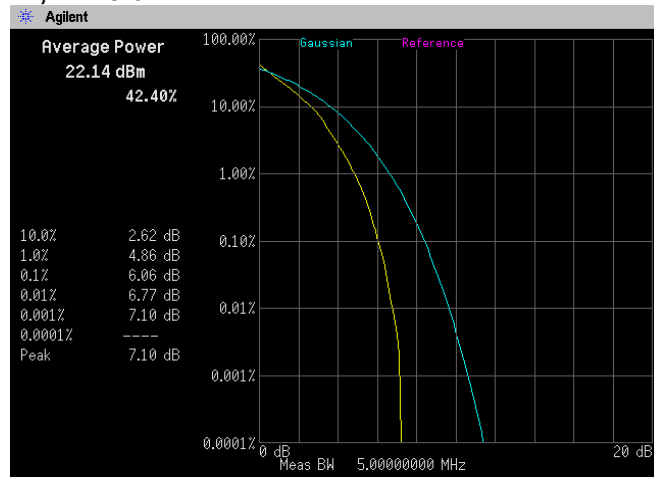


QPSK, BW 5MHz, RB25-0

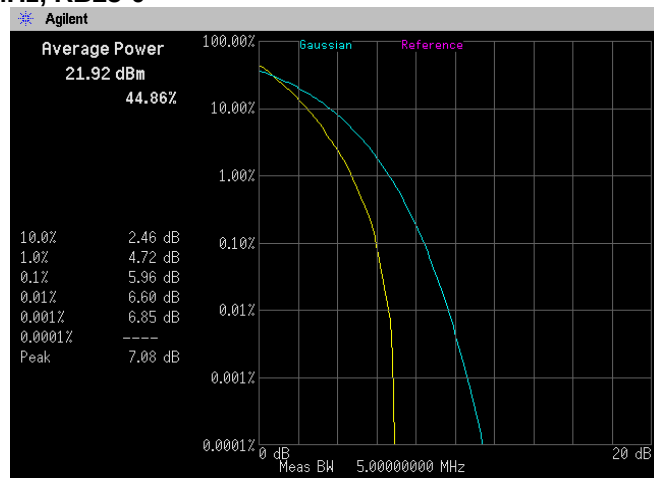

Channel: 18900
QPSK, BW 10MHz, RB50-0

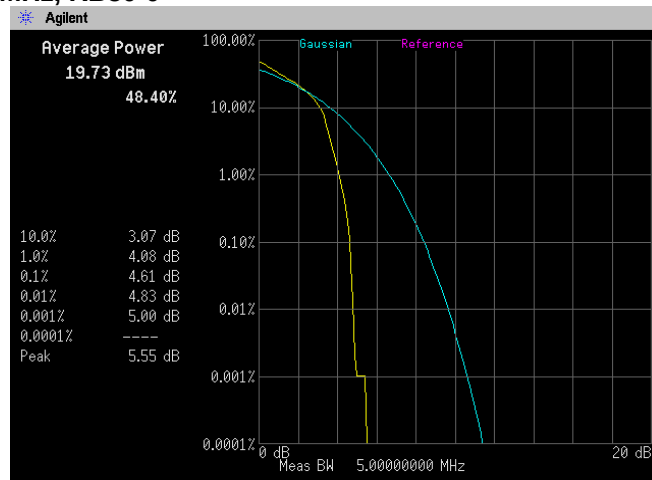


QPSK, BW 15MHz, RB75-0

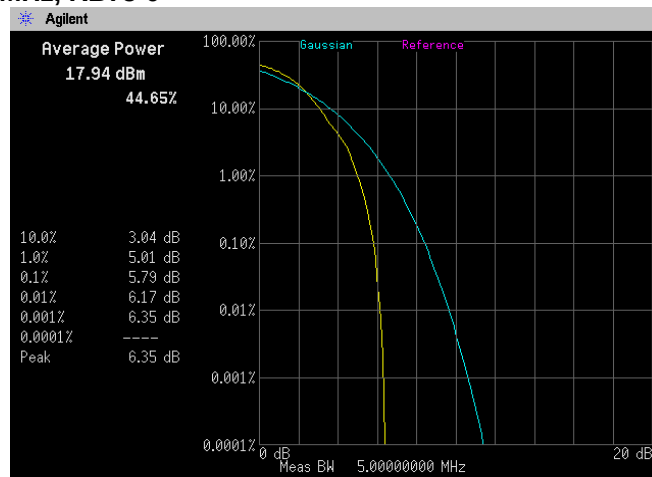


QPSK, BW 20MHz, RB100-0




Channel: 18900
16QAM, BW 1.4MHz, RB6-0

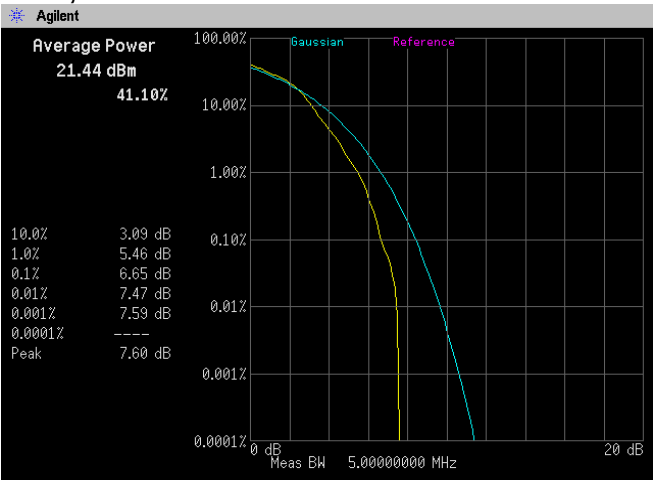


16QAM, BW 3MHz, RB15-0

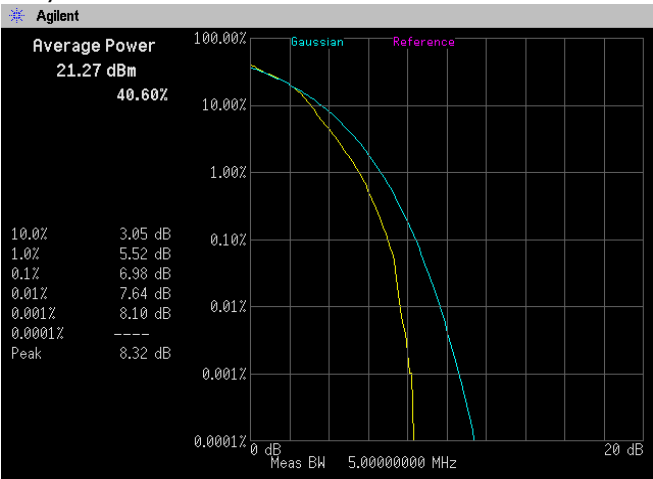


16QAM, BW 5MHz, RB25-0

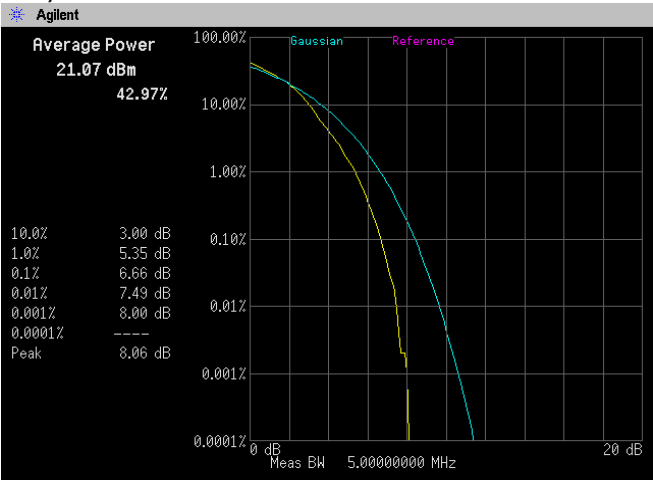


Channel: 18900
16QAM, BW 10MHz, RB50-0

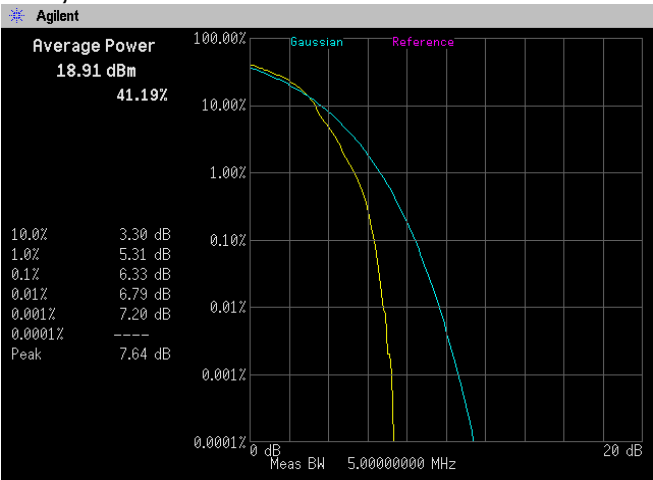


16QAM, BW 15MHz, RB75-0

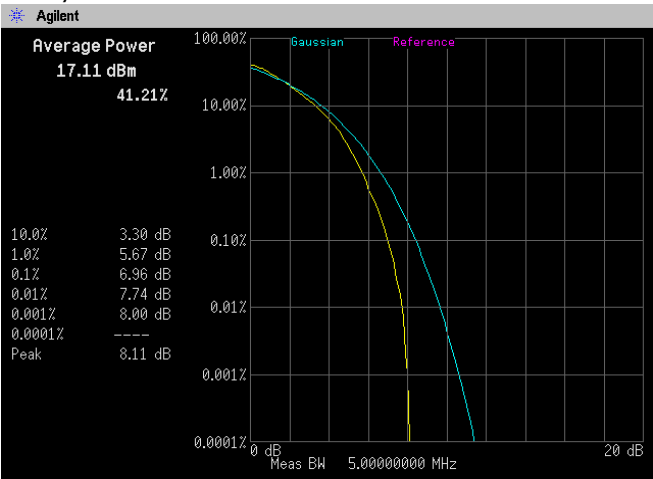


16QAM, BW 20MHz, RB100-0

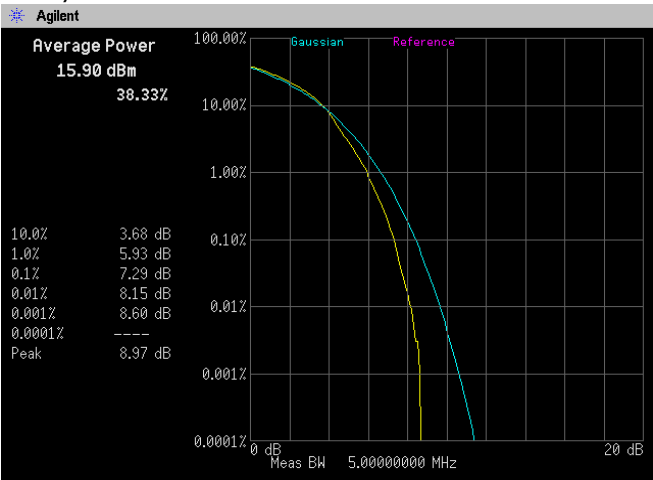


Channel: 18900
64QAM, BW 1.4MHz, RB6-0

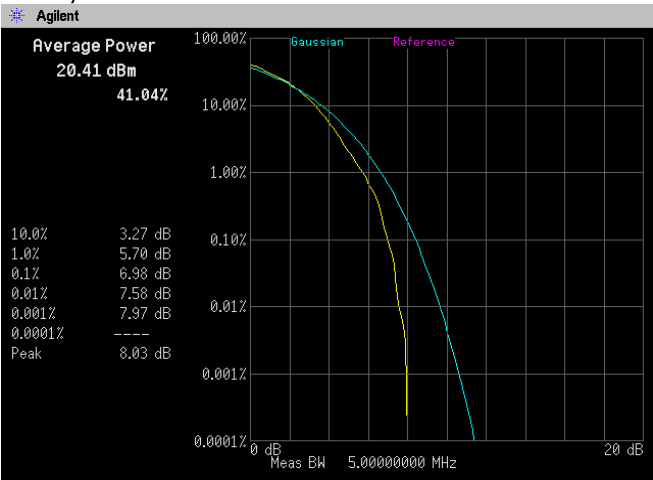


64QAM, BW 3MHz, RB15-0

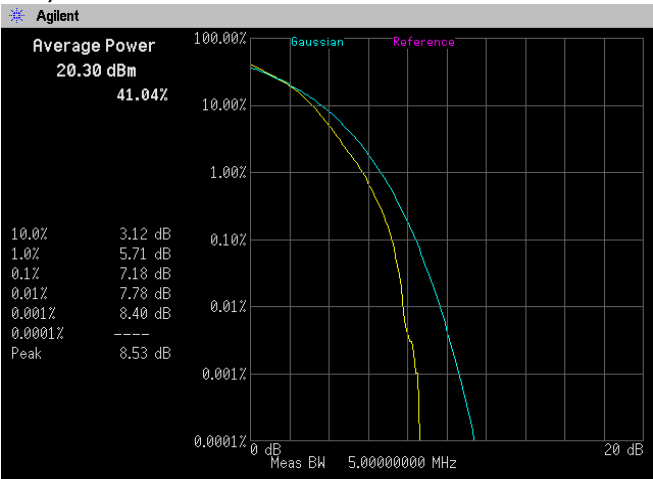


64QAM, BW 5MHz, RB25-0

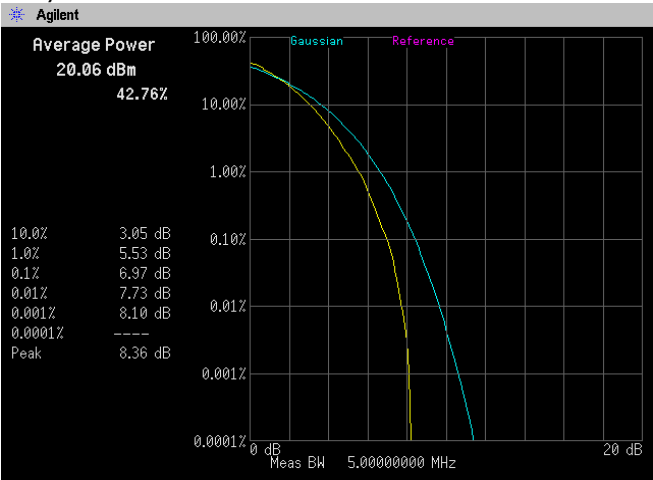


Channel: 18900
64QAM, BW 10MHz, RB50-0

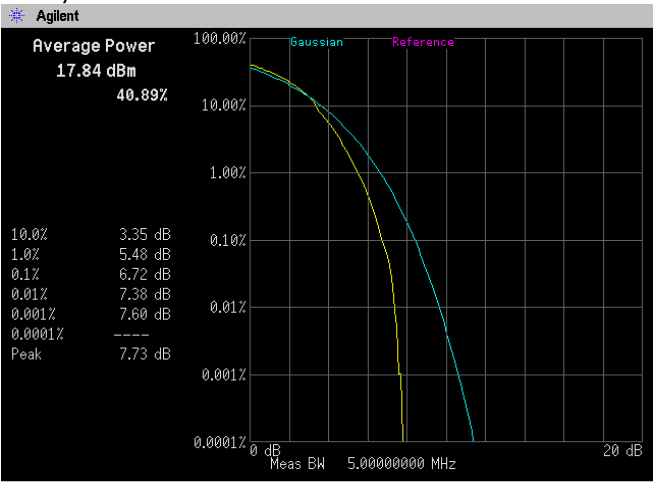

64QAM, BW 15MHz, RB75-0

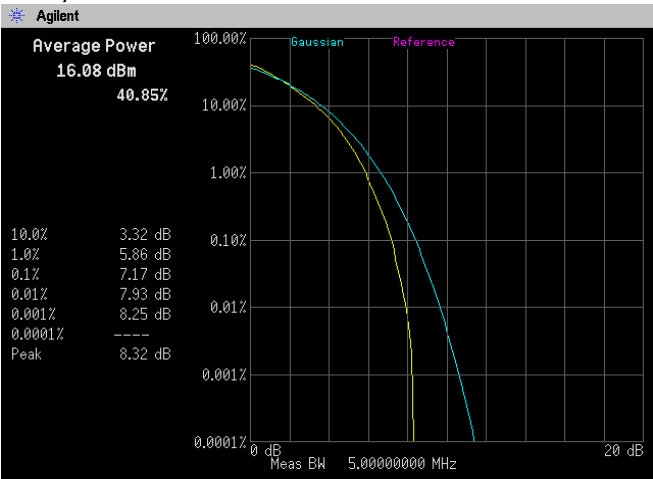

64QAM, BW 20MHz, RB100-0

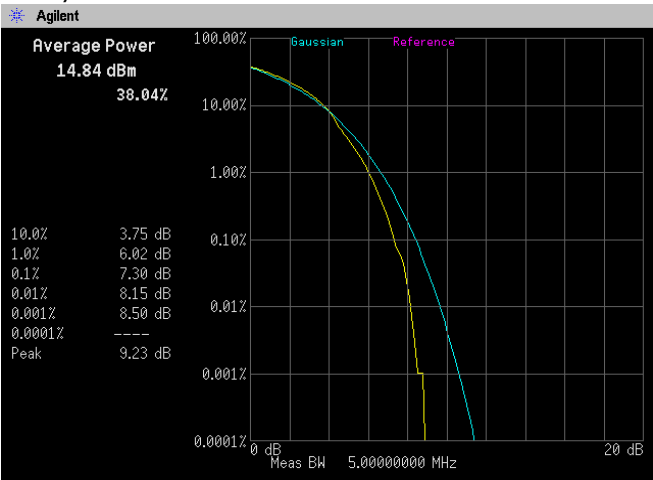

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 24.238(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

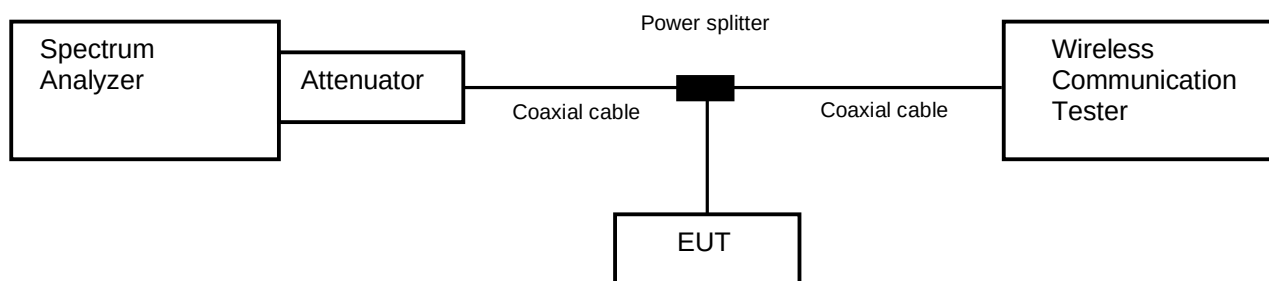

4.3.2 Limit

None

4.3.3 Measurement result

Date : 17-October-2022

Temperature : 23.1 [°C]

Humidity : 51.0 [%]

Test place : Shielded room No.4

Test engineer :

Kazunori Saito

Band	Channel	Frequency [MHz]	Test Result [kHz]
GSM1900	512	1850.2	242.2272
	661	1880.0	241.9351
	810	1909.8	243.5998

*: Tested by EB1146

Band	Channel	Frequency [MHz]	Test Result [kHz]
WCDMA Band II	9262	1852.4	4135.3
	9400	1880.0	4137.8
	9538	1907.6	4128.6

*: Tested by EB1146


Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band II	18900	1880.0	1.4	QPSK	3-1	0.6150
					6-0	1.0956
				16QAM	3-1	0.6115
					6-0	1.1016
				64QAM	3-1	0.6034
					6-0	1.0943
			3	QPSK	8-4	1.5131
					15-0	2.7086
				16QAM	8-4	1.5326
					15-0	2.7046
				64QAM	8-4	1.5255
					15-0	2.7077
			5	QPSK	12-7	2.3158
					25-0	4.5141
				16QAM	12-7	2.2854
					25-0	4.4997
				64QAM	12-7	2.2723
					25-0	4.5048
			10	QPSK	25-12	4.6656
					50-0	8.9822
				16QAM	25-12	4.6510
					50-0	8.9868
				64QAM	25-12	4.6590
					50-0	8.9795
			15	QPSK	36-20	6.7164
					75-0	13.4604
				16QAM	36-20	6.6581
					75-0	13.4446
				64QAM	36-20	6.7240
					75-0	13.4511
			20	QPSK	50-24	9.1878
					100-0	17.9672
				16QAM	50-24	9.2052
					100-0	17.9334
				64QAM	50-24	9.1477
					100-0	17.9230

*: Tested by EB1146


4.3.4 Trace data

[GSM1900]


Channel: 512

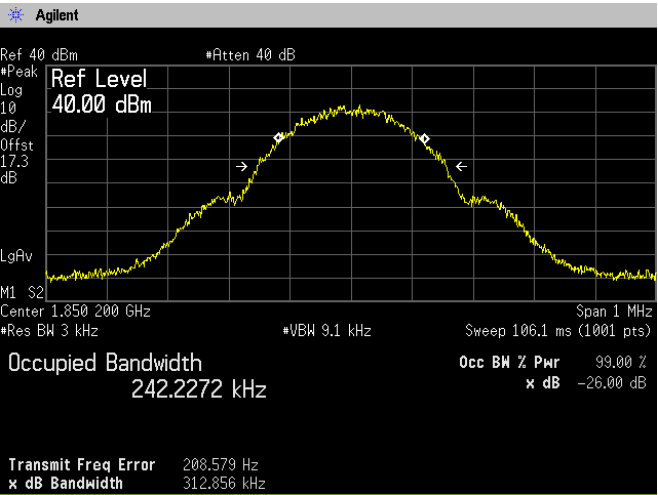


Channel: 661

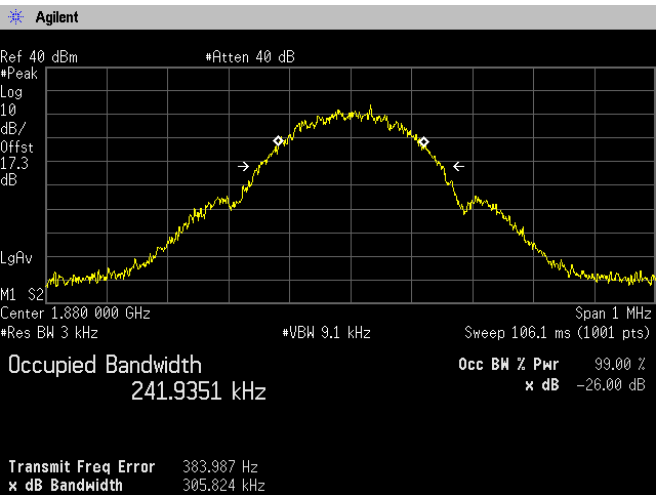


Channel: 810

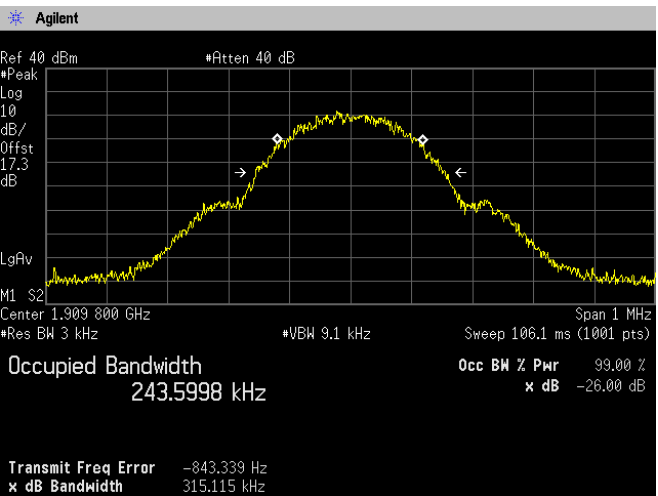


[WCDMA Band II]
Channel: 9262

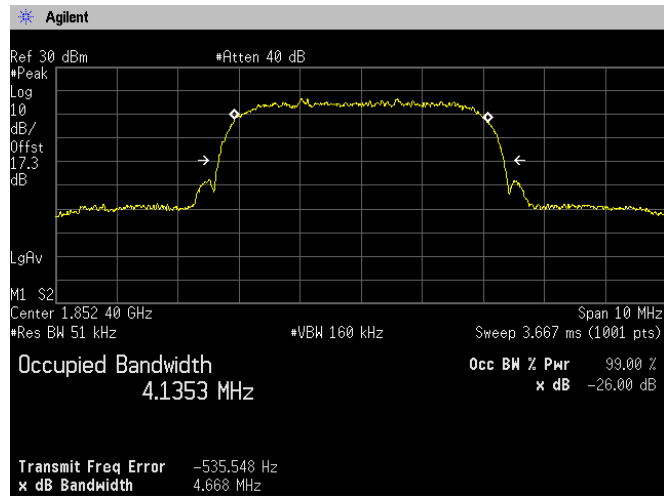

Channel: 9400

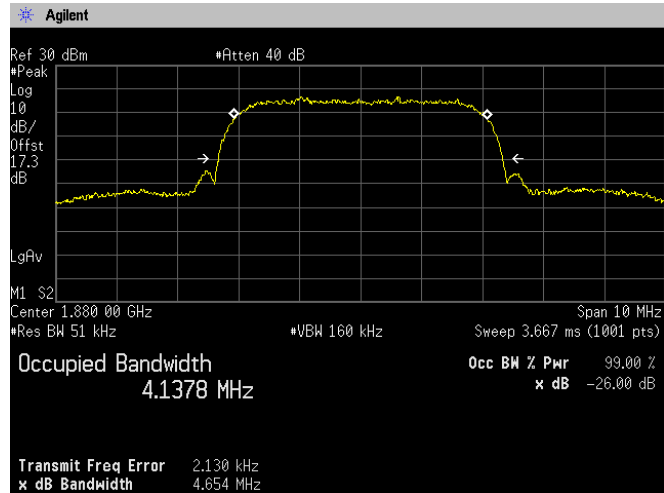


Channel: 9538

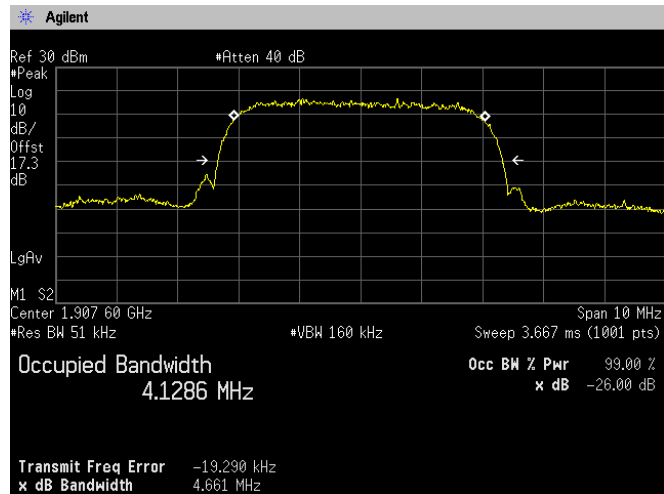


[LTE Band II]
Channel: 18900

QPSK, BW 1.4MHz

RB3-1

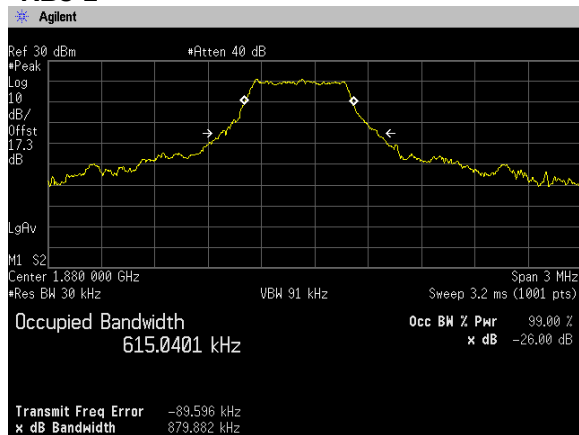


RB6-0

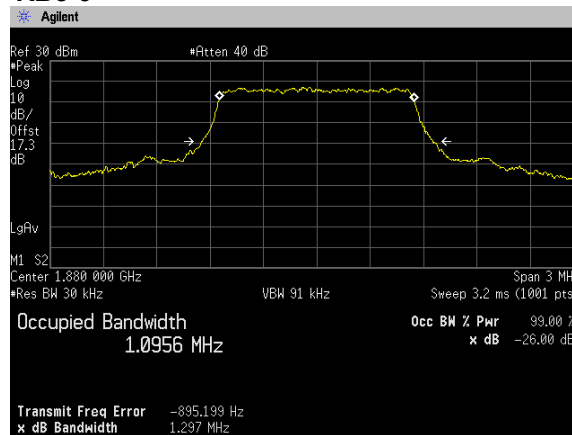


16QAM, BW 1.4MHz

RB3-1

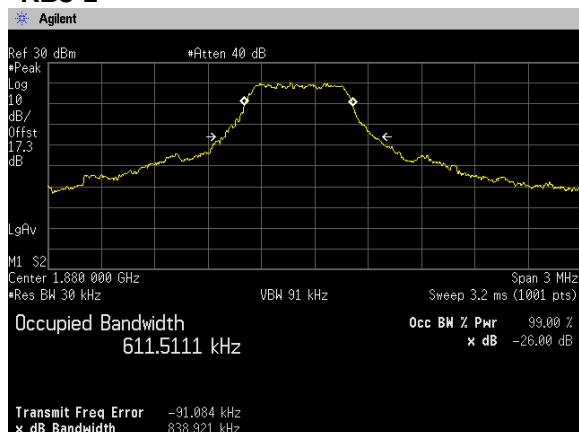


RB6-0

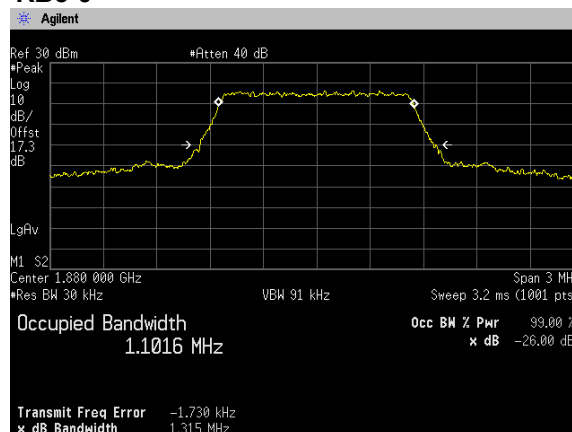


64QAM, BW 1.4MHz

RB3-1

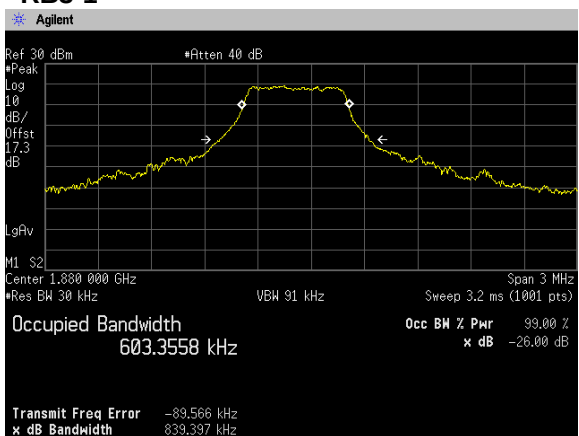


RB6-0

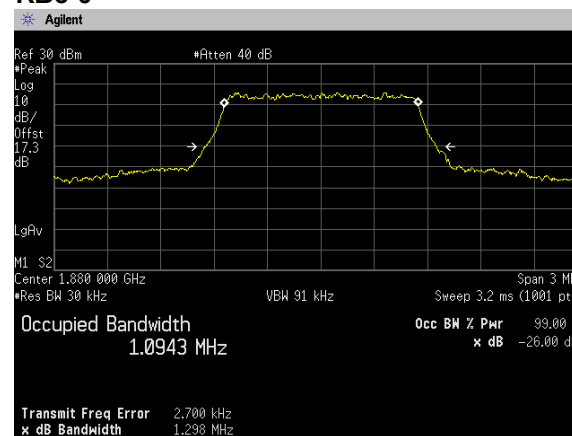


QPSK, BW 3MHz

RB8-4

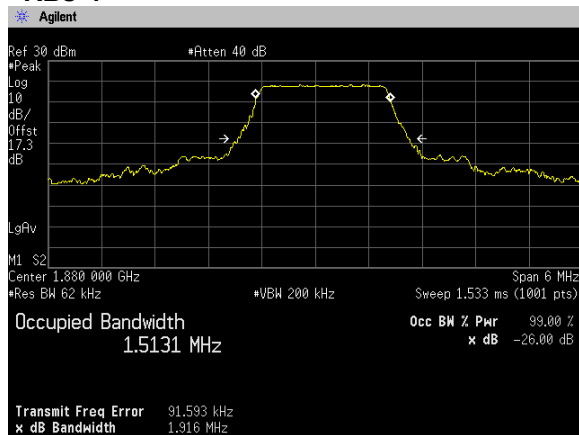


RB15-0

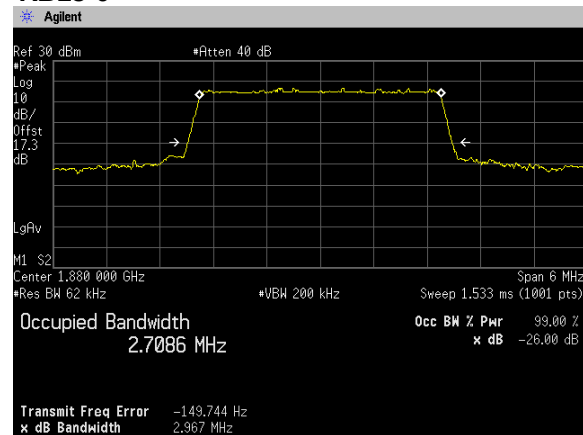


16QAM, BW 3MHz

RB8-4

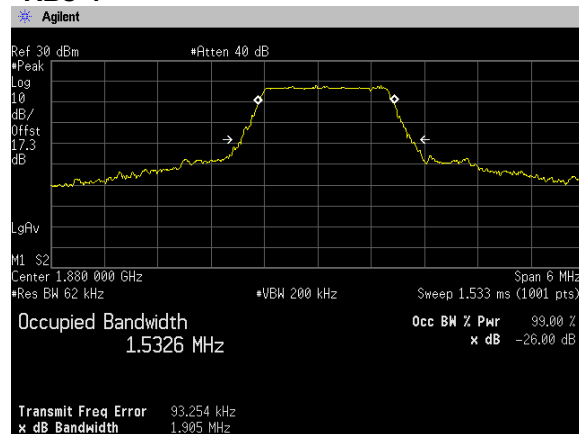


RB15-0

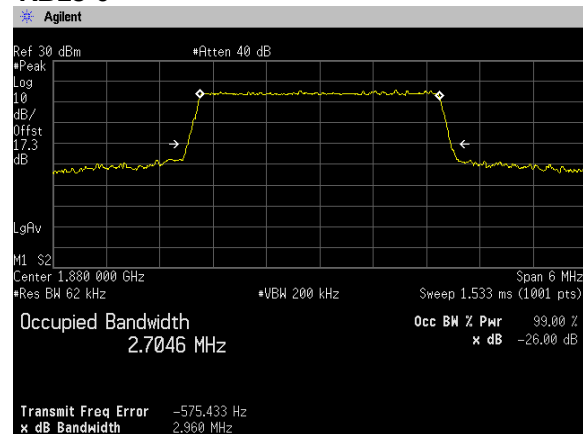


64QAM, BW 3MHz

RB8-4

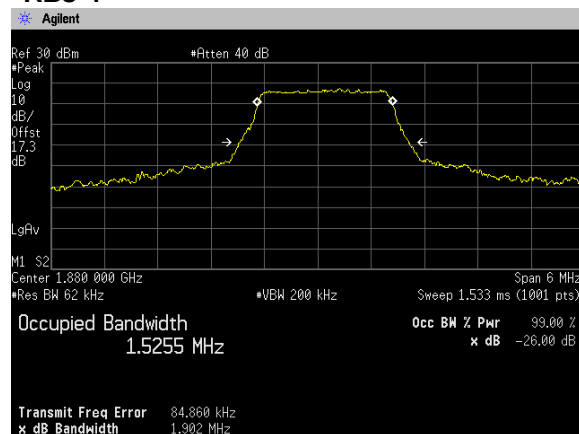


RB15-0

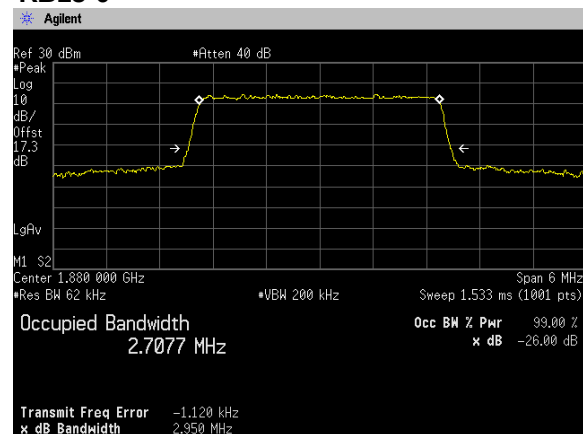


QPSK, BW 5MHz

RB12-7

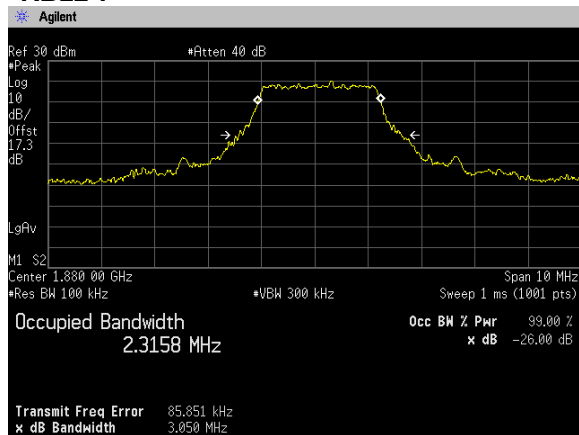


RB25-0

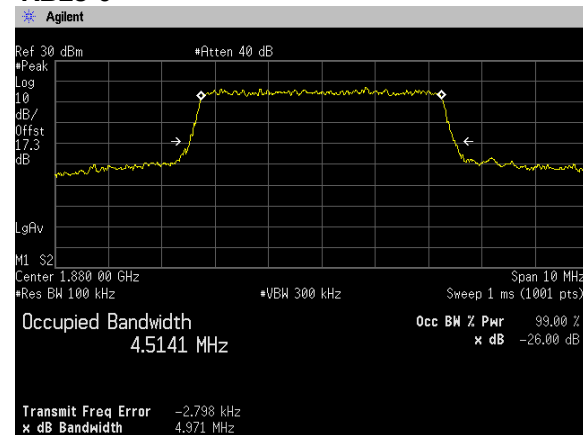


16QAM, BW 5MHz

RB12-7

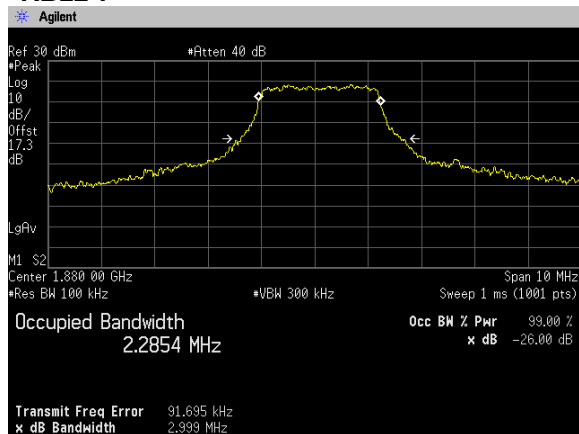


RB25-0

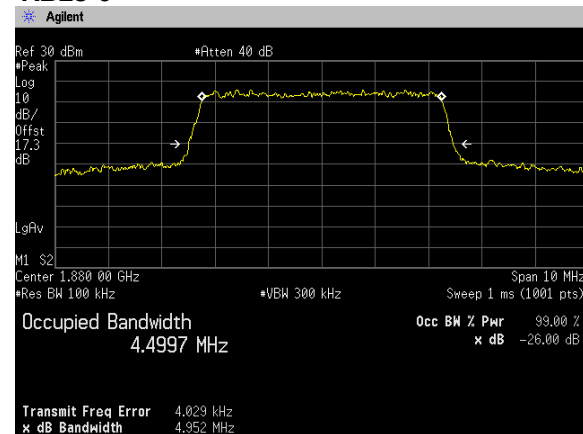


64QAM, BW 5MHz


RB12-7

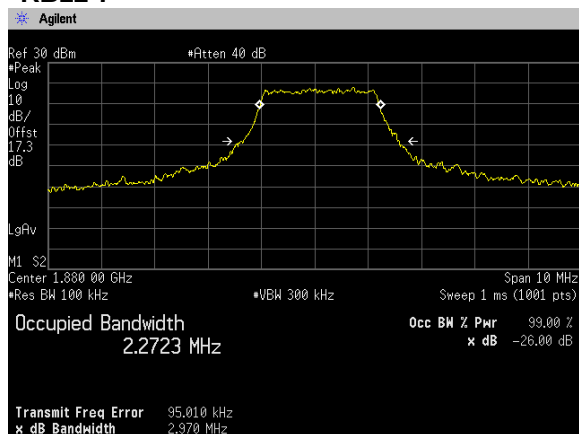


RB25-0

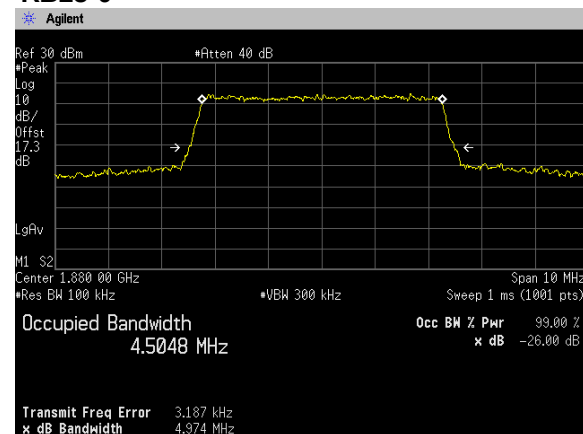


QPSK, BW 10MHz RB25-12

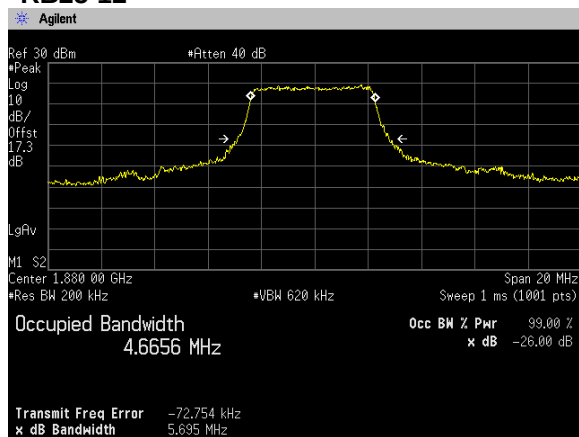


RB50-0

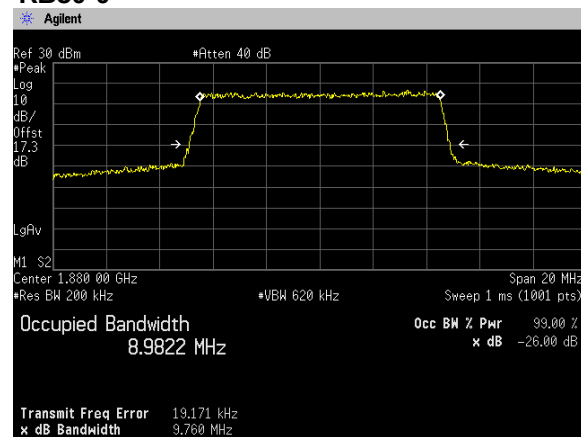


16QAM, BW 10MHz RB25-12

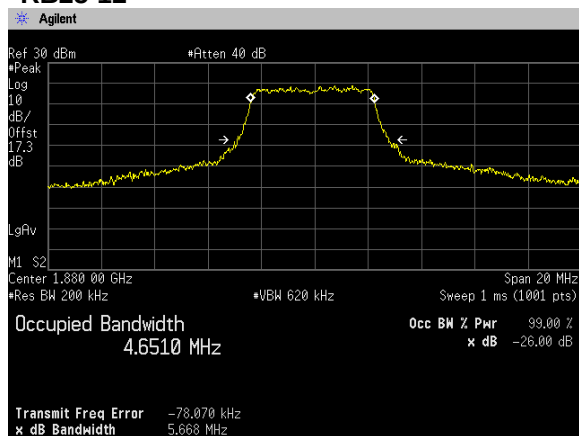


RB50-0

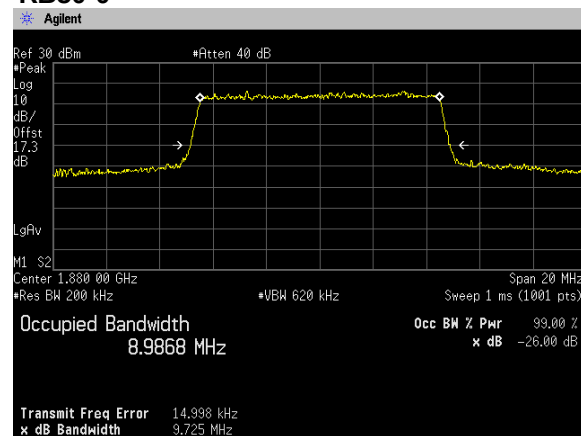

64QAM, BW 10MHz RB25-12

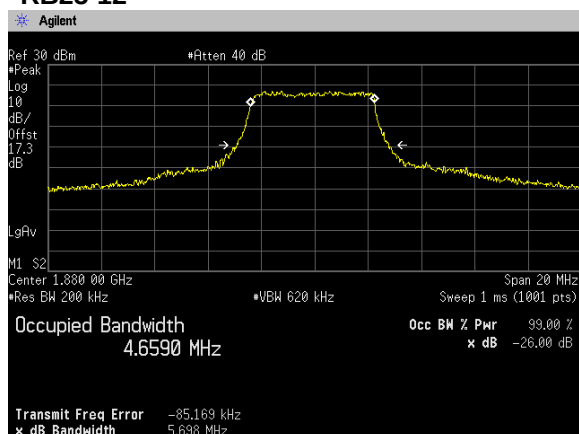


RB50-0

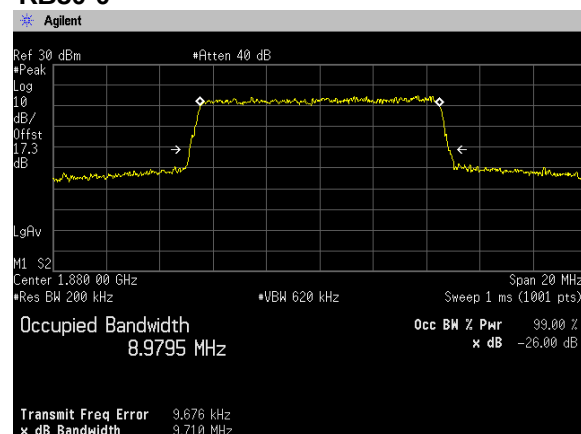


QPSK, BW 15MHz

RB36-20

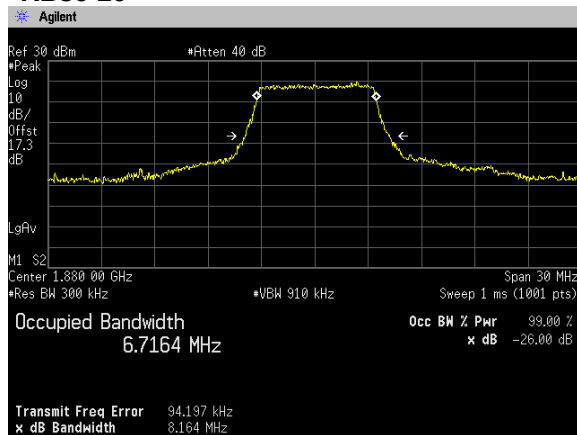


RB75-0

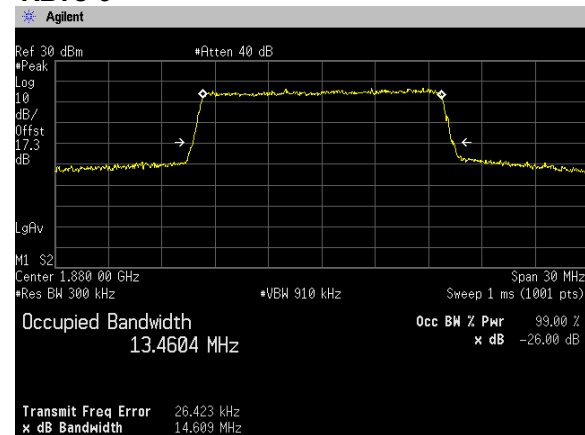


16QAM, BW 15MHz

RB36-20

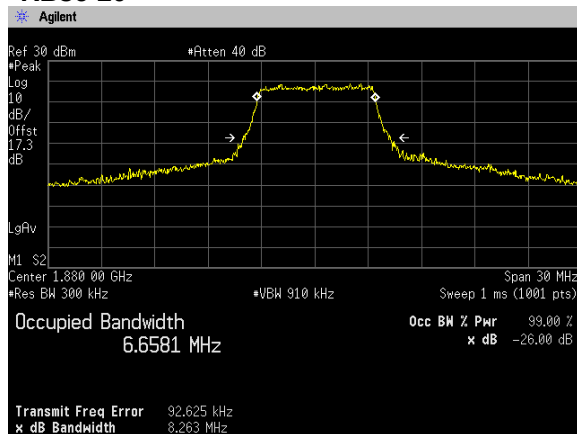


RB75-0

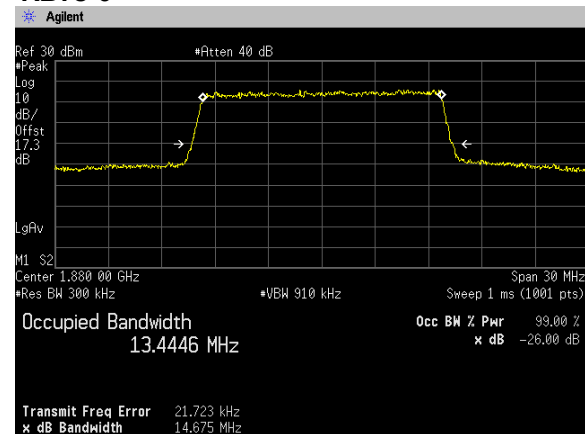


64QAM, BW 15MHz


RB36-20

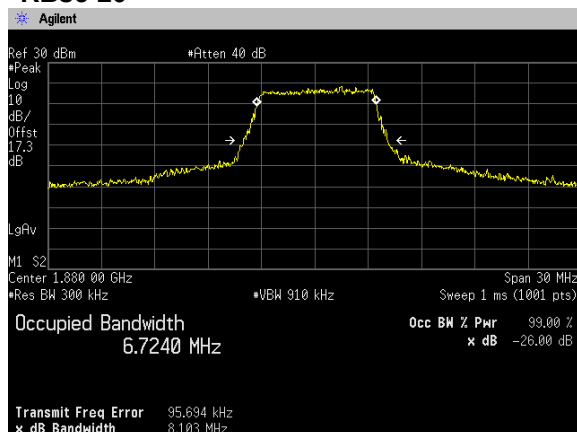


RB75-0

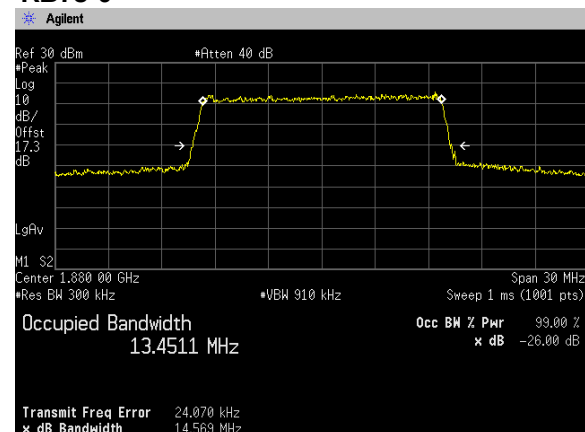


QPSK, BW 20MHz RB50-24

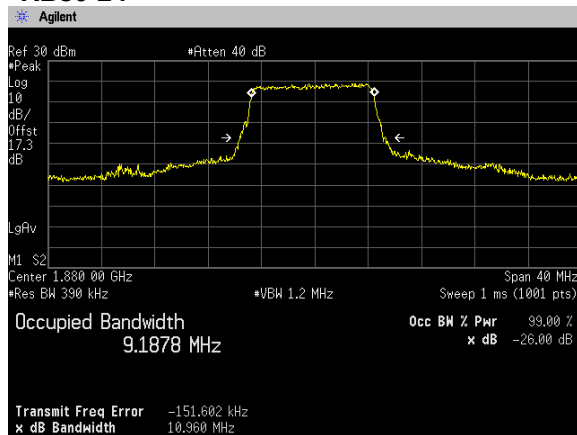


RB100-0

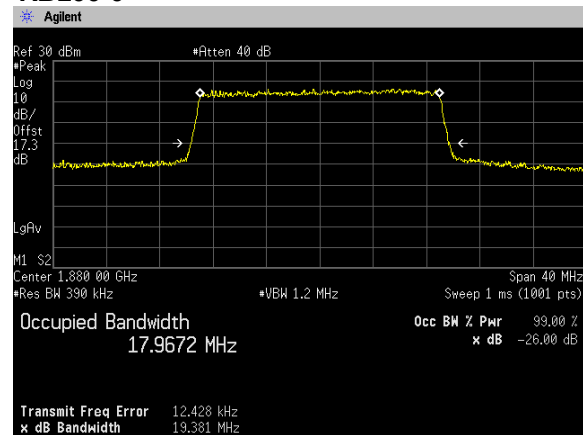


16QAM, BW 20MHz RB50-24

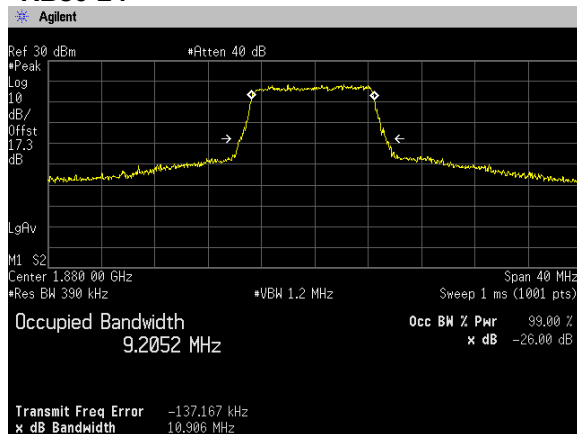


RB100-0

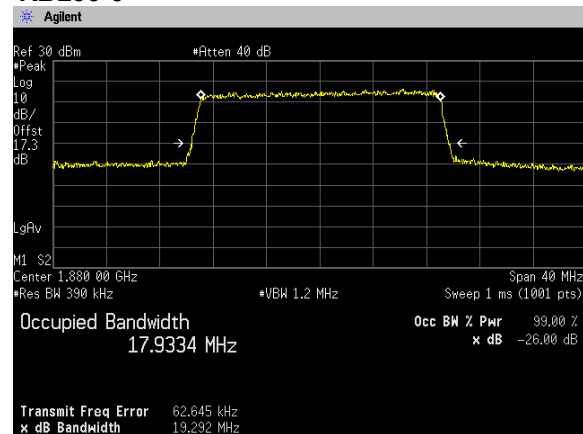

64QAM, BW 20MHz RB50-24

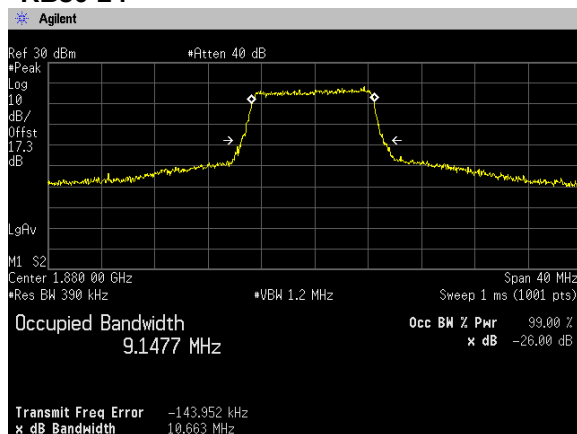

RB100-0

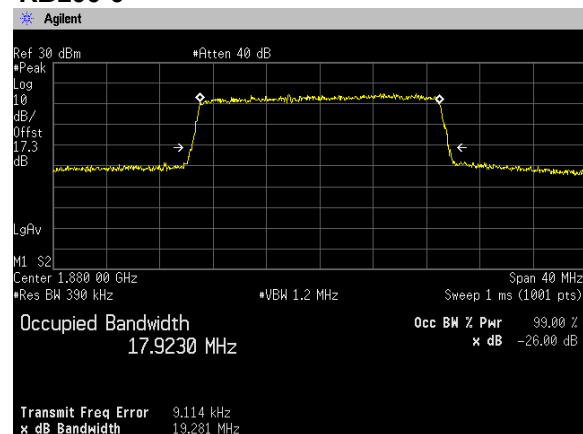

4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 24.238(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) $RBW \geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a) $RBW = 1\text{MHz}$ & $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times \text{span} / RBW$

- Test configuration

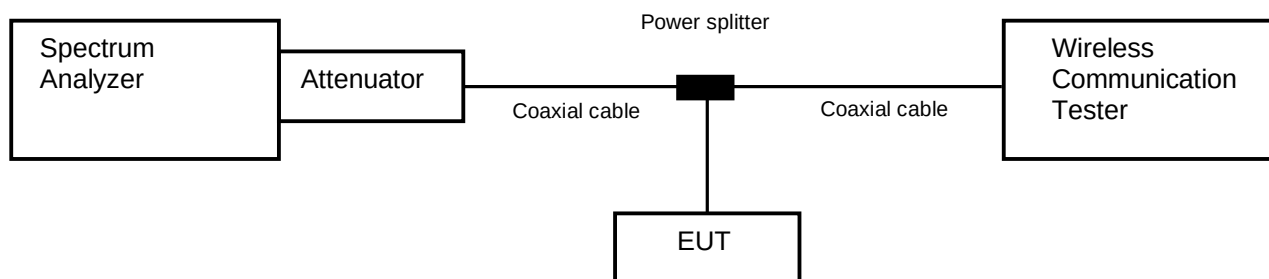

4.4.2 Limit

-13 dBm or less

4.4.3 Measurement result

Date : 17-October-2022

Temperature : 23.1 [°C]

Humidity : 51.0 [%]

Test place : Shielded room No.4

Test engineer :

Kazunori Saito

Band	Channel	Frequency [MHz]	Limit [dBm]	Results	
GSM1900	512	1850.2	-13.0	See the trace data	PASS
	810	1909.8	-13.0	See the trace data	PASS
WCDMA Band II	9262	1852.4	-13.0	See the trace data	PASS
	9538	1907.6	-13.0	See the trace data	PASS

*: Tested by EB1146


Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Limit [dBm]	Results	
LTE Band II	QPSK, 16QAM, 64QAM	1.4	18607	1850.7	-13.0	See the trace data	PASS
			19193	1909.3	-13.0	See the trace data	PASS
		3	18615	1851.5	-13.0	See the trace data	PASS
			19185	1908.5	-13.0	See the trace data	PASS
		5	18625	1852.5	-13.0	See the trace data	PASS
			19175	1907.5	-13.0	See the trace data	PASS
		10	18650	1855.0	-13.0	See the trace data	PASS
			19150	1905.0	-13.0	See the trace data	PASS
		15	18675	1857.5	-13.0	See the trace data	PASS
			19125	1902.5	-13.0	See the trace data	PASS
		20	18700	1860.0	-13.0	See the trace data	PASS
			19100	1900.0	-13.0	See the trace data	PASS

*: Tested by EB1146


4.4.4 Trace data

[GSM1900]
(Band Edge)

Channel: 512




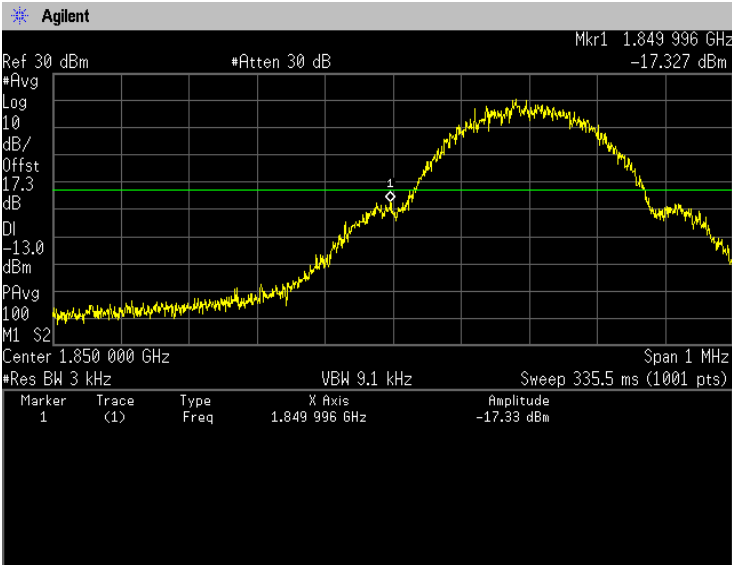






Channel: 810




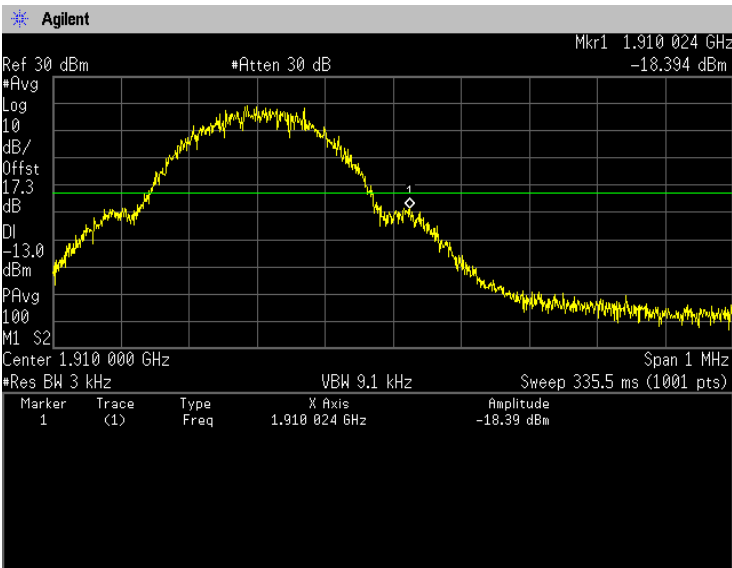


(Spurious Emissions)



Note: Conducted spurious test was measured in the worst case of conducted output power.

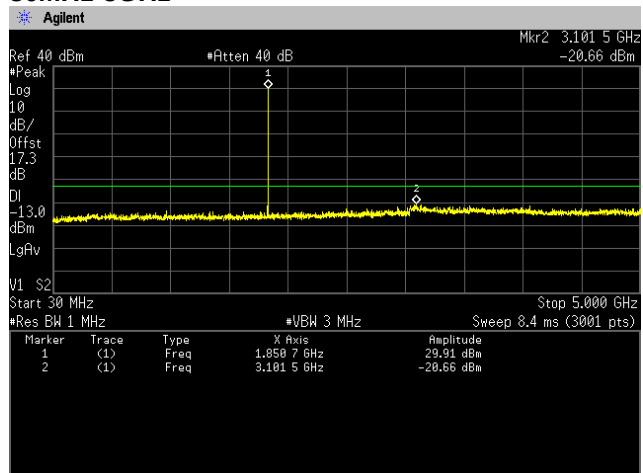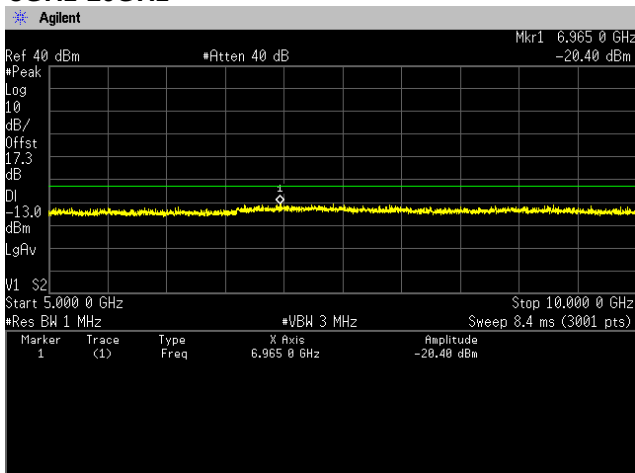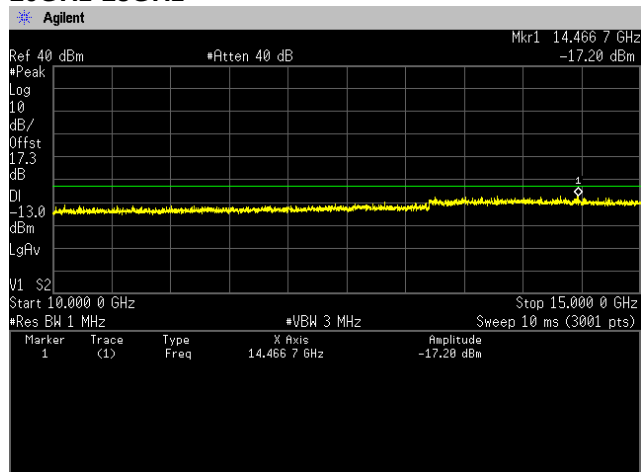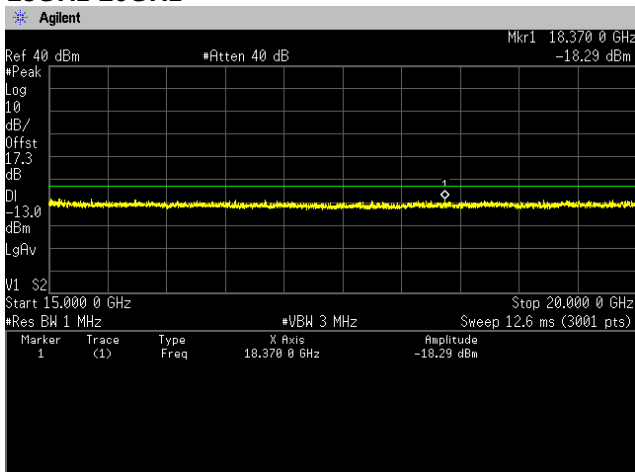Channel: 512**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

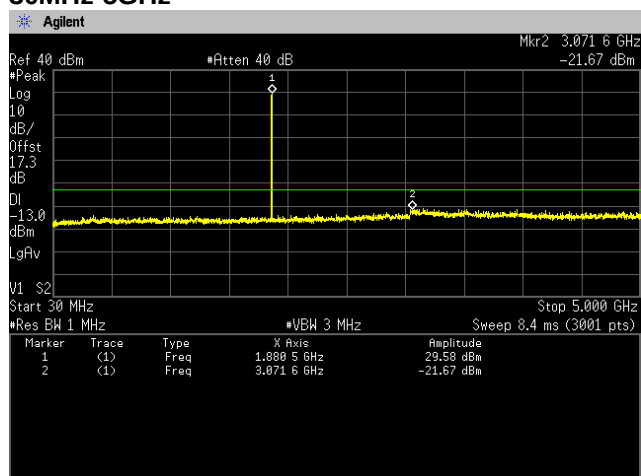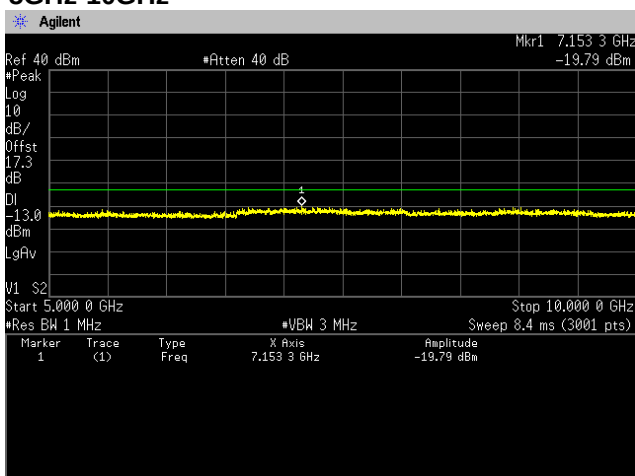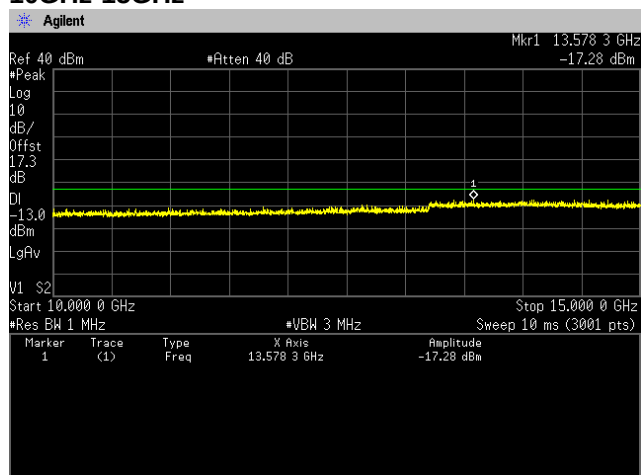
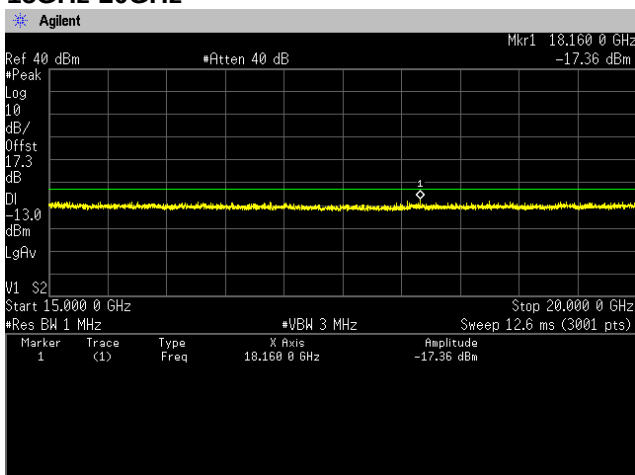
Channel: 661
30MHz-5GHz**5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

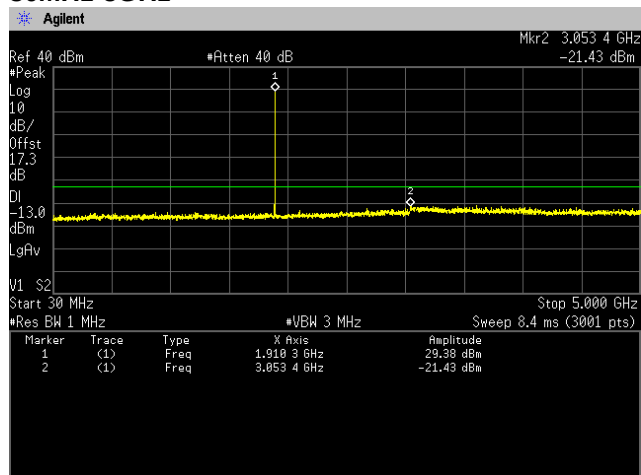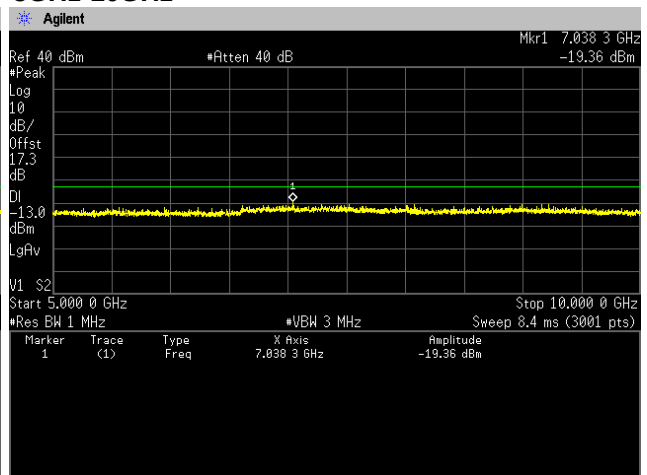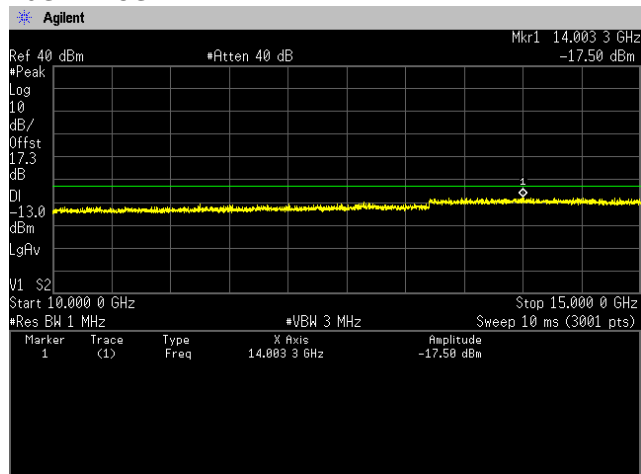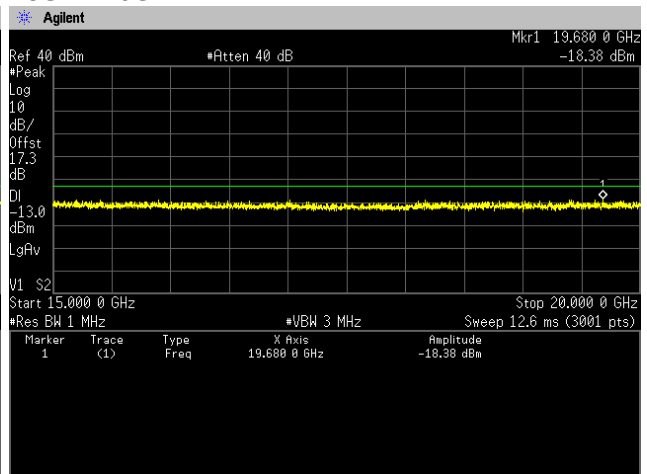Channel: 810**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

**[WCDMA Band II]
(Band Edge)
Channel: 9262**

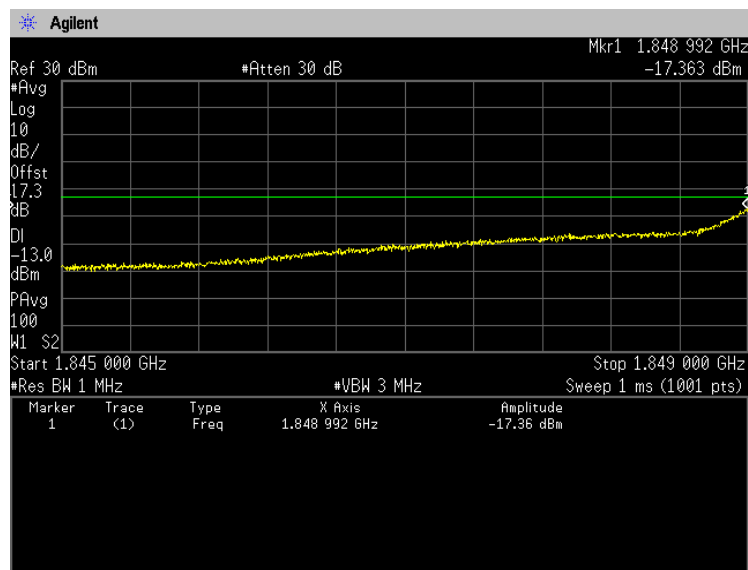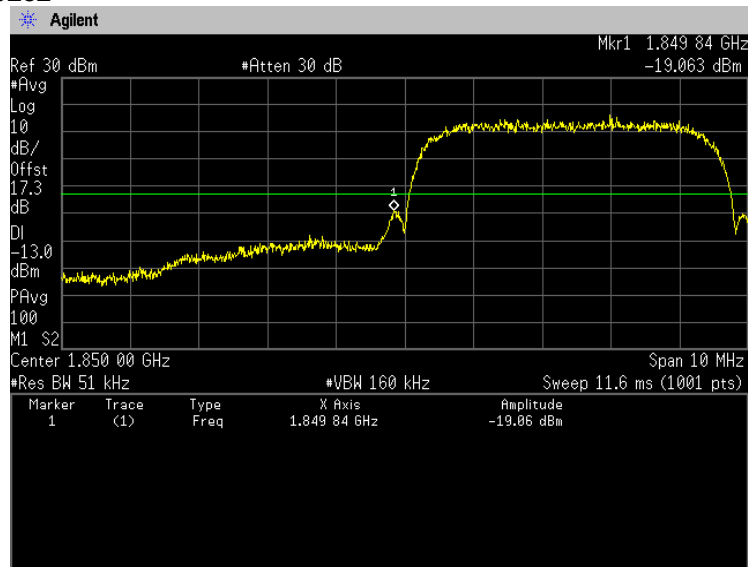

Channel: 9538

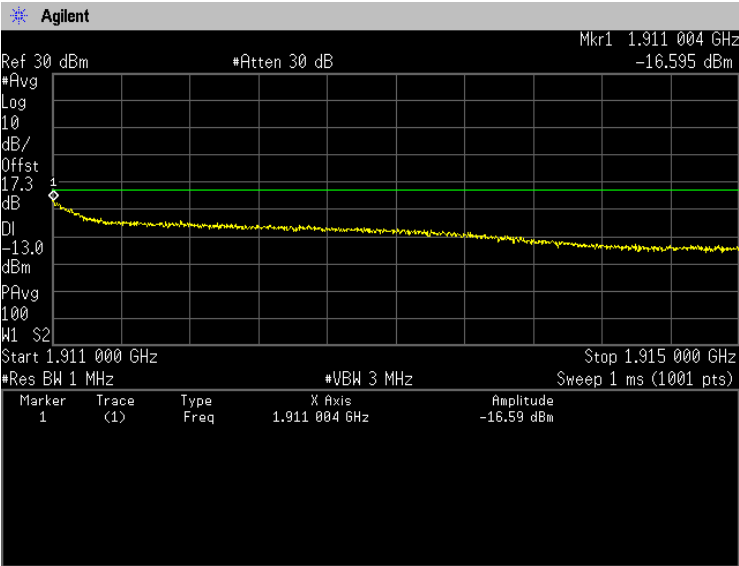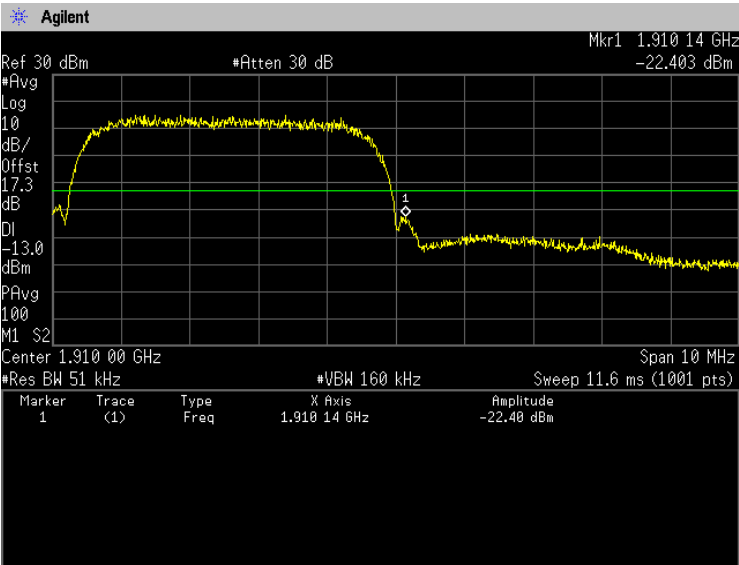


(Spurious Emissions)


Note: Conducted spurious test was measured in the worst case of conducted output power.

Channel: 9262


30MHz-5GHz

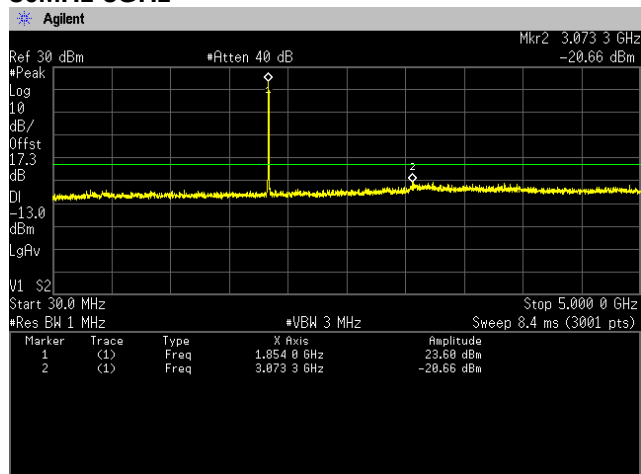


5GHz-10GHz

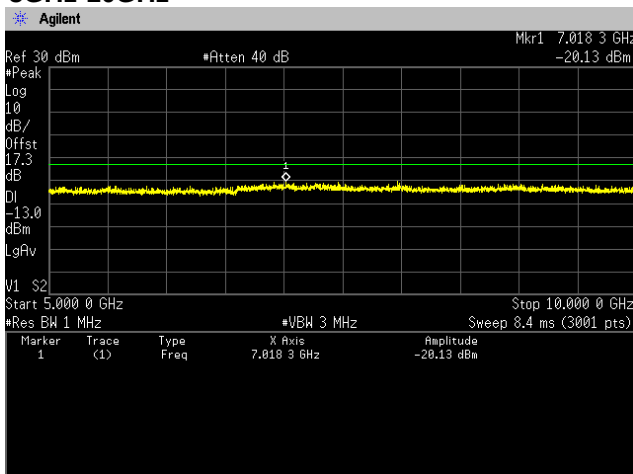

10GHz-15GHz

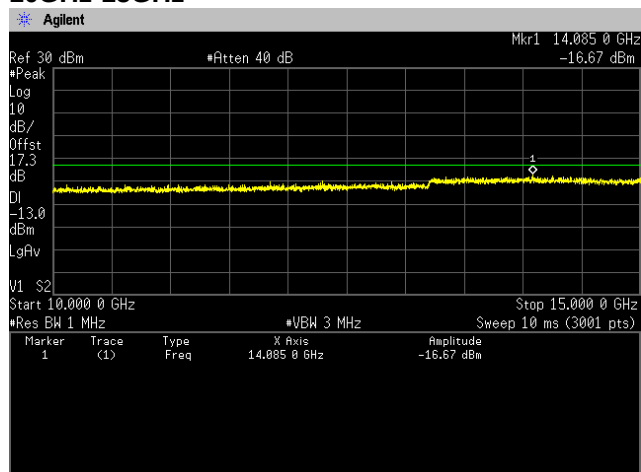


15GHz-20GHz

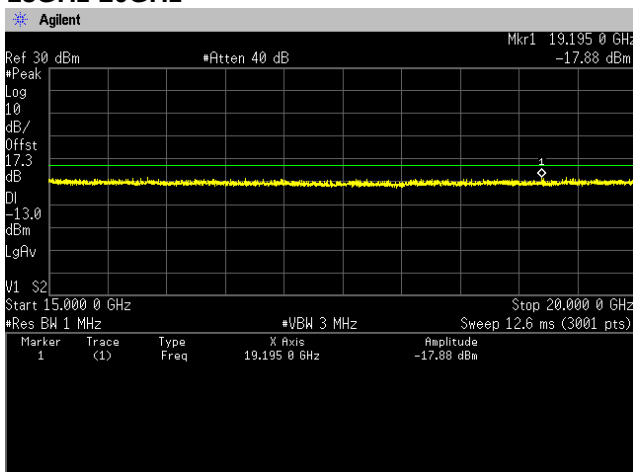


Channel: 9400


30MHz-5GHz

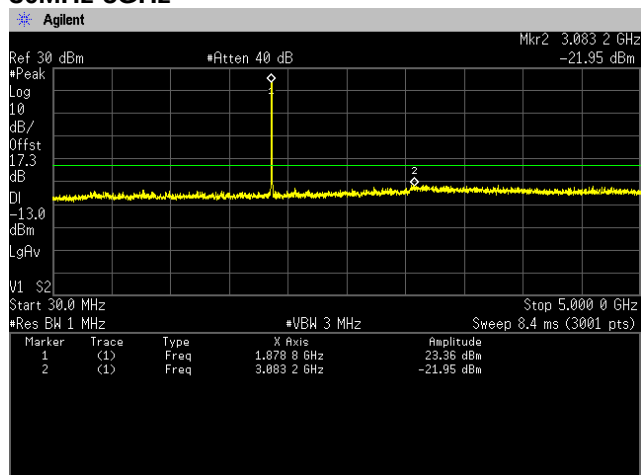


5GHz-10GHz

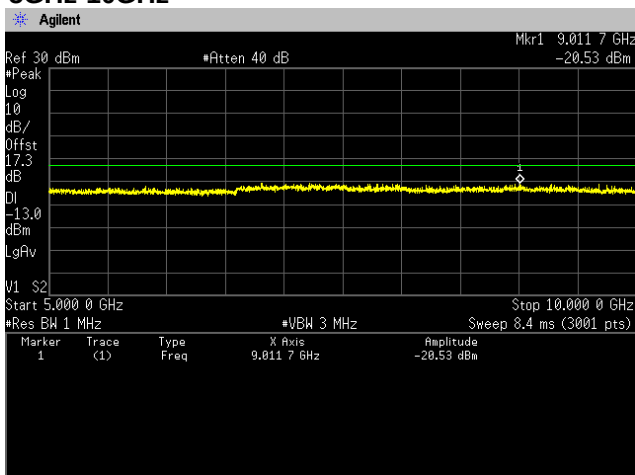

10GHz-15GHz

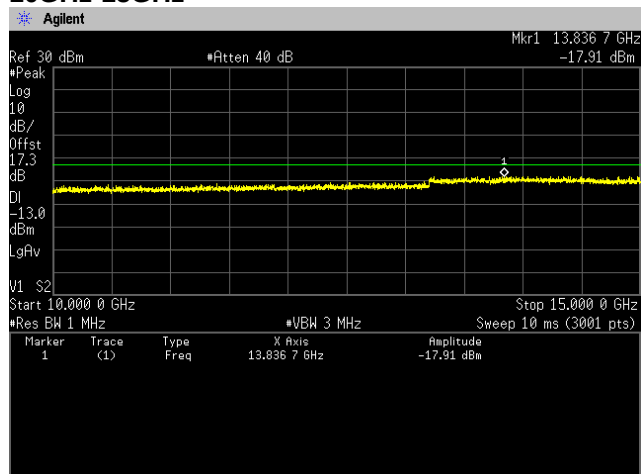


15GHz-20GHz

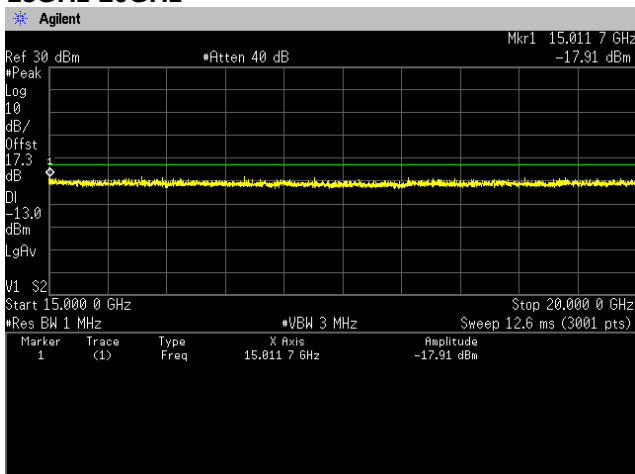


Channel: 9538


30MHz-5GHz

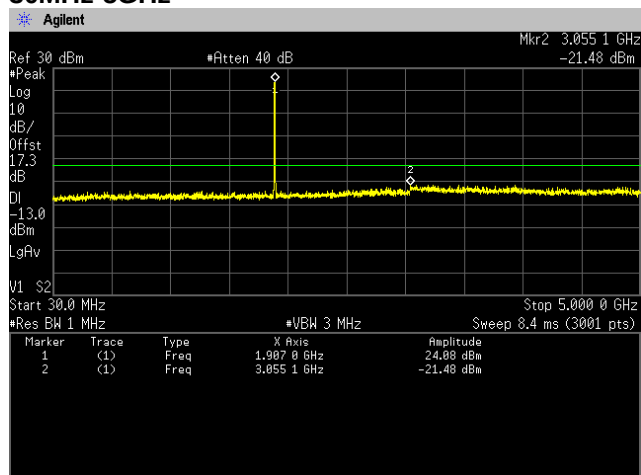


5GHz-10GHz

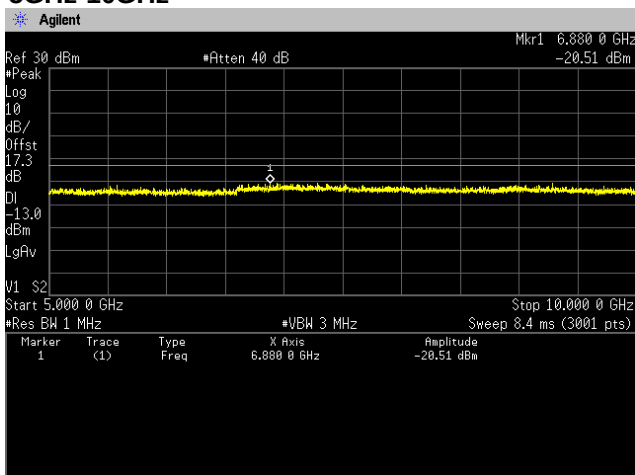


10GHz-15GHz

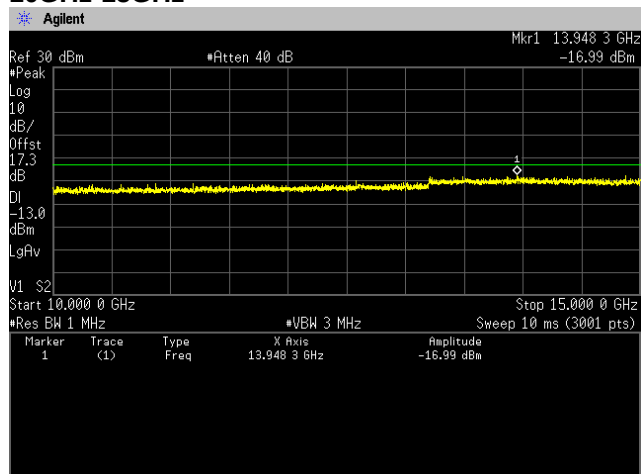


15GHz-20GHz

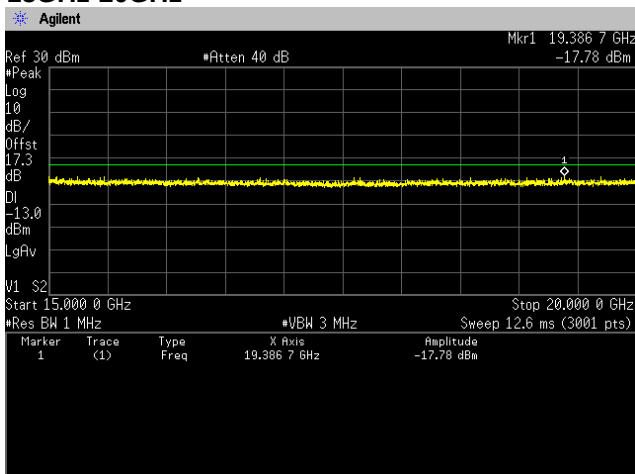


[LTE Band II]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low

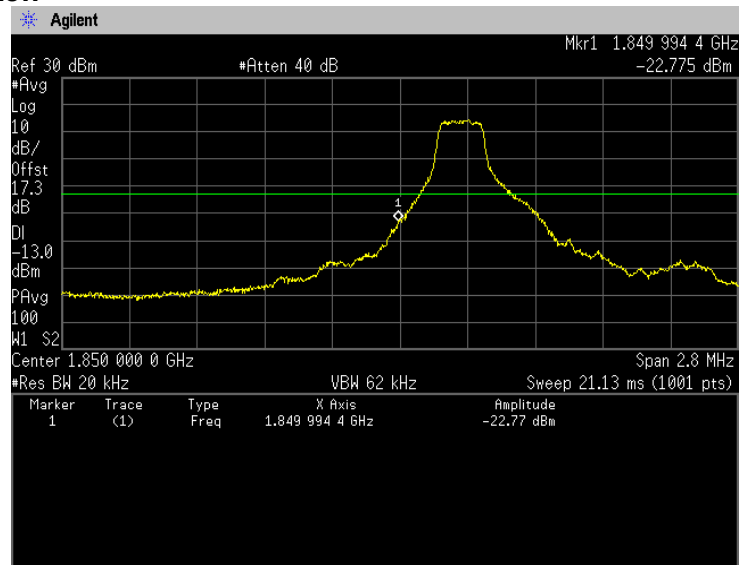


QPSK, BW 1.4MHz, RB1-5
Channel: High

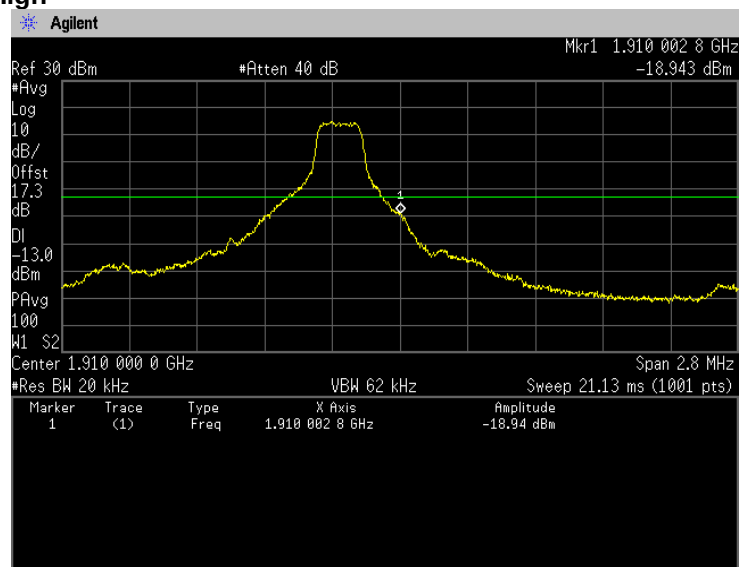


QPSK, BW 1.4MHz, RB6-0
Channel: Low

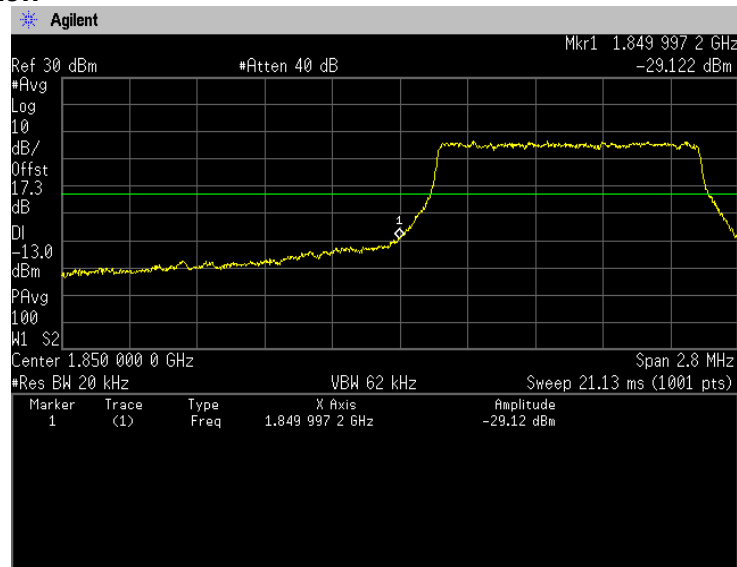


QPSK, BW 1.4MHz, RB6-0
Channel: High

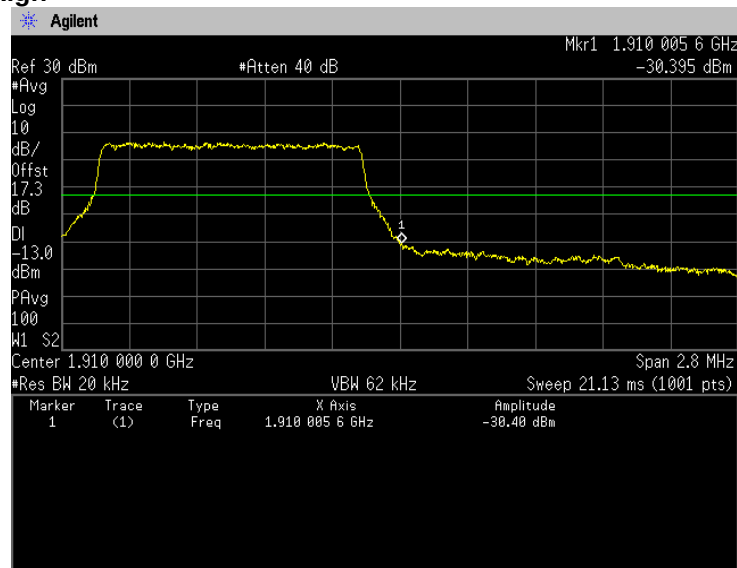


QPSK, BW 3MHz, RB1-0
Channel: Low

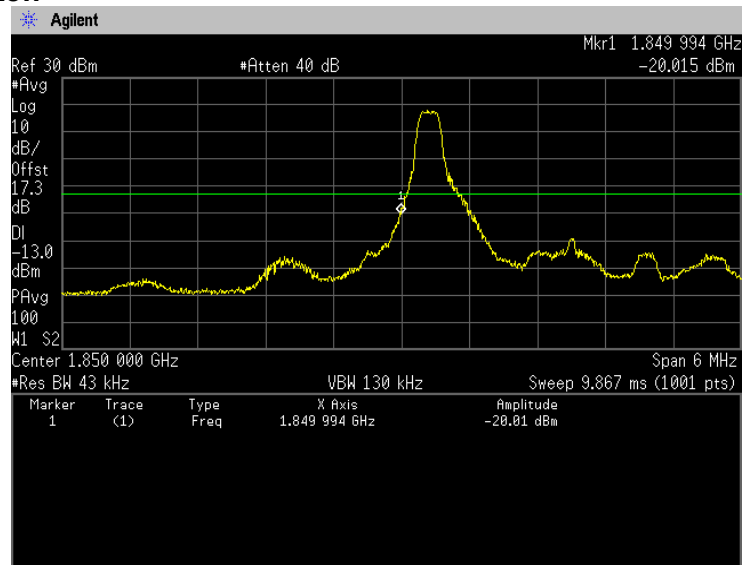


QPSK, BW 3MHz, RB1-14
Channel: High

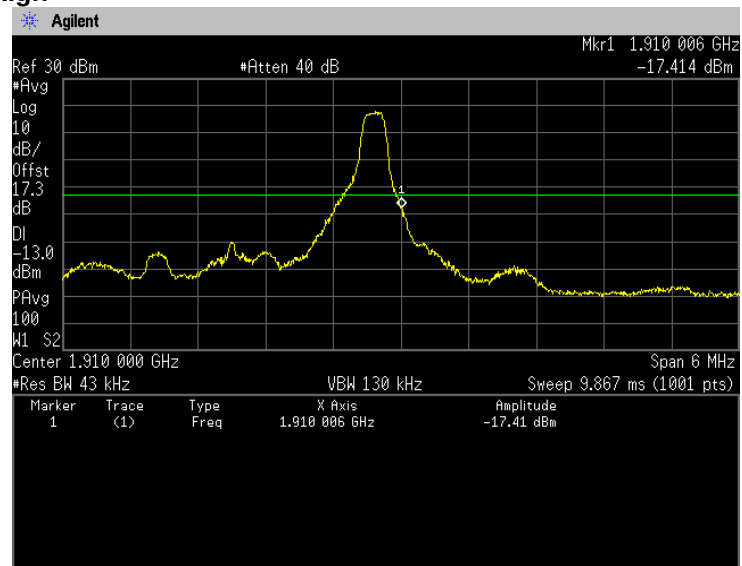


QPSK, BW 3MHz, RB15-0
Channel: Low

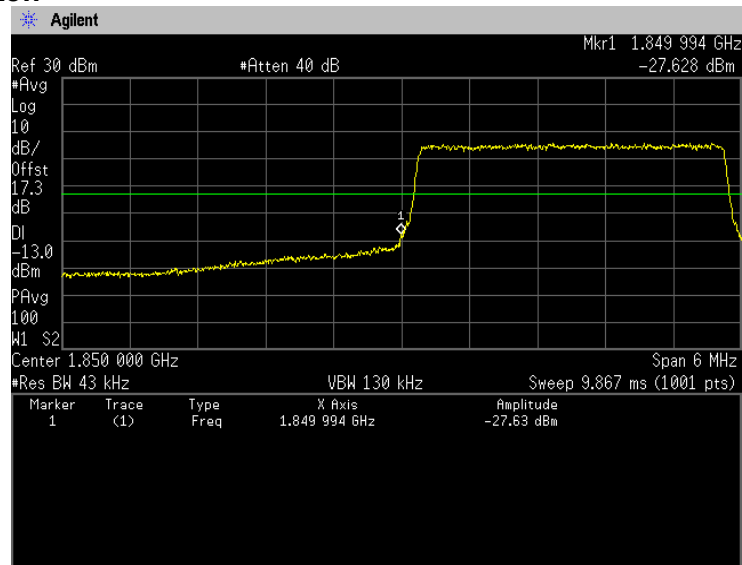


QPSK, BW 3MHz, RB15-0
Channel: High

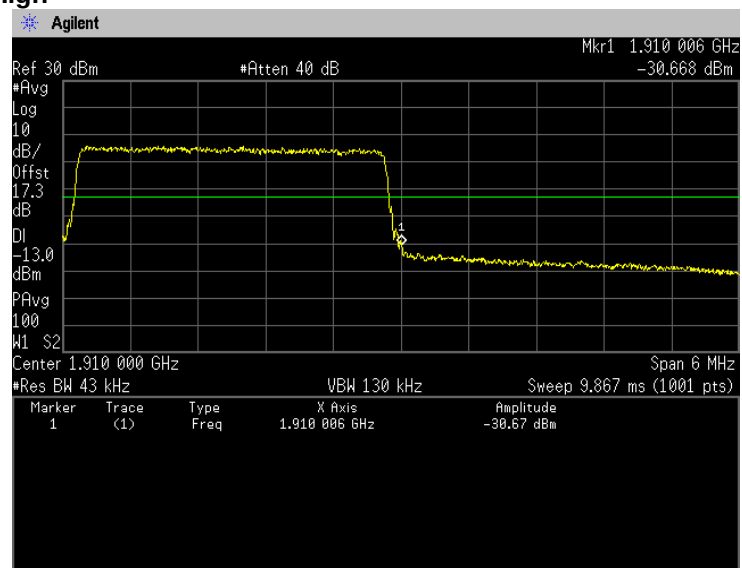


QPSK, BW 5MHz, RB1-0
Channel: Low

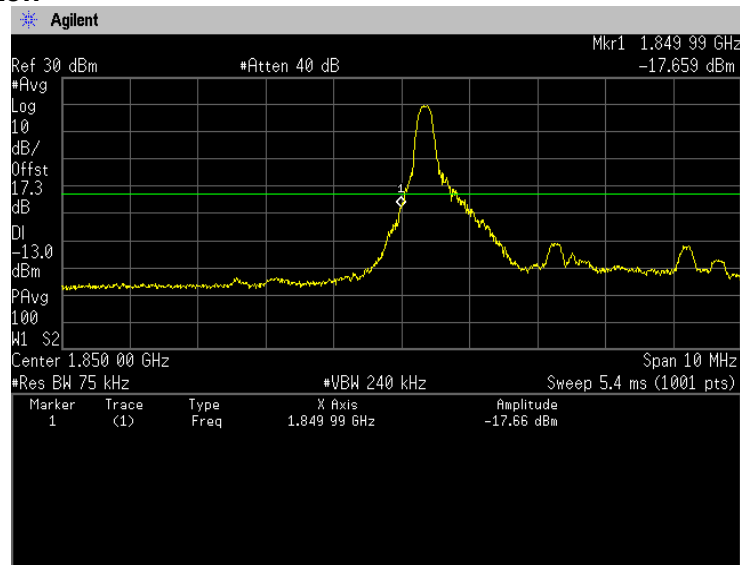


QPSK, BW 5MHz, RB1-24
Channel: High

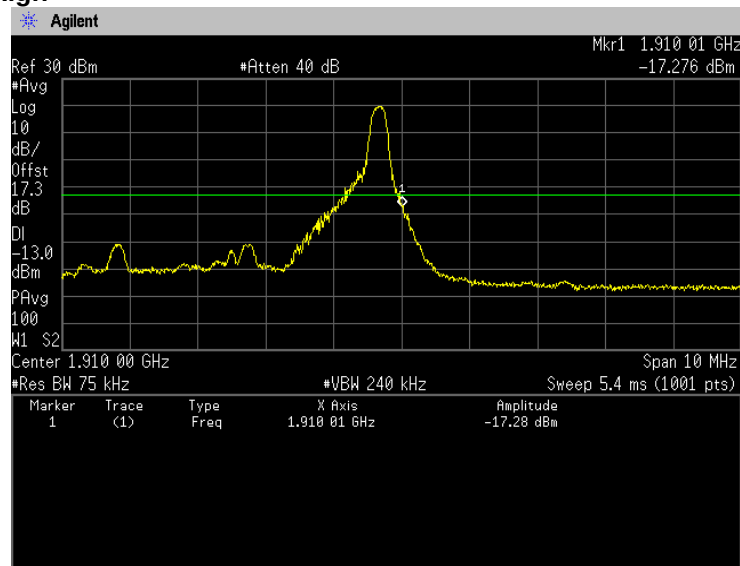


QPSK, BW 5MHz, RB25-0
Channel: Low

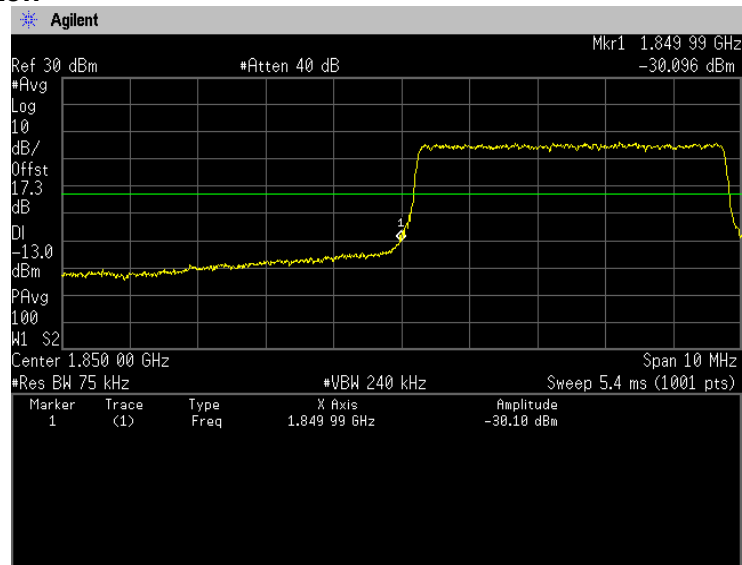


QPSK, BW 5MHz, RB25-0
Channel: High

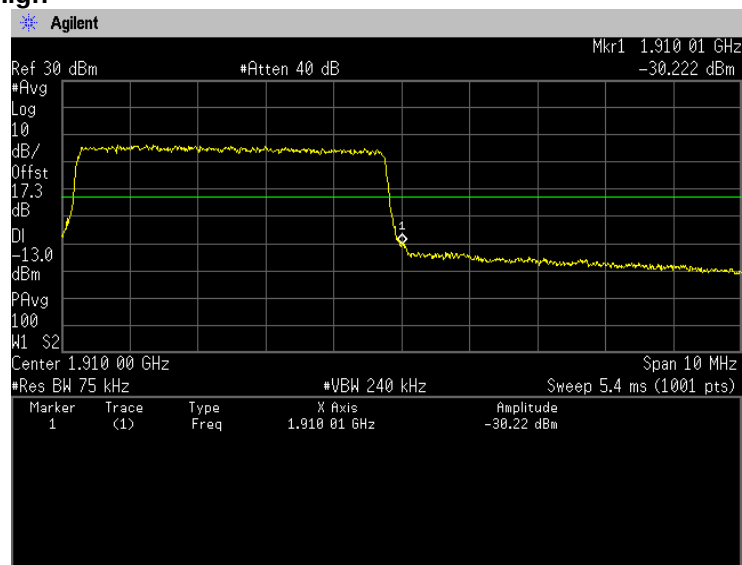


QPSK, BW 10MHz, RB1-0
Channel: Low

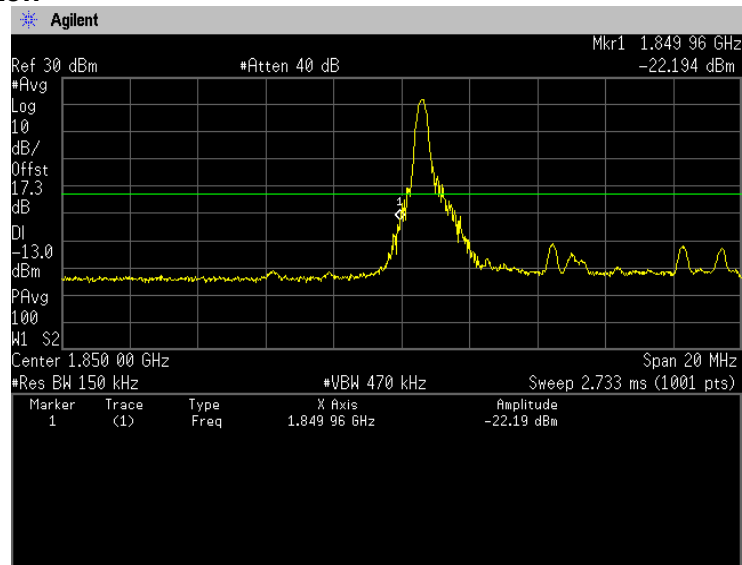


QPSK, BW 10MHz, RB1-49
Channel: High

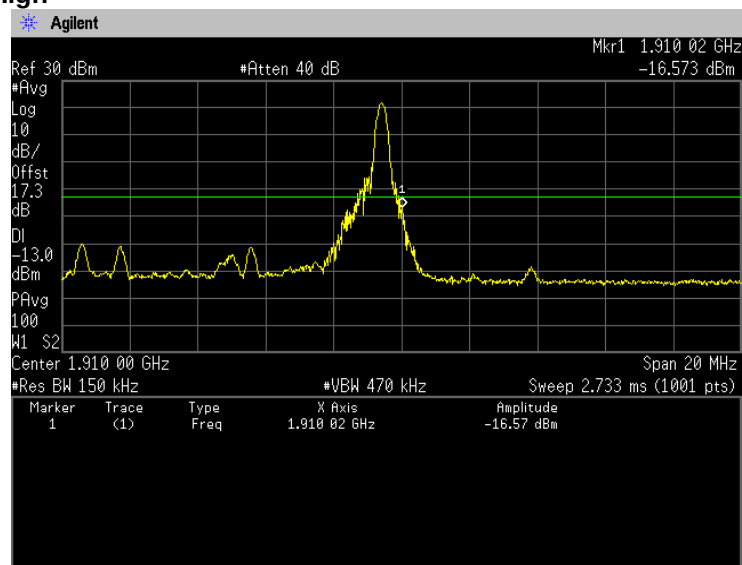


QPSK, BW 10MHz, RB50-0
Channel: Low

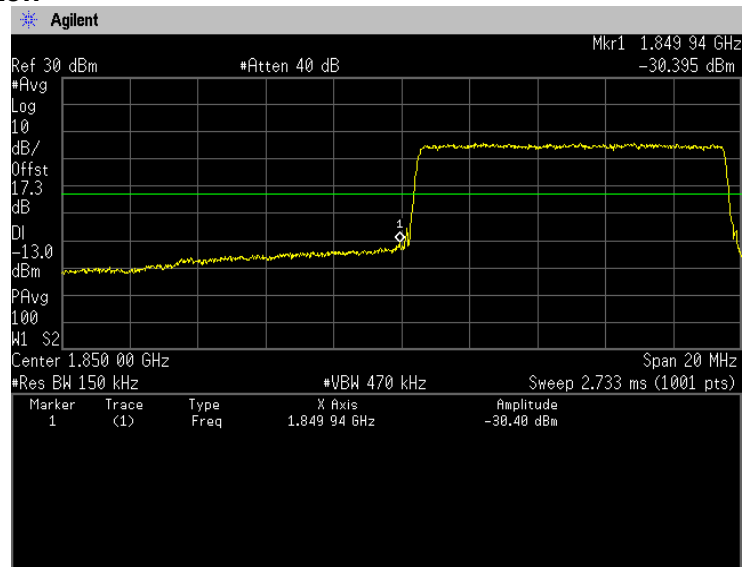


QPSK, BW 10MHz, RB50-0
Channel: High

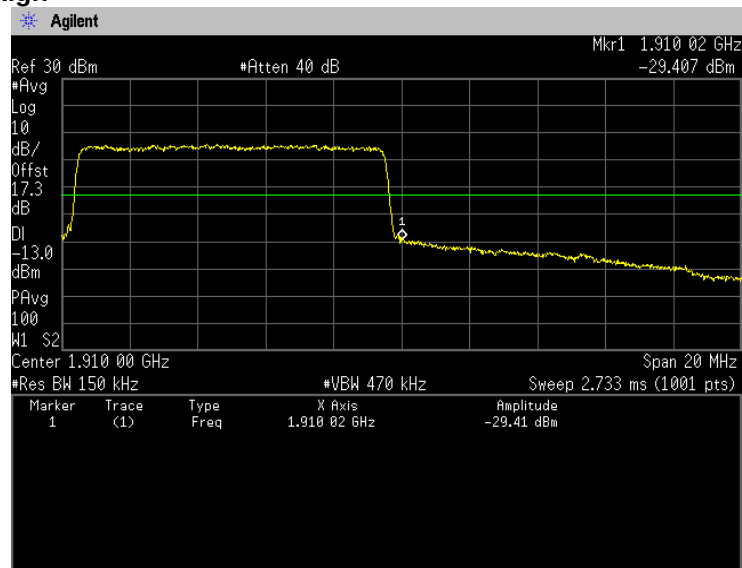


QPSK, BW 15MHz, RB1-0
Channel: Low

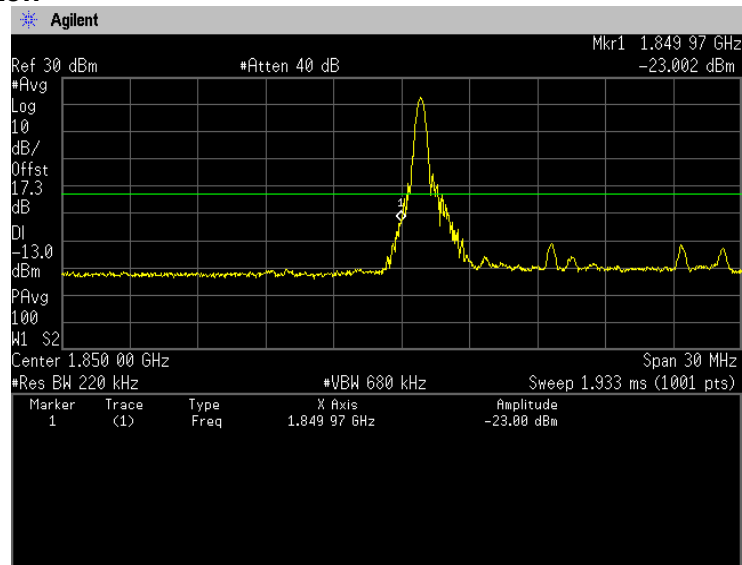


QPSK, BW 15MHz, RB1-74
Channel: High

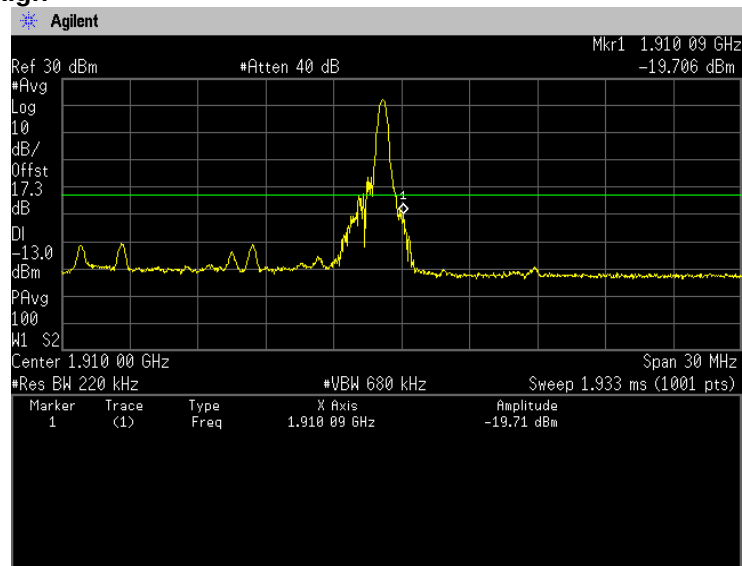


QPSK, BW 15MHz, RB75-0
Channel: Low

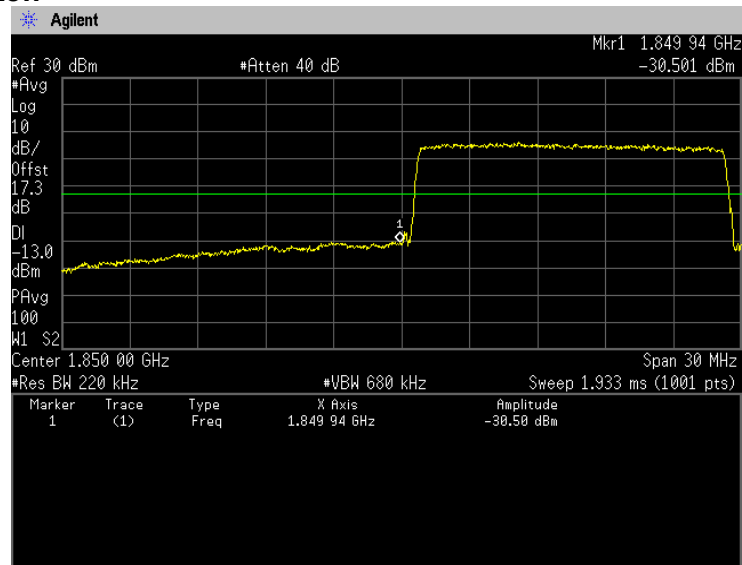


QPSK, BW 15MHz, RB75-0
Channel: High

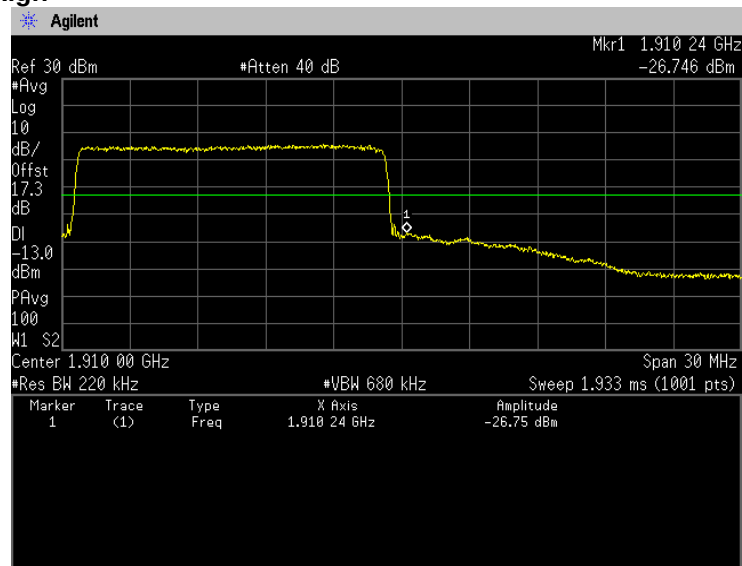


QPSK, BW 20MHz, RB1-0
Channel: Low

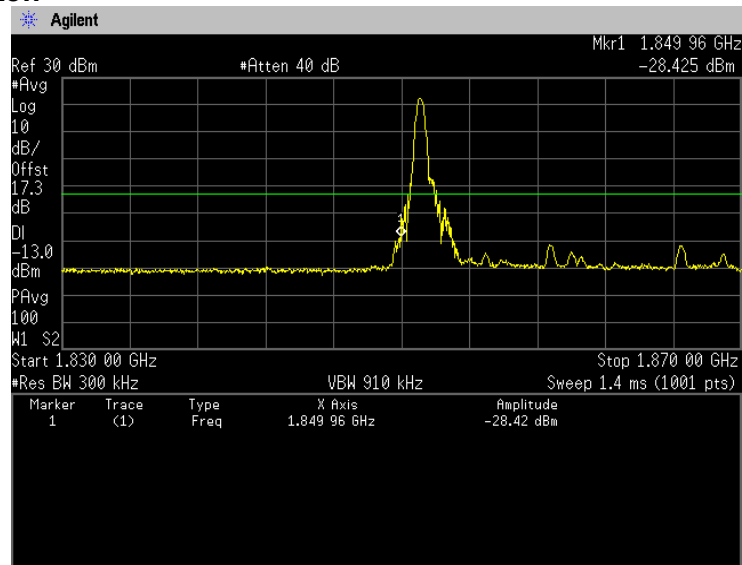


QPSK, BW 20MHz, RB1-99
Channel: High

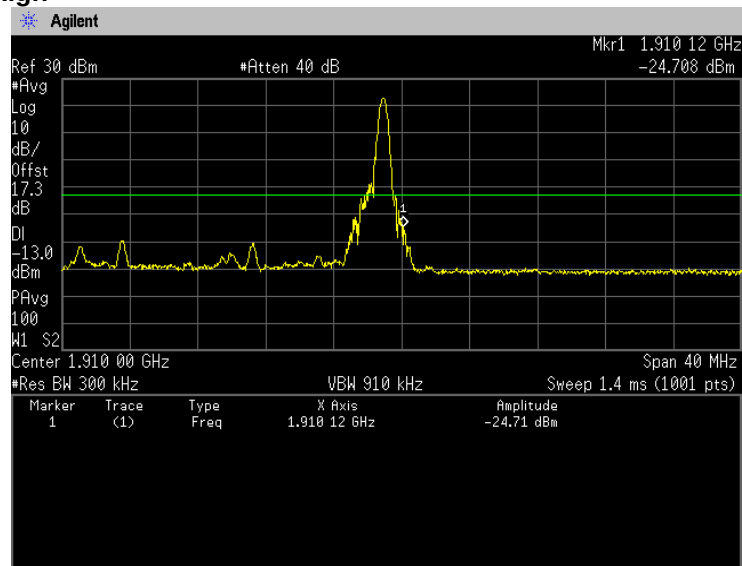


QPSK, BW 20MHz, RB100-0
Channel: Low

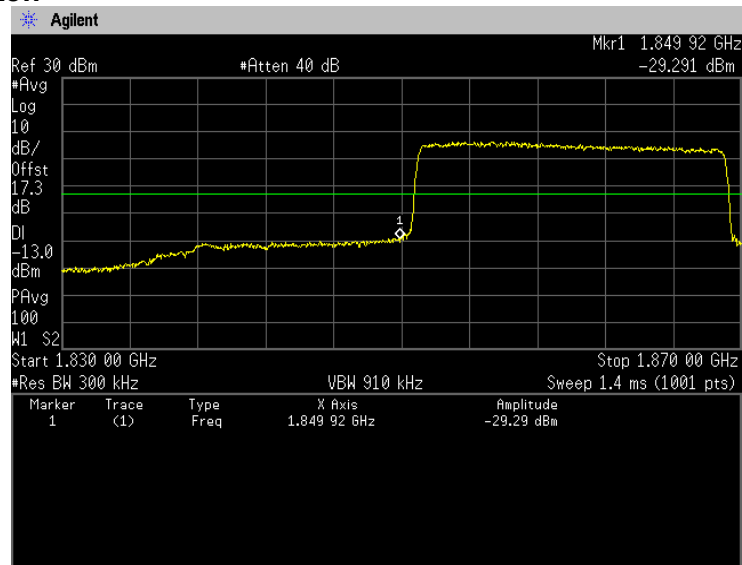


QPSK, BW 20MHz, RB100-0
Channel: High

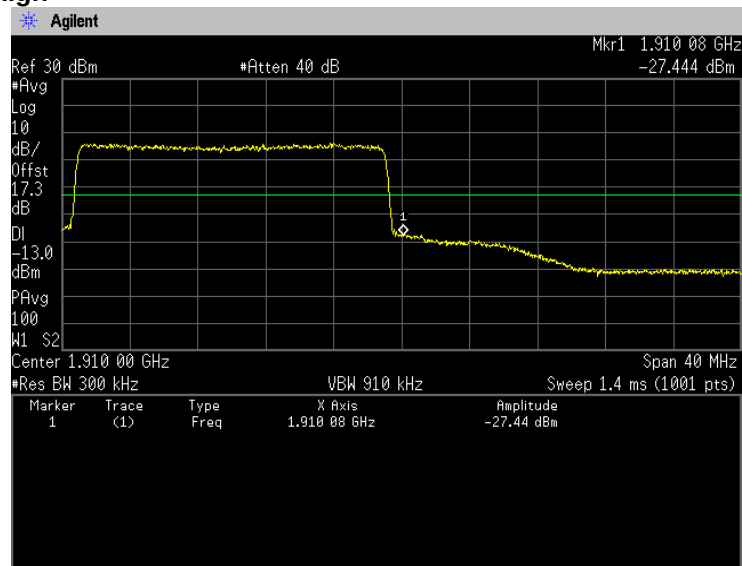


16QAM, BW 1.4MHz, RB1-0
Channel: Low

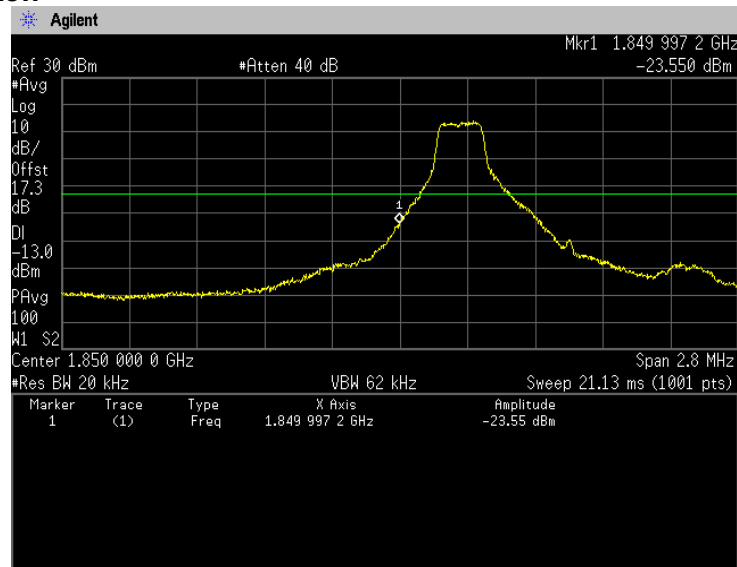


16QAM, BW 1.4MHz, RB1-5
Channel: High

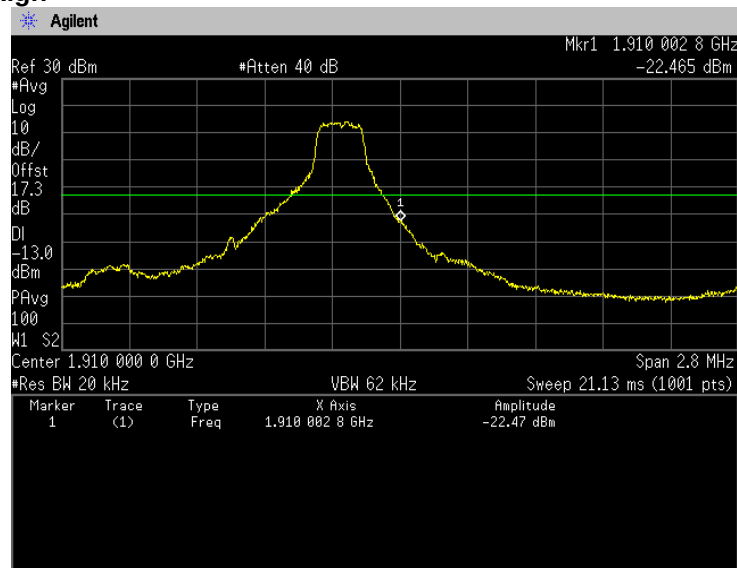


16QAM, BW 1.4MHz, RB6-0
Channel: Low

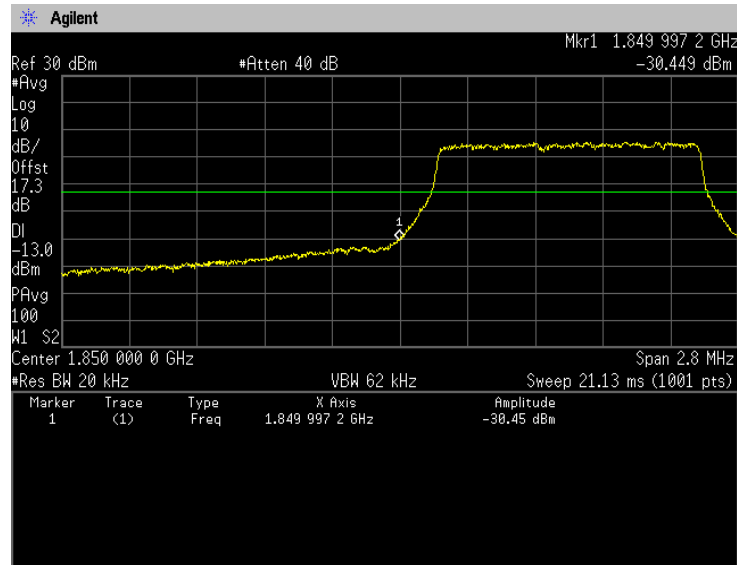


16QAM, BW 1.4MHz, RB6-0
Channel: High

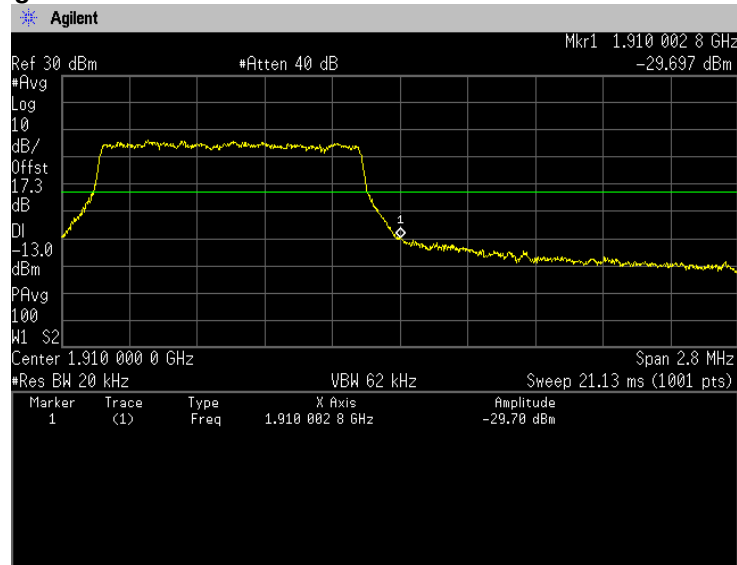


16QAM, BW 3MHz, RB1-0
Channel: Low

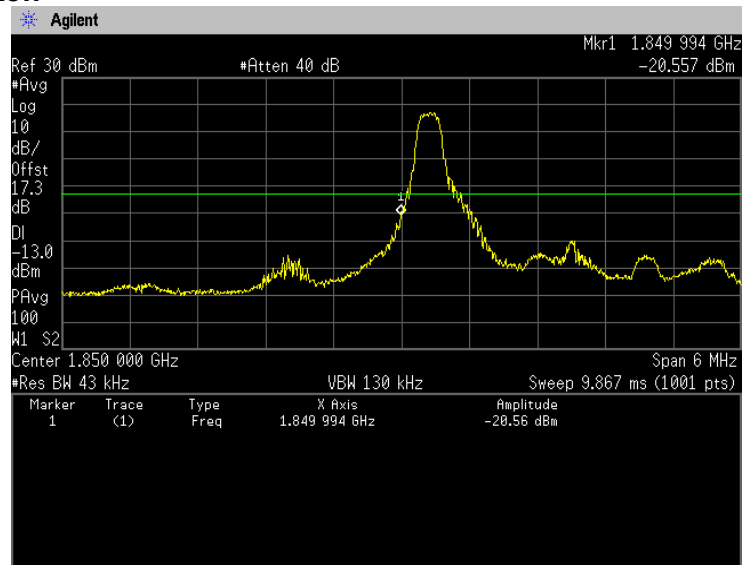


16QAM, BW 3MHz, RB1-14
Channel: High

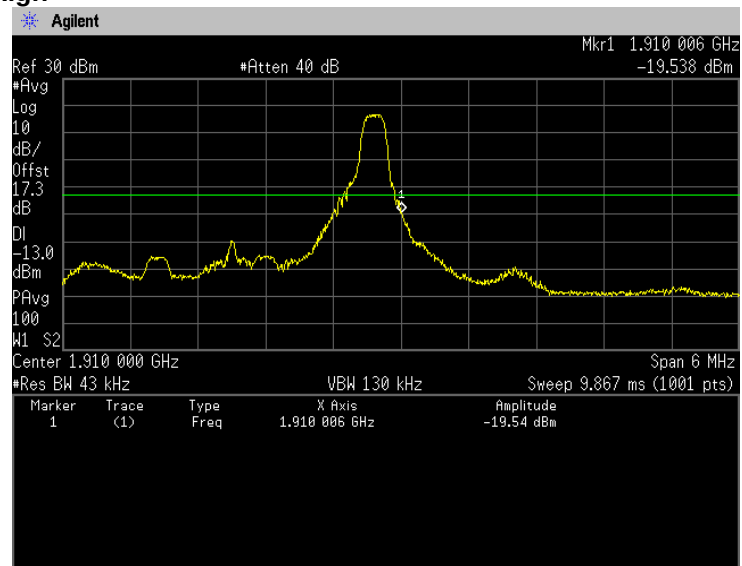


16QAM, BW 3MHz, RB15-0
Channel: Low

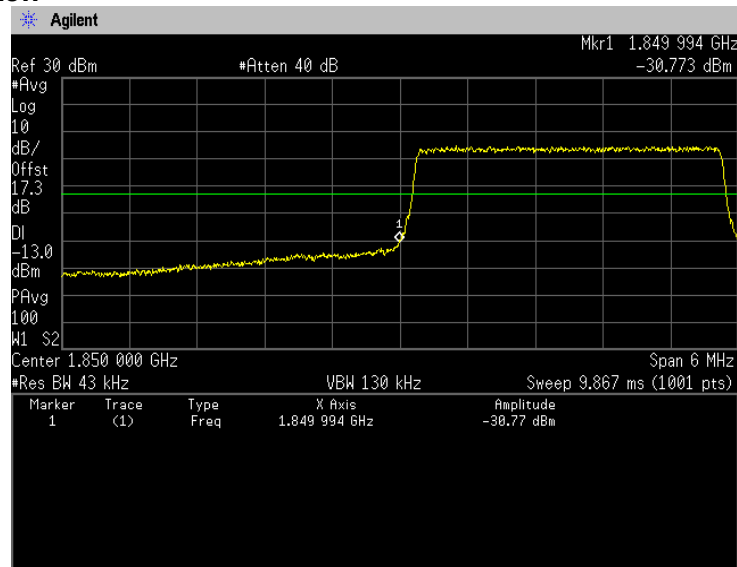


16QAM, BW 3MHz, RB15-0
Channel: High

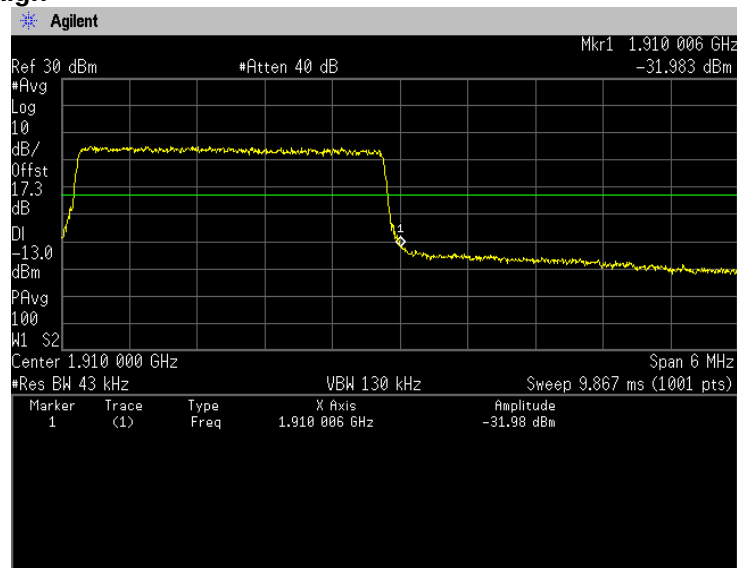


16QAM, BW 5MHz, RB1-0
Channel: Low

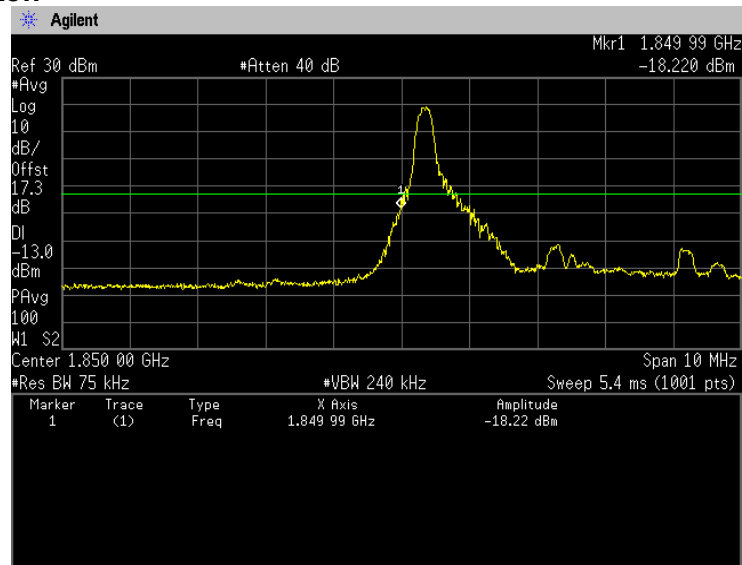


16QAM, BW 5MHz, RB1-24
Channel: High

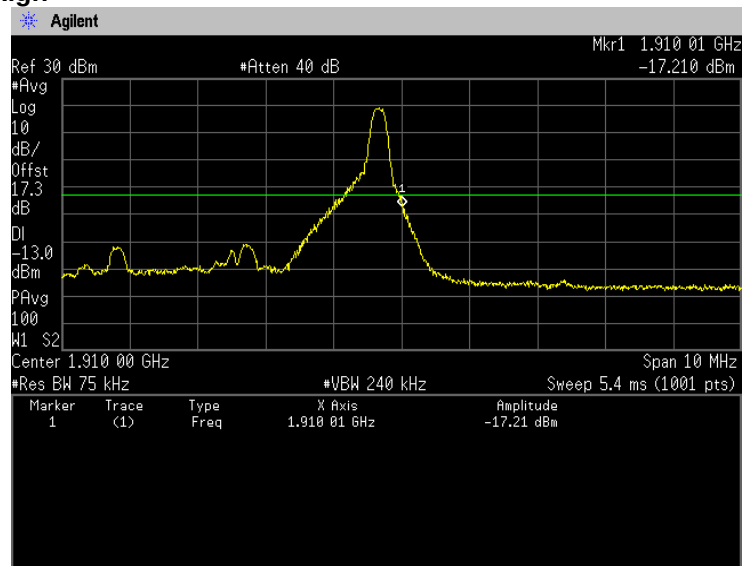


16QAM, BW 5MHz, RB25-0
Channel: Low

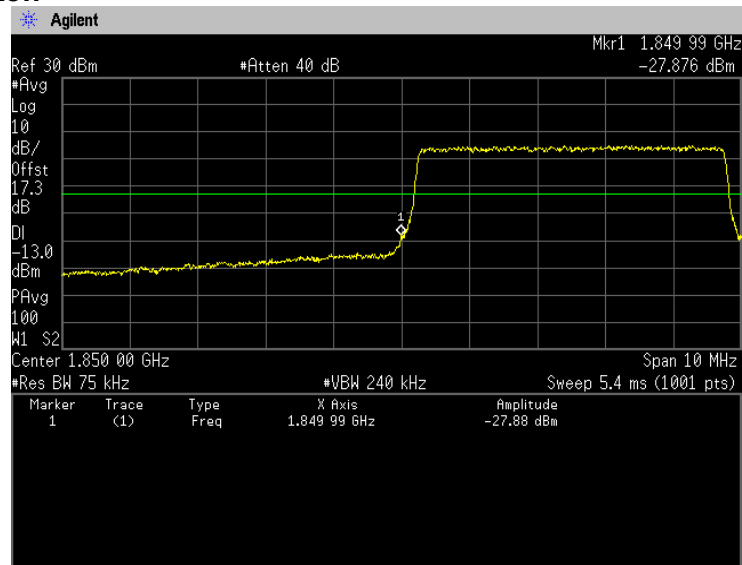


16QAM, BW 5MHz, RB25-0
Channel: High

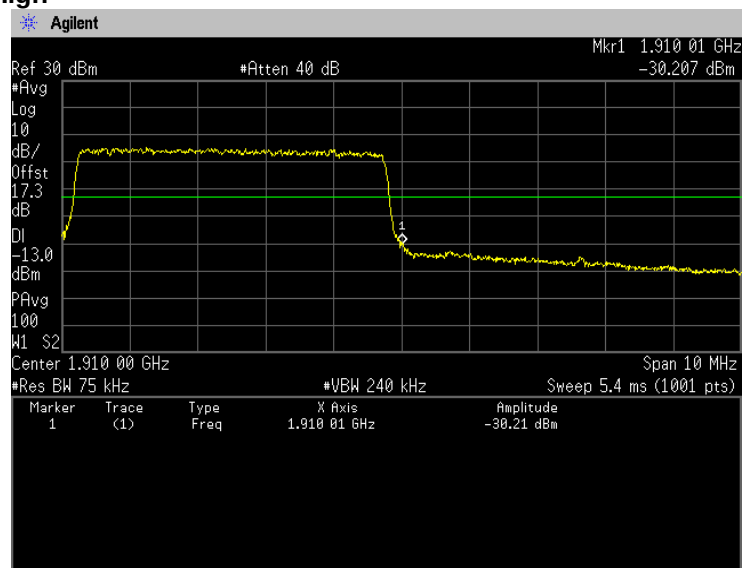

16QAM, BW 10MHz, RB1-0
Channel: Low

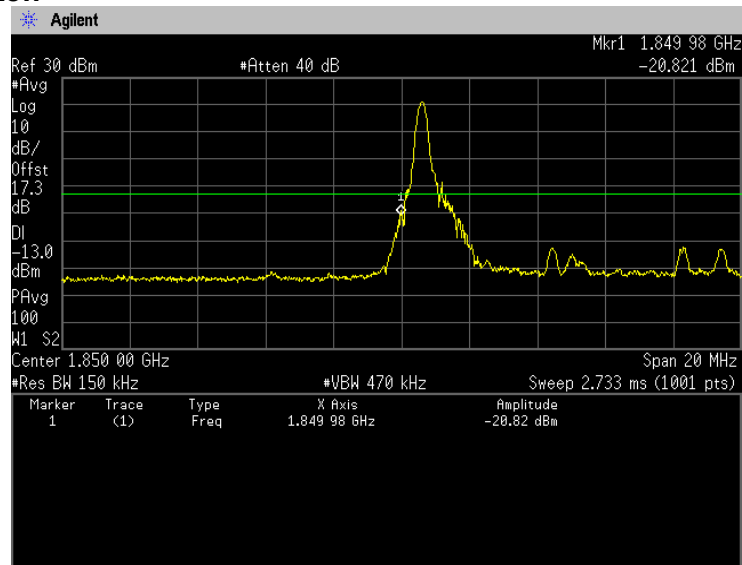


16QAM, BW 10MHz, RB1-49
Channel: High

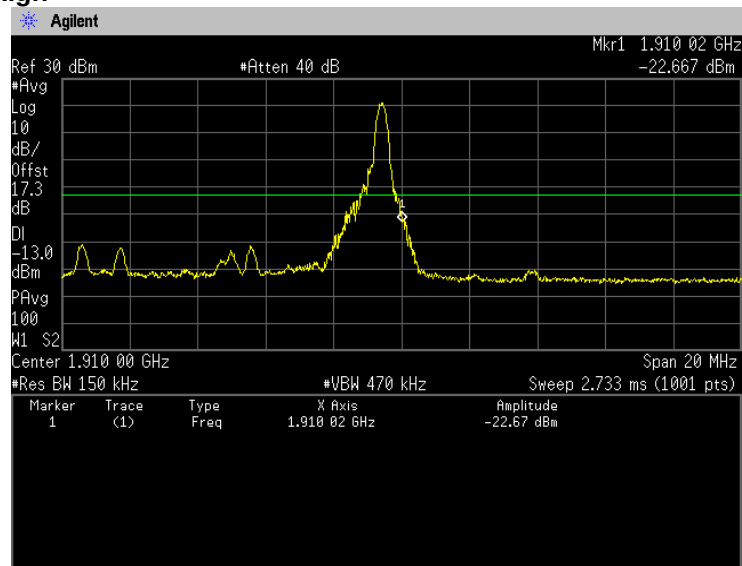




Japan


16QAM, BW 10MHz, RB50-0
Channel: Low

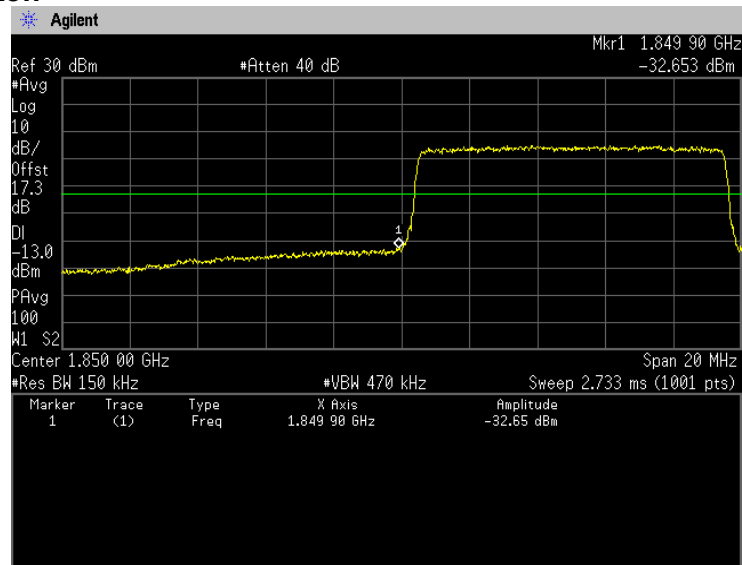


16QAM, BW 10MHz, RB50-0
Channel: High

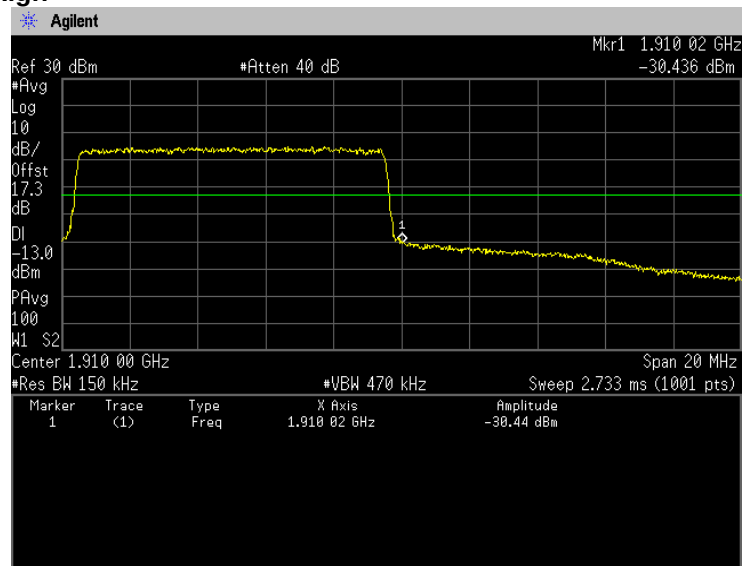


16QAM, BW 15MHz, RB1-0
Channel: Low

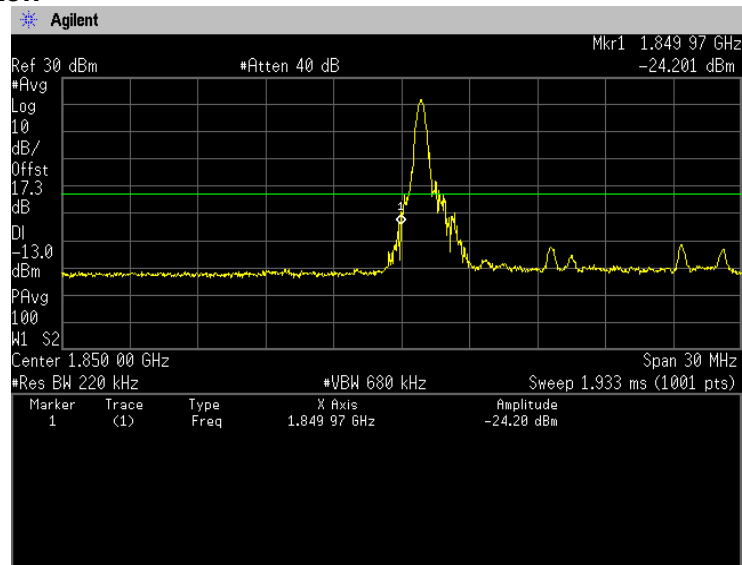


16QAM, BW 15MHz, RB1-74
Channel: High

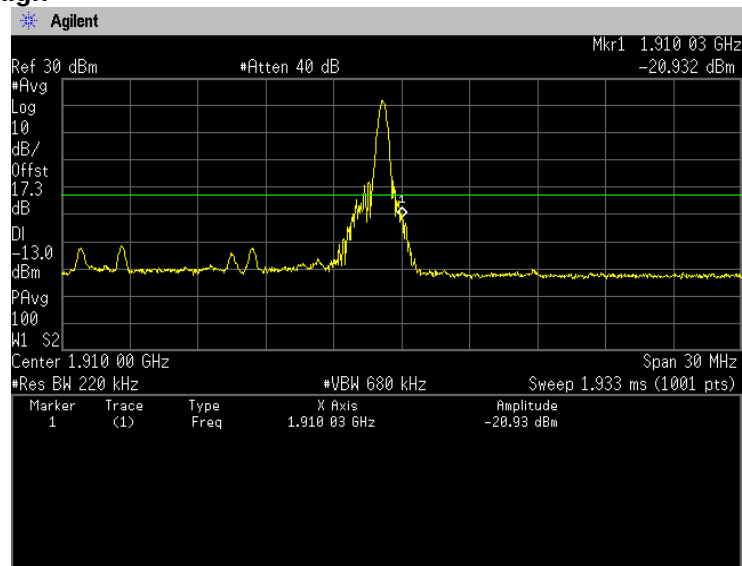


16QAM, BW 15MHz, RB75-0
Channel: Low

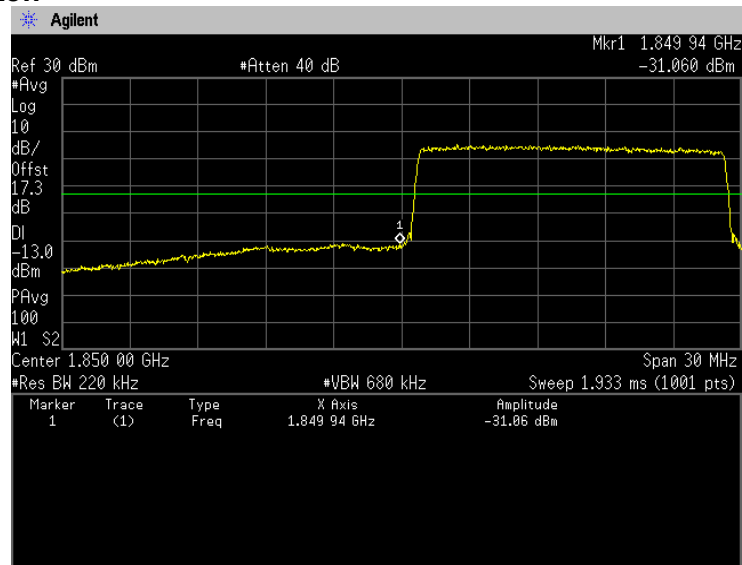


16QAM, BW 15MHz, RB75-0
Channel: High

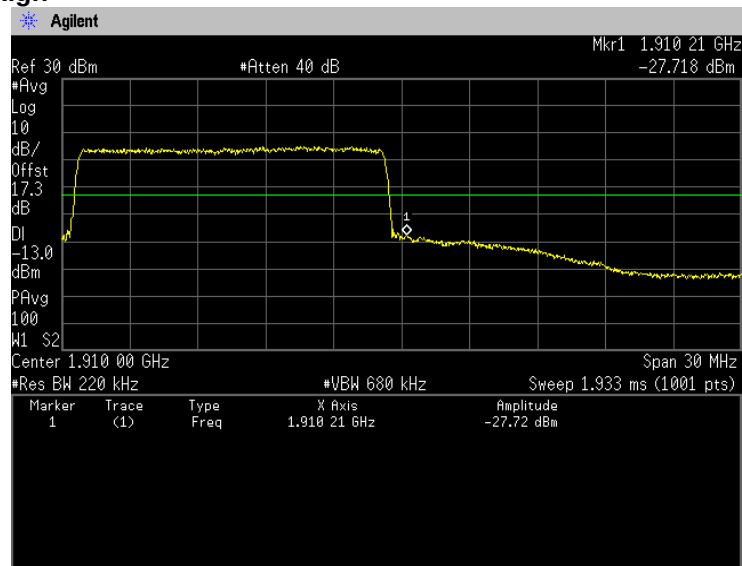


16QAM, BW 20MHz, RB1-0
Channel: Low

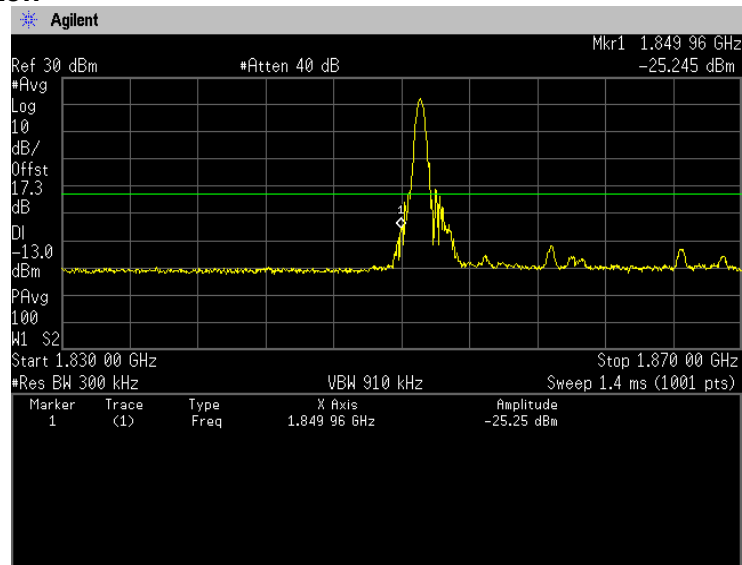


16QAM, BW 20MHz, RB1-99
Channel: High

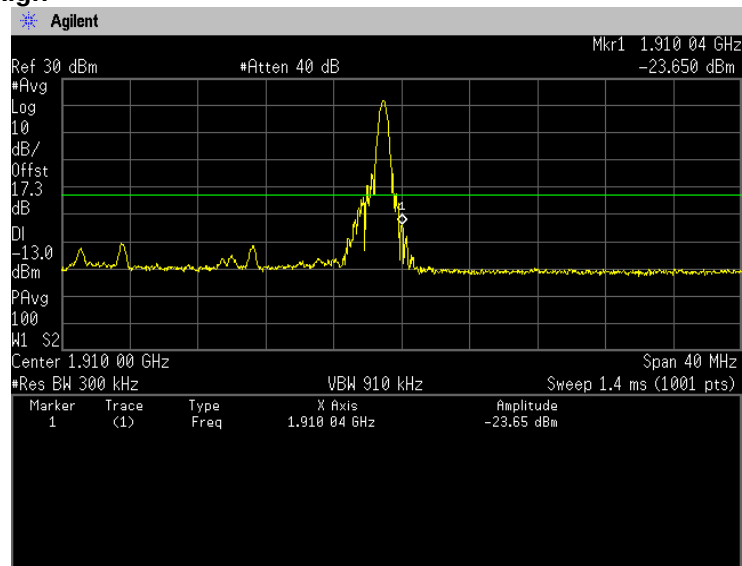


16QAM, BW 20MHz, RB100-0
Channel: Low

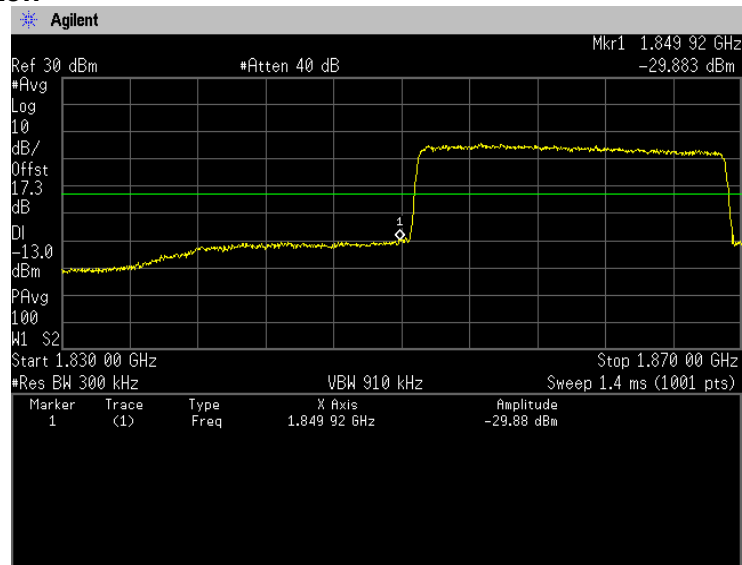


16QAM, BW 20MHz, RB100-0
Channel: High

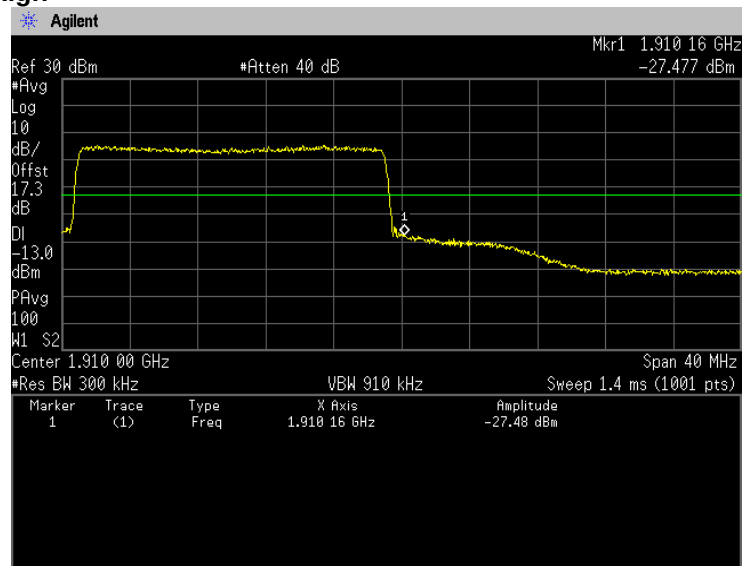


64QAM, BW 1.4MHz, RB1-0
Channel: Low

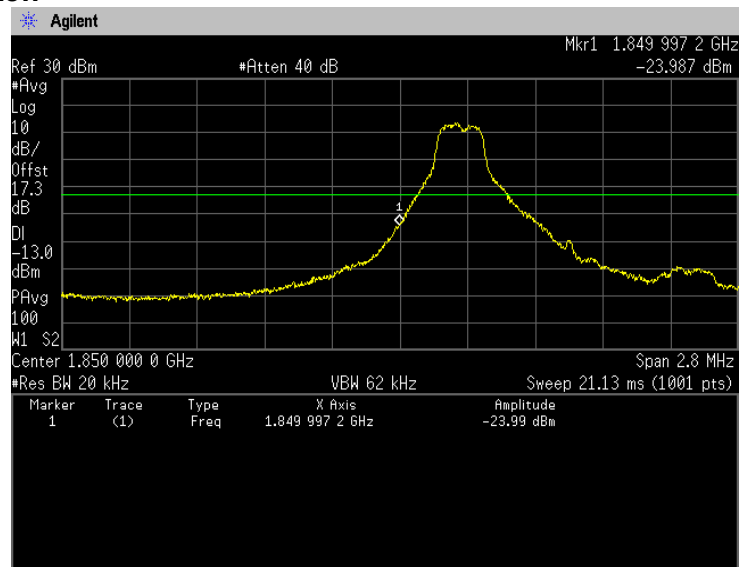


64QAM, BW 1.4MHz, RB1-5
Channel: High

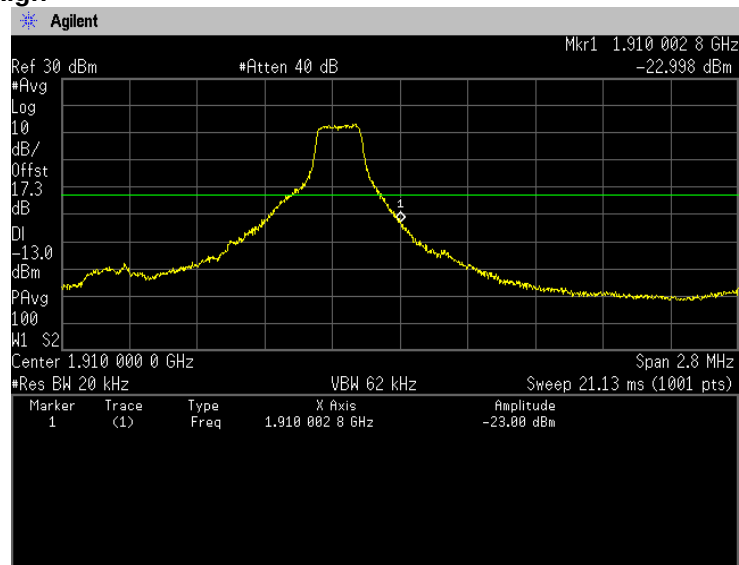


64QAM, BW 1.4MHz, RB6-0
Channel: Low

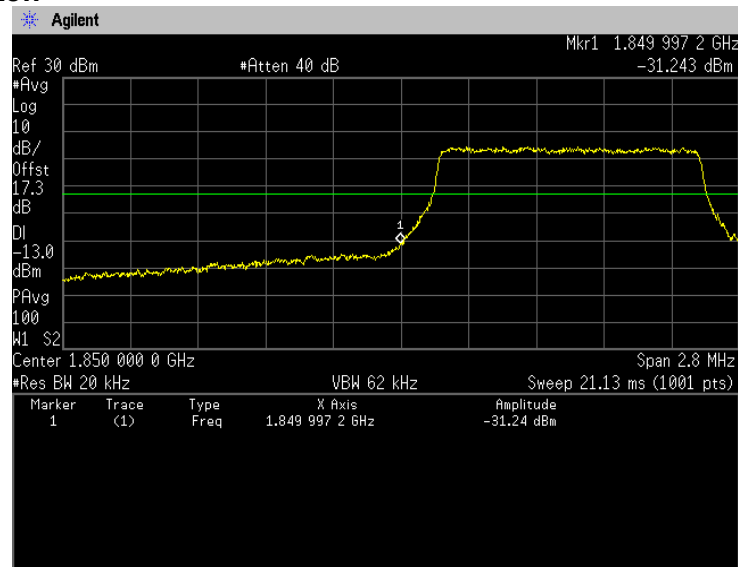


64QAM, BW 1.4MHz, RB6-0
Channel: High

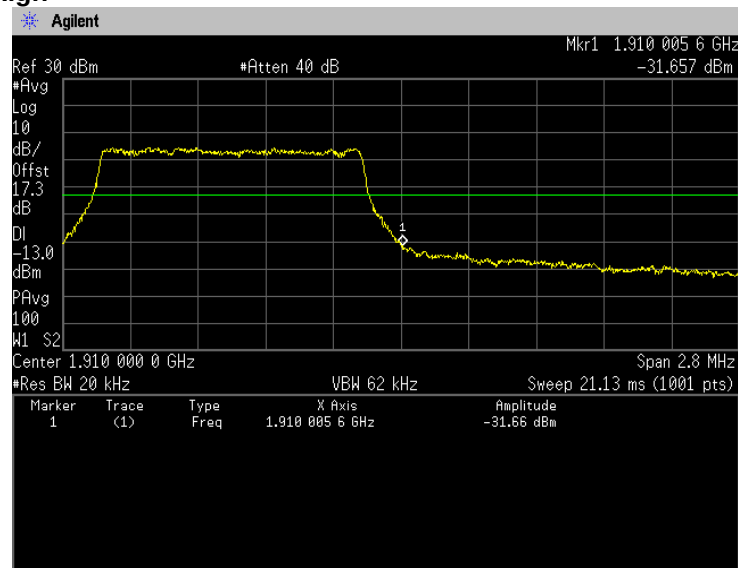


64QAM, BW 3MHz, RB1-0
Channel: Low

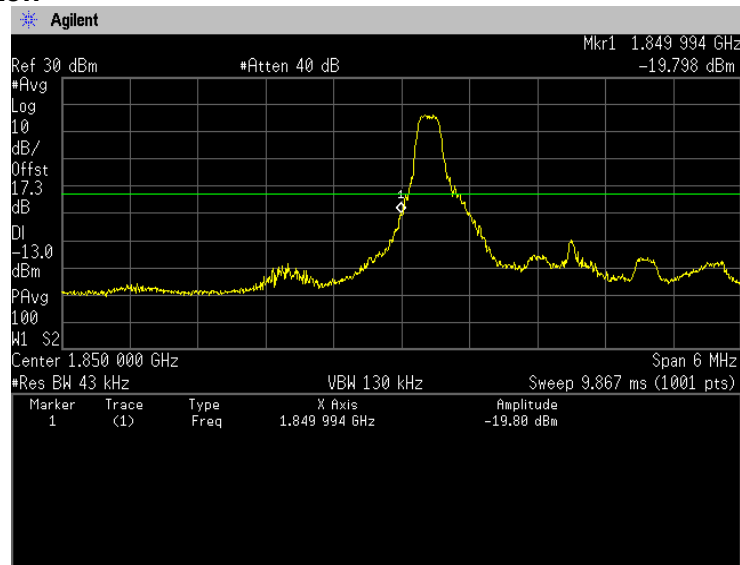


64QAM, BW 3MHz, RB1-14
Channel: High

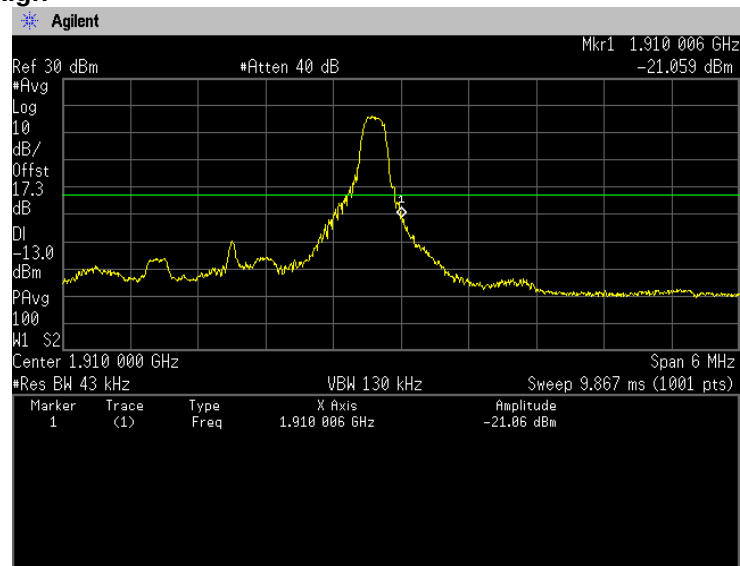


64QAM, BW 3MHz, RB15-0
Channel: Low

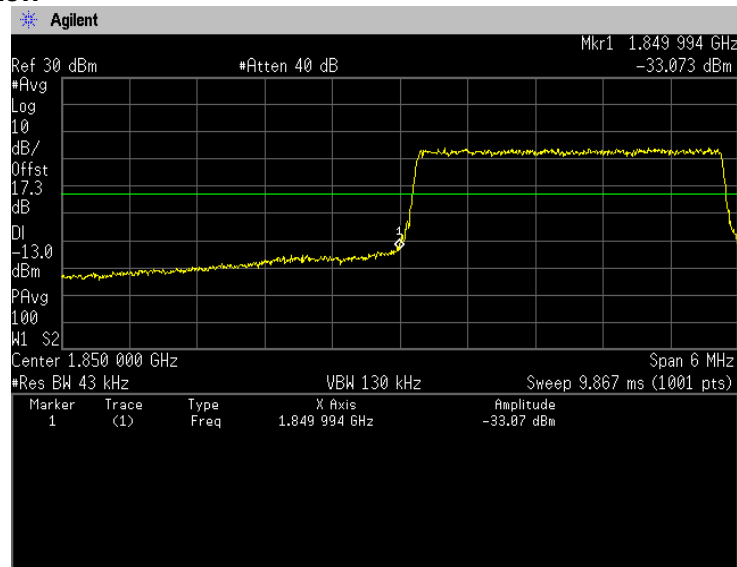


64QAM, BW 3MHz, RB15-0
Channel: High

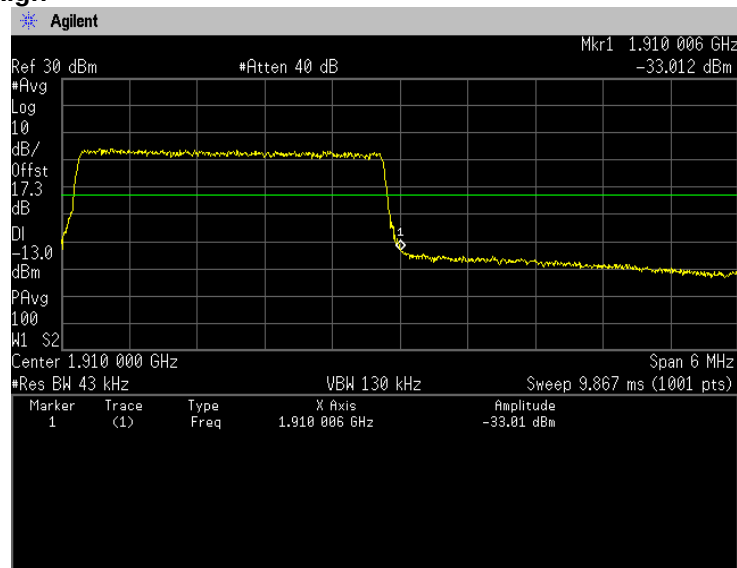


64QAM, BW 5MHz, RB1-0
Channel: Low

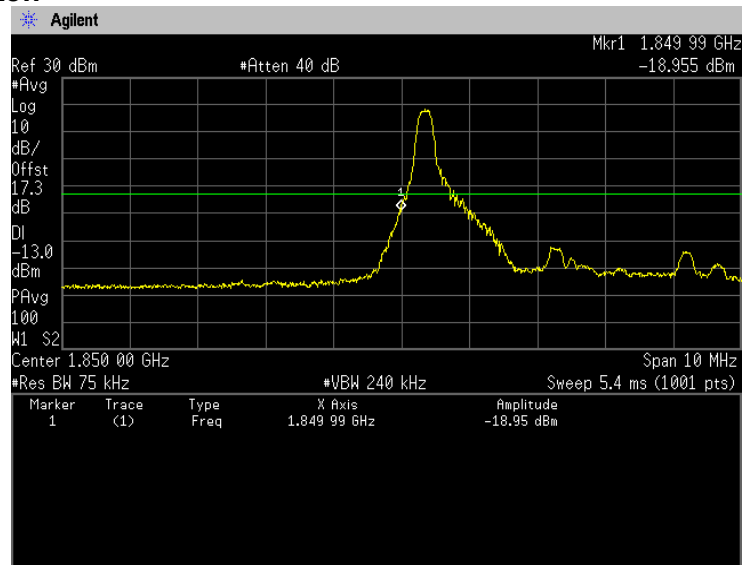


64QAM, BW 5MHz, RB1-24
Channel: High

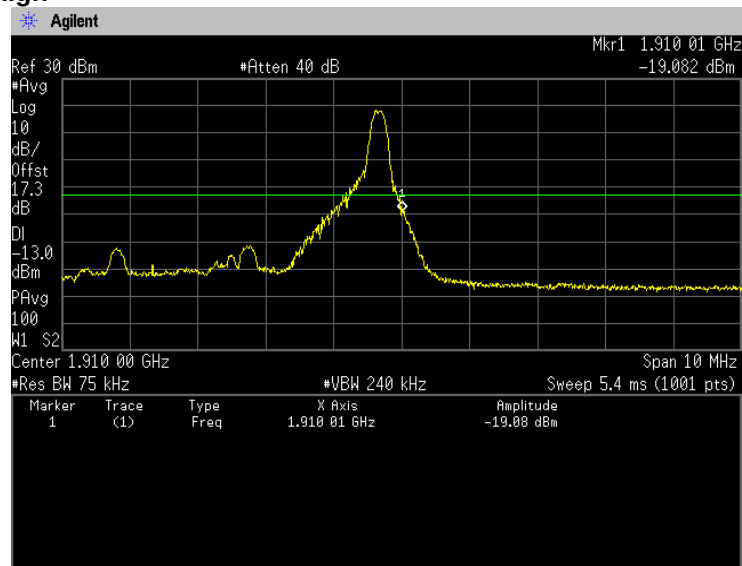


64QAM, BW 5MHz, RB25-0
Channel: Low

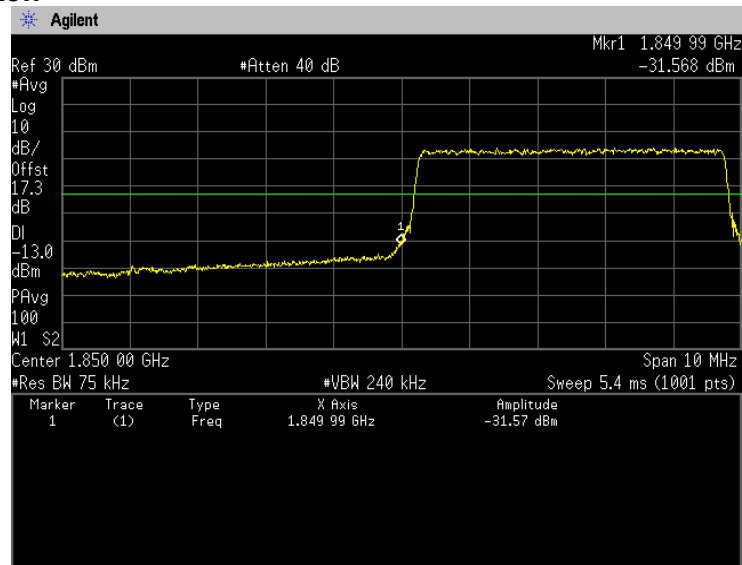


64QAM, BW 5MHz, RB25-0
Channel: High

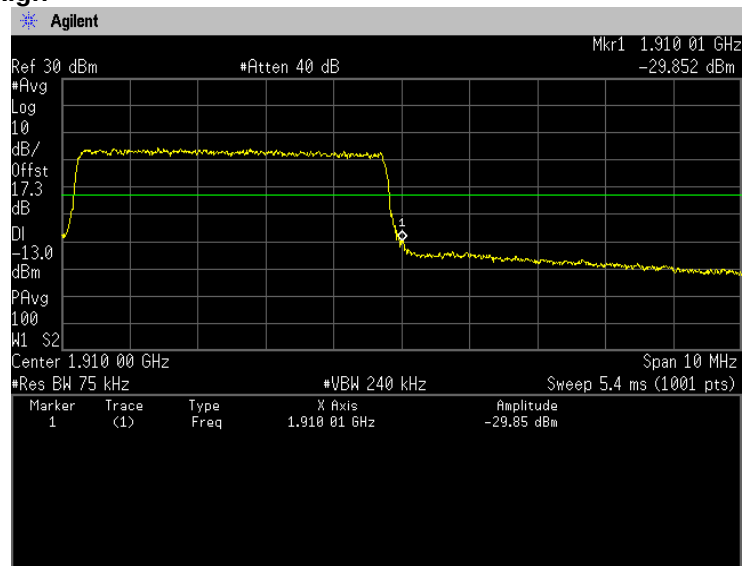


64QAM, BW 10MHz, RB1-0
Channel: Low

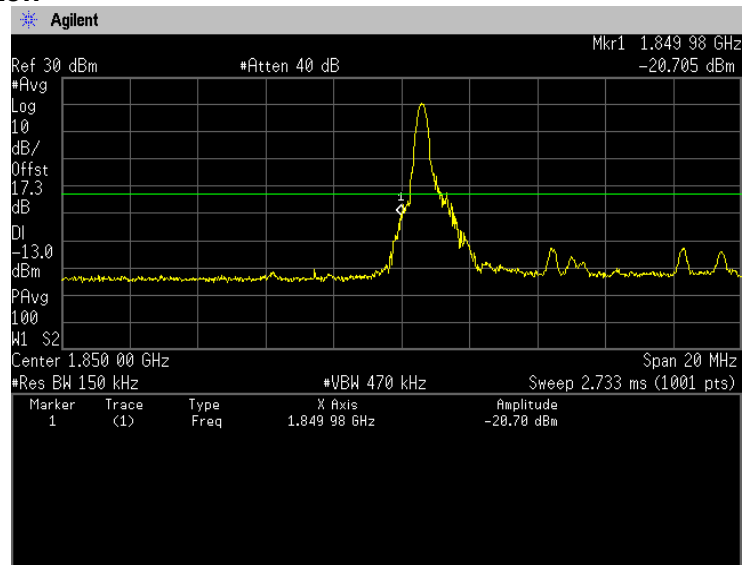


64QAM, BW 10MHz, RB1-49
Channel: High

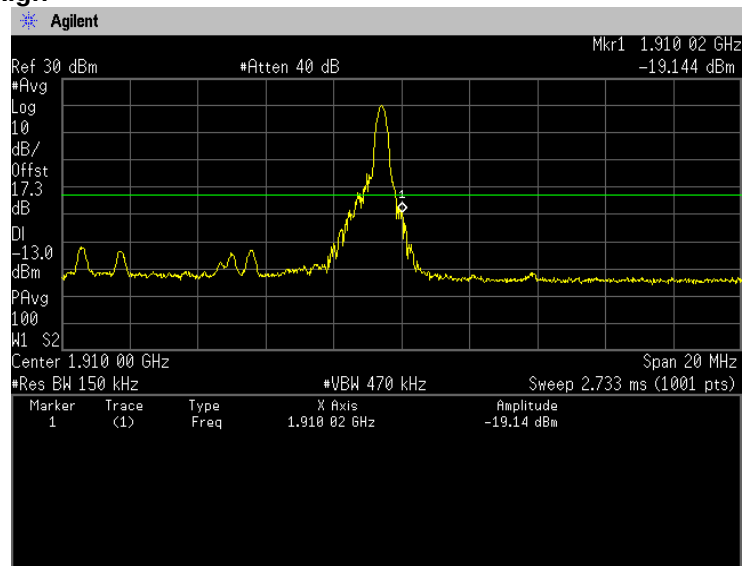


64QAM, BW 10MHz, RB50-0
Channel: Low

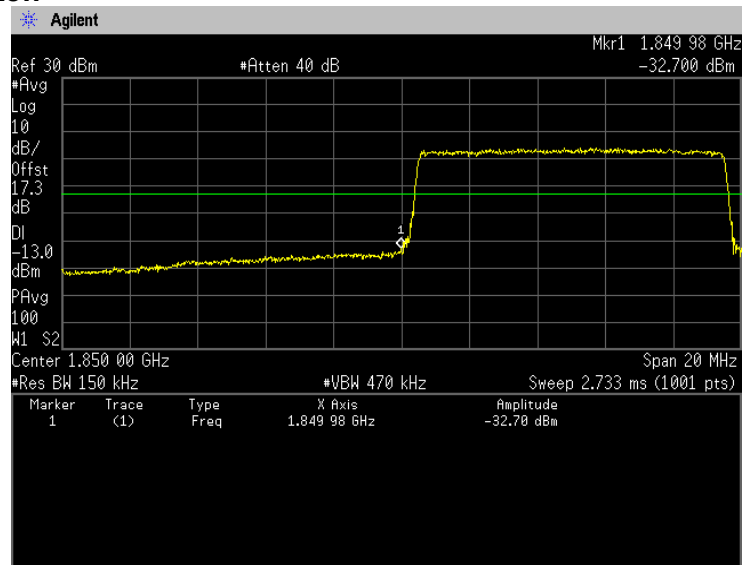


64QAM, BW 10MHz, RB50-0
Channel: High

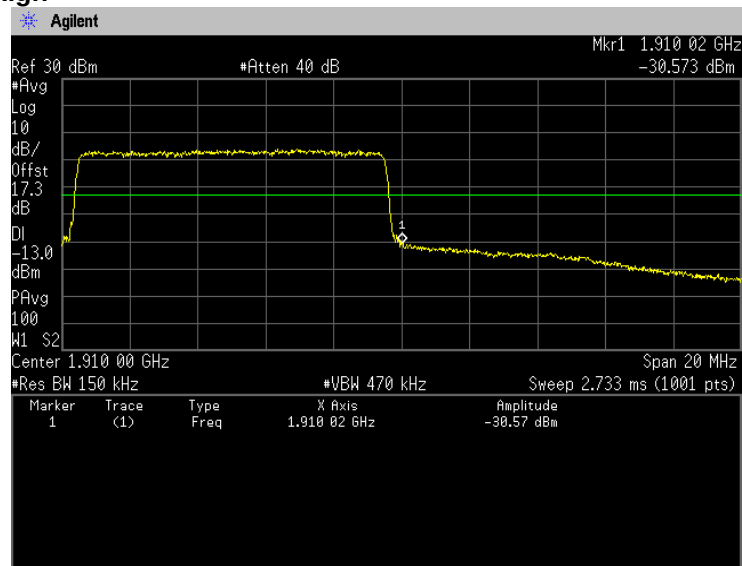


64QAM, BW 15MHz, RB1-0
Channel: Low

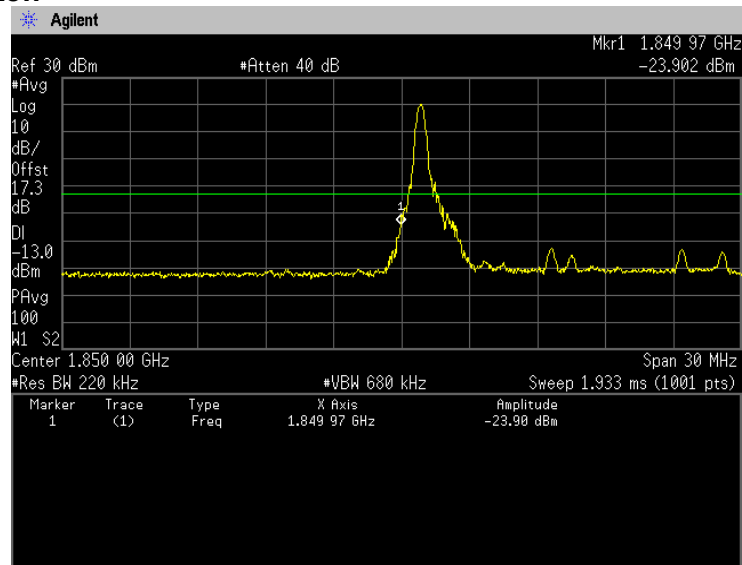


64QAM, BW 15MHz, RB1-74
Channel: High

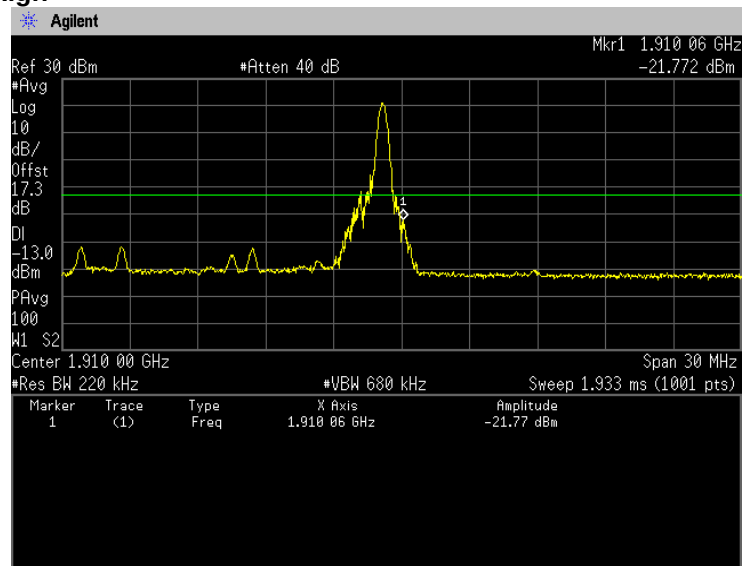


64QAM, BW 15MHz, RB75-0
Channel: Low

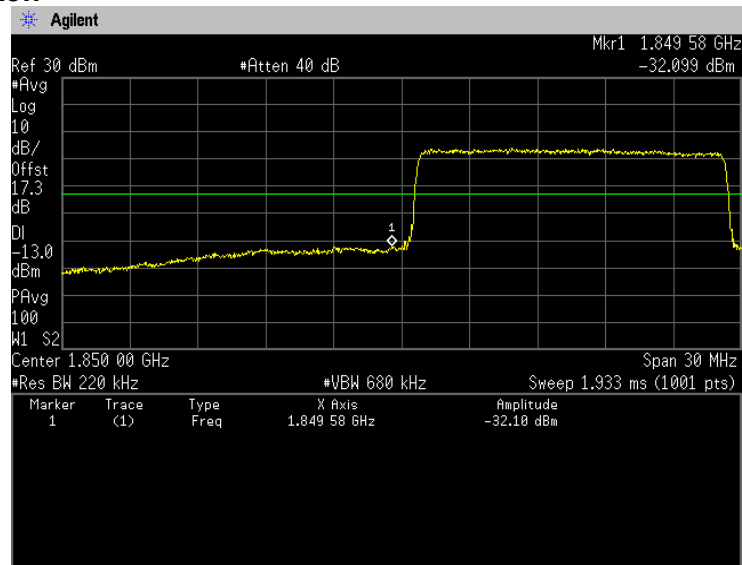


64QAM, BW 15MHz, RB75-0
Channel: High

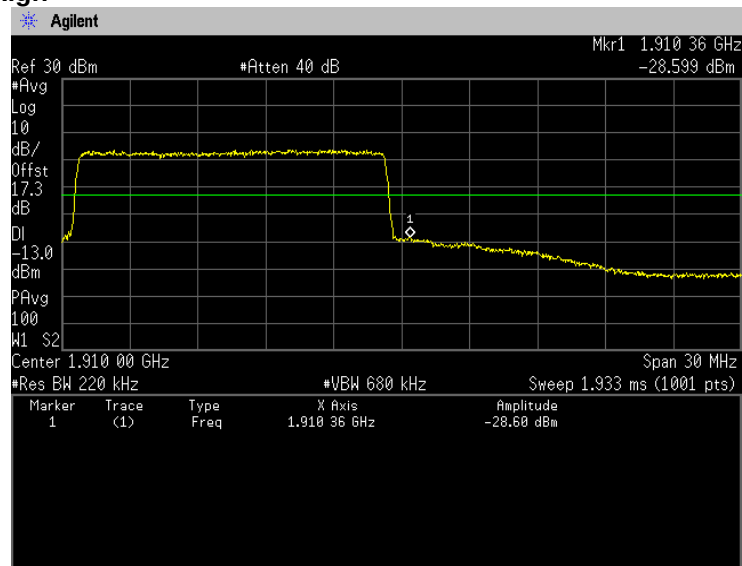


64QAM, BW 20MHz, RB1-0
Channel: Low

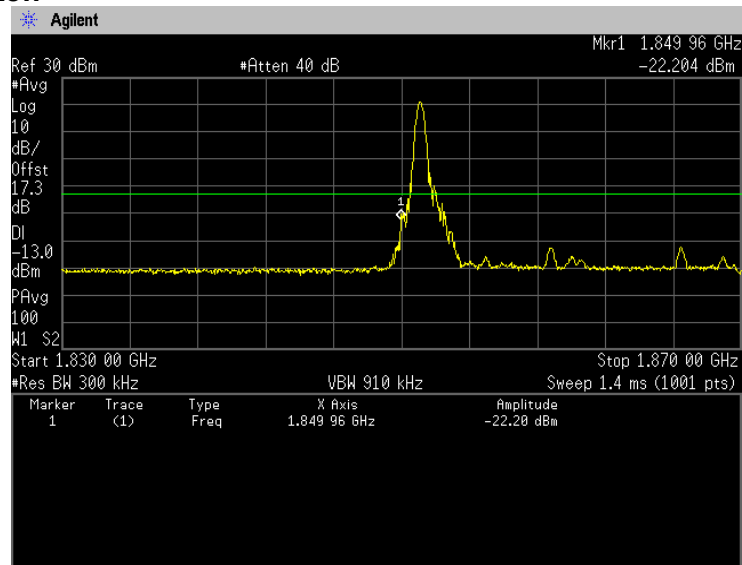


64QAM, BW 20MHz, RB1-99
Channel: High

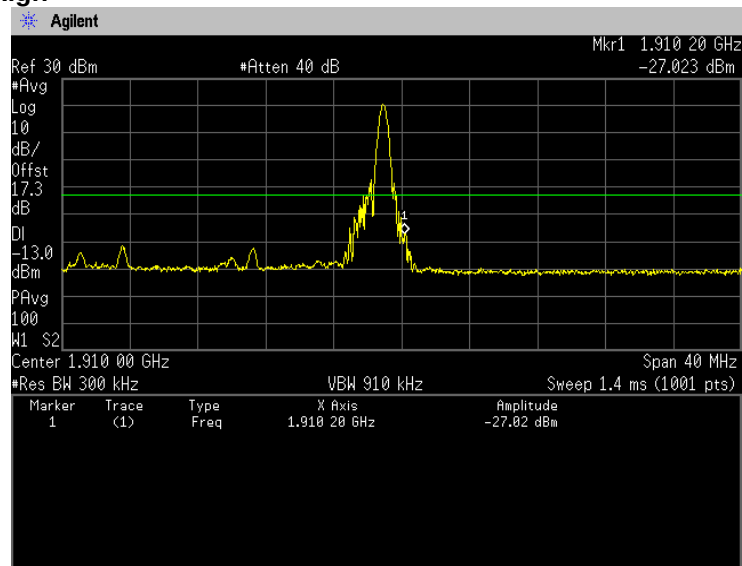

64QAM, BW 20MHz, RB100-0
Channel: Low

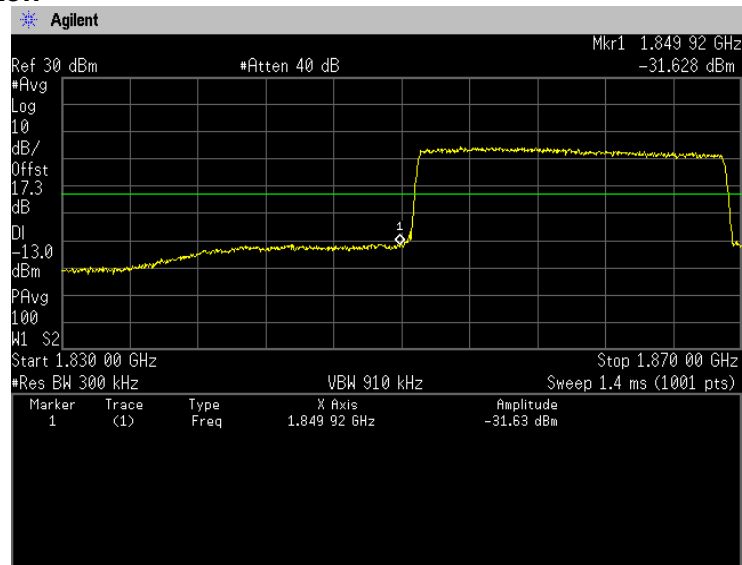

64QAM, BW 20MHz, RB100-0
Channel: High

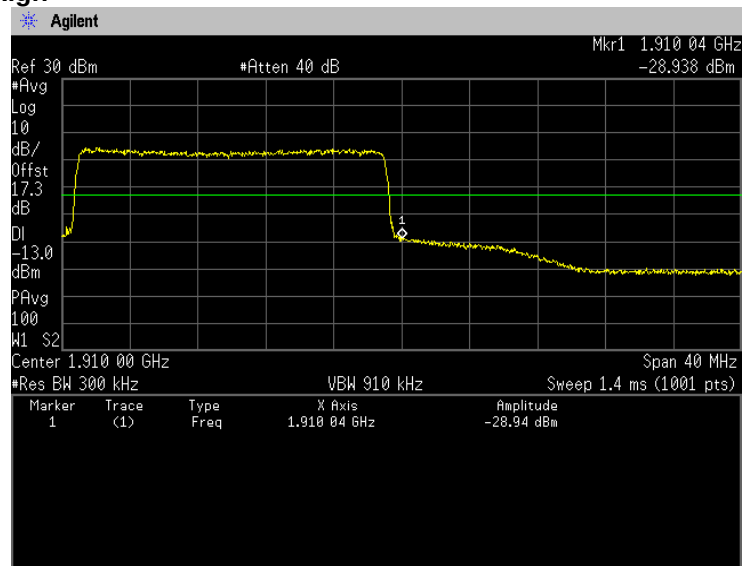


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of Equivalent Isotropic Radiated Power.


QPSK, BW 5MHz, RB 1-13

Channel: 18625


30MHz-5GHz

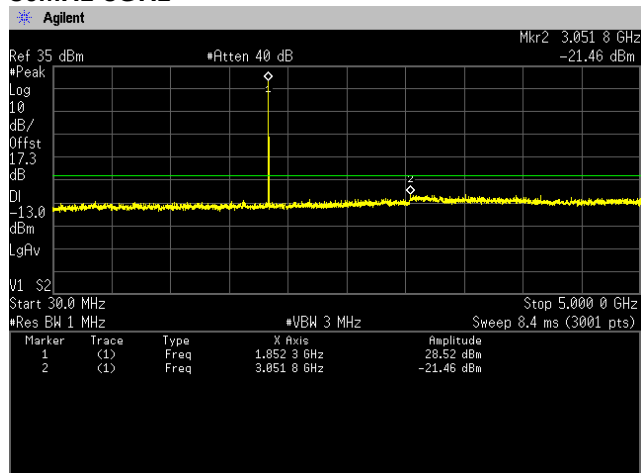


5GHz-10GHz




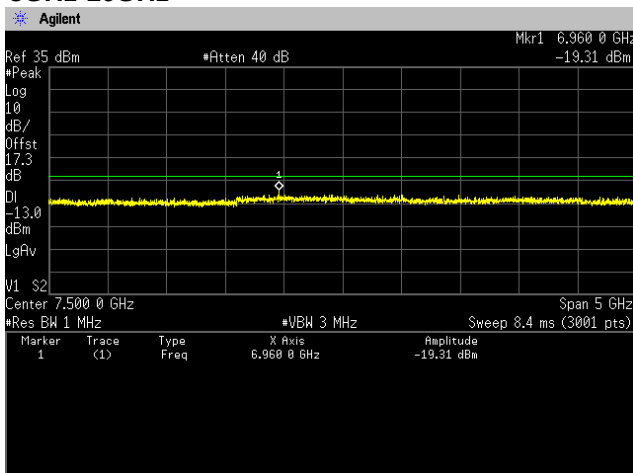


10GHz-15GHz

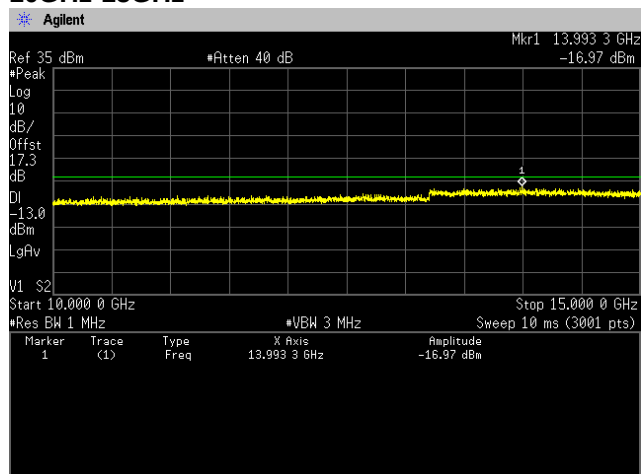


15GHz-20GHz

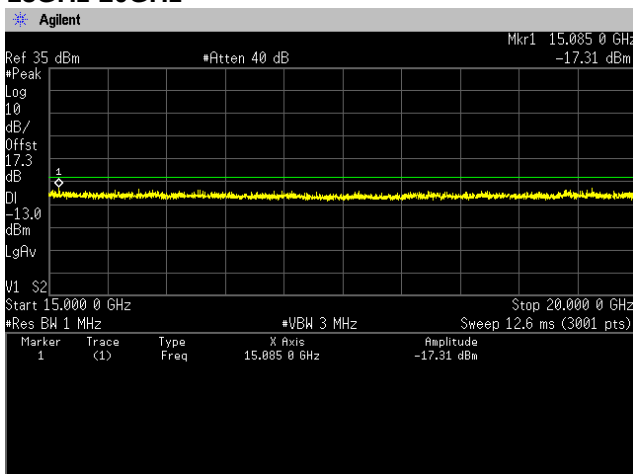

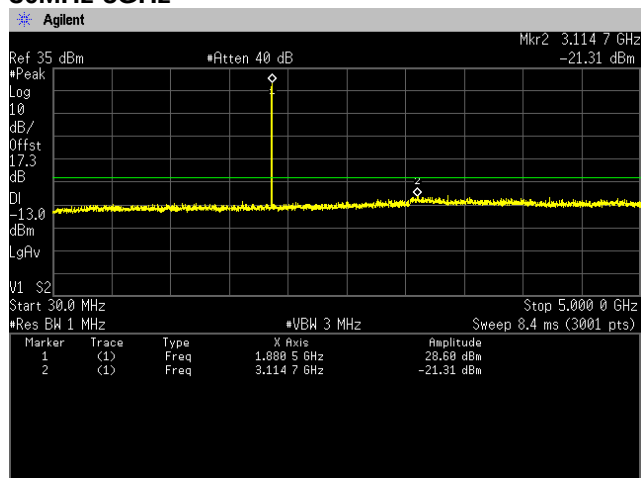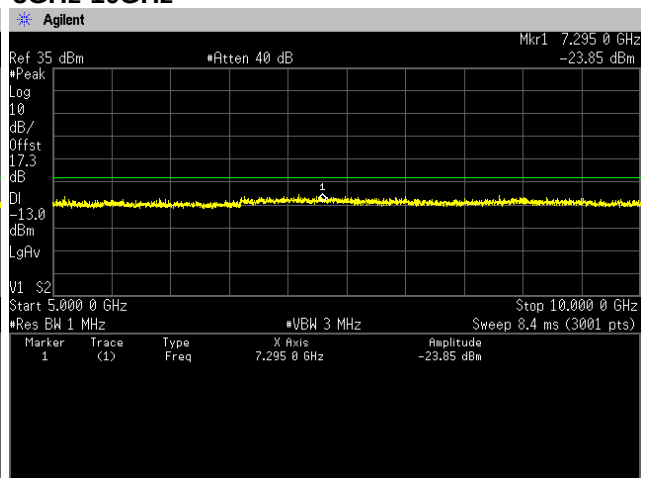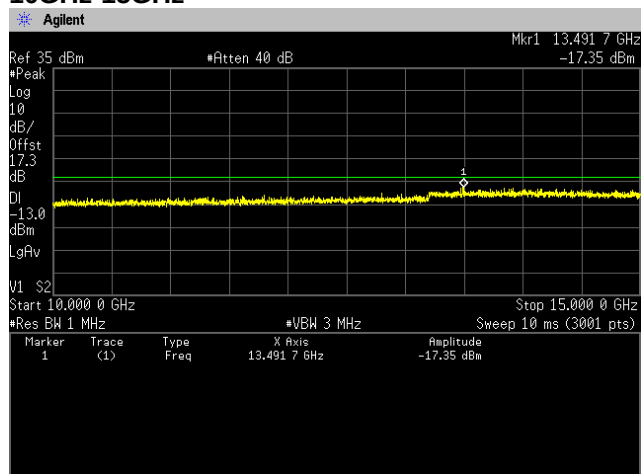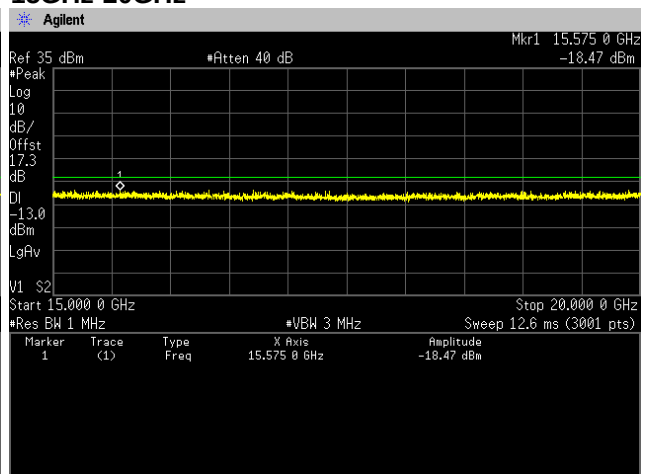
Channel: 18900
30MHz-5GHz

5GHz-10GHz

10GHz-15GHz

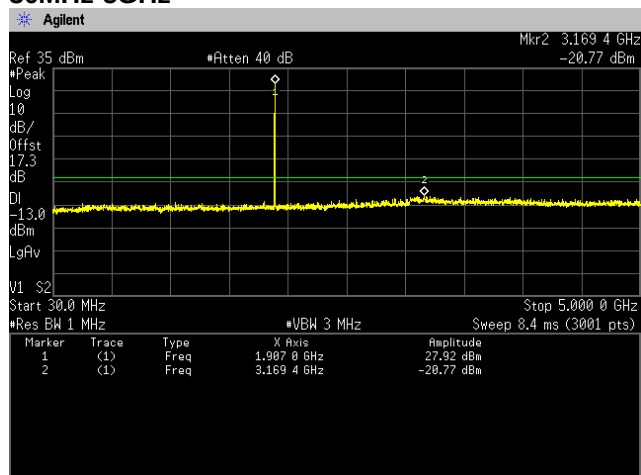15GHz-20GHz


Channel: 19175

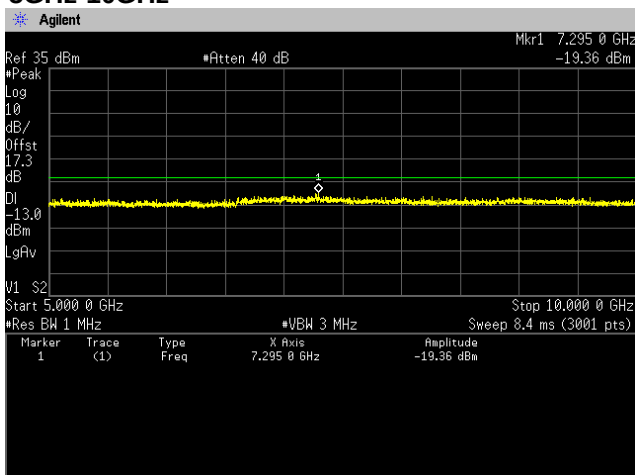
30MHz-5GHz




5GHz-10GHz



10GHz-15GHz

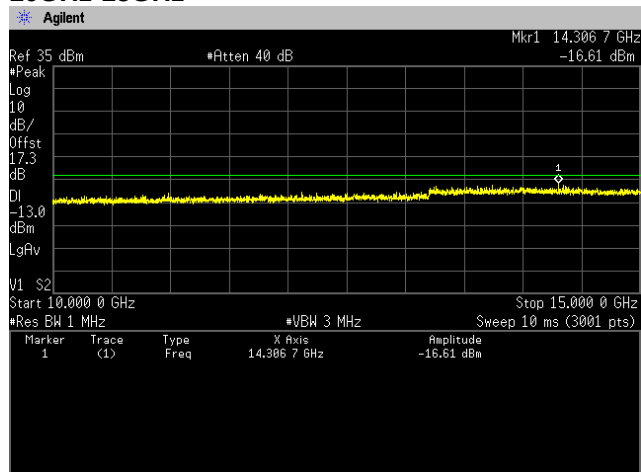

15GHz-20GHz

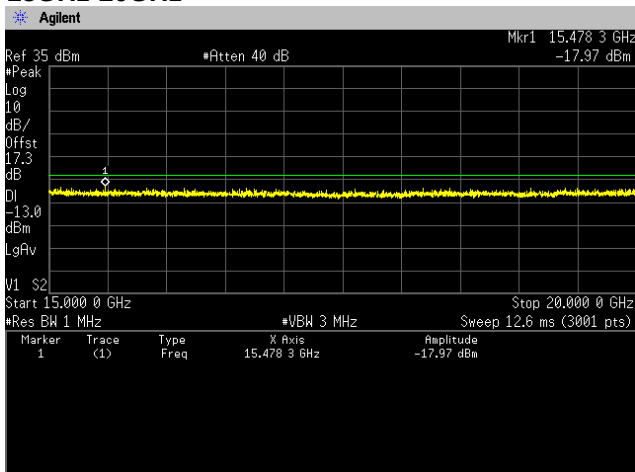

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 24.238(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 0.8 meter surface, 0.8 meter height (Below 1GHz) or 0.6 meter x 0.6 meter surface, 1.5 meter height (Above 1GHz) styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20 GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

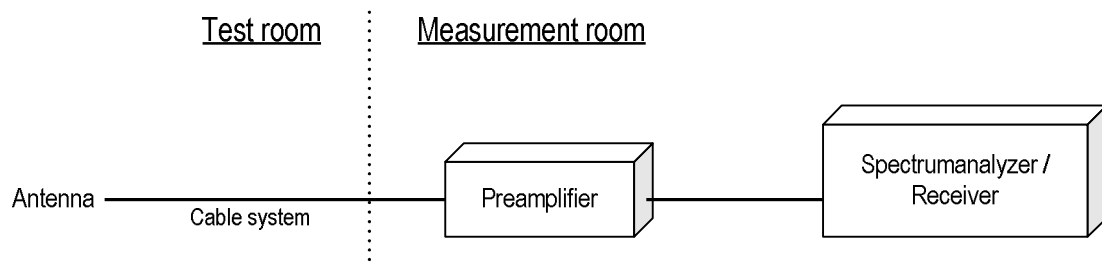

4.5.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 3760.0 MHz: -13.0 dBm

Ant. Input = -55.6 dBm Cable loss = 1.6 dB Ant. Gain = 9.2 dBi

Result = -55.6 - 1.6 + 9.2 = -48.0 dBm

Margin = -13.0 - (-48.0) = 35.0 dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date	: 1~2-December-2022		
Temperature	: 22.4 [°C]		
Humidity	: 31.2 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 3~4-December-2022		
Temperature	: 21.9 [°C]		
Humidity	: 31.5 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 6~7-December-2022		
Temperature	: 21.9 [°C]		
Humidity	: 26.8 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 7~8-December-2022		
Temperature	: 23.1 [°C]		
Humidity	: 25.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>

[GSM1900]**Channel: 512**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-54.3	-51.3	1.6	8.1	-44.8	-13.0	31.8

Channel: 661

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.2	-51.5	1.7	8.2	-44.9	-13.0	31.9

Channel: 810

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-54.5	-51.5	1.7	8.2	-44.9	-13.0	31.9

[WCDMA Band II]**Channel: 9262**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3704.8	-54.1	-51.6	1.6	8.1	-45.1	-13.0	32.1

Channel: 9400

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.2	-51.2	1.7	8.2	-44.6	-13.0	31.6

Channel: 9538

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.2	-54.3	-51.3	1.7	8.2	-44.8	-13.0	31.8

**[LTE Band II]
QPSK, BW 1.4MHz
Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-54.5	-52.0	1.6	8.1	-45.5	-13.0	32.5

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.4	-51.6	1.7	8.2	-45.0	-13.0	32.0

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.3	-51.6	1.7	8.2	-45.0	-13.0	32.0

**16QAM, BW 1.4MHz
Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-54.7	-52.2	1.6	8.1	-45.7	-13.0	32.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-51.9	1.7	8.2	-45.3	-13.0	32.3

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.4	-51.7	1.7	8.2	-45.1	-13.0	32.1

**64QAM, BW 1.4MHz
Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-54.5	-52.0	1.6	8.1	-45.5	-13.0	32.5

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.4	-51.6	1.7	8.2	-45.0	-13.0	32.0

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.4	-51.7	1.7	8.2	-45.1	-13.0	32.1

**[LTE Band II]
QPSK, BW 3MHz
Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-54.3	-51.5	1.6	8.1	-45.0	-13.0	32.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.2	-51.4	1.7	8.2	-44.8	-13.0	31.8

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-54.4	-51.7	1.7	8.2	-45.1	-13.0	32.1

**16QAM, BW 3MHz
Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-54.4	-51.6	1.6	8.1	-45.1	-13.0	32.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.0	-51.2	1.7	8.2	-44.6	-13.0	31.6

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-54.2	-51.5	1.7	8.2	-44.9	-13.0	31.9

**64QAM, BW 3MHz
Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-54.4	-51.6	1.6	8.1	-45.1	-13.0	32.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-51.9	1.7	8.2	-45.3	-13.0	32.3

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-54.2	-51.5	1.7	8.2	-44.9	-13.0	31.9

**[LTE Band II]
QPSK, BW 5MHz
Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-54.4	-51.4	1.6	8.1	-44.9	-13.0	31.9

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.5	-51.7	1.7	8.2	-45.1	-13.0	32.1

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-54.6	-51.8	1.7	8.2	-45.3	-13.0	32.3

16QAM, BW 5MHz

Channel: 18625

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-54.4	-51.4	1.6	8.1	-44.9	-13.0	31.9

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.3	-51.5	1.7	8.2	-44.9	-13.0	31.9

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-54.6	-51.8	1.7	8.2	-45.3	-13.0	32.3

64QAM, BW 5MHz

Channel: 18625

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-54.5	-51.5	1.6	8.1	-45.0	-13.0	32.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-51.9	1.7	8.2	-45.3	-13.0	32.3

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-54.6	-51.8	1.7	8.2	-45.3	-13.0	32.3

**[LTE Band II]
QPSK, BW 10MHz
Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-54.5	-51.8	1.6	8.2	-45.3	-13.0	32.3

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.3	-51.5	1.7	8.2	-44.9	-13.0	31.9

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-54.3	-51.6	1.7	8.2	-45.1	-13.0	32.1

16QAM, BW 10MHz

Channel: 18650

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-54.3	-51.6	1.6	8.2	-45.1	-13.0	32.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.4	-51.6	1.7	8.2	-45.0	-13.0	32.0

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-54.6	-51.9	1.7	8.2	-45.4	-13.0	32.4

64QAM, BW 10MHz

Channel: 18650

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-54.6	-51.9	1.7	8.2	-45.4	-13.0	32.4

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.5	-51.7	1.7	8.2	-45.1	-13.0	32.1

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-54.8	-52.1	1.7	8.2	-45.6	-13.0	32.6

**[LTE Band II]
QPSK, BW 15MHz
Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-54.4	-51.6	1.6	8.2	-45.1	-13.0	32.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.2	-51.4	1.7	8.2	-44.8	-13.0	31.8

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-54.5	-51.6	1.7	8.2	-45.1	-13.0	32.1

**16QAM, BW 15MHz
Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-54.1	-51.3	1.6	8.2	-44.8	-13.0	31.8

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.5	-51.7	1.7	8.2	-45.1	-13.0	32.1

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-54.5	-51.6	1.7	8.2	-45.1	-13.0	32.1

**64QAM, BW 15MHz
Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-54.7	-51.9	1.6	8.2	-45.4	-13.0	32.4

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-51.9	1.7	8.2	-45.3	-13.0	32.3

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-54.5	-51.6	1.7	8.2	-45.1	-13.0	32.1

**[LTE Band II]
QPSK, BW 20MHz
Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-54.4	-51.7	1.6	8.2	-45.2	-13.0	32.2

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.4	-51.6	1.7	8.2	-45.0	-13.0	32.0

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-54.4	-51.7	1.7	8.1	-45.2	-13.0	32.2

**16QAM, BW 20MHz
Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-54.6	-51.9	1.6	8.2	-45.4	-13.0	32.4

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-51.9	1.7	8.2	-45.3	-13.0	32.3

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-54.3	-51.6	1.7	8.1	-45.1	-13.0	32.1

**64QAM, BW 20MHz
Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-54.5	-51.8	1.6	8.2	-45.3	-13.0	32.3

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.5	-51.7	1.7	8.2	-45.1	-13.0	32.1

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-54.4	-51.7	1.7	8.1	-45.2	-13.0	32.2

All other emissions measured were greater than 20dB below the specification limit.


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 24.235, 2.1055]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and $+50^{\circ}\text{C}$. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

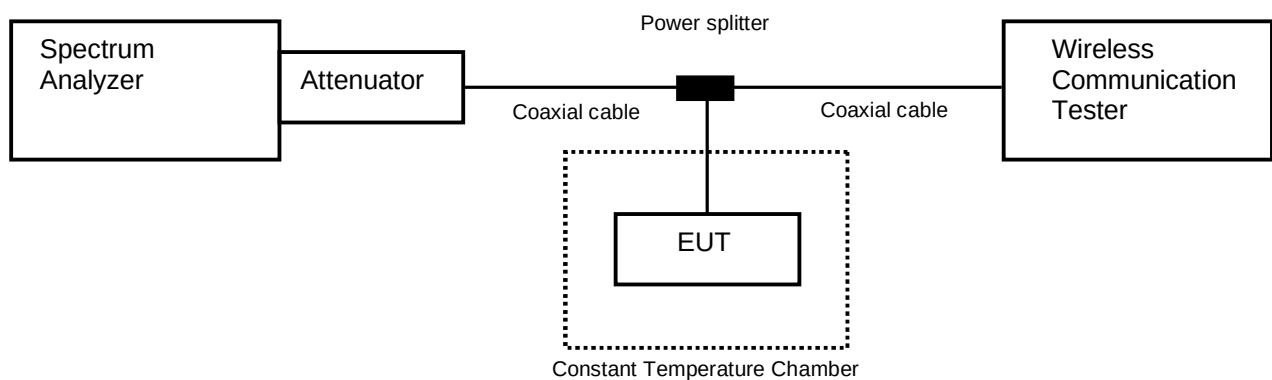

4.6.2 Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.6.3 Measurement result

Date : 19-October-2022

Temperature : 19.9 [°C]

Humidity : 38.1 [%]

Test place : Shielded room No.4

Test engineer :

Kazunori Saito

[GSM1900]

Channel: 661

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Result
3.87	25(Ref.)	1,879,999,981	0.00000	Pass
	50	1,879,999,967	-0.00742	Pass
	40	1,879,999,979	-0.00120	Pass
	30	1,879,999,980	-0.00055	Pass
	20	1,879,999,978	-0.00162	Pass
	10	1,880,000,019	0.01987	Pass
	0	1,879,999,984	0.00147	Pass
	-10	1,879,999,978	-0.00170	Pass
	-20	1,879,999,971	-0.00517	Pass
	-30	1,879,999,984	0.00166	Pass
3.48	25	1,879,999,972	-0.00462	Pass
4.26	25	1,879,999,975	-0.00334	Pass

*: Tested by EB1146

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

[WCDMA Band II]
Channel: 9400

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Result
3.87	25(Ref.)	1,880,000,009	0.00000	Pass
	50	1,880,000,009	-0.00016	Pass
	40	1,880,000,009	0.00006	Pass
	30	1,880,000,008	-0.00056	Pass
	20	1,880,000,009	-0.00038	Pass
	10	1,880,000,010	0.00046	Pass
	0	1,880,000,010	0.00009	Pass
	-10	1,880,000,009	-0.00020	Pass
	-20	1,880,000,010	0.00016	Pass
	-30	1,880,000,007	-0.00104	Pass
3.48	25	1,880,000,012	0.00119	Pass
4.26	25	1,880,000,009	-0.00015	Pass

*: Tested by EB1146

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

[LTE Band II]
QPSK, BW 10MHz, RB 50-0
Channel: 18900

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Result
3.87	25(Ref.)	1,879,999,991	0.00000	Pass
	50	1,880,000,013	0.01142	Pass
	40	1,879,999,993	0.00080	Pass
	30	1,880,000,004	0.00672	Pass
	20	1,880,000,015	0.01273	Pass
	10	1,880,000,018	0.01404	Pass
	0	1,880,000,016	0.01299	Pass
	-10	1,880,000,018	0.01405	Pass
	-20	1,880,000,015	0.01274	Pass
	-30	1,880,000,010	0.00981	Pass
3.48	25	1,880,000,010	0.00996	Pass
4.26	25	1,879,999,994	0.00156	Pass

*: Tested by EB1146




Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.7 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9kHz – 30 MHz)	± 3.2 dB
Radiated emission (30 MHz – 1000 MHz)	± 5.5 dB
Radiated emission (1 GHz – 6 GHz)	± 5.0 dB
Radiated emission (6 GHz – 18 GHz)	± 4.6 dB
Radiated emission (18 GHz – 40 GHz)	± 6.4 dB
Radio Frequency	$\pm 1.3 \cdot 10^{-8}$
RF power, conducted	± 0.7 dB
Adjacent channel power	± 1.5 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Standard limit value +Uncertainty -Uncertainty Measured value Case1  Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case2  Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	
FAIL	Standard limit value +Uncertainty -Uncertainty Measured value Case3  Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case4  Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	



Japan

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

Appendix A. Test Equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2023	14-Sep-2022
EMI receiver	ROHDE&SCHWARZ	ESW44	103171	30-Sep-2023	20-Sep-2022
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	30-Sep-2023	05-Sep-2022
Preamplifier	SONOMA	310	372170	30-Sep-2023	15-Sep-2022
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1145	30-Jun-2023	28-Jun-2022
Log periodic antenna	Schwarzbeck	VUSLP9111B	345	30-Nov-2022	08-Nov-2021
			346	30-Nov-2023	16-Nov-2022
Attenuator	TOYO Connector	NA-PJ-6/dB	N/A(S541)	30-Sep-2023	28-Sep-2022
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2023	14-Jul-2022
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2022	22-Dec-2021
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2022	22-Dec-2021
Double ridged guide antenna	ETS LINDGREN	3117	00052315	30-Jun-2023	22-Jun-2022
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2022	23-Dec-2021
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2023	19-Aug-2022
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2023	19-Aug-2022
Band rejection filter	Micro-Tronics	BRC50720	014	31-Dec-2022	20-Dec-2021
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Dec-2022	08-Dec-2021
RF power amplifier	R&K	CGA020M602-2633R	B40240	30-Jun-2023	16-Jun-2022
Attenuator	HUBER+SUHNER	6820.19.A	N/A(2399)	30-Sep-2023	28-Sep-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX102/2m	31648	31-Mar-2023	02-Mar-2022
Dipole antenna	Schwarzbeck	VHAP	1020	31-Jul-2023	05-Jul-2022
Dipole antenna	Schwarzbeck	UHAP	994	31-Jul-2023	05-Jul-2022
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2022	06-Dec-2021
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Aug-2023	15-Aug-2022
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2023	04-Aug-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	my24610/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/8m	SN MY30033/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	MY32976/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/2m	SN MY28404/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/7m	41625/6	31-Dec-2022	22-Dec-2021
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
PC	DELL	OPTIPLEX9010	00186-228-073-851	N/A	N/A
Software	TOYO Technica	ES10/RE-AJ	Ver.2021.10.001	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2023	28-May-2022
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2023	28-May-2022

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.