

FCC Test Report

APPLICANT : KYOCERA Corporation
EQUIPMENT : Mobile phone
BRAND NAME : KYOCERA
MODEL NAME : EB1241
FCC ID : JOYEB1241
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Oct. 28, 2025 ~ Nov. 20, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.



Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	7
1.6. Test Location	7
1.7. Test Software	7
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	9
2.3. Support Unit used in test configuration and system	10
2.4. EUT Operation Test Setup	10
3. TEST RESULT	11
3.1. Test of AC Conducted Emission Measurement	11
3.2. Test of Radiated Emission Measurement	15
4. LIST OF MEASURING EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC590207	Rev. 01	Initial issue of report	Dec. 12, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.81 dB at 0.17 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.2 dB at 38.73 MHz

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

KYOCERA Corporation

Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan

1.2. Manufacturer

KYOCERA Corporation

Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile phone
Brand Name	KYOCERA
Model Name	EB1241
FCC ID	JOYEB1241
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/NFC
IMEI Code	Conduction: 357262330032835/357262660032843 for Sample1 357262660014312/357262660014320 for Sample2 Radiation: 357262660035150/357262660035168 for Sample1 357262660012290/357262660012308 for Sample2
HW Version	DVT2
SW Version	sys_mssi_64_ww_armv82-userdebug 16 BP2A.250605.031.A3 local_1014_0154 test-keys
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, for the differences please refer the product equality declaration exhibit submitted. According to the difference, we choose sample 1 to full test and the sample 2 is verified for the difference.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz
Antenna Type	WWAN : IFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna NFC: LOOP Antenna
Type of Modulation	GSM/GPRS: GMSK WCDMA : BPSK HSPA : QPSK LTE: QPSK / 16QAM / 64QAM 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK

	Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK
--	---

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH05-SZ	CN1256	421272

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + USB Cable (Charging from Adapter) for Sample1
	Mode 2: WCDMA 850 Rx (Low) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB +SIM2 for Sample1
	Mode 3: LTE Band 12 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + PC/NB USB Data Link to EUT (eMMC) for Sample1
	Mode 4: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + EUT (SD) USB Data Link to PC/NB for Sample1
	Mode 5: WCDMA 850 Rx (Low) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + PC/NB USB Data Link to EUT (SD) for Sample1
	Mode 6: WCDMA 850 Rx (Low) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + EUT (eMMC) USB Data Link to PC/NB + SIM 2 + PC/NB USB Data Link to EUT (eMMC) for Sample2
	Mode 7: WCDMA 850 Rx (Low) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable (Charging from Adapter) + SIM 2 for Sample2
Radiated Emissions	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + USB Cable (Charging from Adapter) for Sample1
	Mode 2: : WCDMA 850 Rx (Low) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB +SIM2 for Sample1
	Mode 3: LTE Band 12 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + PC/NB USB Data Link to EUT (eMMC) for Sample1
	Mode 4: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + NFC On +

	Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + EUT (SD) USB Data Link to PC/NB for Sample1 Mode 5: LTE Band 12 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + PC/NB USB Data Link to EUT (SD) for Sample1 Mode 6: LTE Band 12 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable (Data Link with Notebook) + SIM 2 + PC/NB USB Data Link to EUT (eMMC) for Sample2 Mode 7: LTE Band 12 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable (Charging from Adapter) + SIM 2 for Sample2
Remark: 1. The worst case of AC is mode 2; only the test data of this mode is reported. 2. The worst case of RE is mode 3; only the test data of this mode is reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook.	

2.2.Connection Diagram of Test System

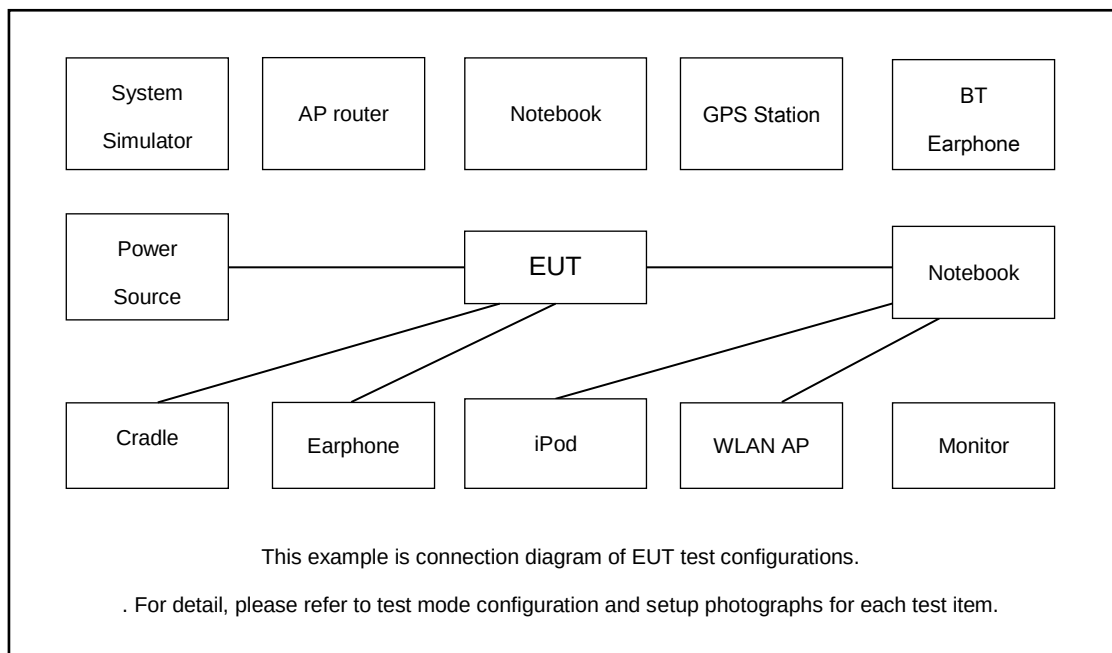

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded,1.8 m
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
5.	Notebook	Thinkpad	Thinkpad E14	N/A	N/A	N/A
6.	SD Card	Kingston	3300-10000-078	Fcc DoC	N/A	N/A
7.	NFC Card	N/A	N/A	N/A	N/A	N/A
8.	IPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A
9.	GPS Station	Labsat	RLLS03-2P	N/A	N/A	Unshielded,1.8m
10.	Earphone	NA	NA	NA	N/A	N/A
11.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
12.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
13.	Earphone	apple	N/A	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

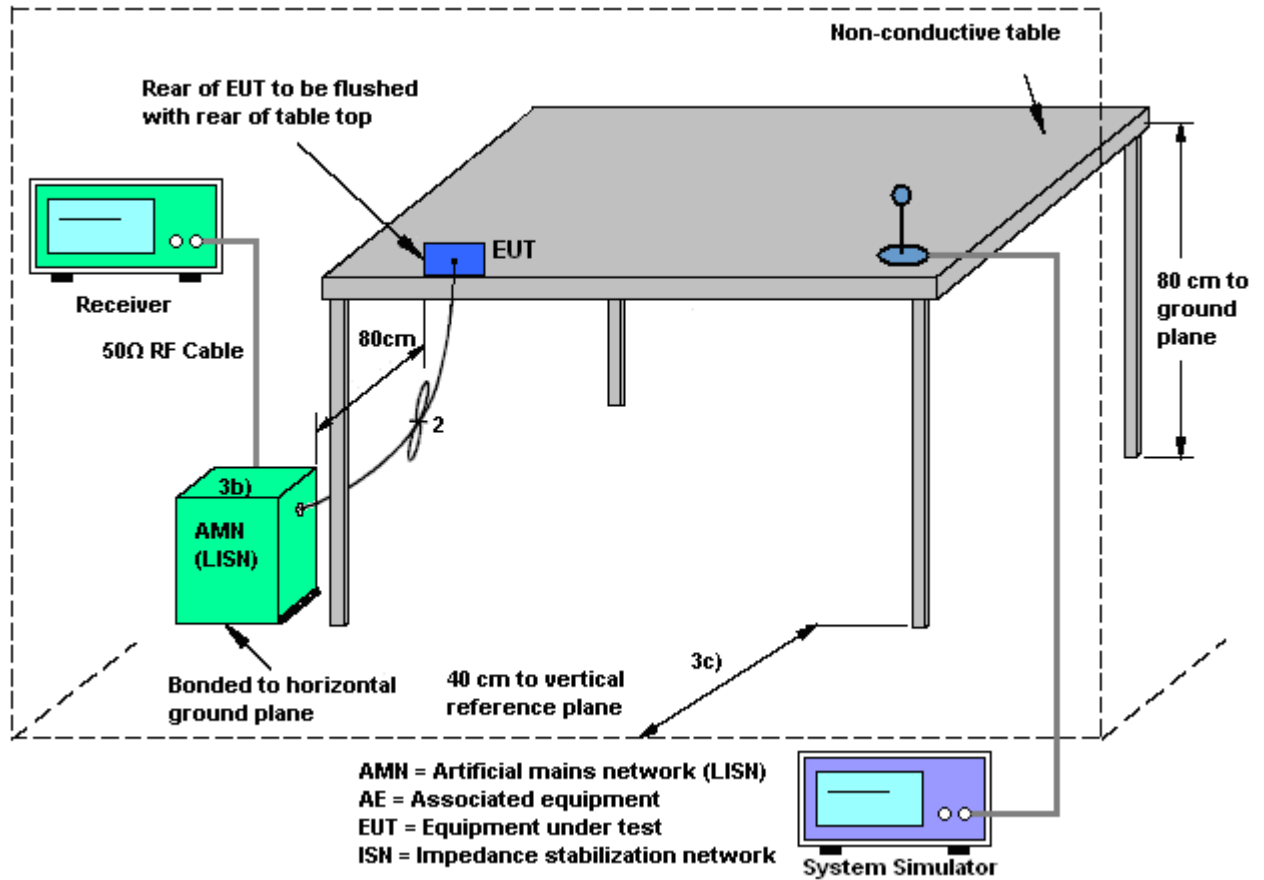




3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

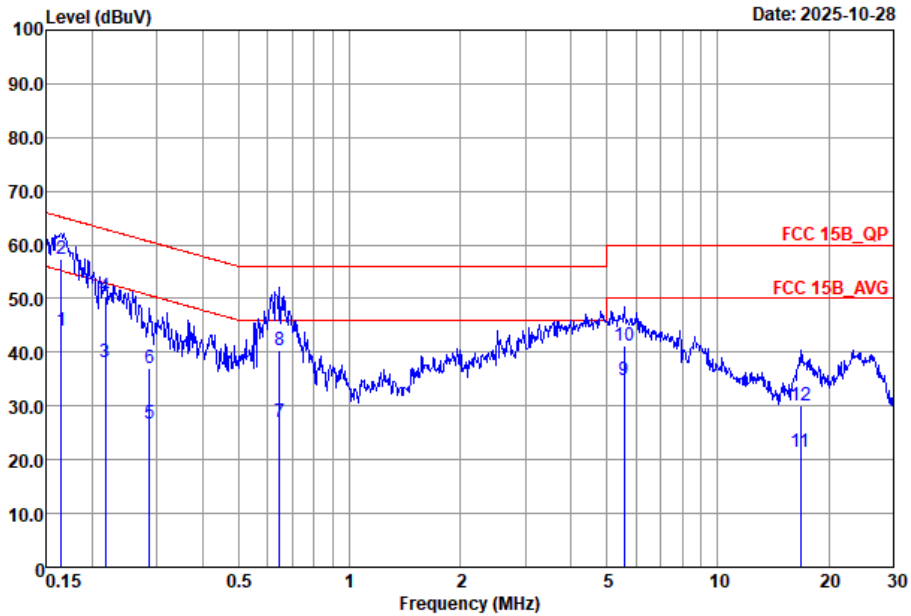

Site : C002-SZ
Condition : FCC 15B_QP LISN-L 2025 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	43.90	-11.31	55.21	24.00	9.74	10.16	Average
2 *	0.17	57.40	-7.81	65.21	37.50	9.74	10.16	QP
3	0.22	38.08	-14.84	52.92	18.20	9.72	10.16	Average
4	0.22	50.48	-12.44	62.92	30.60	9.72	10.16	QP
5	0.29	26.88	-23.75	50.63	7.00	9.73	10.15	Average
6	0.29	37.08	-23.55	60.63	17.20	9.73	10.15	QP
7	0.65	27.07	-18.93	46.00	7.20	9.74	10.13	Average
8	0.65	40.47	-15.53	56.00	20.60	9.74	10.13	QP
9	5.56	34.83	-15.17	50.00	14.90	9.69	10.24	Average
10	5.56	41.33	-18.67	60.00	21.40	9.69	10.24	QP
11	16.75	21.38	-28.62	50.00	1.30	9.76	10.32	Average
12	16.75	30.08	-29.92	60.00	10.00	9.76	10.32	QP

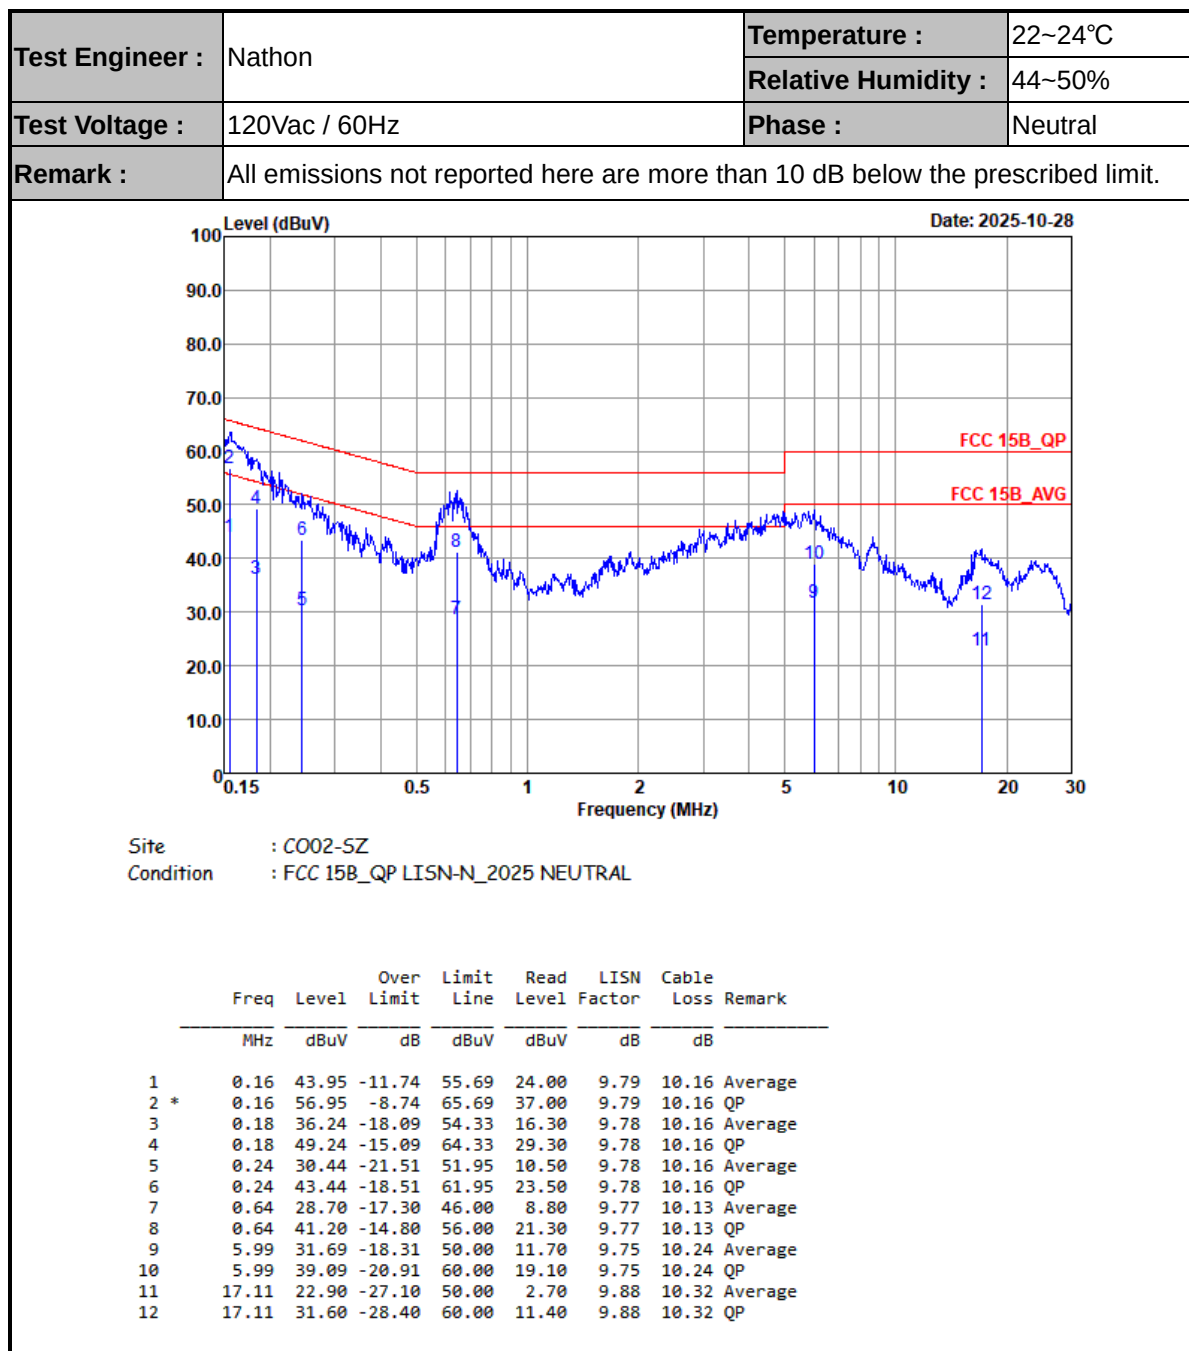

Note:

1. $\text{Level(dB}\mu\text{V)} = \text{Read Level(dB}\mu\text{V)} + \text{LISN Factor(dB)} + \text{Cable Loss(dB)}$
2. $\text{Over Limit(dB)} = \text{Level(dB}\mu\text{V)} - \text{Limit Line(dB}\mu\text{V)}$

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

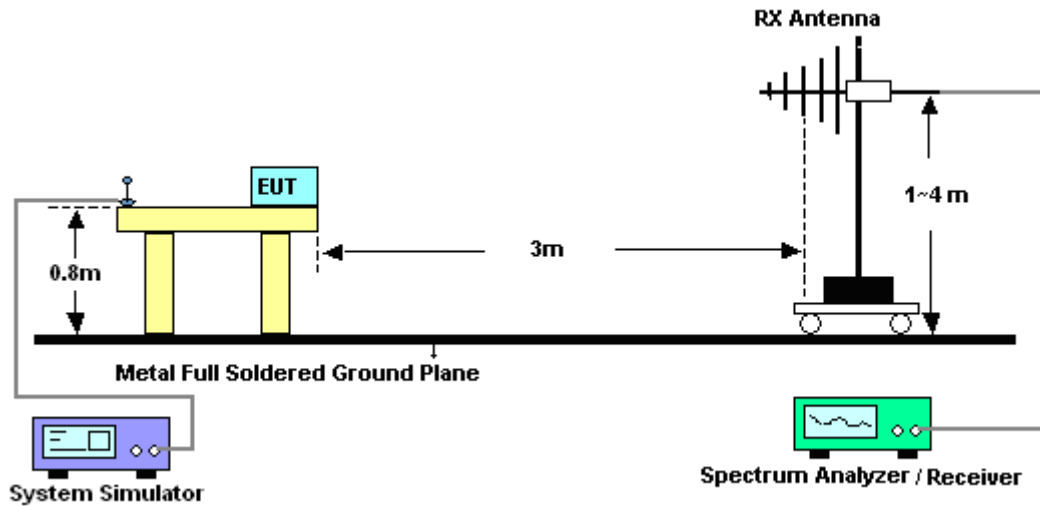


For radiated emissions above 1GHz

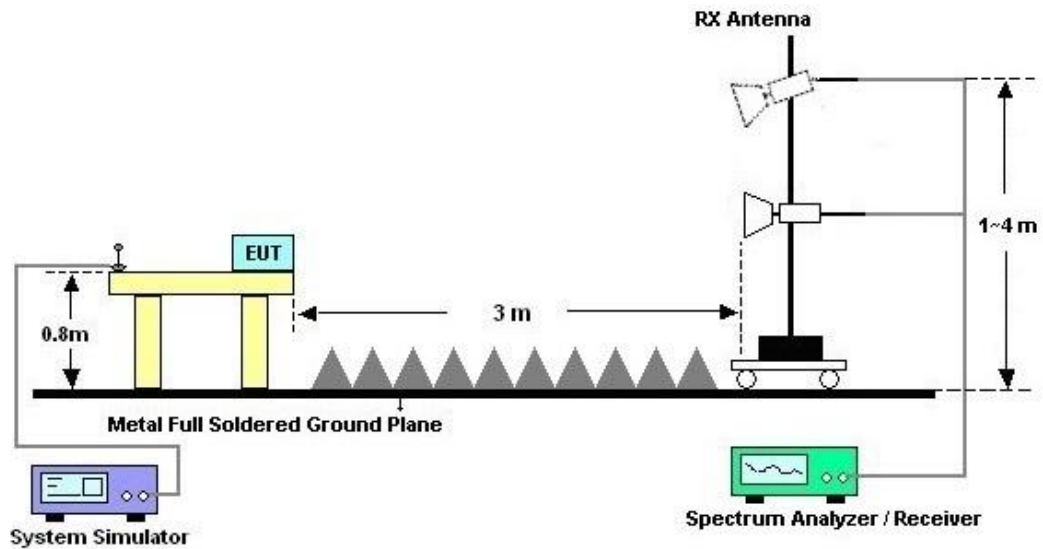



3.2.5. Test Result of Radiated Emission

Test Engineer :	ZhanSheng Liu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is RF signal which can be ignored. #9 & #10 are RF signal which comes from BT/WLAN Access Point used to connect the EUT, and which can be ignored.		

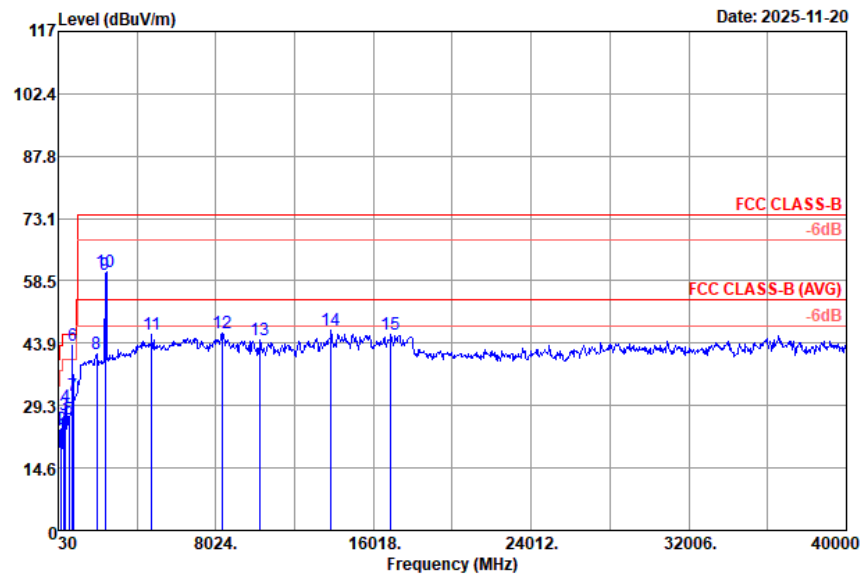


Site : 03CH05-SZ

Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	38.73	23.35	-16.65	40.00	37.57	19.14	1.33	34.69	---	Peak
2	176.47	23.77	-19.73	43.50	38.72	17.47	2.48	34.90	---	Peak
3	321.97	27.17	-18.83	46.00	38.68	19.88	3.31	34.70	---	Peak
4	398.60	29.10	-16.90	46.00	38.89	21.60	3.31	34.70	---	Peak
5	563.50	25.93	-20.07	46.00	32.01	24.87	3.52	34.47	---	Peak
6 *	741.00	43.47			46.04	27.94	3.73	34.24	---	Peak
7	799.21	31.51	-14.49	46.00	32.27	28.96	4.38	34.10	---	Peak
8	1976.00	41.35	-32.65	74.00	66.65	31.42	6.87	63.59	---	Peak
9	2402.00	60.02			84.25	32.60	7.17	64.00	---	Peak
10	2437.00	60.47			84.62	32.67	7.22	64.04	---	Peak
11	4784.00	46.00	-28.00	74.00	66.42	35.07	9.41	64.90	---	Peak
12	8328.00	46.27	-27.73	74.00	62.30	36.64	11.74	64.41	---	Peak
13	10242.00	44.63	-29.37	74.00	56.57	38.34	13.49	63.77	---	Peak
14	13833.00	46.80	-27.20	74.00	56.58	39.70	14.49	63.97	---	Peak
15	16902.00	45.99	-28.01	74.00	54.15	42.00	15.26	65.42	---	Peak



Test Engineer :	ZhanSheng Liu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is RF signal which can be ignored. #9 & #10 are RF signal which comes from BT/WLAN Access Point used to connect the EUT, and which can be ignored.		

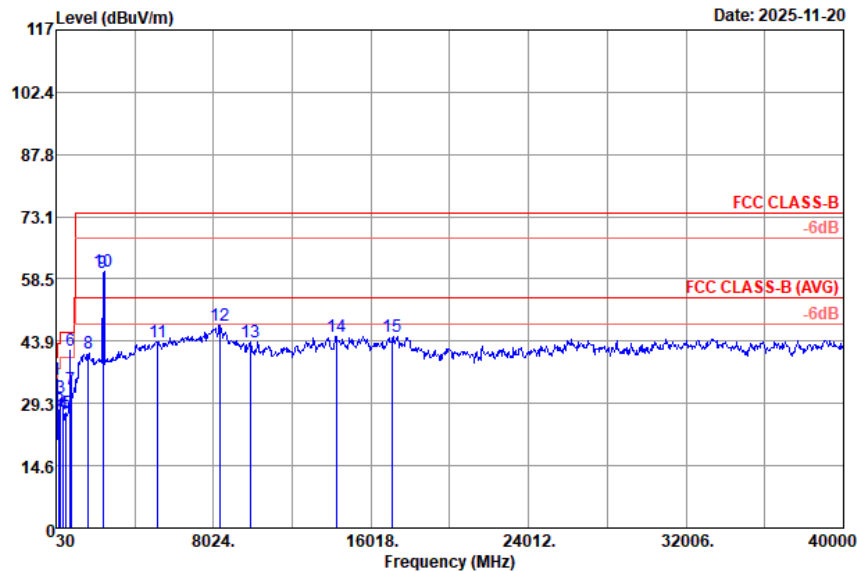

Site : 03CH05-SZ
Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	38.73	34.80	-5.20	40.00	49.02	19.14	1.33	34.69	---	Peak
2	173.56	27.82	-15.68	43.50	42.59	17.67	2.46	34.90	---	Peak
3	265.71	30.77	-15.23	46.00	44.19	18.28	3.07	34.77	---	Peak
4	399.57	26.73	-19.27	46.00	36.50	21.62	3.31	34.70	---	Peak
5	532.46	26.91	-19.09	46.00	33.77	24.18	3.46	34.50	---	Peak
6 *	741.00	41.59			44.16	27.94	3.73	34.24	---	Peak
7	797.27	32.51	-13.49	46.00	33.35	28.92	4.35	34.11	---	Peak
8	1680.00	41.04	-32.96	74.00	68.56	29.76	6.13	63.41	---	Peak
9	2402.00	59.86			84.09	32.60	7.17	64.00	---	Peak
10	2437.00	60.33			84.48	32.67	7.22	64.04	---	Peak
11	5200.00	43.68	-30.32	74.00	63.82	35.40	9.44	64.98	---	Peak
12	8320.00	47.60	-26.40	74.00	63.62	36.66	11.74	64.42	---	Peak
13	9873.00	43.81	-30.19	74.00	56.80	38.05	13.29	64.33	---	Peak
14	14238.00	44.98	-29.02	74.00	53.97	39.94	14.78	63.71	---	Peak
15	17109.00	44.85	-29.15	74.00	52.74	42.40	15.24	65.53	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) - Limit Line(dBuV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Oct. 28, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Oct. 28, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Oct. 28, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Pulse Limiter (RF Cable)	SCHWARZBECK MESS-ELEKTRONIK	VTSD9561-FN	00674-1	150kHz~30MHz	Jul. 03, 2025	Oct. 28, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 02, 2025	Nov. 20, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 02, 2025	Nov. 20, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2025	Nov. 20, 2025	Jul. 07, 2026	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 02, 2025	Nov. 20, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Nov. 20, 2025	Jul. 03, 2026	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060779	1GHz~18GHz	Dec. 25, 2024	Nov. 20, 2025	Dec. 24, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 03, 2025	Nov. 20, 2025	Apr. 02, 2026	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 03, 2025	Nov. 20, 2025	Apr. 02, 2027	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2025	Nov. 20, 2025	Oct. 13, 2026	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Nov. 20, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Nov. 20, 2025	NCR	Radiation (03CH05-SZ)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.1 dB
--	--------

----- THE END -----