



EMI TEST REPORT

Test Report No. : 26KE0199-HO-C

Applicant : KYOCERA Corporation
Type of Equipment : iBurst User Terminal
Model No. : UTD1900D-US-B
Test standard : FCC Part 24 2005
FCC ID : JOYIUD19AB
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.

Date of test:

August 5 to 18, 2006

Tested by:

Kenichi Adachi
EMC Services

Approved by :

Naoki Sakamoto
Group Leader of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
----------	------

SECTION 1: Client information.....	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing.....	6
SECTION 5: Peak Output Power and Spurious Radiation and Band-Edge.....	7
SECTION 6: Bandwidth and Band-Edge (Conducted).....	8
SECTION 7: Spurious Emission (Conducted)	8
SECTION 8: Frequency Stability	8
APPENDIX 1: Photographs of test setup.....	9
Spurious Radiation	9
Worst Case Position (Horizontal: EUT-Y-axis, Ant-90deg. / Vertical:EUT-X-axis, Ant-90deg.)	10
Frequency Stability	11
APPENDIX 2: Data of EMI test	12
Peak Output Power (Conducted)	12
Peak Output Power (Radiated)	14
Emission Bandwidth and 99% Occupied Bandwidth	15
Band Edge(Conducted)	17
Band Edge (Radiated)	22
Spurious Emission (Conducted)	23
Spurious Radiation	27
Frequency Stability(Temperature/Voltage Variation).....	30
APPENDIX 3: Test instruments	31

SECTION 1: Client information

Company Name : KYOCERA Corporation
Address : Yokohama Office
2-1-1 Kagahara, Tsuzuki-ku, Yokohama-shi, Kanagawa 224-8502, Japan
Telephone Number : +81-45-943-6189
Facsimile Number : +81-45-943-6123
Contact Person : Toshihiko Kawata

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : iBurst User Terminal
Model No. : UTD1900D-US-B
Serial No. : 01
Rating : AC 120V / 60Hz (AC Adapter), 8.55-9.45V(EUT)
Country of Manufacture : JAPAN
Receipt Date of Sample : July 28, 2006
Condition of EUT : Production model
Modification of EUT : No modification by the test lab.

2.2 Product Description

Model No.: UTD1900D-US-B (referred to as the EUT in this report) is iBurst User Terminal.

Equipment Type : Transceiver
Frequency operation : 1900-1910MHz
Type of modulation : BPSK,QPSK,8PSK,12QAM,16QAM
Bandwidth : 500kHz
Channel spacing : 625kHz
Channel number : 16
Antenna Type : integrated mono-pole antenna
Antenna connector Type : MMCX
Antenna Gain : 4dBi
Other Clock Frequency : 72MHz, 25MHz, 24MHz, 20MHz, 18MHz, 6MHz, 3MHz, 32.768kHz
Temperature of operation : 0 deg. C. to + 40 deg. C.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 24 2005
Title : FCC 47CFR Part 24
Personal Communications Services

3.2 Procedures and results

Item	Test Method	FCC Regulations	Remarks	Deviation	Worst margin	Results
Peak Output Power	Section 2.1046	Section 24.232(b)	Conducted/ Radiated	N/A	2.0dB 1904.6875MHz, Horizontal	Complied
Emission Bandwidth, 99% Occupied Bandwidth	Section 2.1049	Section 24.238(b)	Conducted	N/A	-	Complied
Band-Edge	Section 2.1049	Section 24.238(b)	Conducted/ Radiated	N/A	0.79dB 1900MHz QPSK+	Complied
Spurious Emission	Section 2.1051	Section 24.238(a)	Conducted	N/A	-	Complied
Spurious Radiation	Section 2.1053	Section 24.238(a)	Radiated	N/A	8.9dB 13302.188MHz, Horizontal	Complied
Frequency Stability (Temperature Variation)	Section 2.1055(a) (1) and (b)	Section 24.235	Conducted	N/A	-	Complied
Frequency Stability (Voltage Variation)	Section 2.1055(d)(1) and (2)	Section 24.235	Conducted	N/A	-	Complied

Note: UL Apex's EMI Work Procedures No. QPM05

*These tests were also referred to TIA-603-B "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards."

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.3 Confirmation

UL Apex Co., Ltd. hereby confirms that E.U.T., in the configuration tested, complies with the specifications Part 24: 2005.

3.4 Uncertainty

Antenna terminal measurements

The measurement uncertainty (with a 95% confidence level) for this test is $\pm 3.0\text{dB}$

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Radiated emissions

The measurement uncertainty (with a 95% confidence level) for this test is $\pm 4.62\text{dB}$ (30-1000MHz) and $\pm 5.06\text{dB}$ (Above 1GHz).

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 shielded room	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	N/A	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	N/A	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3 and No.4 semi-anechoic chambers and No.7 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 4: Operation of E.U.T. during testing


4.1 Operating Modes

The EUT was operated in a manner similar to typical use during the tests.

The mode is used : Transmitting mode
Low Channel :1900.3125MHz (Ch0)
Mid Channel :1904.6875MHz (Ch7)
High Channel :1909.6875MHz (Ch15)

Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

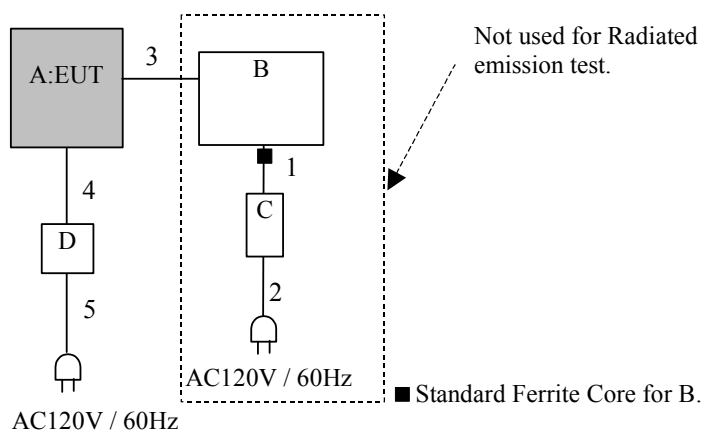

* Cabling and setup were taken into consideration and test data was taken under worst case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	iBurst User Terminal	UTD1900D-US-B	01	KYOCERA	EUT
B	PC	TYPE2662-LBJ	FX-FL781	IBM	-
C	AC Adapter for PC	AA21131	11S02K6657Z1Z 0ZA0651RX	IBM	-
D	AC Adapter	TYPEFW7400/09	2106B	FWHK	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.8	Unshielded	Unshielded	-
2	AC Cable	1.0	Unshielded	Unshielded	-
3	USB Cable	2.0	Shielded	Shielded	-
4	DC Cable	2.0	Unshielded	Unshielded	-
5	AC Cable	2.0	Unshielded	Unshielded	-

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 5: Peak Output Power and Spurious Radiation and Band-Edge

[Conducted]

Test Procedure

The peak output power (conducted) was measured with a spectrum analyzer and an attenuator at the antenna port.

Test data	:	APPENDIX 3
Test result	:	Pass

[Radiated]

Test Procedure

- 1) EUT was placed on a urethane platform of nominal size, 1.0m by 0.5m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.
The Radiated Electric Field Strength intensity has been measured in a semi anechoic chamber with a ground plane and at a distance of 3m.
The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
- 2) Exchanged the EUT to the Substitution Antenna, the measurement was set for the same height 0.8m as the EUT. The frequency below 1GHz of the Substitution Antenna was used as the Half wave dipole Antenna, which is harmonized with the measured frequency in 1).
The frequency above 1GHz of the Substitution Antenna was used with Horn Antenna.
The Substitution Antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1).
The measuring antenna height varied between 1 and 4m to obtain the maximum receiving level.
Its Output power of Signal Generator was recorded.
- 3) Equivalent isotropic radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).

Test data	:	APPENDIX 3
Test result	:	Pass

- The carrier level and noise levels were confirmed at each position of X and Y axes of EUT and 90 and 180 deg. of EUT's antenna to see the position of maximum noise, and the test was made at the position that has the maximum noise.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Bandwidth and Band-Edge (Conducted)

Test Procedure

The Emission Bandwidth, 99% Occupied Bandwidth and Band-Edge was measured with a spectrum analyzer and attenuator connected to the antenna port.

Test data	:	APPENDIX 3
Test result	:	Pass

SECTION 7: Spurious Emission (Conducted)

Test Procedure

The Spurious Emission was measured with a spectrum analyzer and attenuator connected to the antenna port.

Test data	:	APPENDIX 3
Test result	:	Pass

SECTION 8: Frequency Stability

Test Procedure

The Frequency Stability was measured with a Vector Signal Analyzer (89441A (HP)) connected to the antenna port. The Frequency Drift was measured with the 10 deg. C. steps from -30 deg.C. to 50 deg.C., and it is presented as the ppm unit. The Frequency Drift was measured with the normal temperature(20 deg.C.) and Voltage tolerance (0 %, +15%, -15%), and it is presented as the ppm unit.

Test data	:	APPENDIX 3
Test result	:	Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)