

Labels and Label Placement

LUTRON
lutron.com
CSMR-C
7.2 V $\approx$ 4 W 4 in-lb (0,45 N•m)
Assembled in U.S.A.
Assemblé aux É-U
Ensamblado en E.U.A.
FCC - JPZ0158
2026 01 C



DRAPERY OPERATOR 9814

LUTRON
lutron.com
CSMR-C
NZ04055
7.2 V $\approx$ 4 W
4 in-lb (0,45 N•m)
2026 05 C

FCC: JPZ0158
IC: 2851A-JPZ0148
HVIN: STL-A
SN:
Pats. | Brevets :
lutron.com/patents



DRAPERY OPERATOR 9814

This device complies with part 15 FCC of the rules.
Operation is subject to the following conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference
received, including interference that may cause
undesired operation.
CAN ICES-3 (A) / NMB-3 (A)
Product of U.S.A. with imported parts
Producto de E.U.A. con piezas importadas
Produit des É.-U. avec des pièces importées

LUTRON
lutron.com

NZ04056

2026 01 C

26123
1454
0001



Associated FCC ID: JPZ0158



DRAPERY OPERATOR 9814

Assembled in U.S.A.
Assemblé aux É-U
Ensamblado en E.U.A.

Label Specifications:






PRODUCT INFORMATION

THERMLfilm SELECT® 21940

Product Description:

THERMLfilm SELECT 21940 is a UL-recognized/CSA-accepted, 2.0 mil gloss topcoated thermal transfer printable, white polyester coated with an aggressive, permanent acrylic adhesive, and backed with a roll form release liner.

- THERMLfilm PM 200 W 2.0 mil gloss white polyester designed for high-performance label applications.
- Use type Indoor

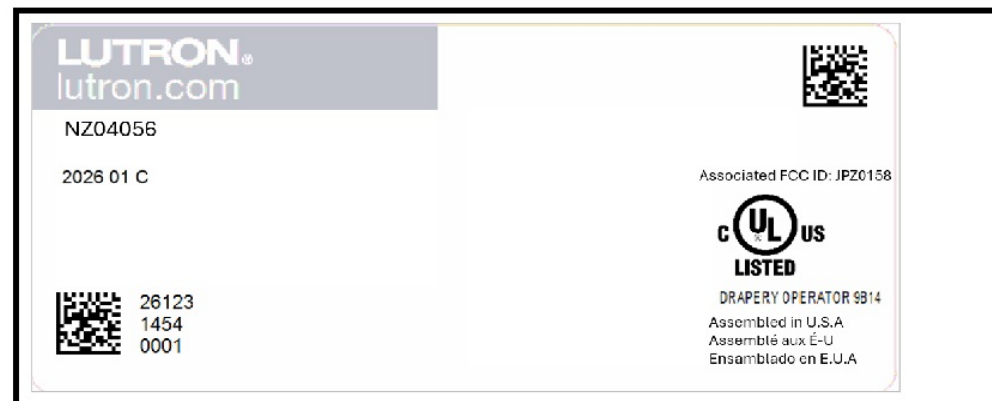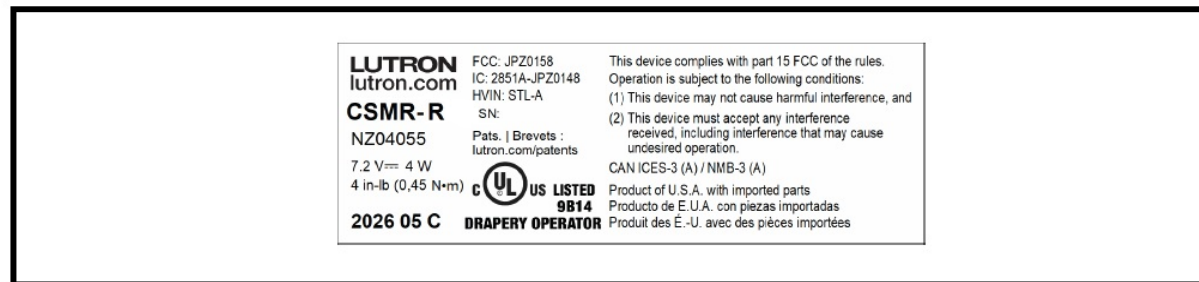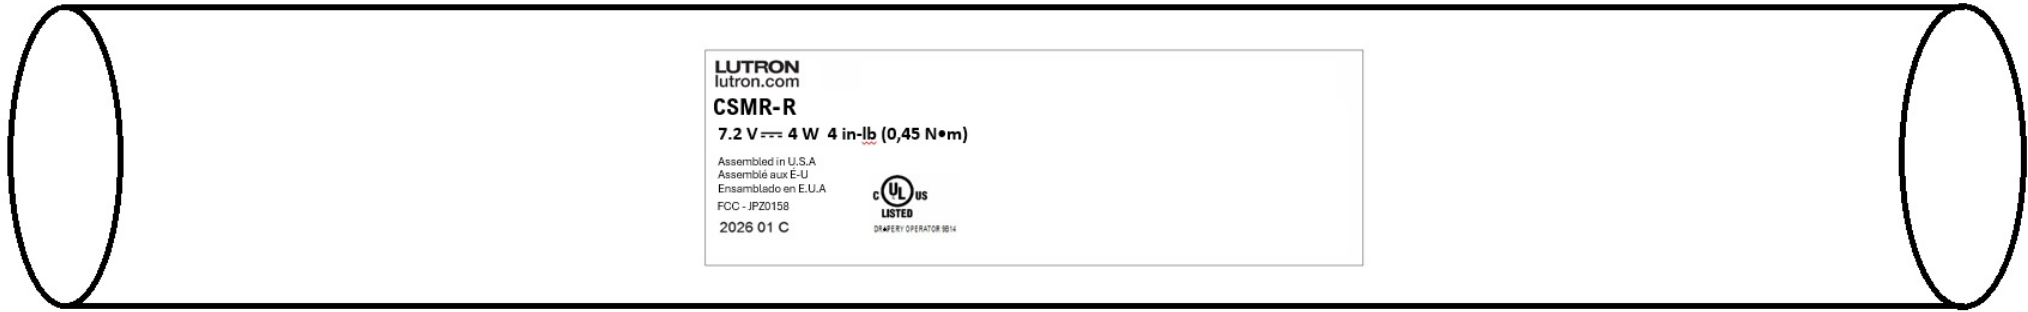

Label Specifications:






PRODUCT INFORMATION

THERMLfilm SELECT® 21940

Product Description:

THERMLfilm SELECT 21940 is a UL-recognized/CSA-accepted, 2.0 mil gloss topcoated thermal transfer printable, white polyester coated with an aggressive, permanent acrylic adhesive, and backed with a roll form release liner.

- THERMLfilm PM 200 W 2.0 mil gloss white polyester designed for high-performance label applications.
- Use type Indoor

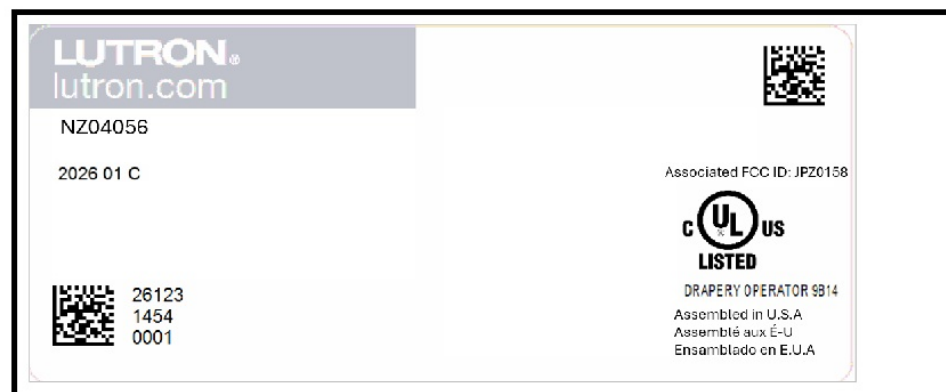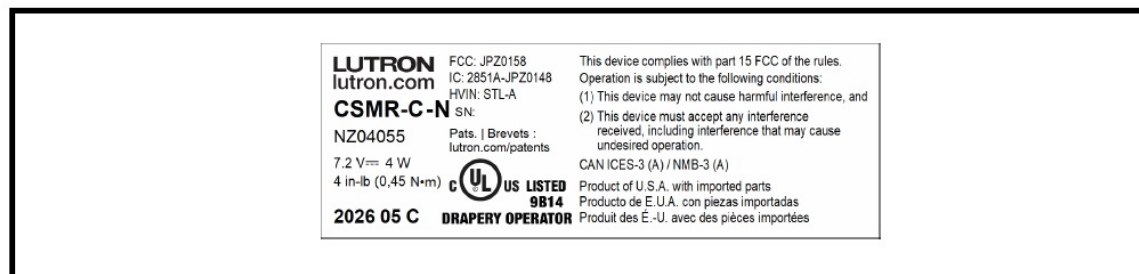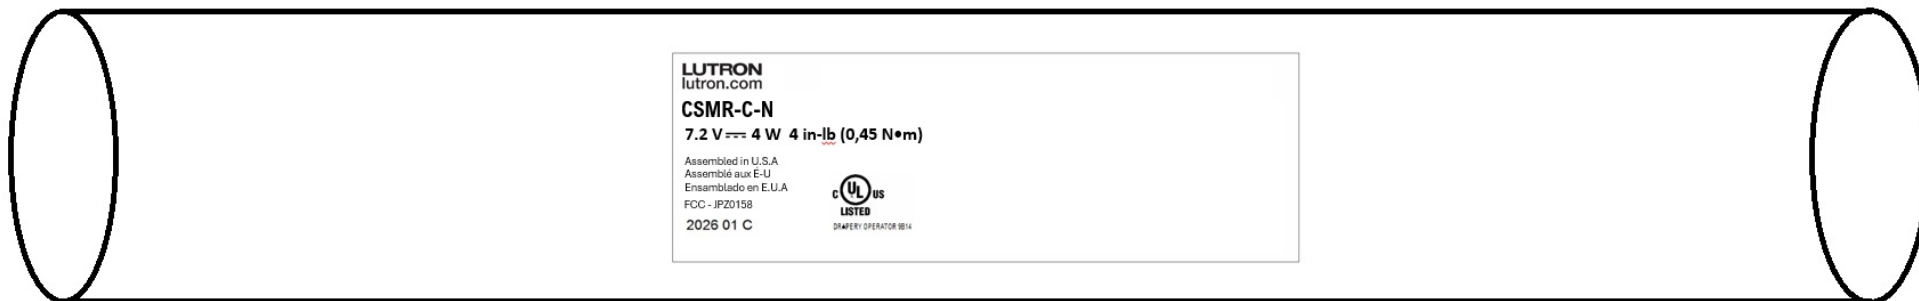

Label Specifications:





PRODUCT INFORMATION

THERMLfilm SELECT® 21940

Product Description:
THERMLfilm SELECT 21940 is a UL-recognized/CSA-accepted, 2.0 mil gloss topcoated thermal transfer printable, white polyester coated with an aggressive, permanent acrylic adhesive, and backed with a roll form release liner.

- THERMLfilm PM 200 W 2.0 mil gloss white polyester designed for high-performance label applications.
- Use type Indoor

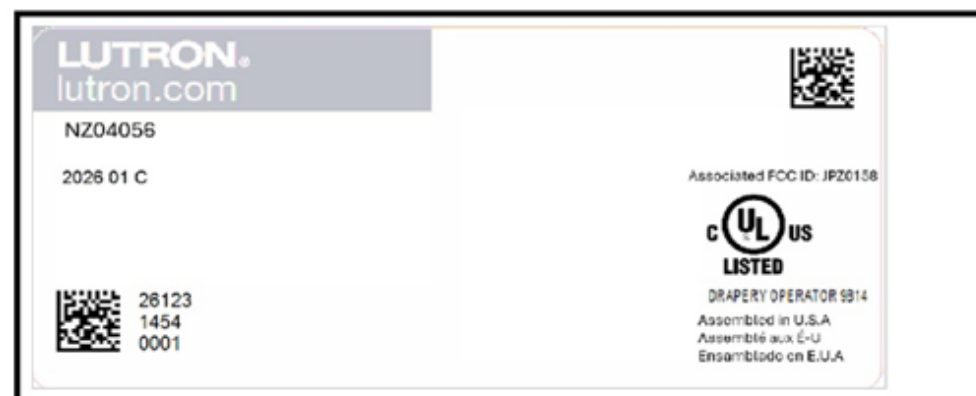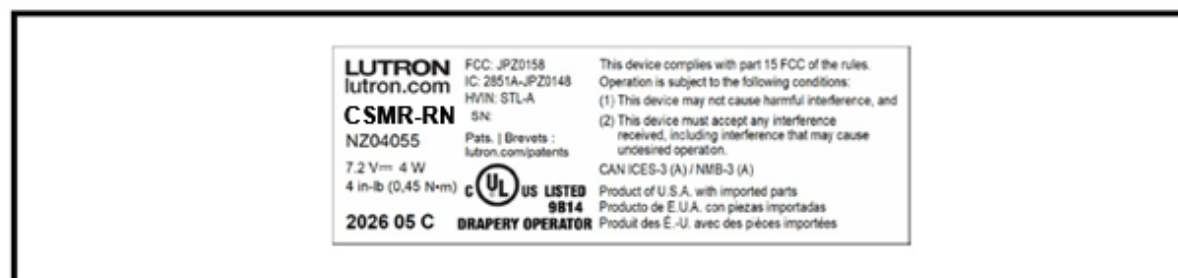

Label Specifications:



PRODUCT INFORMATION

THERMLfilm SELECT® 21940

Product Description:

THERMLfilm SELECT 21940 is a UL-recognized/CSA-accepted, 2.0 mil gloss topcoated thermal transfer printable, white polyester coated with an aggressive, permanent acrylic adhesive, and backed with a roll form release liner.

- THERMLfilm PM 200 W 2.0 mil gloss white polyester designed for high-performance label applications.
- Use type Indoor