



611 Center Ridge Drive
Austin, Texas 78753 USA


FREE +1 800 237 7769
MAIN +1 512 776 9000
FAX +1 512 776 9630

**HID Global Corporation
Color Card Printer
DTCii Plus
Antenna Specifications**


Gain Declaration for LF and HF Inductive Loop Antennas

Frequency	125kHz, 13.56MHz
Gain	1.0 dBi

Radiation Patterns: Horizontal

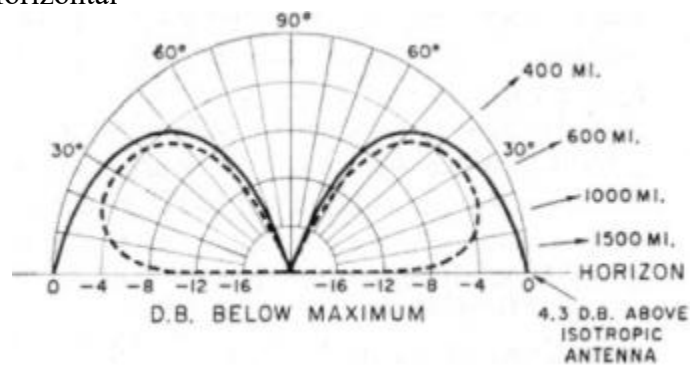

Radiation Patterns: Vertical

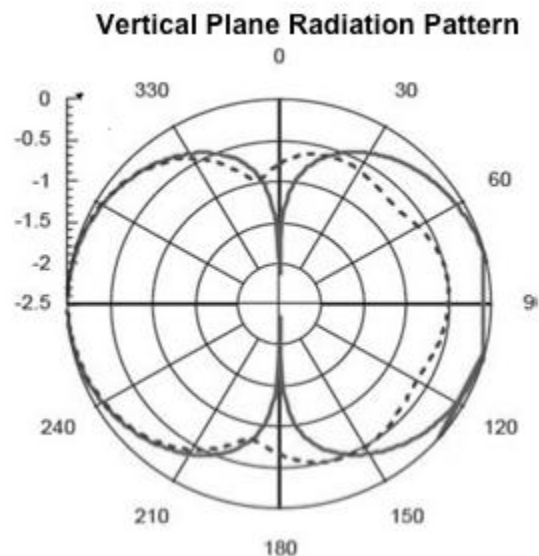

Antenna Specifications

OMNIKEY 5122

Frequency: 13.56MHz

Type: coil/loop/pcb trace antenna (square)


Number of turns: 2

RMS Current: 94.3 mA


Gain: 1dBi

Overall Dimensions: 55mm x 62mm

Closest distance from this antenna to outer surface of enclosure: 22mm

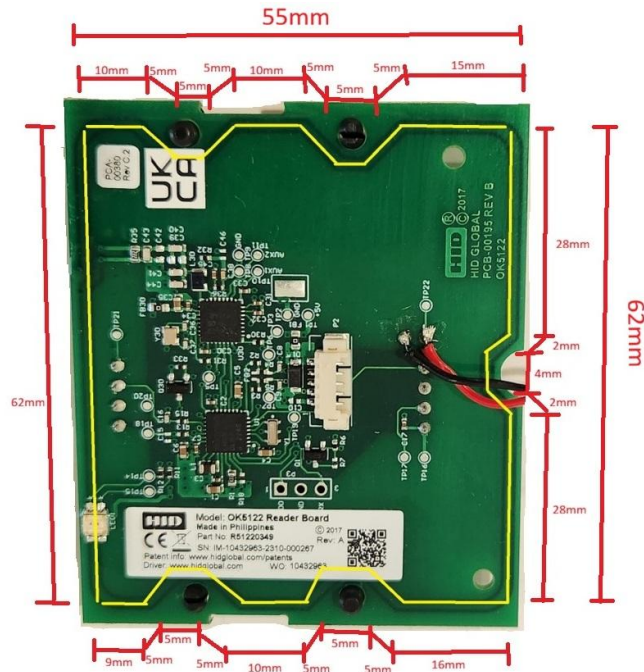

OMNIKEY 5122 HF Antenna dimensions

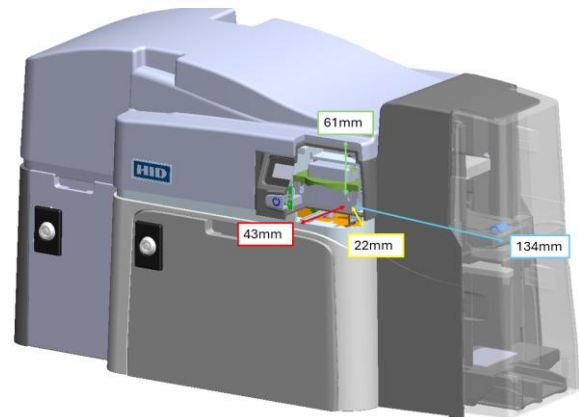

Antenna location within DTCii Plus and closest distance to outer surface of enclosure



611 Center Ridge Drive
Austin, Texas 78753 USA

FREE +1 800 237 7769
MAIN +1 512 776 9000
FAX +1 512 776 9630

Ribbon RFID

Frequency: 13.56MHz

Type: Loop/trace (circle)


Number of turns: 4

RMS Current: 34.7mA


Gain: 1dBi

Dimensions: 38mm (diameter)

Closest distance from this antenna to outer surface of enclosure: 90.5mm.

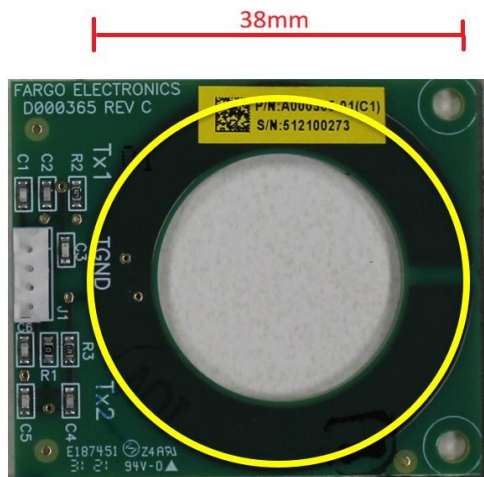

Ribbon RFID HF Antenna Dimensions

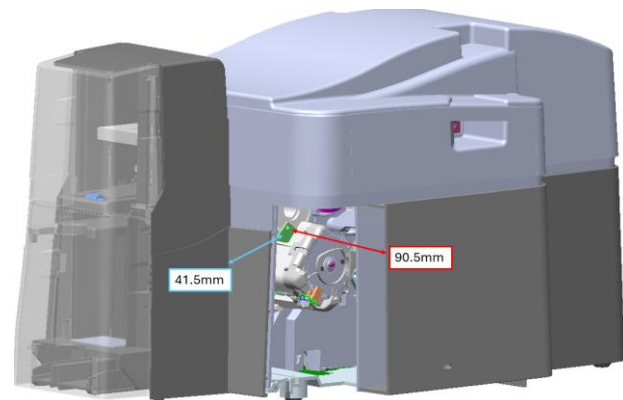

Antenna location within DTCii Plus
and closest distance to outer surface
of enclosure

Contact Name: Steven Peterson

Signature:

Manager Product Regulatory and Compliance, Global Product Compliance



Tel 952-258-3411

steven.peterson@hidglobal.com


OMNIKEY 5122 Encoder (13.56MHz) RFID antenna current measurement

Configuration:

- RFID 13.56MHz Radio Module
- This is a short-range RFID transmitter using a small loop antenna (magnetic field) used to read and encode Identification Cards.
- Antenna current is measured where it passes through the red oval on the schematic shown below using a Tektronix TCP202 current probe.

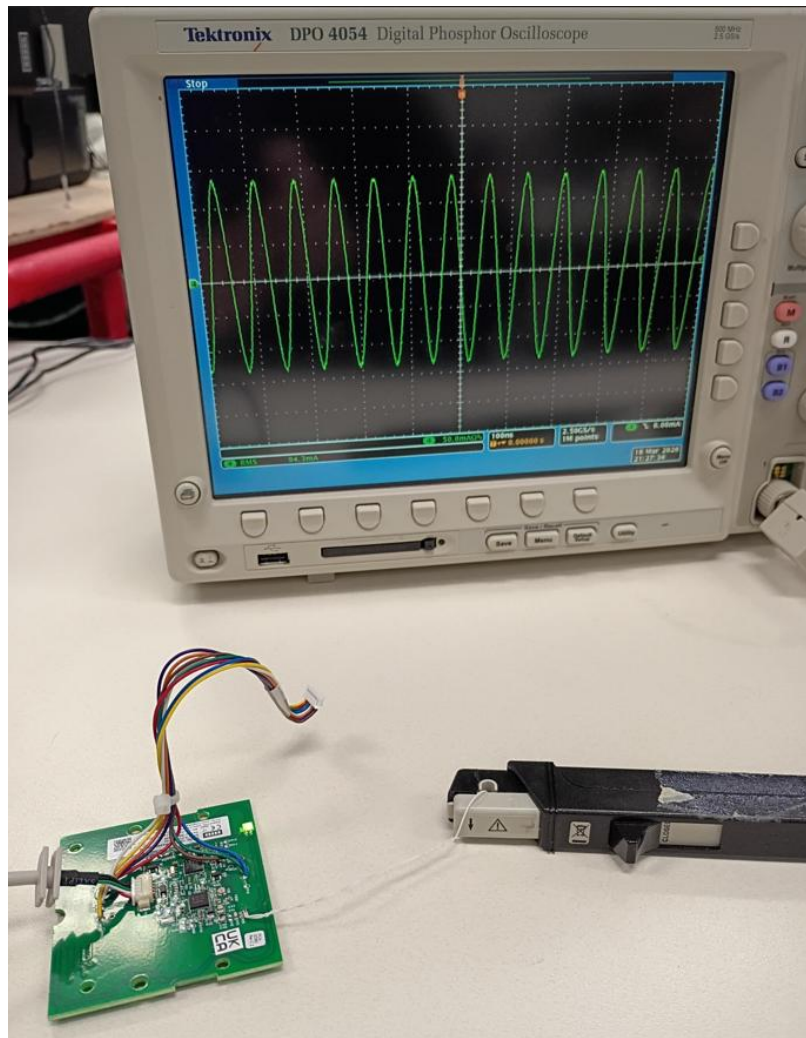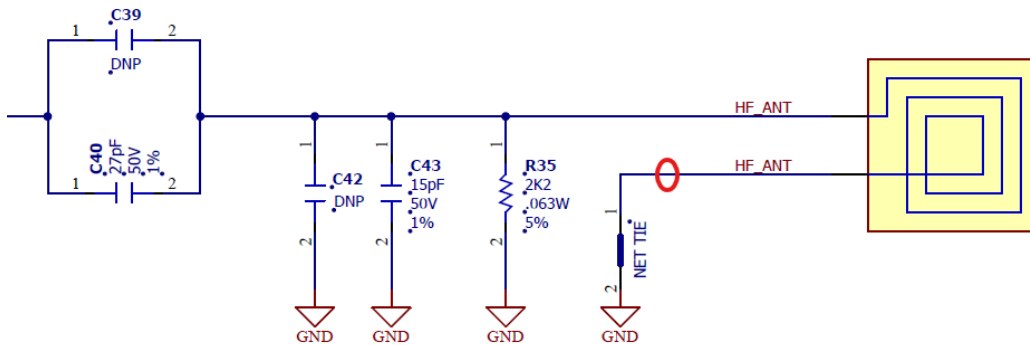



Measurement shows 94.3 mA RMS at 13.56MHz

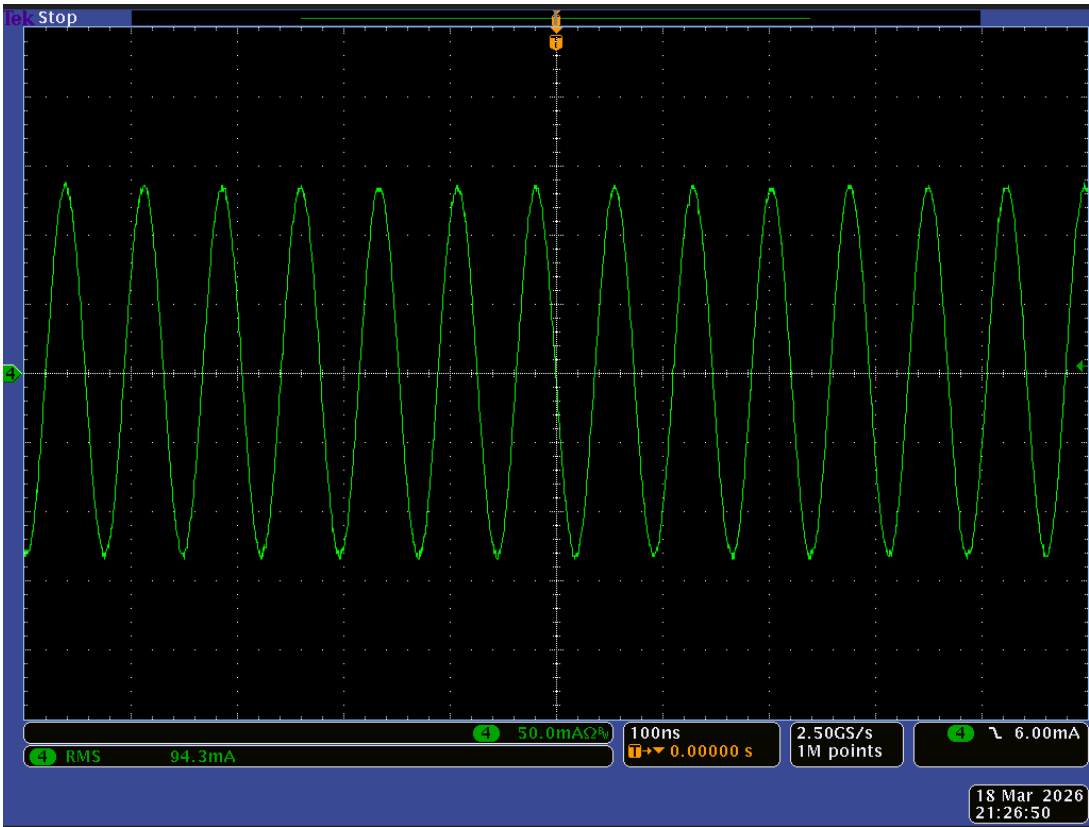

Printer Ribbon RFID antenna current measurement

Configuration:

- RFID 13.56MHz Radio Module
- This is a short-range RFID transmitter using a small loop antenna (magnetic field) used to detect the type of material installed in a printer
- Antenna current is measured where it passes through the red oval on the schematic shown below using a Tektronix TCP202 current probe.

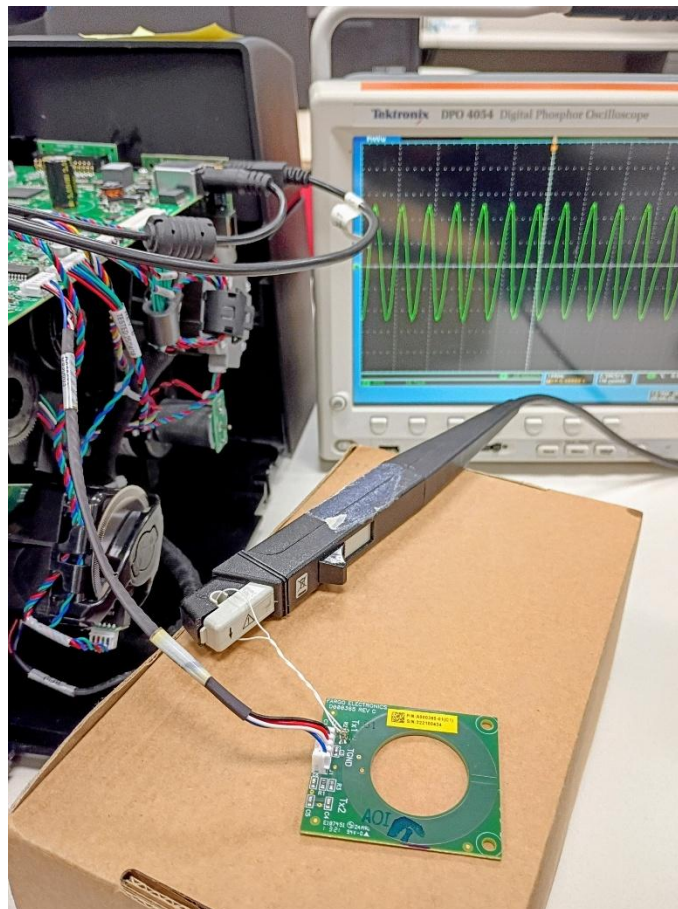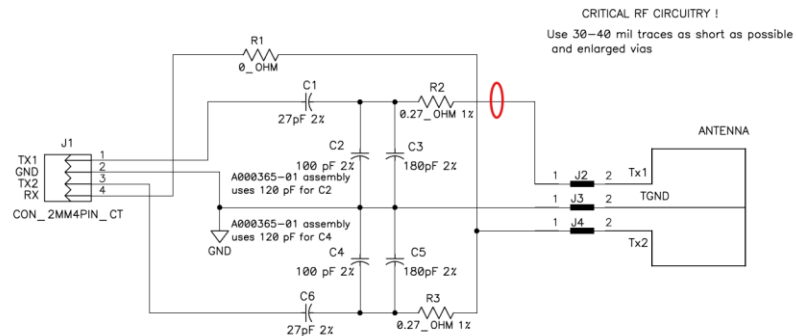

Measurement shows 34.7mA RMS at 13.56Mhz

