



# RF Test Report

As per

## RSS-137 Issue 2:2009 & FCC Part 90 Subpart M

Location and Monitoring Service (LMS)  
Operation in the 902 -928 MHz Band  
on the

**MRFM-S Plus**  
**Model: 802870**

Issued by:

**TÜV SÜD Canada Inc.**  
11 Gordon Collins Dr,  
Gormley, ON, L0H 1G0  
Canada  
Ph: (905) 883-7255

Testing produced for

**kapsch** >>>

Prepared by

Min Xie,  
Sr. EMC/RF Engineer

See Appendix A for full client &  
EUT details.

Reviewed by

Amir Emami,  
Project Engineer



Testing Laboratory  
Certificate #2955.02



R-4023, G-506  
C-4498, T-1246



|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Table of Contents

|                                                        |     |
|--------------------------------------------------------|-----|
| Table of Contents .....                                | 2   |
| Report Scope .....                                     | 3   |
| Summary .....                                          | 4   |
| Test Results Summary .....                             | 5   |
| Notes, Justifications, or Deviations .....             | 6   |
| Sample Calculation(s) .....                            | 7   |
| Applicable Standards, Specifications and Methods ..... | 8   |
| Document Revision Status .....                         | 9   |
| Definitions and Acronyms .....                         | 10  |
| Testing Facility .....                                 | 11  |
| Calibrations and Accreditations .....                  | 11  |
| Testing Environmental Conditions and Dates .....       | 12  |
| Detailed Test Results Section .....                    | 13  |
| Output Power and Antenna Heights .....                 | 14  |
| Occupied Bandwidth .....                               | 35  |
| Emission Mask .....                                    | 74  |
| Transmitter Spurious Radiated Emissions .....          | 96  |
| Temperature Frequency Stability .....                  | 107 |
| Appendix A – EUT Summary .....                         | 110 |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Report Scope

This report addresses the EMC verification testing and test results of the Kapsch TrafficCom Canada Inc.'s **MRFM-S Plus, Model: 802870** and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-137 Issue 2:2009

FCC Part 90 Subpart M

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Summary

The results contained in this report relate only to the item(s) tested.

|                                  |                              |
|----------------------------------|------------------------------|
| EUT:                             | MRFM-S Plus<br>Model: 802870 |
| FCC Certification #, FCC ID:     | JQU802870                    |
| ISED Canada Certification #, IC: | 2665A-802870                 |
| EUT passed all tests performed   | Yes                          |
| Tests conducted by               | Min Xie                      |

For testing dates, see "Testing Environmental Conditions and Dates".

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Test Results Summary

| Standard/Method                        | Description                                     | Limit                                                    | Result                        |
|----------------------------------------|-------------------------------------------------|----------------------------------------------------------|-------------------------------|
| FCC 90.205<br>RSS-137 Clause 6.4       | Output Power                                    | 30 W                                                     | Pass                          |
| FCC 90.207<br>RSS-137 Clause 6.2       | Types of Modulation                             | --                                                       | Pass<br>See<br>Justifications |
| FCC 90.209<br>RSS-137 Clause 6.1.2     | Occupied Bandwidth                              | 902 - 904 MHz:<br>2 MHz<br>909.75 – 921.75 MHz<br>12 MHz | Pass                          |
| FCC 90.210 (K)<br>RSS-137 Clause 6.5.3 | Spurious antenna<br>port conducted<br>emissions | Attenuation By:<br>$55 + 10 \log_{10}(P_{max})$ dB.      | Pass                          |
| FCC 90.210<br>RSS-137 Clause 6.5.3     | Spurious radiated<br>emissions                  | Attenuation By:<br>$55 + 10 \log_{10}(P_{max})$ dB.      | Pass                          |
| FCC 90.213<br>RSS-137 Clause 6.3       | Frequency stability                             | 2.5 ppm                                                  | Pass                          |
| FCC 90.214                             | Transient Behavior                              | --                                                       | N/A<br>See<br>Justifications  |
| <b>Overall Result</b>                  |                                                 |                                                          | <b>Pass</b>                   |

All tests were performed by Min Xie.

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '\*'.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### ***Notes, Justifications, or Deviations***

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

The EUT supports the following 6 protocols: KTDM, ATA, SeGo, 6B, and 6C

1. Kapsch Time Division Multiplex (TDM), hereafter referred to as the “KTDM” protocol
2. Super eGo® (SeGo)
3. ISO-18000-6C a.k.a. EPC Class 1 Gen 2, hereafter referred to as the “6C” protocol
4. ISO-10374 a.k.a. American Association of Railroads (AAR) S-918, a.k.a. American Trucking Association (ATA), hereafter referred to as the “ATA” protocol
5. ISO-18000-6B, hereafter referred to as the “6B” protocol

The EUT only transmits a CW signal in ATA mode and the other five protocols uses Shaped ON-OFF Keying to transmit information. According to FCC 90.207, the EUT have two types of emission:

1. N0N for ATA
2. K1D for the other five protocols

For FCC 90.214, the EUT operates in the 902-928 MHz band, and this requirement is not applicable.

For FCC 90.213, the EUT is a fixed non-multilateration transmitter with an authorized bandwidth that is more than 40 kHz from the band edge and therefore is not subject to frequency tolerance restrictions. The test was performed for information purpose.

For the requirements of FCC 90.210 (K) and FCC 2.1053 Measurements required: Field strength of spurious radiation. Spurious radiated emissions of the EUT was performed at 3 meters. The limit specified in FCC 90.210 (K) is: On any frequency outside the licensee’s sub-band edges, the peak power of any emission shall be attenuated by  $55 + 10 \log(P)$  where P is the highest emission (Watts) of the transmitter. For all intents and purposes, the limit is -25 dBm ERP. The 3 meter field strength limit for the EUT is given below:

$$E(\text{dB}\mu\text{V/m}) = \text{EIRP}(\text{dBm}) + 95.2$$

$$\text{Where EIRP} = \text{ERP} + 2.15$$

$$E(\text{dB}\mu\text{V/m}) = \text{ERP}(\text{dBm}) + 97.35$$

$$E(\text{dB}\mu\text{V/m}) = -25 \text{ dBm} + 97.35 = 72.35 \text{ dB}\mu\text{V}$$

This limit is applicable to all emission at 3 meter measurement distance.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### ***Sample Calculation(s)***

#### **Radiated Emission Test**

Margin = Limit – (Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain)

Margin = 50.5dB $\mu$ V/m – (50dB $\mu$ V + 10dB/m + 2.5dB – 20dB)

Margin = 8.0 dB (pass)

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Applicable Standards, Specifications and Methods

|                                |                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4:2014                | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10:2013               | American national standard for testing unlicensed wireless devices                                                                   |
| ANSI C63.26:2015               | American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services                                    |
| CFR 47 FCC Part 2<br>Subpart J | Code of Federal Regulations – Equipment Authorization Procedure                                                                      |
| CFR 47 FCC Part 90             | Code of Federal Regulations – Private Land Mobile Radio Services                                                                     |
| FCC KDB 412172                 | D01 Determining ERP and EIRP v01                                                                                                     |
| RSS 137 Issue<br>2:2009        | Spectrum Management and Telecommunications. Radio Standards Specification, Location and Monitoring Service in the Band 902-928 MHz.  |
| RSS-GEN Issue 5<br>2018        | General Requirements and Information for the Certification of Radio Apparatus                                                        |
| ISO 17025:2005                 | General Requirements for the Competence of Testing and Calibration Laboratories                                                      |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Document Revision Status

| Revision | Date        | Description   | Initials |
|----------|-------------|---------------|----------|
| Draft 3  | 2021 Mar 11 | DRAFT Release | MX       |
| -        | -           | -             | -        |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Definitions and Acronyms

The following definitions and acronyms are applicable in this report.  
See also ANSI C63.14.

**AE** – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

**BW** – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

**EMC** – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

**EMI** – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

**EUT** – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

**ITE** – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

**LISN** – Line Impedance Stabilization Network

**NCR** – No Calibration Required

**RF** – Radio Frequency

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada testing lab near Toronto, Ontario. The testing lab has calibrated 3m semi-anechoic chambers which allow measurements on a EUT that has a maximum width or length of up to 2m and a height of up to 3m. The testing lab also has a calibrated 10m Open Area Test Site (OATS). The chambers are equipped with a turntable that is capable of testing devices up to 5000lb in weight and are equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. This facility is capable of testing products that are rated for single phase or 3-phase AC input and DC capability is also available. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the vertical ground plane if applicable.

### **Calibrations and Accreditations**

The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Innovation, Science and Economic Development Canada (ISED, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-14023, G-20072, C-14498, and T-20060). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc. is accredited to ISO 17025 by A2LA with Testing Certificate #2955.02. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or biennial basis as listed for each respective test.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### ***Testing Environmental Conditions and Dates***

Following environmental conditions were recorded in the facility during time of testing

| <b>Date</b>    | <b>Test</b>                 | <b>Initials</b> | <b>Temperature (°C)</b> | <b>Humidity (%)</b> | <b>Pressure (kPa)</b> |
|----------------|-----------------------------|-----------------|-------------------------|---------------------|-----------------------|
| 2020 Dec 3     | Radiated Emissions          | MX              | 21.3                    | 21.2                | 101.7                 |
| 2020 Dec 4 - 8 | Antenna Conducted Emissions | MX              | 21.8 – 22.1             | 16.3 – 26.1         | 101.3 – 101.5         |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Detailed Test Results Section

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## ***Output Power and Antenna Heights***

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified.

### **Limits**

The limits are defined in FCC Part 90.205 (l) and RSS 137 Clause 6.4 as per the following paragraph:

902-928 MHz. LMS systems operating pursuant to subpart M of this part in the 902-927.25 MHz band will be authorized a maximum of 30 watts ERP. LMS equipment operating in the 927.25-928 MHz band will be authorized a maximum of 300 watts ERP. ERP must be measured as peak envelope power. Antenna heights will be as specified in §90.353(h).

### **Results**

The EUT passed.

The EUT supports the following 6 protocols: KTDM, ATA, SeGo, 6B, and 6C. Each protocol has its own frequency channels and frequency ranges. Where a protocol has more than one channel, the Low, middle and high channels were measured. The table below gives the results for each protocol.

The ATA, 6B, and 6C protocols operate in both sub-bands allocated for non-multilateral LMS transmitters. Output power for both sub-bands were measured.

Antenna selection varies by application. RF cable loss and fixed attenuations (added inline or manually set inside the unit under control of a commanding reader) is used to compensate for antenna gain so that the ERP is 30 watts or less. See page Tuning Procedure for further details.

Guidance for antenna height requirement and restrictions on setting module power to meet ERP are given in User Manual.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**Table(s)**

| <b>ATA – 902 – 904 MHz Sub-Band</b>       |                 |             |           |
|-------------------------------------------|-----------------|-------------|-----------|
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Low Channel                               | 902.5           | 36.68       | 4.66      |
| Mid Channel                               | 903.0           | 36.97       | 4.98      |
| High Channel                              | 903.5           | 36.92       | 4.92      |
| <b>ATA – 909.75 – 921.75 MHz Sub-Band</b> |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Low Channel                               | 910.0           | 36.84       | 4.83      |
| Mid Channel                               | 915.0           | 36.88       | 4.88      |
| High Channel                              | 921.5           | 36.68       | 4.66      |
| <b>KTDM</b>                               |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Channel                                   | 915.75          | 37.32       | 5.40      |
| <b>SeGO</b>                               |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Low Channel                               | 911.0           | 37.06       | 5.08      |
| Mid Channel                               | 915.0           | 36.72       | 4.70      |
| High Channel                              | 920.0           | 36.65       | 4.62      |
| <b>6B – 902 – 904 MHz Sub-Band</b>        |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Channel                                   | 903.0           | 37.0        | 5.01      |
| <b>6B - 909.75 to 921.75 MHz Sub-Band</b> |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Low Channel                               | 910.5           | 36.64       | 4.61      |
| Mid Channel                               | 915.0           | 36.75       | 4.73      |
| High Channel                              | 920.5           | 36.78       | 4.76      |
| <b>6C – 902 – 904 MHz Sub-Band</b>        |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Channel                                   | 903             | 37.16       | 5.20      |
| <b>6C – 909.75 to 921.75 MHz Sub-Band</b> |                 |             |           |
| Channel                                   | Frequency (MHz) | Power (dBm) | Power (W) |
| Low Channel                               | 910.5           | 36.77       | 4.75      |
| Mid Channel                               | 915.0           | 37.75       | 5.96      |
| High Channel                              | 920.5           | 36.82       | 4.81      |


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Graph(s)

The graphs below show the Peak Power during the operation of the device. Measurements were performed using a spectrum analyzer with a Peak detector of 1 MHz RBW / 3 MHz VBW. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.

### ATA – 902 – 904 MHz Sub-Band


#### Low Channel

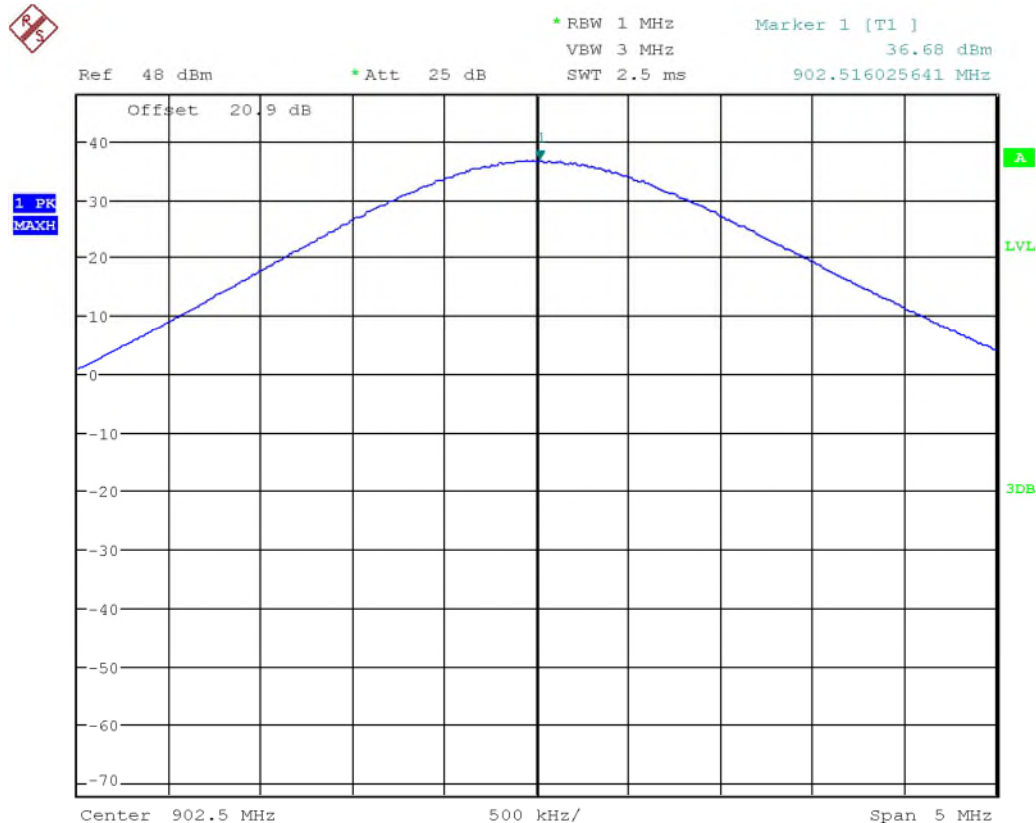

Date: 4.DEC.2020 16:32:04

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


## ATA – 902 – 904 MHz Sub-Band Mid Channel

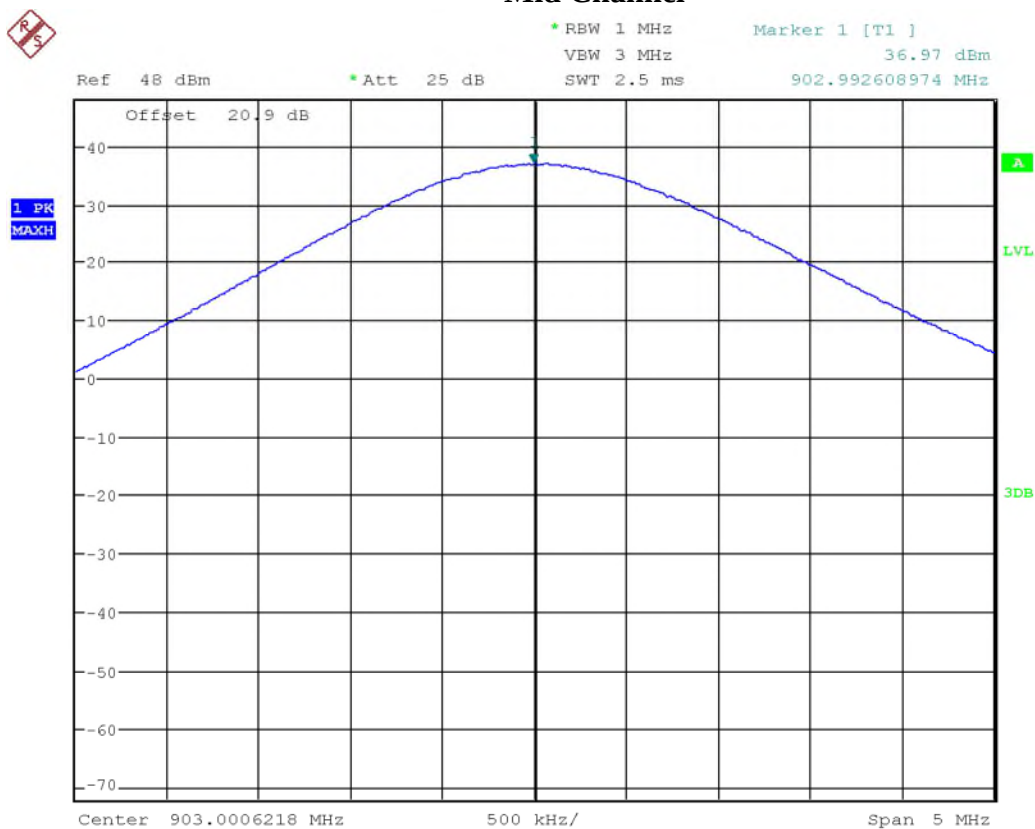

Date: 4.DEC.2020 17:01:14

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### ATA – 902 – 904 MHz Sub-Band High Channel

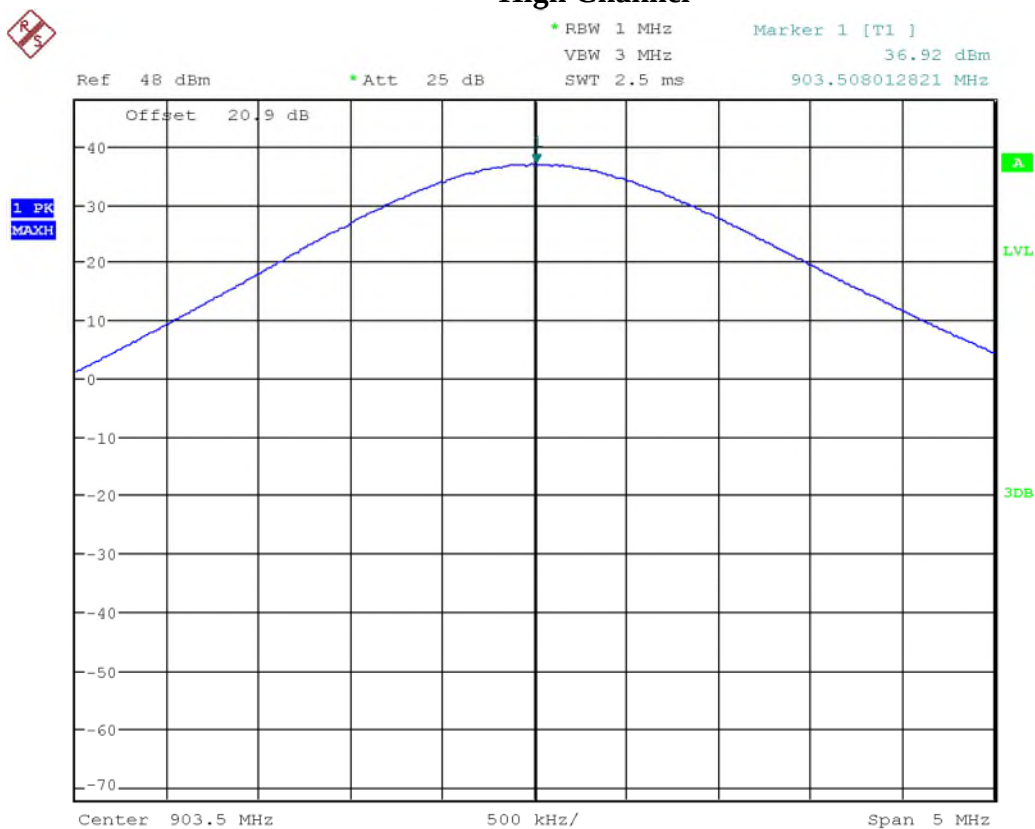

Date: 4.DEC.2020 16:30:24

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### ATA – 909.75 – 921.75 MHz Sub-Band Low Channel

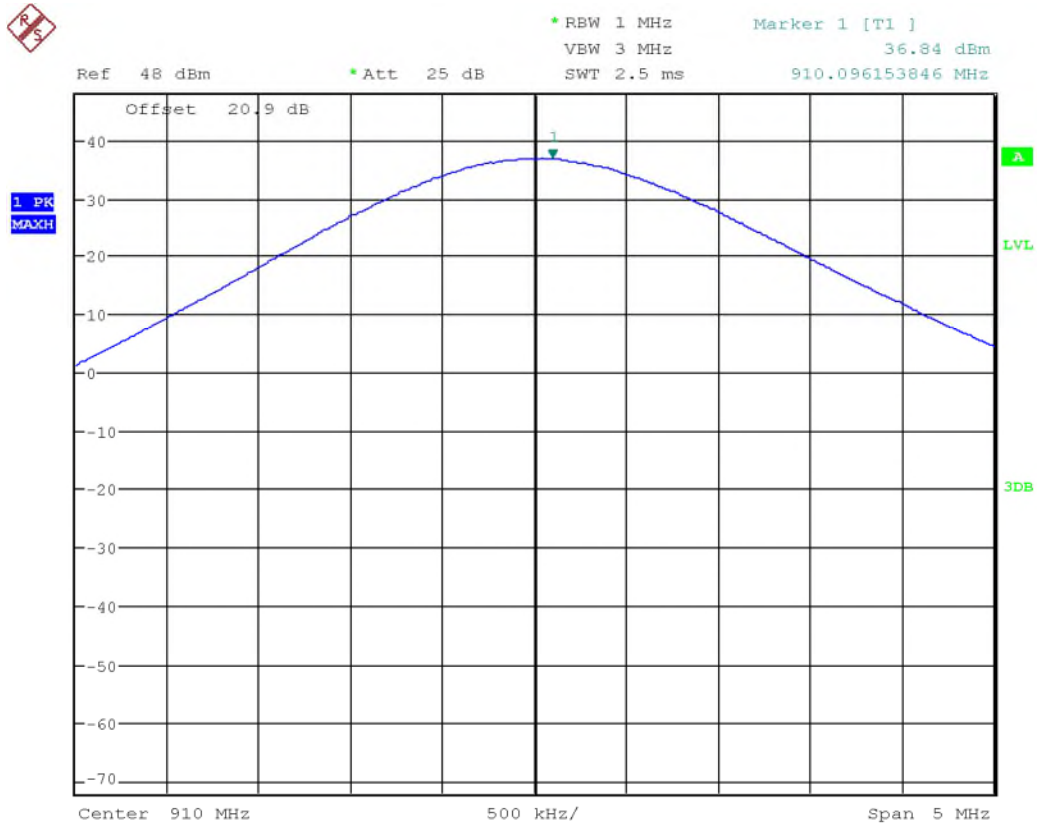

Date: 4.DEC.2020 14:58:53

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### ATA – 909.75 – 921.75 MHz Sub-Band Mid Channel

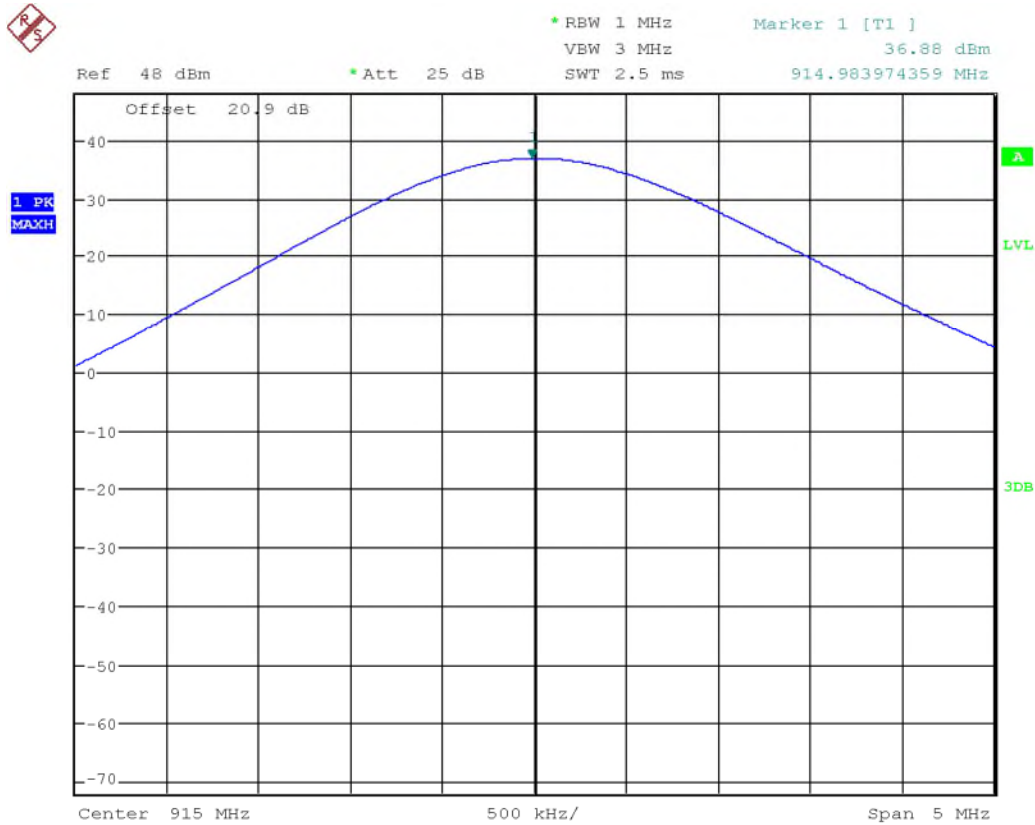

Date: 4.DEC.2020 15:09:34


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### ATA – 909.75 – 921.75 MHz Sub-Band High Channel

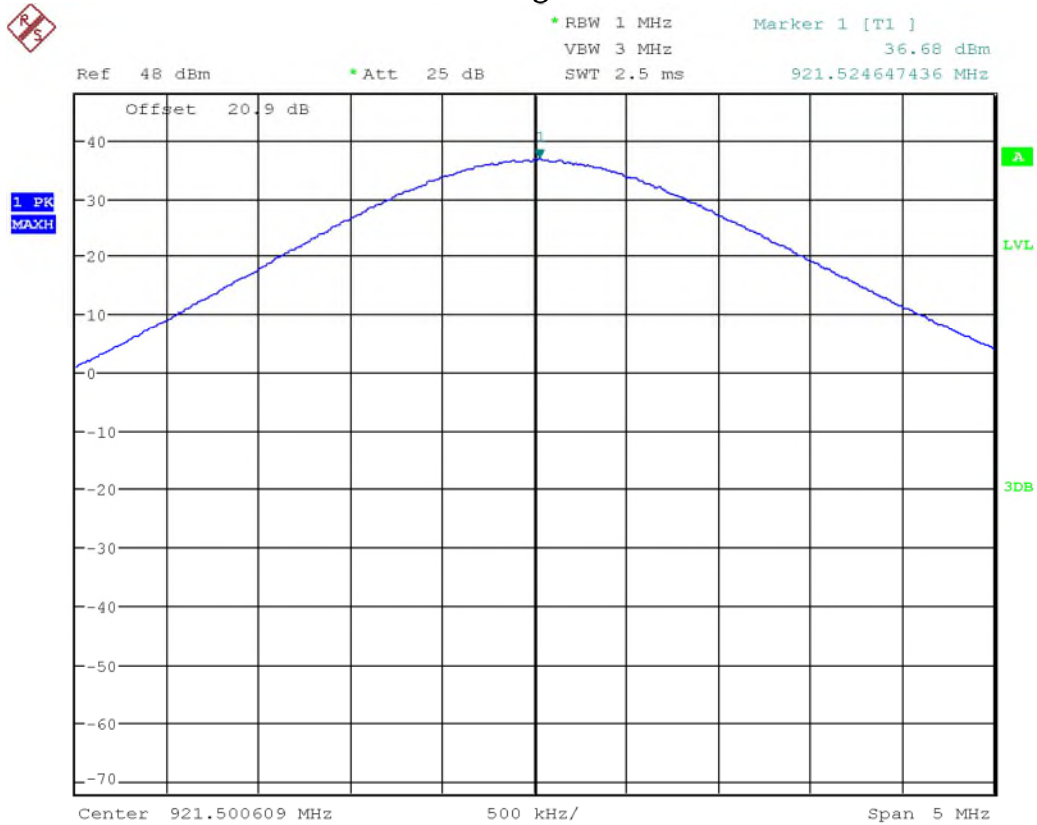

Date: 4.DEC.2020 14:48:22

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

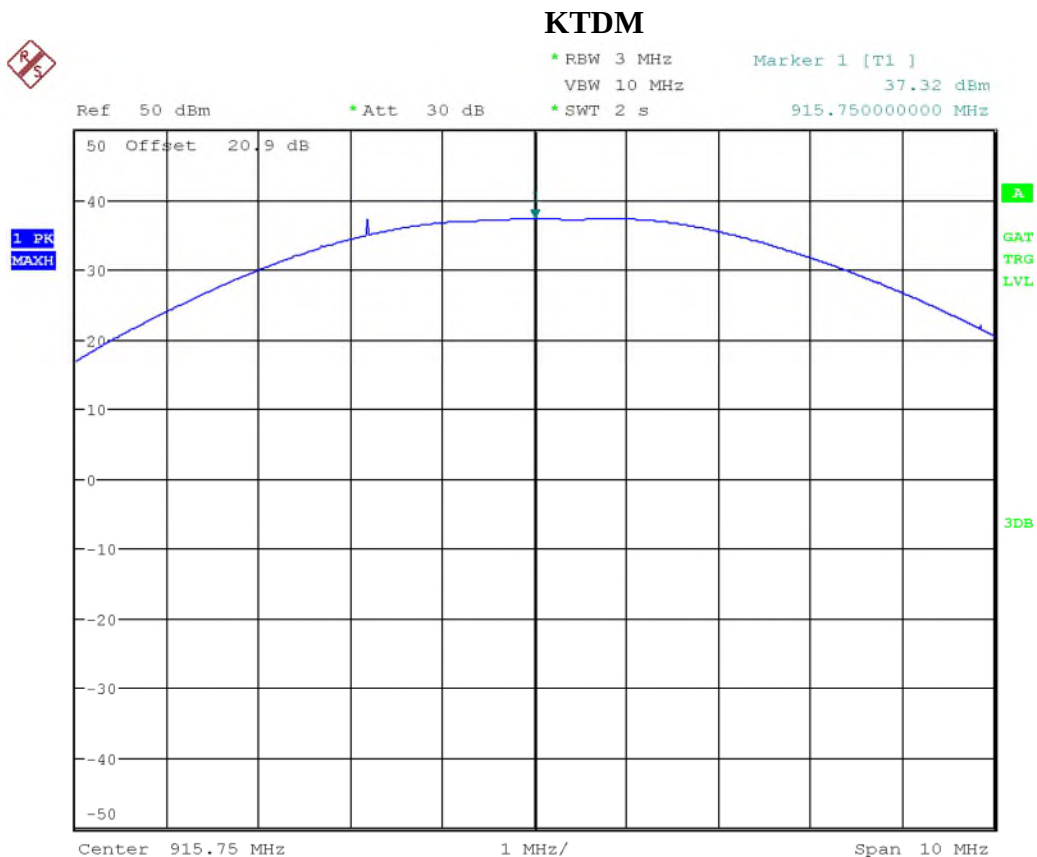

Date: 4.DEC.2020 10:23:53

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### SeGO – 909.75 – 921.75 MHz Sub-Band Low Channel



Date: 7.DEC.2020 12:21:59

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### SeGO – 909.75 – 921.75 MHz Sub-Band Mid Channel

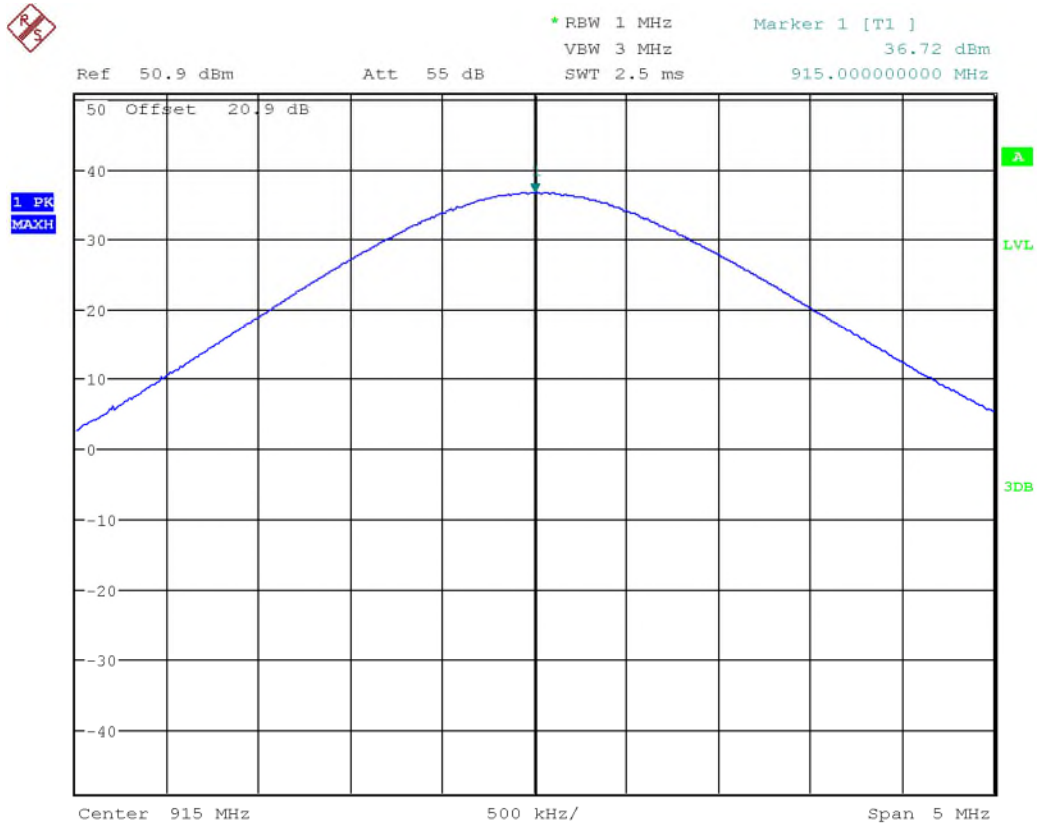

Date: 7.DEC.2020 12:07:14

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### SeGO – 909.75 – 921.75 MHz Sub-Band High Channel

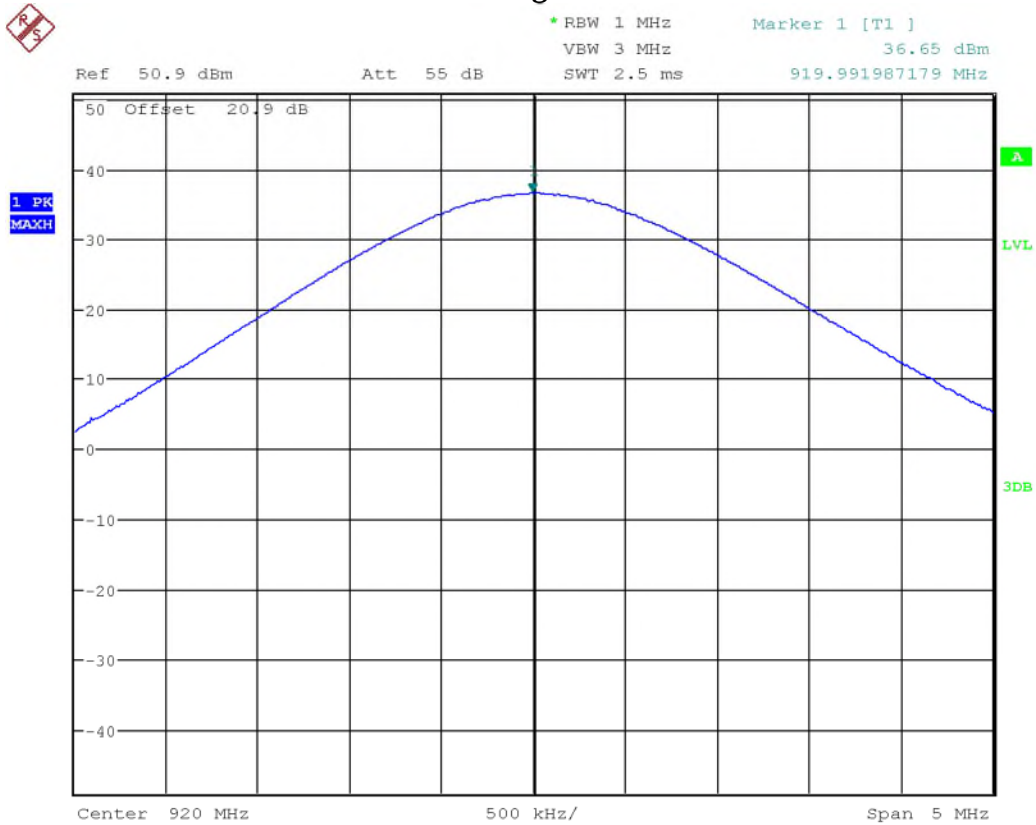

Date: 7.DEC.2020 12:05:51

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### 6B – 902 – 904 MHz Sub-Band

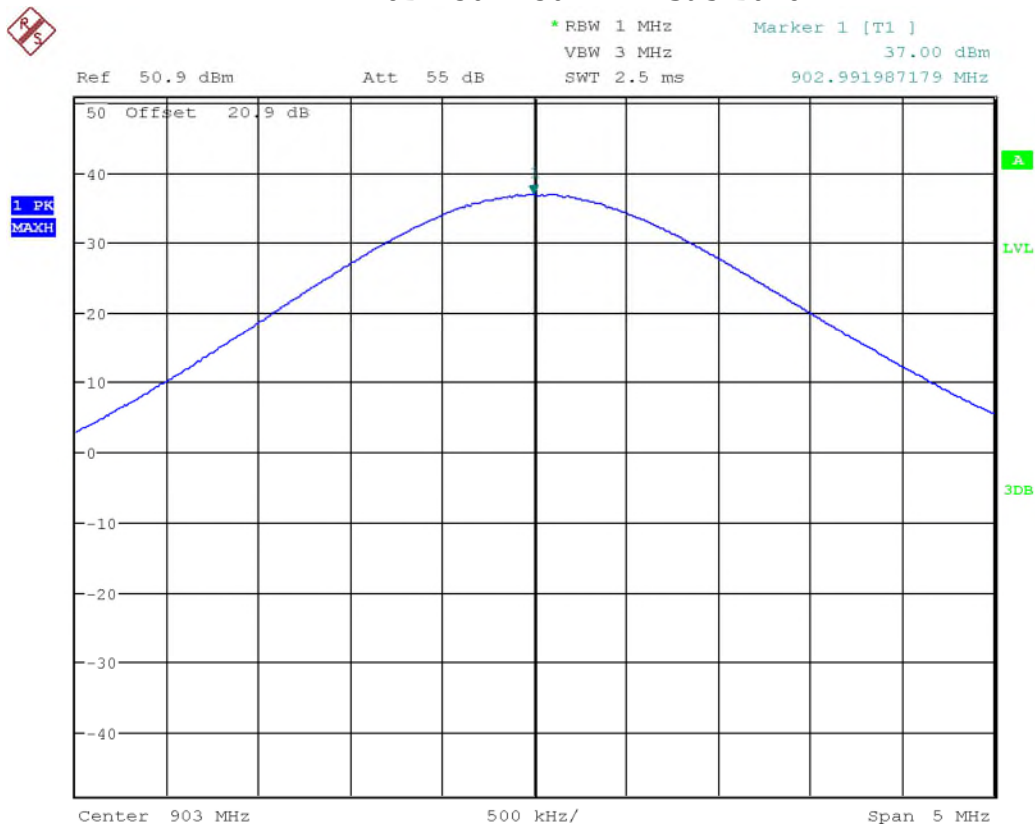

Date: 7.DEC.2020 10:55:50

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### 6B – 909.75 – 921.75 MHz Sub-Band Low Channel

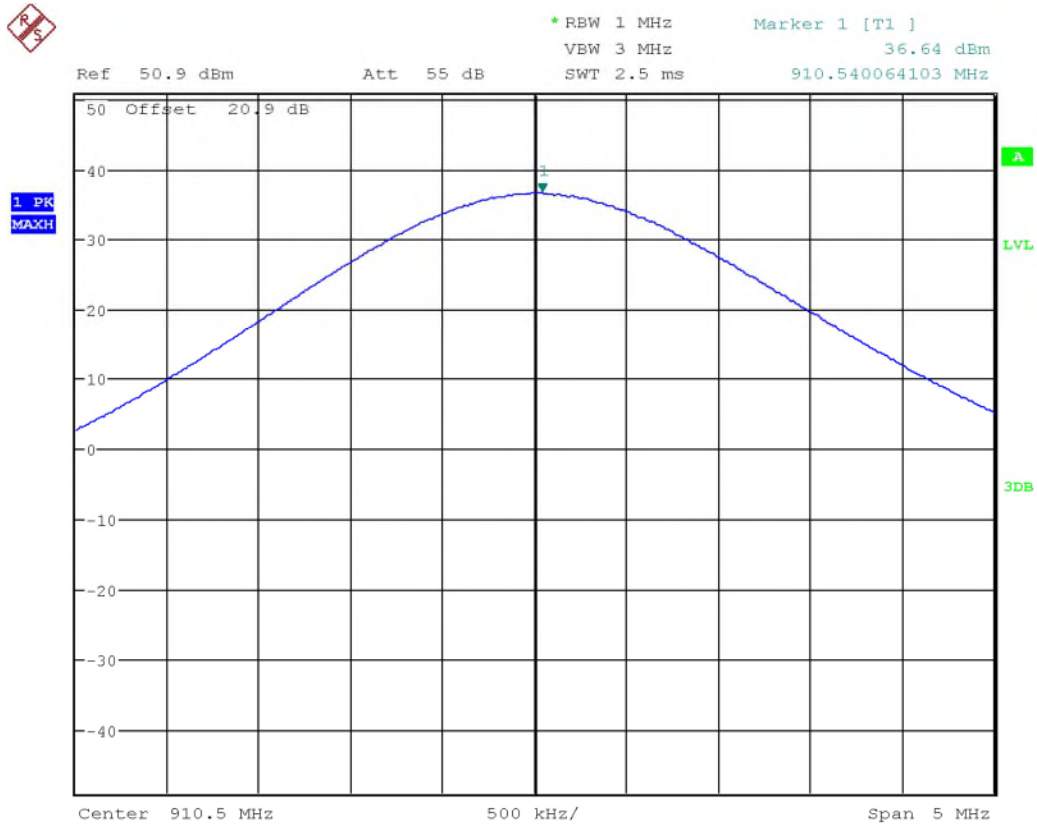

Date: 7.DEC.2020 11:12:42

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### 6B – 909.75 – 921.75 MHz Sub-Band Mid Channel

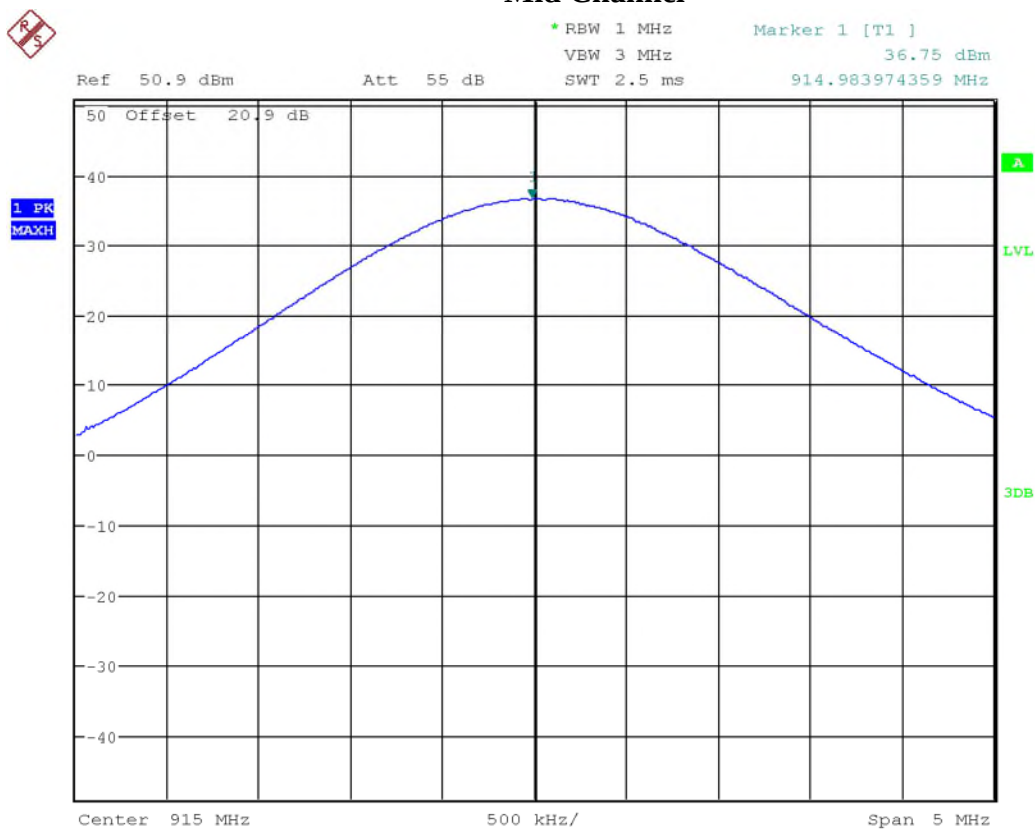

Date: 7.DEC.2020 11:31:17

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### 6B – 909.75 – 921.75 MHz Sub-Band High Channel

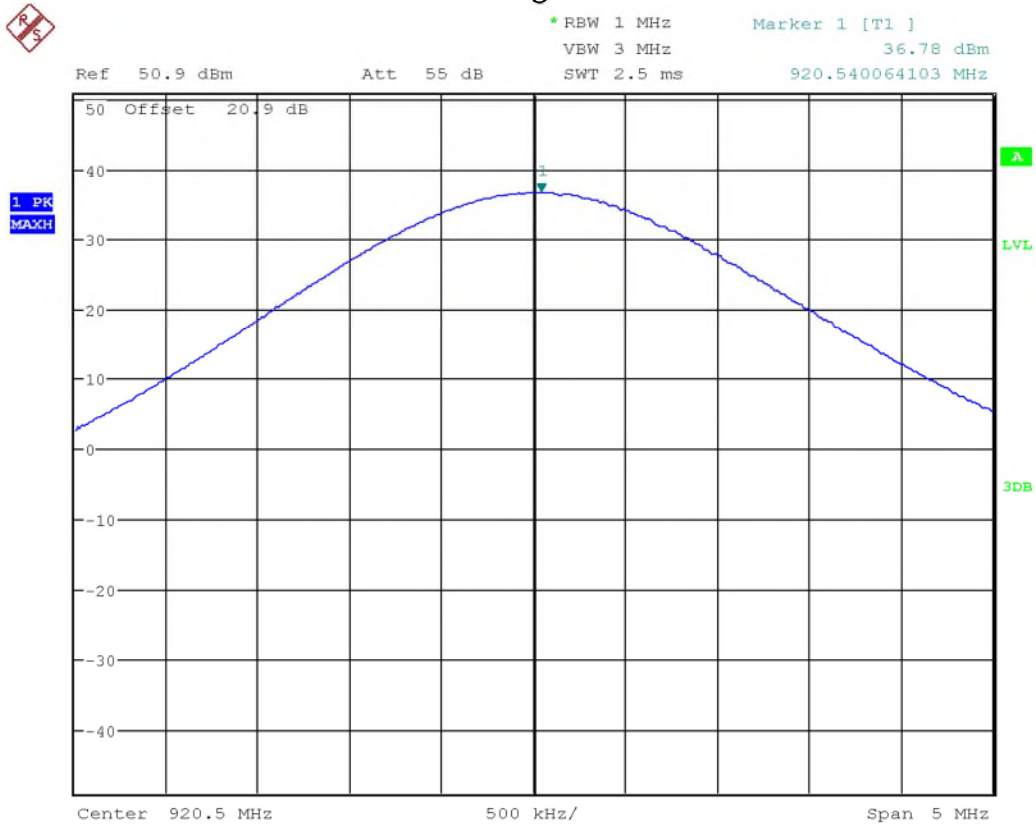

Date: 7.DEC.2020 11:35:50

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### 6C – 902 – 904 MHz Sub-Band

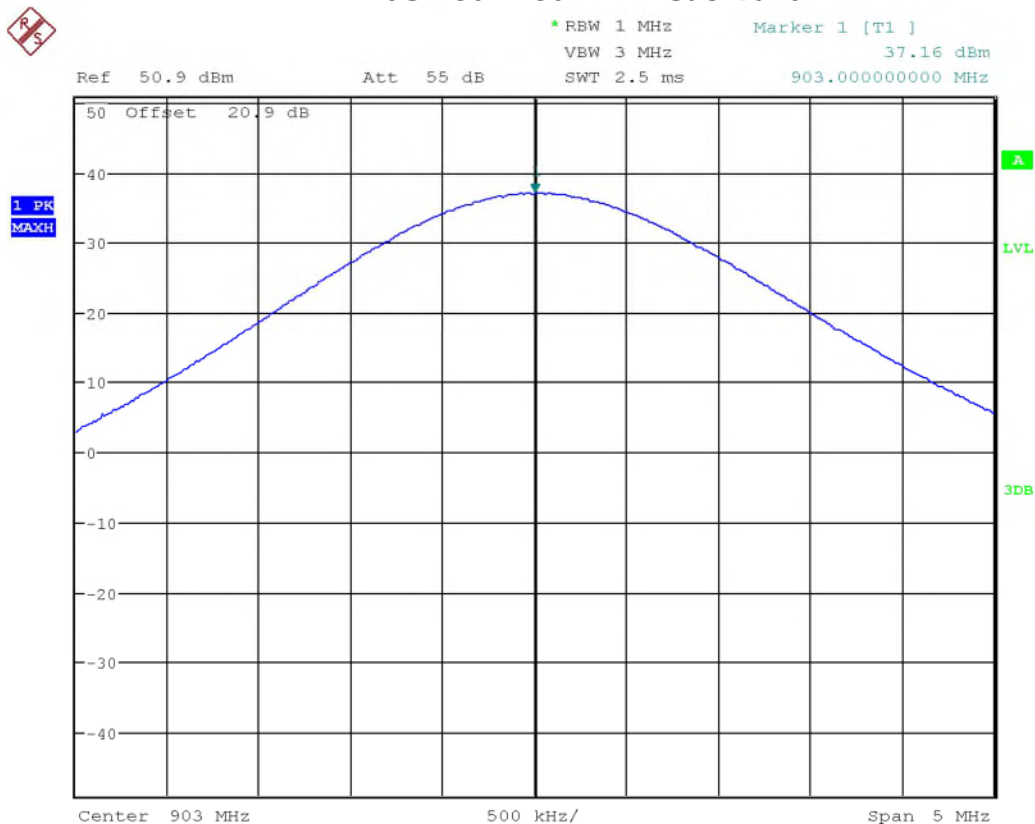

Date: 7.DEC.2020 10:02:11

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### 6C – 909.75 – 921.75 MHz Sub-Band Low Channel



Date: 7.DEC.2020 10:28:37

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


### 6C – 909.75 – 921.75 MHz Sub-Band Mid Channel

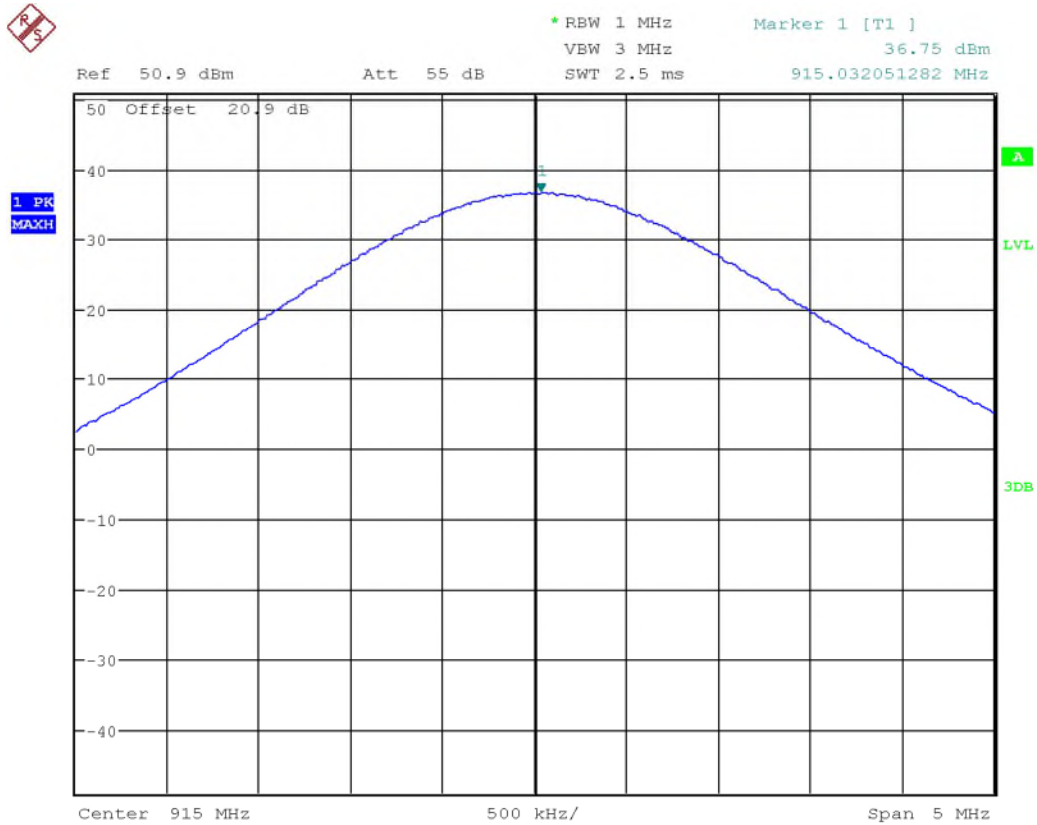

Date: 7.DEC.2020 10:29:44

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### 6C – 909.75 – 921.75 MHz Sub-Band High Channel

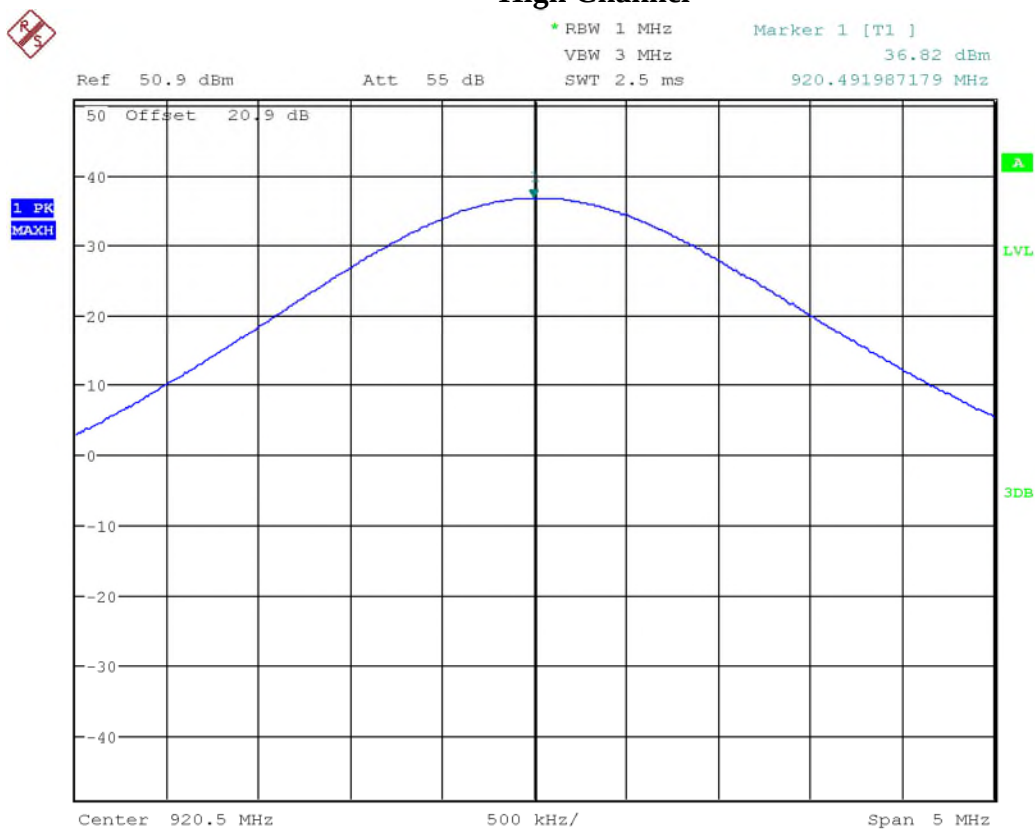

Date: 7.DEC.2020 10:42:47

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Test Equipment List

| Equipment              | Model No.  | Manufacturer    | Last Calibration Date | Next Calibration Date | Asset #  |
|------------------------|------------|-----------------|-----------------------|-----------------------|----------|
| Signal Analyzer        | FSQ 26     | Rohde & Schwarz | Oct. 25, 2019         | Oct. 25, 2021         | GEMC 234 |
| 20dB Attenuator (100W) | 6N100W-20F | Inmet           | Dec 3, 2020           | Dec 3, 2021           | GEMC 352 |

Note: GEMC 287 is part of GEMC 8's calibration.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Occupied Bandwidth

### Purpose

The purpose of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information.

### Limits

The Limit is as specified in FCC Part 90.209 and RSS-137 Clause 6.1.2.

The maximum authorized bandwidth shall be 12 MHz for non-multilateration LMS operations in the band 909.75-921.75 MHz and 2 MHz in the band 902.00-904.00 MHz. The maximum authorized bandwidth for multilateration LMS operations shall be 5.75 MHz in the 904.00-909.75 MHz band; 2 MHz in the 919.5-921.75 MHz band; 5.75 MHz in the 921.75-927.25 MHz band and its associated 927.25-927.50 MHz narrowband forward link; and 8.00 MHz if the 919.75-921.75 MHz and 921.75-927.25 MHz bands and their associated 927.25-927.50 MHz and 927.50-927.75 MHz narrowband forward links are aggregated.

### Results

The EUT passed

Each of the 5 supported protocol was tested. Where a protocol has more than one channel, the Low, middle and high channels were measured. The table below gives the results for each protocol.

The ATA, 6B and 6C protocols operate in both non- multilateration LMS sub-bands and the other 2 protocols operate in the 909.75 – 921.75 MHz sub-band.

| <b>ATA – 902 – 904 MHz Sub-Band</b>       |                 |                |                     |
|-------------------------------------------|-----------------|----------------|---------------------|
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Low Channel                               | 902.5           | 0.44           | 6.79                |
| Mid Channel                               | 903.0           | 0.44           | 7.24                |
| High Channel                              | 903.5           | 0.36           | 7.46                |
| <b>ATA – 909.75 – 921.75 MHz Sub-Band</b> |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Low Channel                               | 910.0           | 6.83           | 12.40               |
| Mid Channel                               | 915.0           | 6.51           | 15.24               |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


|                                           |                 |                |                     |
|-------------------------------------------|-----------------|----------------|---------------------|
| High Channel                              | 921.5           | 5.89           | 12.66               |
| <b>KTDM</b>                               |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Channel                                   | 915.75          | 2644.23        | 3096.15             |
| <b>SeGO</b>                               |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Low Channel                               | 911.0           | 480.76         | 477.56              |
| Mid Channel                               | 915.0           | 482.37         | 474.36              |
| High Channel                              | 920.0           | 480.77         | 475.96              |
| <b>6B – 902 – 904 MHz Sub-Band</b>        |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Channel                                   | 903.0           | 249.20         | 242.79              |
| <b>6B - 909.75 to 921.75 MHz Sub-Band</b> |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Low Channel                               | 910.5           | 258.81         | 251.60              |
| Mid Channel                               | 915.0           | 260.42         | 254.81              |
| High Channel                              | 920.5           | 258.81         | 249.20              |
| <b>6C – 902 – 904 MHz Sub-Band</b>        |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Channel                                   | 903.0           | 416.67         | 439.10              |
| <b>6C – 909.75 to 921.75 MHz Sub-Band</b> |                 |                |                     |
| Channel                                   | Frequency (MHz) | 20 dB BW (kHz) | 99% Bandwidth (kHz) |
| Low Channel                               | 910.5           | 36.77          | 426.28              |
| Mid Channel                               | 915.0           | 37.75          | 426.28              |
| High Channel                              | 920.5           | 36.82          | 413.46              |

## Graph(s)

The graphs showed below shows the OBW during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 99% bandwidth of a channel during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute




|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

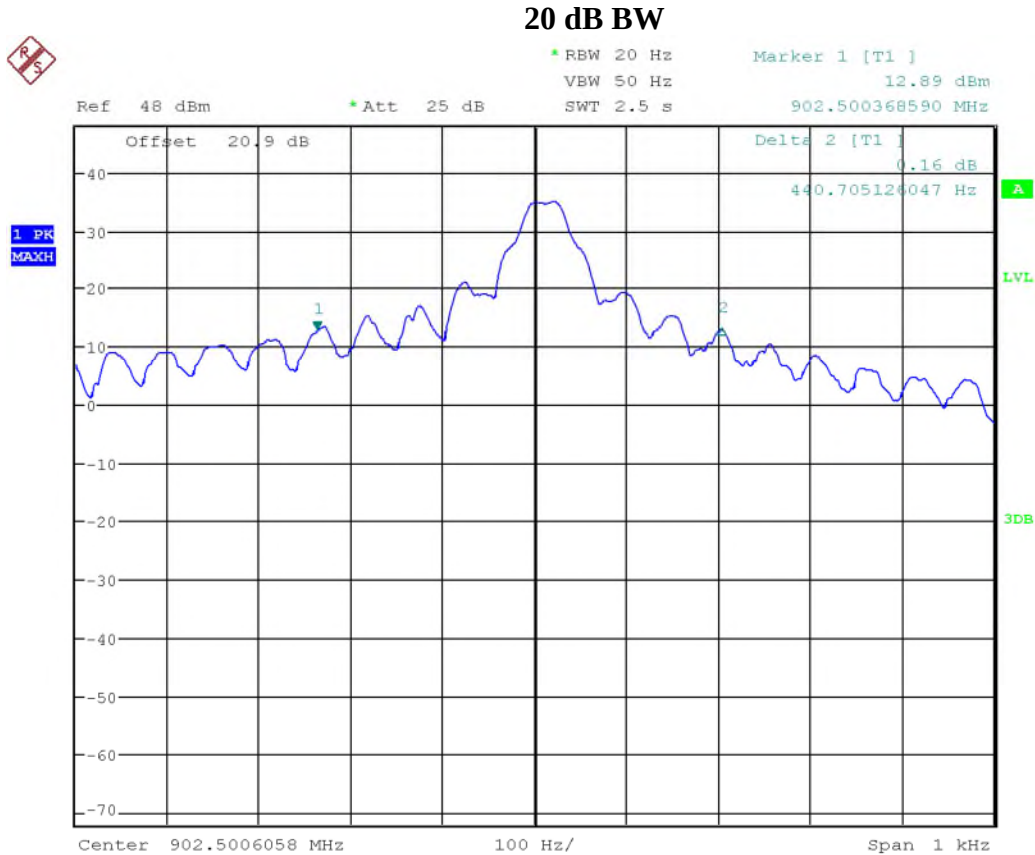

Date: 4.DEC.2020 17:04:01


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**ATA – 902 – 904 MHz Sub-Band  
Mid Channel  
99% BW**

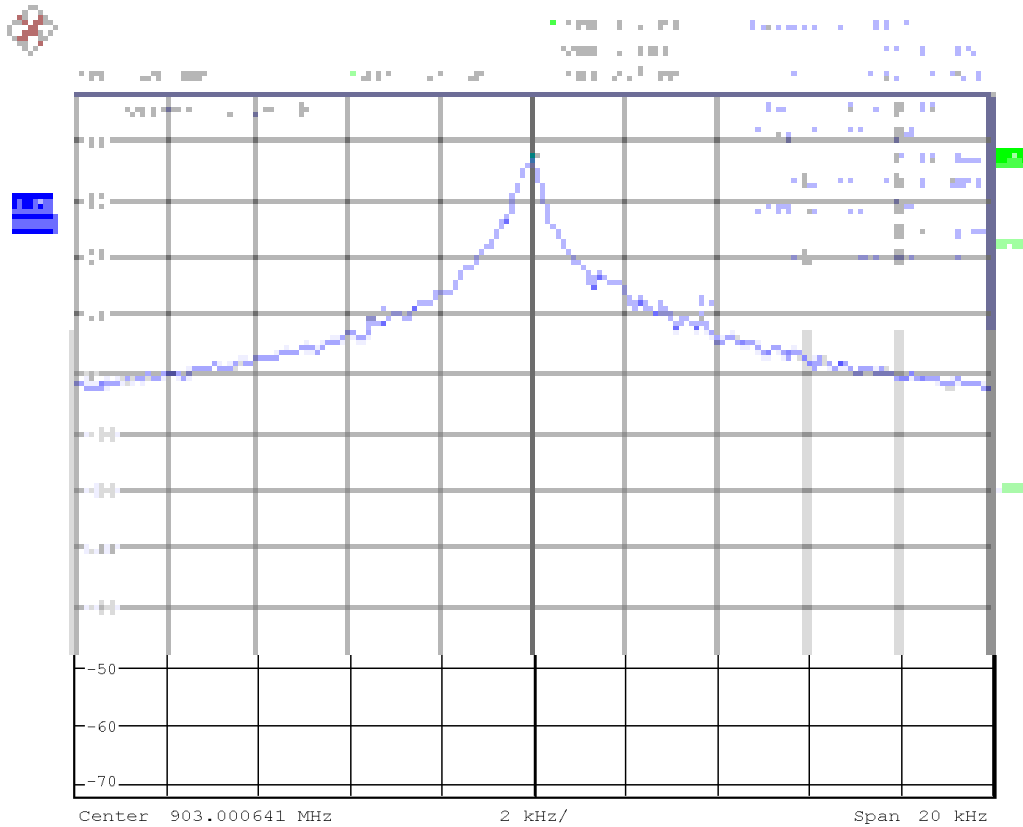

Date: 4.DEC.2020 16:48:46


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

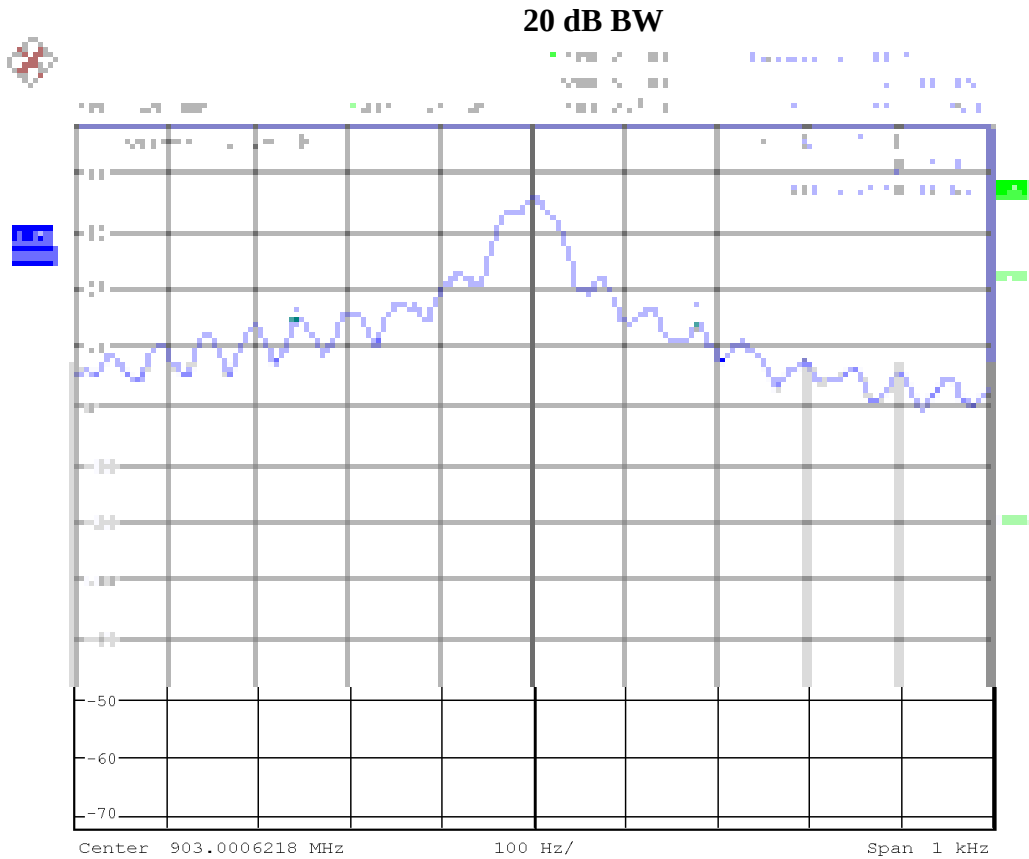

Date: 4.DEC.2020 16:58:51


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**ATA – 902 – 904 MHz Sub-Band  
High Channel  
99% BW**

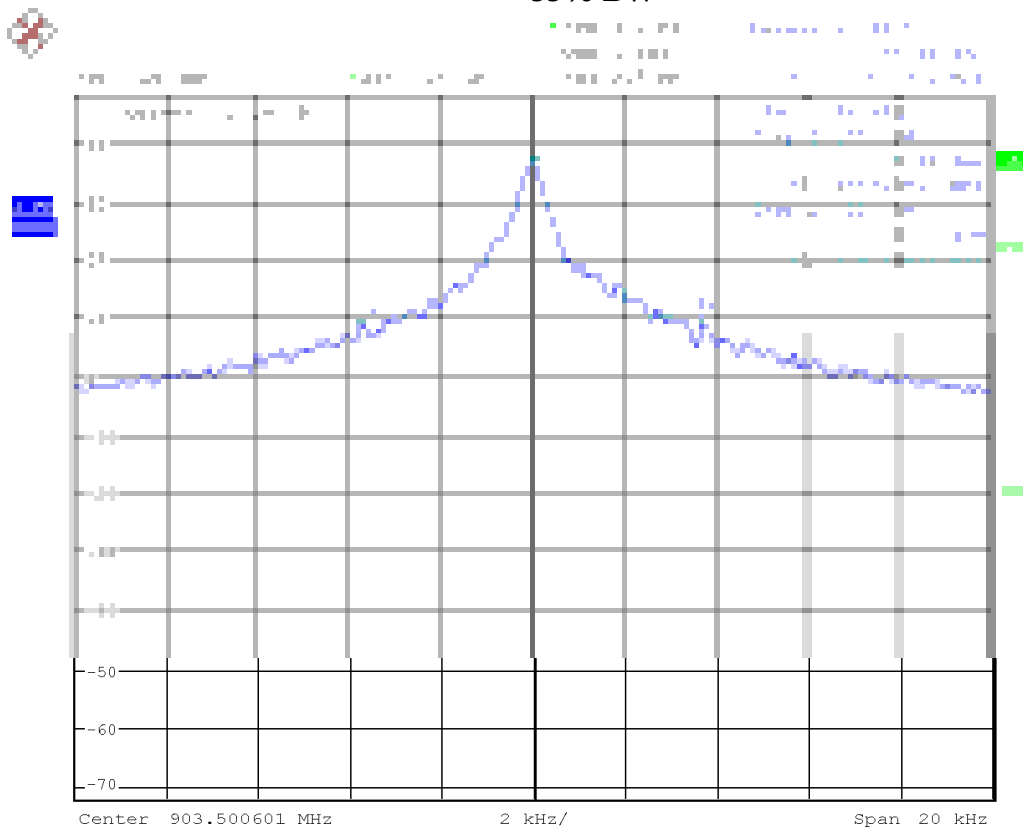

Date: 4.DEC.2020 16:35:30

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

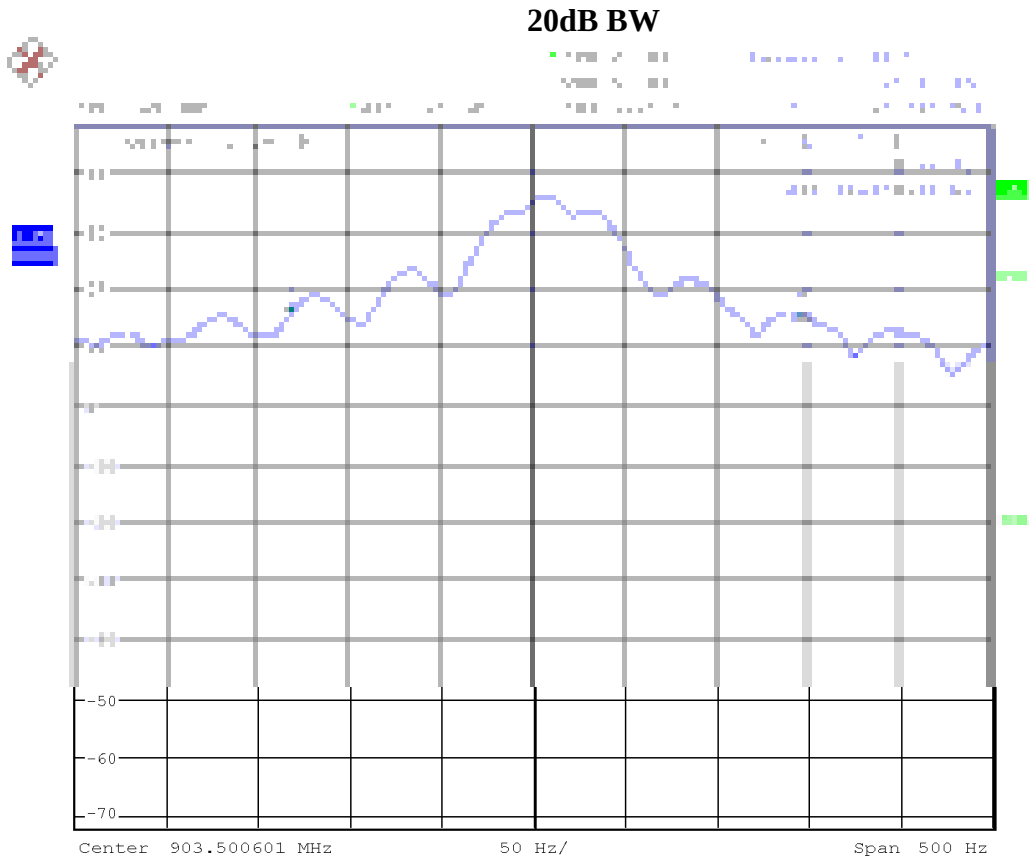


Date: 4.DEC.2020 16:39:55

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


## ATA – 909.75 – 921.75 MHz Sub-Band Low Channel

### 99% BW

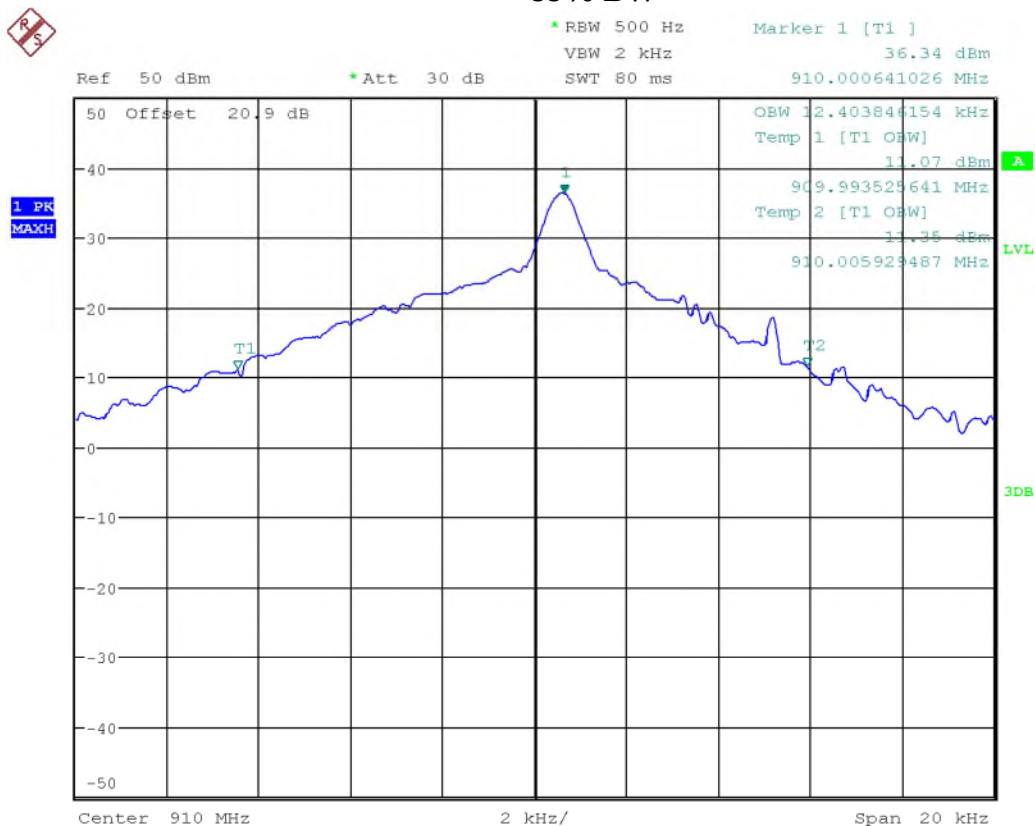

Date: 4.DEC.2020 10:53:20


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

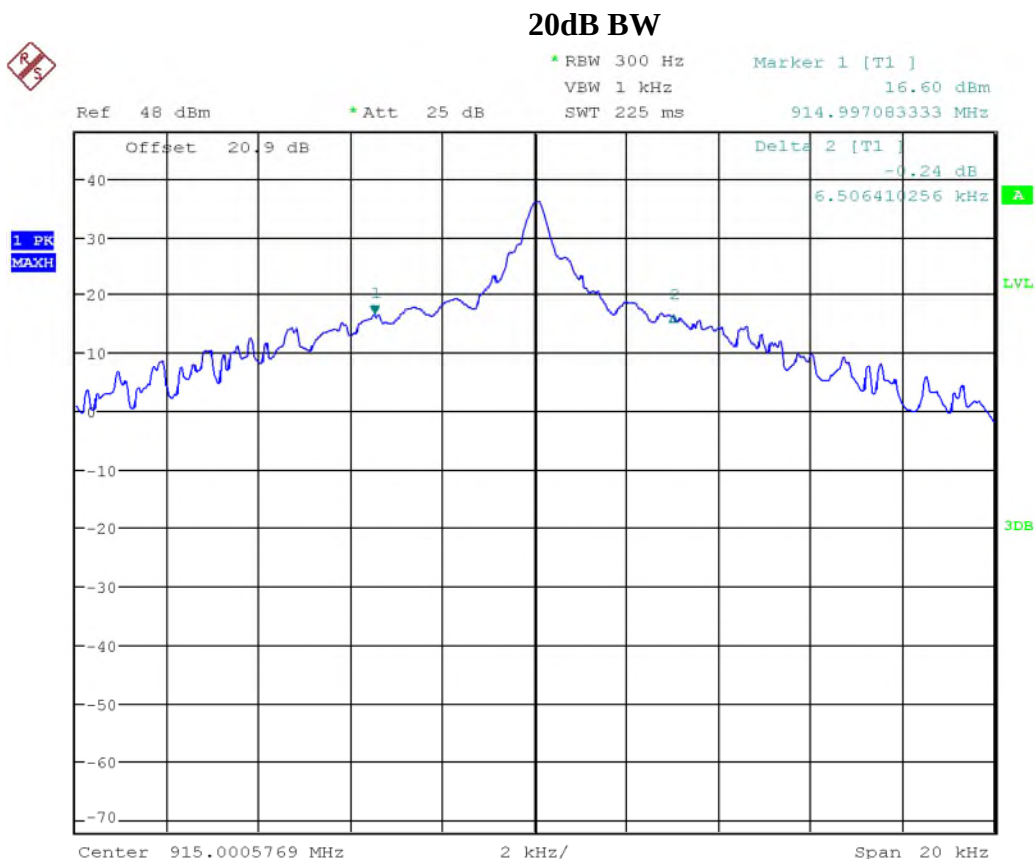

Date: 4.DEC.2020 15:18:47


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**ATA – 909.75 – 921.75 MHz Sub-Band  
Mid Channel  
99% BW**

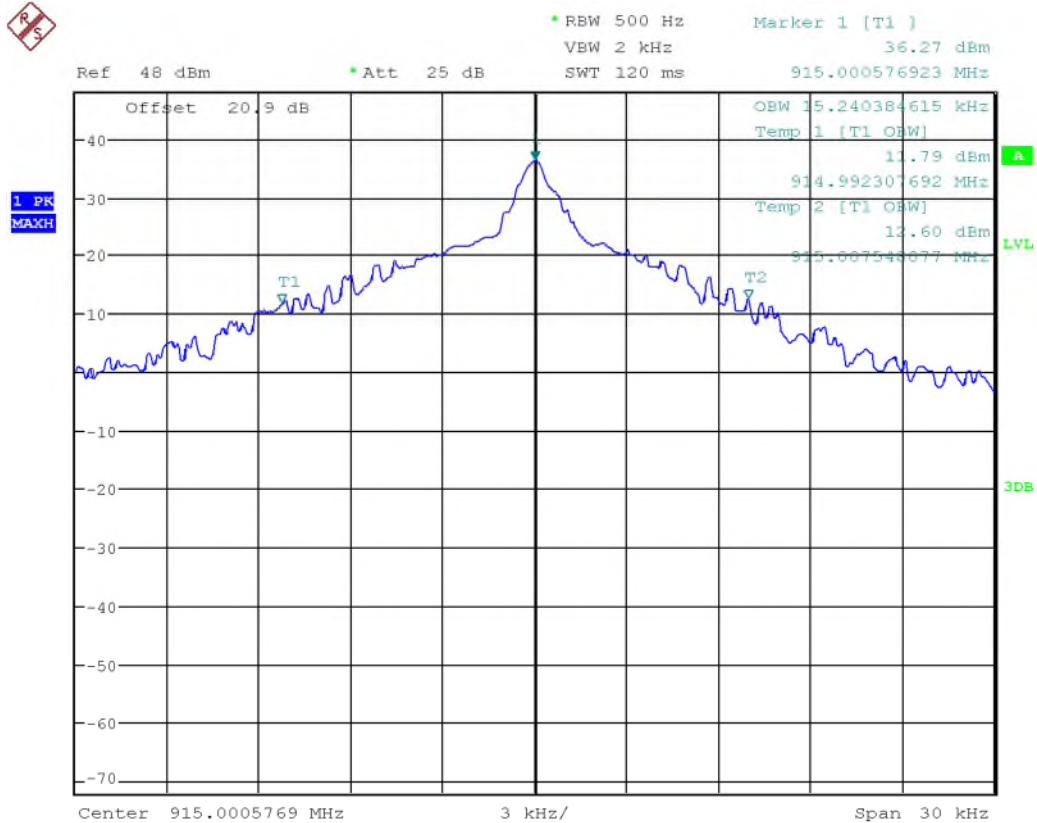

Date: 4.DEC.2020 15:14:40


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

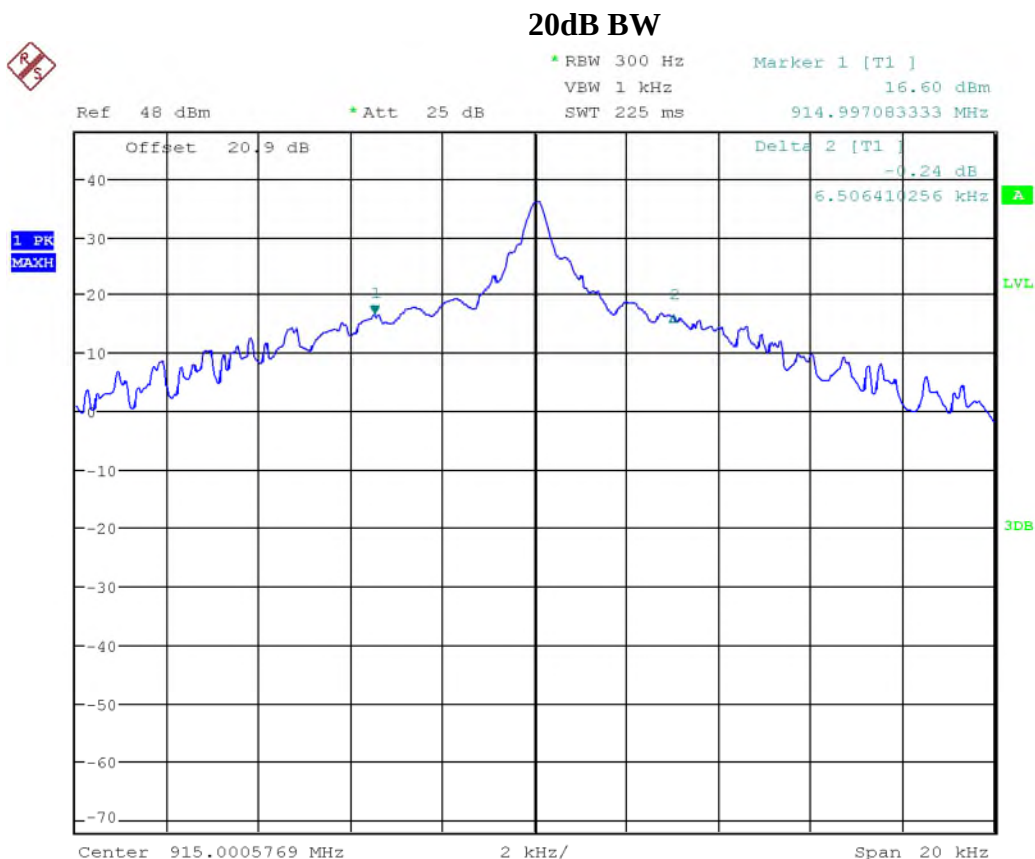

Date: 4.DEC.2020 15:18:47


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**ATA – 909.75 – 921.75 MHz Sub-Band  
High Channel  
99% BW**

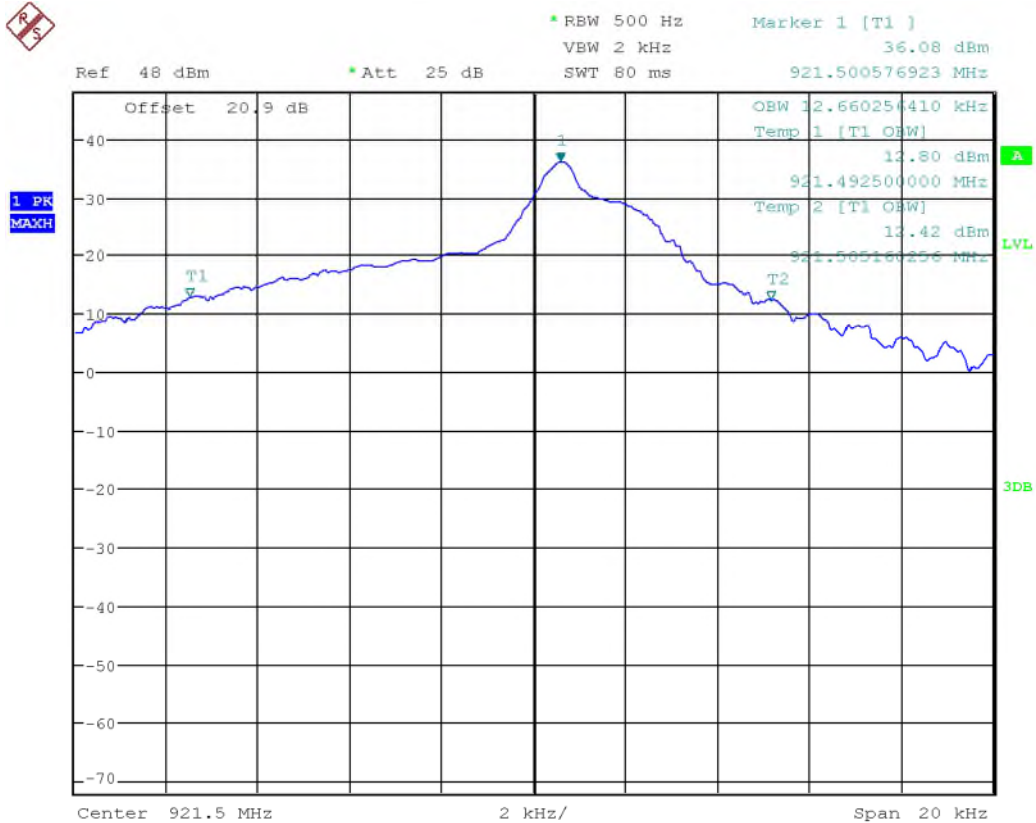

Date: 4.DEC.2020 16:04:50


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

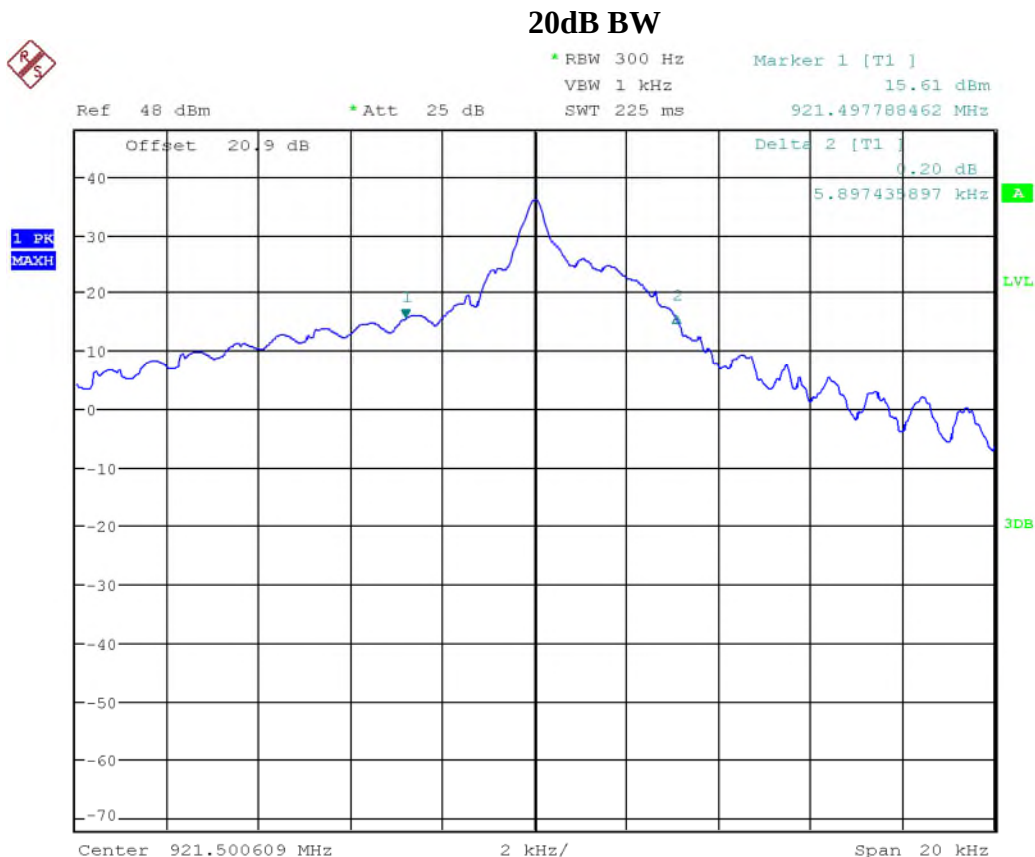

Date: 4.DEC.2020 14:44:47


|             |                                               |                                                                                               |
|-------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  | <br>Canada |
| Product     | MRFM-S Plus                                   |                                                                                               |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                               |

## KTDM 99% BW

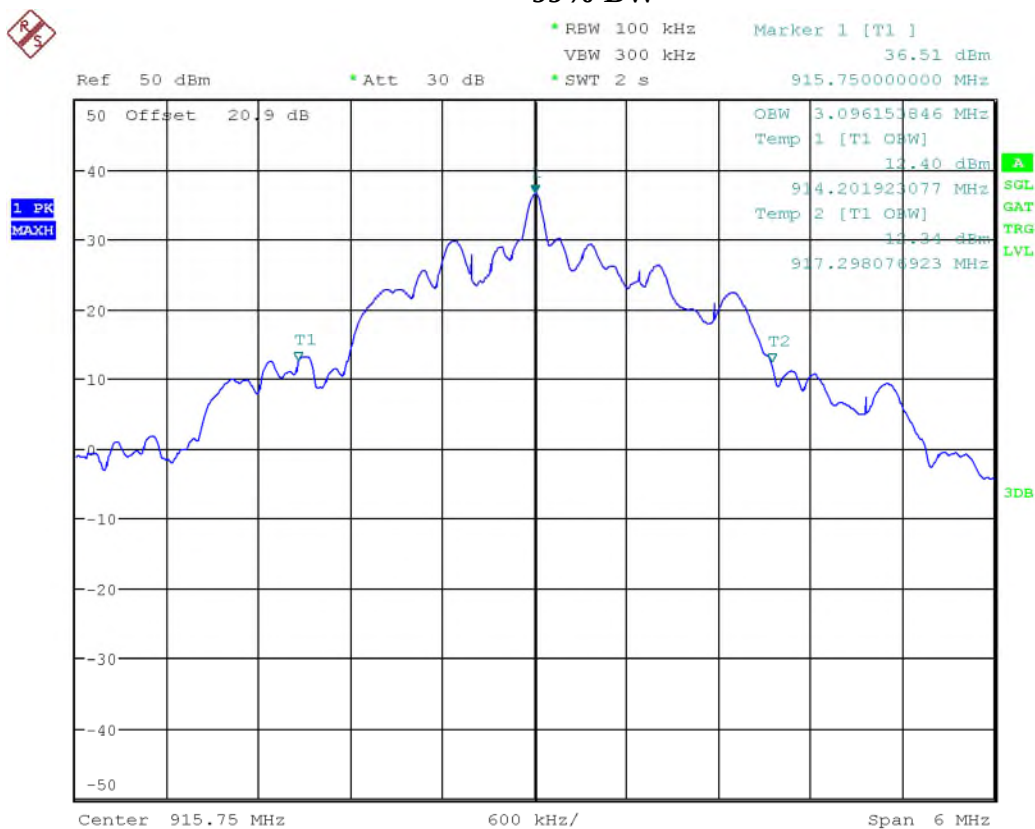

Date: 4.DEC.2020 09:59:54


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

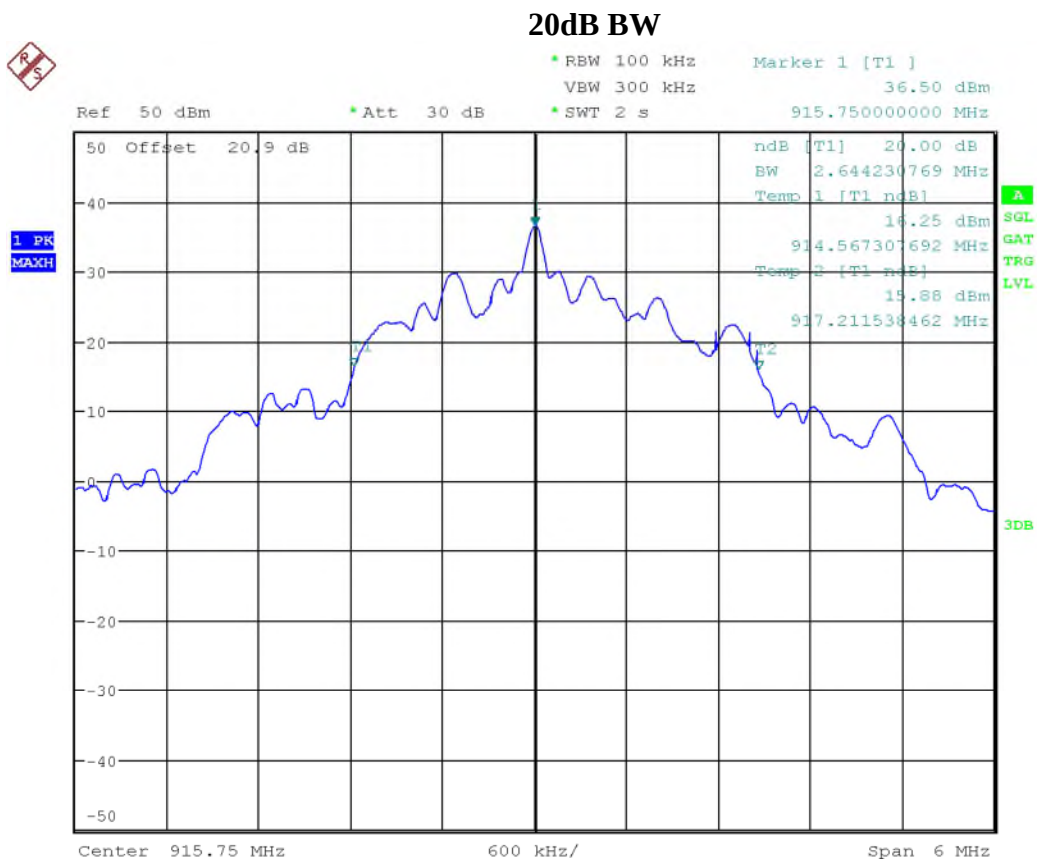

Date: 4.DEC.2020 10:03:05


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**SeGO – 909.75 – 921.75 MHz Sub-Band**  
**Low Channel**  
**99% BW**

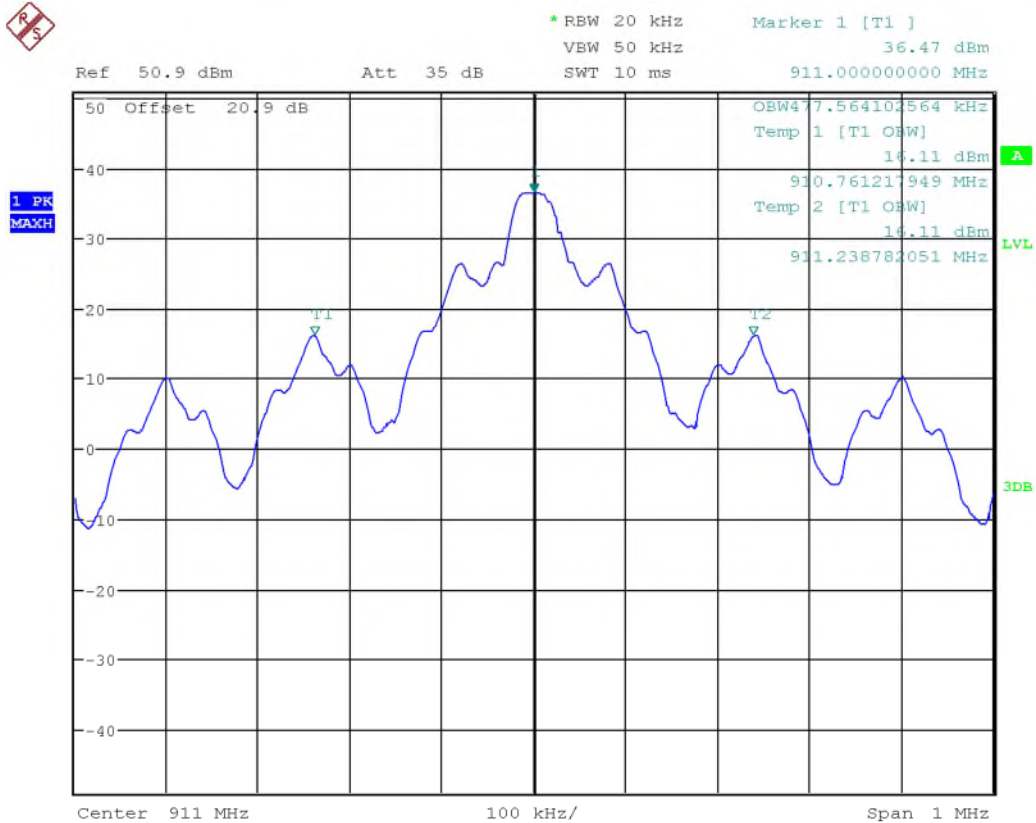

Date: 7.DEC.2020 12:20:48


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

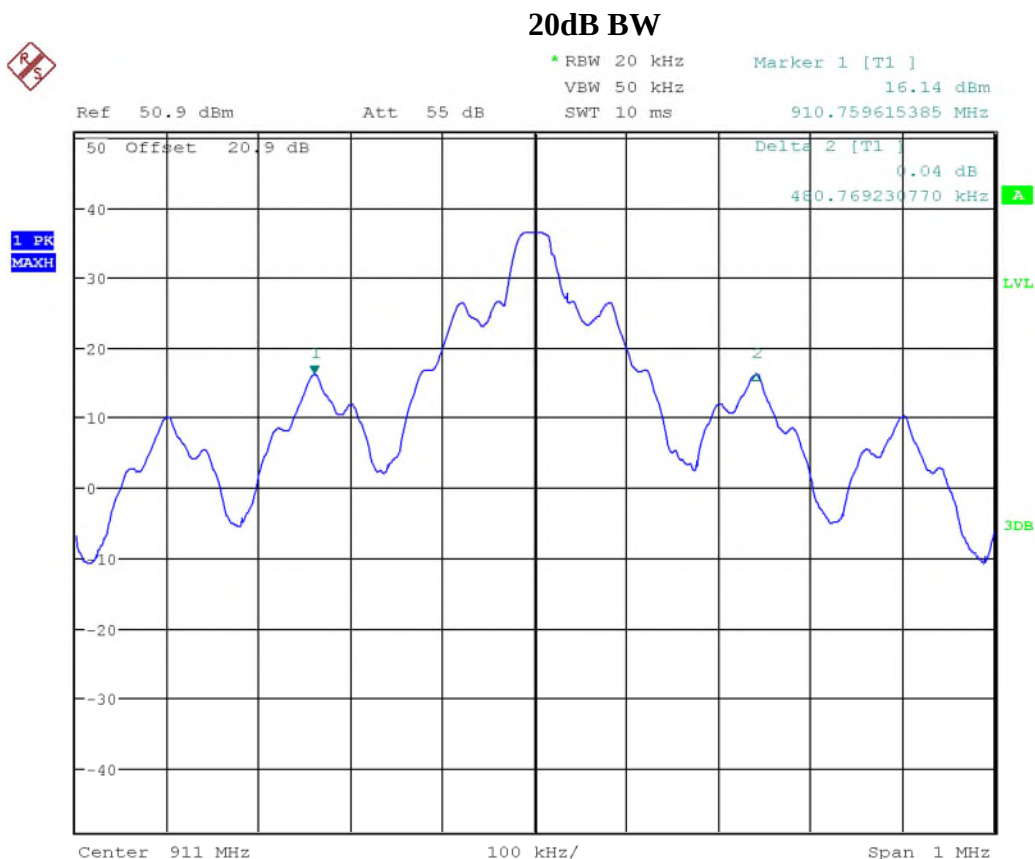

Date: 7.DEC.2020 12:18:42


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**SeGO – 909.75 – 921.75 MHz Sub-Band  
Mid Channel  
99% BW**

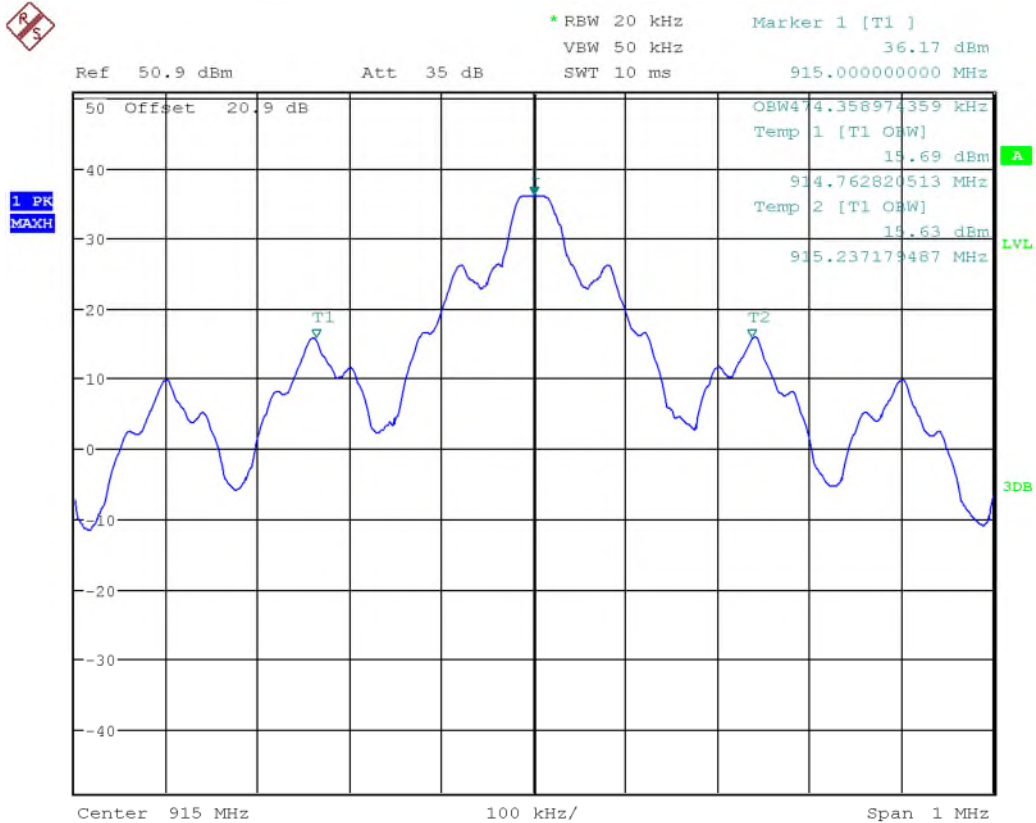

Date: 7.DEC.2020 12:10:46


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

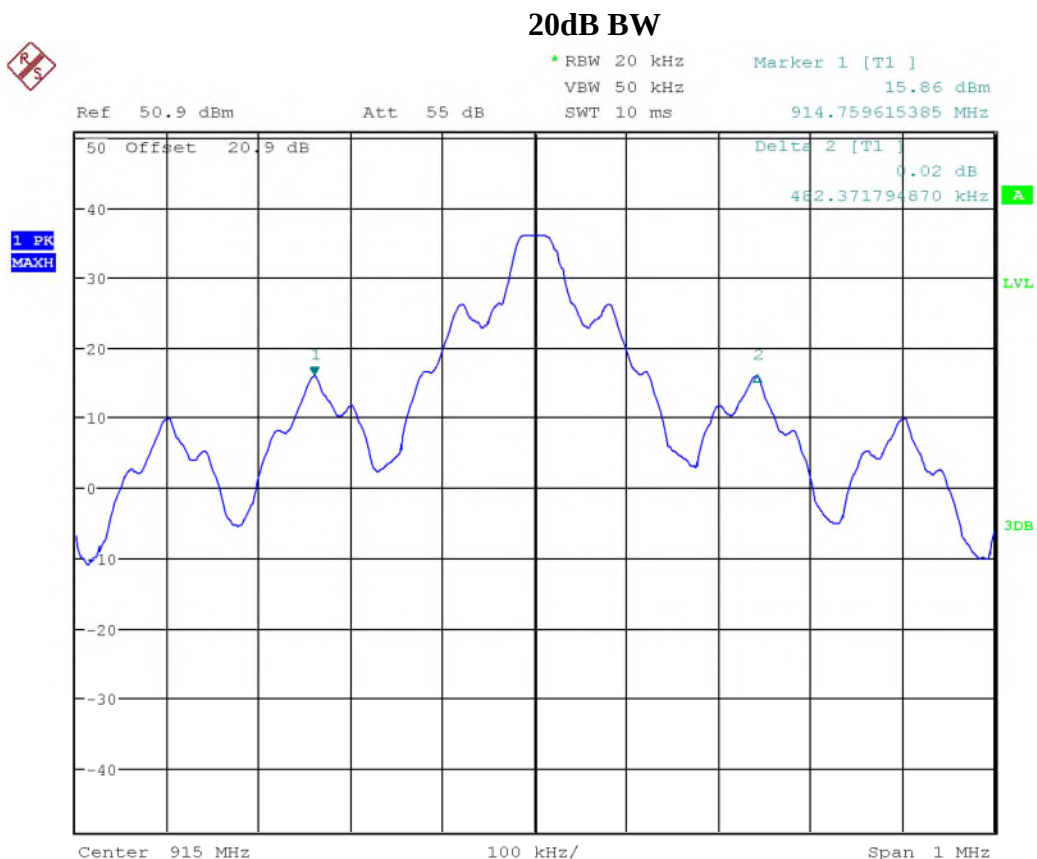

Date: 7.DEC.2020 12:16:54


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**SeGO – 909.75 – 921.75 MHz Sub-Band  
High Channel  
99% BW**

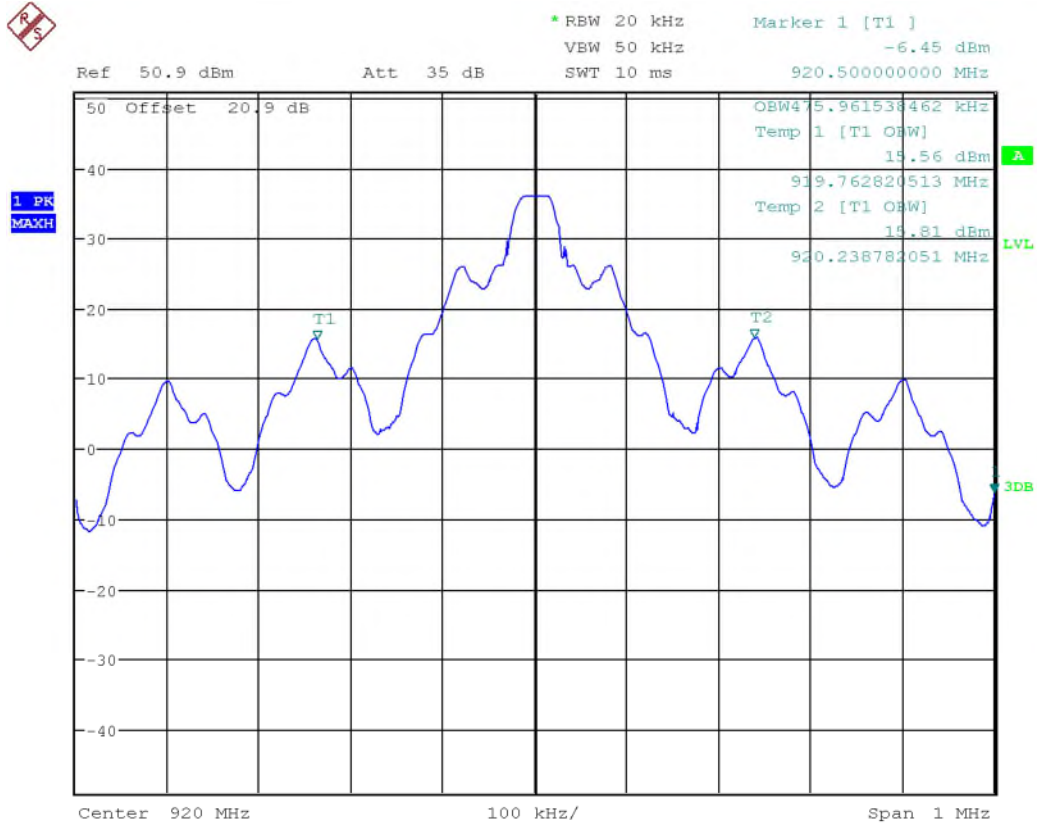

Date: 7.DEC.2020 11:54:24


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

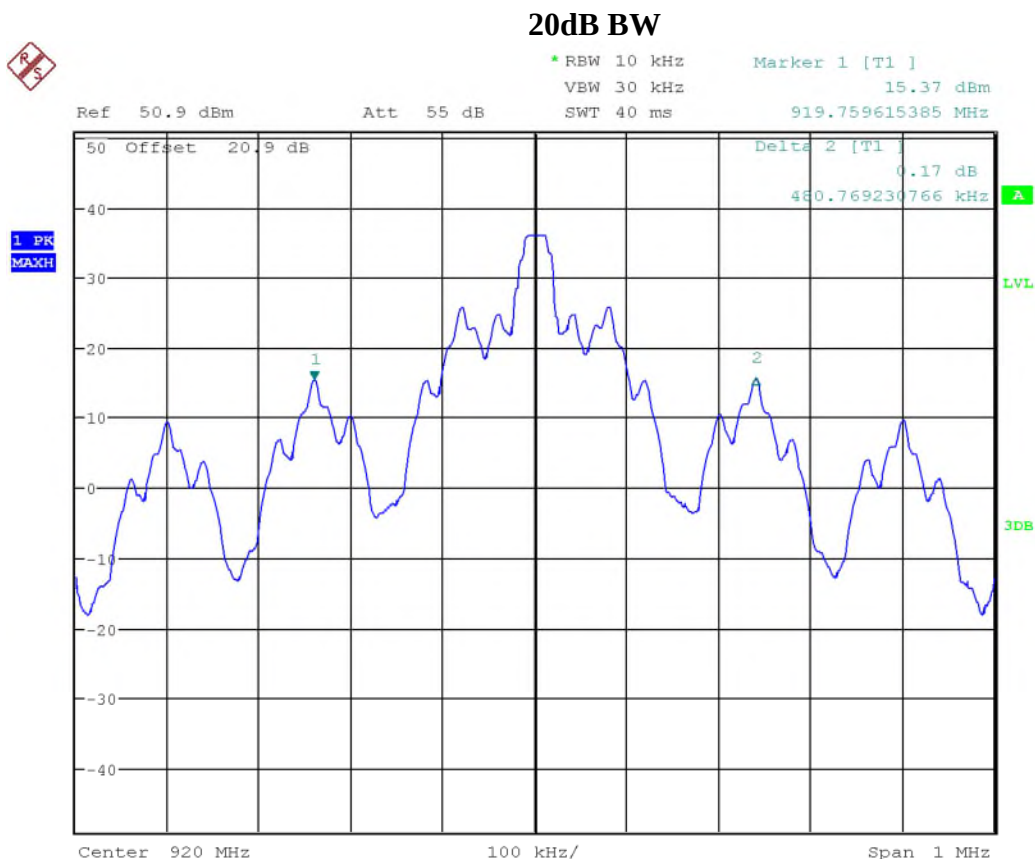

Date: 7.DEC.2020 12:04:29


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### 6B – 902 – 904 MHz Sub-Band 99% BW

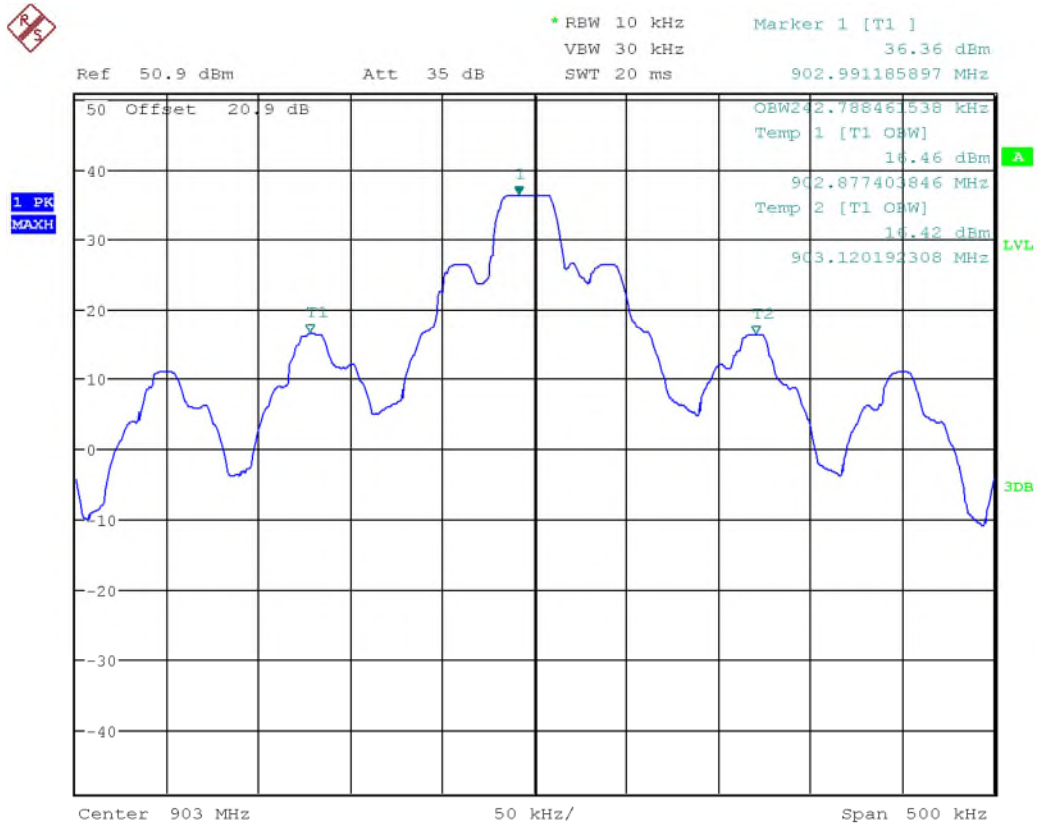

Date: 7.DEC.2020 10:54:22


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

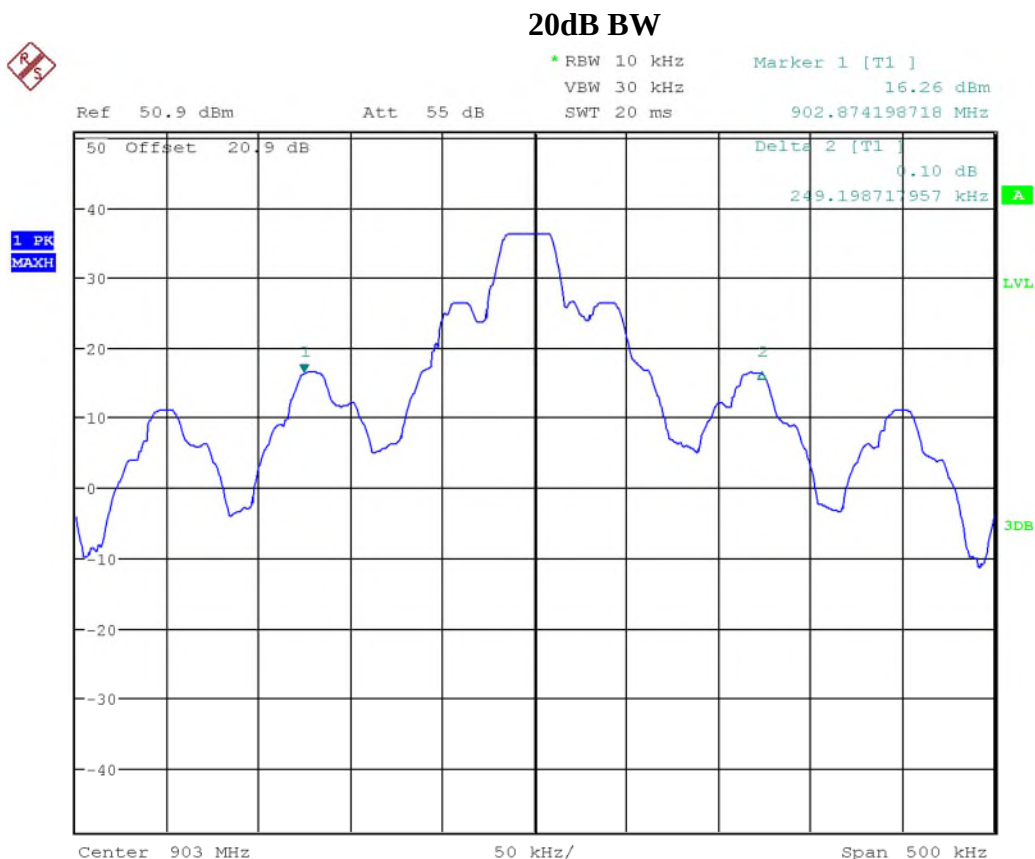

Date: 7.DEC.2020 10:52:14


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**6B – 909.75 – 921.75 MHz Sub-Band  
Low Channel  
99% BW**

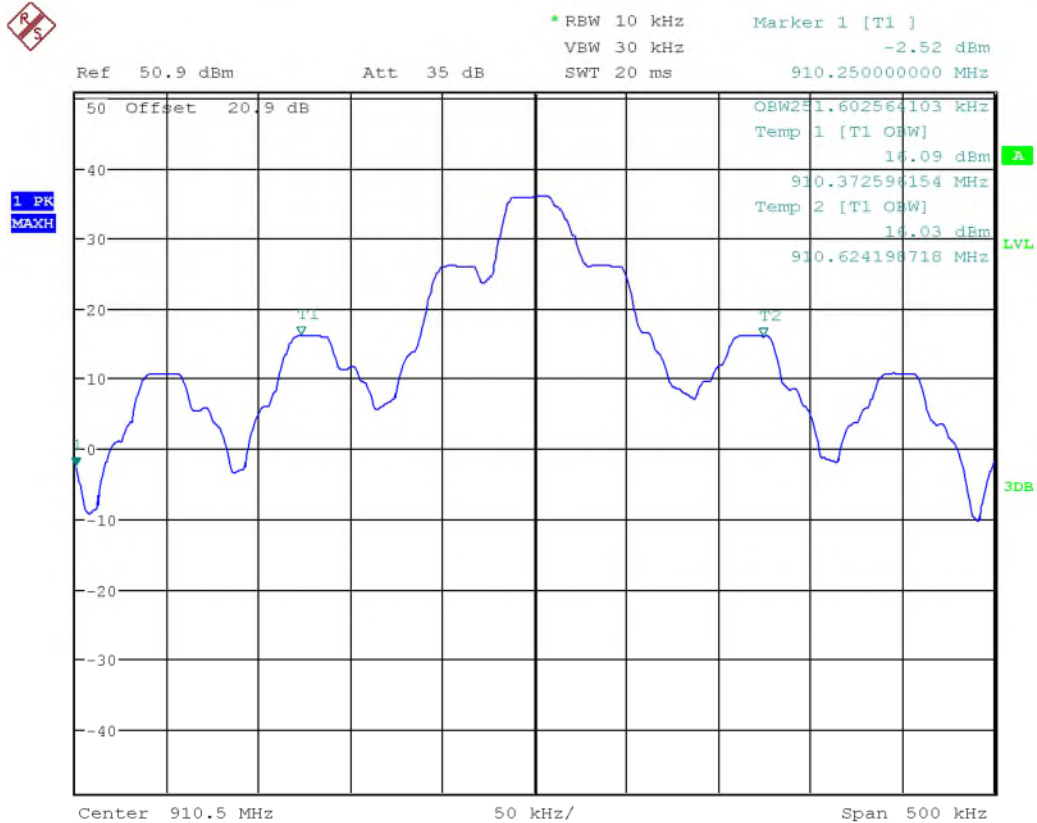

Date: 7.DEC.2020 11:07:38


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

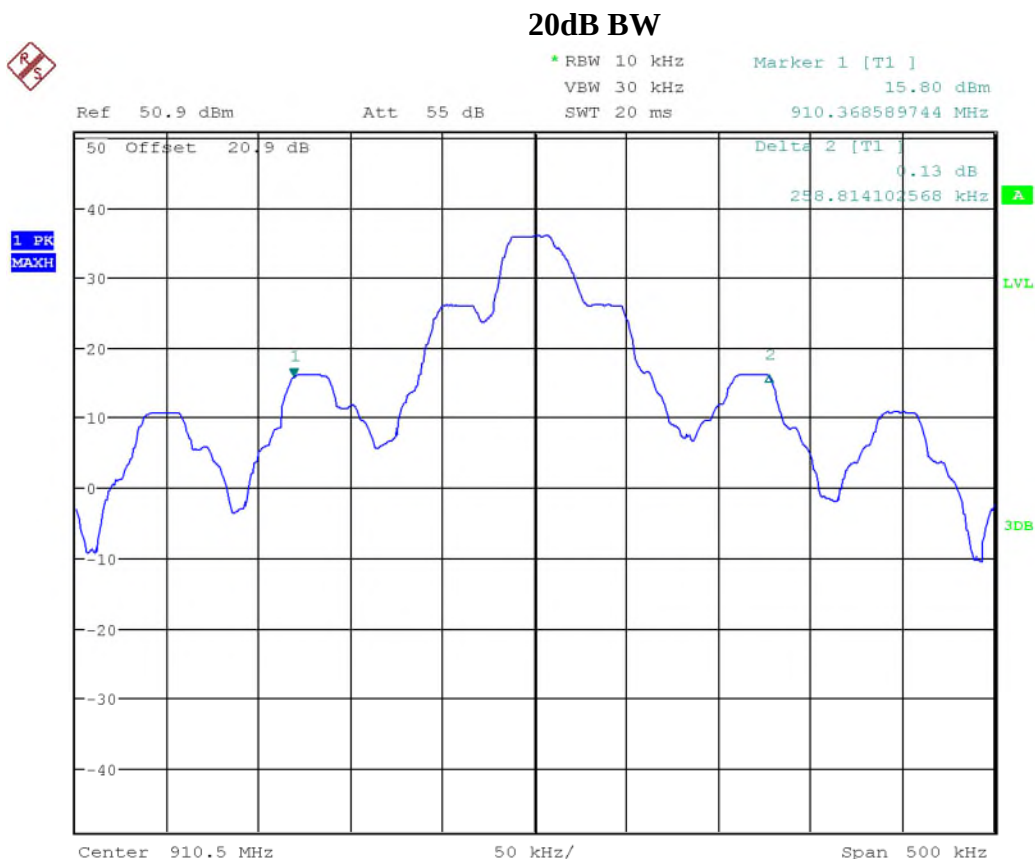

Date: 7.DEC.2020 11:09:30


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**6B – 909.75 – 921.75 MHz Sub-Band  
Mid Channel  
99% BW**

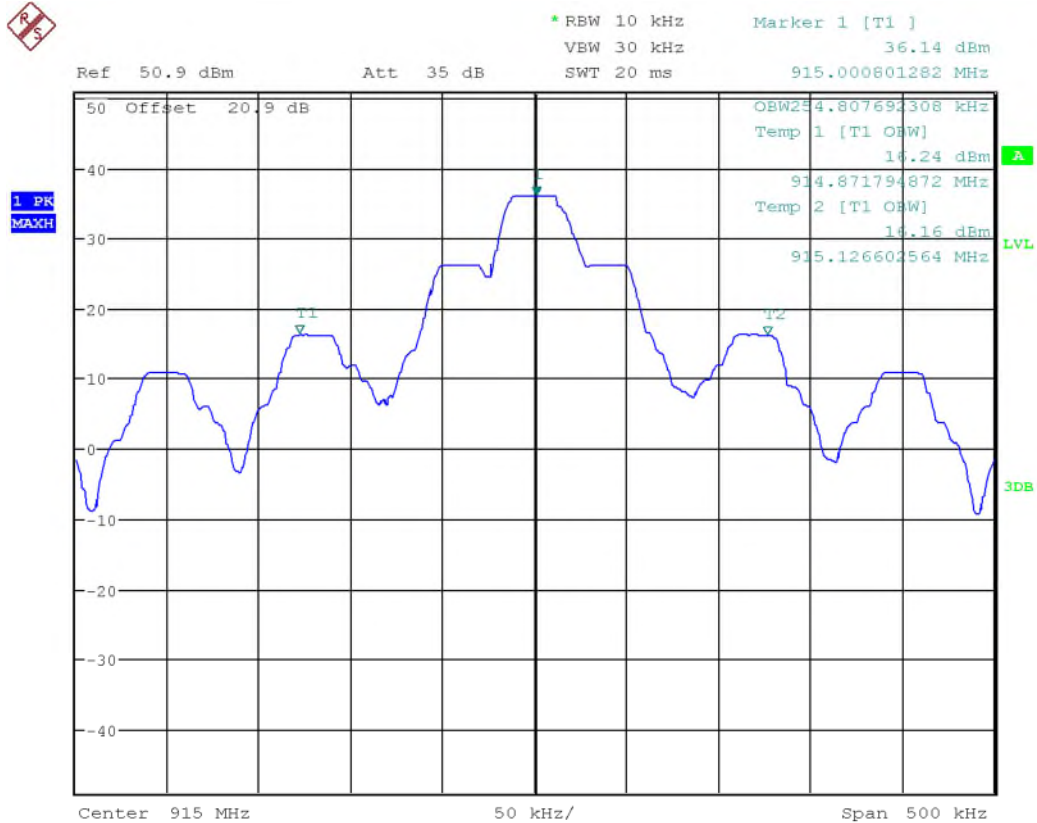

Date: 7.DEC.2020 11:20:19


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

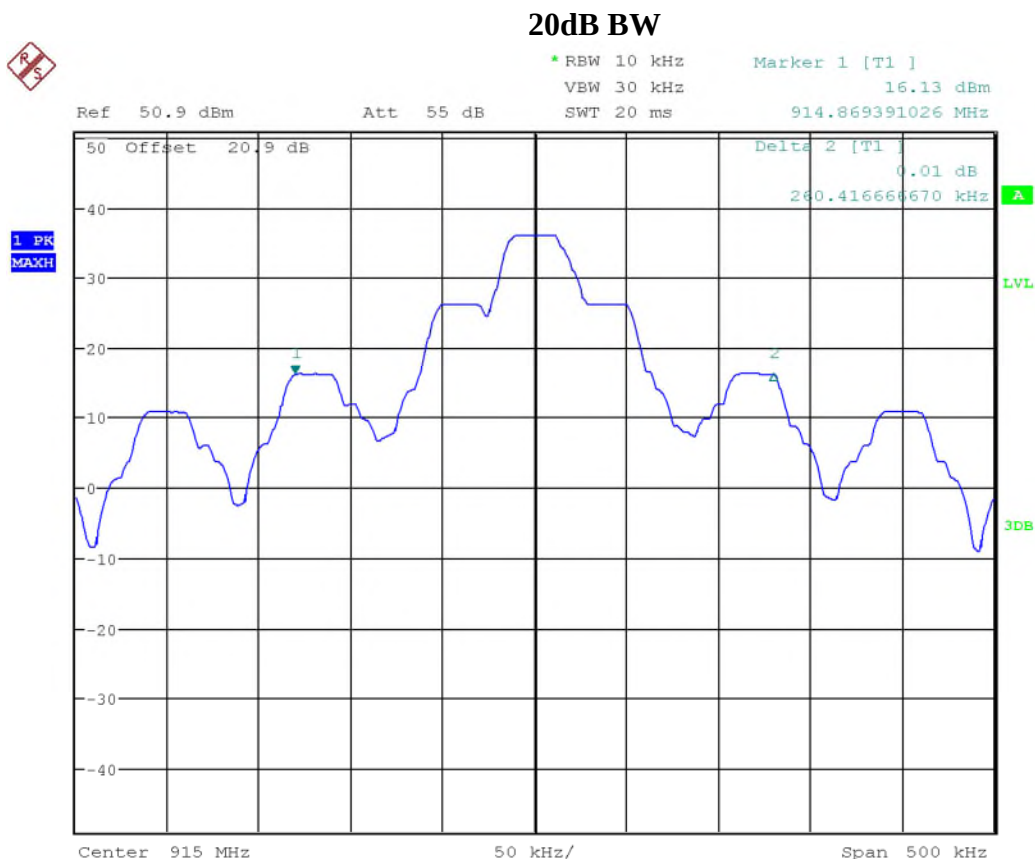

Date: 7.DEC.2020 11:27:41


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**6B – 909.75 – 921.75 MHz Sub-Band  
High Channel  
99% BW**

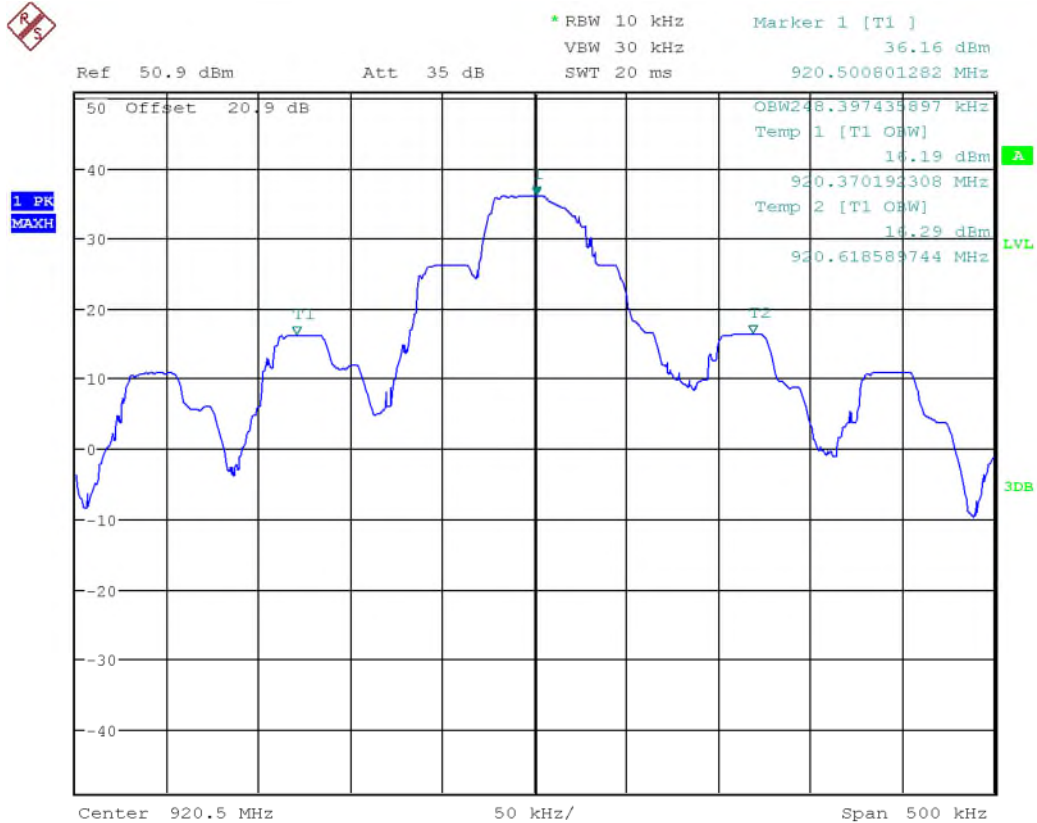

Date: 7.DEC.2020 11:44:22


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

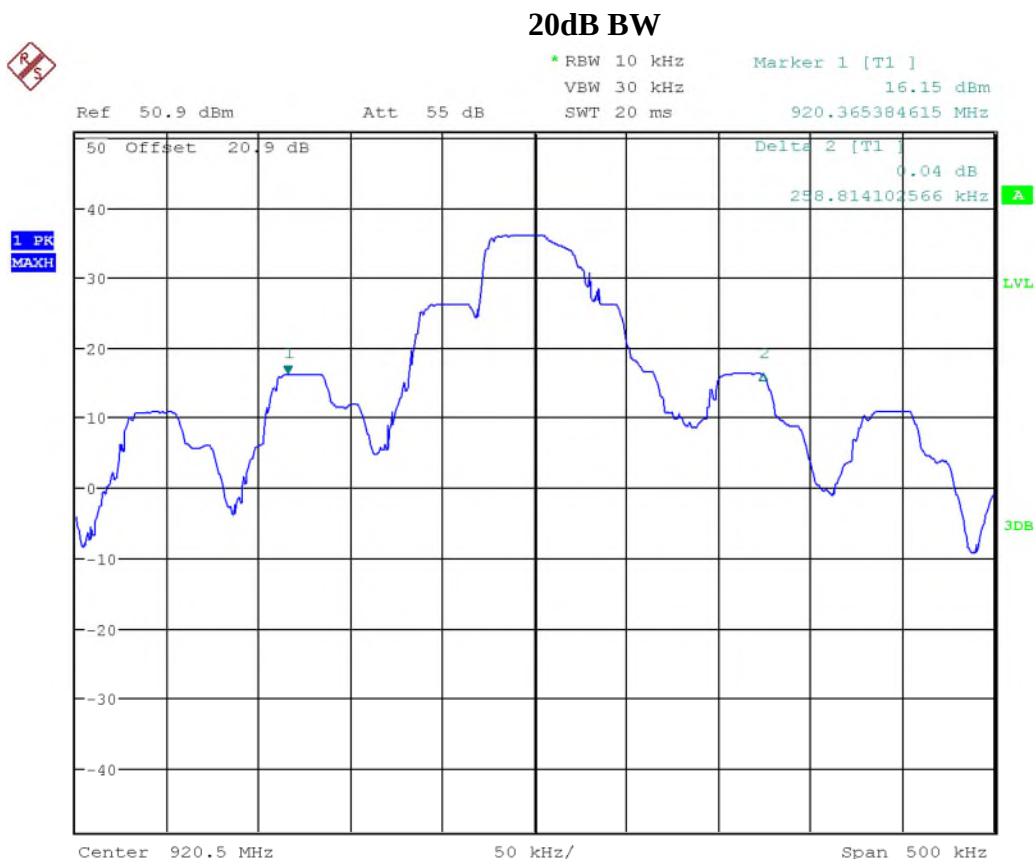

Date: 7.DEC.2020 11:46:52




|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

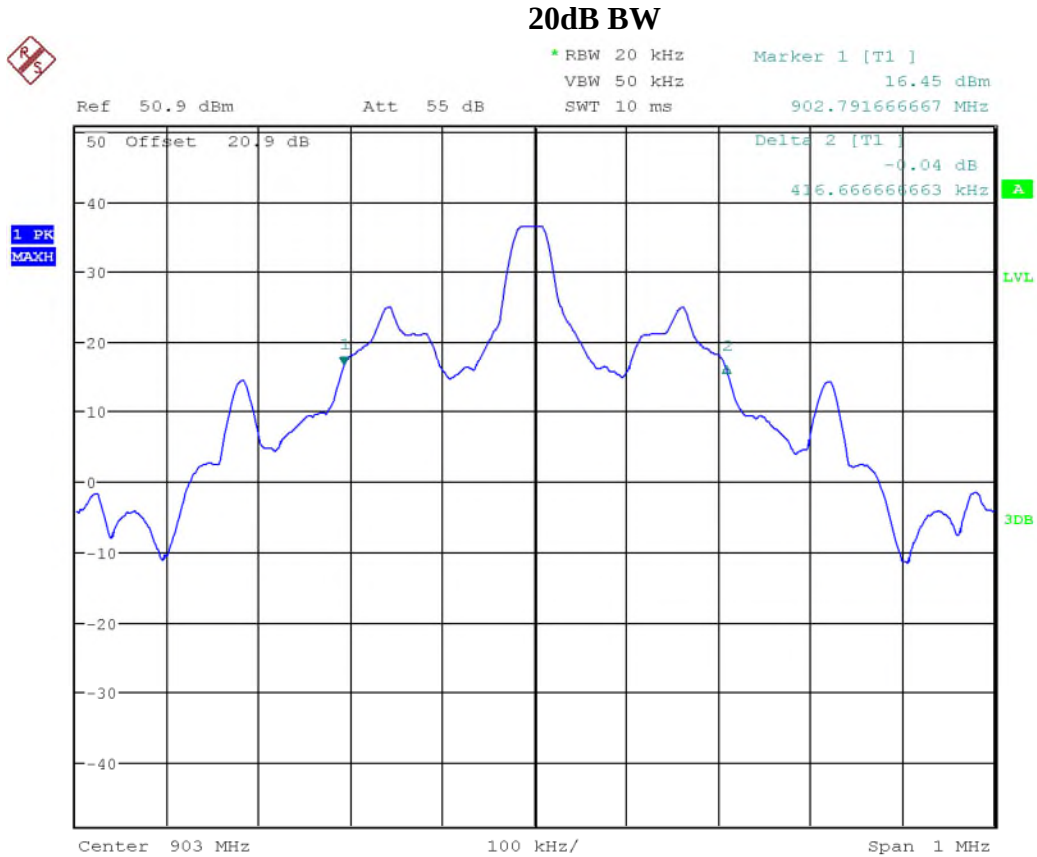

Date: 7.DEC.2020 10:01:04


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**6C – 909.75 – 921.75 MHz Sub-Band  
Low Channel  
99% BW**

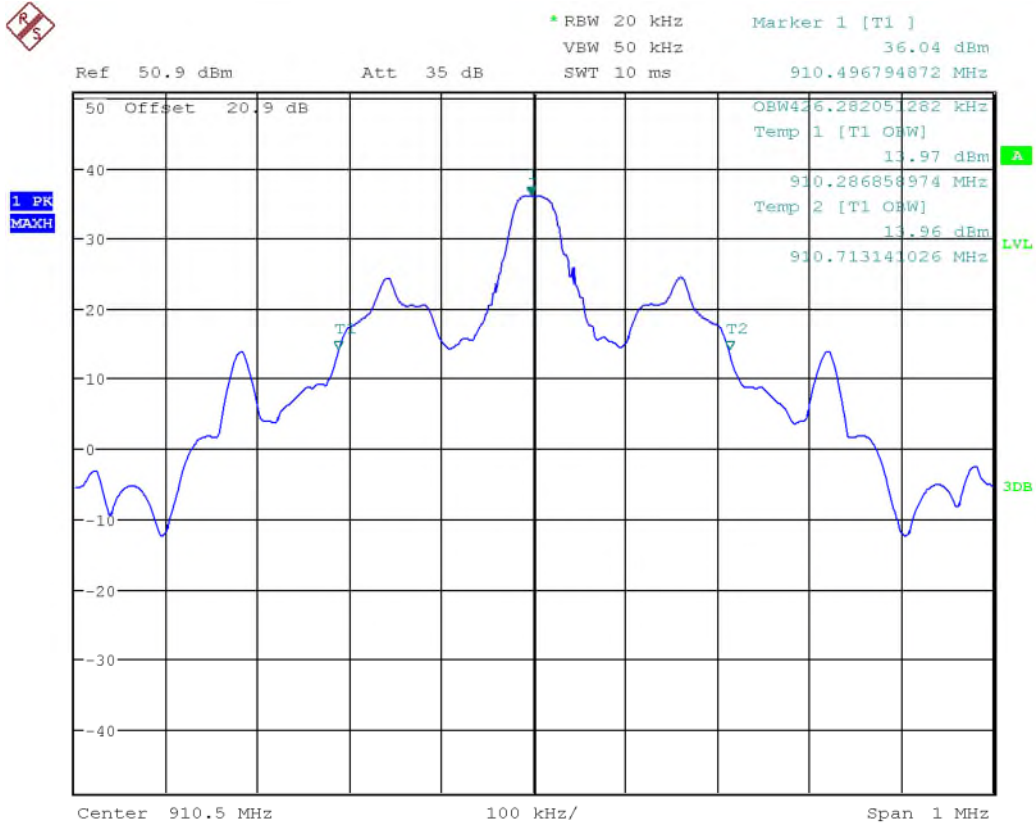

Date: 7.DEC.2020 10:20:06


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

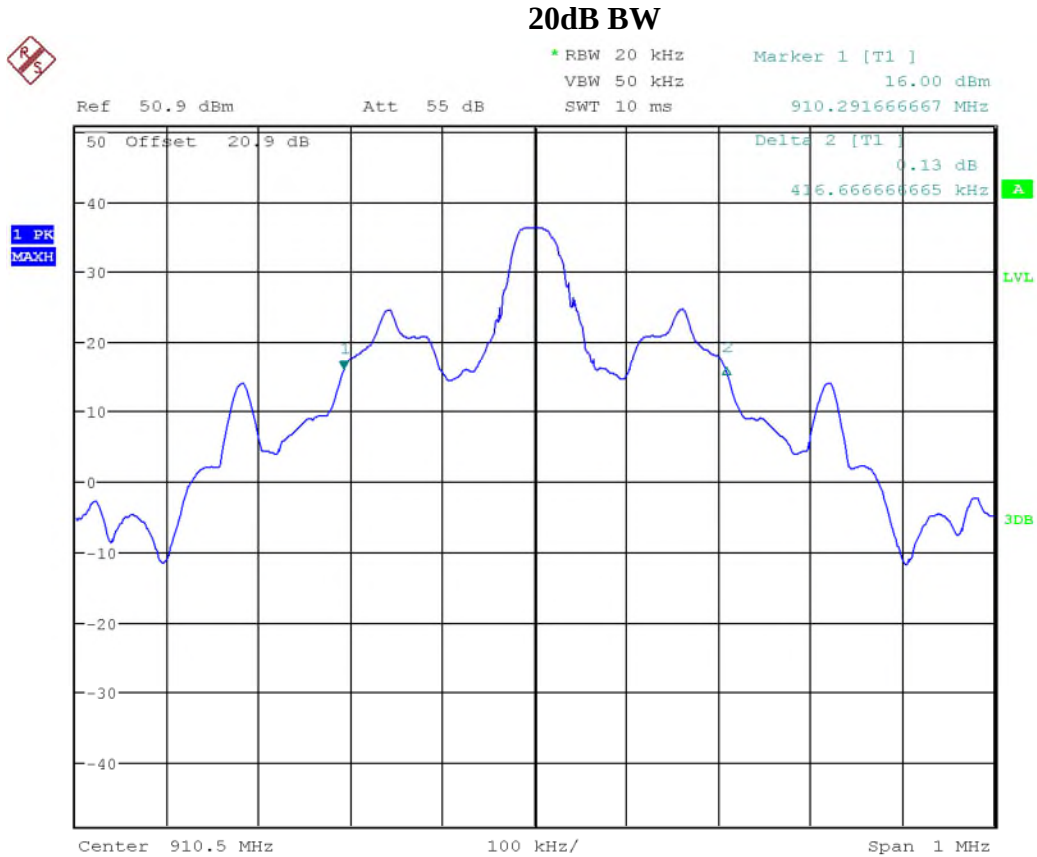

Date: 7.DEC.2020 10:21:58


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**6C – 909.75 – 921.75 MHz Sub-Band  
Mid Channel  
99% BW**

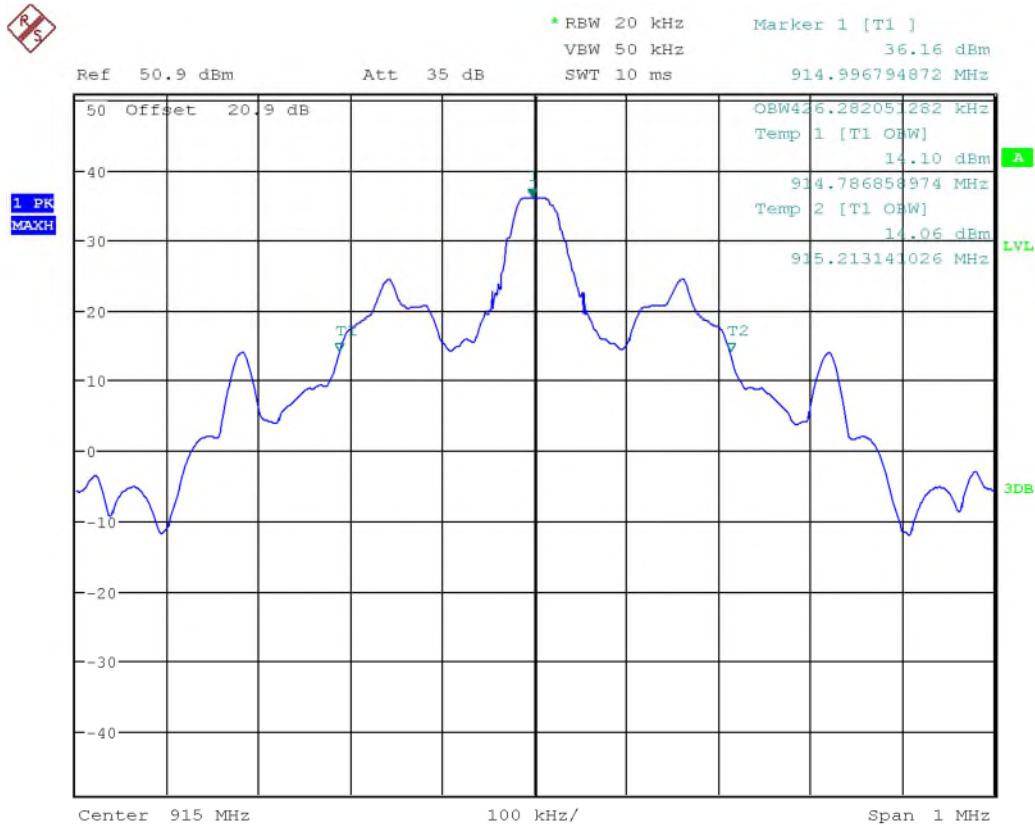

Date: 7.DEC.2020 10:31:36


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

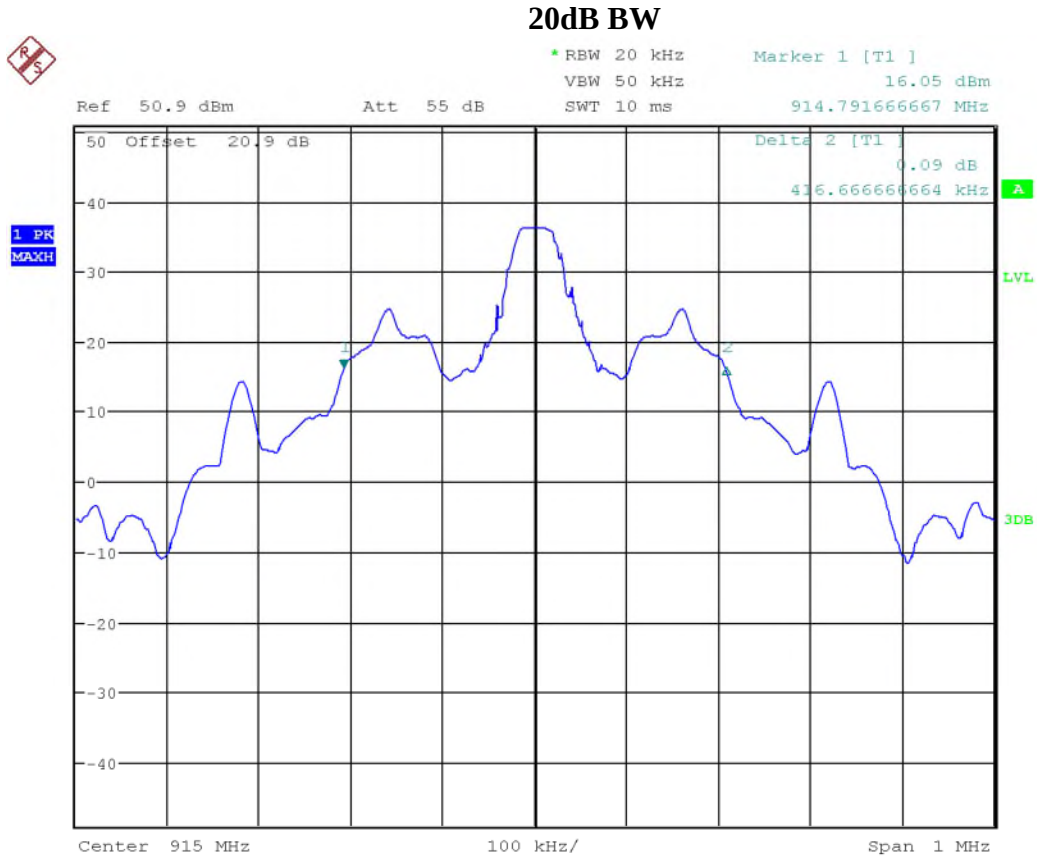

Date: 7.DEC.2020 10:34:29


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

**6C – 909.75 – 921.75 MHz Sub-Band  
High Channel  
99% BW**

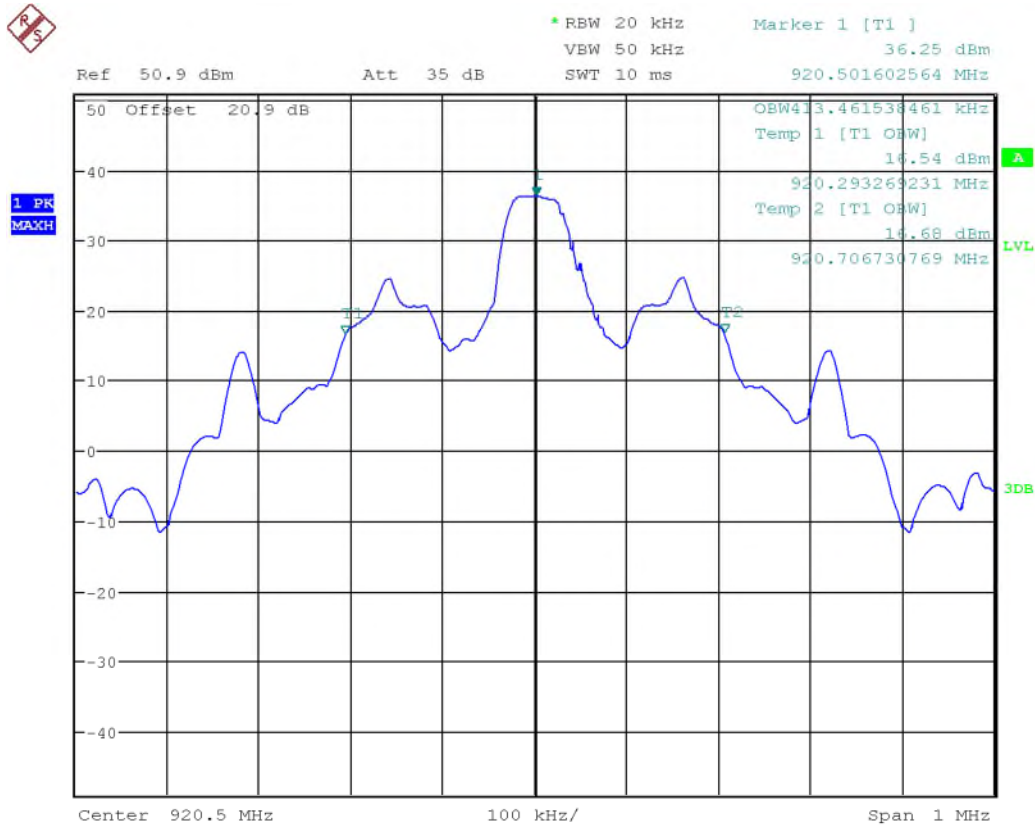

Date: 7.DEC.2020 10:39:18

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

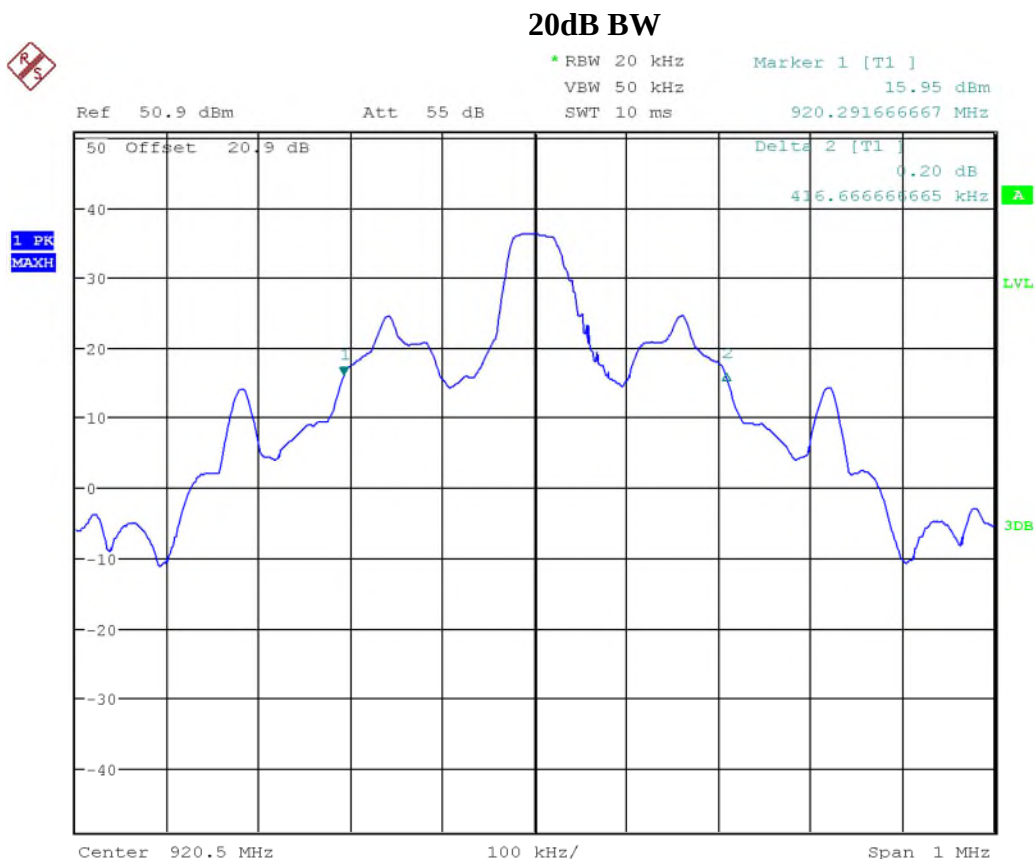

Date: 7.DEC.2020 10:41:10

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Test Equipment List

| Equipment              | Model No.  | Manufacturer    | Last Calibration /Verification Date | Next Calibration /Verification Date | Asset #  |
|------------------------|------------|-----------------|-------------------------------------|-------------------------------------|----------|
| Signal Analyzer        | FSQ 26     | Rohde & Schwarz | Oct. 25, 2019                       | Oct. 25, 2021                       | GEMC 234 |
| 20dB Attenuator (100W) | 6N100W-20F | Inmet           | Dec 3, 2020                         | Dec 3, 2021                         | GEMC 352 |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## **Emission Mask**

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

### **Limits**

The Limit is as specified in FCC Part 90.210 (K) and RSS-137 Clause 6.5.3

Emission Mask K—(1) Wideband multilateration transmitters. For transmitters authorized under subpart M to provide forward or reverse links in a multilateration system in the subbands 904-909.75 MHz, 921.75-927.25 MHz and 919.75-921.75 MHz, and which transmit an emission occupying more than 50 kHz bandwidth: in any 100 kHz band, the center frequency of which is removed from the center of authorized sub-band(s) by more than 50 percent of the authorized bandwidth, the power of emissions shall be attenuated below the transmitter output power, as specified by the following equation, but in no case less than 31 dB:

$$A = 16 + 0.4(D - 50) + 10 \log B \text{ (attenuation greater than 66 dB is not required)}$$

Where:

- A = attenuation (in decibels) below the maximum permitted output power level
- D = displacement of the center frequency of the measurement bandwidth from the center frequency of the authorized sub-band, expressed as a percentage of the authorized bandwidth B
- B = authorized bandwidth in megahertz.

(2) Narrowband forward link transmitters. For LMS multilateration narrowband forward link transmitters operating in the 927.25-928 MHz frequency band the power of any emission shall be attenuated below the transmitter output power (P) in accordance with following schedule:

On any frequency outside the authorized sub-band and removed from the edge of the authorized sub-band by a displacement frequency ( $f_d$  in kHz): at least  $116 \log ((f_d + 10)/6.1)$  dB or  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

(3) Other transmitters. For all other transmitters authorized under subpart M that operate in the 902-928 MHz band, the peak power of any emission shall be attenuated below the power of the highest emission contained within the licensee's sub-band in accordance with the following schedule:

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

- (i) On any frequency within the authorized bandwidth: Zero dB.
  - (ii) On any frequency outside the licensee's sub-band edges:  $55 + 10 \log(P)$  dB, where (P) is the highest emission (watts) of the transmitter inside the licensee's sub-band.
- (4) In the 902-928 MHz band, the resolution bandwidth of the instrumentation used to measure the emission power shall be 100 kHz, except that, in regard to paragraph (2) of this section, a minimum spectrum analyzer resolution bandwidth of 300 Hz shall be used for measurement center frequencies with 1 MHz of the edge of the authorized subband. The video filter bandwidth shall not be less than the resolution bandwidth.
- (5) Emission power shall be measured in peak values.
- (6) The LMS sub-band edges for non-multilateration systems for which emissions must be attenuated are 902.00, 904.00, 909.5 and 921.75 MHz.

Note: The EUT is a non- multilateration LMS transmitter. Emission limit (3) applies to the EUT. A  $55 + 10 \log(P)$  dB attenuation (or -25 dBm absolute emission level) was applied all frequency from the outside authorized band.

Test procedure is as per ANSI C63.26 Clause 5.7.

## Results

The EUT passed; it meets attenuation requirement at the antenna port.

The worst case is presented as a graph for the spectrum. Band edge requirements were shown for the lower band edge at 902 and 909.5 MHz in the low band where applicable. Band edge requirements were also shown for the higher band edge at 904 and 921.75 MHz in the high band where applicable.

Note: All measurements were made with an attenuator as appropriate to the measurement. The insertion loss were adjusted with Reference Level Offset function in the spectrum analyzer.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

| ATA – 902 – 904 MHz Sub-Band       |                 |                 |             |             |         |
|------------------------------------|-----------------|-----------------|-------------|-------------|---------|
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Low Channel                        | 902             | -35.40          | -25.0       | -10.4       | Pass    |
| High Channel                       | 904             | -35.23          | -25.0       | -10.2       | Pass    |
| ATA – 909.75 – 921.75 MHz Sub-Band |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Low Channel                        | 909.75          | -34.86          | -25.0       | -9.9        | Pass    |
| High Channel                       | 921.75          | -25.33          | -25.0       | -0.3        | Pass    |
| KTDM                               |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Channel                            | 909.75          | -31.37          | -25.0       | -6.4        | Pass    |
| Channel                            | 921.75          | -29.07          | -25.0       | -4.1        | Pass    |
| SeGO                               |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Low Channel                        | 909.75          | -28.48          | -25.0       | -3.5        | Pass    |
| High Channel                       | 921.75          | -29.17          | -25.0       | -4.2        | Pass    |
| 6B – 902 – 904 MHz Sub-Band        |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Channel                            | 902             | -28.67          | -25.0       | -3.7        | Pass    |
| Channel                            | 904             | -27.97          | -25.0       | -3.0        | Pass    |
| 6B - 909.75 to 921.75 MHz Sub-Band |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Low Channel                        | 909.75          | -28.60          | -25.0       | -3.6        | Pass    |
| High Channel                       | 921.75          | -28.61          | -25.0       | -3.6        | Pass    |
| 6C – 902 – 904 MHz Sub-Band        |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge       | Limit       | Margin      | Verdict |
| Channel                            | 902             | -26.41          | -25.0       | -1.4        | Pass    |
| Channel                            | 904             | -26.15          | -25.0       | -1.2        | Pass    |
| 6C – 909.75 to 921.75 MHz Sub-Band |                 |                 |             |             |         |
| Channel                            | Frequency (MHz) | Band Edge (dBm) | Limit (dBm) | Margin (dB) | Verdict |
| Low Channel                        | 909.75          | -27.44          | -25.0       | -2.4        | Pass    |
| High Channel                       | 921.75          | -27.15          | -25.0       | -2.2        | Pass    |


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Graph(s)


The graphs shown below shows the integrated band power or peak power of the device during the out-of-band emission measurement. For integrated band power, the center frequency of the spectrum analyzer is center at one-half of the measurement bandwidth away from the band edge and integration is performed over the full required measurement bandwidth.

## ATA Protocol

### Band Edge 902 MHz – 904 MHz Sub-Band Low Channel/Edge

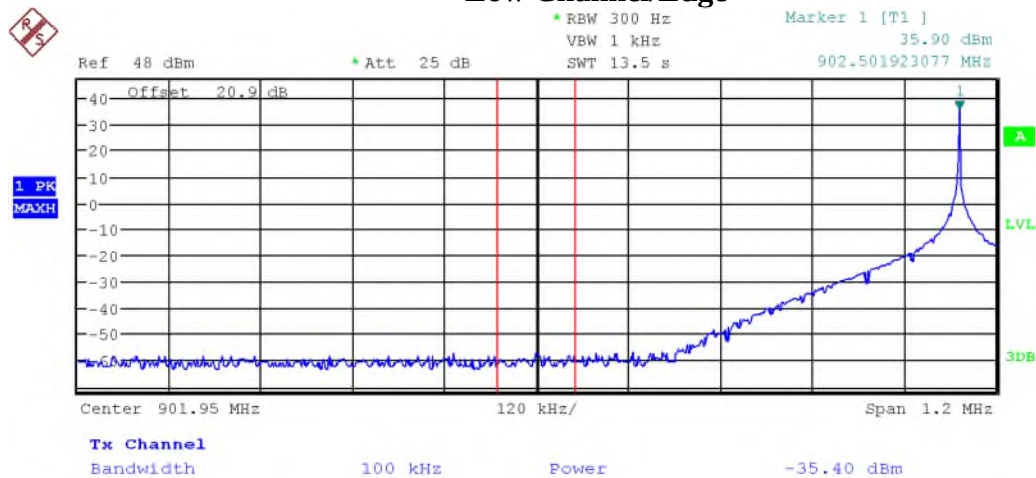


### High Channel/Edge

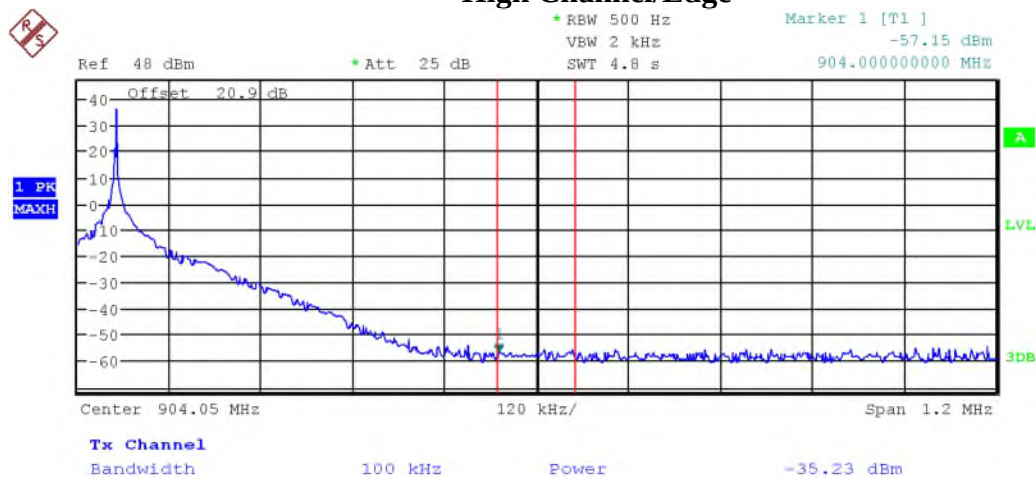


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Band Edge 909.75 MHz – 921.75 MHz Sub-Band Low Channel/Edge

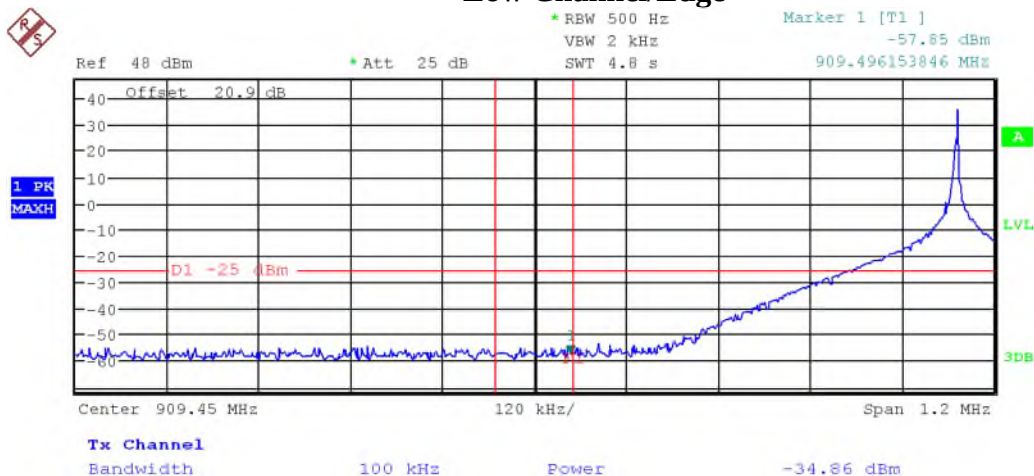


### High Channel/Edge

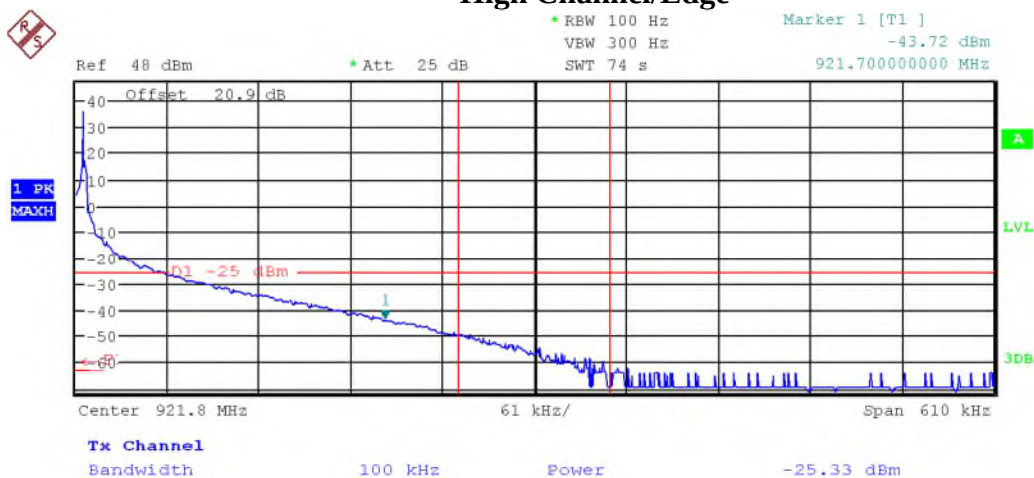

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


## Spurious emissions 30 MHz – 1.5 GHz

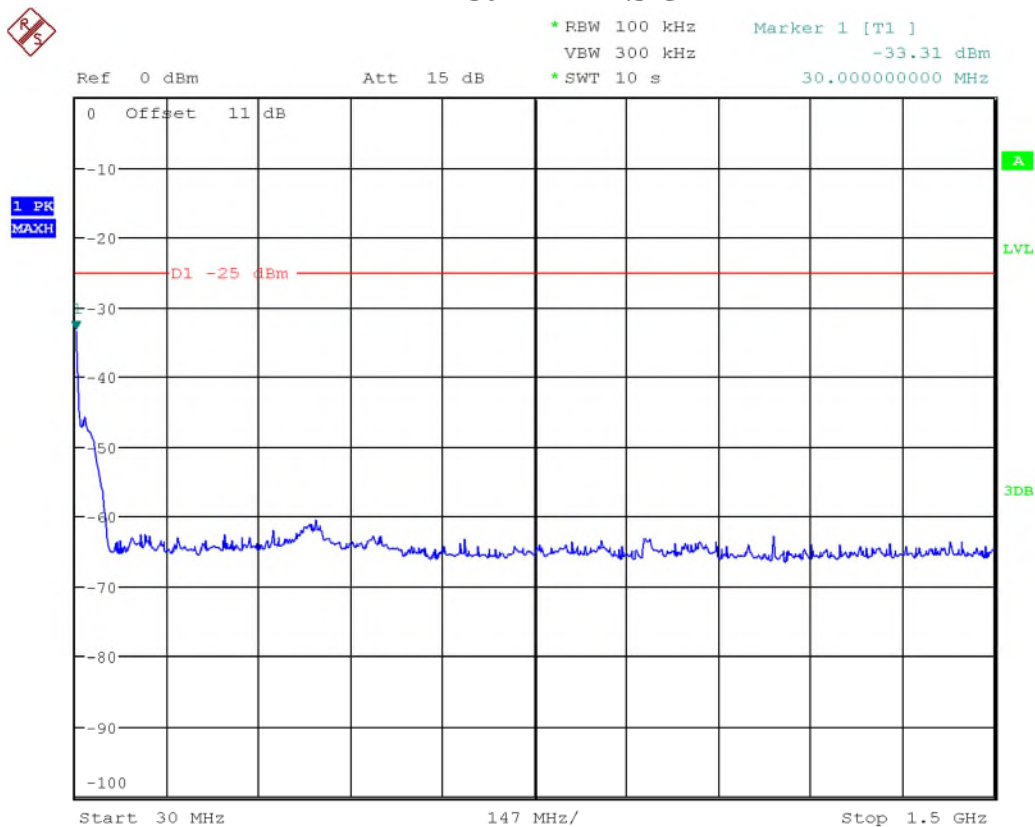

Date: 8.DEC.2020 10:49:11

No emissions were detected below 30 MHz.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

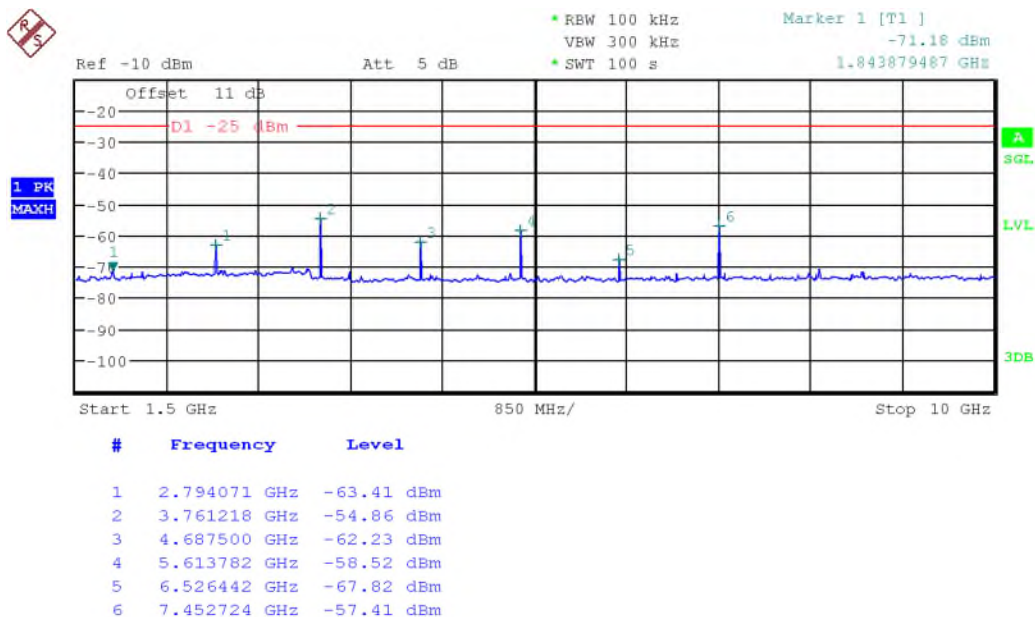


Date: 8.DEC.2020 10:44:03

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## KTDM Protocol


### Band Edge 909.75 MHz – 921.75 MHz Sub-Band

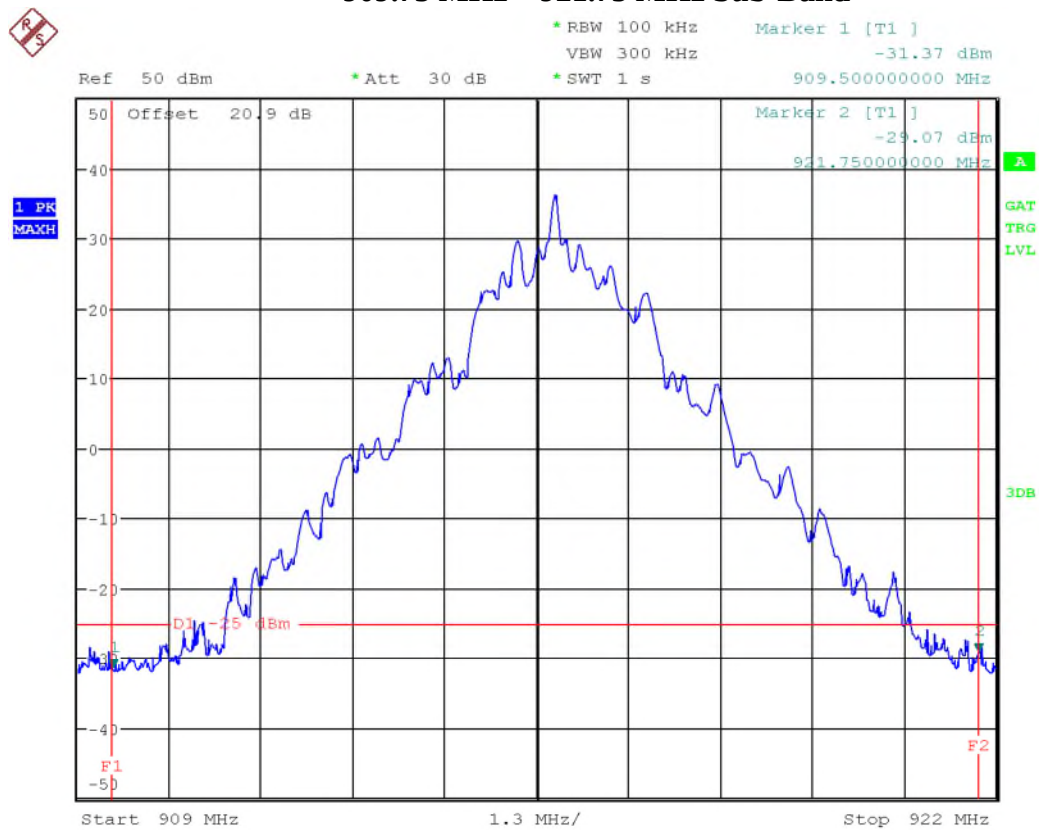

Date: 4.DEC.2020 09:48:09

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Spurious emissions 30 MHz – 1.5 GHz

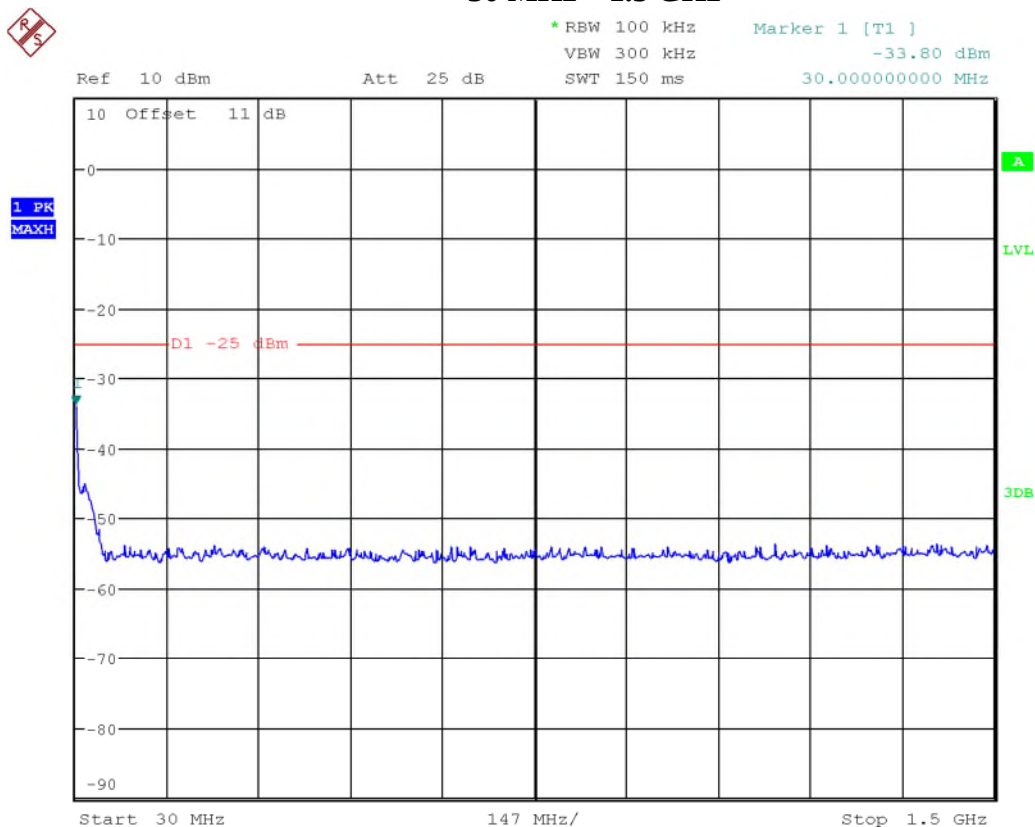


Date: 8.DEC.2020 10:20:56

No emissions were detected below 30 MHz.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## 1.5 GHz – 10 GHz

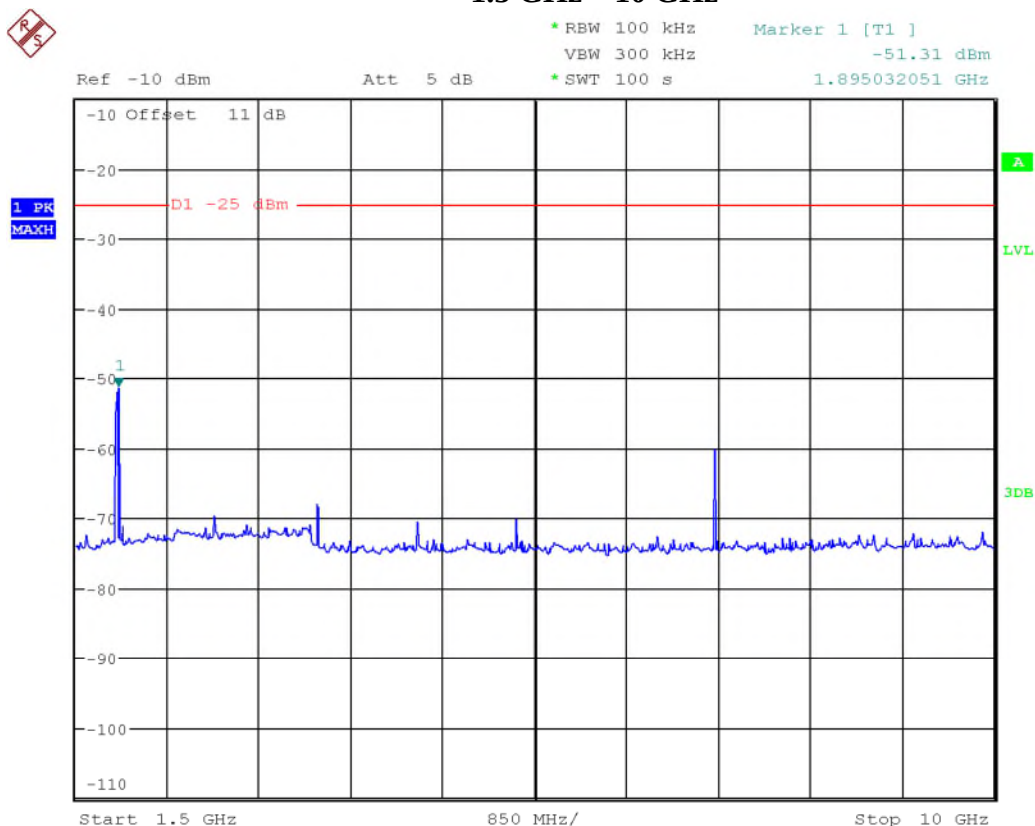


Date: 8.DEC.2020 10:31:01


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## SeGO Protocol

### Band Edge 909.75 MHz – 921.75 MHz Sub-Band Low Channel/Edge

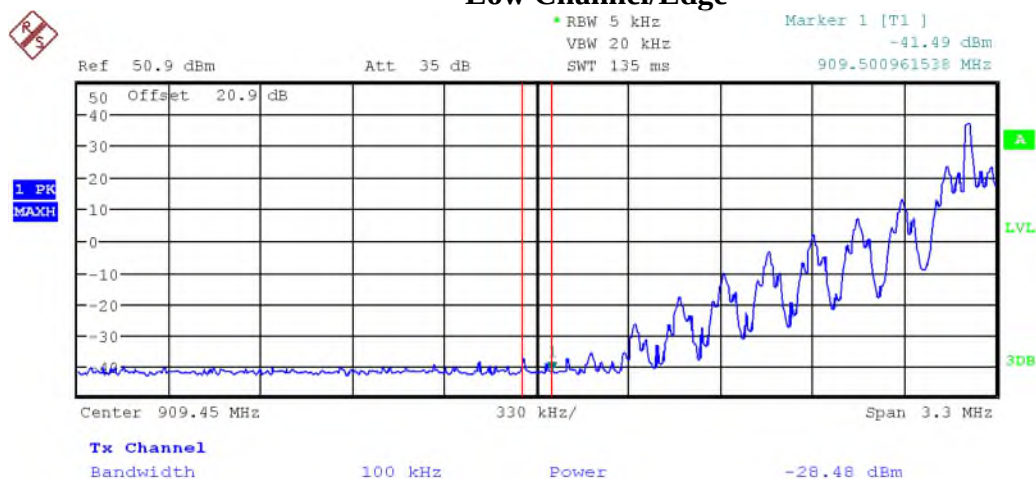


### High Channel/Edge

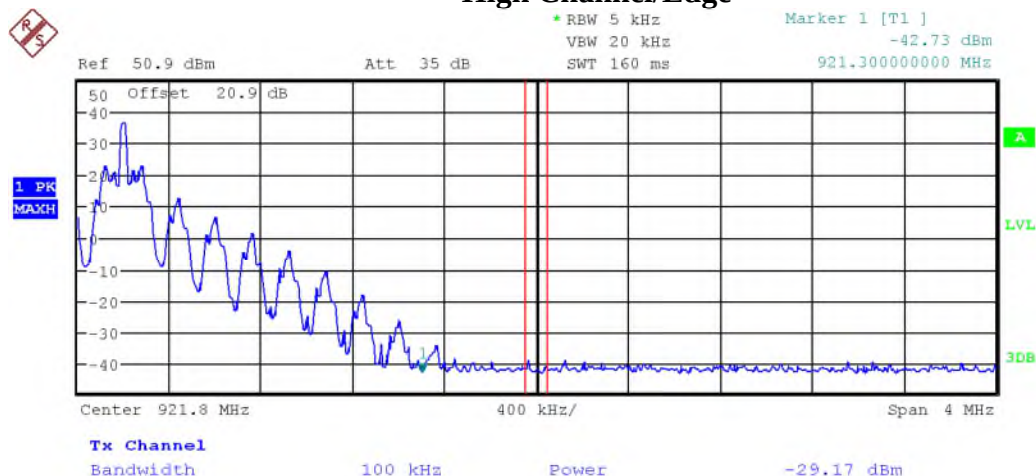

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Spurious emissions 30 MHz – 1.5 GHz

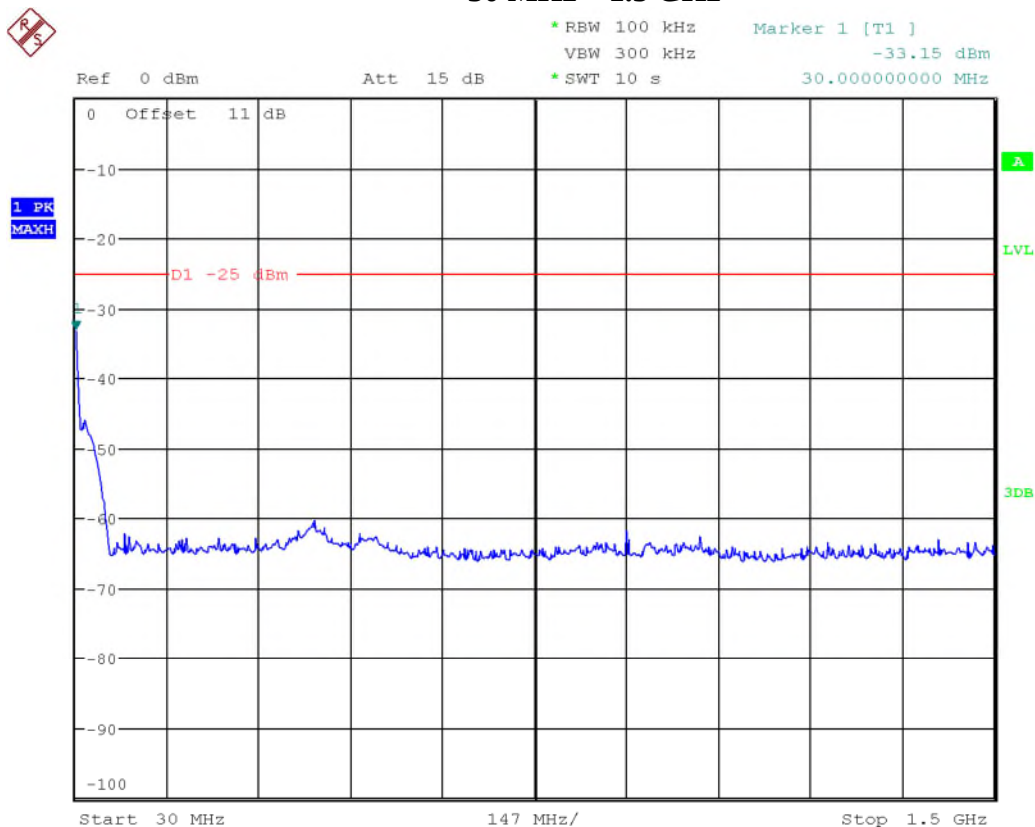


Date: 8.DEC.2020 10:52:41

No emissions were detected below 30 MHz.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## 1.5 GHz – 10 GHz

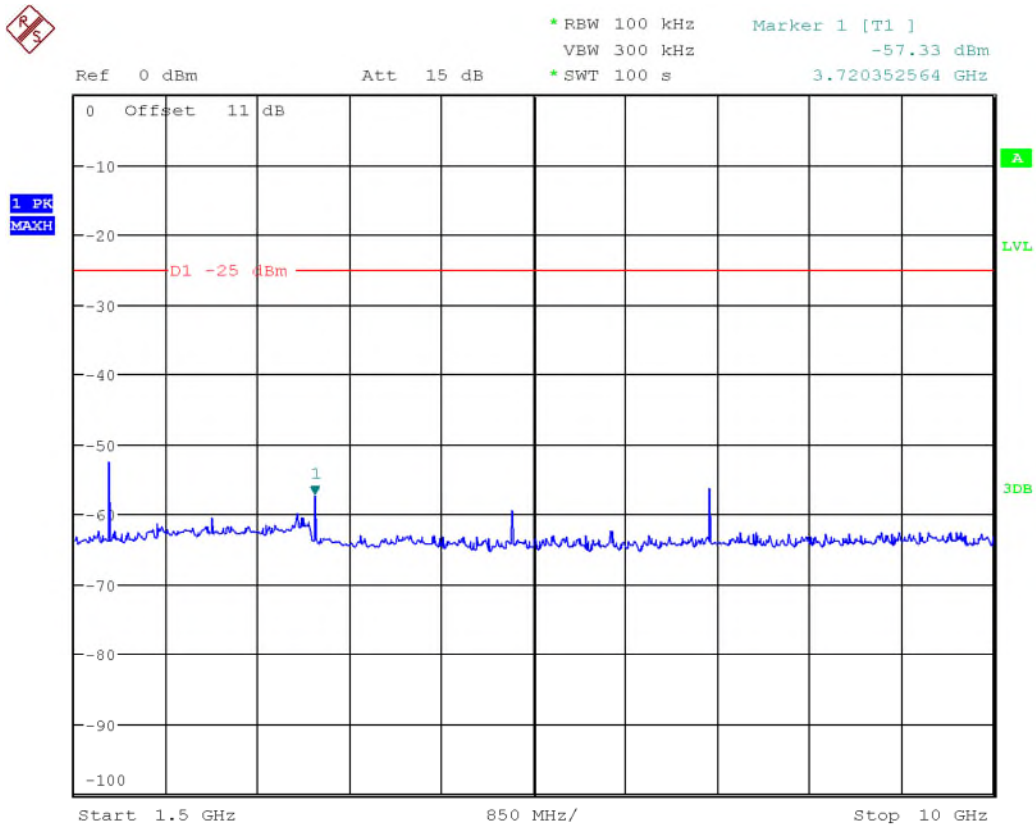


Date: 8.DEC.2020 11:11:58


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## 6B Protocol

### Band Edge 902 MHz – 904 MHz Sub-Band Low Channel/Edge

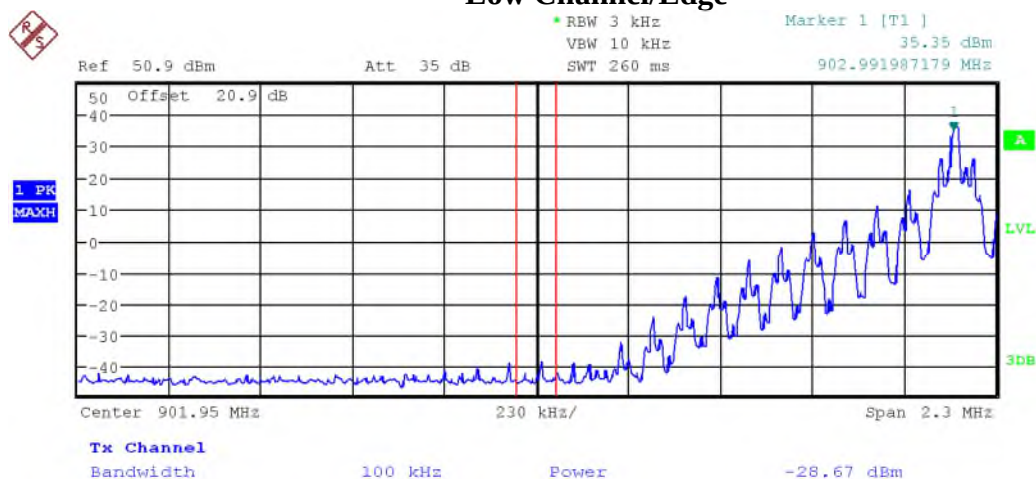


### High Channel/Edge

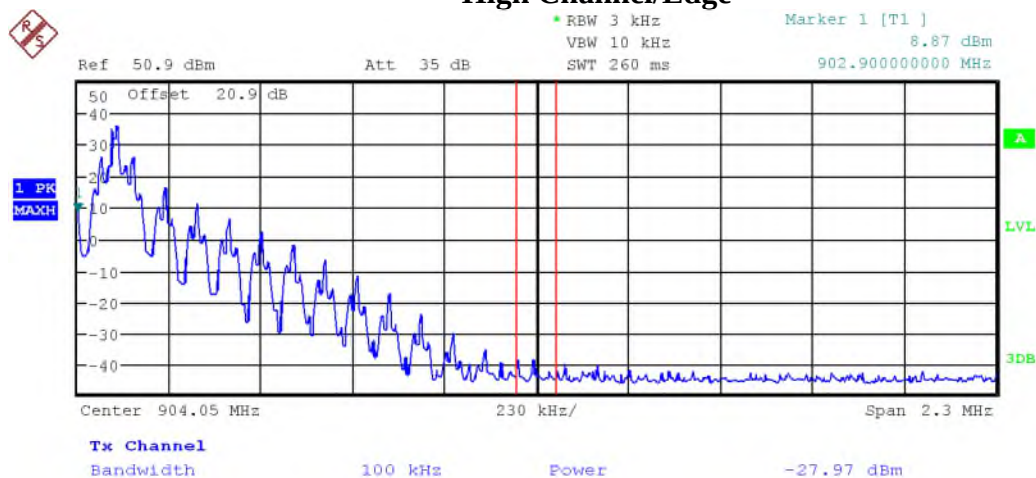


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Band Edge 909.75 MHz – 921.75 MHz Sub-Band Low Channel/Edge

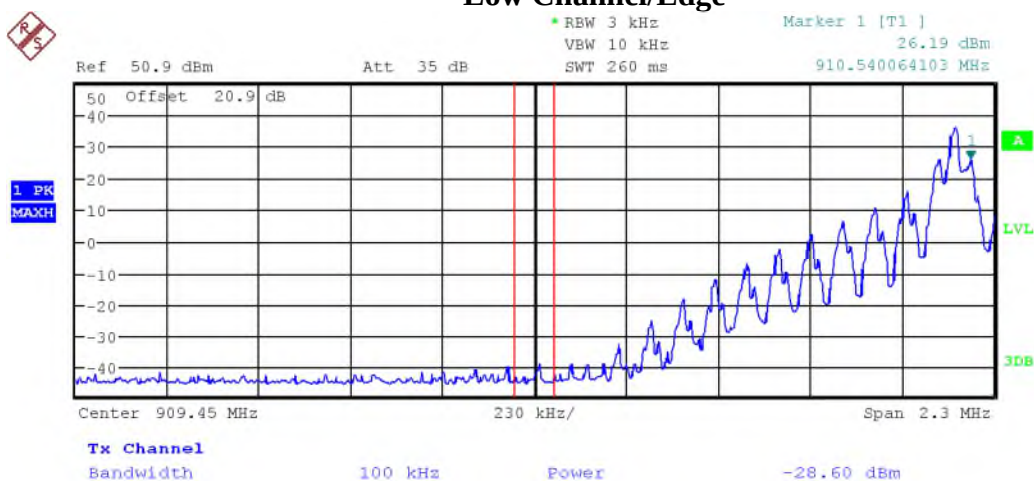


### High Channel/Edge

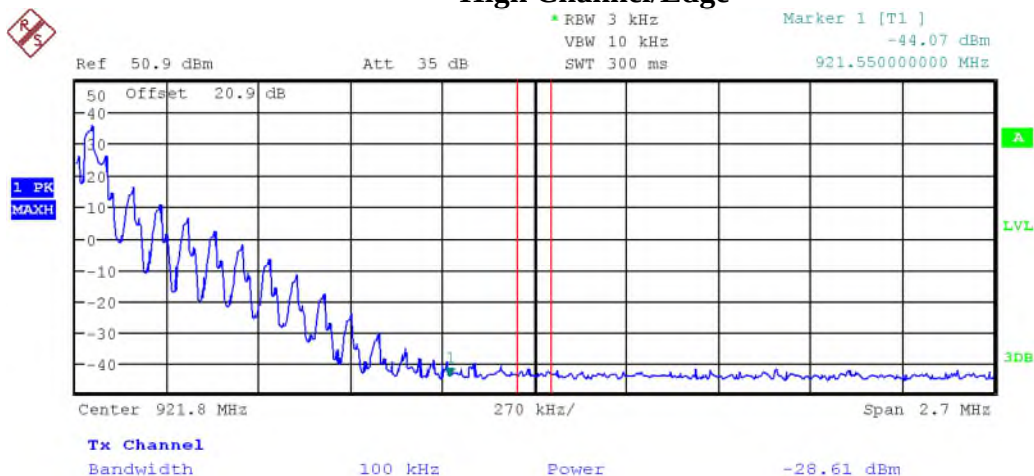

|             |                                               |                                                                                               |
|-------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  | <br>Canada |
| Product     | MRFM-S Plus                                   |                                                                                               |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                               |

## Spurious emissions 30 MHz – 1.5 GHz

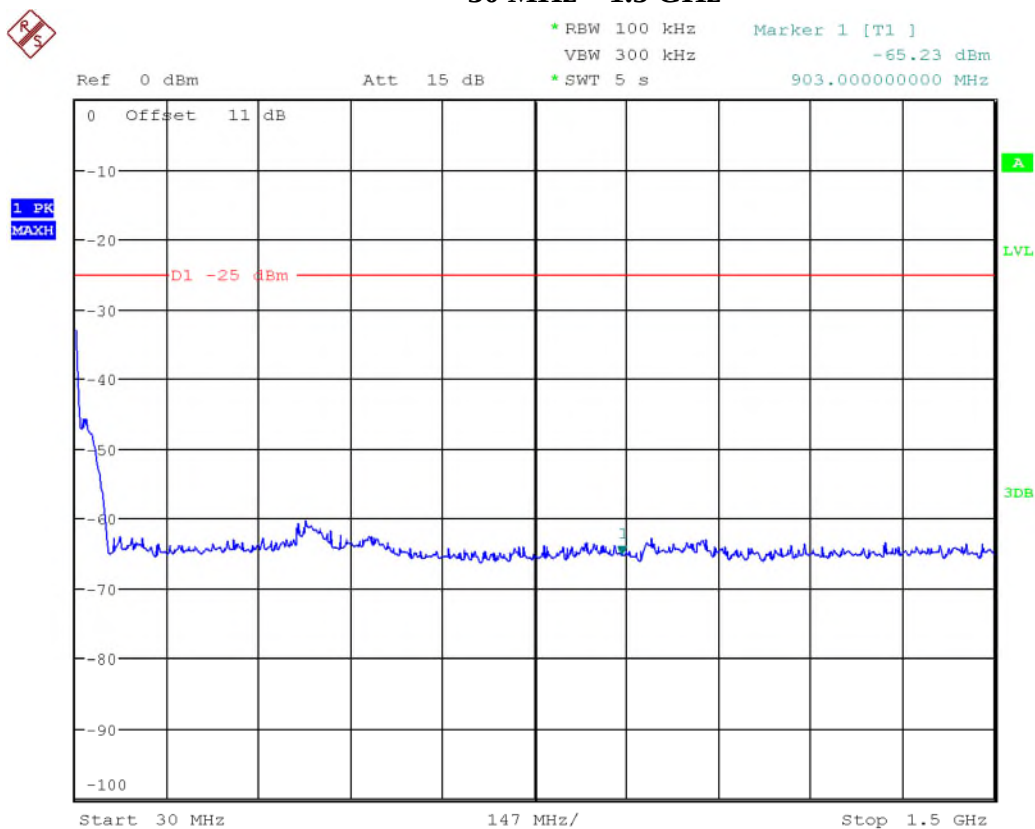


Date: 8.DEC.2020 11:33:34

No emissions were detected below 30 MHz.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## 1.5 GHz – 10 GHz

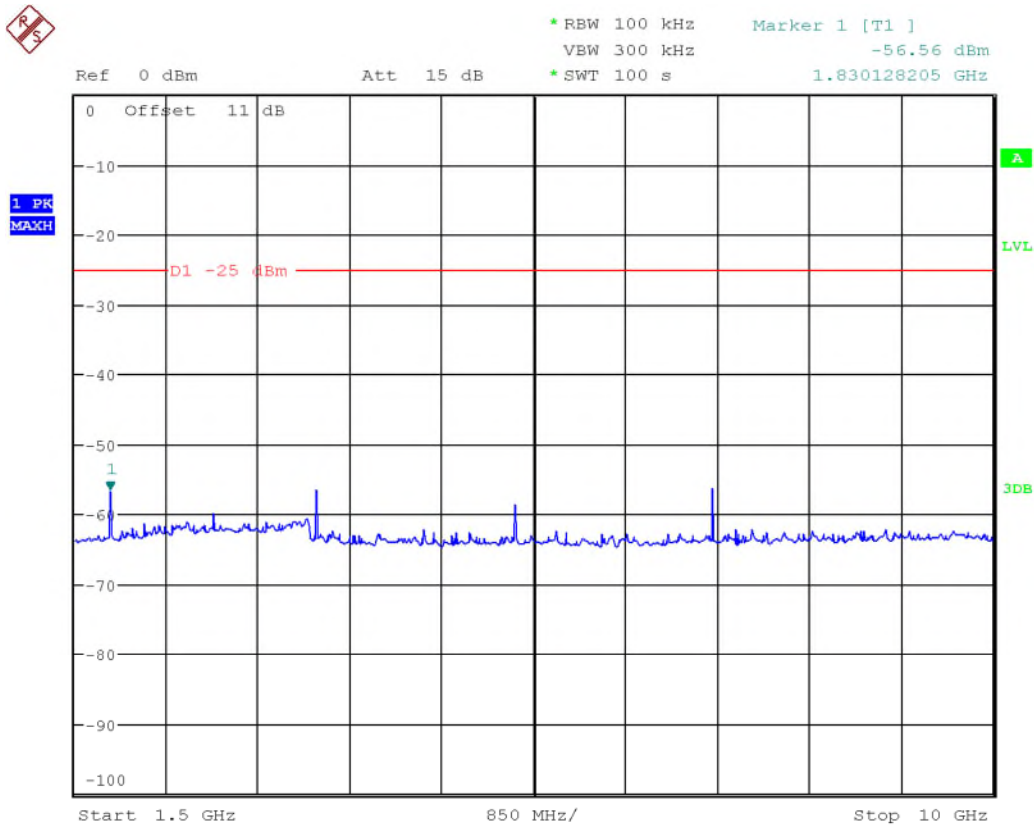


Date: 8.DEC.2020 11:50:39


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## 6C Protocol

### Band Edge 902 MHz – 904 MHz Sub-Band Low Channel/Edge

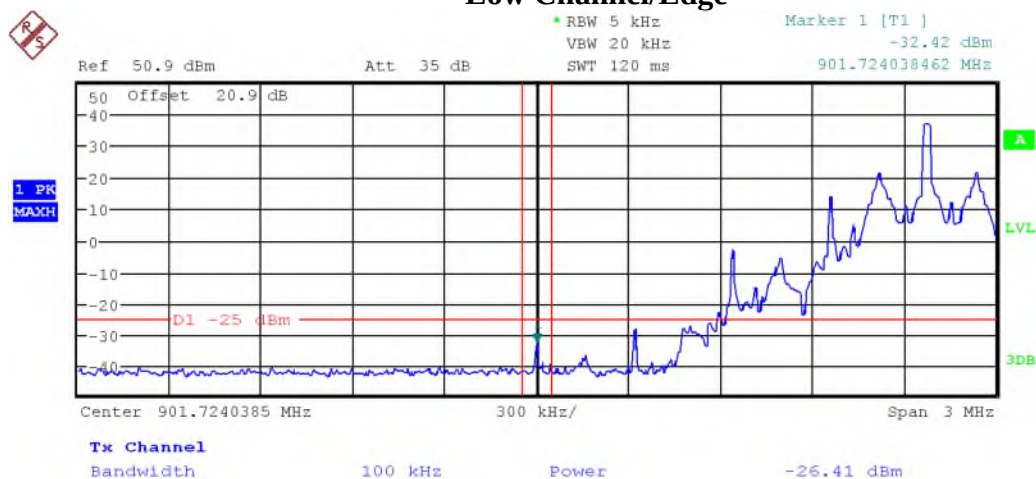


### High Channel/Edge

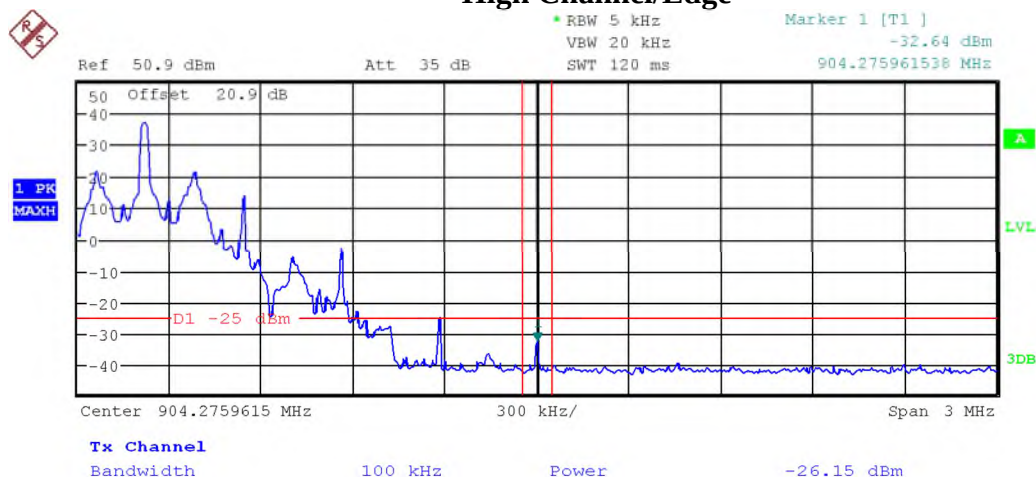


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Band Edge 909.75 MHz – 921.75 MHz Sub-Band Low Channel/Edge

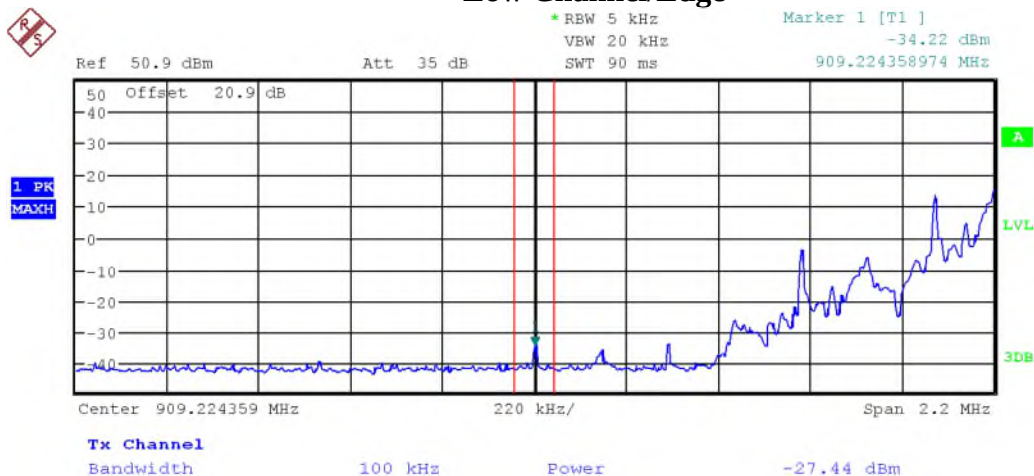


### High Channel/Edge

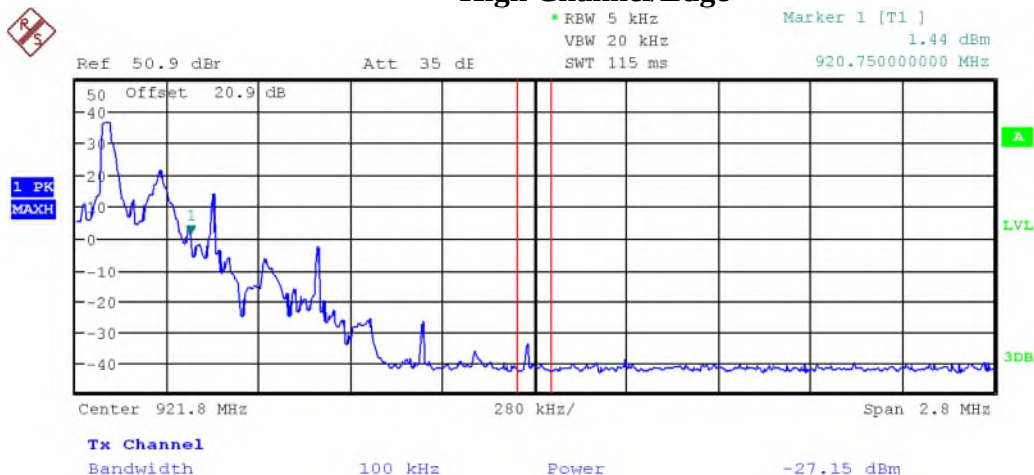

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


## Spurious emissions 30 MHz – 1.5 GHz

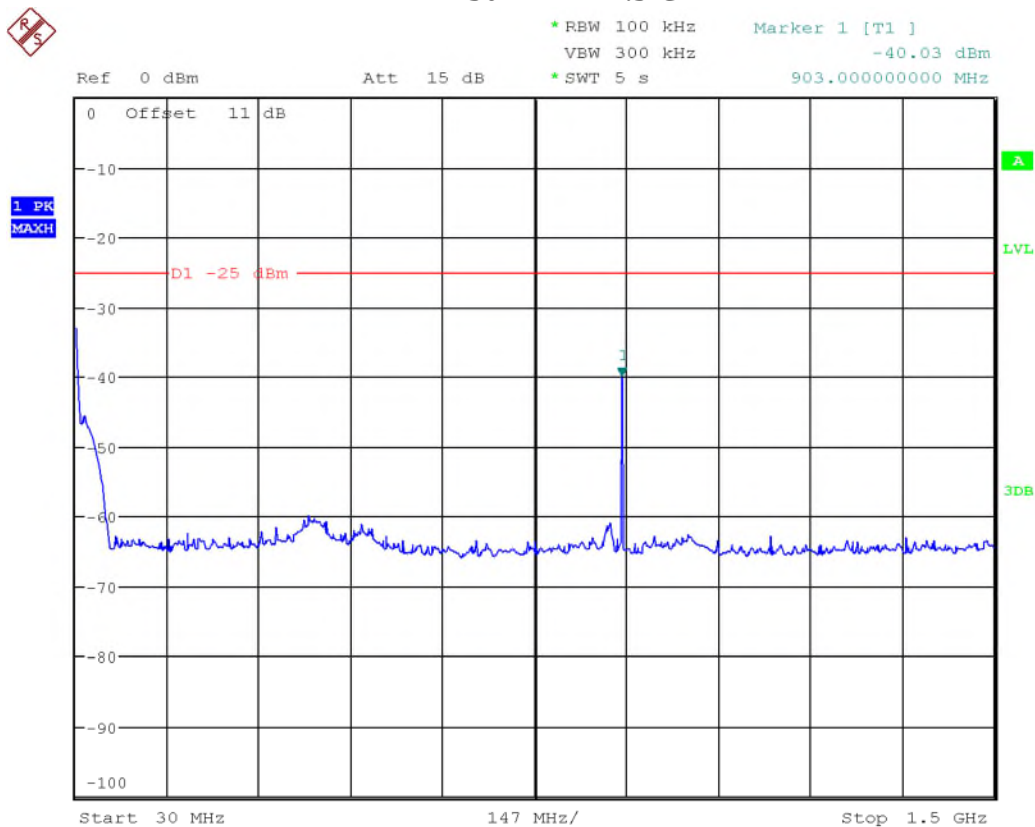

Date: 8.DEC.2020 11:25:30

No emissions were detected below 30 MHz.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

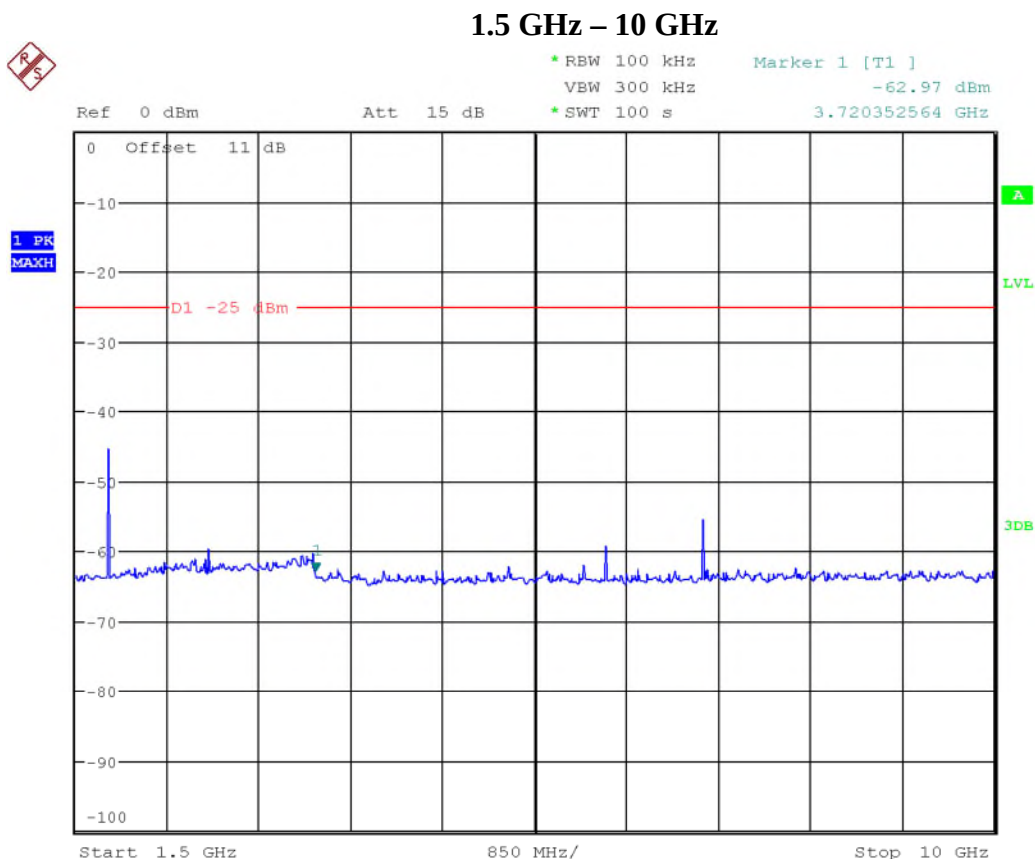

Date: 8.DEC.2020 11:19:18

See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Test Equipment List

| Equipment                     | Model No.           | Manufacturer    | Last Calibration Date | Next Calibration Date | Asset #  |
|-------------------------------|---------------------|-----------------|-----------------------|-----------------------|----------|
| Signal Analyzer               | FSQ 26              | Rohde & Schwarz | Oct. 25, 2019         | Oct. 25, 2021         | GEMC 234 |
| 20dB Attenuator (100W)        | 6N100W-20F          | Inmet           | Dec 3, 2020           | Dec 3, 2021           | GEMC 352 |
| 10dB Attenuator               | 6N10W-10            | Inmet           | Dec 3, 2020           | Dec 3, 2021           | GEMC 350 |
| Band Reject Filter            | BRC50722            | Micro-Tronics   | Dec 3, 2020           | Dec 3, 2021           | GEMC 186 |
| 1.5GHz-18GHz High Pass Filter | 5HC1500/1800 0-3-PP | Trilithic Inc   | Dec 3, 2020           | Dec 3, 2021           | GEMC 327 |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## ***Transmitter Spurious Radiated Emissions***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

### **Limit(s) and Method**

The method is as defined in FCC 2.1053 and the limits are as defined in FCC Part 90.210(K).

(3) *Other transmitters.* For all other transmitters authorized under subpart M that operate in the 902-928 MHz band, the peak power of any emission shall be attenuated below the power of the highest emission contained within the licensee's sub-band in accordance with the following schedule:

(i) On any frequency within the authorized bandwidth: Zero dB.

(ii) On any frequency outside the licensee's sub-band edges:  $55 + 10 \log(P)$  dB, where (P) is the highest emission (watts) of the transmitter inside the licensee's sub-band.

Spurious radiated emissions of the EUT was performed at 3 meters. The limit specified in FCC 90.210 (K) is  $55 + 10 \log(P)$  dBc. For all intensive purpose, the limit is -25 dBm. The field strength limit for the EUT is give in the below:

$$E(\text{dB}\mu\text{V/m}) = \text{EIRP}(\text{dBm}) + 95.2$$

$$\text{Where EIRP} = \text{ERP} + 2.15$$

$$E(\text{dB}\mu\text{V/m}) = \text{ERP}(\text{dBm}) + 97.35$$


$$E(\text{dB}\mu\text{V/m}) = -25 \text{ dBm} + 97.35 = 72.35 \text{ dBuV}$$

This limit is applicable all emission at 3 meter measurement distance.

The Limit is with 100 kHz measurement bandwidth and using a Peak detector.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Typical Radiated Emissions Setup

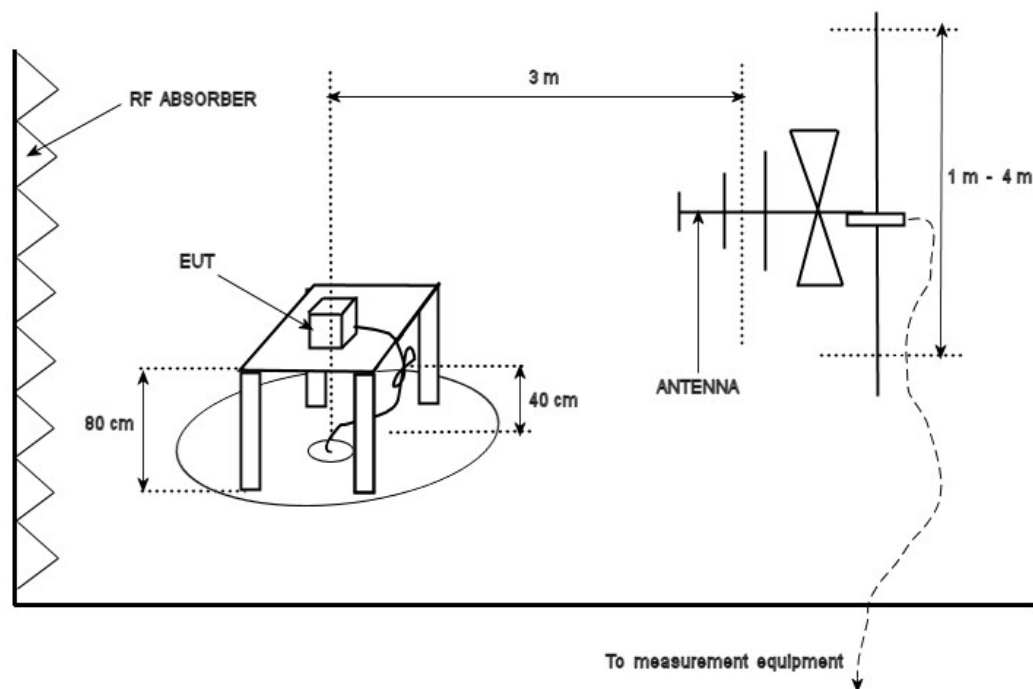

### Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

### Preliminary Graphs


Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.

The device was scanned to the 10<sup>th</sup> harmonic (a minimum of a 10 GHz).

The measured radiation includes the emissions from the reader being used to control the EUT.


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Vertical – Peak Emission Graph 30 MHz – 300 MHz

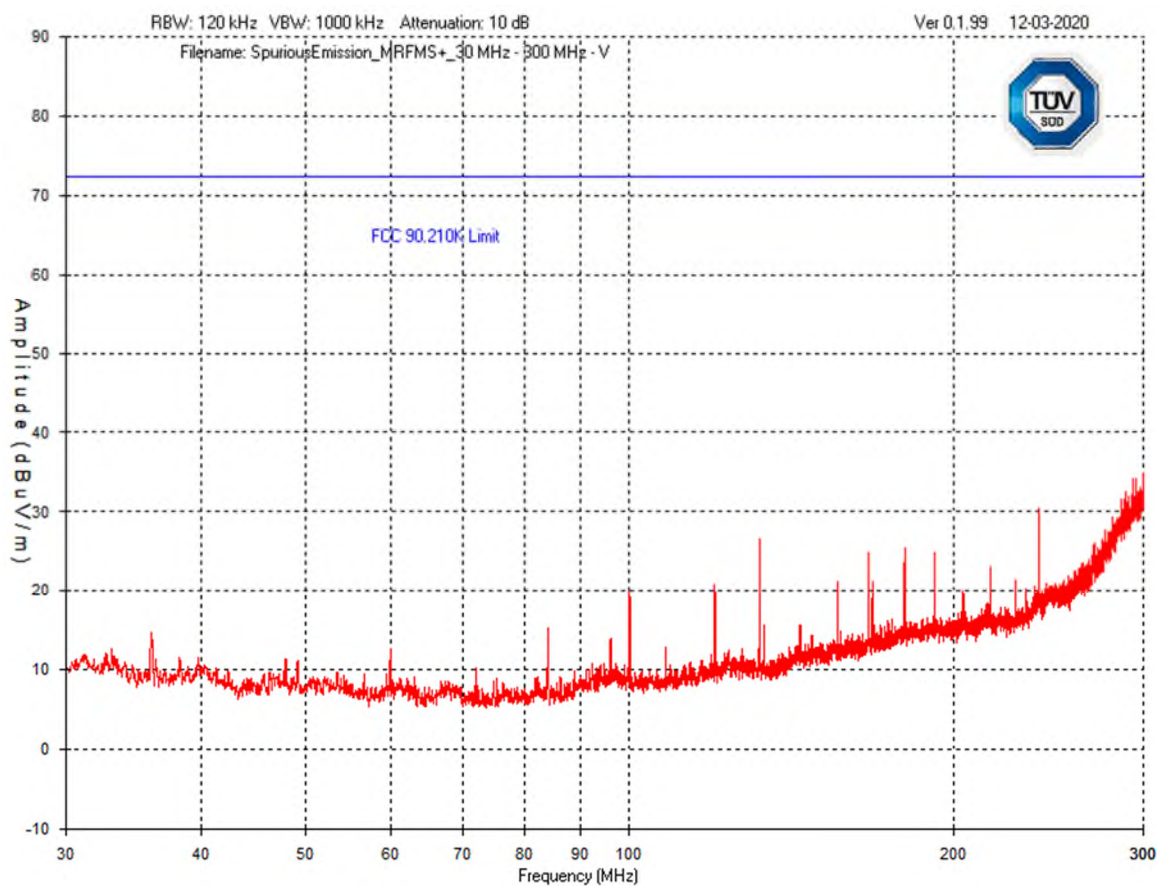


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Vertical – Peak Emission Graph 300 MHz – 1000 MHz

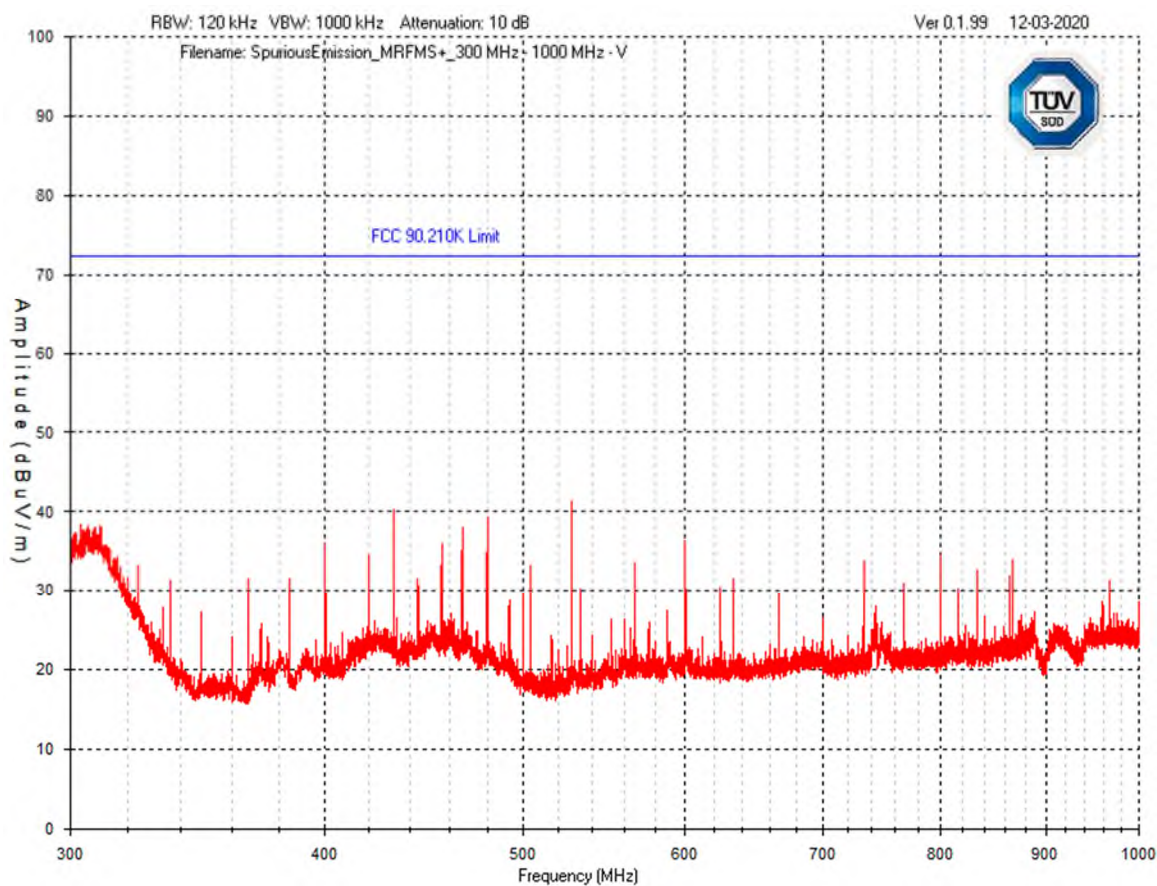


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Vertical – Peak Emission Graph 1 GHz – 4 GHz

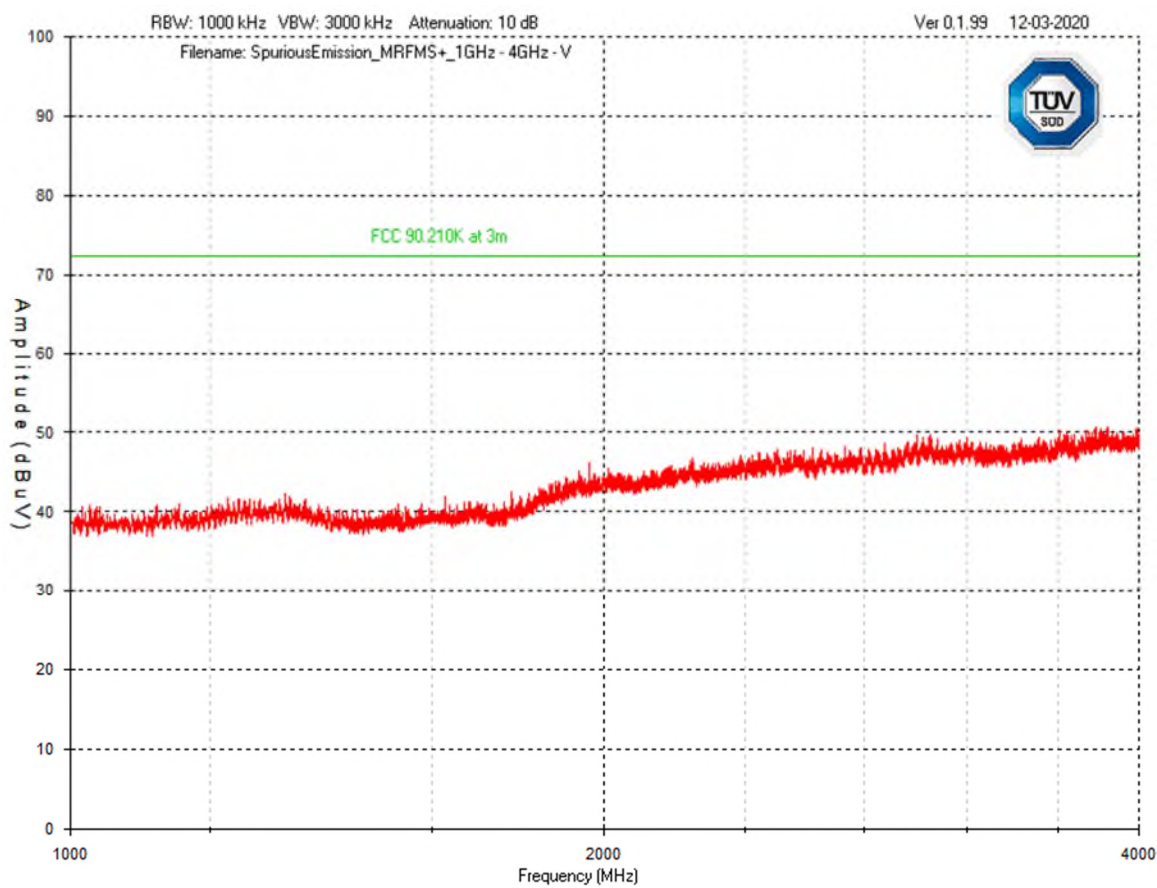


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Vertical – Peak Emission Graph 4 GHz – 10 GHz

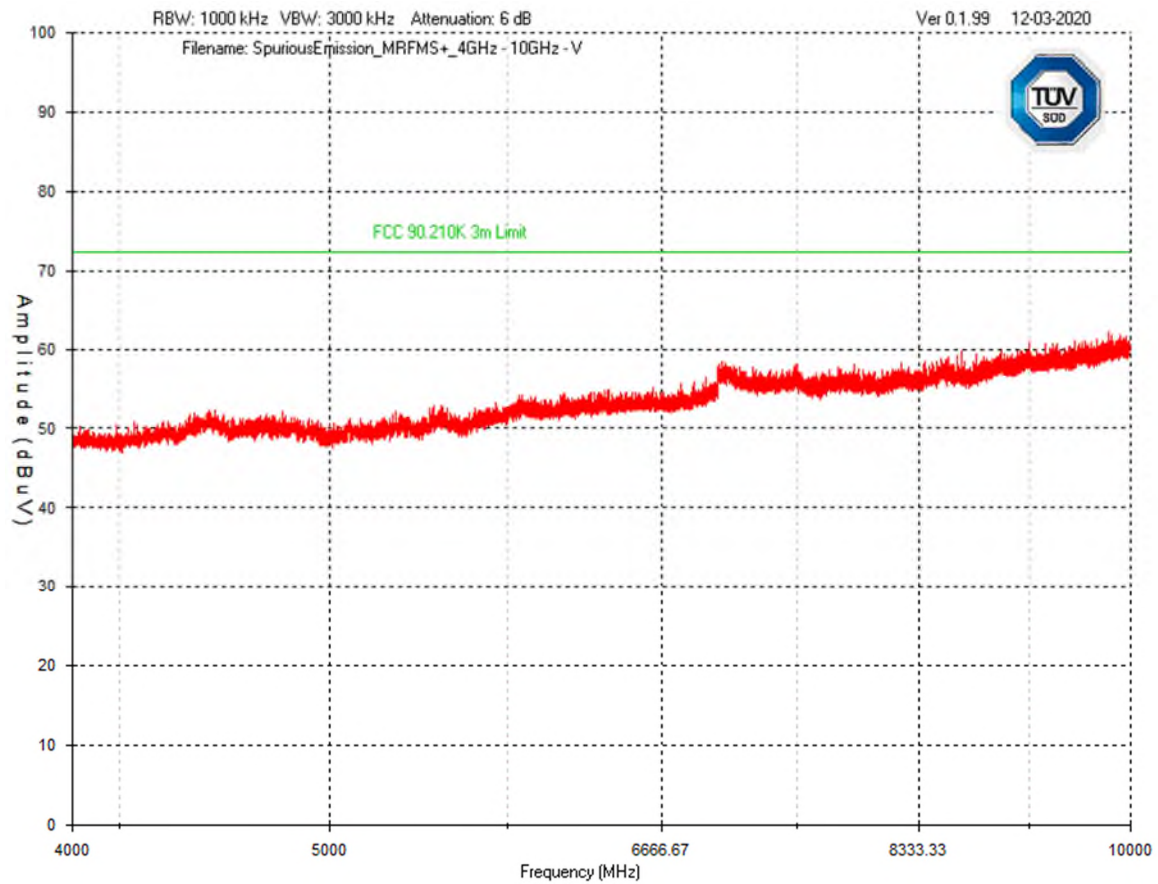


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Horizontal – Peak Emission Graph 30 MHz – 300 MHz

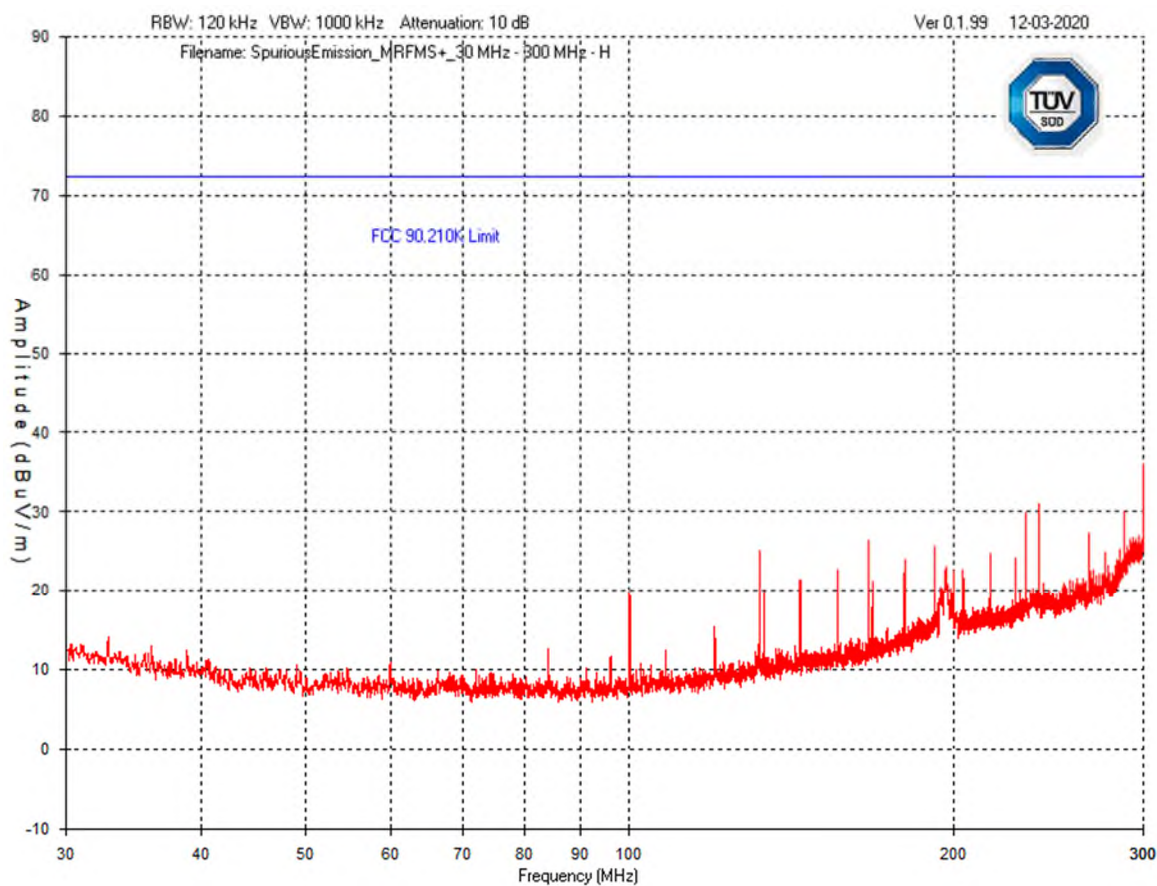


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Horizontal – Peak Emission Graph 300 MHz – 1000 MHz

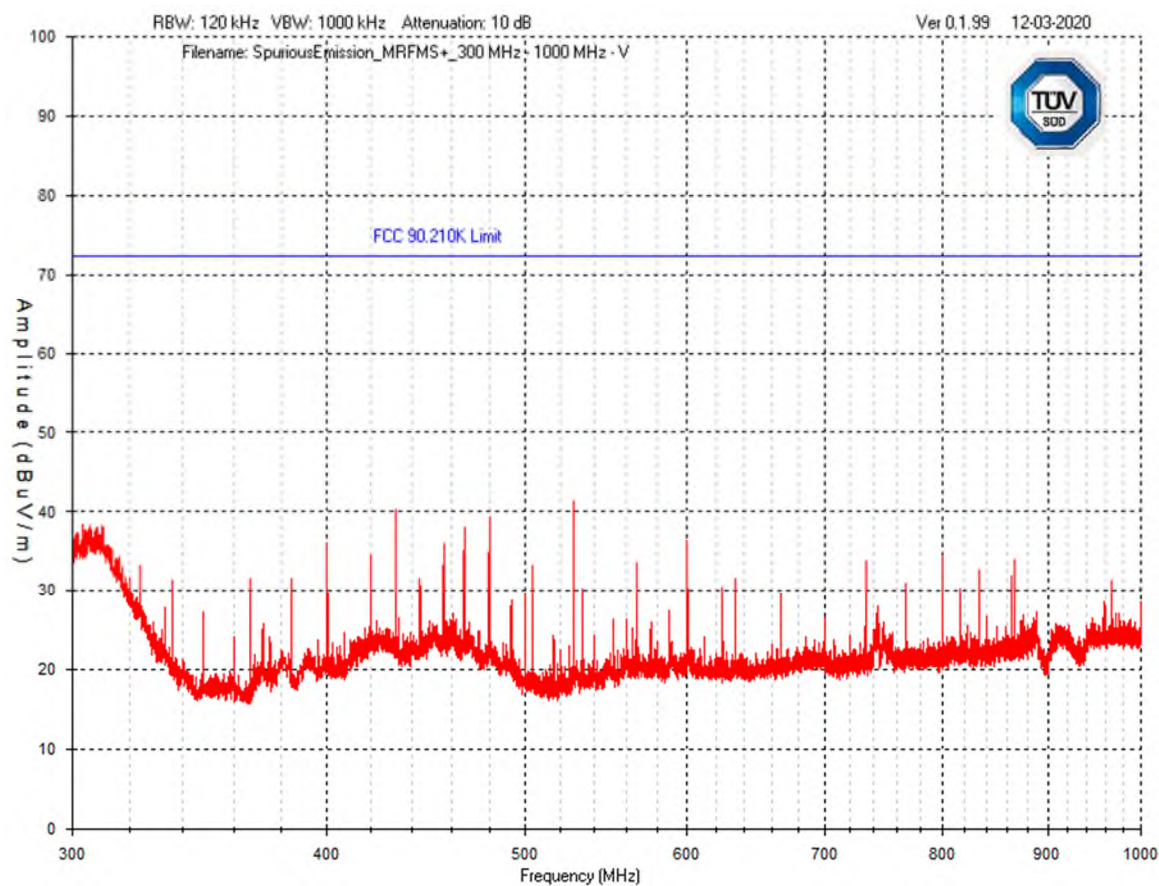


|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Horizontal – Peak Emission Graph 1 GHz – 4 GHz

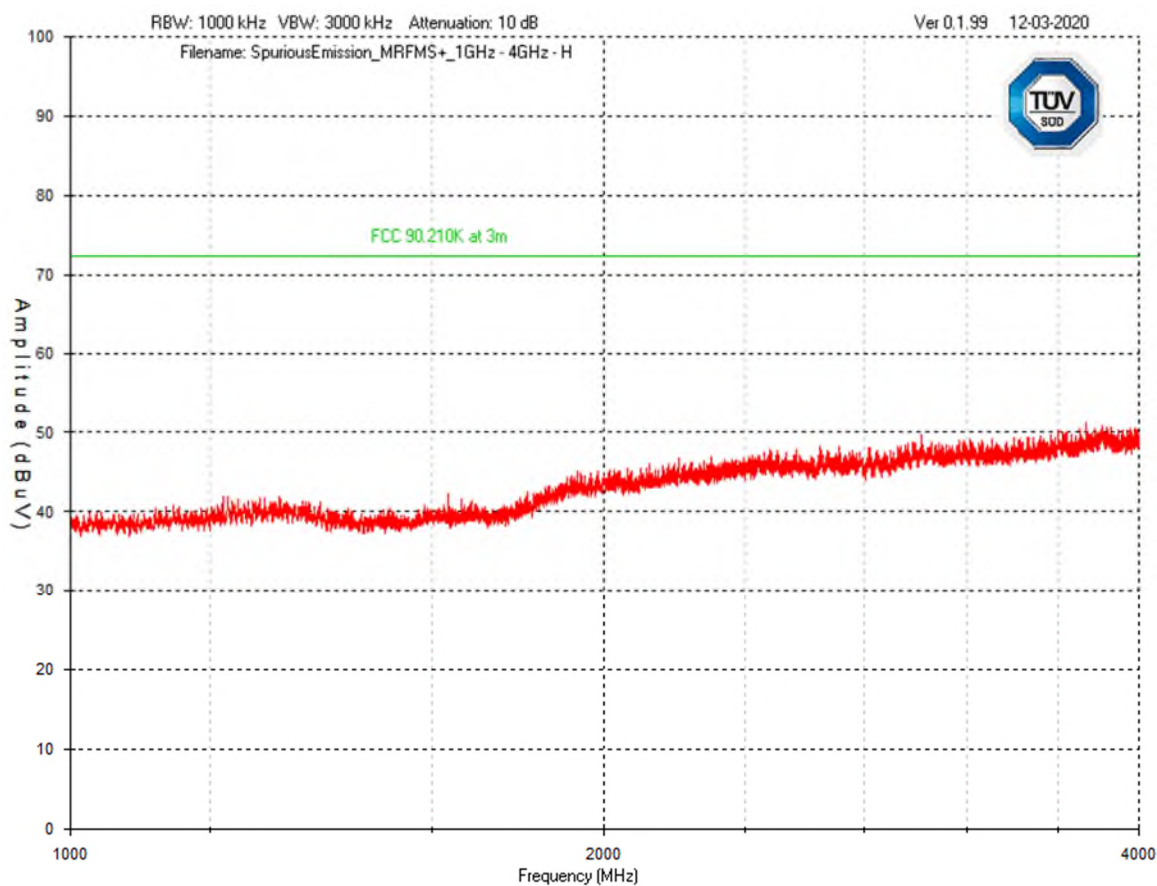

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

### Horizontal – Peak Emission Graph 4 GHz – 10 GHz

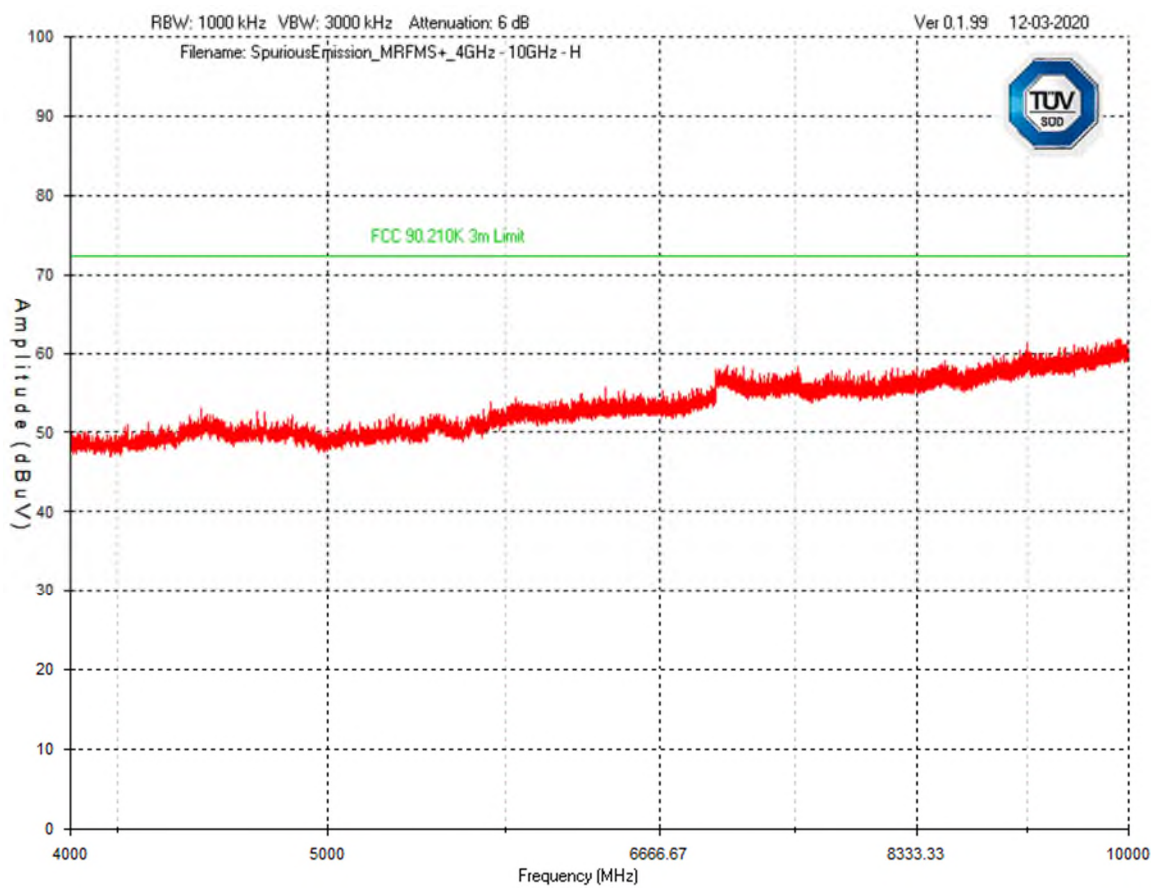

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Results

Pass.

The EUT meets the Transmitter Spurious Radiated Emissions requirements.

All scan were perform with a measurement bandwidth greater than the required bandwidth.  
No peak emissions were above the limit.

## Test Equipment List

| Equipment                   | Model No.              | Manufacturer        | Last Calibration / Verification Date | Next Calibration / Verification Date | Asset #   |
|-----------------------------|------------------------|---------------------|--------------------------------------|--------------------------------------|-----------|
| Spectrum Analyzer           | ESR 26                 | Rohde & Schwarz     | Mar. 6, 2020                         | Mar. 6, 2022                         | GEMC 341  |
| Biconical Antenna Rx        | PBA 2030               | TDK RF Solutions    | 3-Jun-19                             | 3-Jun-21                             | 256       |
| Log Periodic Antenna Rx     | PLP 3003               | TDK RF Solutions    | 30-May-19                            | 30-May-21                            | 258       |
| Horn Antenna 1 – 18 GHz     | 3117                   | ETS-Lindgren        | Feb. 17, 2020                        | Feb. 17, 2022                        | GEMC 340  |
| Band Reject Filter          | BRC50722               | Micro-Tronics       | Dec 3, 2020                          | Dec 3, 2021                          | GEMC 186  |
| 0.98 GHz High pass filter   | 8IH40-980/T3750        | K & L Microwave     | Dec 3, 2020                          | Dec 3, 2021                          | GEMC 4256 |
| 4GHZ-12GHz High Pass filter | 11SH10-4000/T12000-0/0 | K & L Microwave     | Dec 3, 2020                          | Dec 3, 2021                          | GEMC 119  |
| Attenuator 6 dB             | 6N5W-06                | Inmet               | NCR                                  | NCR                                  | GEMC 346  |
| Pre-Amp                     | LPA-6-30               | RF Bay Inc.         | Feb. 28, 2019                        | Feb. 28, 2021                        | GEMC 243  |
| Pre-Amp 1 – 26.5 GHz        | HP 8449B               | HP                  | Dec. 20, 2019                        | Dec. 20, 2021                        | GEMC 189  |
| RF Cable 10m                | LMR-400-10M-50Ω-MN-MN  | LexTec              | NCR                                  | NCR                                  | GEMC 27   |
| RF Cable 3m                 | HP305S                 | Semflex             | NCR                                  | NCR                                  | GEMC 310  |
| Emissions Software          | 0.1.99                 | TUV SUD Canada, Inc | NCR                                  | NCR                                  | GEMC 58   |

Note: GEMC 287 is part of GEMC 8's calibration.

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## ***Temperature Frequency Stability***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the permitted bandwidth during extreme temperature variations. This helps protect radio broadcasts and receivers with spectrum nearby to the equipment under test from unwanted interference. This also helps ensure proper reception of the intended signal by ensuring the transmit frequency is correct in any temperature.

### **Limit(s) and Method**

The methods are given in FCC Part 2.1055. The limits given in FCC Part 90.213.

However, the device meets the following condition:

Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency tolerance restrictions.

Frequency tolerances measurements are taken for information purpose. Frequency must be maintained from -30 C to +50 C. The EUT is monitored at each 10 degree increment. At each temperature, the device is checked after a stabilization period required for the device to reach the temperature.


### **Measurements**

The worst case results are presented, with the frequency shown. The device was checked at each 10-degree increment of temperature.

| Test Condition  | Measured Frequency | Frequency Drift (ppm) |
|-----------------|--------------------|-----------------------|
| 22°C, 120 Vac   | 916.000448718      |                       |
| 22°C, 102 Vac   | 916.000456731      | 0.009                 |
| 22°C, 138Vac    | 916.000440705      | -0.009                |
| 50 °C, 120 Vac  | 916.000625000      | 0.192                 |
| 40°C, 120 Vac   | 916.000633013      | 0.201                 |
| 30°C, 120 Vac   | 916.000520833      | 0.079                 |
| 20°C, 120 Vac   | 916.000416667      | -0.035                |
| 10°C, 120 Vac   | 916.000336538      | -0.122                |
| 0 °C, 120 Vac   | 916.000336538      | -0.122                |
| -10 °C, 120 Vac | 916.000320513      | -0.140                |
| -20 °C, 120 Vac | 916.000368590      | -0.087                |
| -30 °C, 120 Vac | 916.000488782      | 0.044                 |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |


## Graphs

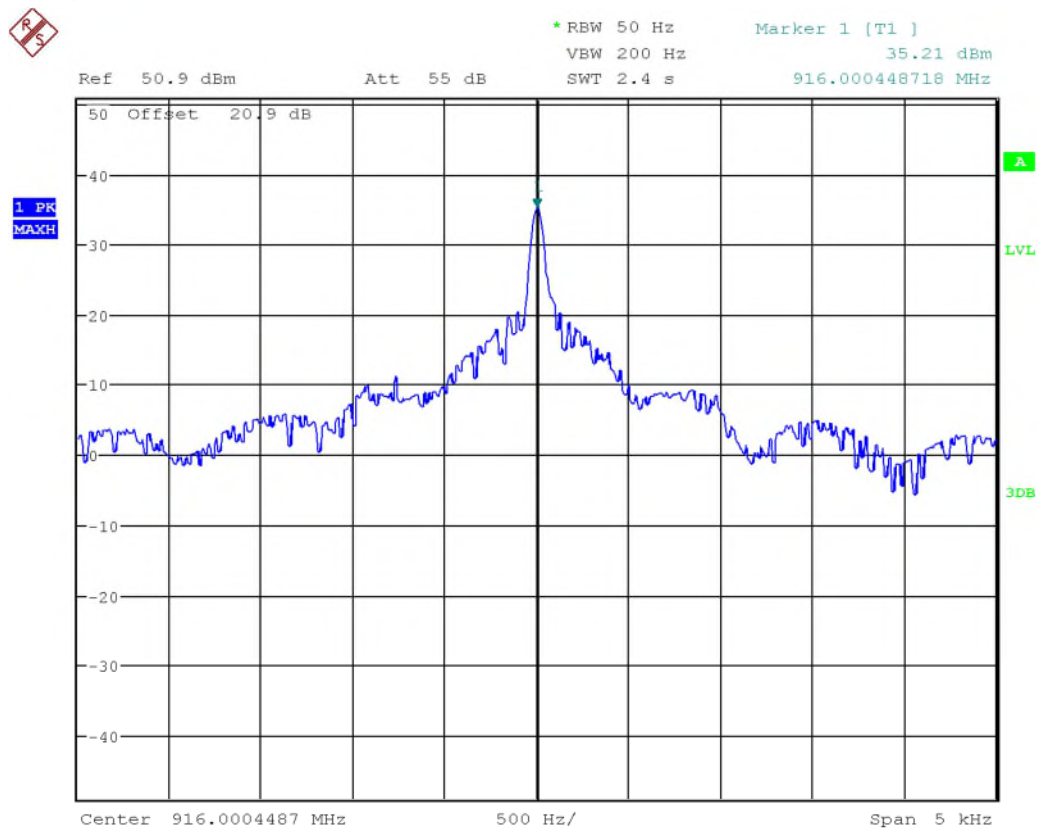

Date: 7.DEC.2020 13:47:01

22°C, 120 Vac

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | Kapsch TrafficCom Canada Inc                  |  |
| Product     | MRFM-S Plus                                   |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

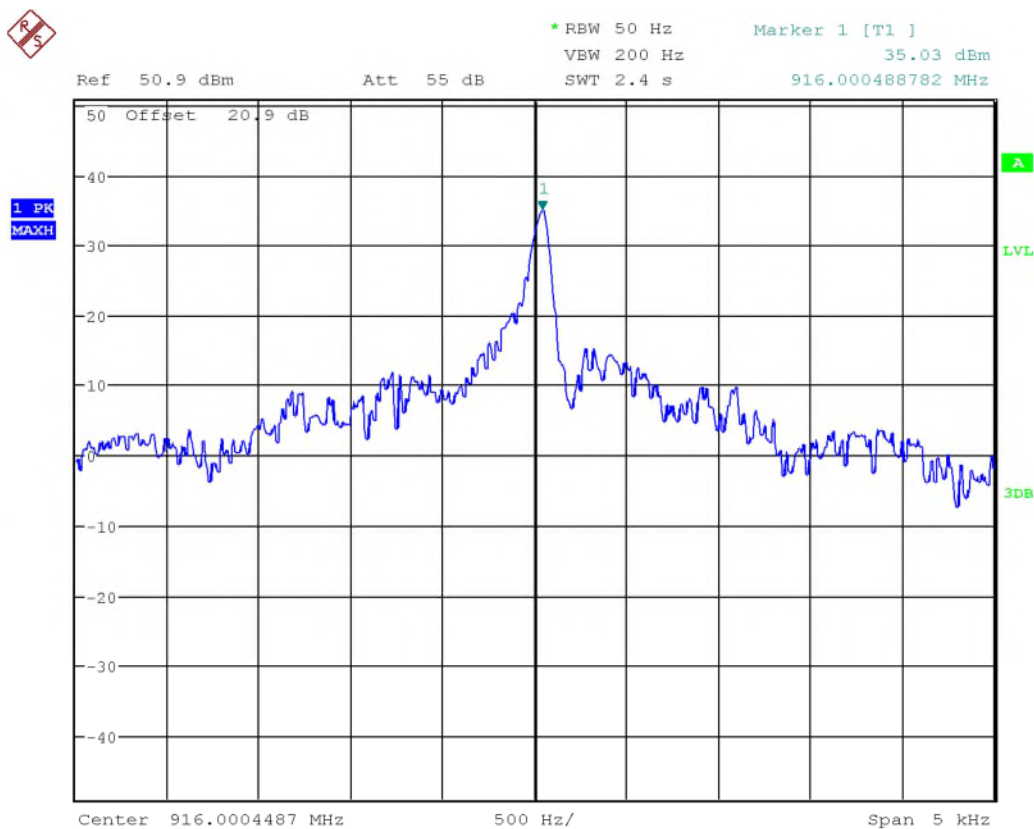

Date: 7.DEC.2020 16:42:03

-30 °C, 120 Vac

## Test Equipment List

| Equipment              | Model No.  | Manufacturer    | Last Calibration Date | Next Calibration Date | Asset #   |
|------------------------|------------|-----------------|-----------------------|-----------------------|-----------|
| Signal Analyzer        | FSQ 26     | Rohde & Schwarz | Oct. 25, 2019         | Oct. 25, 2021         | GEMC 234  |
| 20dB Attenuator (100W) | 6N100W-20F | Inmet           | Dec 3, 2020           | Dec 3, 2021           | GEMC 352  |
| Environmental Chamber  | SM-32-8200 | Thermotron      | NCR                   | NCR                   | CANE00169 |
| Data Acquisition       | 34970A     | Agilent         | Nov 19, 2020          | Nov 19, 2021          | CANE00035 |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

## Appendix A – EUT Summary

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

For further details for filing purposes, refer to filing package.

## General EUT Description

| Client Details                                    |                                                                                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Organization / Address                            | Kapsch TrafficCom Canada Inc.<br>6020 Ambler Drive,<br>Mississauga, ON, Canada<br>L4W 2P1                     |
| Contact                                           | Alastair Malarky, Chief Engineer                                                                              |
| Phone                                             | 905-624-3020, x 1203                                                                                          |
| Email                                             | alastair.malarky@kapsch.net                                                                                   |
| EUT (Equipment Under Test) Details                |                                                                                                               |
| EUT Name (for report title)                       | Multi-Protocol Reader RF Module-Smart Plus                                                                    |
| EUT Model / SN (if known)                         | Model #: 802870                                                                                               |
| EUT revision                                      | New product                                                                                                   |
| Software version                                  | N/A                                                                                                           |
| EUT is powered using                              | DC                                                                                                            |
| Input voltage range(s) (V)                        | 15 VDC and 5 VDC                                                                                              |
| Frequency range(s) (Hz)                           | N/A                                                                                                           |
| Nominal power consumption (W)                     | 30W                                                                                                           |
| Number of power supplies in EUT                   | None                                                                                                          |
| Transmits RF energy? (describe)                   | Yes                                                                                                           |
| Basic EUT functionality description               | See separate document CONF 802870 - Exhibit 12 - Operating Description                                        |
| High level block diagram of EUT (attachment)      | See separate document CONF 802870 - Exhibit 04 - Block Diagram                                                |
| Modes of operation                                | See separate document CONF 802870 - Exhibit 12 - Operating Description                                        |
| Step by step instructions for setup and operation |                                                                                                               |
| Customer to setup EUT on site?                    | Yes                                                                                                           |
| Frequency of all clocks present in EUT            | 48 MHz used for FPGA, 40 MHz reference for Synthesizer, 8 MHz for microcontroller, 3-4 MHz for power supplies |

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

|                                                              |                                                                        |
|--------------------------------------------------------------|------------------------------------------------------------------------|
| Available connectors on EUT                                  | See separate document CONF 802870 - Exhibit 12 - Operating Description |
| Peripherals required to exercise EUT<br>Ex. Signal generator | Kapsch Reader                                                          |
| Dimensions of product                                        | L 242mm<br>W 50mm<br>H 172mm                                           |

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see ‘Appendix B – EUT and Test Setup Photos’.

## Technical Specifications

Operation Band: 902 – 928 MHz

Modulation: On-Off Keying

Emission Designator ATA Protocol: N0N  
6B, 6C, SeGO, KTDM: K1D

Operation Frequency:

| Protocol                     | ATA                                            | SeGO                   | 6B                                             | 6C                                             | KTDM                |
|------------------------------|------------------------------------------------|------------------------|------------------------------------------------|------------------------------------------------|---------------------|
| TX modulation symbol rate    | CW only                                        | Manchester 80 kbps     | Manchester Bi Phase 40 kbps                    | Pulse Interval Encoded 160 kbps                | Manchester 500 kbps |
| TX frequency range permitted | 902.5 MHz to 903.5 MHz<br>910 MHz to 921.5 MHz | 911.0 MHz to 920.0 MHz | 903 MHz to 910.5 MHz<br>910.5 MHz to 920.5 MHz | 903 MHz to 910.5 MHz<br>910.5 MHz to 920.5 MHz | 915.75 MHz          |

## EUT Configurations

Please see Appendix B for a picture of the unit running in normal conditions.

- Unit was installed in a Reader Electronics for all testing.

|                 |                          |                                |
|-----------------|--------------------------|--------------------------------|
| Page 112 of 113 | Report Issued: 4/14/2021 | Report File #: 7169006929R-000 |
|-----------------|--------------------------|--------------------------------|

|             |                                               |                                                                                     |
|-------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Client      | <b>Kapsch TrafficCom Canada Inc</b>           |  |
| Product     | <b>MRFM-S Plus</b>                            |                                                                                     |
| Standard(s) | RSS 137 Issue 2:2009<br>FCC Part 90 Subpart M |                                                                                     |

- During Transmitter spurious radiated emissions, RF output was dissipated in a 50  $\Omega$  load.
- Cables and earthing are connected as per manufacturer's specification.

### Operational Setup

These devices are required to be attached to the EUT for its normal operation.

- The EUT transmits continuously