



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

RF BASESTATION

MODEL NUMBER: B551

BRAND NAME: RF BASE

FCC ID: JWSB551

REPORT NUMBER: 03U2162-1

ISSUE DATE: SEPTEMBER 4TH, 2003

Prepared for
**WORTH DATA INCORPORATED
623 SWIFT STREET
SANTA CRUZ, CALIFORNIA 95060
U.S.A**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
4.1. <i>FACILITIES AND EQUIPMENT</i>	<i>5</i>
4.2. <i>TABLE OF ACCREDITATIONS AND LISTINGS.....</i>	<i>6</i>
5. CALIBRATION AND UNCERTAINTY	7
5.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
5.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	<i>8</i>
6. SETUP OF EQUIPMENT UNDER TEST.....	9
7. APPLICABLE LIMITS AND TEST RESULTS	13
7.1. <i>20 dB BANDWIDTH.....</i>	<i>13</i>
7.2. <i>PEAK OUTPUT POWER</i>	<i>17</i>
7.3. <i>AVERAGE POWER</i>	<i>18</i>
7.4. <i>CONDUCTED SPURIOUS EMISSIONS</i>	<i>19</i>
7.5. <i>NUMBER OF HOPPING CHANNELS</i>	<i>28</i>
7.6. <i>HOPPING FREQUENCY SEPARATION</i>	<i>30</i>
7.7. <i>AVERAGE TIME OF OCCUPANCY</i>	<i>32</i>
7.8. <i>RADIATED EMISSIONS</i>	<i>35</i>
7.9. <i>POWERLINE CONDUCTED EMISSIONS.....</i>	<i>43</i>
8. SETUP PHOTOS.....	46

1. TEST RESULT CERTIFICATION

COMPANY NAME: WORTH DATA, INC.
623 SWIFT ST.
SANTA CRUZ, CA 95060 U.S.A

EUT DESCRIPTION: RF BASE STATION

MODEL: B551


DATE TESTED: AUGUST 18 – SEPTEMBER 4, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



YAN ZHENG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES



NEELESH RAJ
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is a RF base station operating in the 902-928 MHz band with 25 channels. The EUT has a peak output power of 21.81 dBm (152 mW) and an antenna gain of 2.0 dBi.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

4.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/2003
RF Filter Section	HP	85420E	3705A00256	11/20/2003
Antenna, Bicon/Log, 25 ~ 2000 MHz	ARA	LPB-2520/A	1185	3/6/2004
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	9/6/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
Preamplifier, 1 ~ 26 GHz	Miteq	NSP10023988	646456	4/25/2004
Spectrum Analyzer	HP	E4446A	US42510266	7/23/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	2/4/2004
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/2004
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/2004
1.5GHz High Pass Filter	Micro-Tronics	HPM13193	2	N/A
10dB Attenuator	Micro-Tronics	56-10	k16148	N/A
20dB Attenuator	Micro-Tronics	56-20	k16149	N/A

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
AC ADAPTER	GROUP WEST	AUT-05-1600	N/A	DoC


I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC PWR	1	DC PWR	UNSHIELDED	1.86M	N/A
2	USB	1	USB	SHIELDED	1.86M	N/A
3	ETHERNET	1	RJ45	UNSHIELDED	30M	N/A
4	SERIAL	1	RJ45	UNSHIELDED	1.86M	N/A

TEST SETUP

The EUT was in continuous transmission mode.

SETUP DIAGRAM

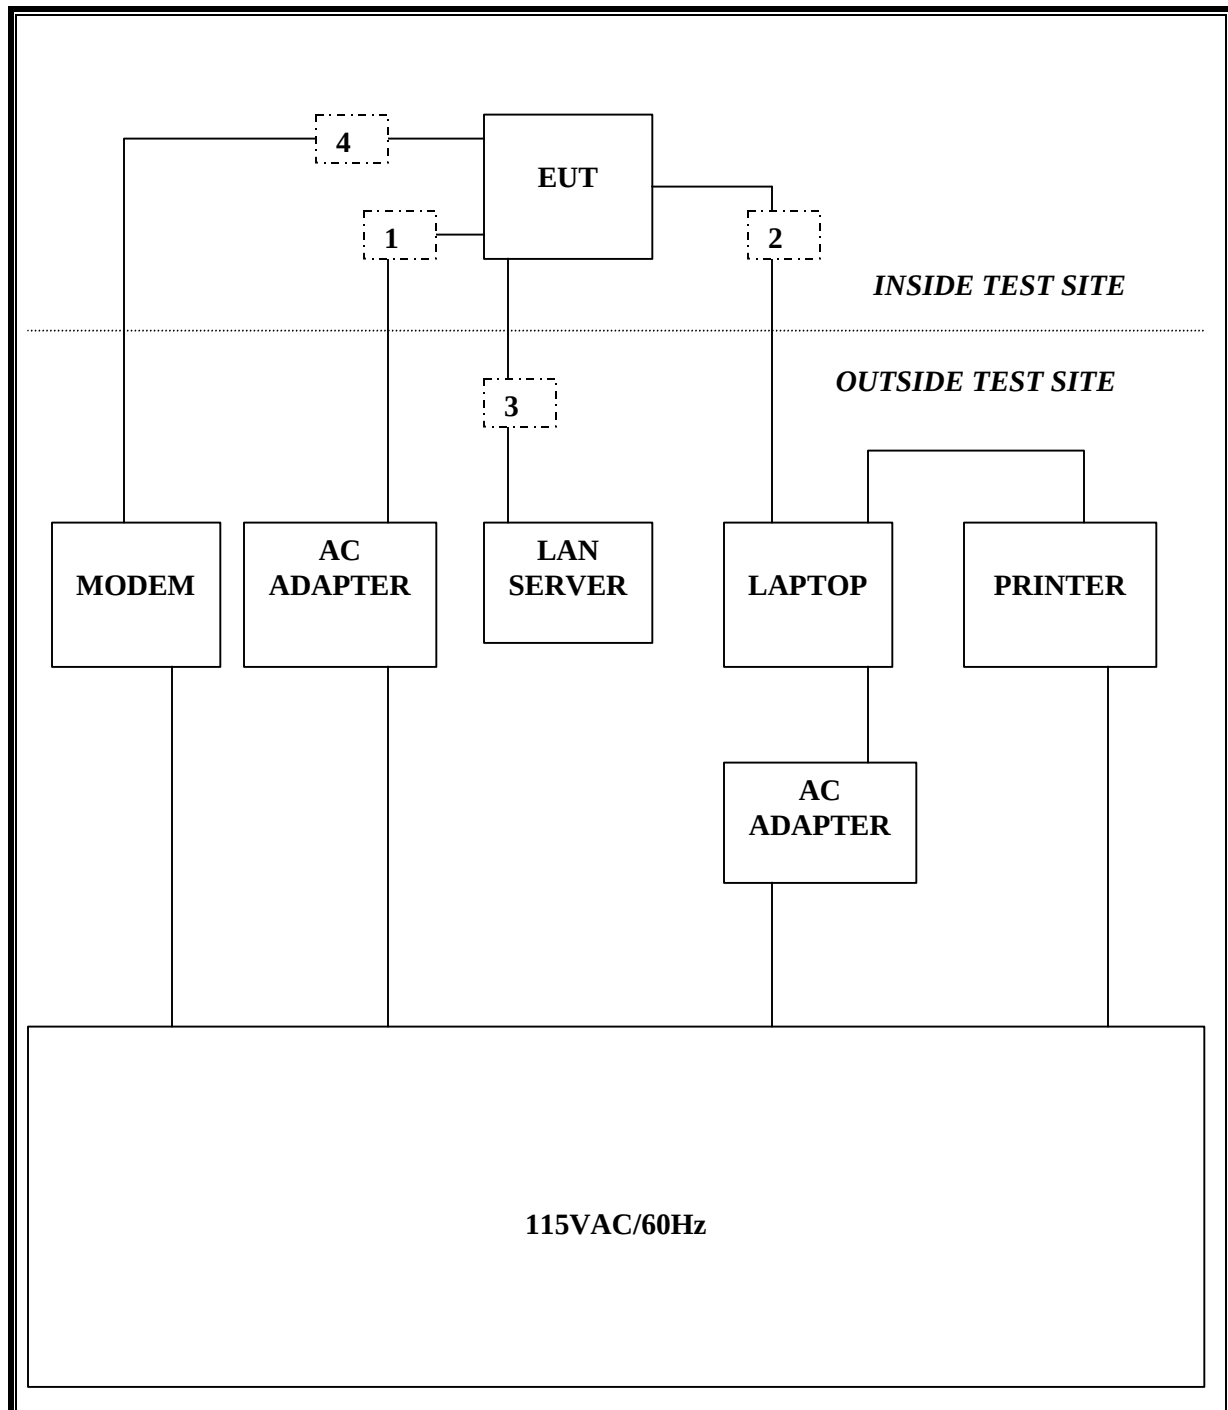

SETUP FOR DIGITAL DEVICE TESTS

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
FAX/MODEM	HAYES	336	9013539	IFAXDM1414
PRINTER	HP	2225C	254S41679	BS46XU2225C
LAPTOP	TOSHIBA	SATELLITE	N/A	DoC
AC ADAPTER	ACBEL POLYTECH	API-7629	B629022511197	111977
AC ADAPTER (EUT)	GROUP WEST	AUT-05-1600	N/A	DoC


I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC PWR	1	DC PWR	UNSHIELDED	1.86M	N/A
2	USB	1	USB	SHIELDED	1.86M	N/A
3	ETHERNET	1	RJ45	UNSHIEDLED	30M	N/A
4	SERIAL	1	RJ45	UNSHIELDED	1.86M	N/A
5	PARALLEL	1	DB25	SHIELDED	1.86M	N/A
6	DC PWR	1	DC PWR	UNSHIELDED	1.86M	N/A
7	AC PWR	1	AC PWR	UNSHIEDLED	1.86M	N/A
8	AC/DC PWR	1	DC PWR	UNSHIELDED	1.86M	N/A

TEST SETUP

The EUT was in continuous transmission mode.

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

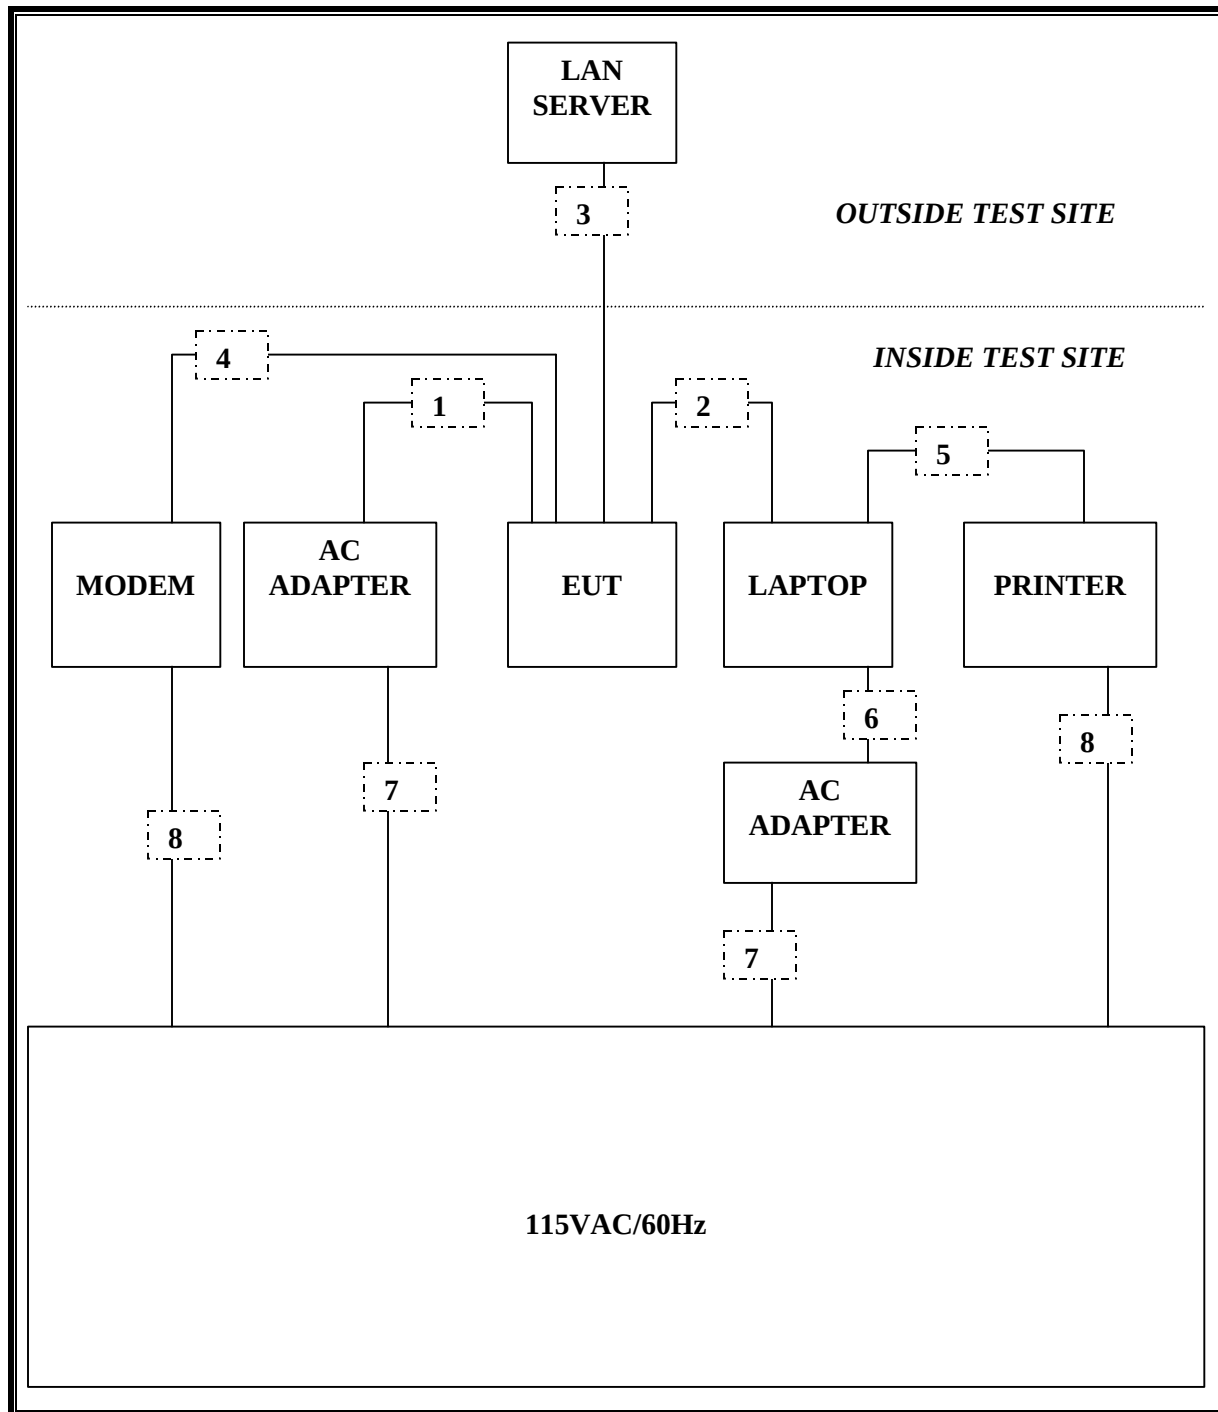

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. 20 dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 20 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	903	350
Middle	915	380
High	927	463

20 DB BANDWIDTH

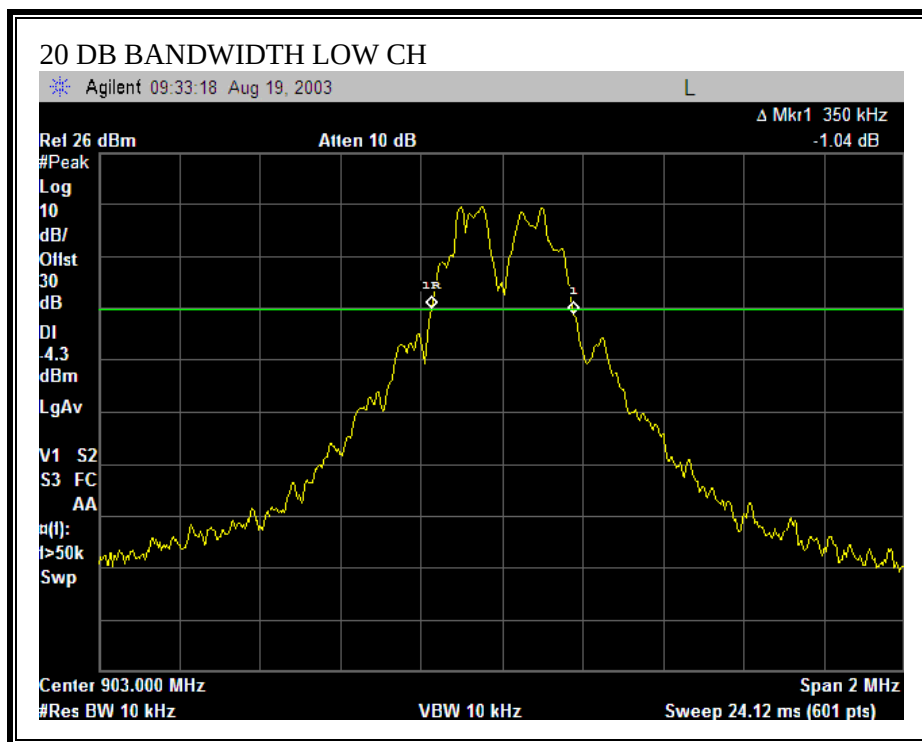

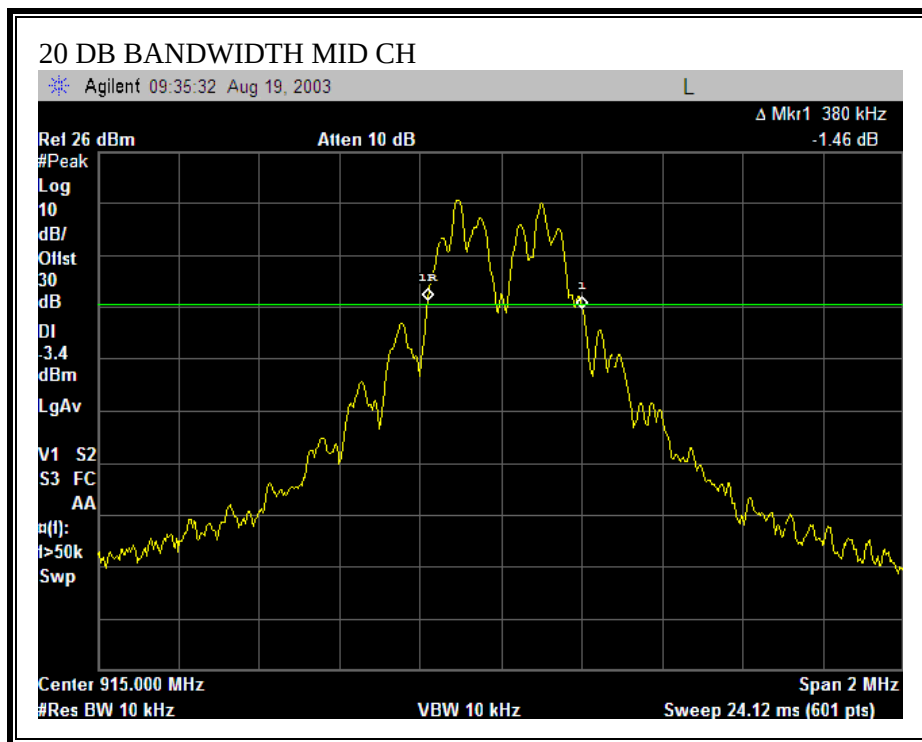

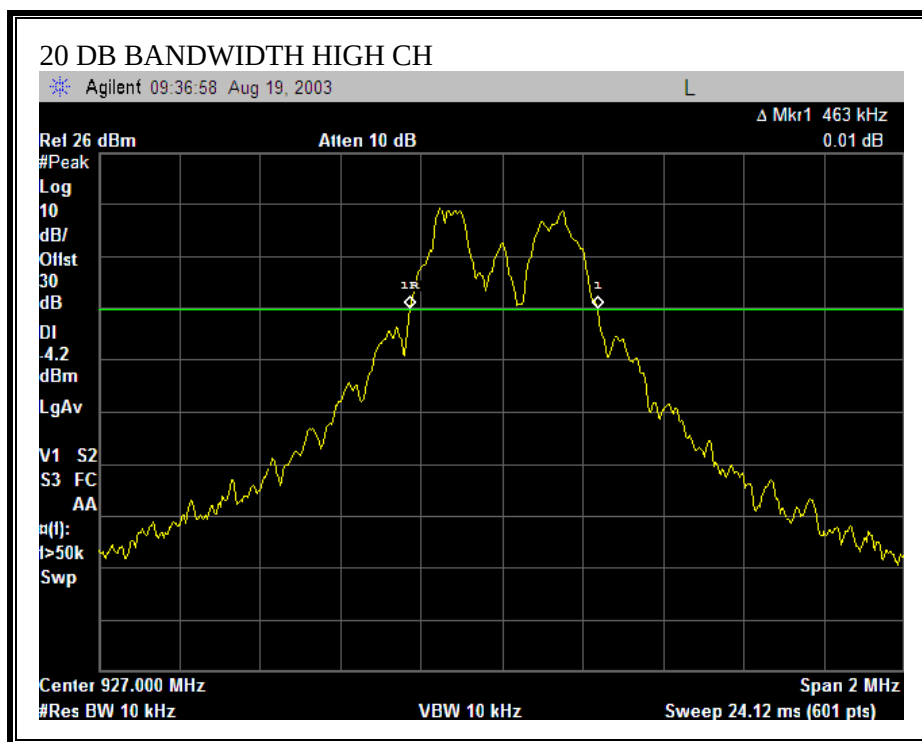

7.2. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (1) For frequency hopping systems operating in the 902-928 MHz band employing at least 25 hopping channels: 0.25 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 2.0 dBi, therefore the limit is 24 dBm.

TEST PROCEDURE

The transmitter output is connected to a peak power meter.

RESULTS

No non-compliance noted:

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	903	21.60	24	-2.40
Middle	915	21.80	24	-2.20
High	927	21.81	24	-2.19

7.3. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 21 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	903	21.53
Middle	915	21.55
High	927	21.55

7.4. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL

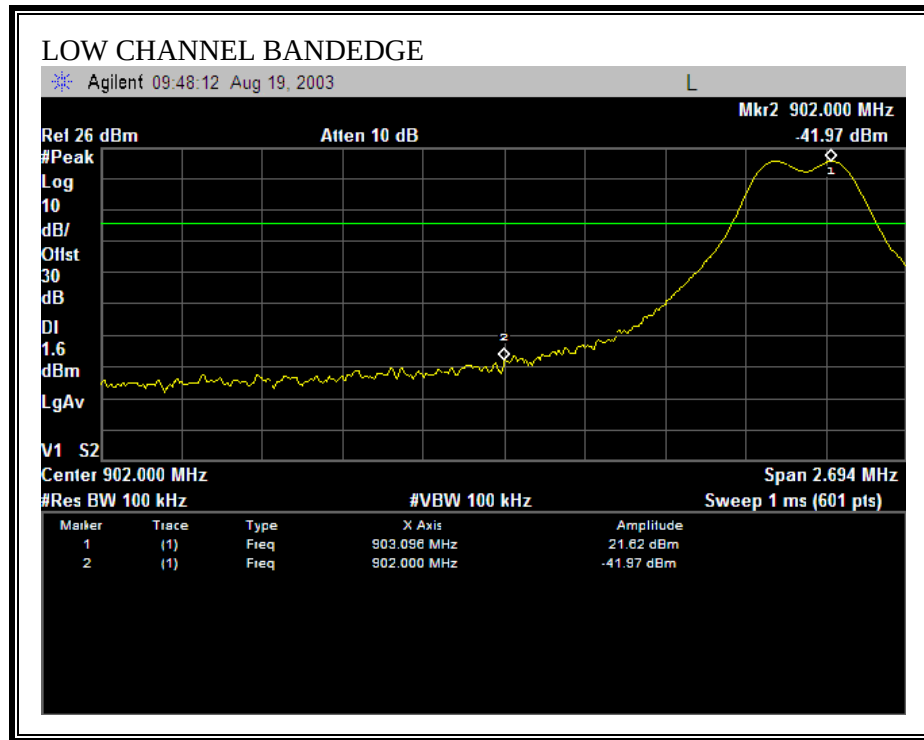

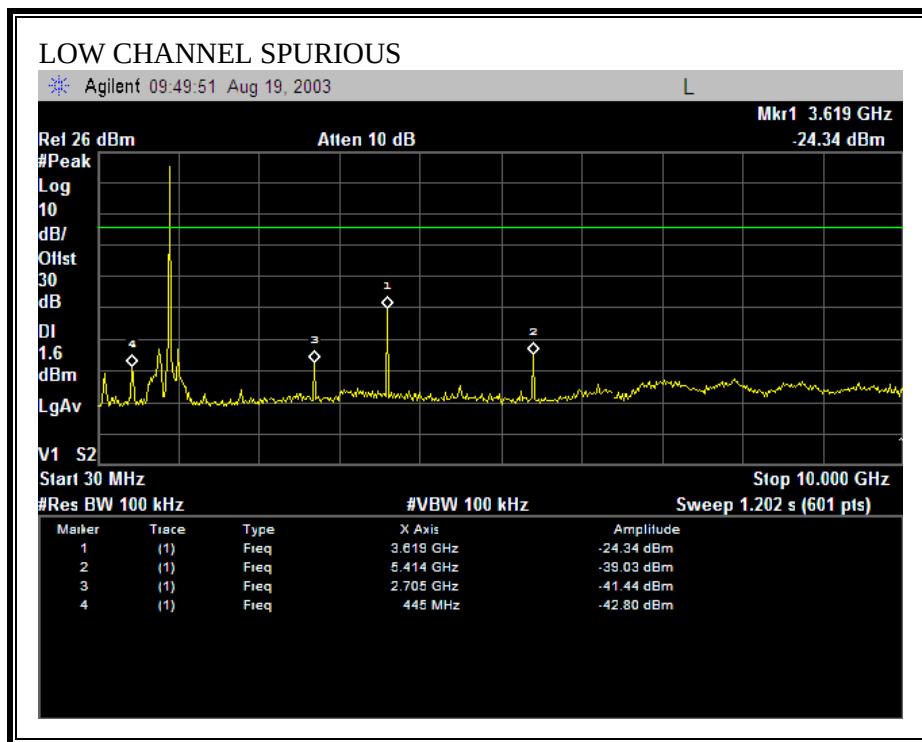



SPURIOUS EMISSIONS, MID CHANNEL

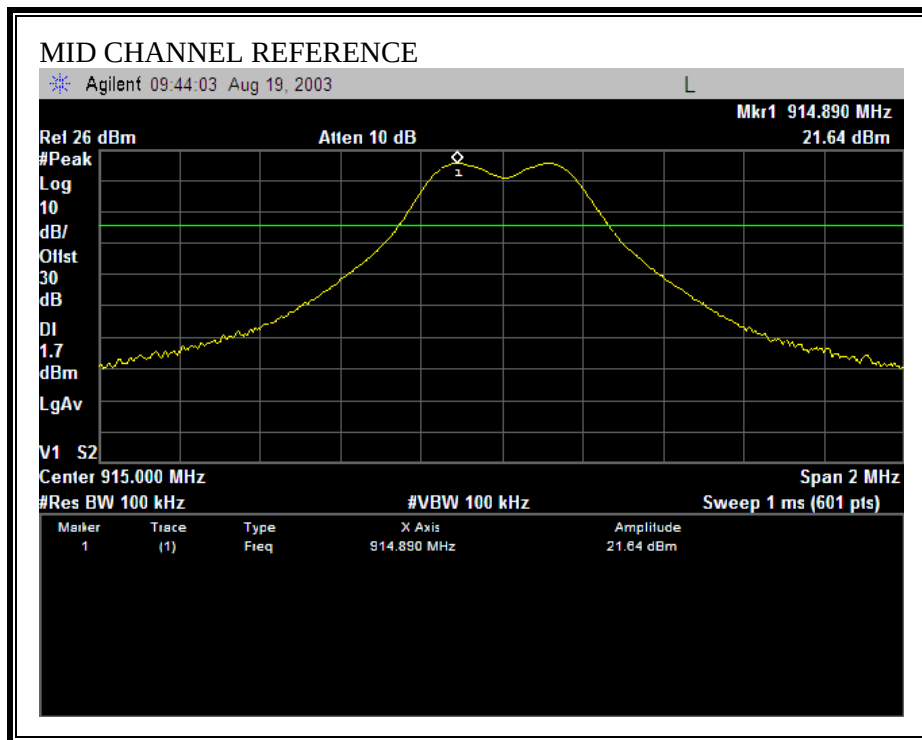

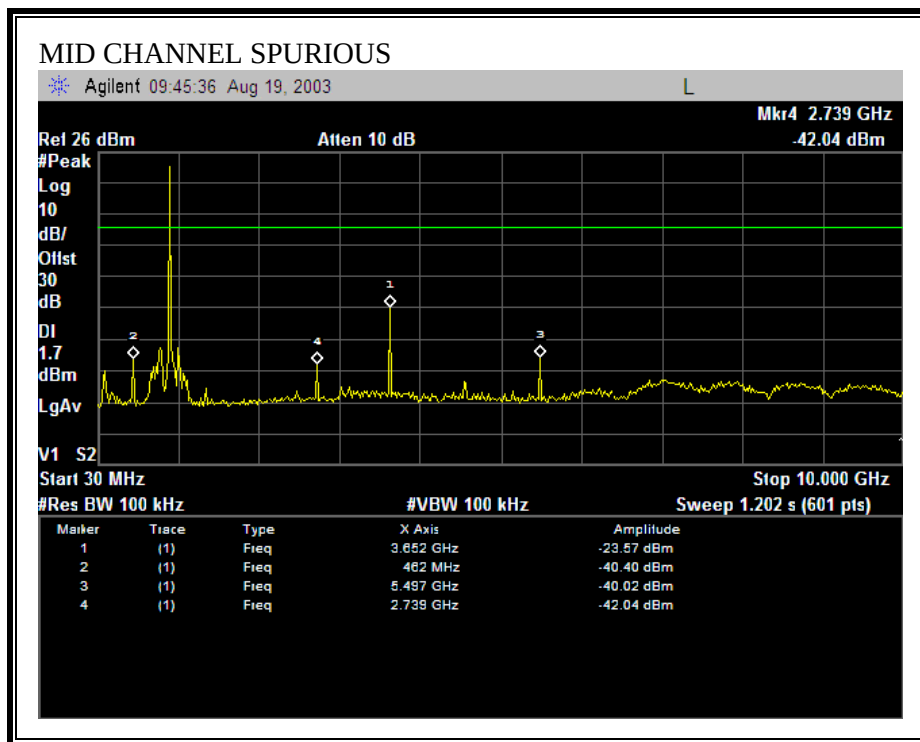



SPURIOUS EMISSIONS, HIGH CHANNEL

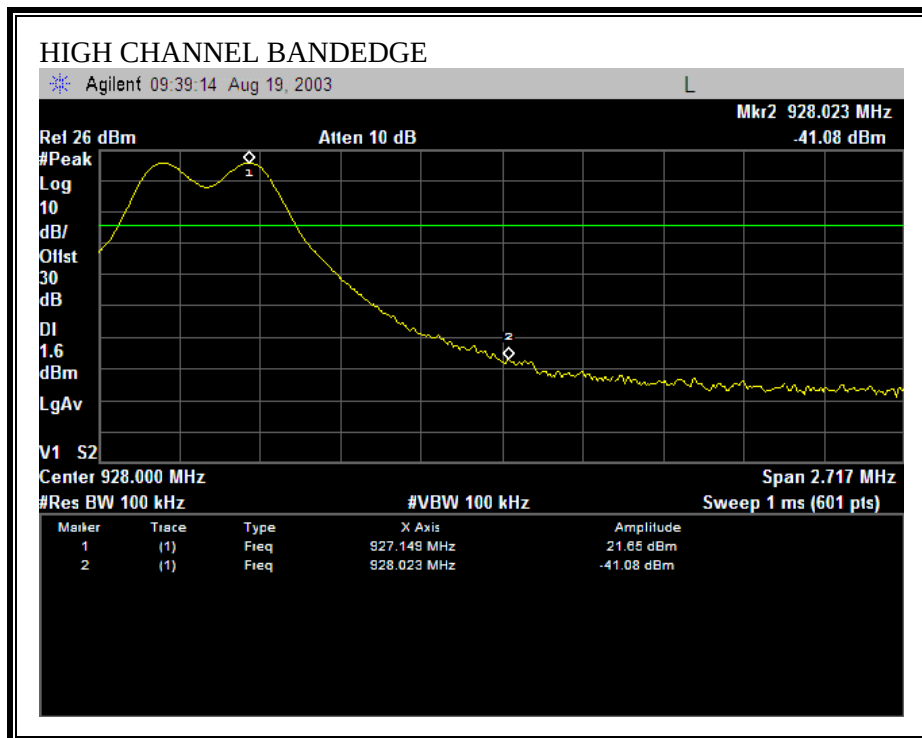

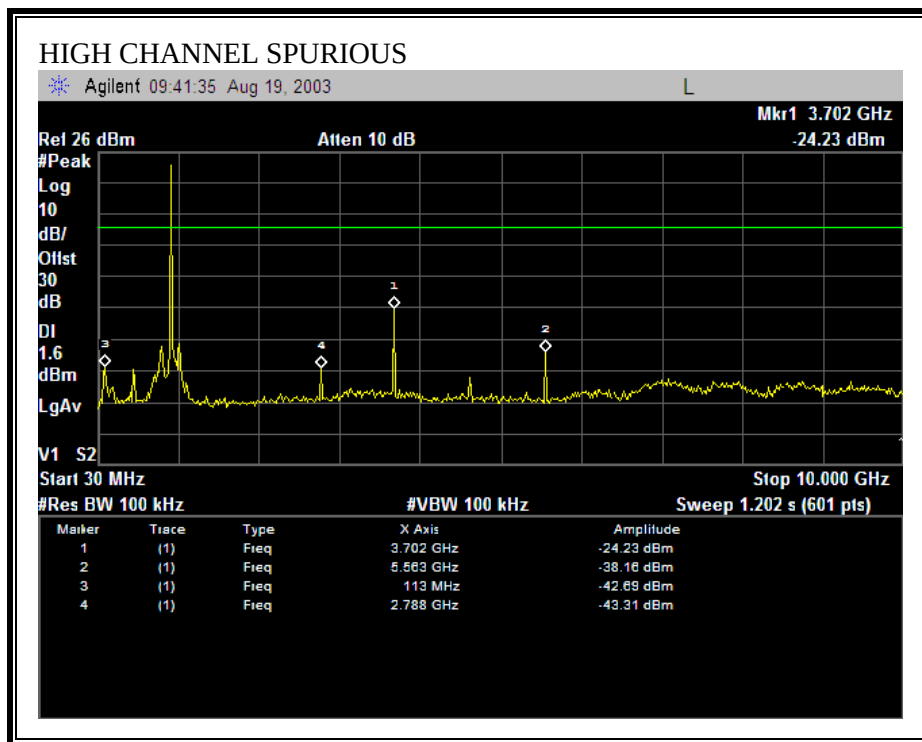

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

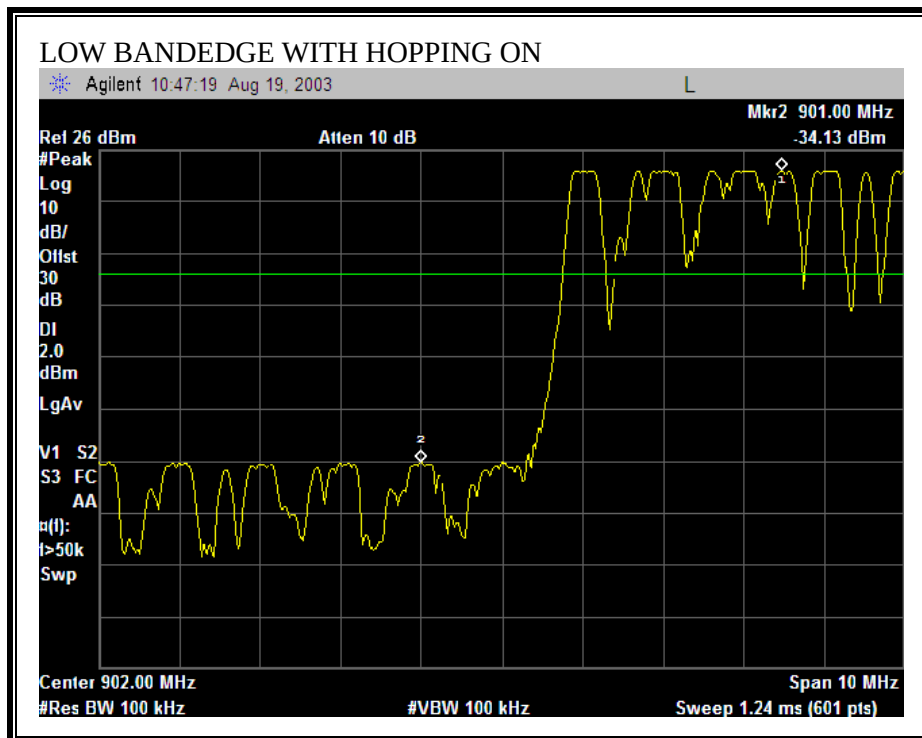

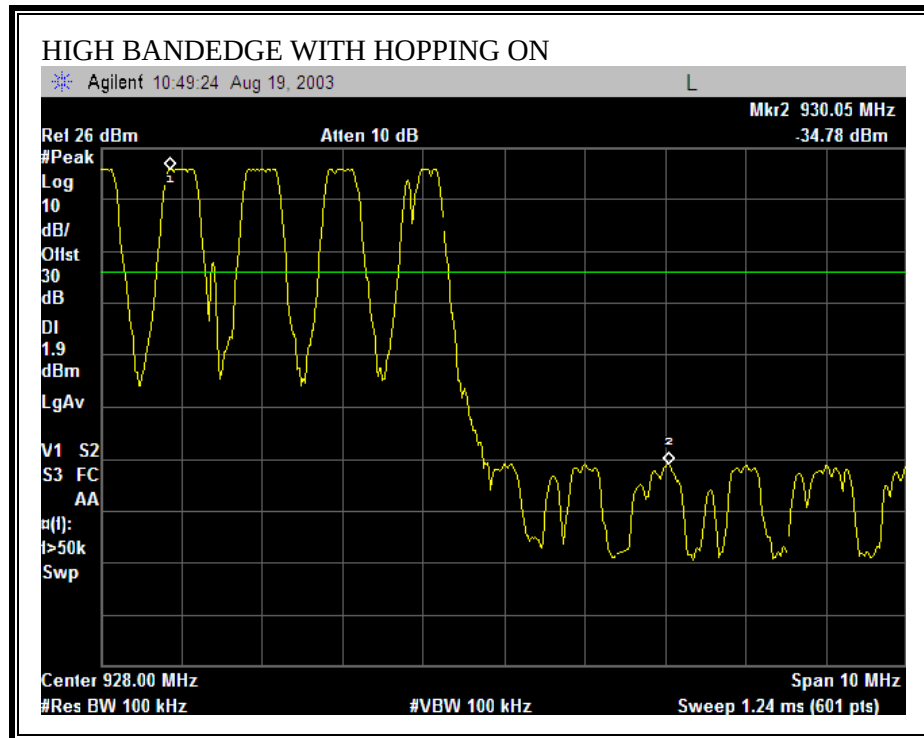

7.5. NUMBER OF HOPPING CHANNELS

LIMIT

§15.247 (a) (1) (iii) Frequency hopping systems in the 902-928 MHz band shall use at least 25 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 1 % of the span. The analyzer is set to Max Hold.

RESULTS

No non-compliance noted:

25 Channels observed.

NUMBER OF HOPPING CHANNELS

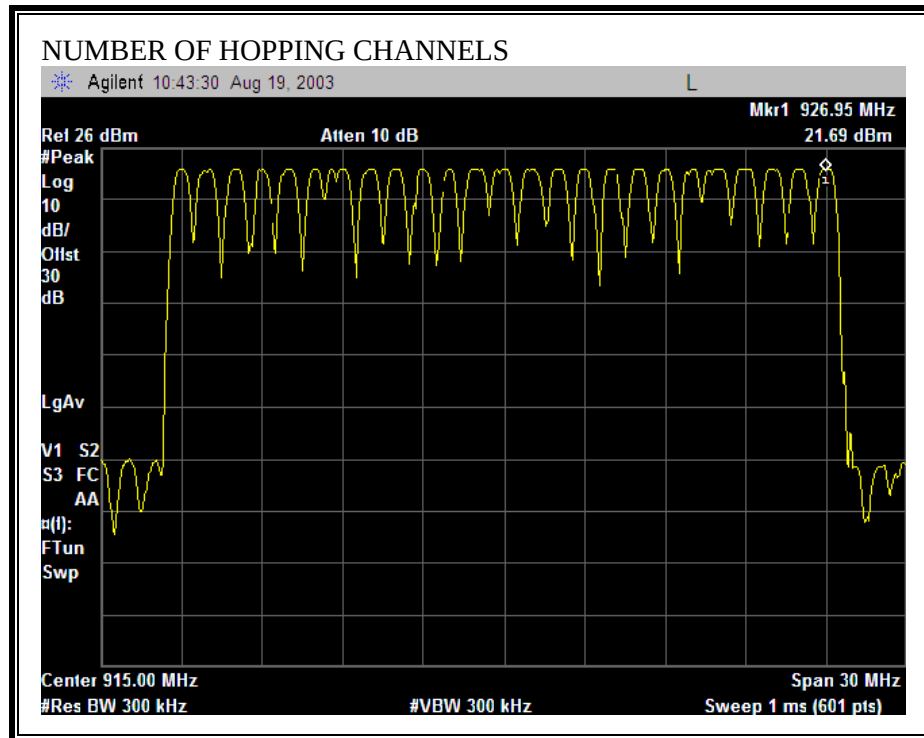

7.6. HOPPING FREQUENCY SEPARATION

LIMIT

§15.247 (a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.


RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	CHANNEL SEPARATION (kHz)	20 dB Bandwidth (kHz)	Margin (kHz)
Middle	915	1000	463	537

HOPPING FREQUENCY SEPARATION

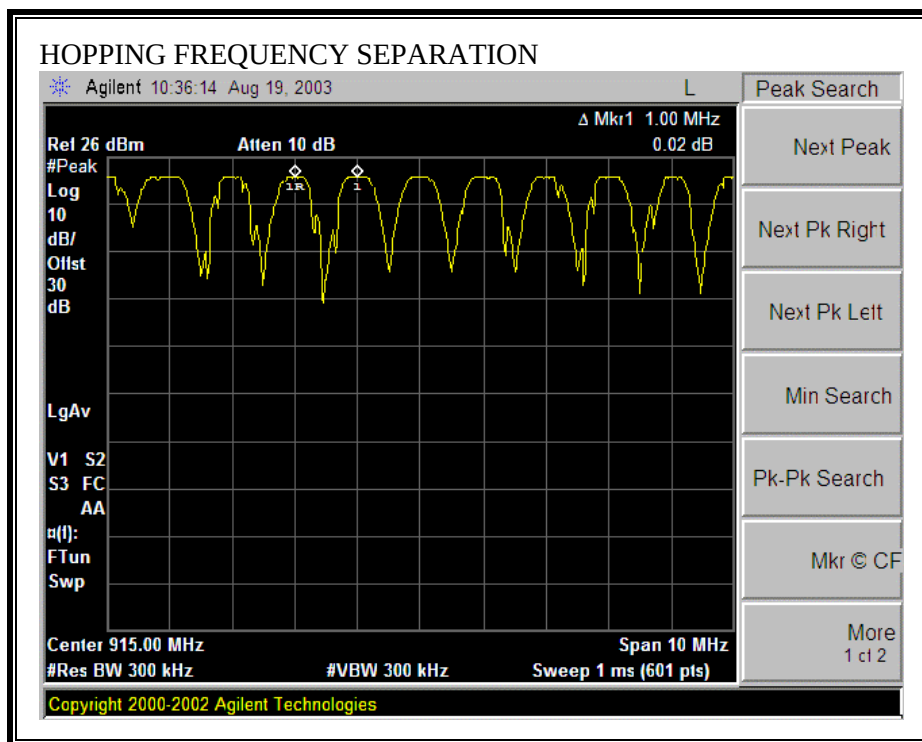

7.7. AVERAGE TIME OF OCCUPANCY

LIMIT

§15.247 (a) (1) (i) Frequency hopping systems in the 902-928 MHz band shall use at least 25 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a slow scan.


RESULTS

No non-compliance noted:

PULSE WIDTH

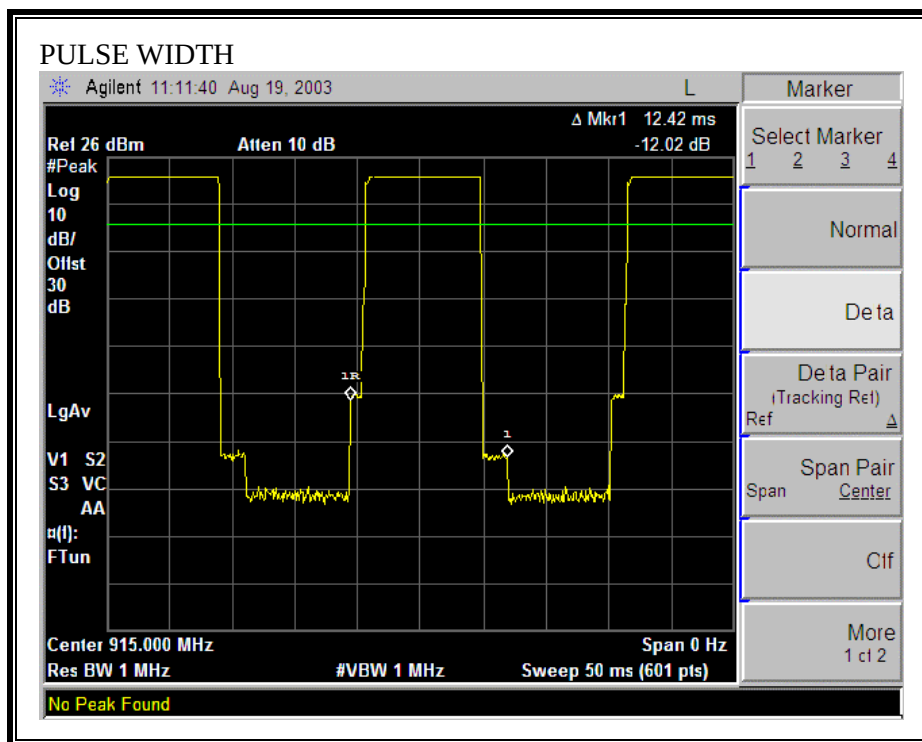

NUMBER OF PULSES

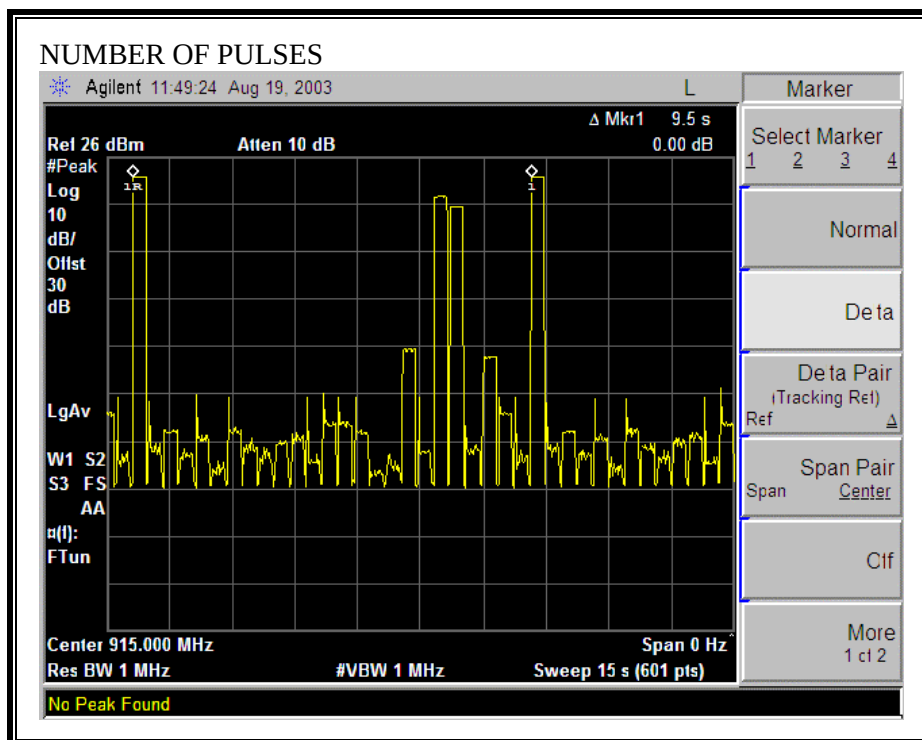

The two highest amplitude pulses occur when the channel frequency equals 915MHz. The lower amplitude pulses occur when the channel frequency is not equal to 915MHz. The amplitude of channel frequencies other than 915MHz will be a function of the delta frequency ($F_{\text{channel}} - 915$) and the fall-off of the 1MHz RBW filter in the spectrum analyzer.

7.8. RADIATED EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS

No non-compliance noted:

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL)

08/29/03 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Yan Zheng															
Project #: 03U2162															
Company: Worthdata															
EUT Descrip.: RF Base Station															
EUT M/N: B551															
Test Target: FCC 15.247															
Mode Oper: Transmitt															
Test Equipment:															
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Spectrum Analyzer		Horn > 18GHz		Limit							
T60; S/N: 2238 @1m		T87 Miteq 924342		Agilent E4446A Analyzer		T117; ARA 18-26GHz; S/N:1013		FCC 15.205							
Hi Frequency Cables										Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth					
☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)										Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth					
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	
Channel 1 (903MHz)															
2.709	9.8	46.8	34.5	30.7	3.1	-43.2	0.0	1.0	38.3	26.0	74.0	54.0	-35.7	-28.0	H
3.612	9.8	52.5	46.9	32.5	3.7	-43.7	0.0	1.0	46.0	40.4	74.0	54.0	-28.0	-13.6	H
4.515	9.8	48.4	35.2	33.5	4.2	-44.4	0.0	1.0	42.7	29.5	74.0	54.0	-31.3	-24.5	H
5.418	9.8	50.0	37.6	34.4	4.7	-44.8	0.0	1.0	45.3	32.9	74.0	54.0	-28.7	-21.1	H
8.127	9.8	47.7	35.8	38.1	6.1	-43.9	0.0	1.0	48.9	37.0	74.0	54.0	-25.1	-17.0	H
2.709	9.8	53.3	47.4	30.7	3.1	-43.2	0.0	1.0	44.9	38.9	74.0	54.0	-29.1	-15.1	V
3.612	9.8	57.8	51.2	32.5	3.7	-43.7	0.0	1.0	51.3	44.7	74.0	54.0	-22.7	-9.3	V
4.515	9.8	47.6	36.3	33.5	4.2	-44.4	0.0	1.0	41.9	30.6	74.0	54.0	-32.1	-23.4	V
5.418	9.8	52.5	43.1	34.4	4.7	-44.8	0.0	1.0	47.8	38.4	74.0	54.0	-26.2	-15.6	V
8.127	9.8	47.9	36.0	38.1	6.1	-43.9	0.0	1.0	49.1	37.2	74.0	54.0	-24.9	-16.8	V
NO OTHER EMISSIONS DETECTED ABOVE THE SYSTEM NOISE FLOOR															
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit								
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit								
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit								
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit								
CL	Cable Loss		HPF	High Pass Filter											

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL)

08/29/03 High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Test Engr: Yan Zheng																			
Project #: 03U2162																			
Company: Worthdata																			
EUT Descrip.: RF Base Station																			
EUT M/N: B551																			
Test Target: FCC 15.247																			
Mode Oper: Transmitt																			
Test Equipment:																			
EMCO Horn 1-18GHz				Pre-amplifier 1-26GHz				Spectrum Analyzer				Horn > 18GHz				Limit			
T60; S/N: 2238 @1m				T87 Miteq 924342				Agilent E4446A Analyzer				T117; ARA 18-26GHz; S/N:1013				FCC 15.205			
☐ Hi Frequency Cables ☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)																			
Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																			
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes				
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB					
Channel 12 (915MHz)																			
2.745	9.8	47.5	34.4	30.8	3.1	-43.2	0.0	1.0	39.2	26.1	74.0	54.0	-34.8	-27.9	H				
3.660	9.8	50.8	41.3	32.6	3.7	-43.7	0.0	1.0	44.4	34.9	74.0	54.0	-29.6	-19.1	H				
2.745	9.8	48.5	35.1	30.8	3.1	-43.2	0.0	1.0	40.2	26.8	74.0	54.0	-33.8	-27.2	V				
3.660	9.8	51.7	43.4	32.6	3.7	-43.7	0.0	1.0	45.3	37.0	74.0	54.0	-28.7	-17.0	V				
NO OTHER EMISSIONS DETECTED ABOVE THE SYSTEM NOISE FLOOR																			
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL)

08/29/03 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Yan Zheng
Project #: 03U2162
Company: Worthdata
EUT Descrip.: RF Base Station
EUT M/N: B551
Test Target: FCC 15.247
Mode Oper: Transmitt

Test Equipment:

EMCO Horn 1-18GHz
T60; S/N: 2238 @1m

Pre-amplifier 1-26GHz
T87 Miteq 924342

Spectrum Analyzer
Agilent E4446A Analyzer

Horn > 18GHz
T117; ARA 18-26GHz; S/N:1013

Limit
FCC 15.205

Hi Frequency Cables
☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	
Channel 24 (927MHz)															
2.781	9.8	47.4	33.9	30.9	3.1	-43.2	0.0	1.0	39.2	25.7	74.0	54.0	-34.8	-28.3	H
3.708	9.8	48.8	37.9	32.7	3.8	-43.7	0.0	1.0	42.5	31.6	74.0	54.0	-31.5	-22.4	H
2.781	9.8	48.2	36.1	30.9	3.1	-43.2	0.0	1.0	40.0	27.9	74.0	54.0	-34.0	-26.1	V
3.708	9.8	50.9	41.4	32.7	3.8	-43.7	0.0	1.0	44.6	35.1	74.0	54.0	-29.4	-18.9	V
NO OTHER EMISSIONS DETECTED ABOVE THE SYSTEM NOISE FLOOR															

f Measurement Frequency

Dist Distance to Antenna

Read Analyzer Reading

AF Antenna Factor

CL Cable Loss

Amp Preamp Gain

D Corr Distance Correct to 3 meters

Avg Average Field Strength @ 3 m

Peak Calculated Peak Field Strength

HPF High Pass Filter

Avg Lim Average Field Strength Limit

Pk Lim Peak Field Strength Limit

Avg Mar Margin vs. Average Limit

Pk Mar Margin vs. Peak Limit

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION) (VERTICAL)

Condition: FCC CLASS B 3m CHAMBER 030306 1185 VERTICAL
Company : WORTH DATA, INC.
EUT Description : 900MHz SS TRANSMITTER
Model Number : B551 BASE
Test Configuration: BASE/PROGRAMMER/AC ADAP.
Tester : NEELESH RAJ
Test Target : FCC-A
Mode of Operation: TX (915 MHz)
Project No : 03U2162

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	462.140	27.71	15.80	2.22	0.00	45.73	46.00	-0.27	Peak
2	462.140	27.05	15.80	2.22	0.00	45.07	46.00	-0.93	QP
3	802.440	16.67	19.82	3.02	0.00	39.51	46.00	-6.49	Peak
4	812.280	15.19	19.89	3.01	0.00	38.09	46.00	-7.91	Peak
5	820.480	14.73	19.97	3.03	0.00	37.73	46.00	-8.27	Peak
1	954.700	16.43	20.94	3.40	0.00	40.76	46.40	-5.64	Peak
2	954.950	16.10	20.94	3.40	0.00	40.44	46.40	-5.96	Peak
3	964.850	14.56	21.00	3.43	0.00	38.99	49.50	-10.51	Peak
4	965.100	14.45	21.00	3.42	0.00	38.87	49.50	-10.63	Peak
5	974.950	13.68	21.06	3.38	0.00	38.12	49.50	-11.38	Peak
6	975.200	12.98	21.06	3.38	0.00	37.42	49.50	-12.08	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION) (HORIZONTAL)

Condition: FCC CLASS-A 3m CHAMBER 030306 1185 HORIZONTAL
Company : WORTH DATA, INC.
EUT Description : 900MHz SS TRANSMITTER
Model Number : B551 BASE
Test Configuration: BASE/PROGRAMMER/AC ADAP.
Tester : NEELESH RAJ
Test Target : FCC-A
Mode of Operation: TX (915 MHz)
Project No : 03U2162

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	76.740	12.27	7.04	0.80	0.00	20.11	39.00	-18.89	Peak
2	455.580	9.08	15.67	2.20	0.00	26.95	46.40	-19.45	Peak
3	462.140	21.57	15.80	2.22	0.00	39.59	46.40	-6.81	Peak
4	470.340	9.42	15.97	2.22	0.00	27.61	46.40	-18.79	Peak
5	722.080	6.41	18.84	2.80	0.00	28.05	46.40	-18.35	Peak
6	753.240	5.17	19.24	2.92	0.00	27.33	46.40	-19.07	Peak
7	779.480	5.10	19.56	2.99	0.00	27.65	46.40	-18.75	Peak
8	786.040	5.32	19.64	2.99	0.00	27.94	46.40	-18.46	Peak
9	794.240	7.44	19.74	3.01	0.00	30.19	46.40	-16.21	Peak
10	802.440	10.72	19.82	3.02	0.00	33.56	46.40	-12.84	Peak
11	814.740	7.61	19.92	3.01	0.00	30.54	46.40	-15.86	Peak
12	824.580	7.34	20.00	3.03	0.00	30.37	46.40	-16.03	Peak
13	845.080	3.48	20.16	3.13	0.00	26.77	46.40	-19.63	Peak
1	954.750	6.83	20.94	3.40	0.00	31.16	46.40	-15.24	Peak
2	964.850	4.49	21.00	3.43	0.00	28.92	49.50	-20.58	Peak

7.9. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.19	49.69	--	--	0.00	64.86	54.86	-15.17	-5.17	L1
2.92	34.78	--	--	0.00	56.00	46.00	-21.22	-11.22	L1
7.85	28.99	--	--	0.00	60.00	50.00	-31.01	-21.01	L1
0.19	46.66	--	--	0.00	64.86	54.86	-18.20	-8.20	L2
2.07	34.85	--	--	0.00	56.00	46.00	-21.15	-11.15	L2
20.27	25.44	--	--	0.00	60.00	50.00	-34.56	-24.56	L2
6 Worst Data									

LINE 1 AND LINE 2 RESULTS

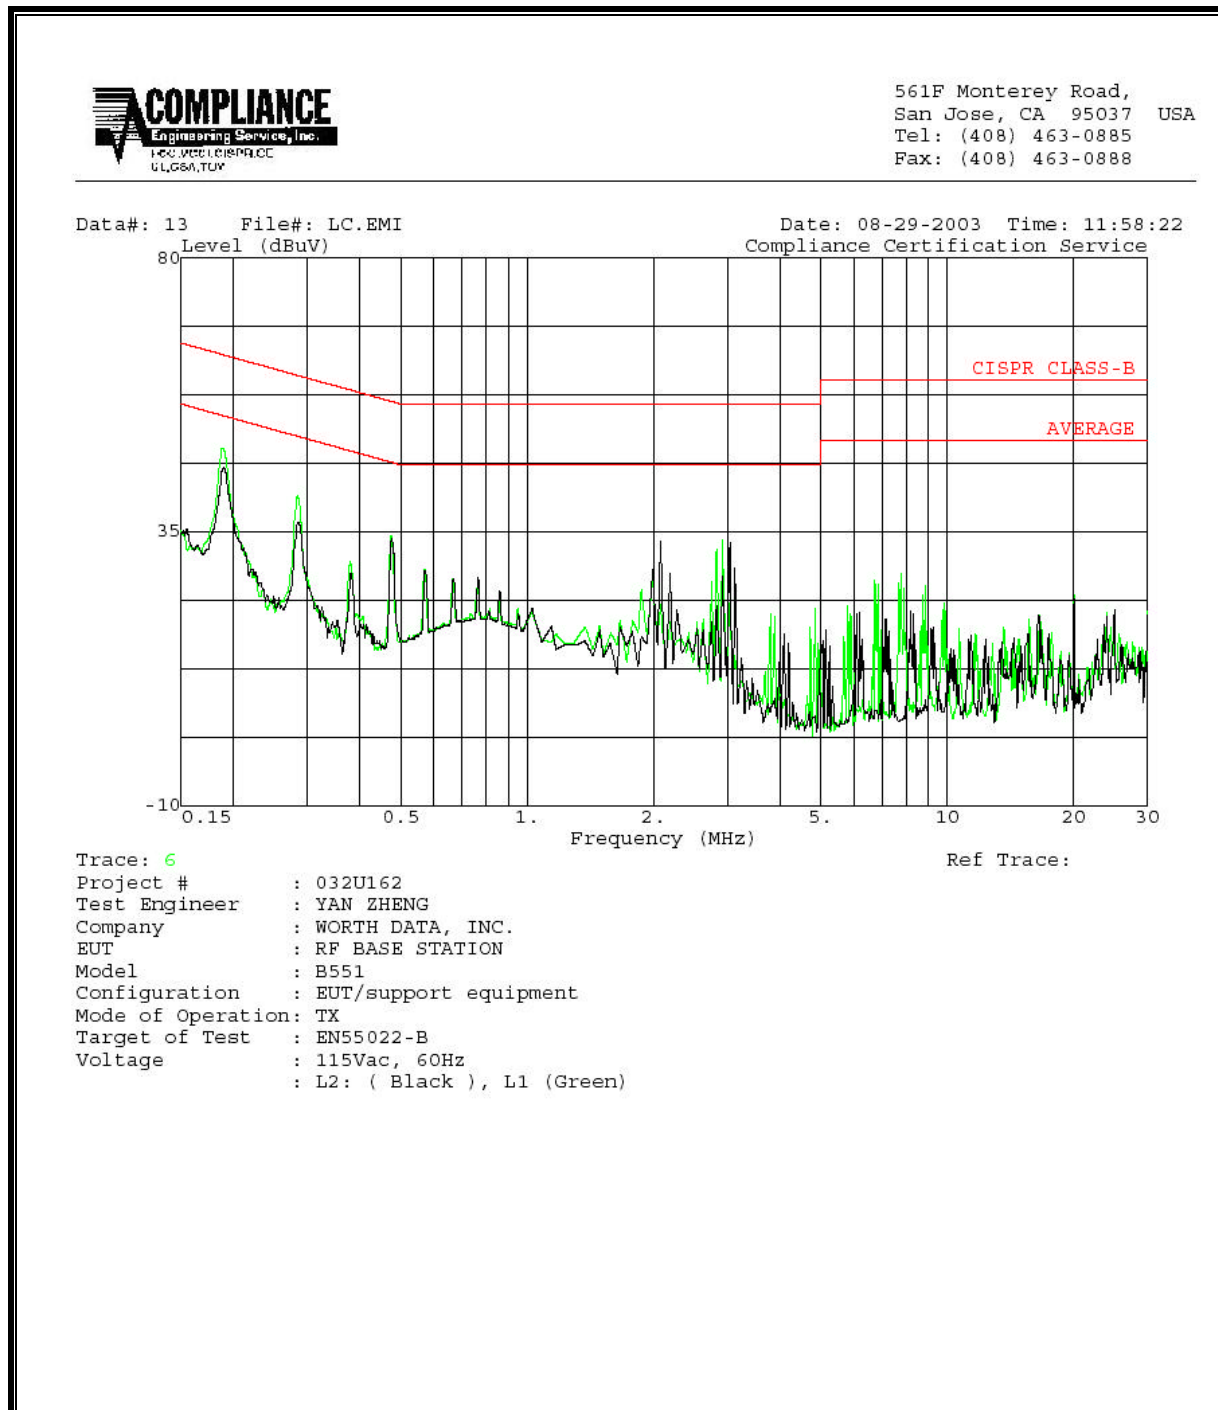

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

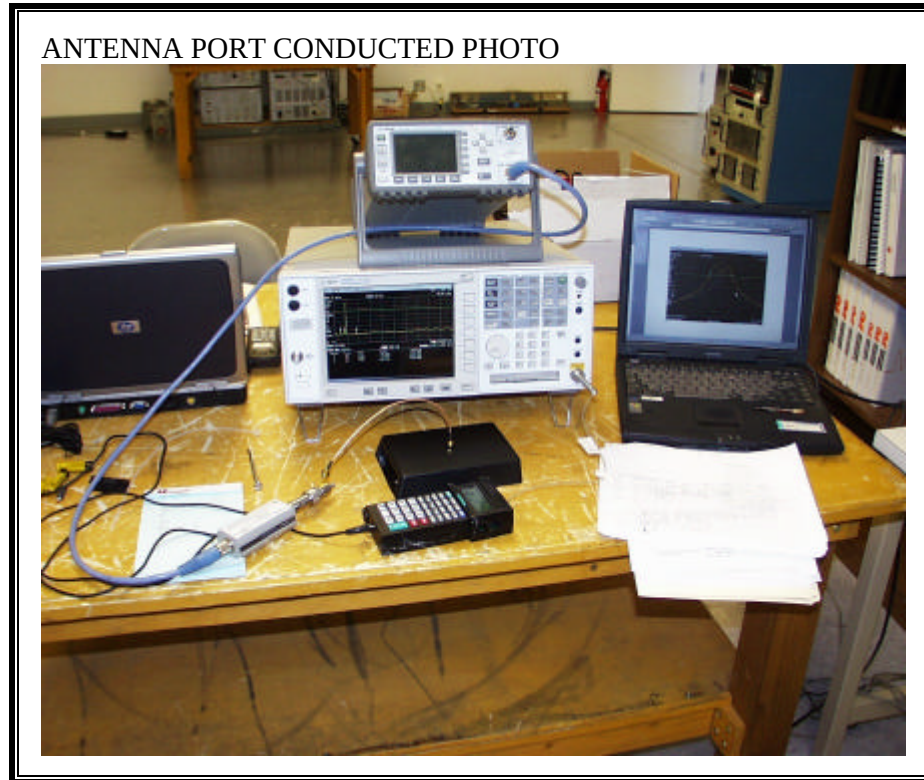


RADIATED RF MEASUREMENT SETUP



DIGITAL DEVICE RADIATED EMISSIONS SETUP



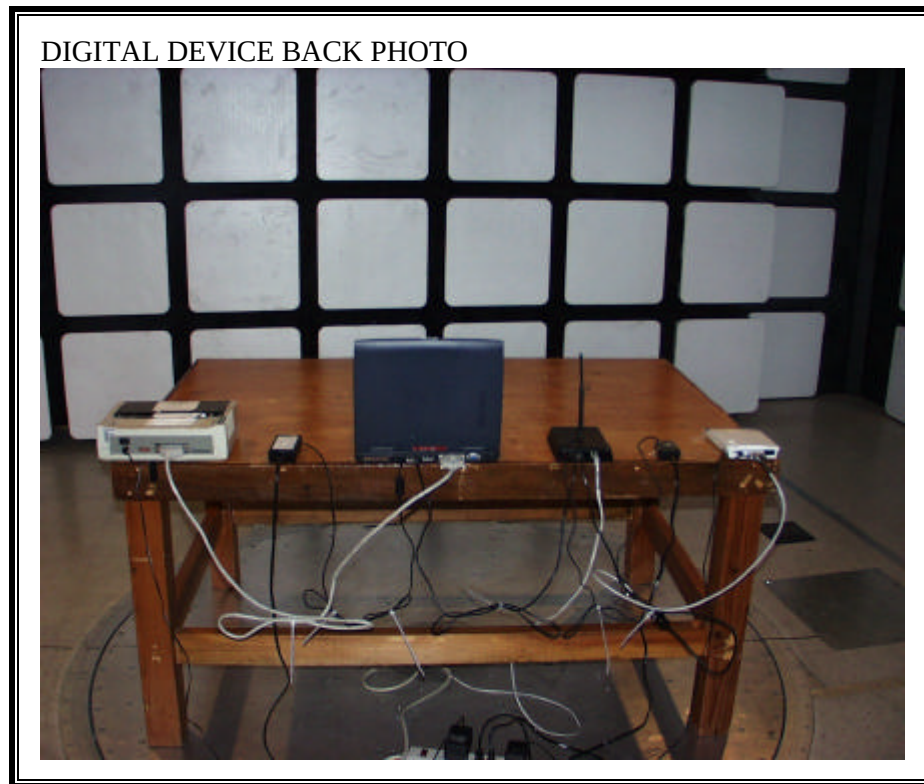

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT