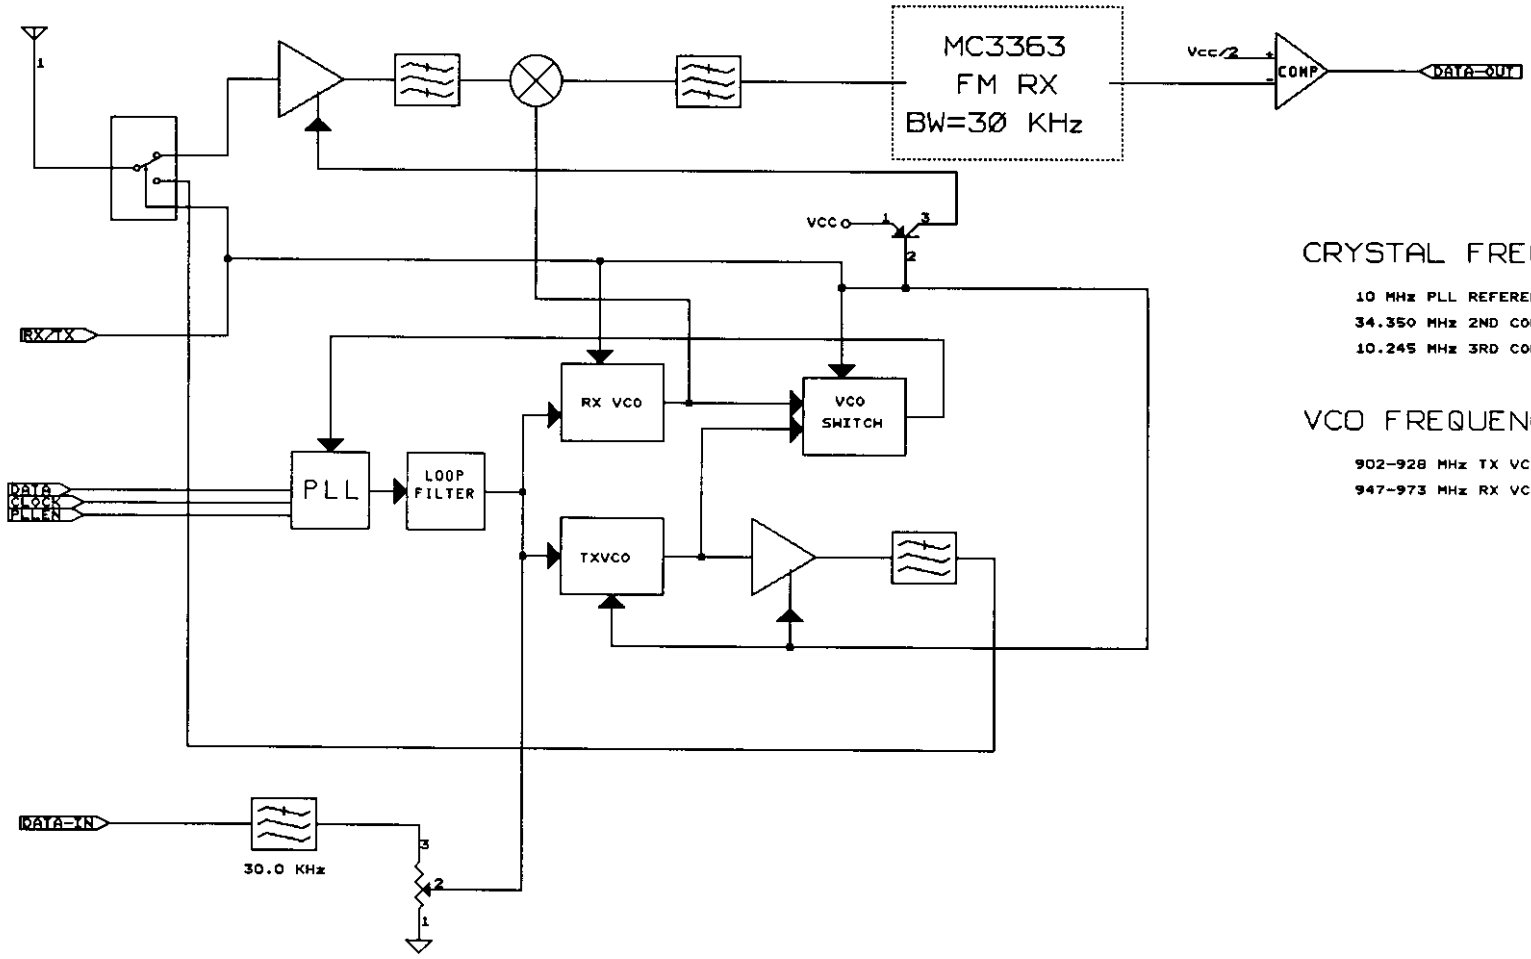


CRYSTAL FREQUENCIES:

10 MHz PLL REFERENCE
34.350 MHz 2ND CONVERSION (3363)
10.245 MHz 3RD CONVERSION (3363)

VCO FREQUENCIES:

902-928 MHz TX VCO
947-973 MHz RX VCO

NOTES:

1). DURING STBY ALL CKTS POWERED DOWN, Vcc REMOVED IF NECESSARY
2). DURING RX, TX IS POWERD DOWN
3). DURING TX, RX IS POWERED DOWN

NORTHINGTON DATA SOLUTIONS
3004 MISSION ST. SUITE 220
SANTA CRUZ, CA. 95060

Title: 900 MHz RADIO BLOCK DIAGRAM

Size: B | Document Number: | REV: A

Date: September 25, 1996 Sheet of