


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 1.37 dBm VBW 1 MHz
25 dBm 2.40182465 GHz SWT 5 ms Unit dBm

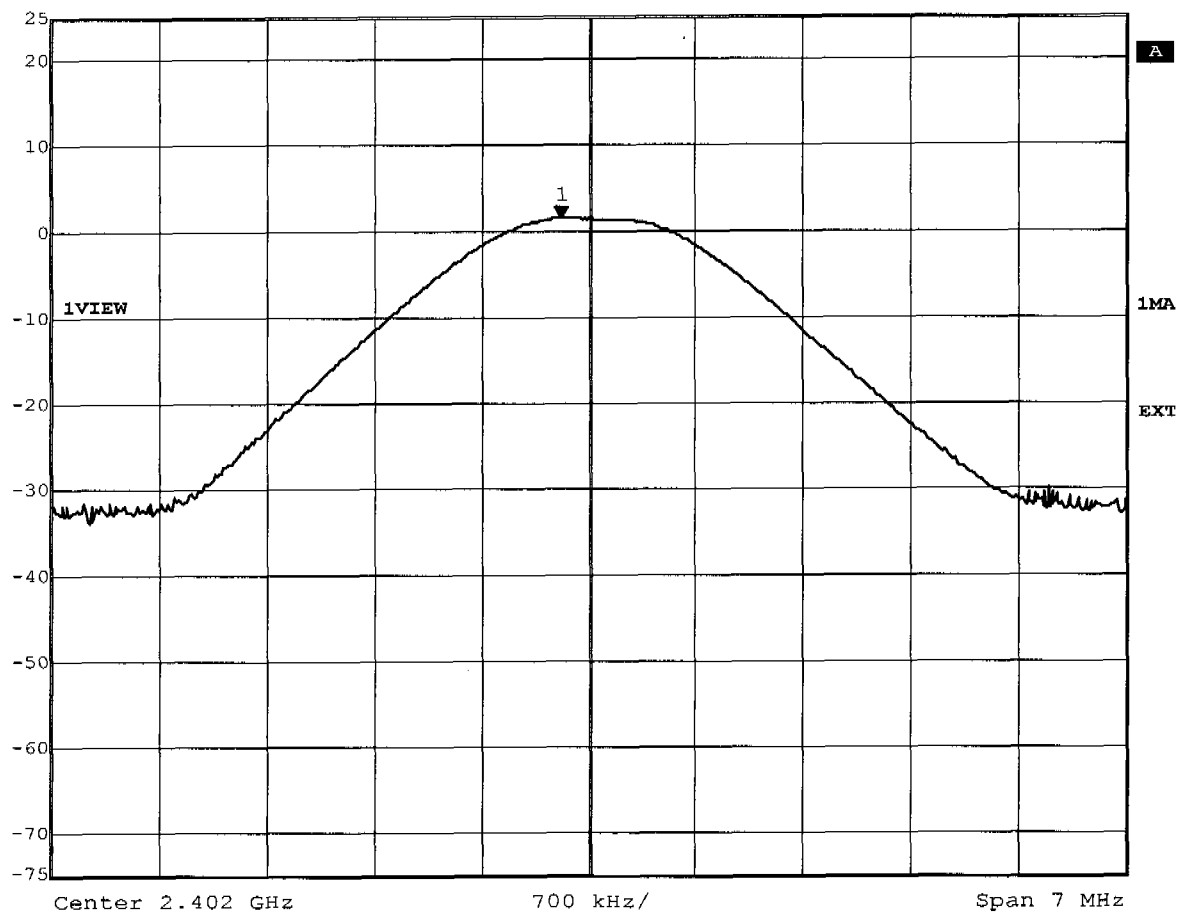

Title: Peak Output Power conducted Ch.: 0
Comment A: G800
Date: 2.FEB.2004 08:19:33




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	1.25 dBm	VBW	1 MHz	
25 dBm	2.44083868 GHz	SWT	5 ms	Unit dBm

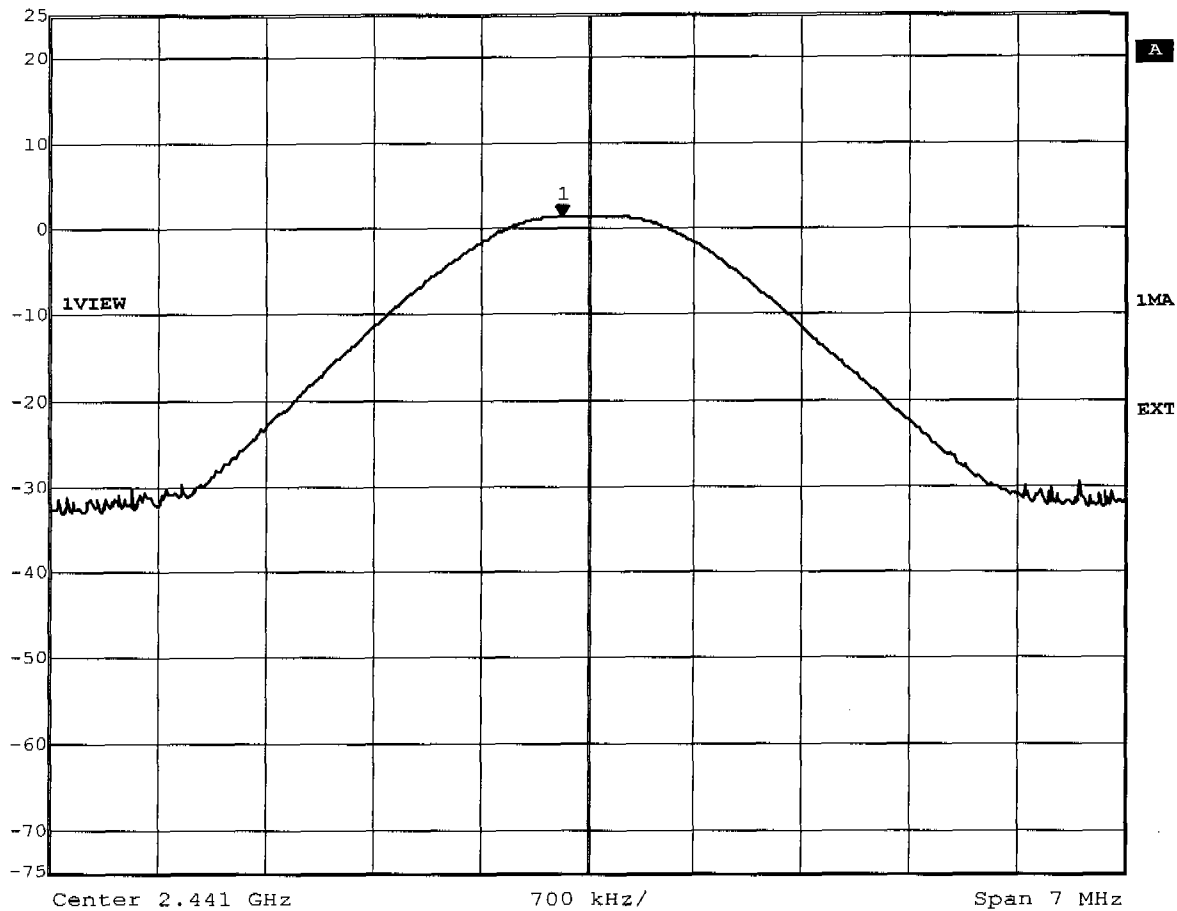

Title: Peak Output Power conducted Ch.: 39
Comment A: G800
Date: 2.FEB.2004 08:18:37




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	0.83 dBm	VBW	1 MHz	
25 dBm	2.47983868 GHz	SWT	5 ms	Unit dBm

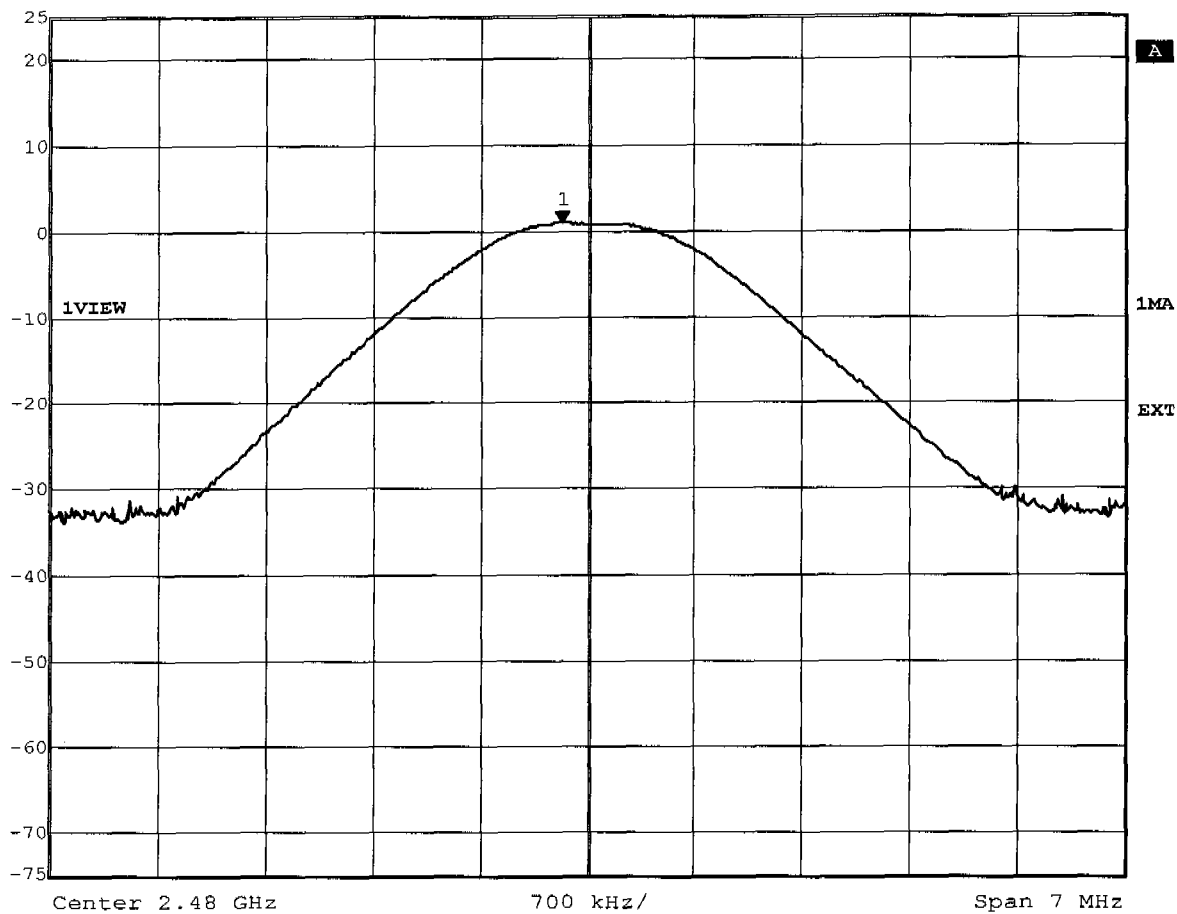

Title: Peak Output Power conducted Ch.: 78
Comment A: G800
Date: 2.FEB.2004 08:20:25


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: -10.75dBm, RBW: 5MHz

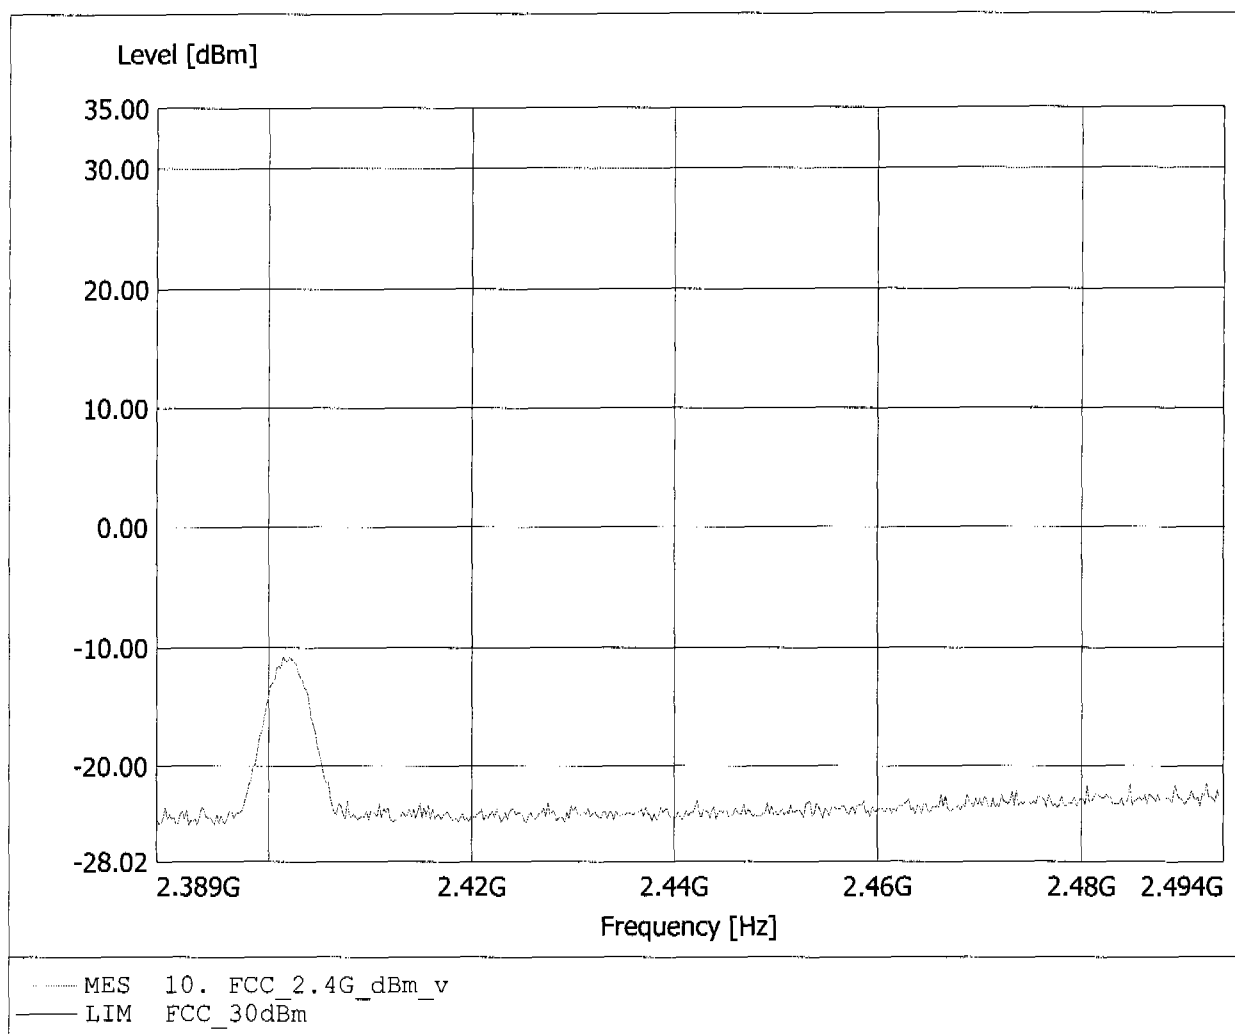


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.30dBm, RBW: 5MHz

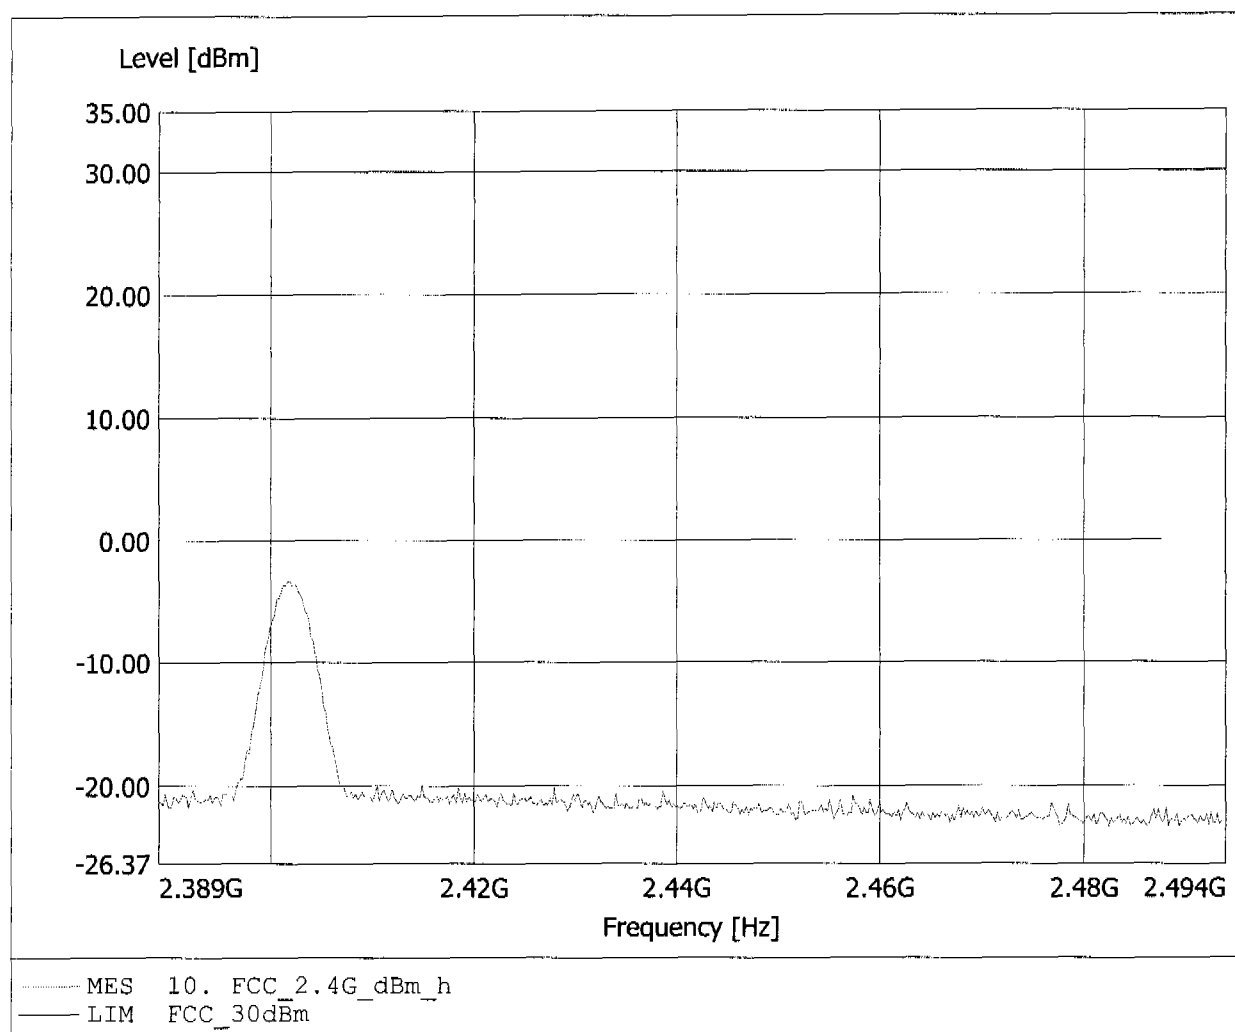


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -5.44dBm, RBW: 5MHz

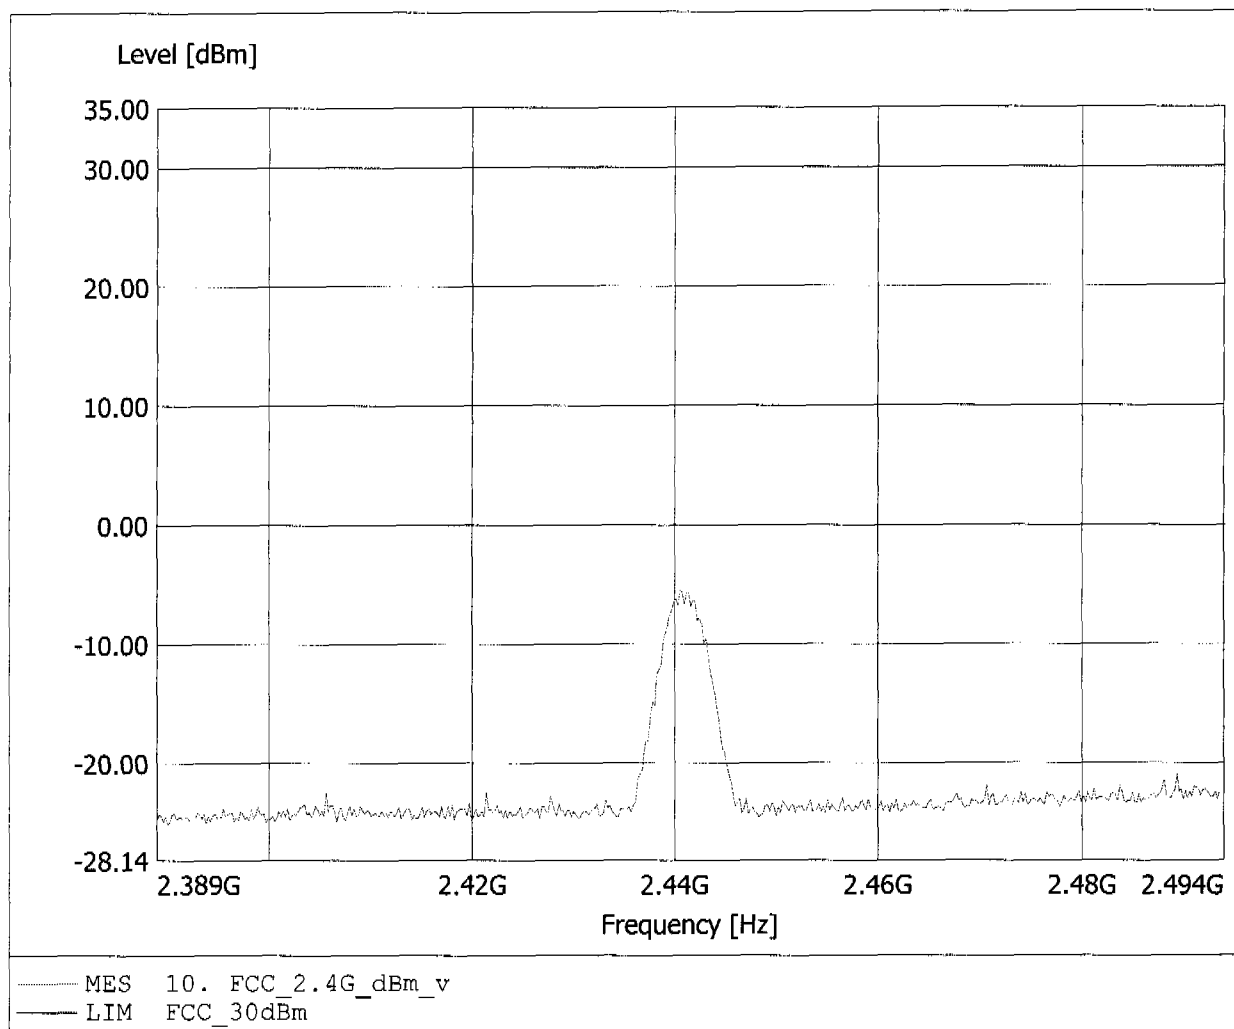


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -1.35dBm, RBW: 5MHz

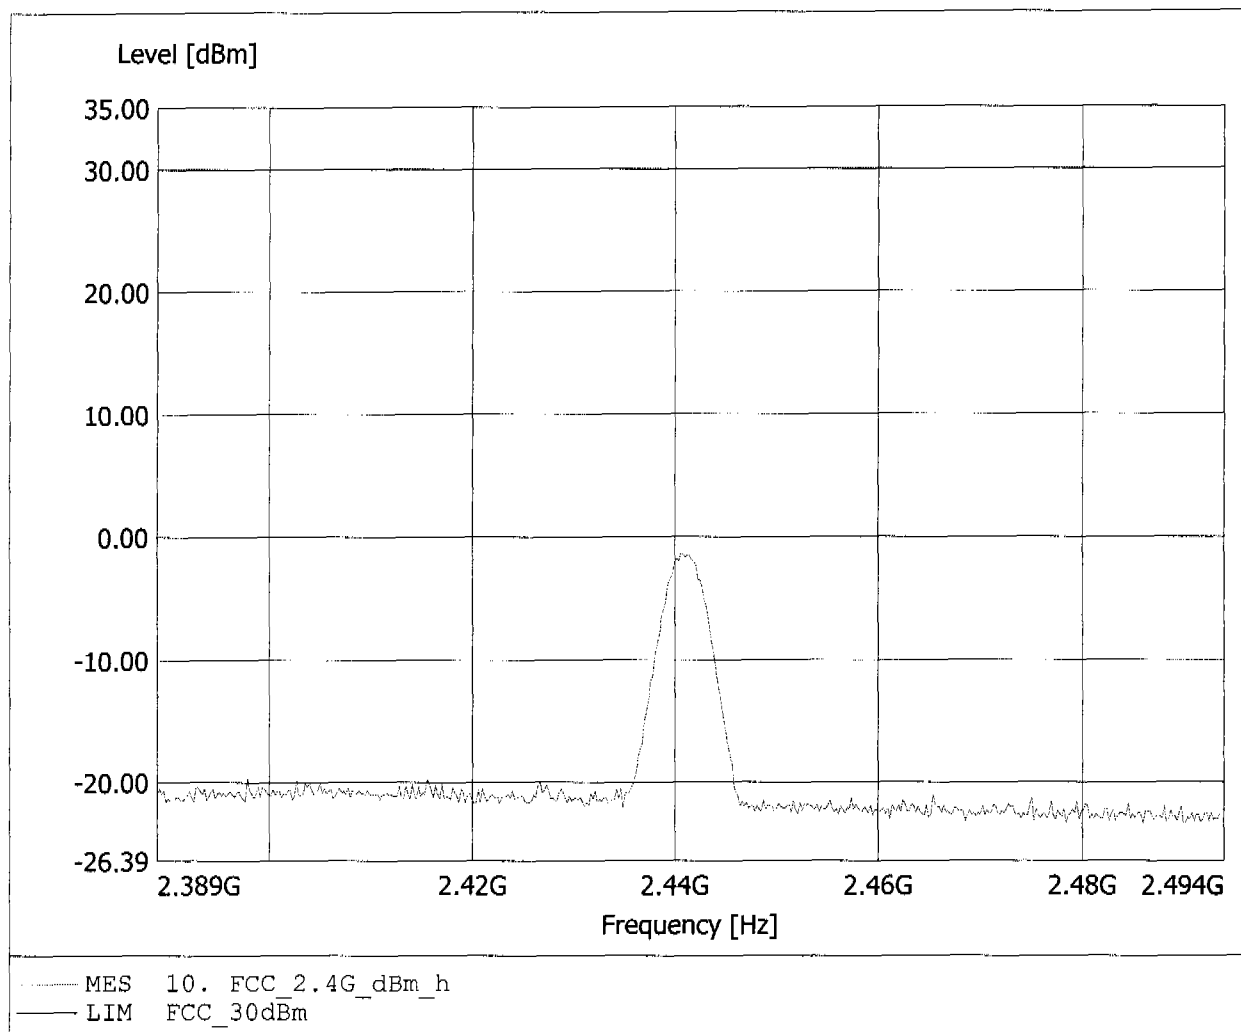


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -3.58dBm, RBW: 5MHz

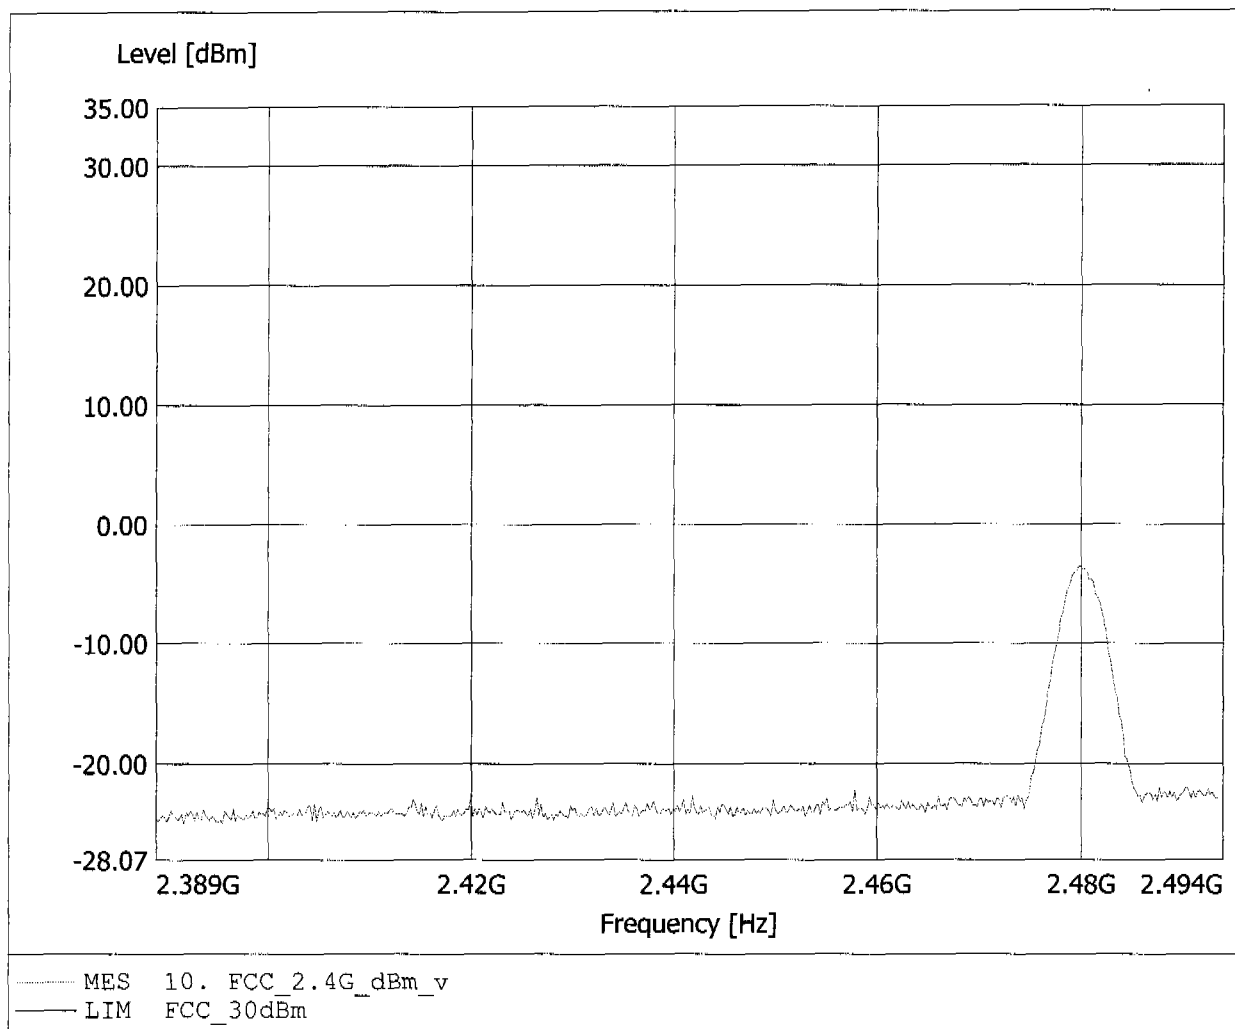


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -1.74dBm, RBW: 5MHz

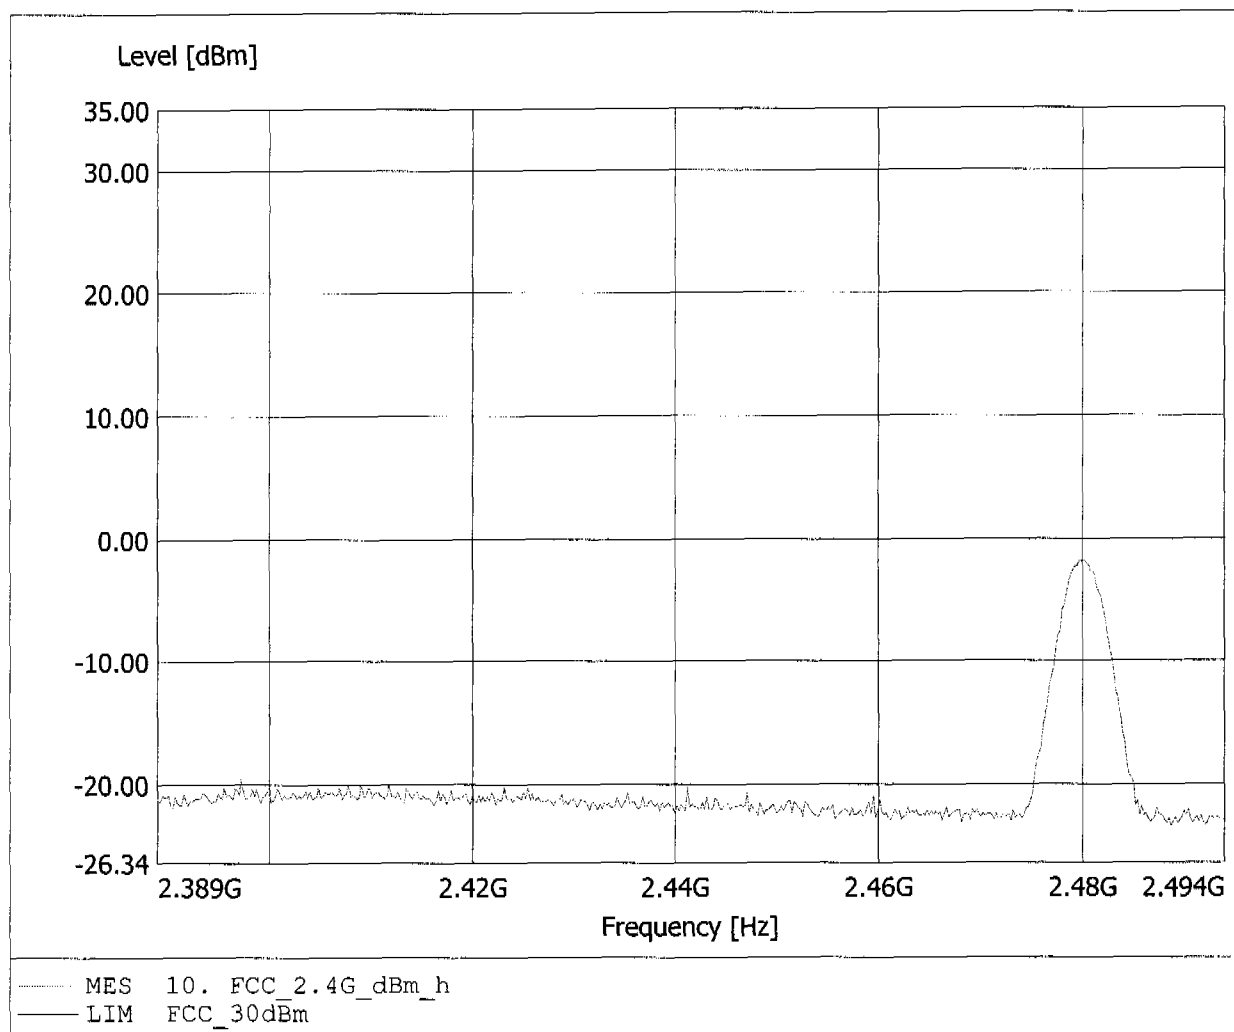


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: -10.81dBm, RBW: 5MHz

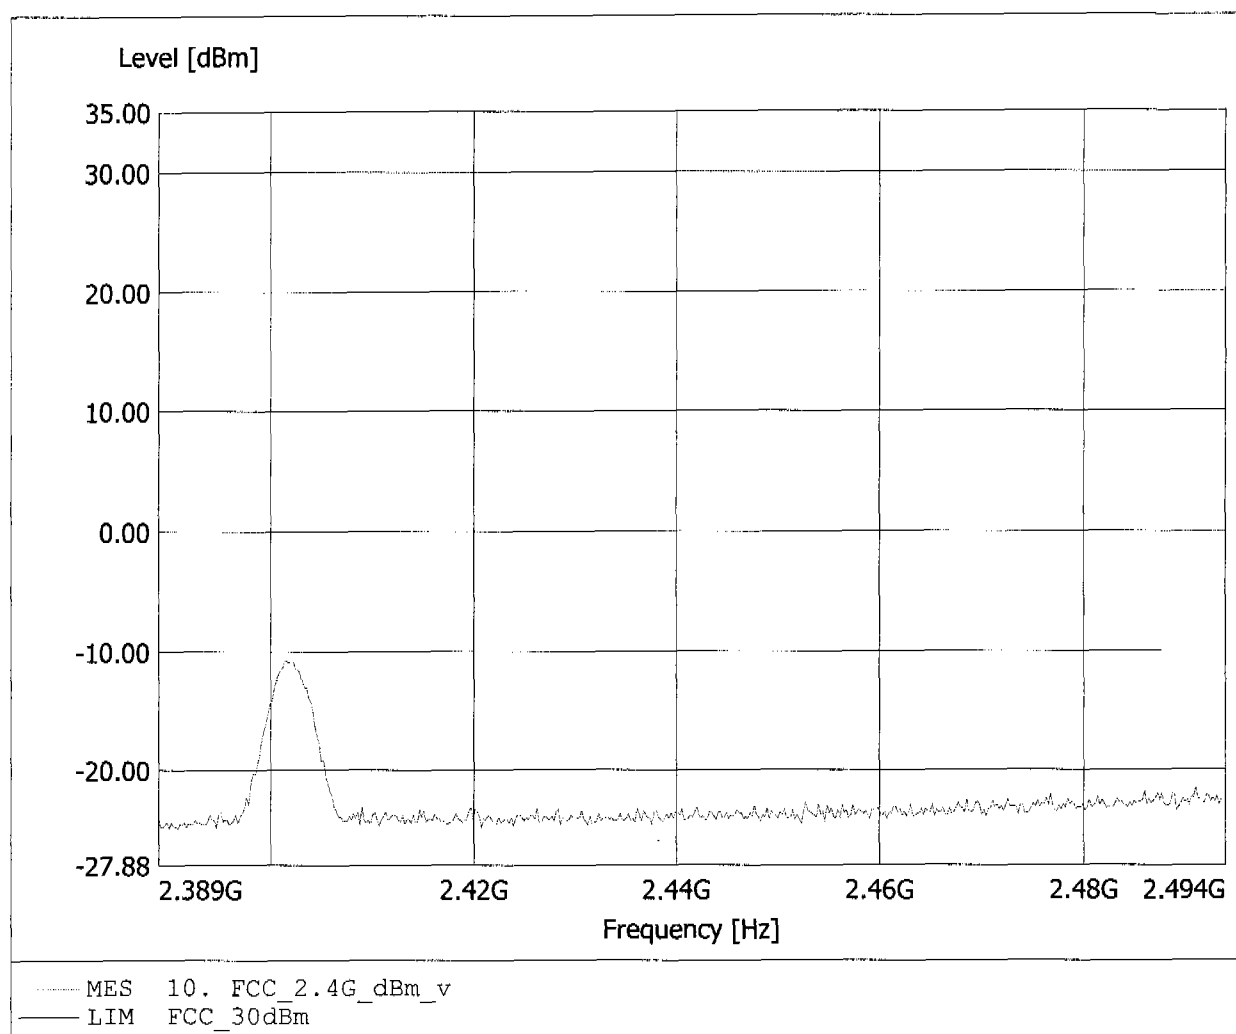


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.45dBm, RBW: 5MHz

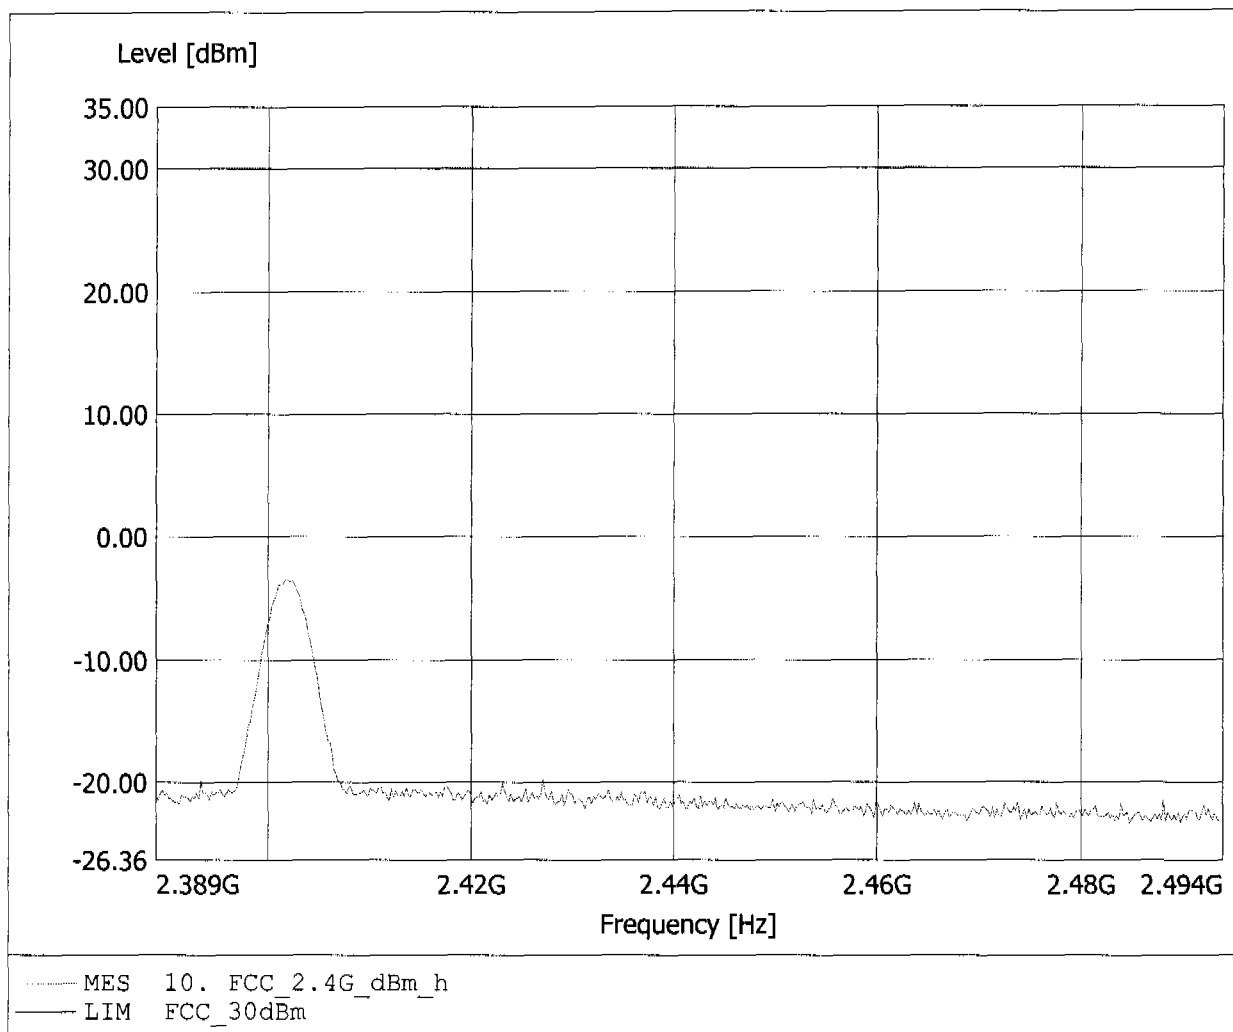


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -5.51dBm, RBW: 5MHz

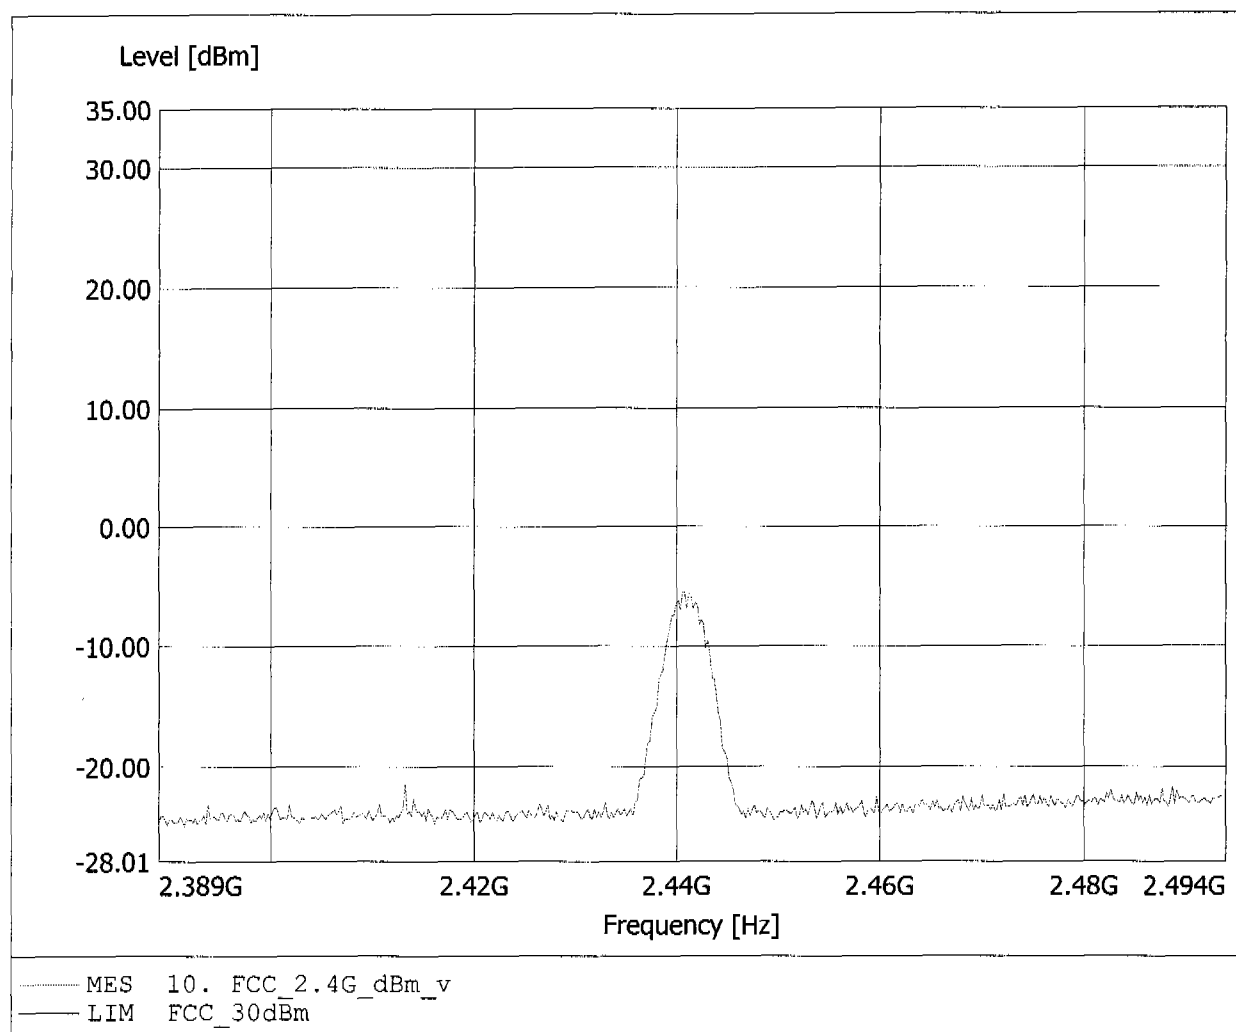


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -1.46dBm, RBW: 5MHz

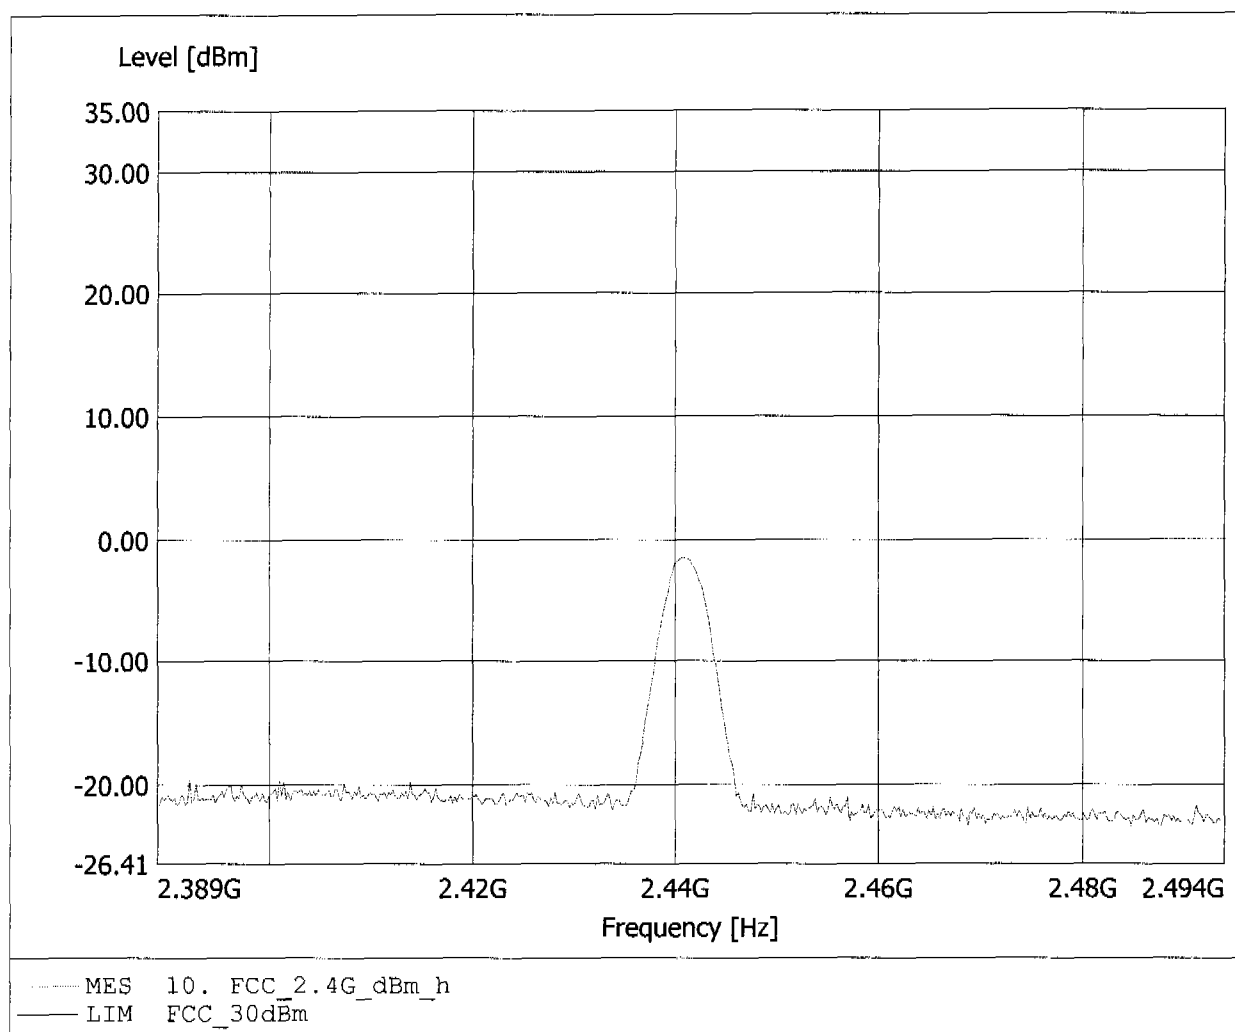


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -3.75dBm, RBW: 5MHz

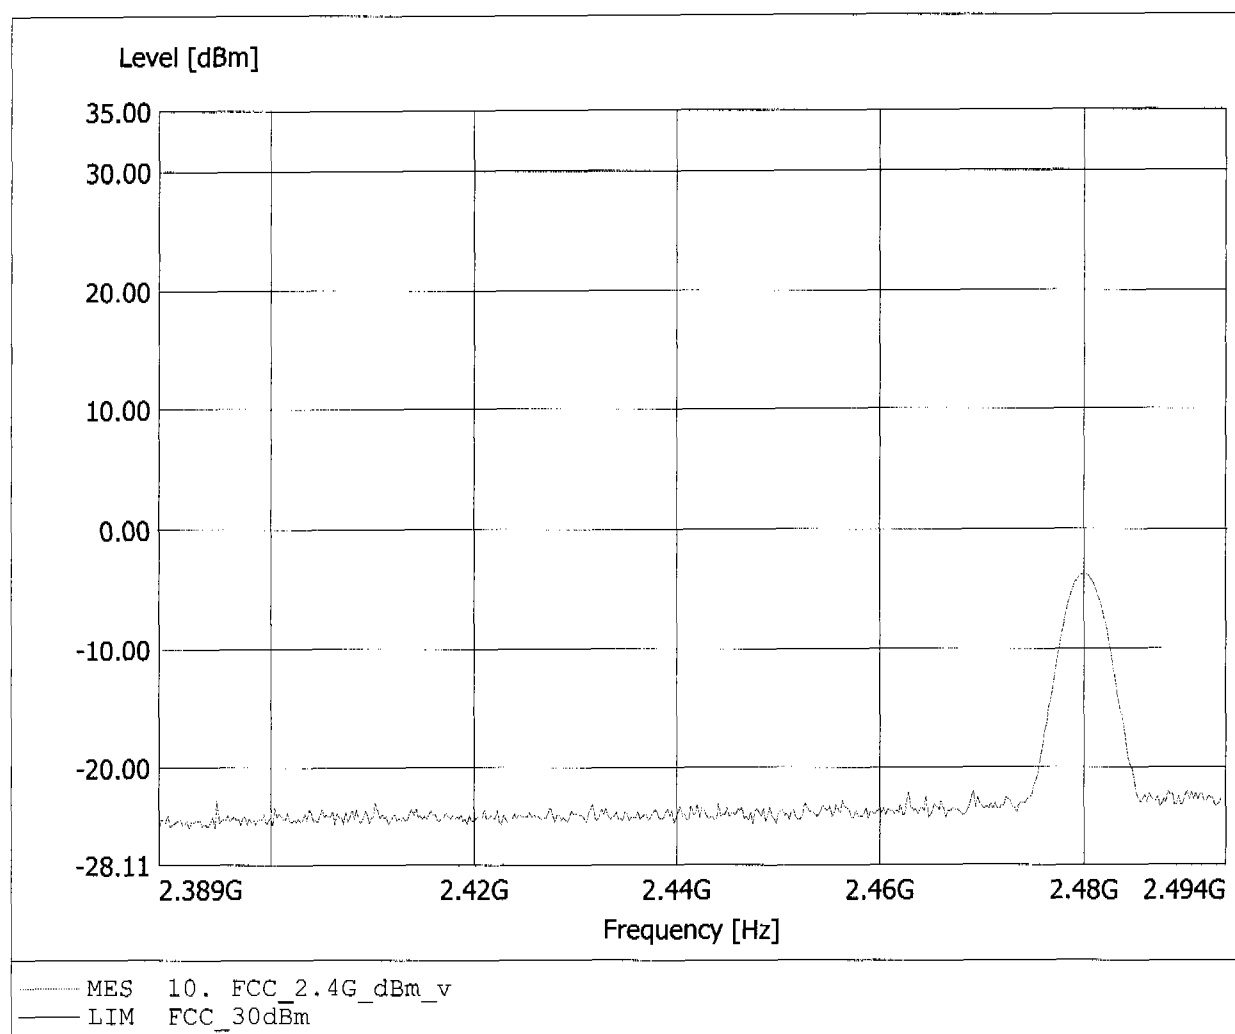


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -1.55dBm, RBW: 5MHz

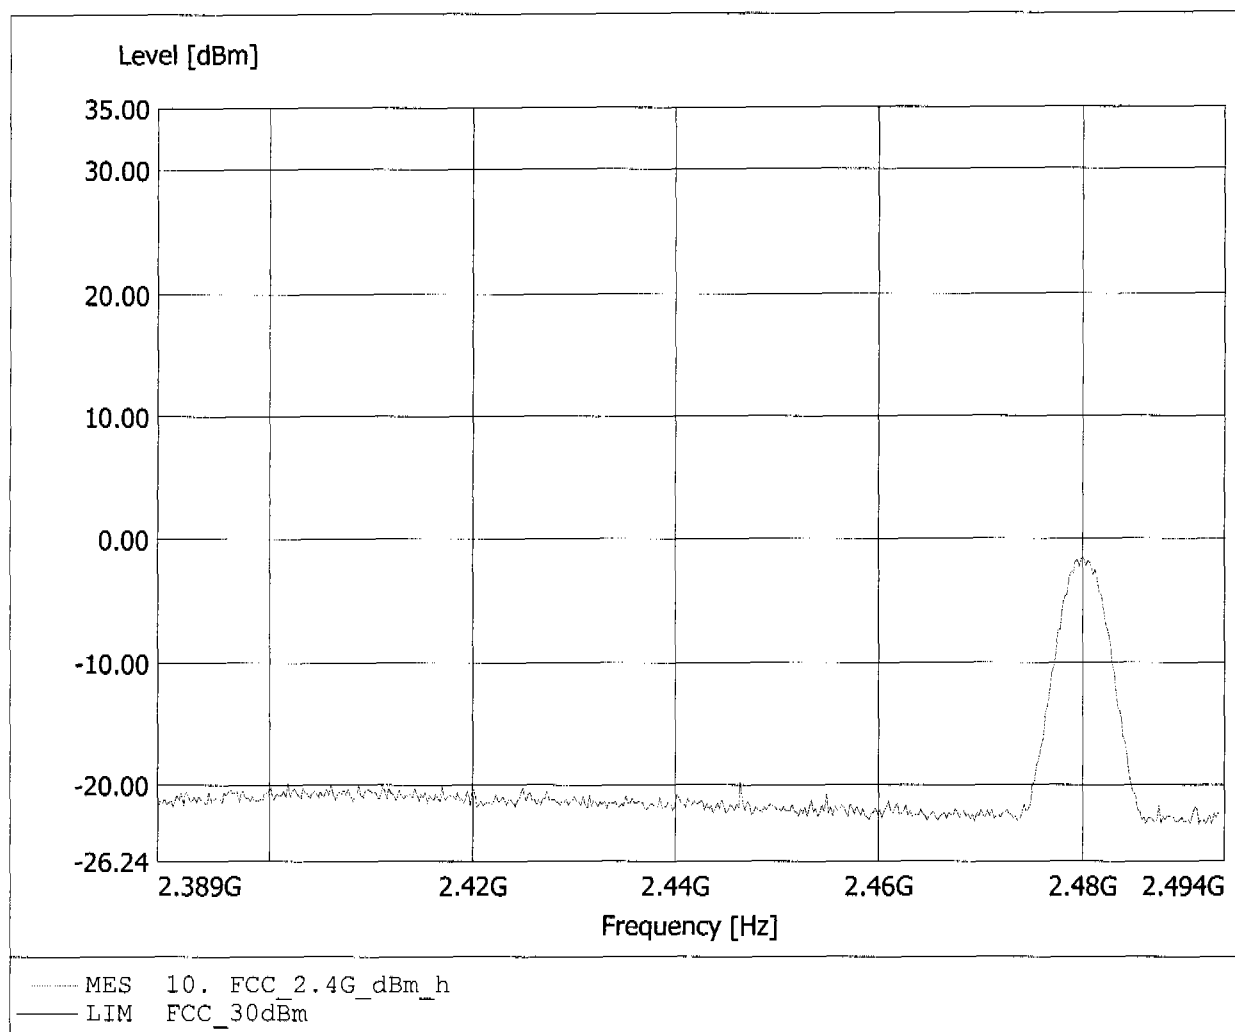


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -10.73dBm, RBW: 5MHz

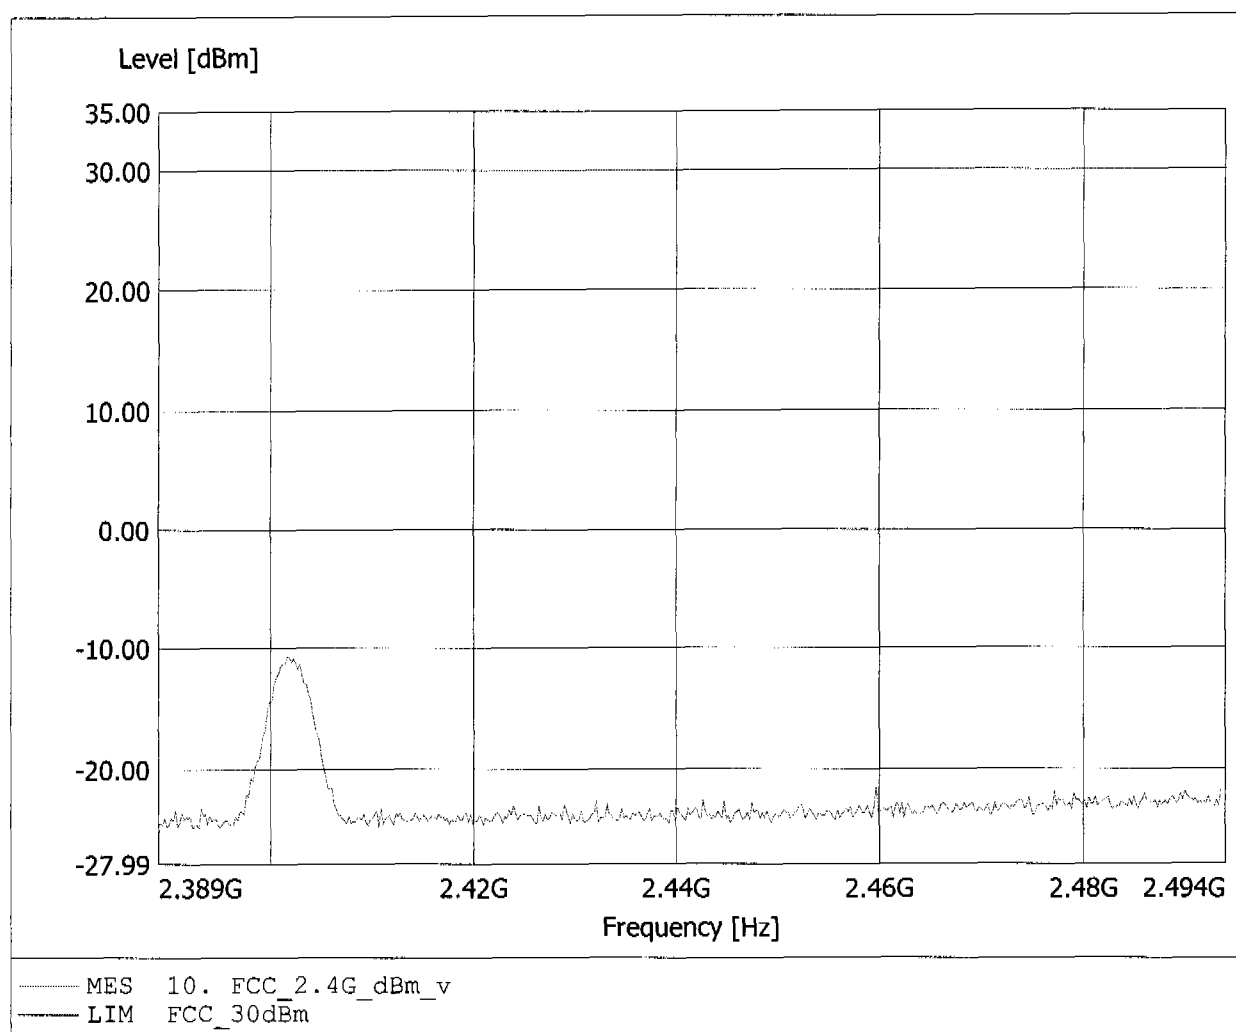


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.43dBm, RBW: 5MHz

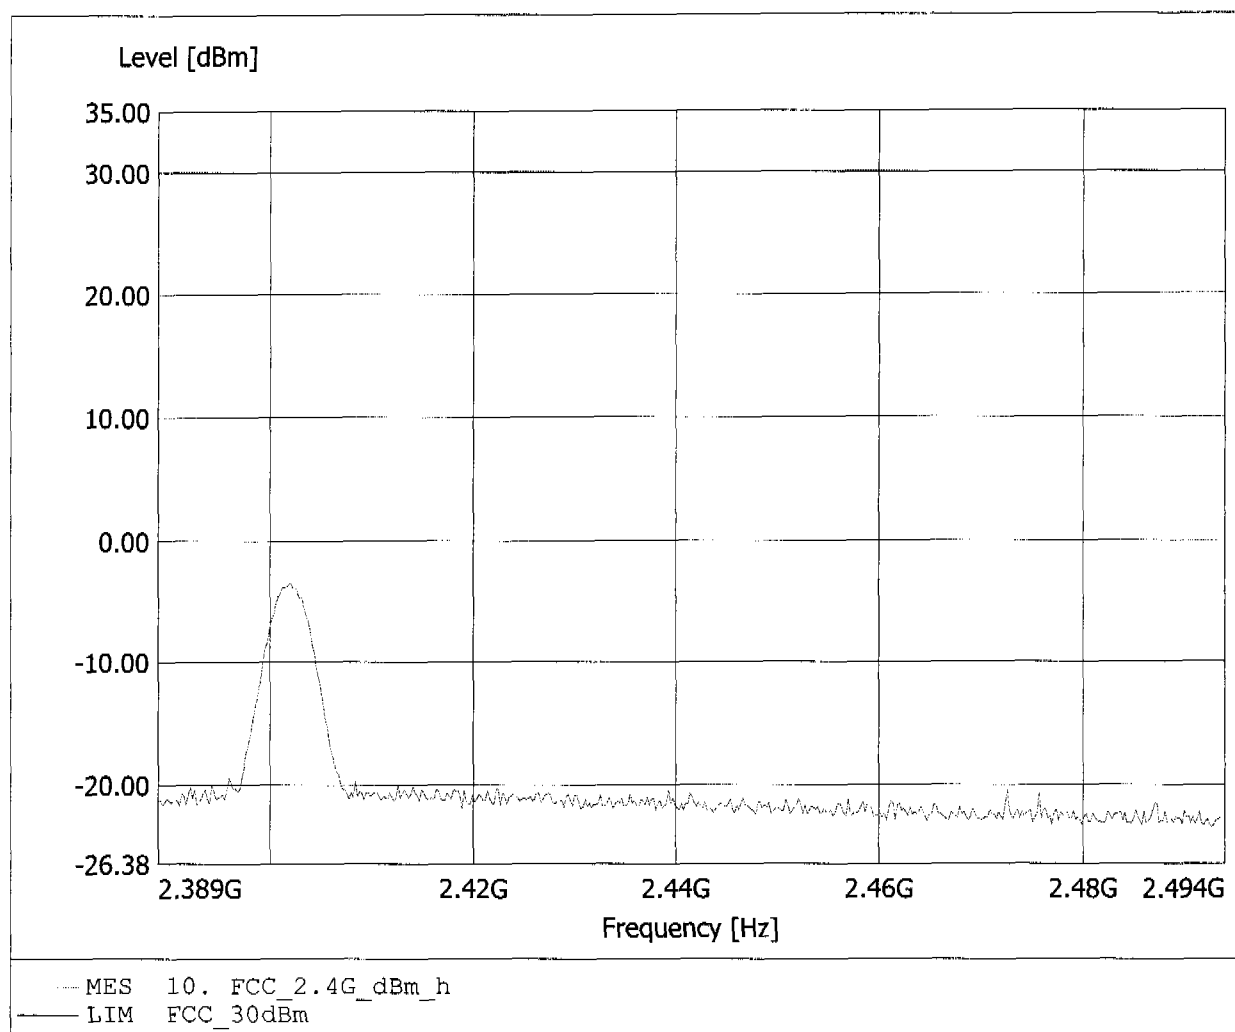


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -5.69dBm, RBW: 5MHz

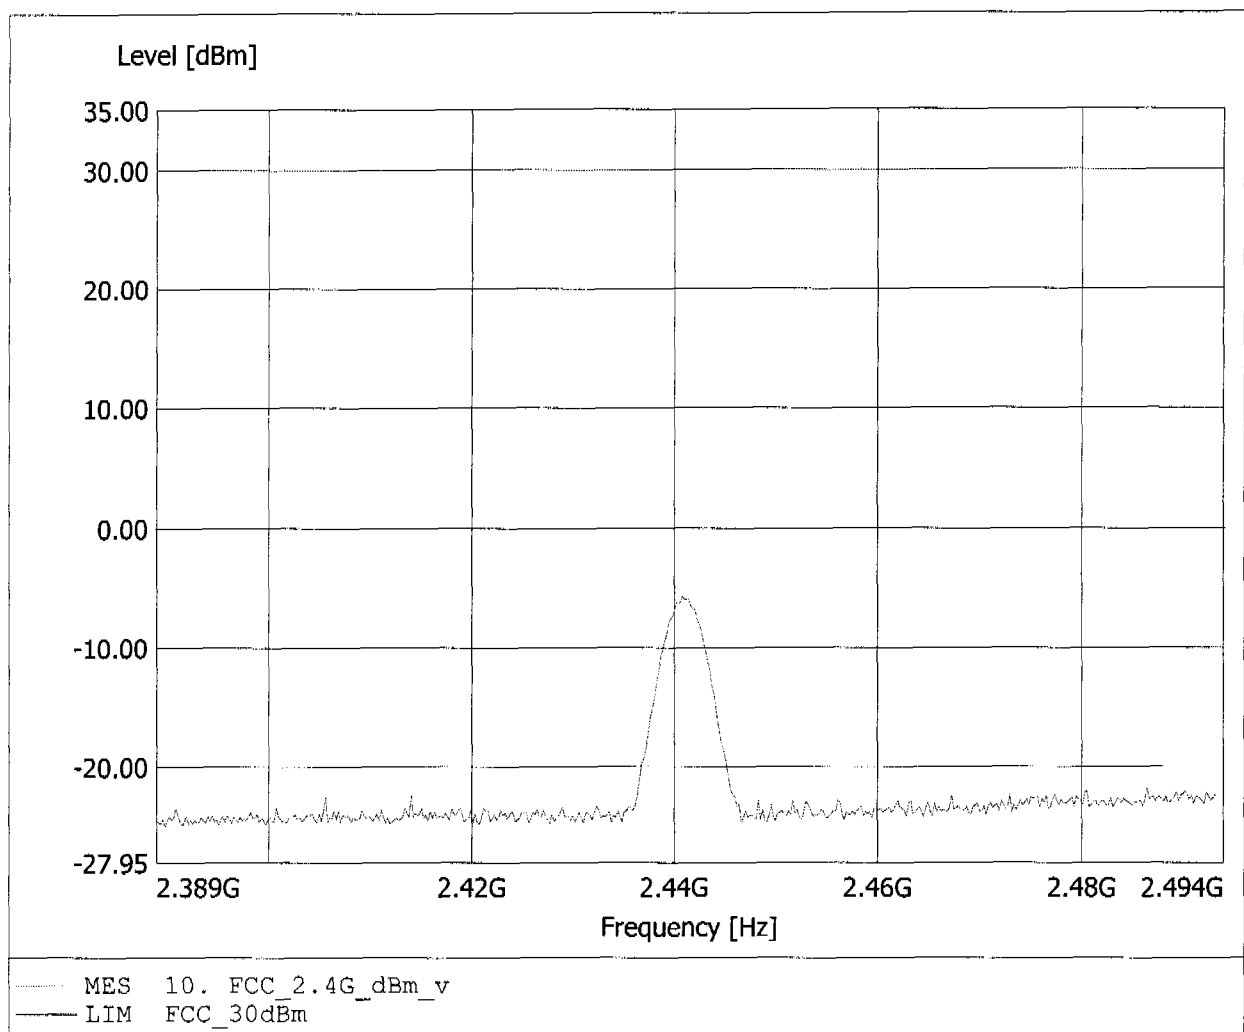


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -1.31dBm, RBW: 5MHz

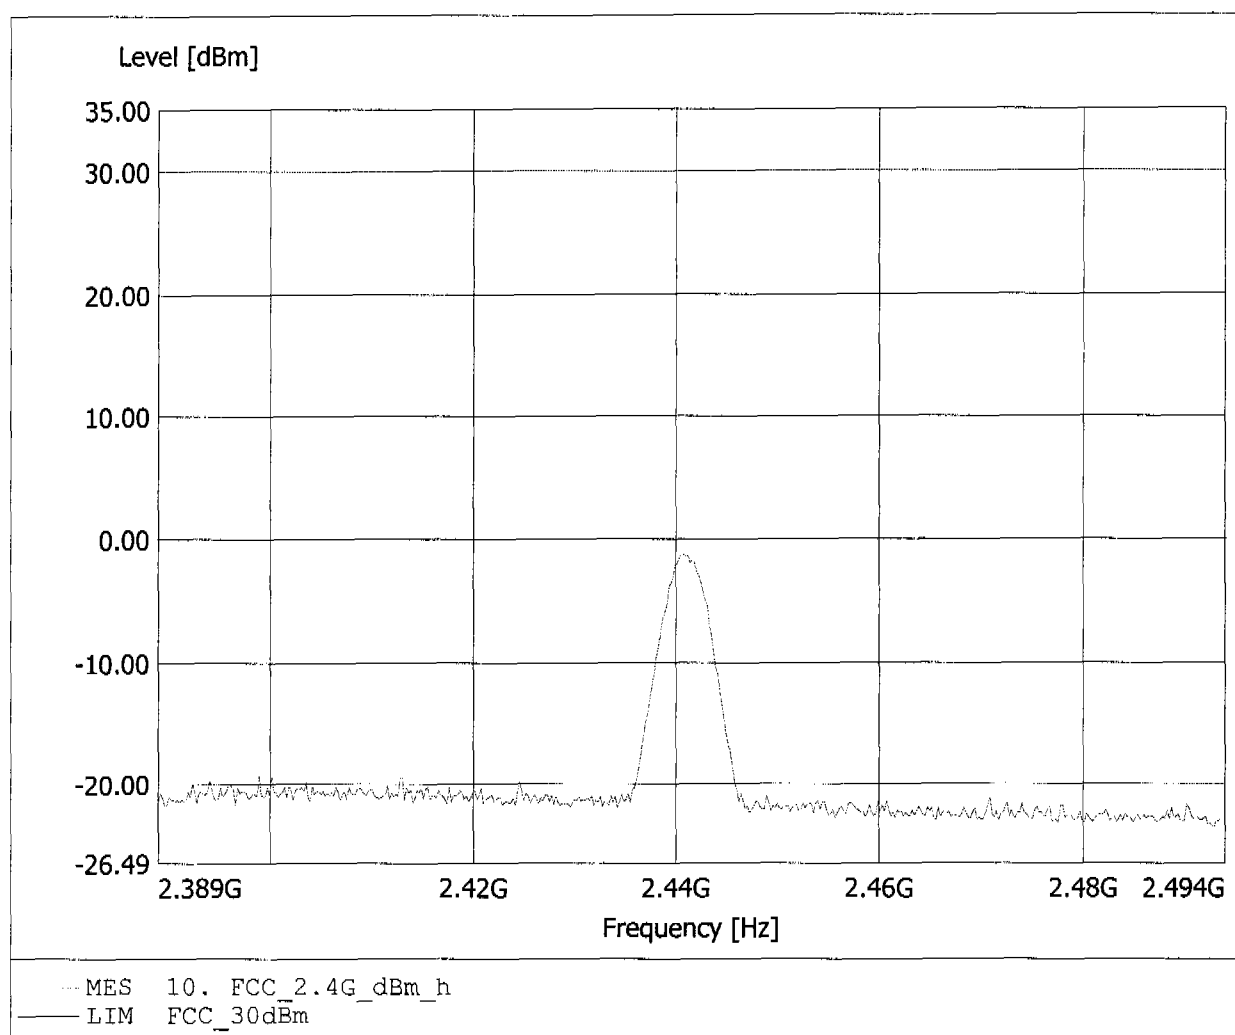


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -3.57dBm, RBW: 5MHz

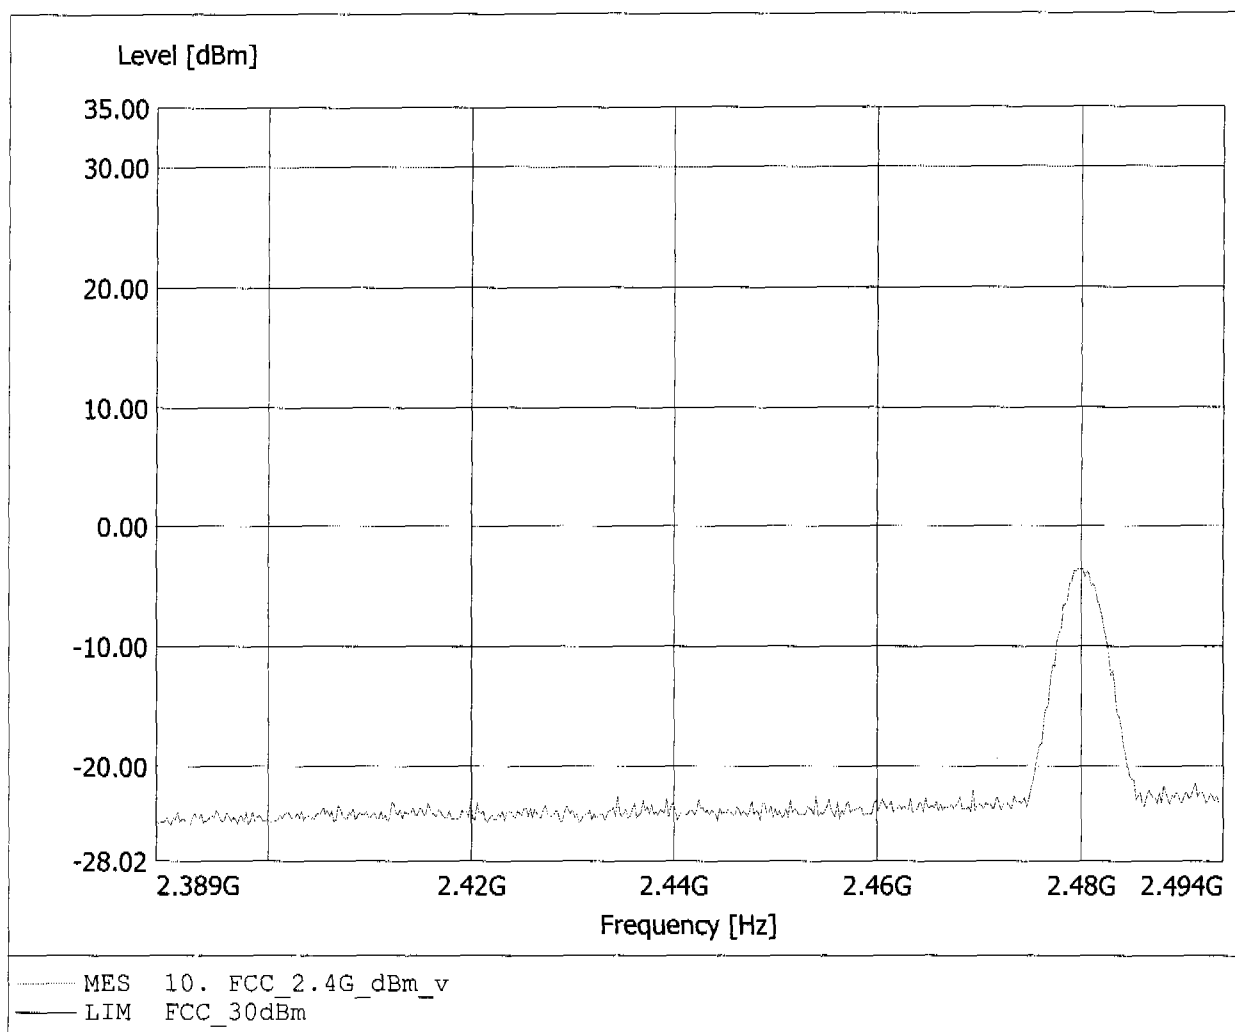

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -1.57dBm, RBW: 5MHz

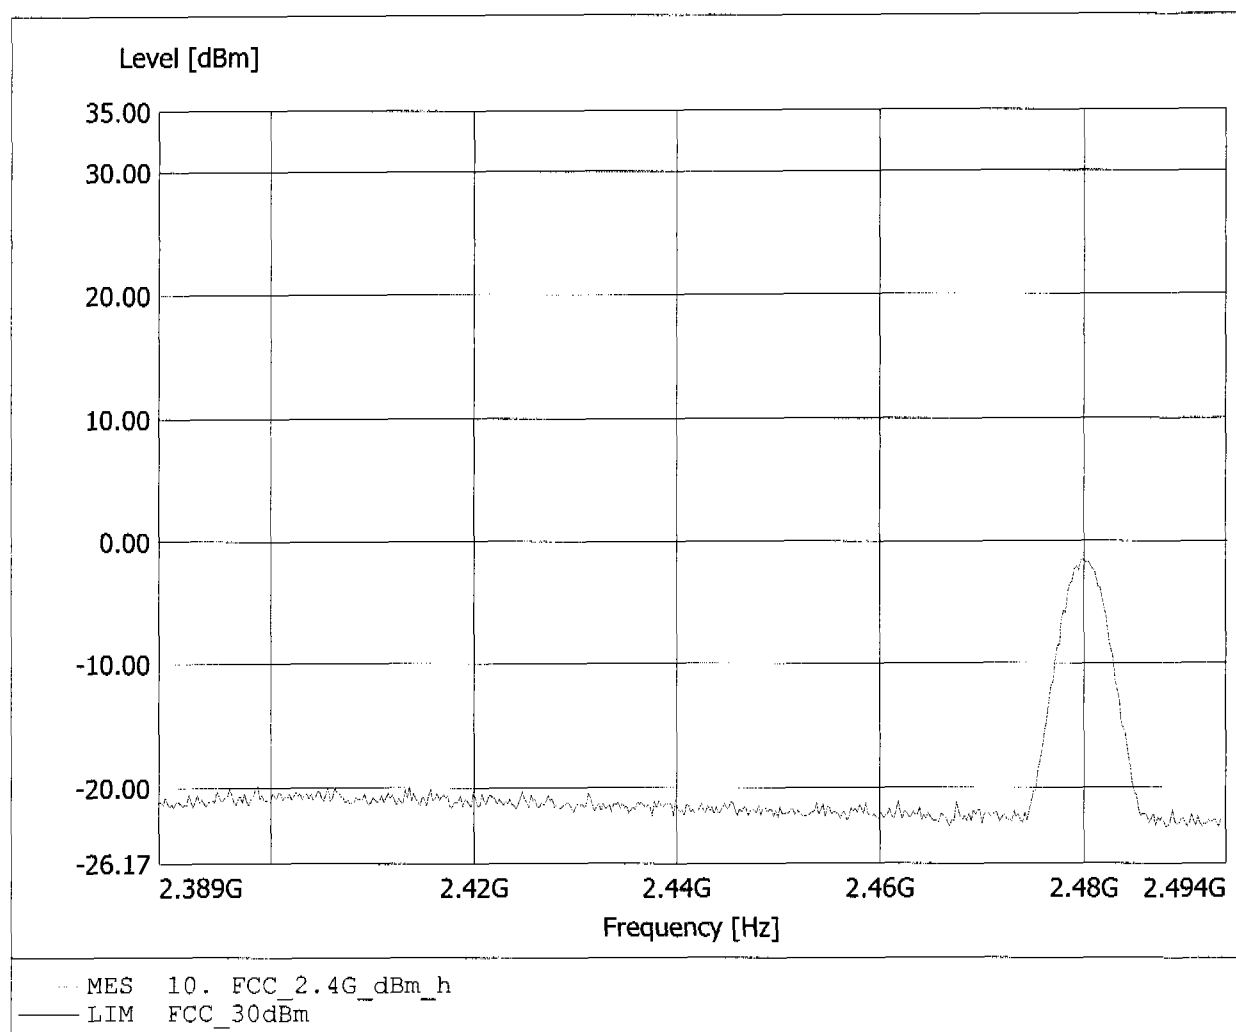


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Emax: 91.19dBµV/m, RBW: 100kHz

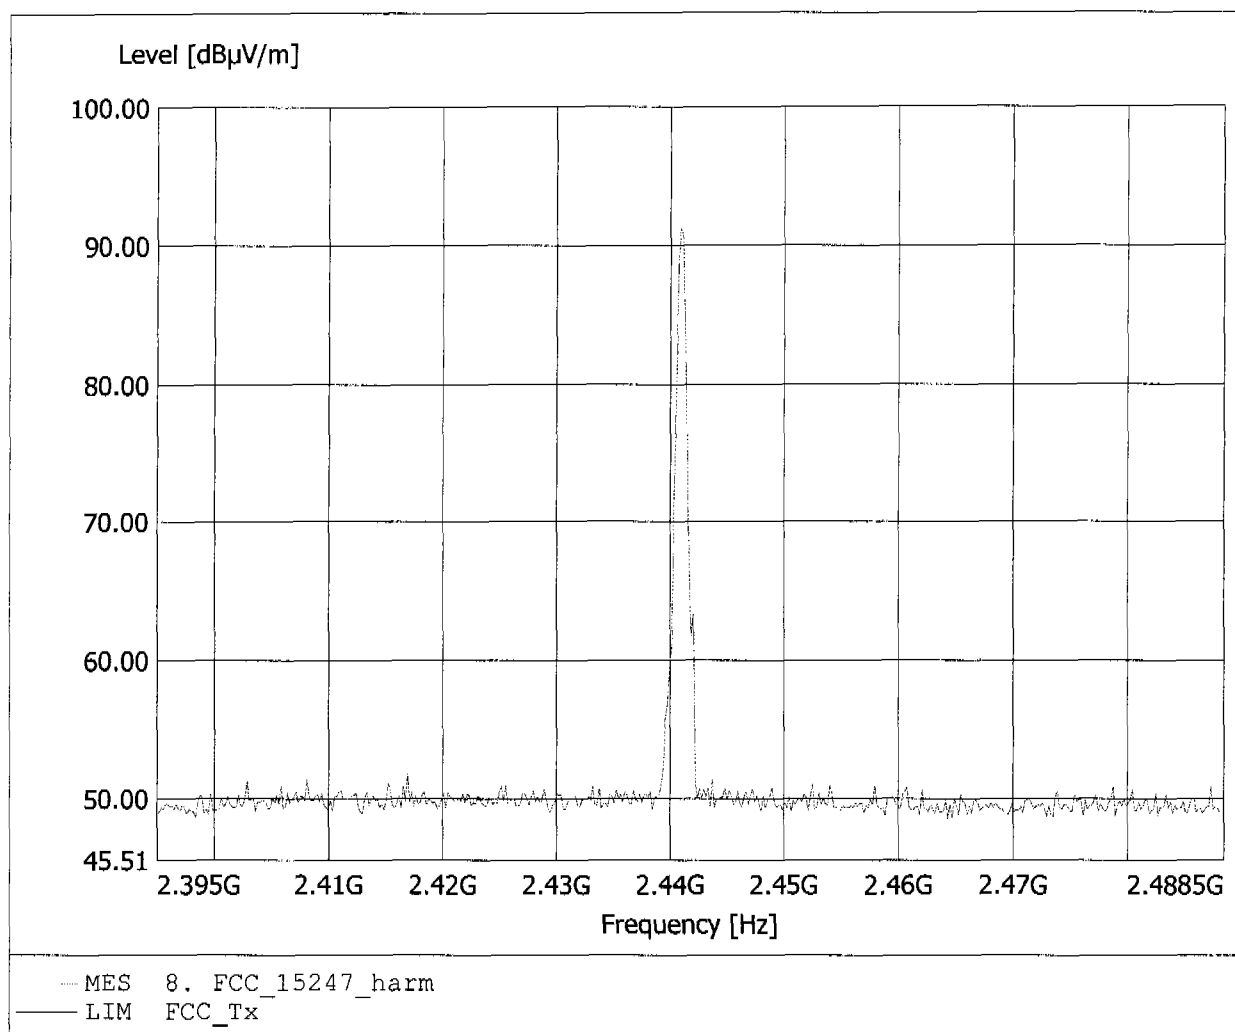


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 30.90dBμV/m, RBW: 100kHz

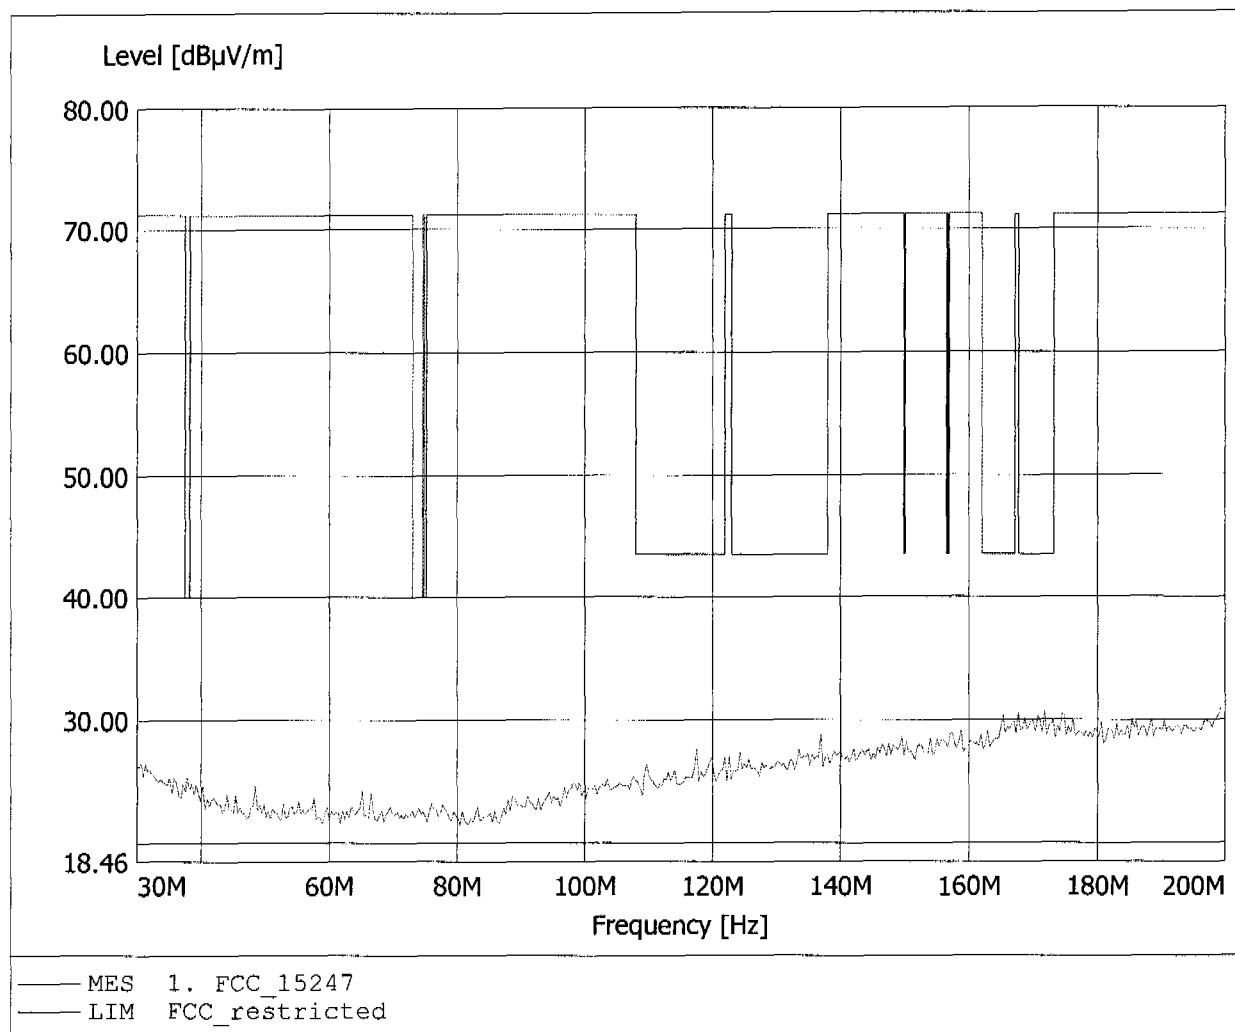


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 169.339MHz, Emax: 35.11dBµV/m, RBW: 100kHz

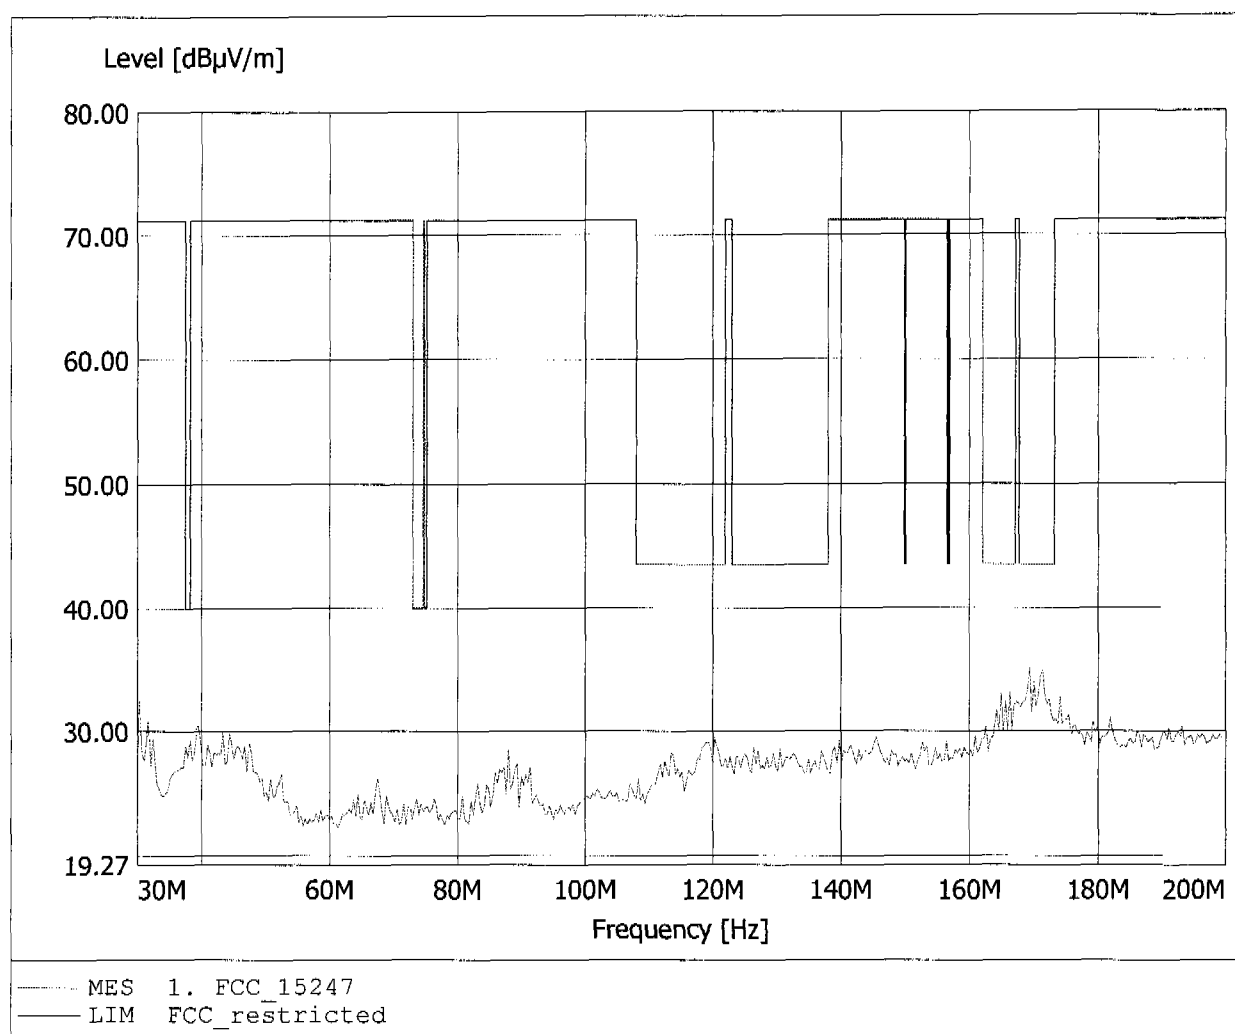


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 170.701MHz, Emax: 30.96dBµV/m, RBW: 100kHz

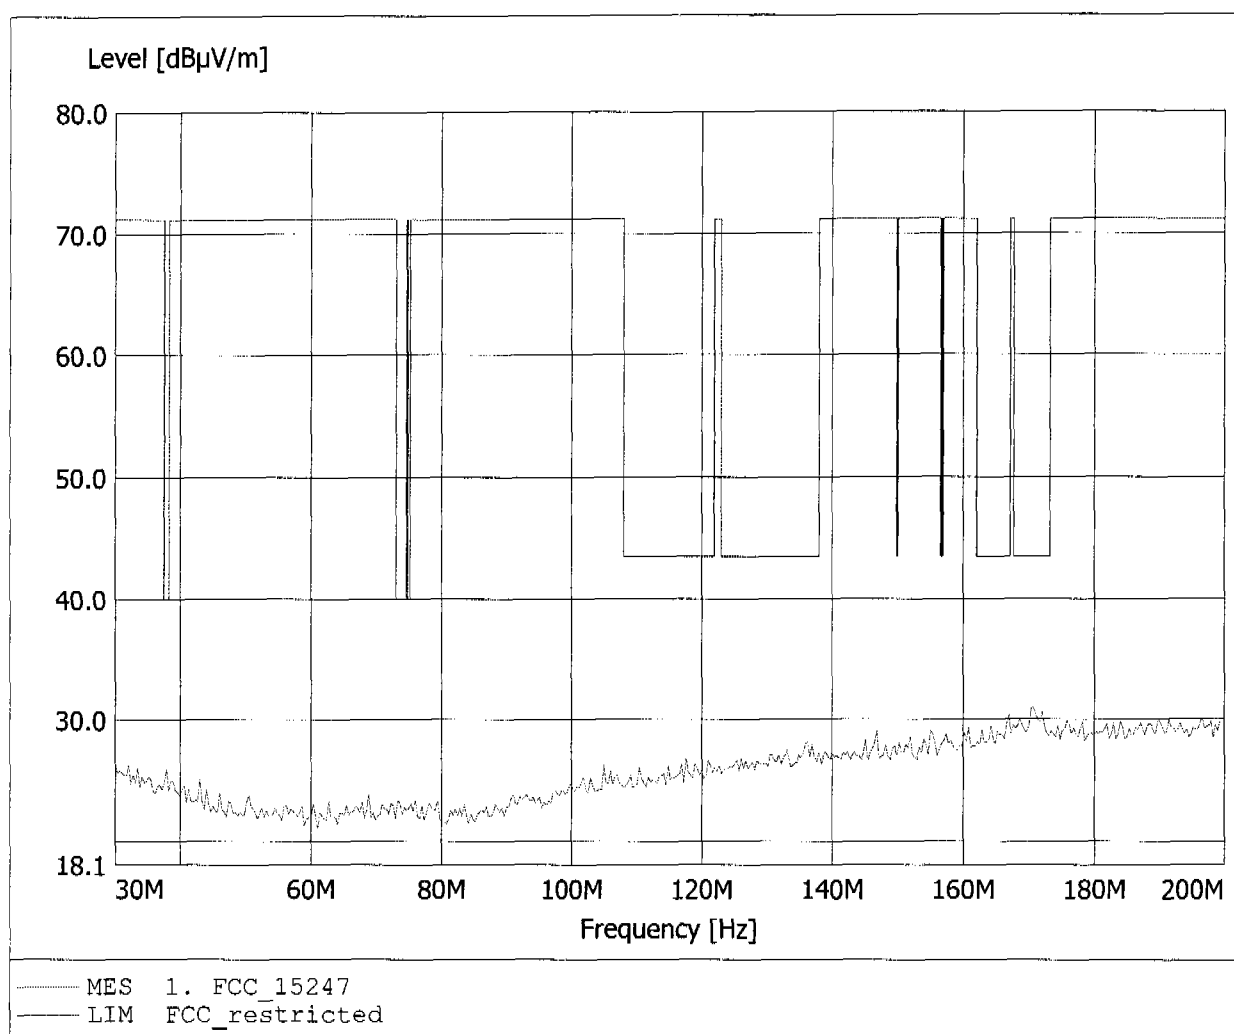


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 34.09dBµV/m, RBW: 100kHz

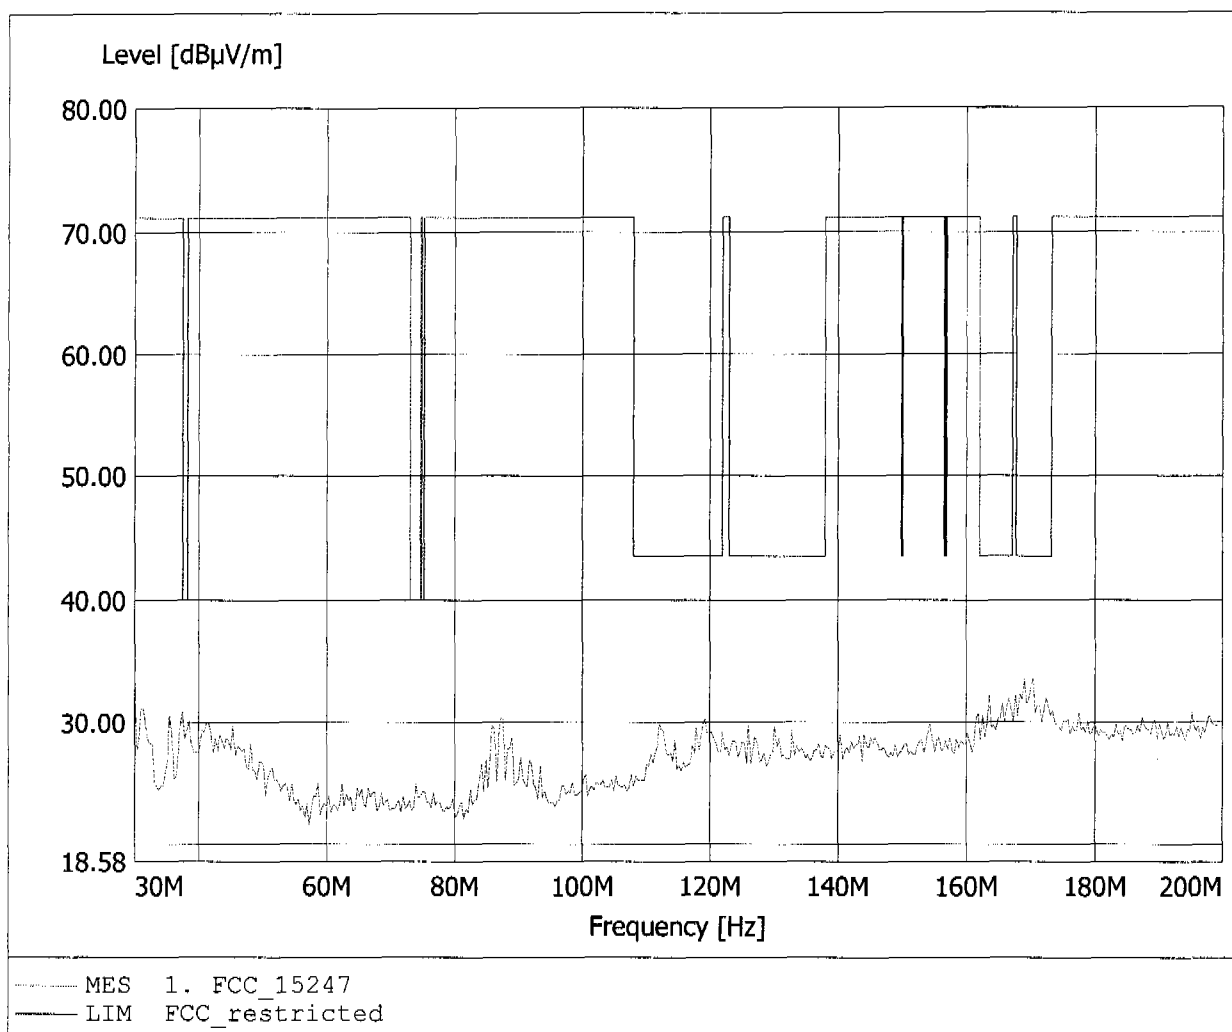


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.032MHz, Emax: 31.03dBµV/m, RBW: 100kHz

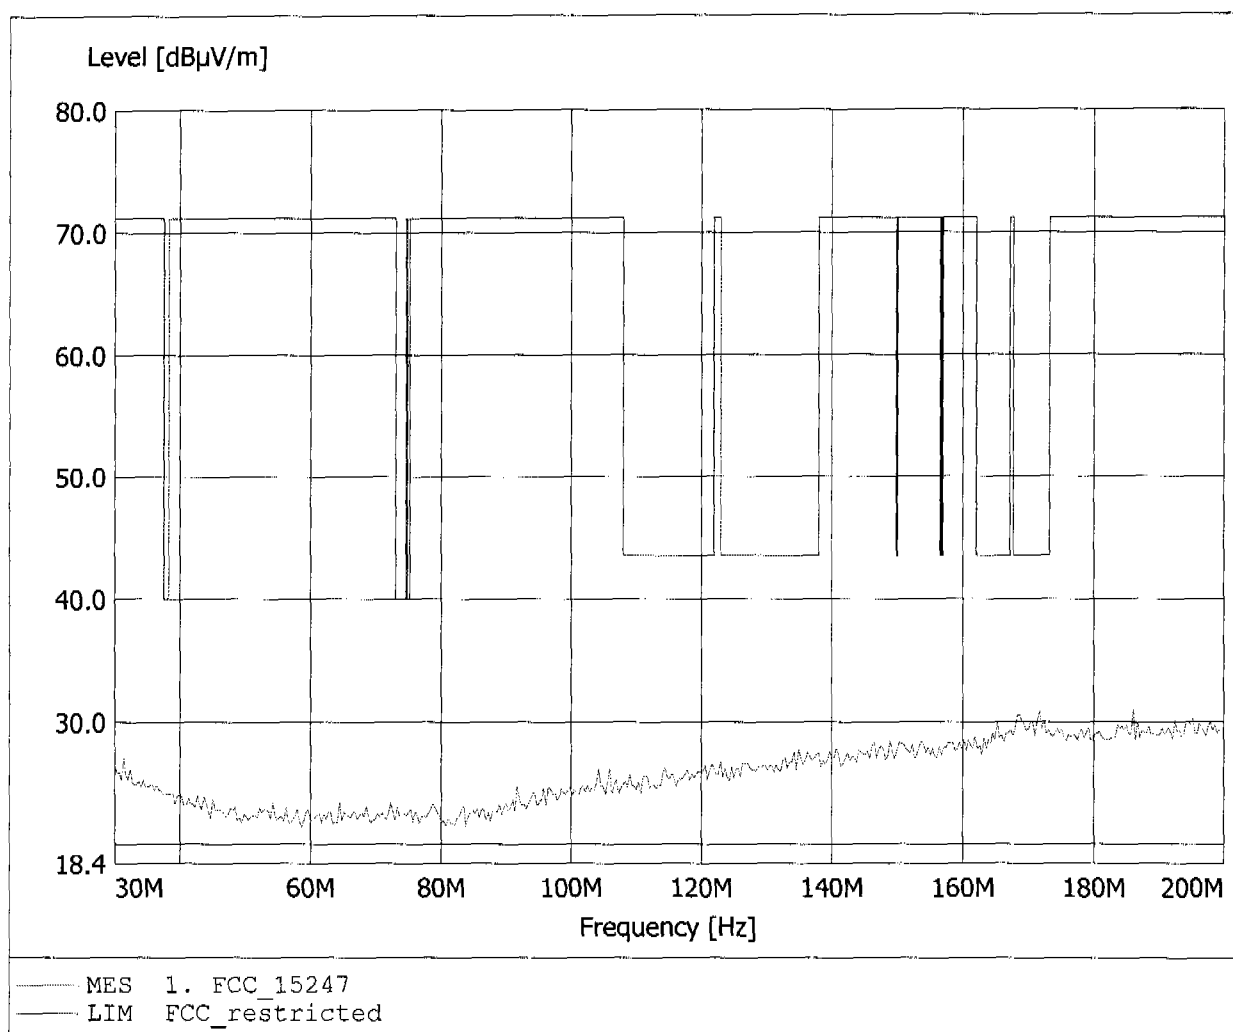


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 169.679MHz, Emax: 35.55dBμV/m, RBW: 100kHz

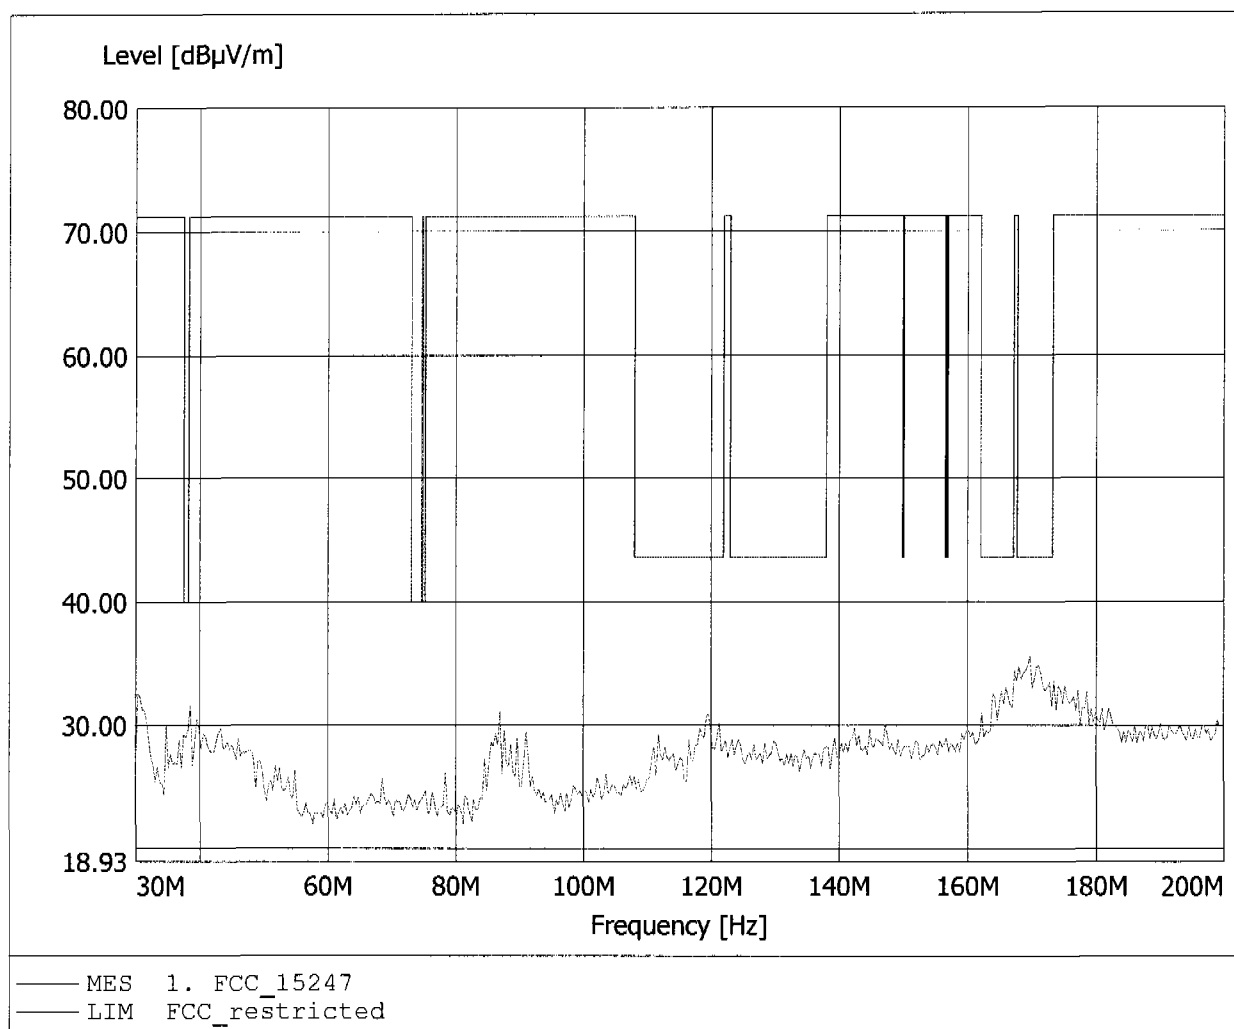


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 536.673MHz, Emax: 27.09dBµV/m, RBW: 100kHz

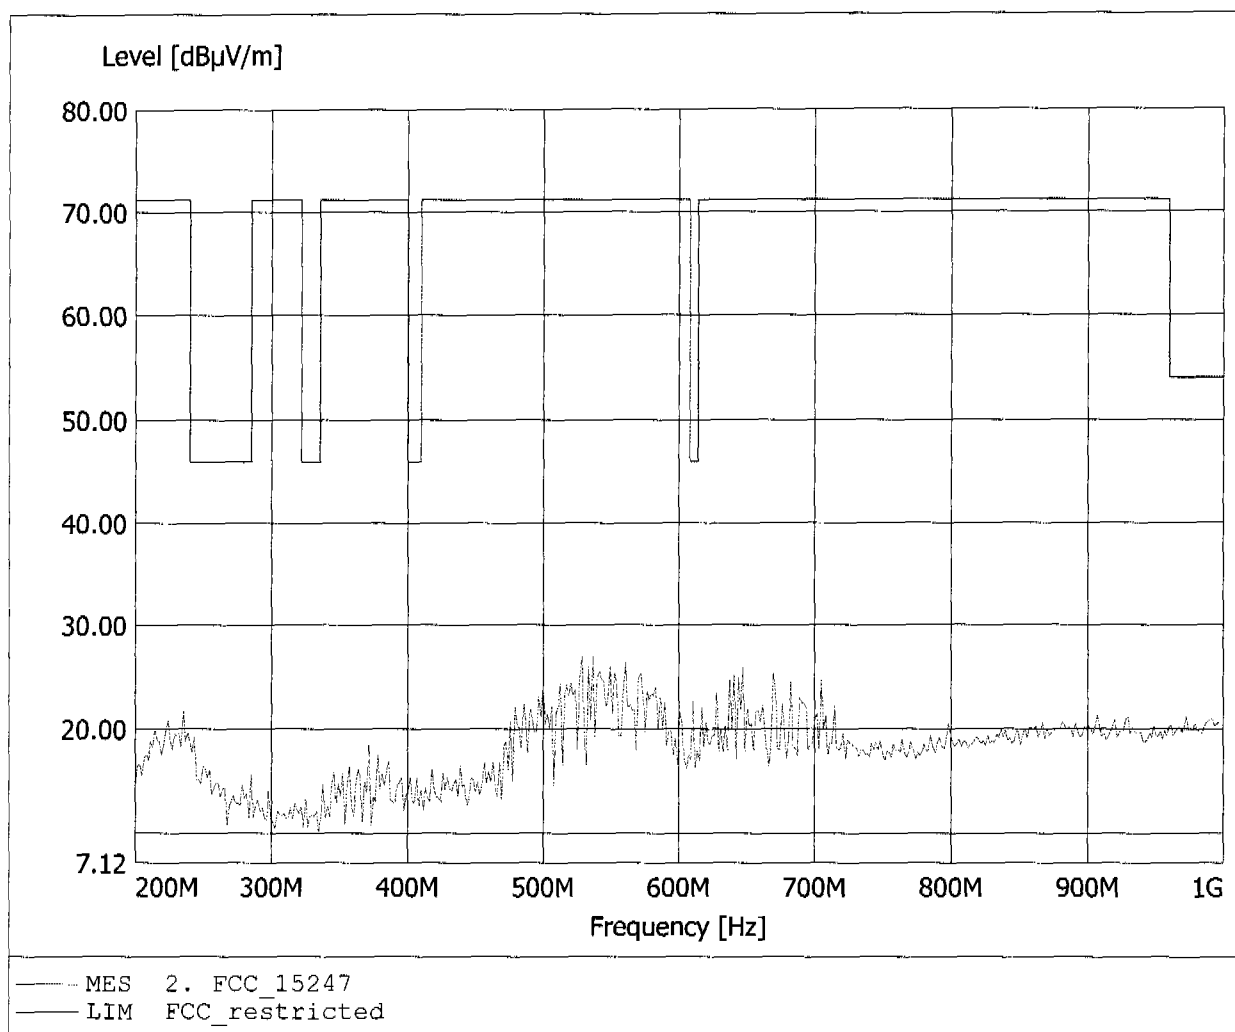


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 25.55dBµV/m, RBW: 100kHz

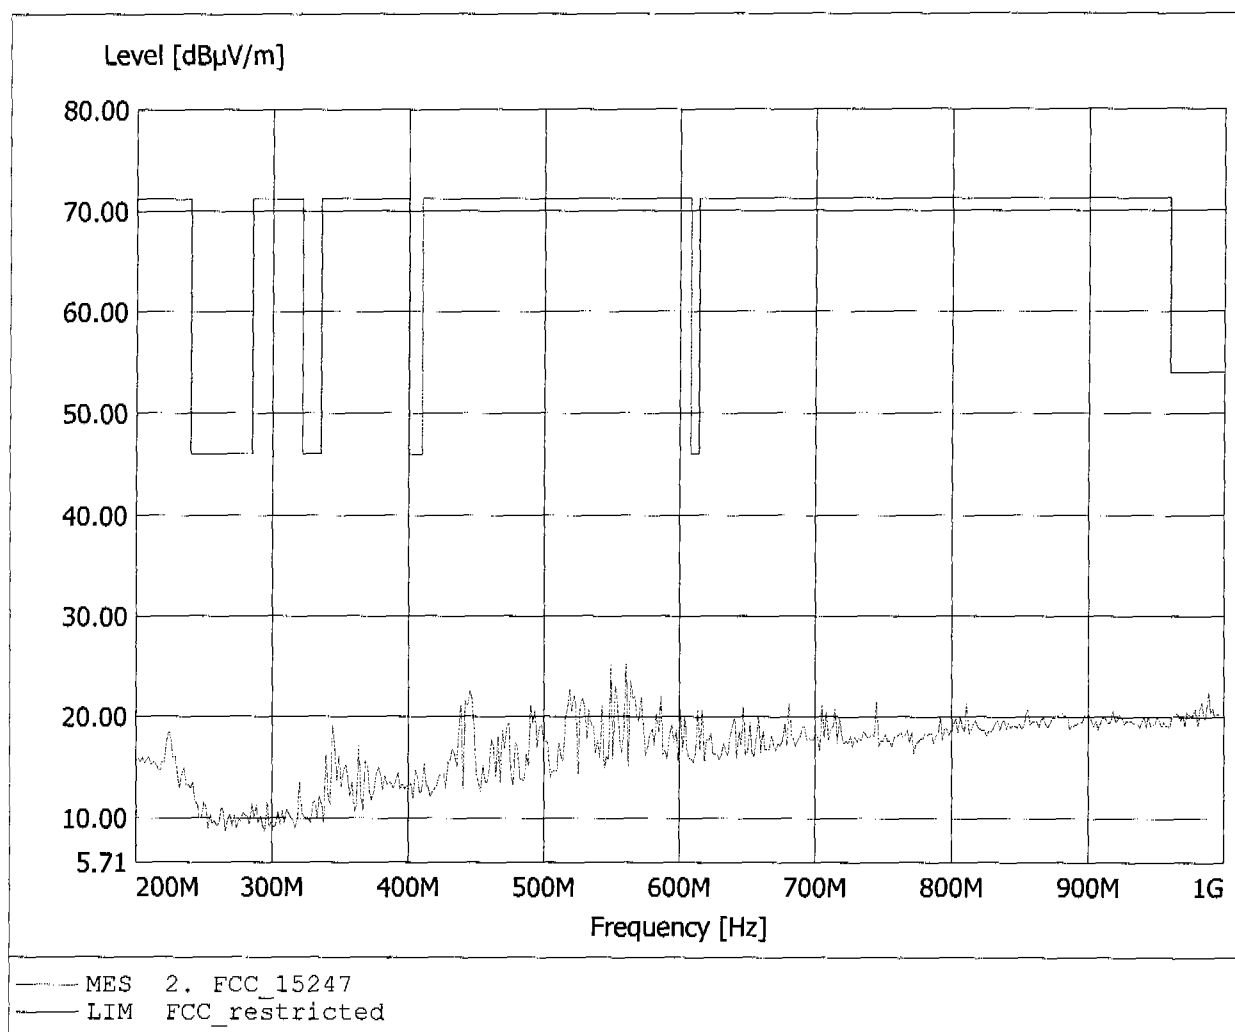


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 571.944MHz, Emax: 30.06dBµV/m, RBW: 100kHz

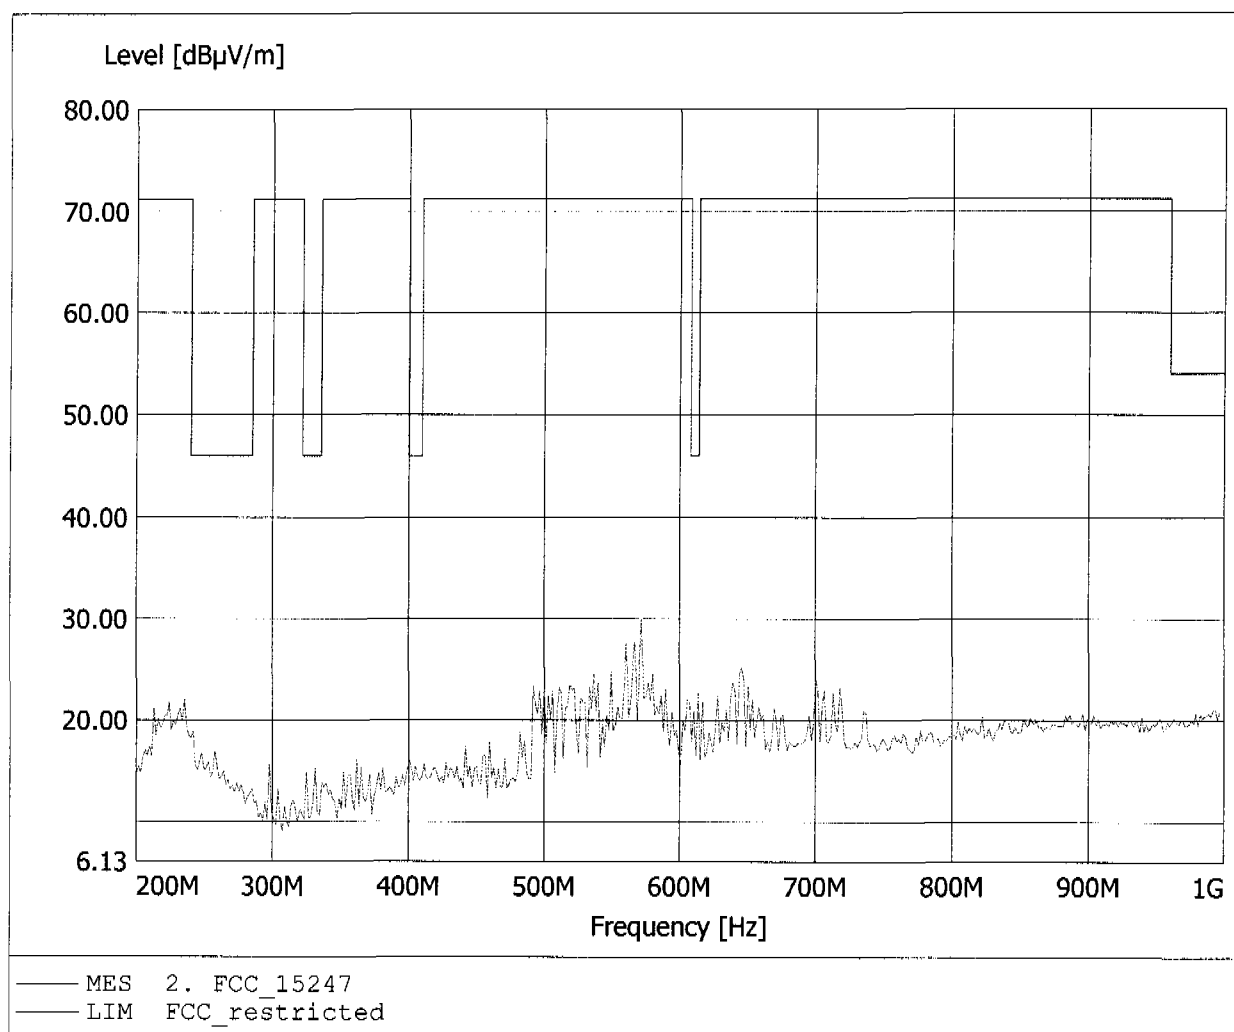


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 570.341MHz, Emax: 25.99dBµV/m, RBW: 100kHz

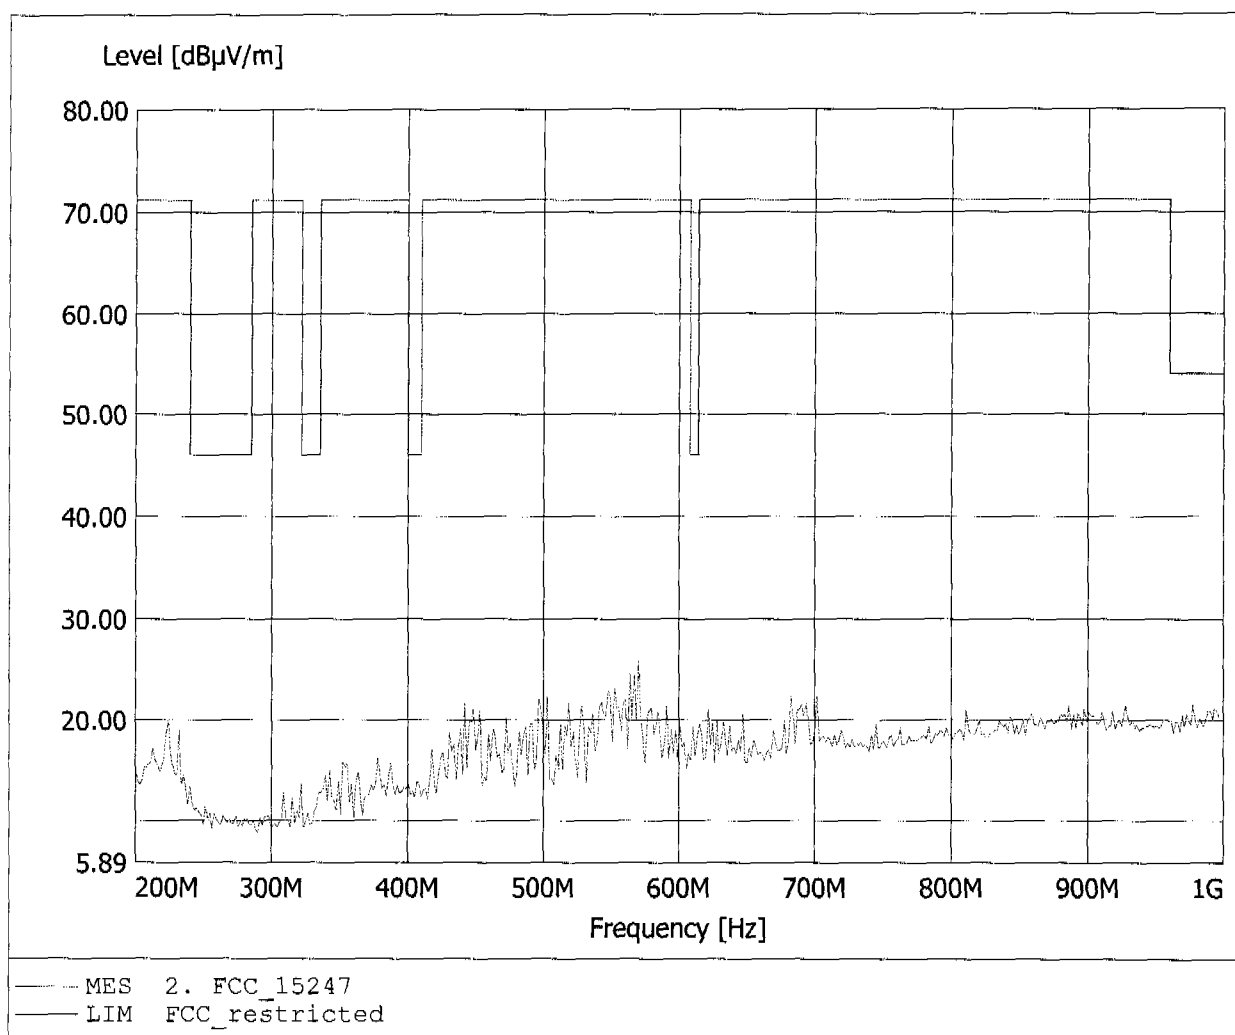


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 573.547MHz, Emax: 27.45dBμV/m, RBW: 100kHz

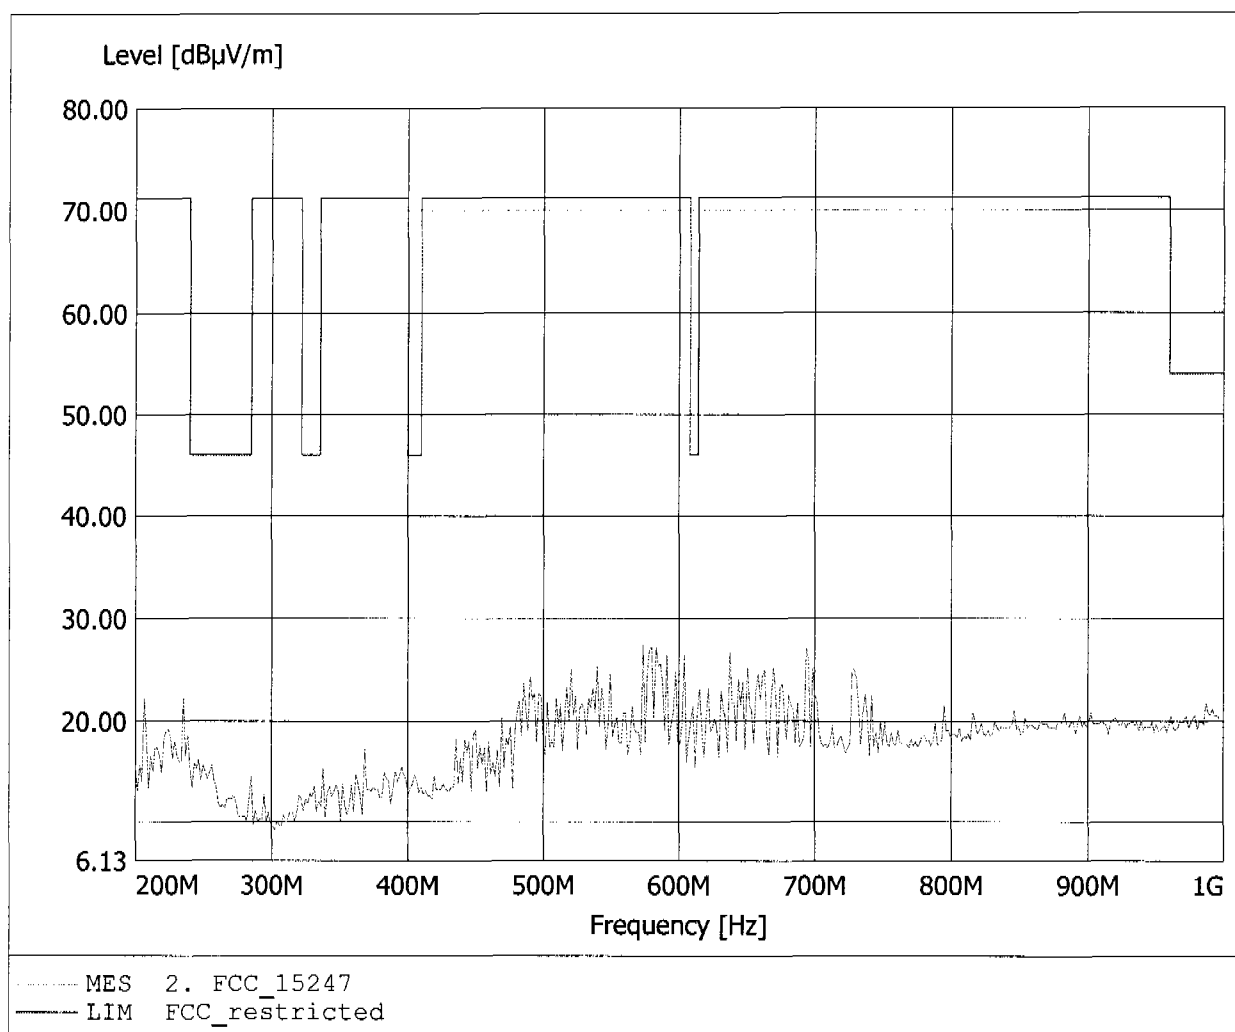


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 549.499MHz, Emax: 26.86dBµV/m, RBW: 100kHz

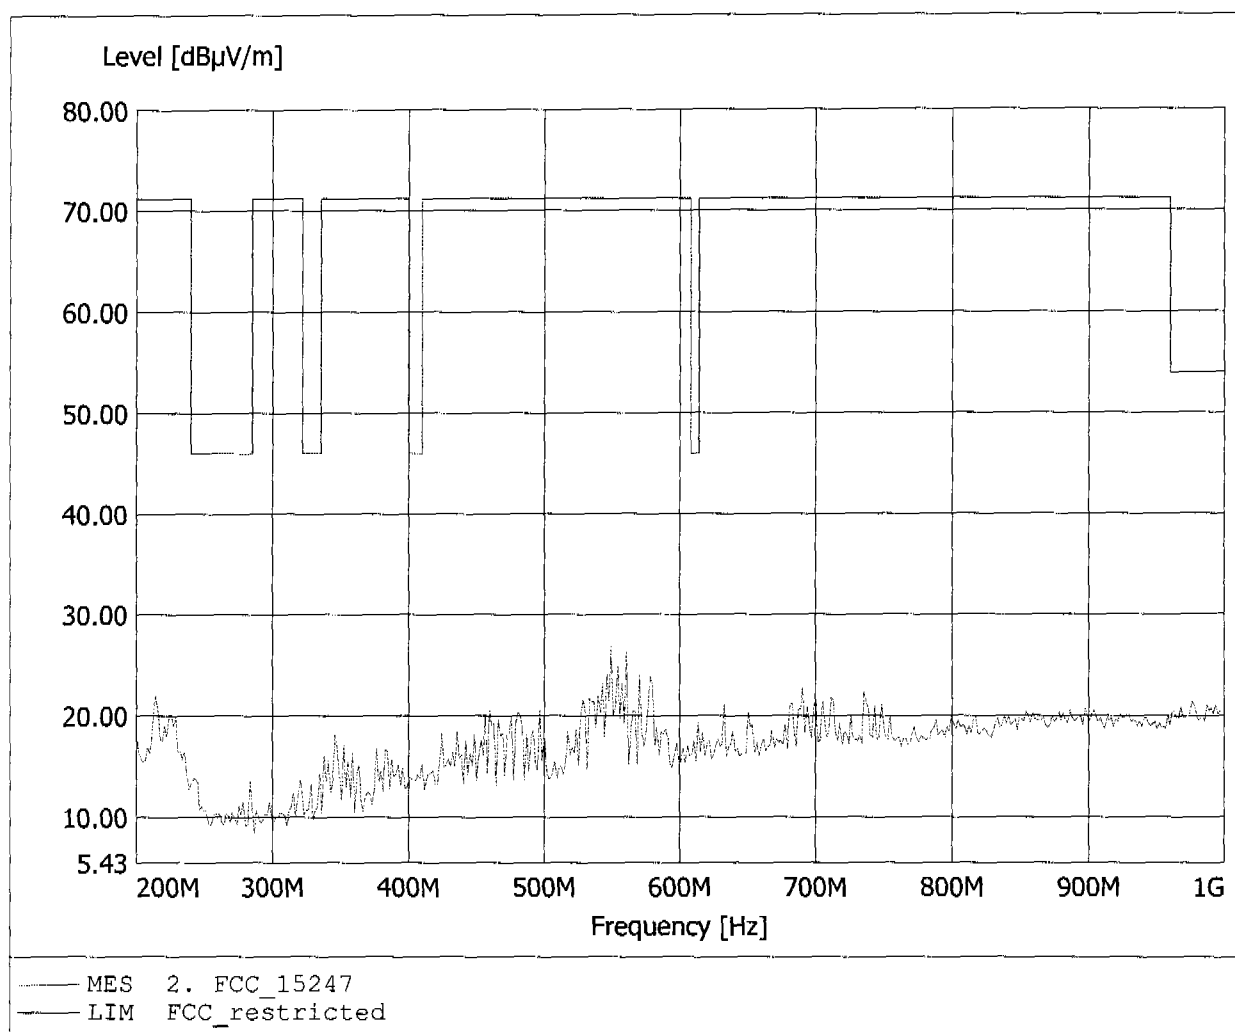


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 46.99dBµV/m, RBW: 1MHz

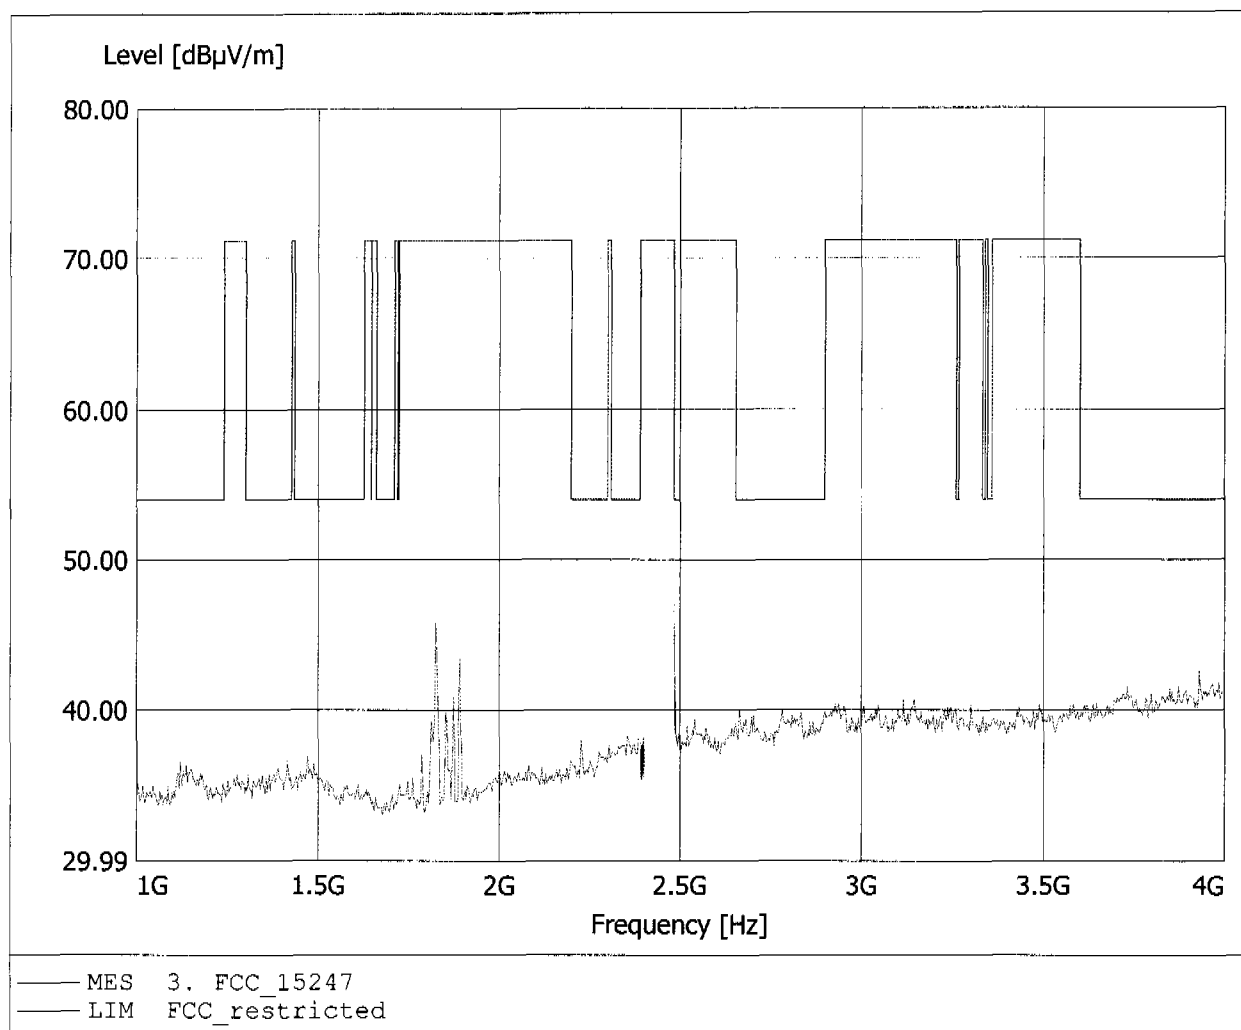


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 44.05dB μ V/m, RBW: 1MHz

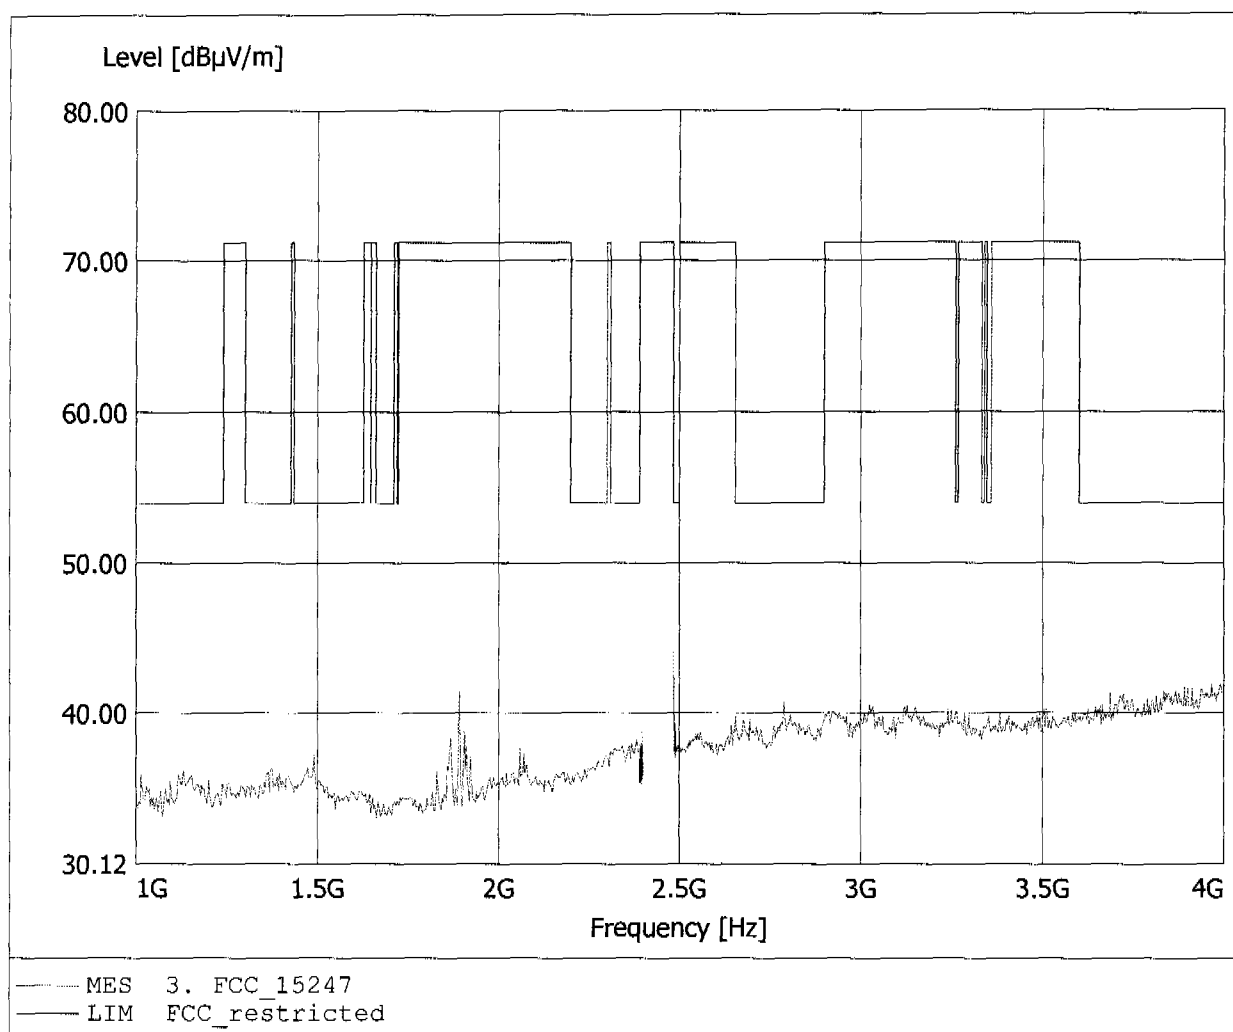


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 47.20dBµV/m, RBW: 1MHz

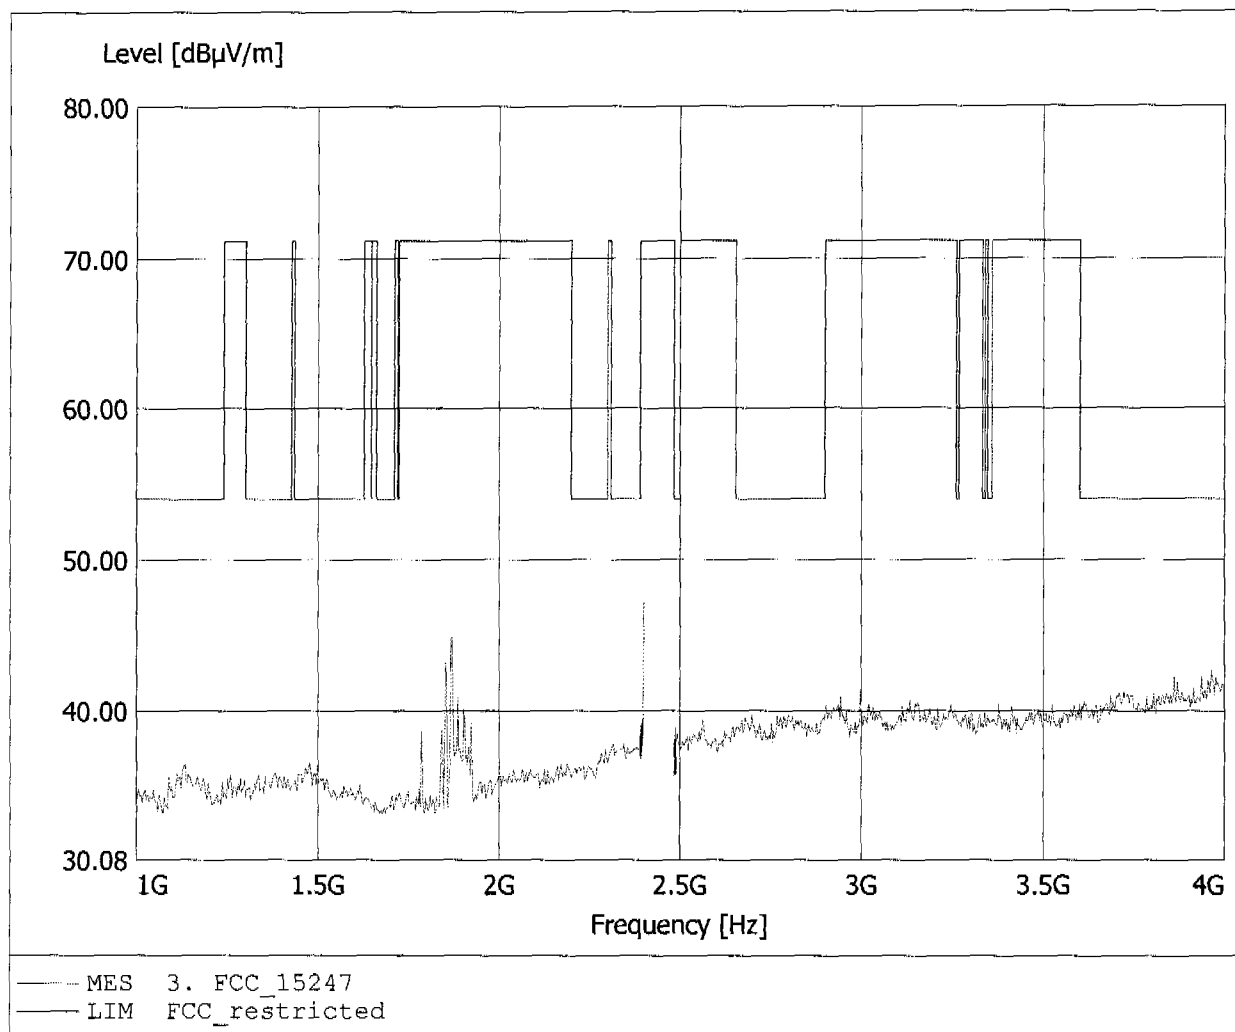


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 43.08dBμV/m, RBW: 1MHz

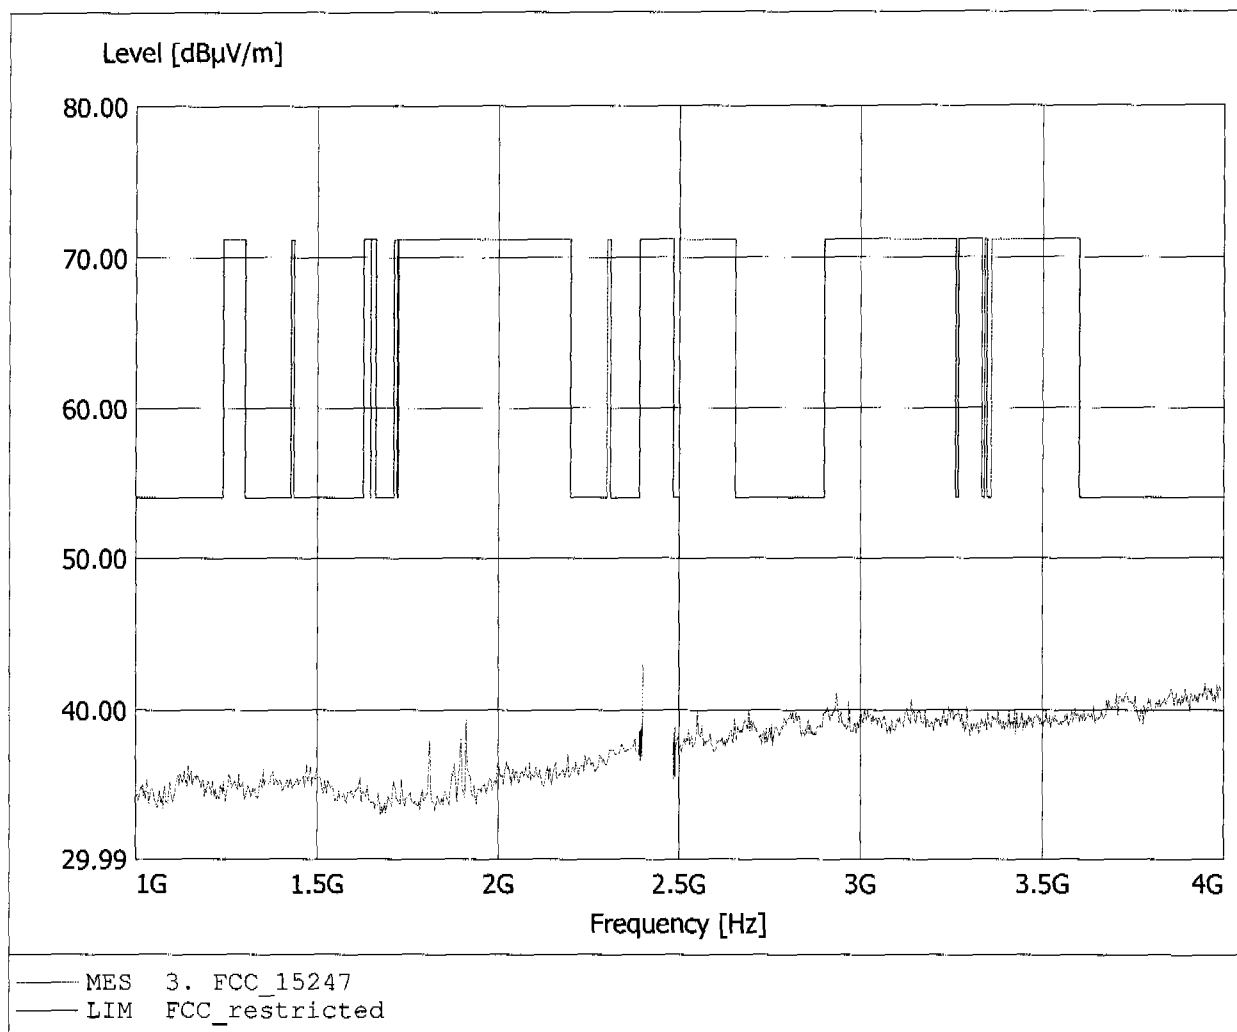


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.847GHz, Emax: 46.51dBμV/m, RBW: 1MHz

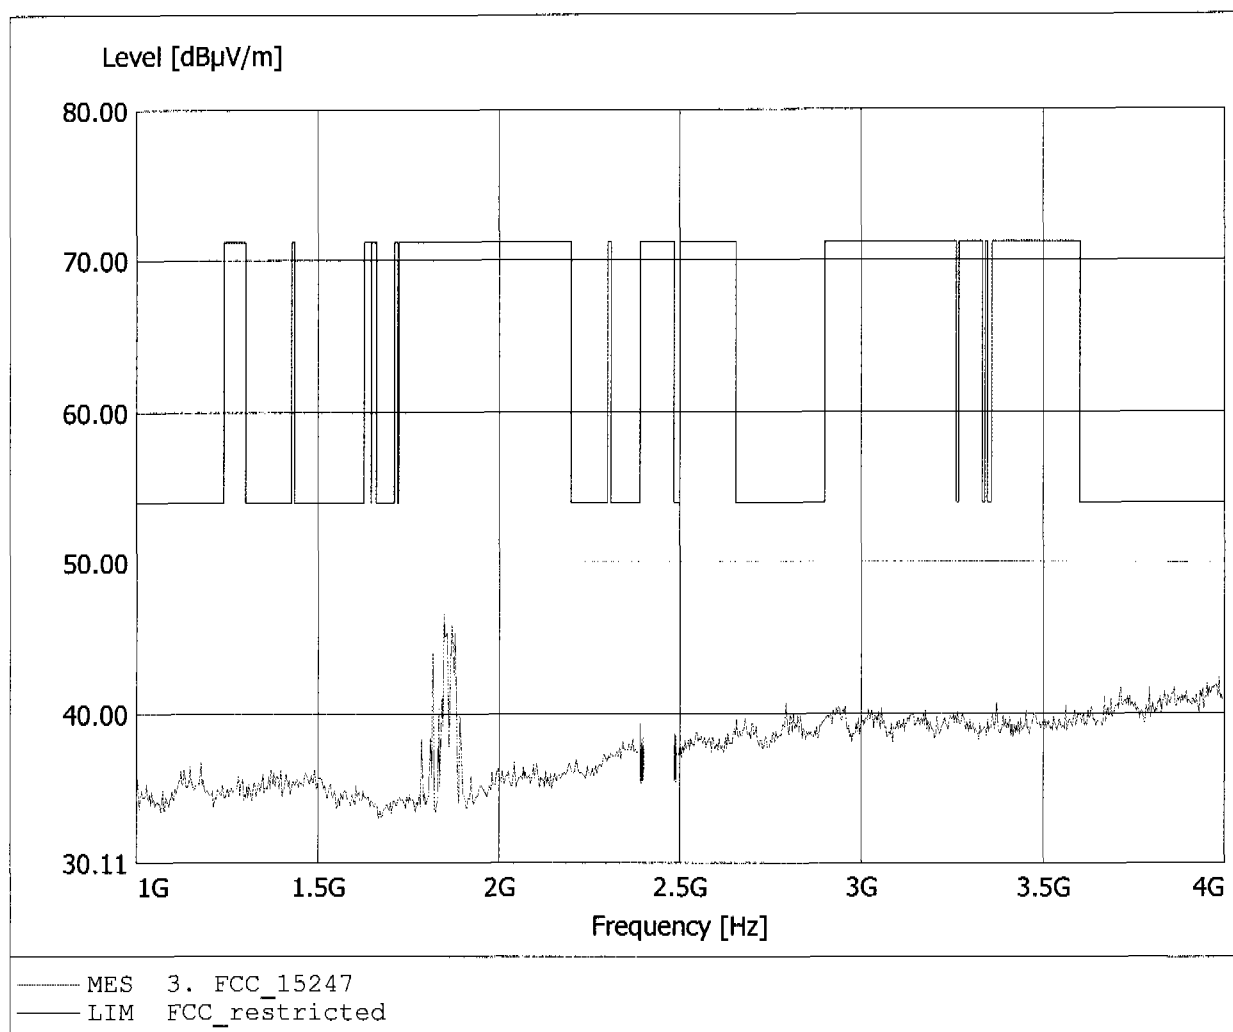


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.897GHz, Emax: 42.74dBμV/m, RBW: 1MHz

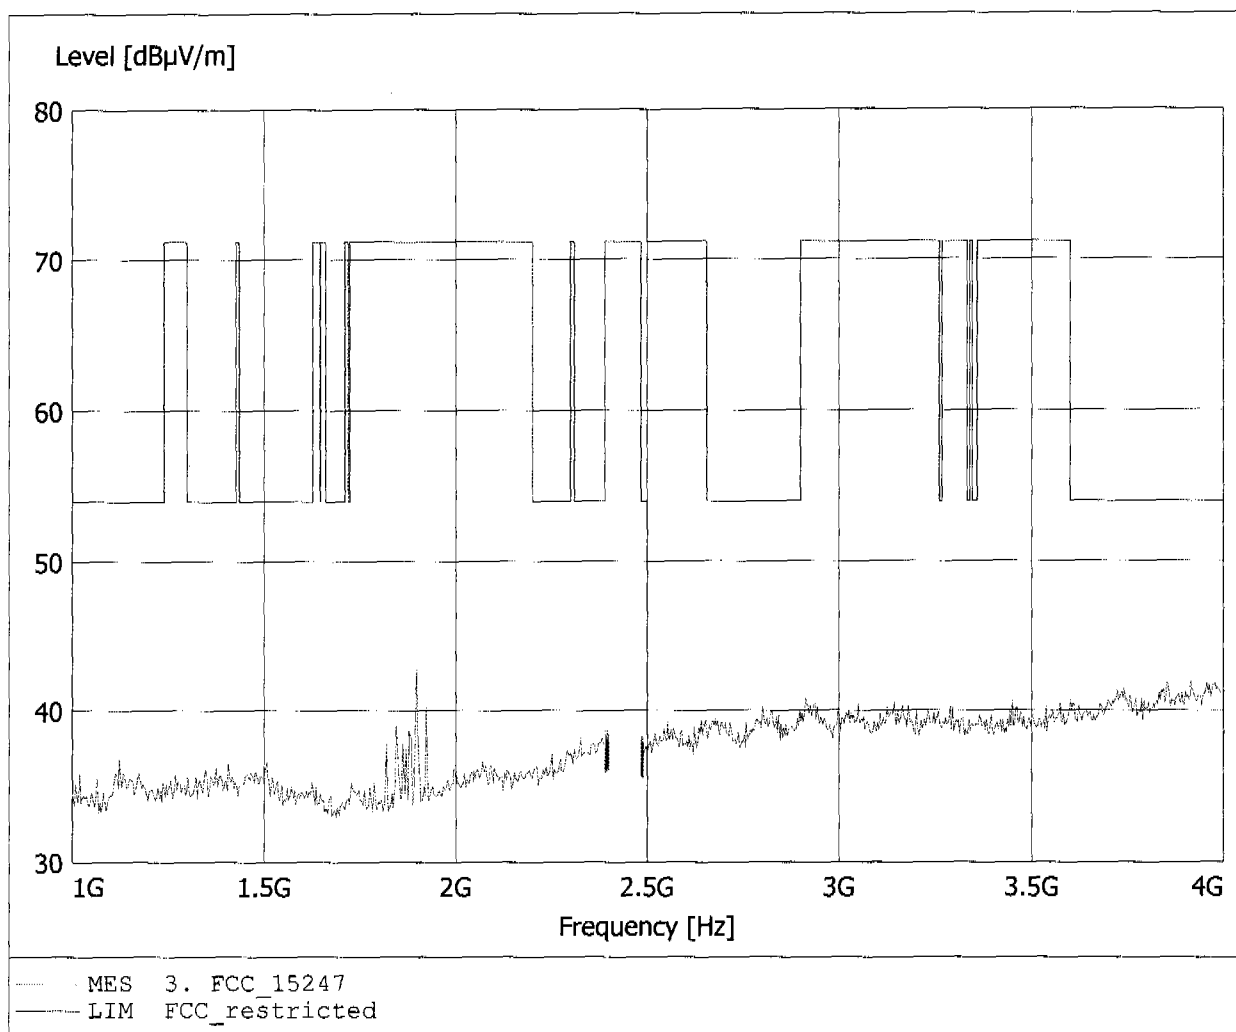


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.944GHz, Emax: 37.84dBμV/m, RBW: 1MHz

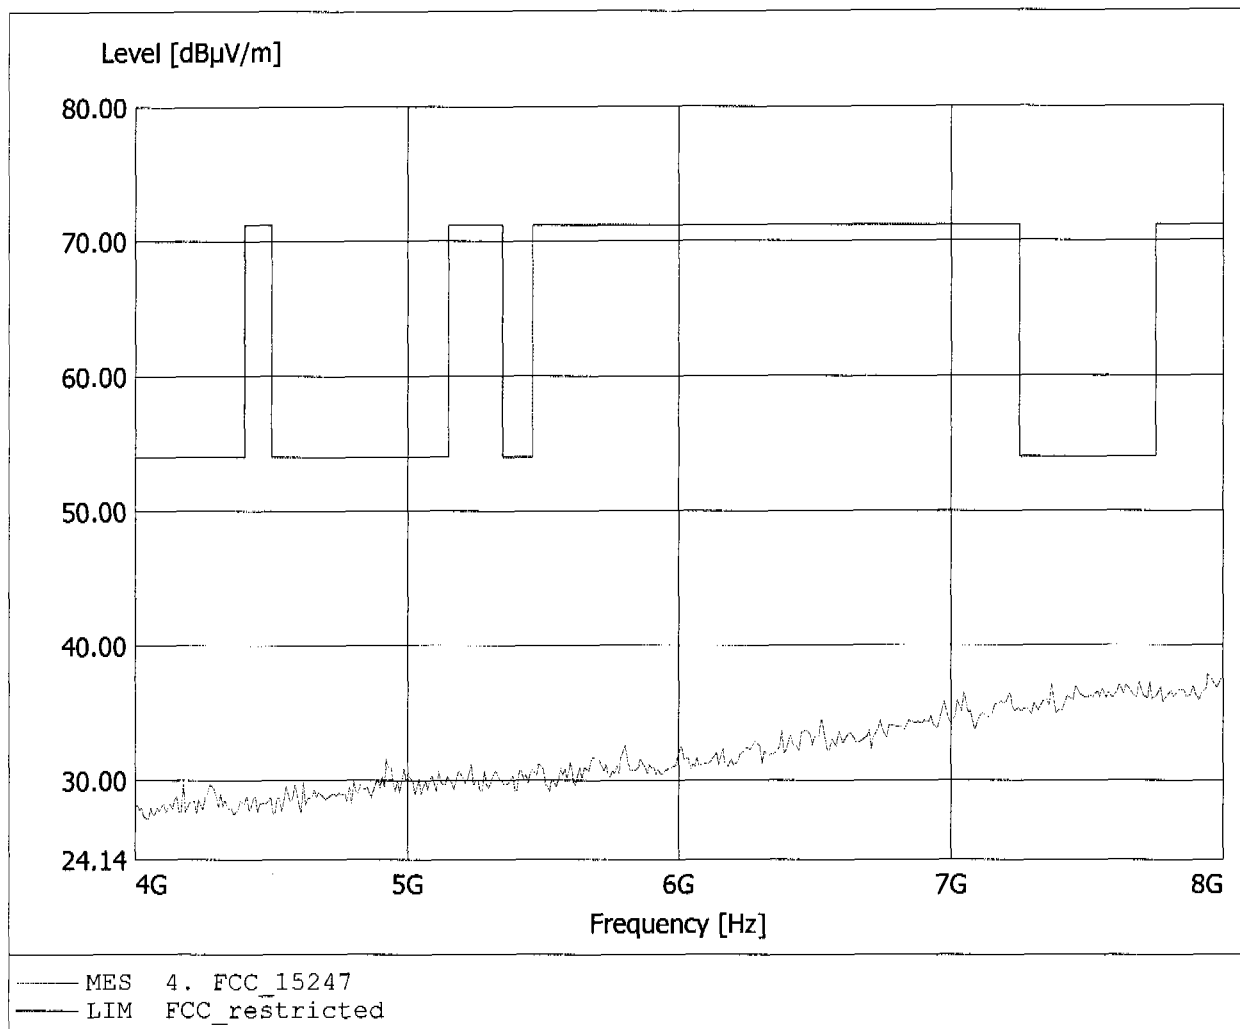


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.631GHz, Emax: 38.59dBμV/m, RBW: 1MHz

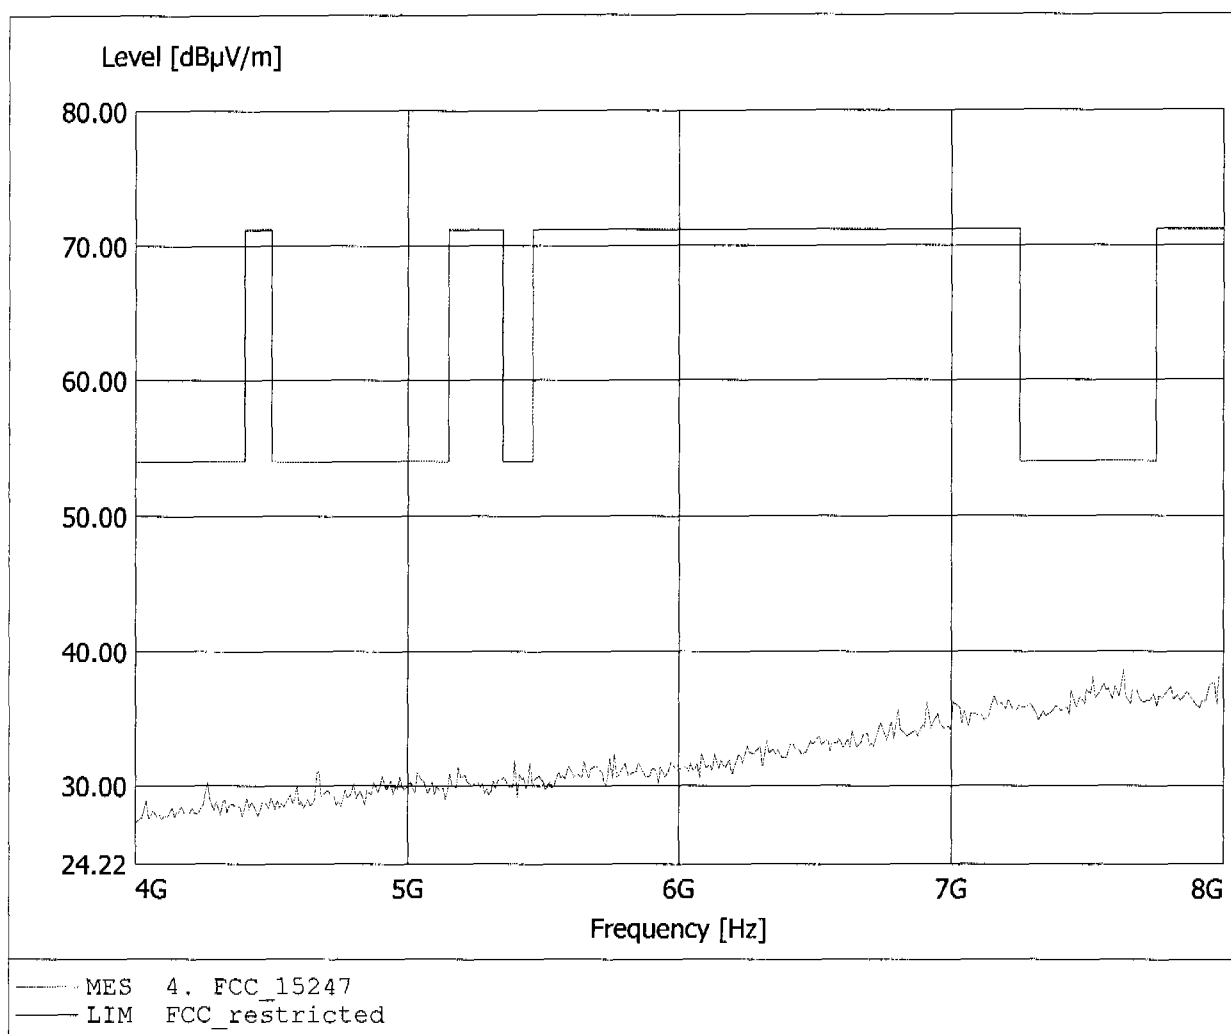


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.944GHz, Emax: 37.88dB μ V/m, RBW: 1MHz

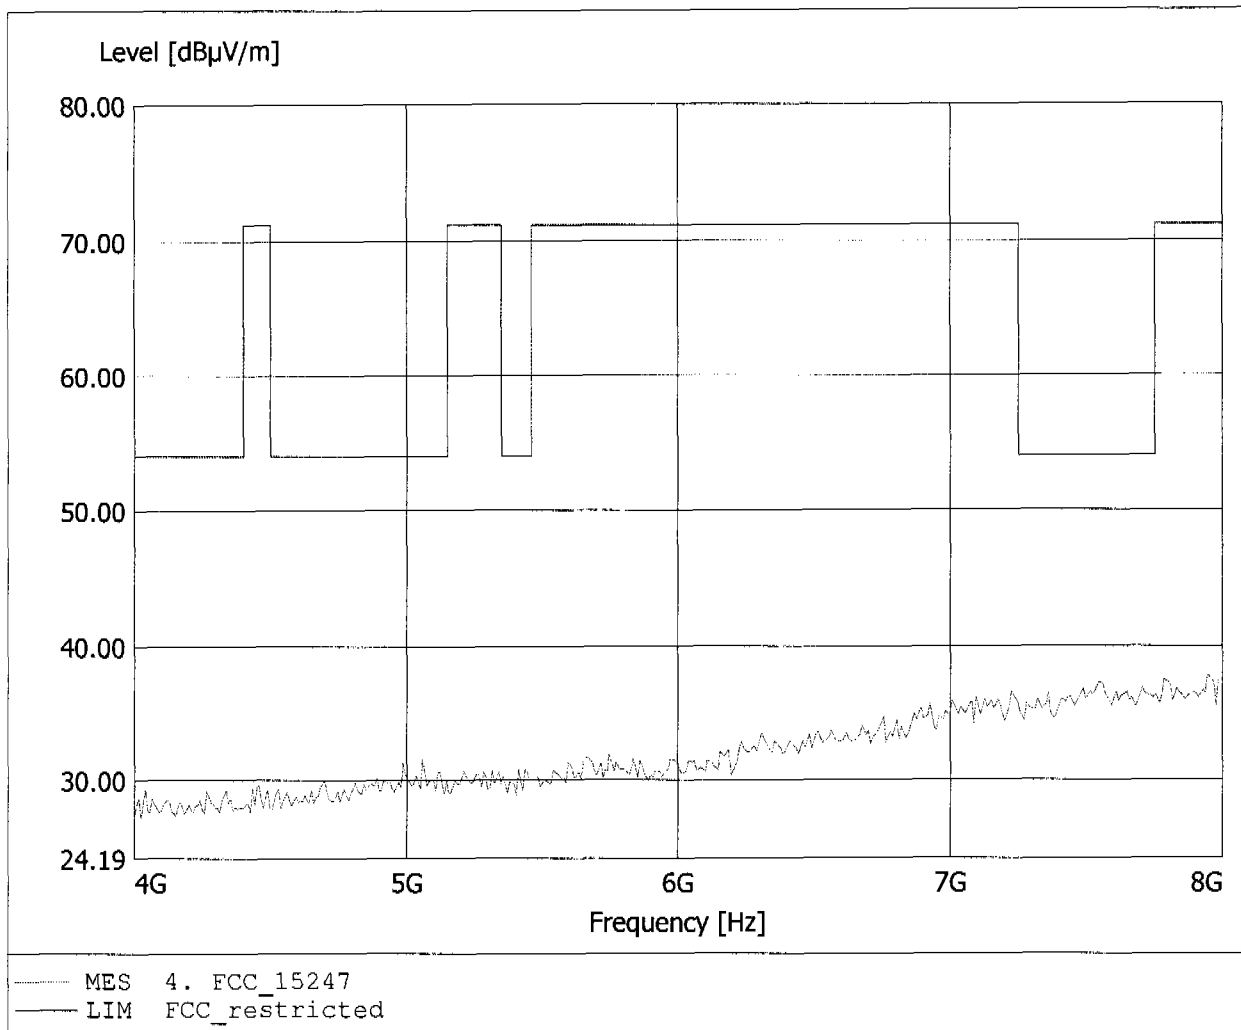


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 37.55dBμV/m, RBW: 1MHz

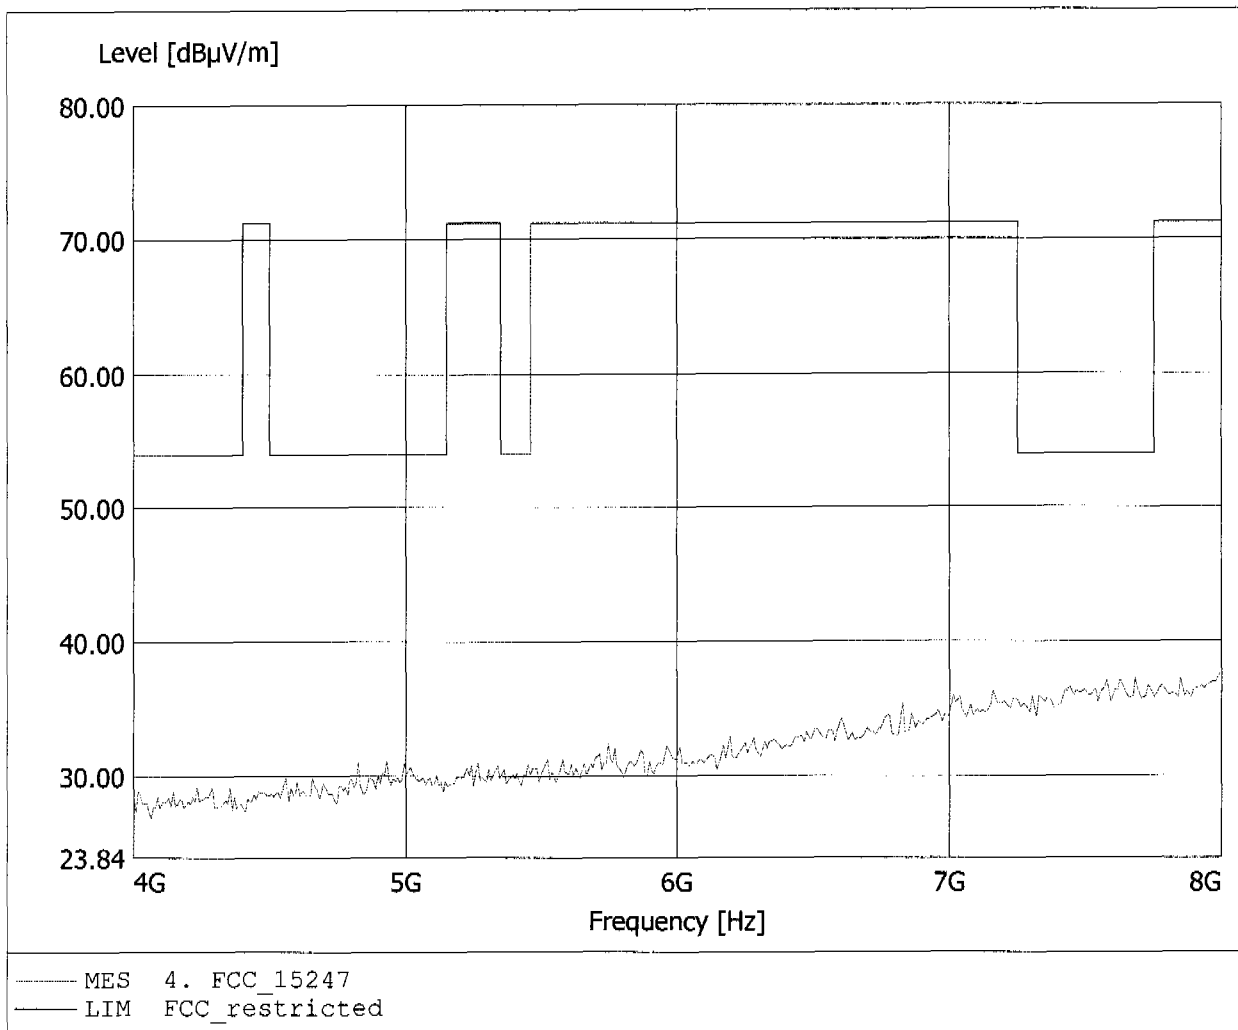


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.840GHz, Emax: 37.30dBμV/m, RBW: 1MHz

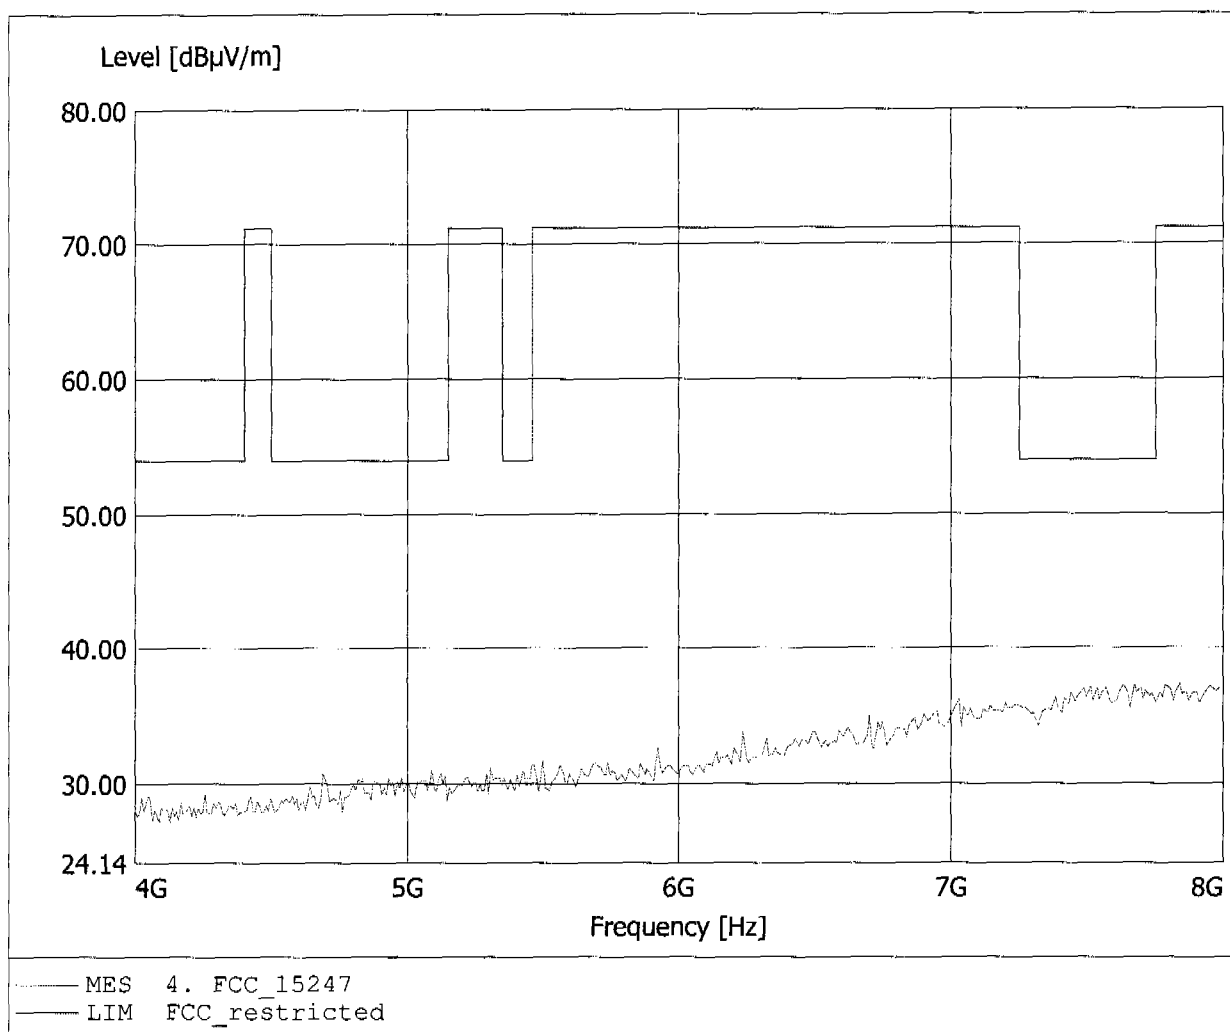


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.52dBμV/m, RBW: 1MHz

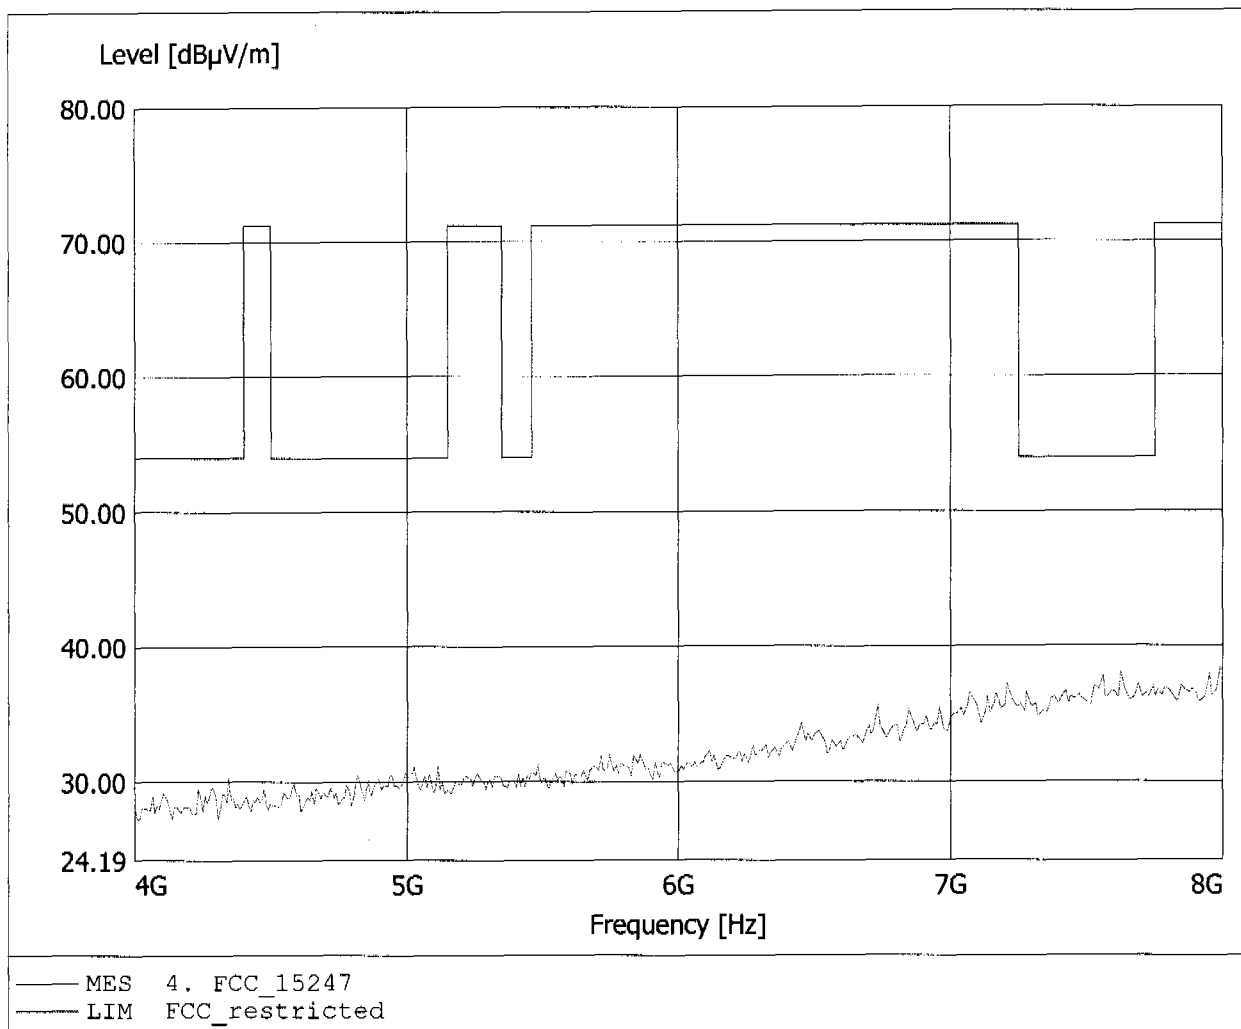


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.463GHz, Emax: 41.54dBμV/m, RBW: 1MHz

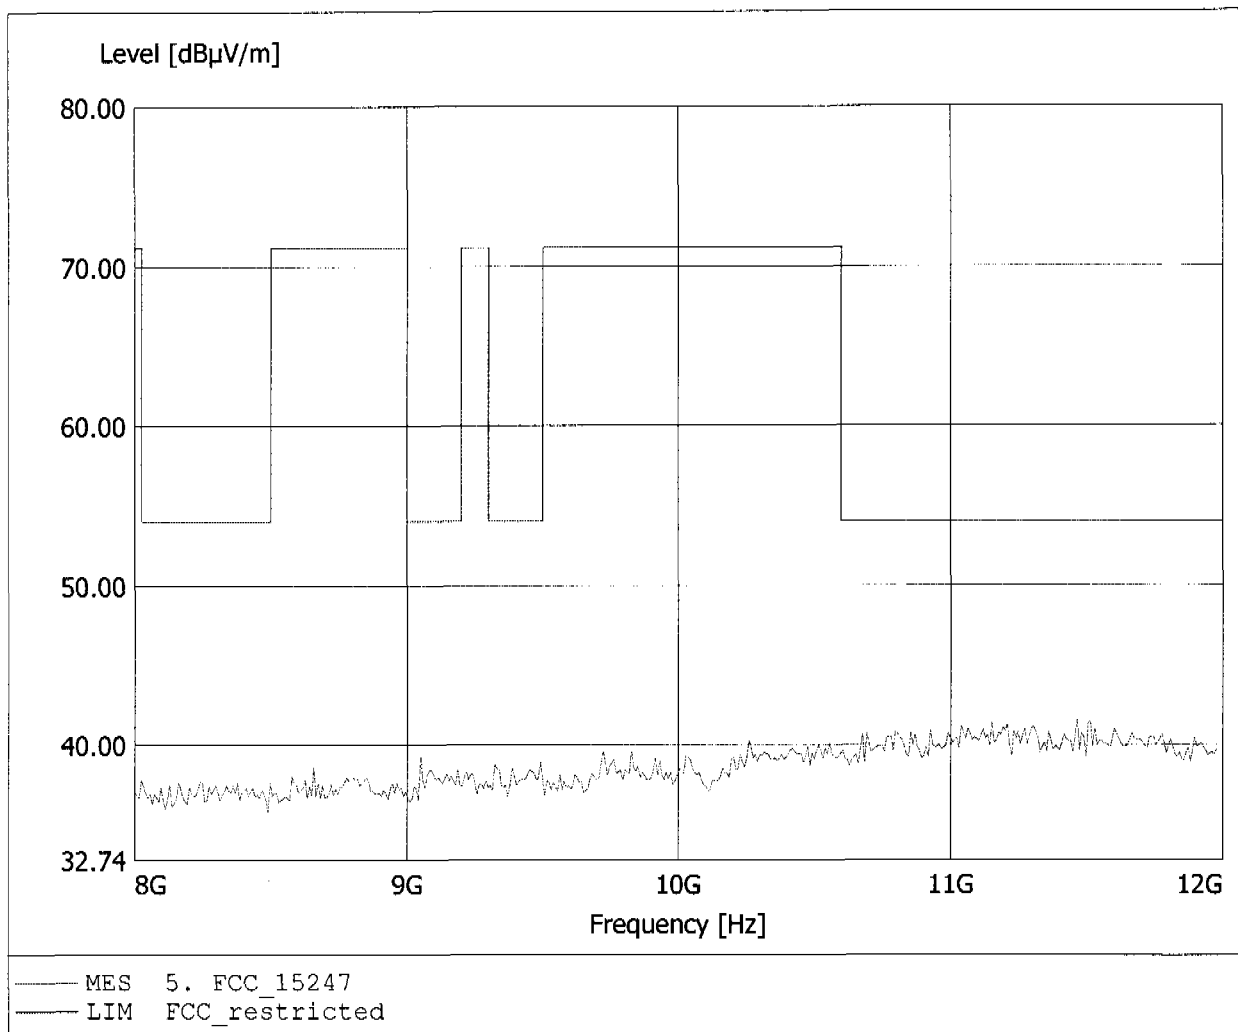


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.519GHz, Emax: 41.36dBμV/m, RBW: 1MHz

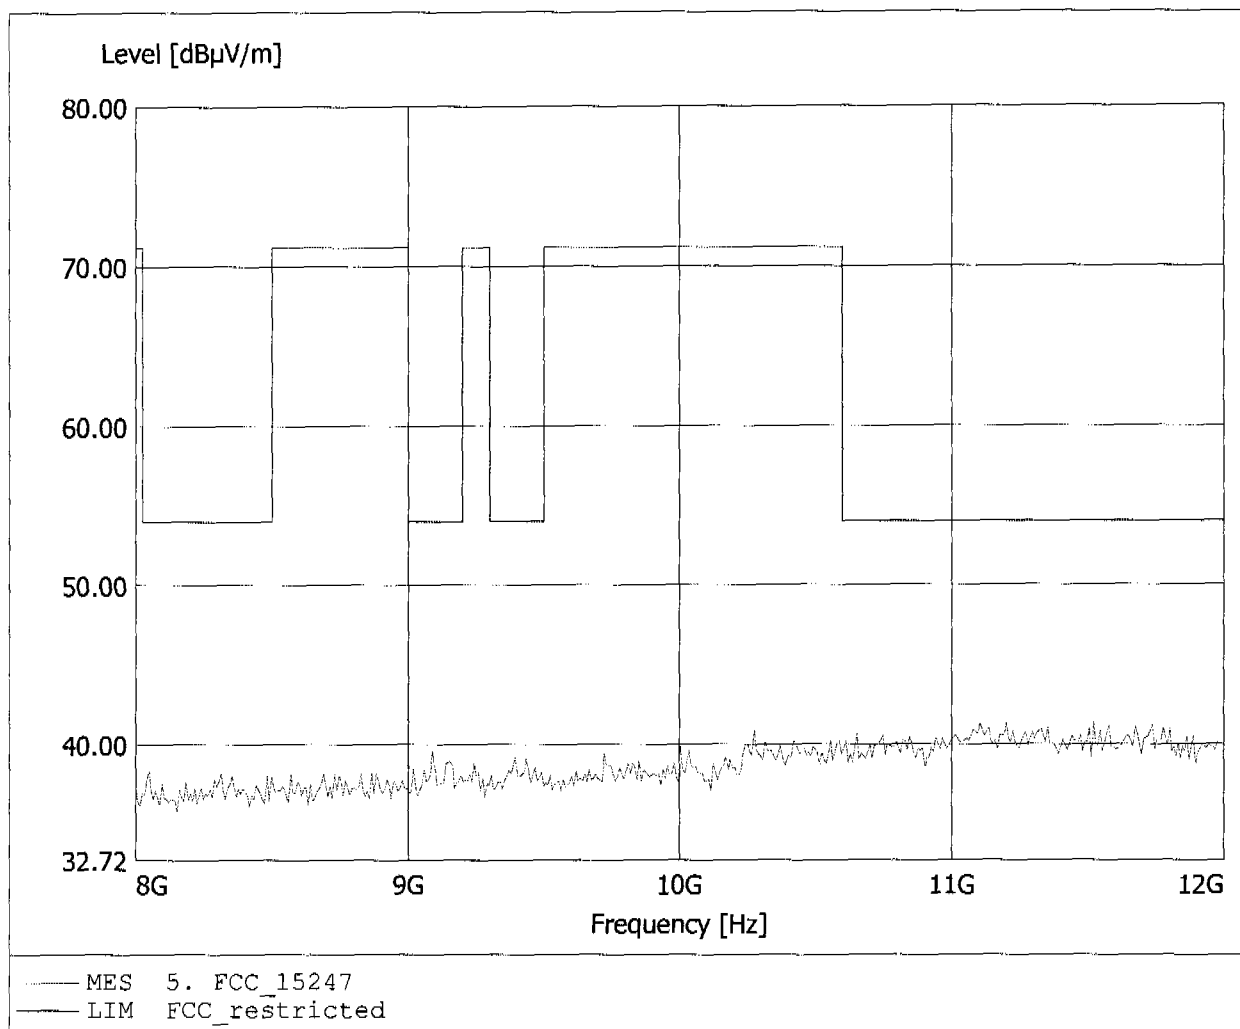


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.463GHz, Emax: 41.97dBµV/m, RBW: 1MHz

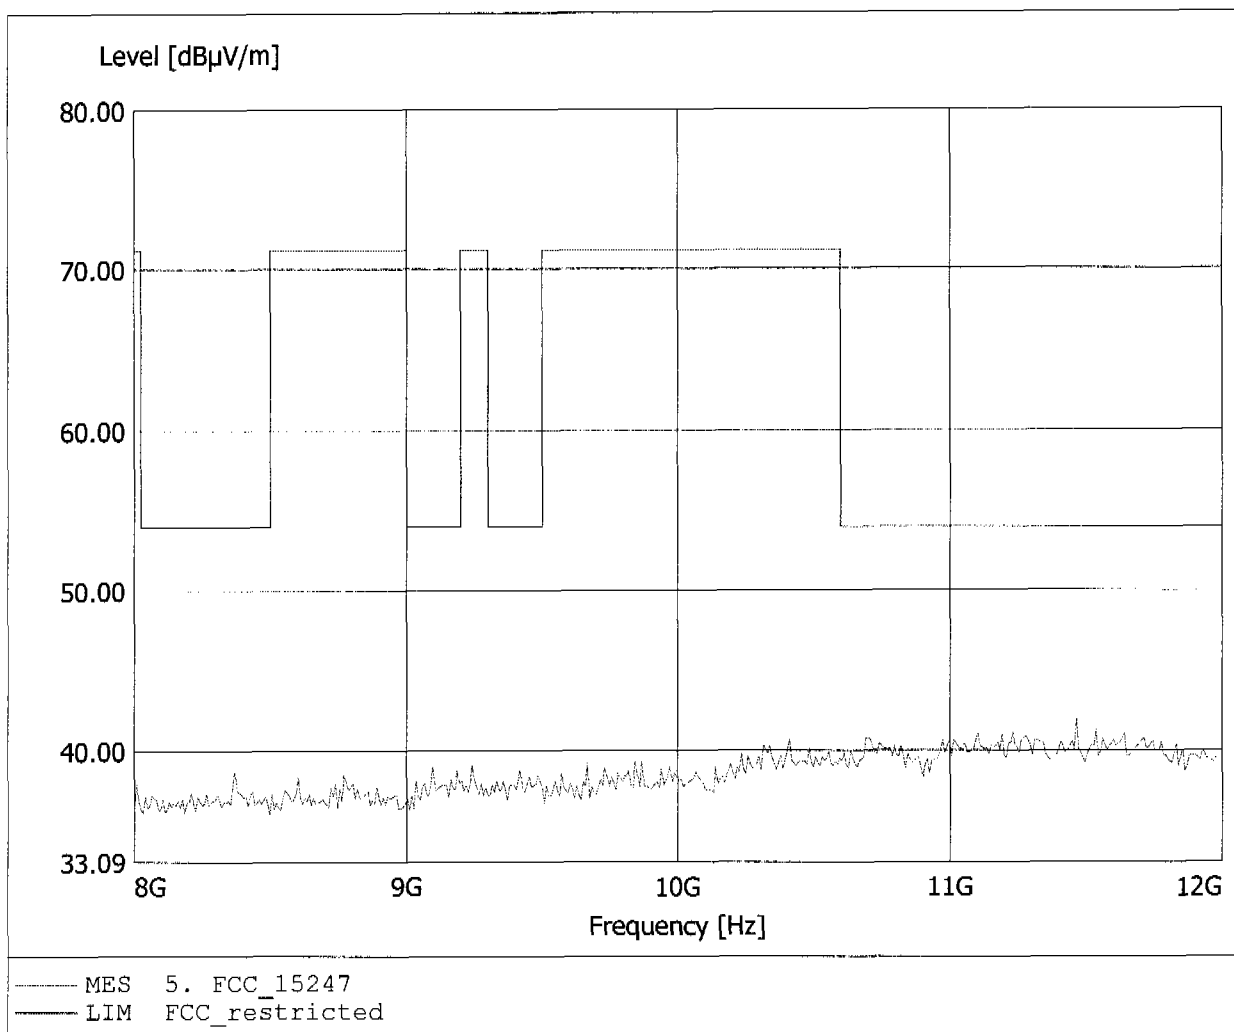


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.551GHz, Emax: 41.70dBuV/m, RBW: 1MHz

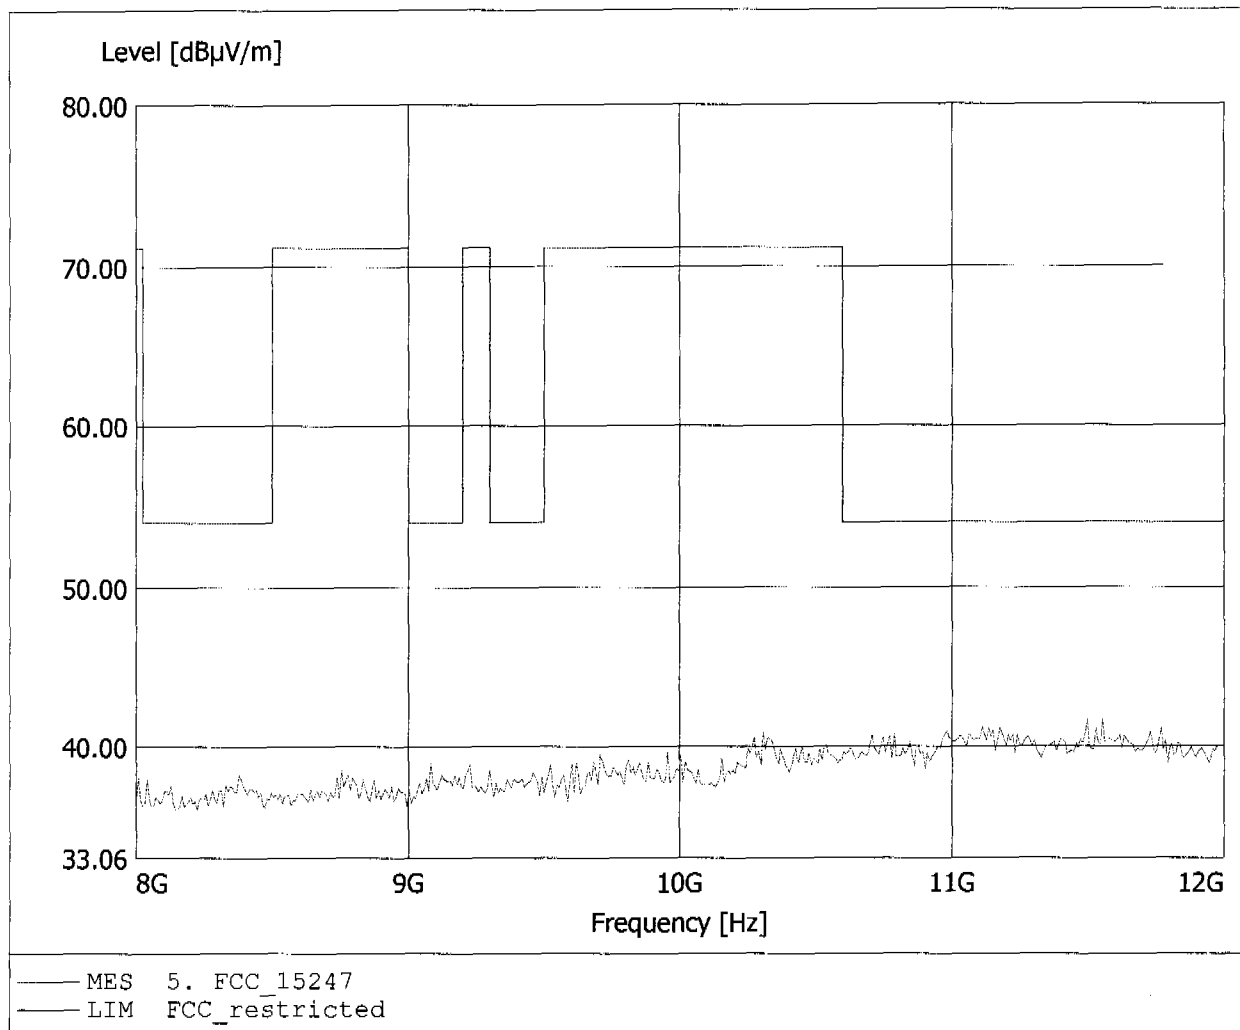


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.445GHz, Emax: 41.78dBμV/m, RBW: 1MHz

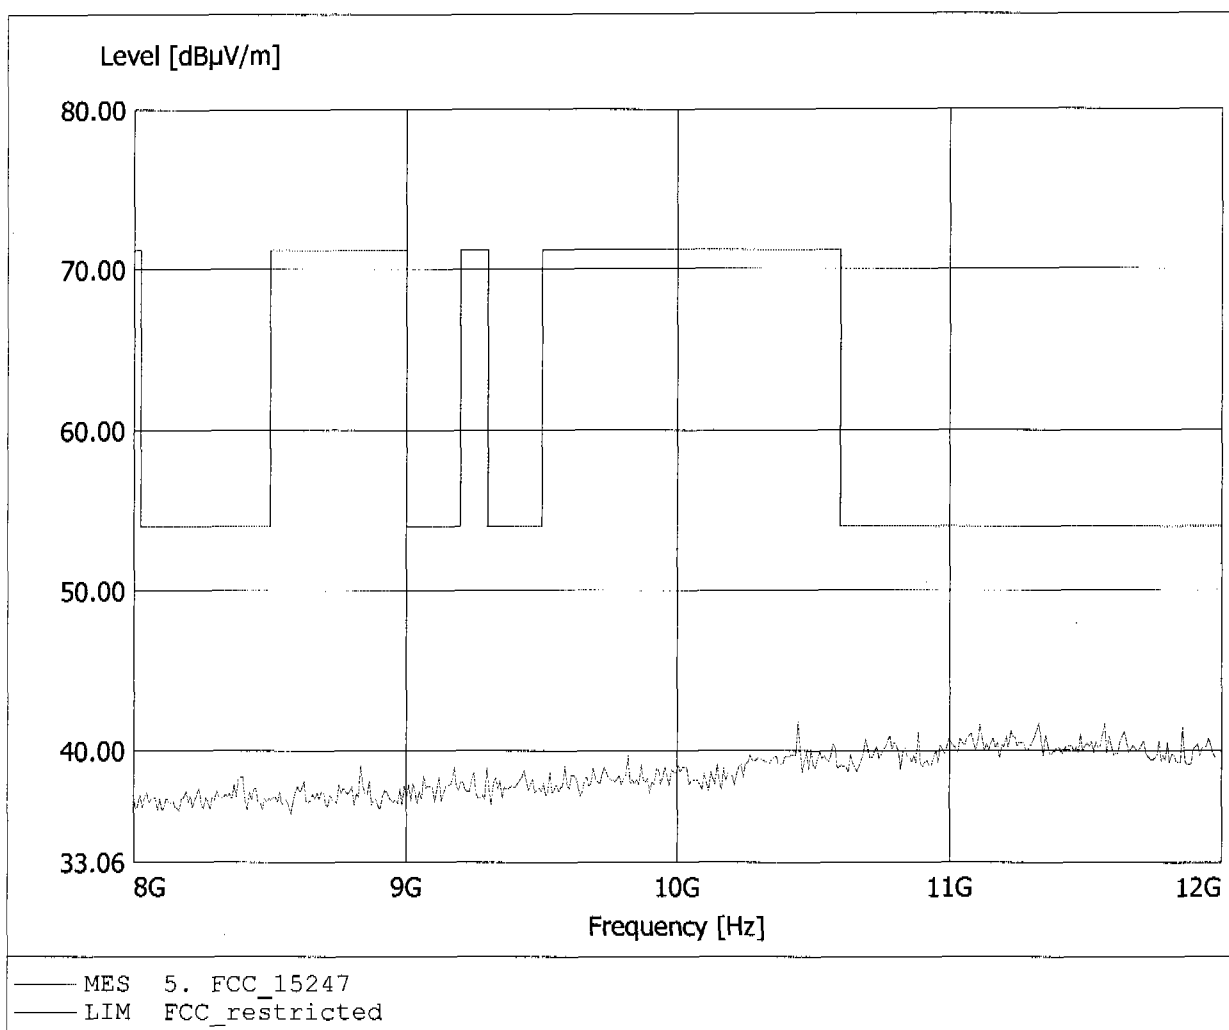


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.166GHz, Emax: 41.62dBμV/m, RBW: 1MHz

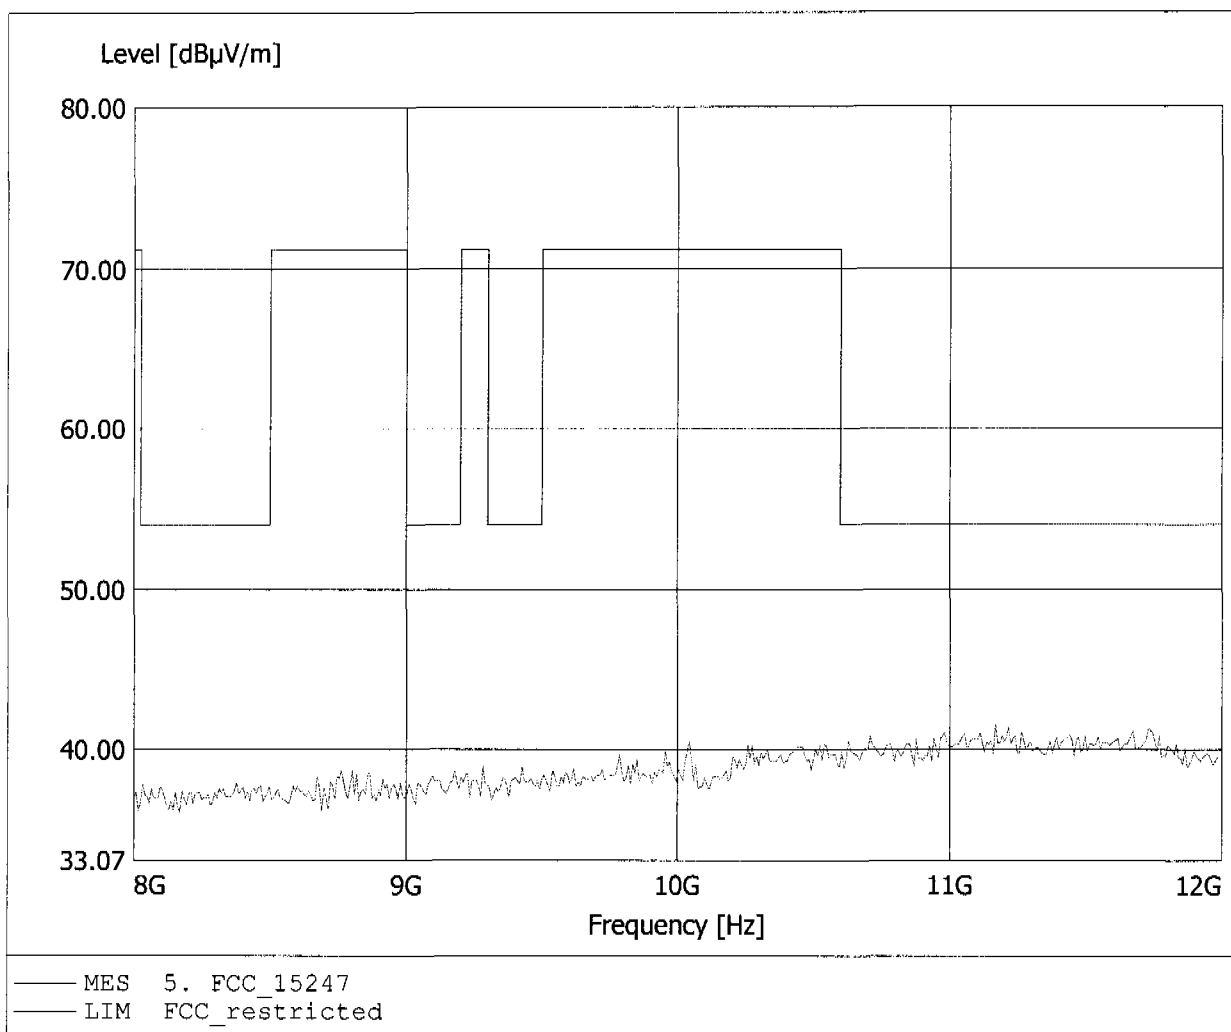


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.565GHz, Emax: 44.48dBμV/m, RBW: 1MHz

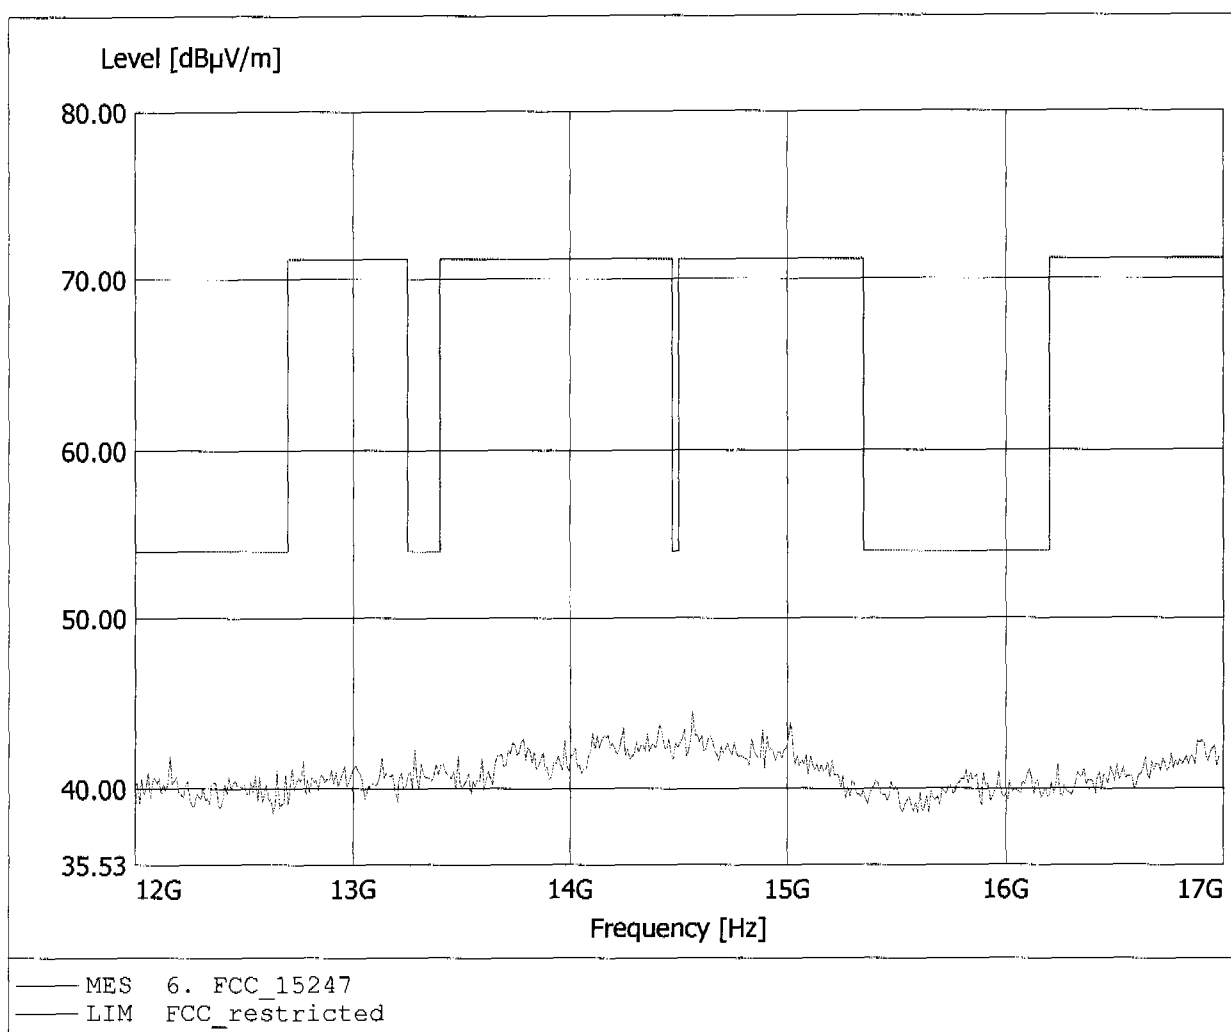


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.575GHz, Emax: 43.60dBμV/m, RBW: 1MHz

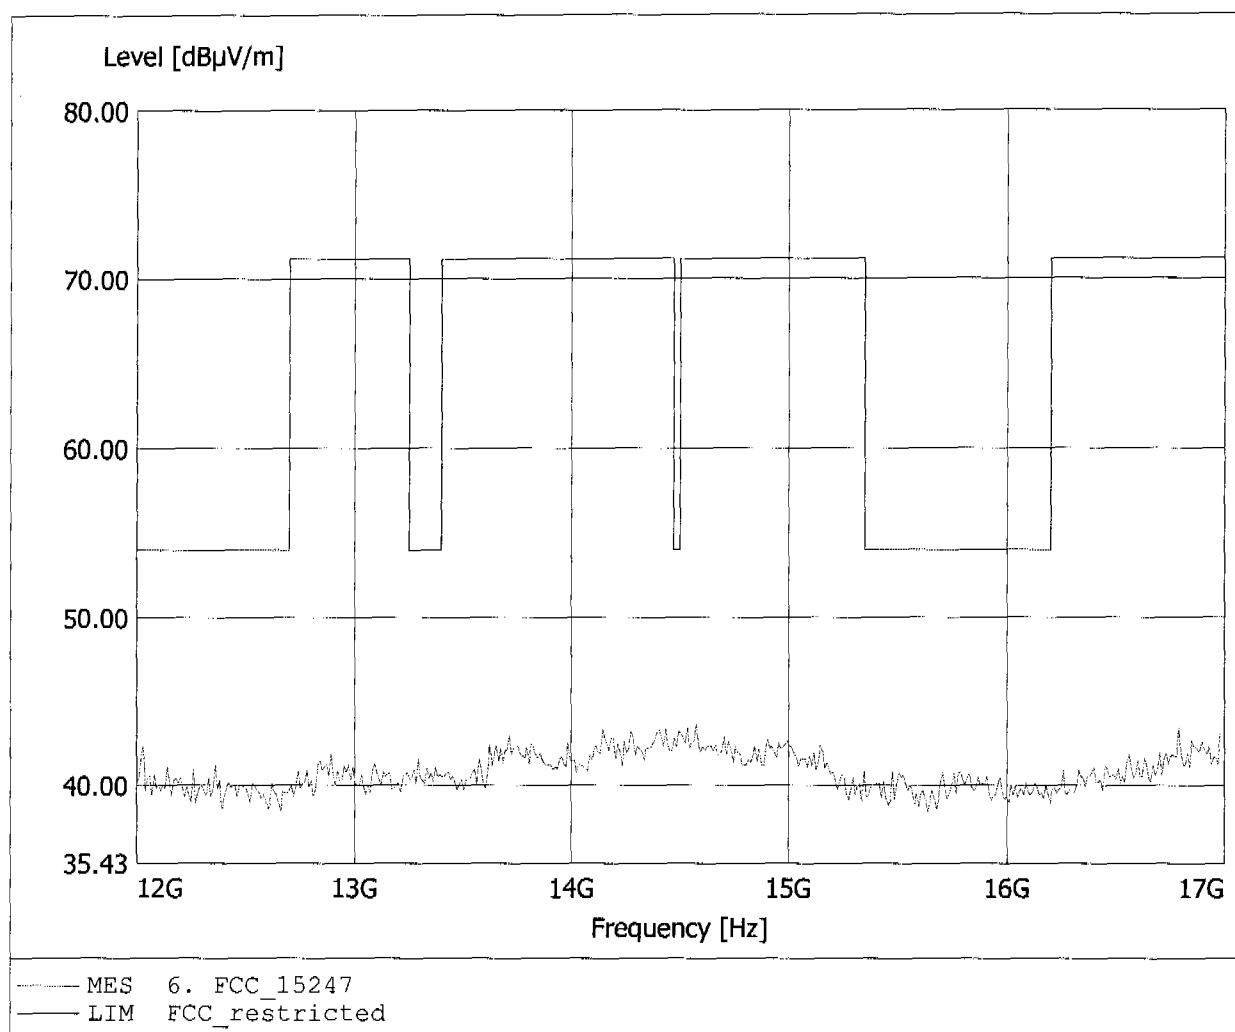


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.214GHz, Emax: 44.24dBμV/m, RBW: 1MHz

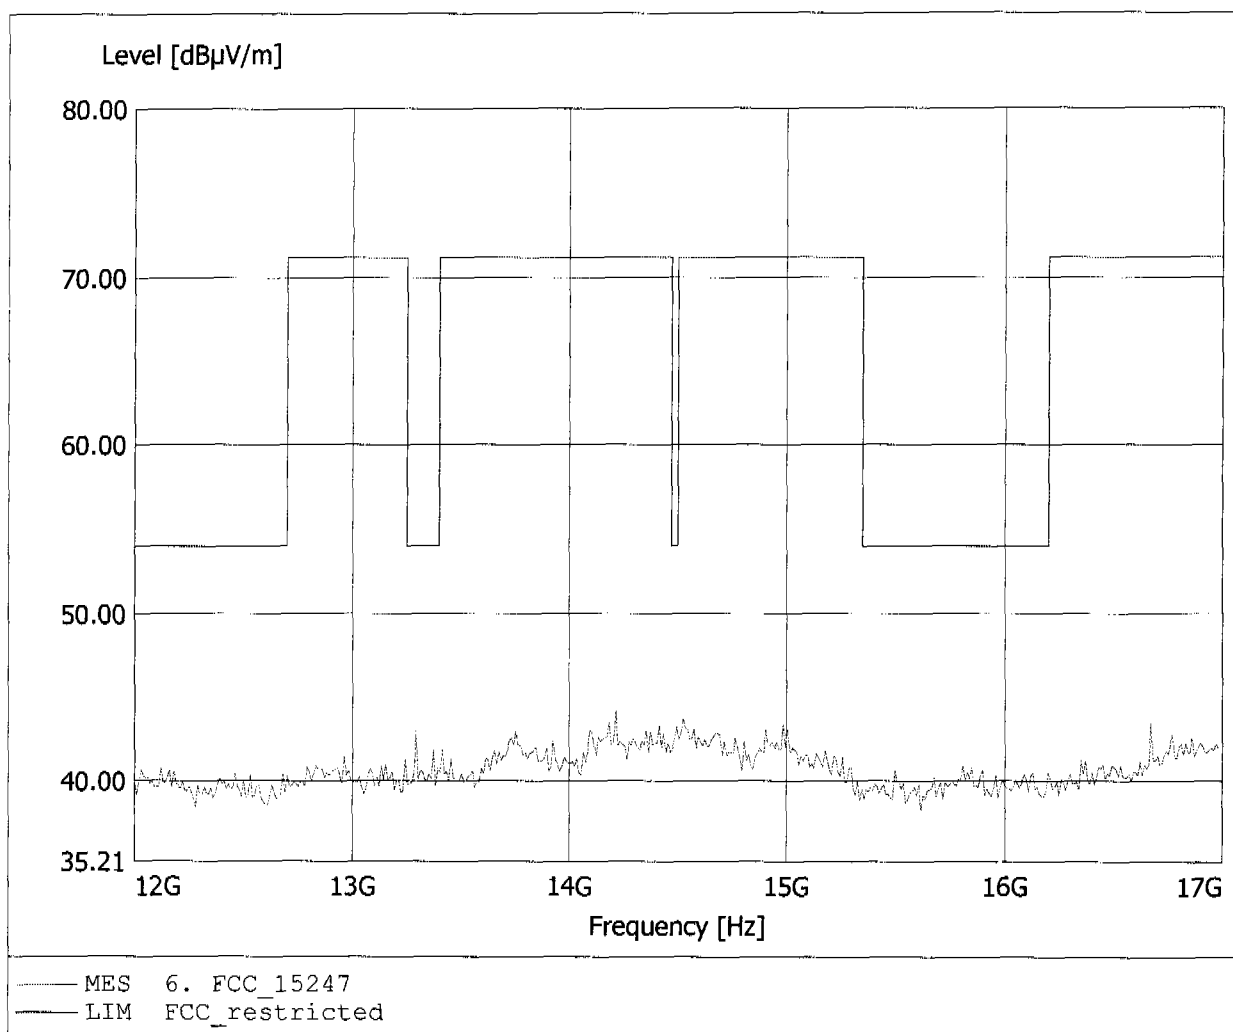


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.325GHz, Emax: 43.77dBμV/m, RBW: 1MHz

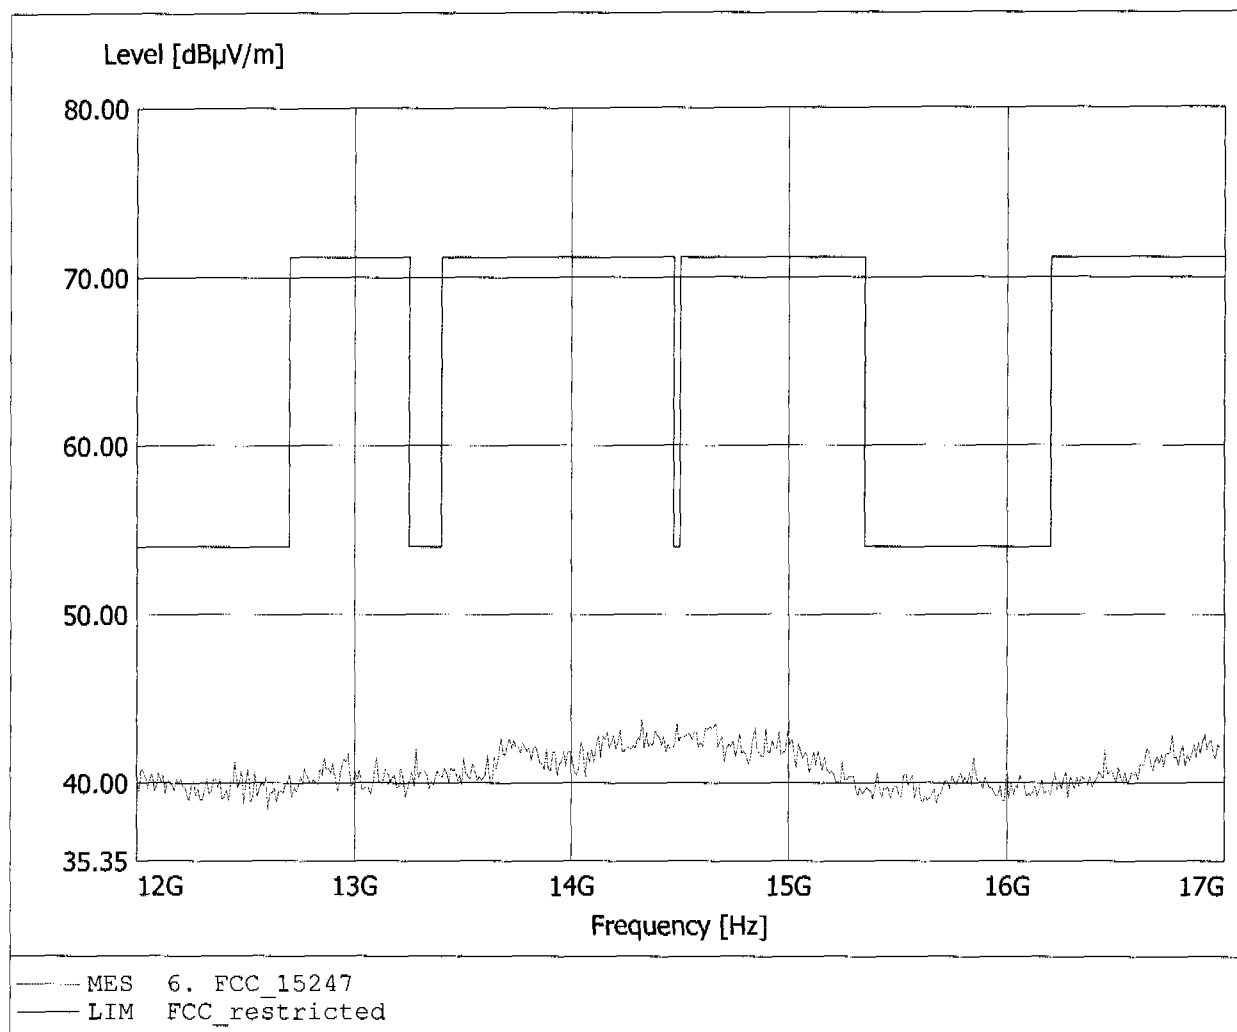


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.505GHz, Emax: 43.86dBμV/m, RBW: 1MHz

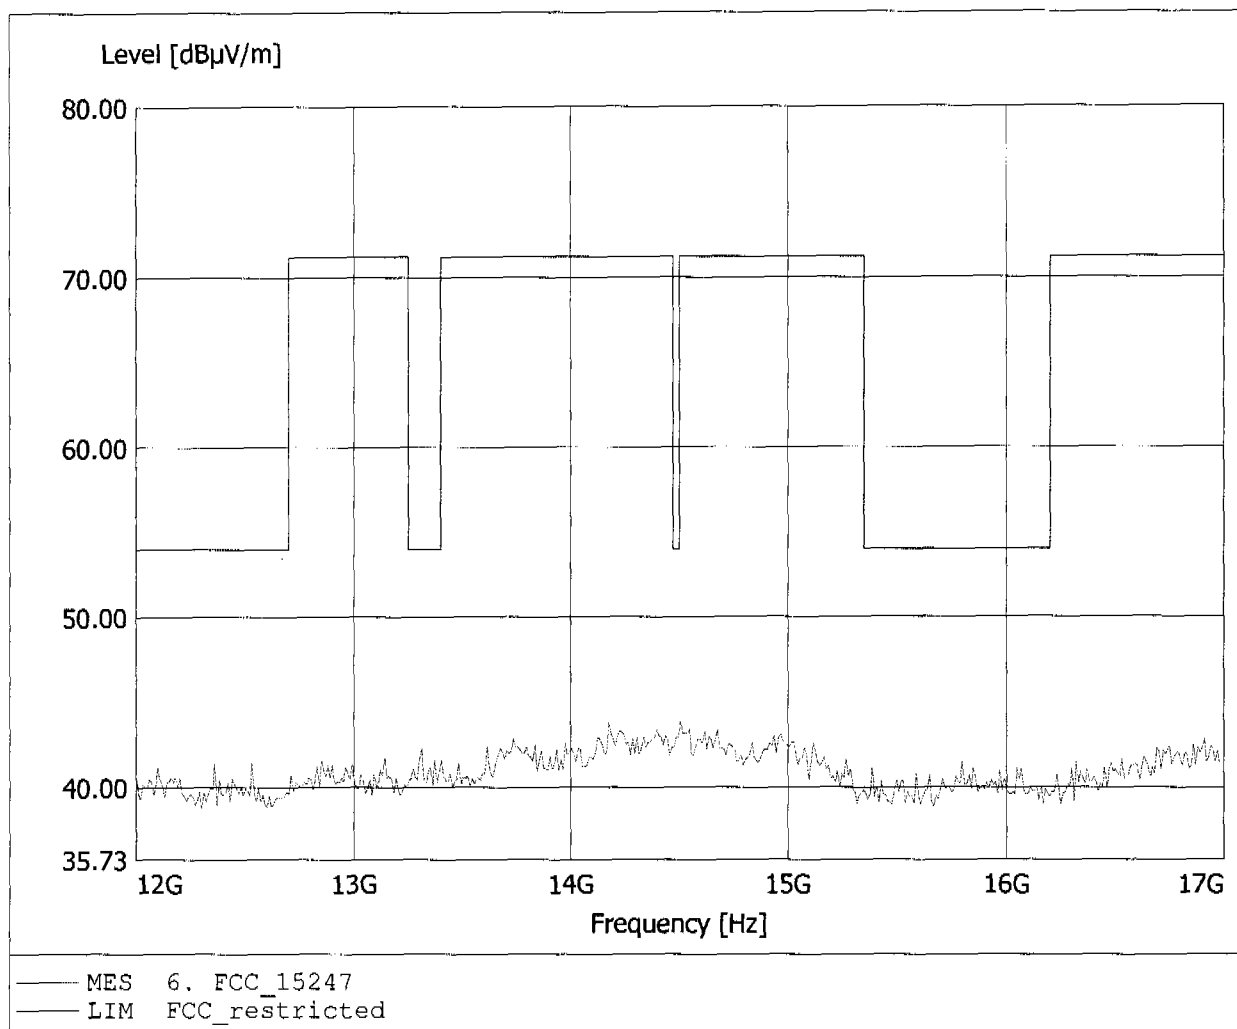


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.495GHz, Emax: 44.33dBμV/m, RBW: 1MHz

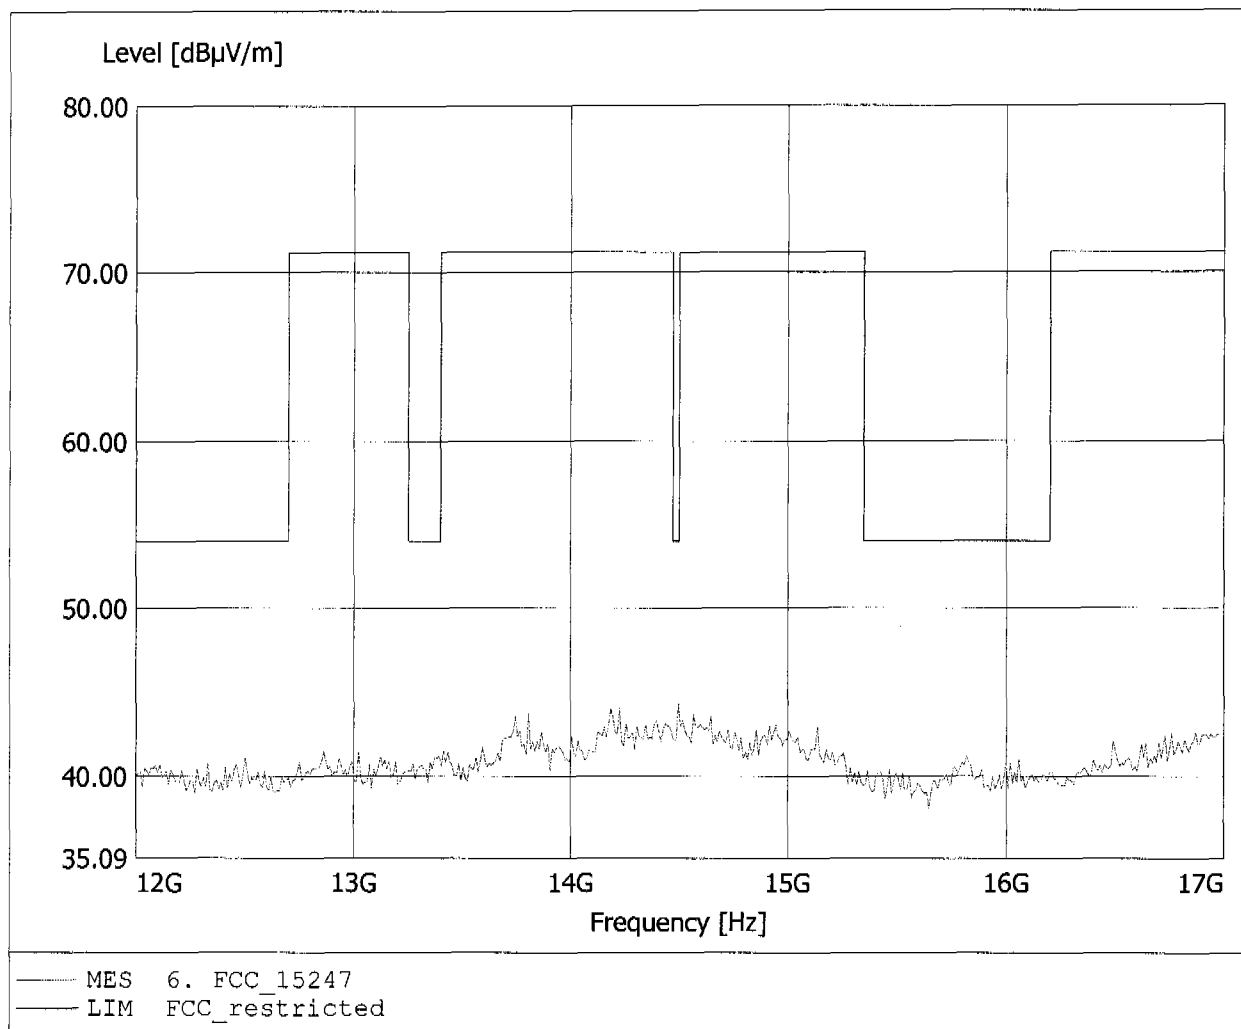


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.93dBμV/m, RBW: 1MHz

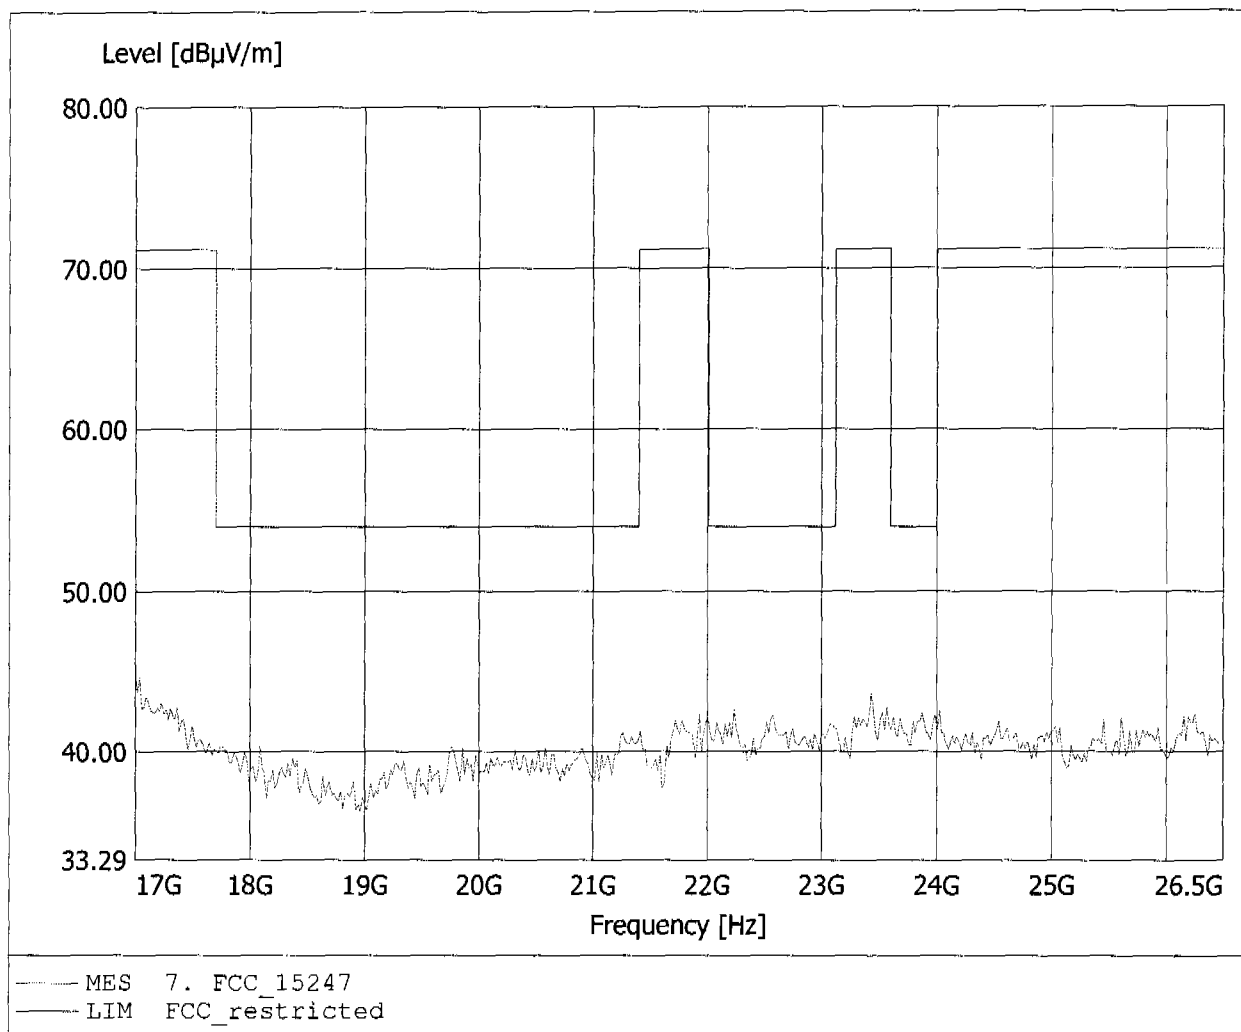


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2480 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.362GHz, Emax: 44.43dBµV/m, RBW: 1MHz

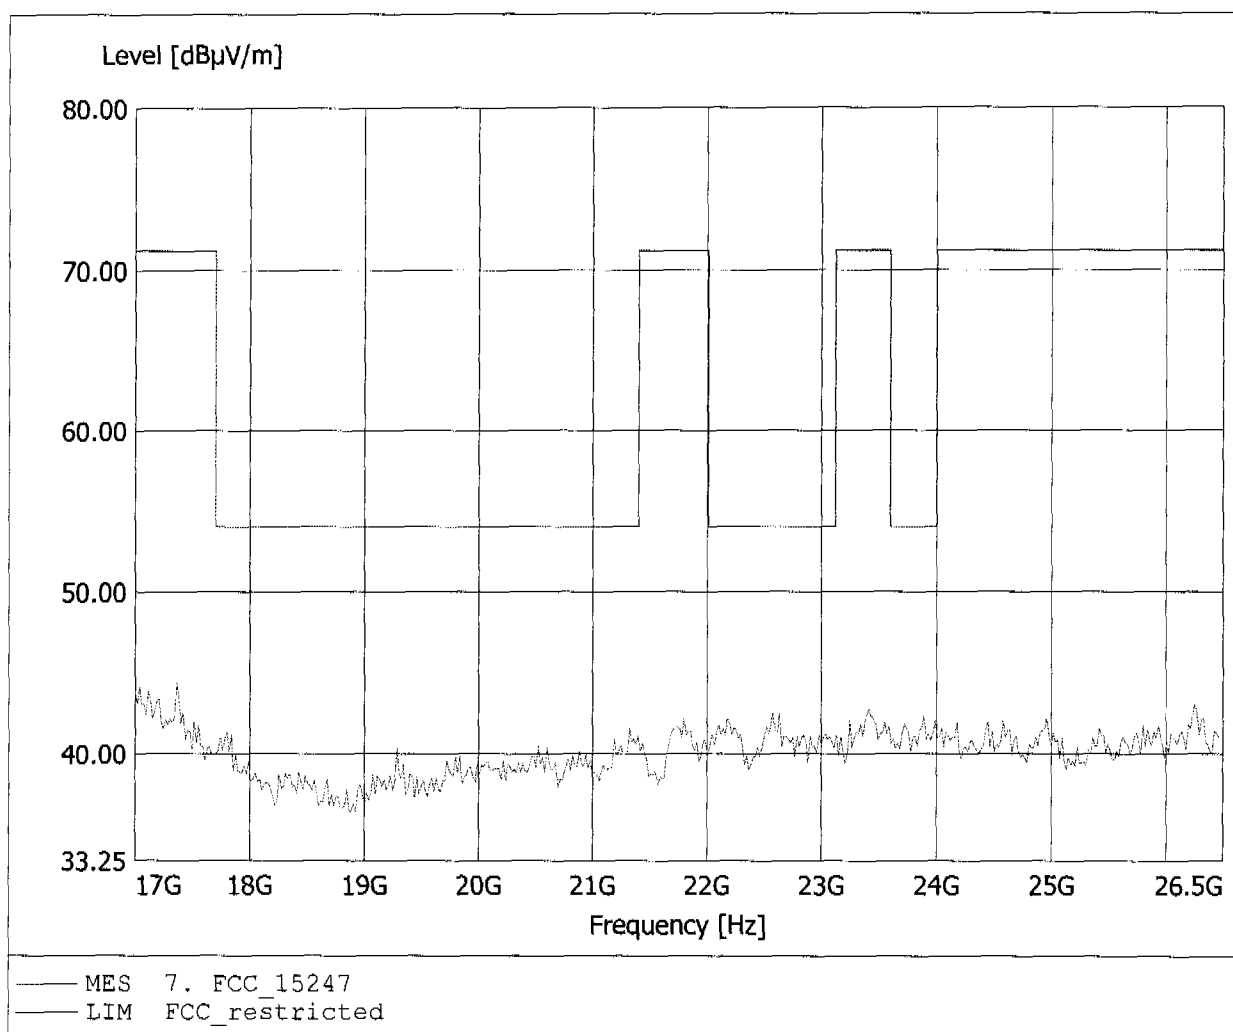


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 43.52dBμV/m, RBW: 1MHz

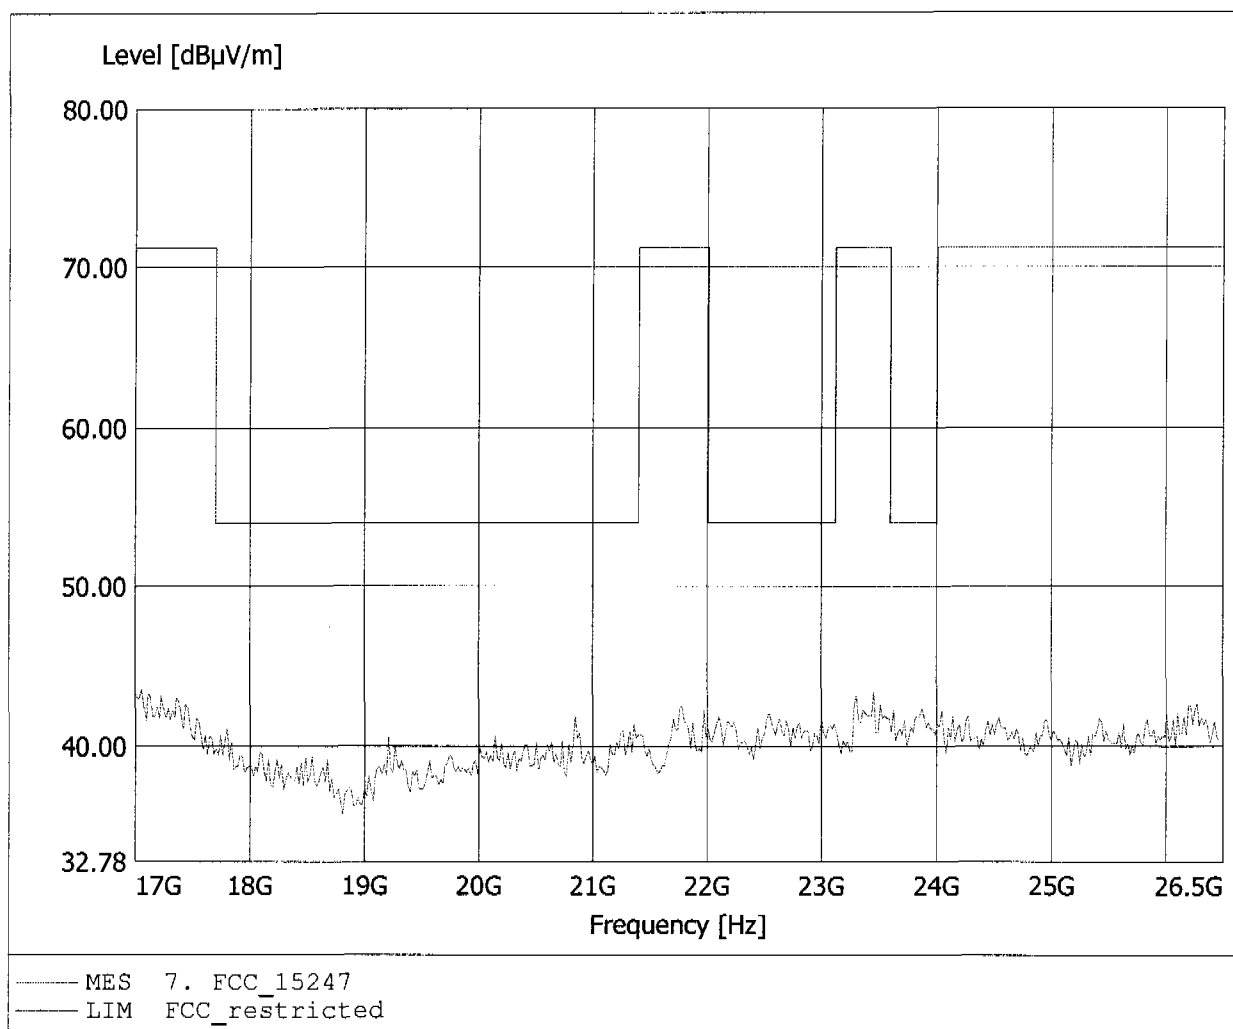


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2402 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.12dBuV/m, RBW: 1MHz

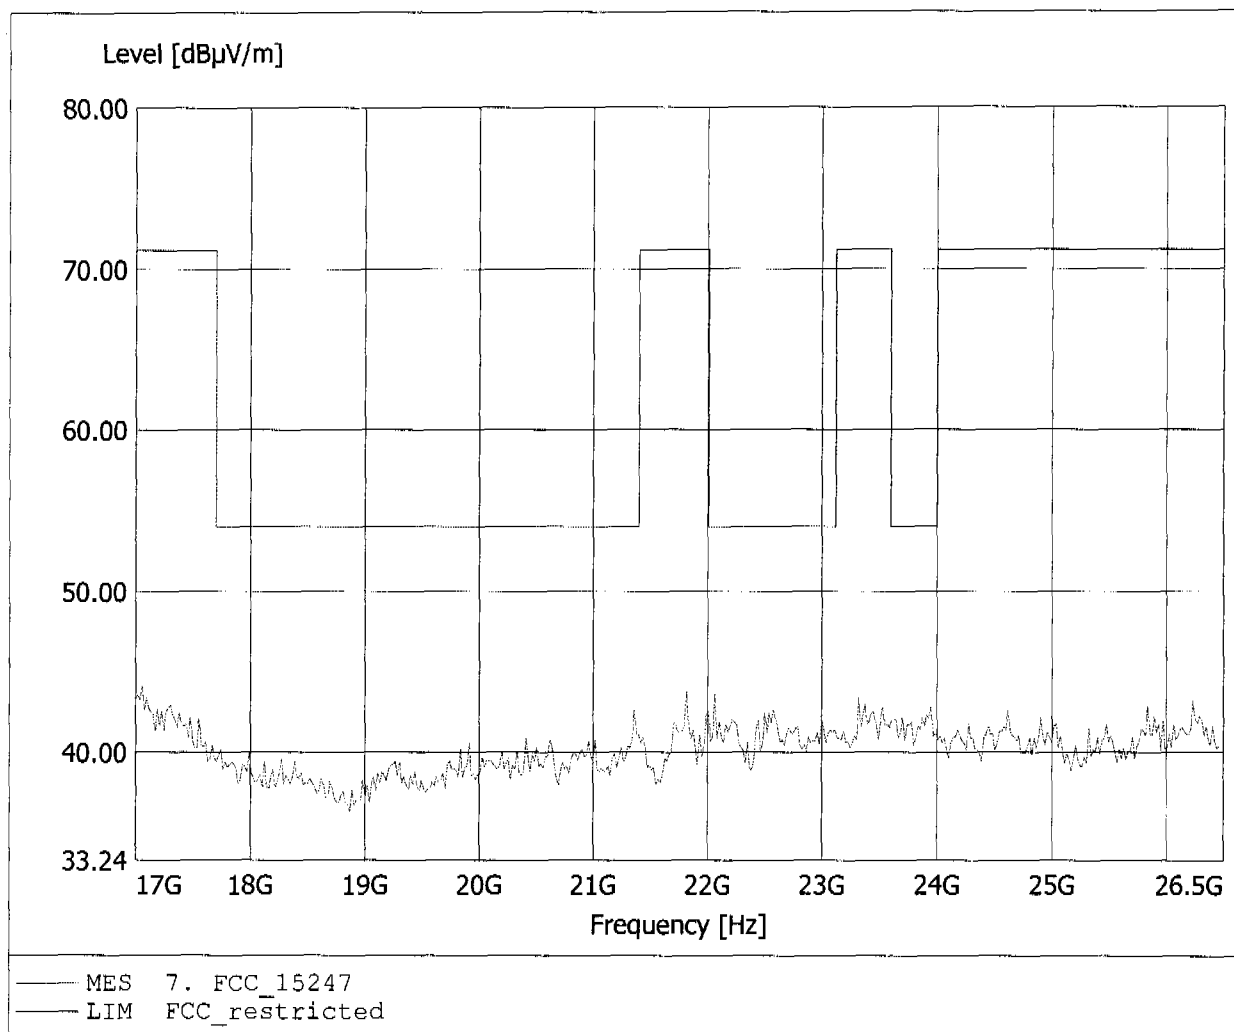


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS)
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.133GHz, Emax: 44.19dBμV/m, RBW: 1MHz

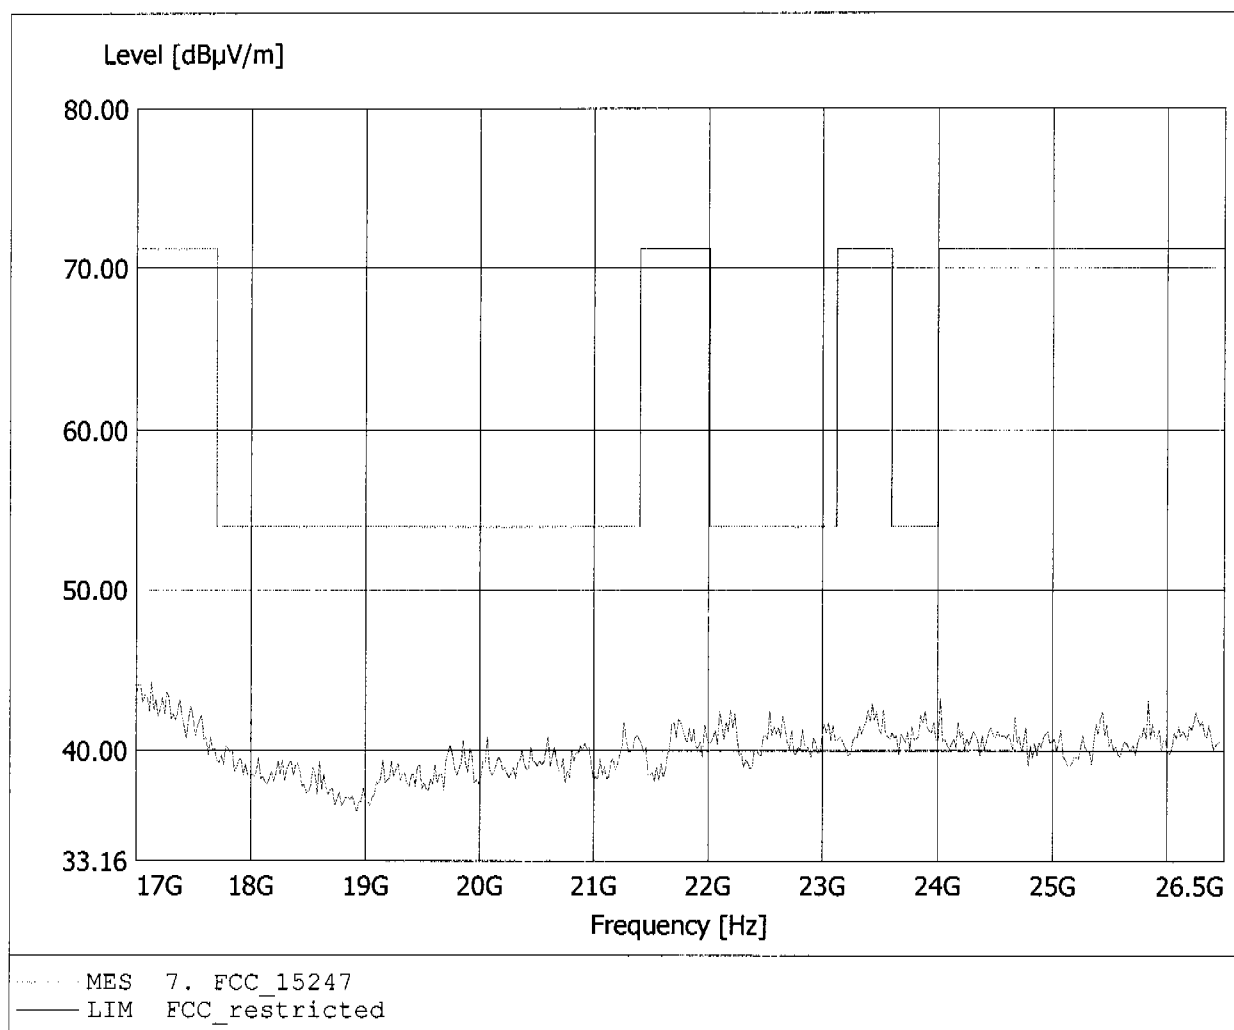

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Triple Band GSM 900 (E-GSM/DCS 1800/PCS 1900 (WAP&GPRS))
Model: G800 / Pmax / 2441 MHz
Approval Holder: Pantech Co., Ltd.
Operating Condition: Tnom: 23°C / Unom: 3.8 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.46dBμV/m, RBW: 1MHz

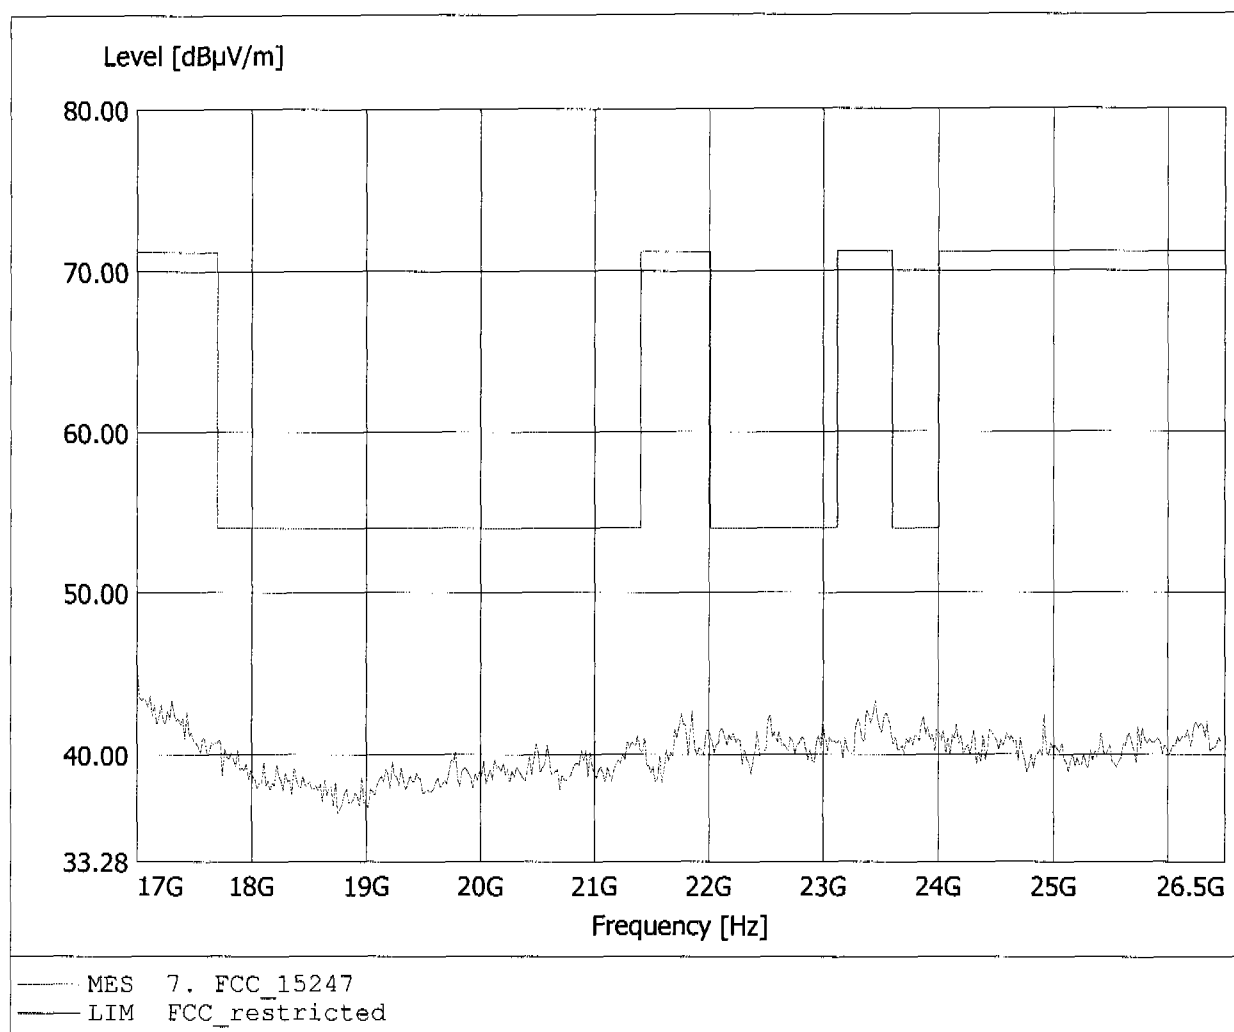

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.02 dB VBW 100 kHz
15 dBm 1.00521042 MHz SWT 5 ms Unit dBm

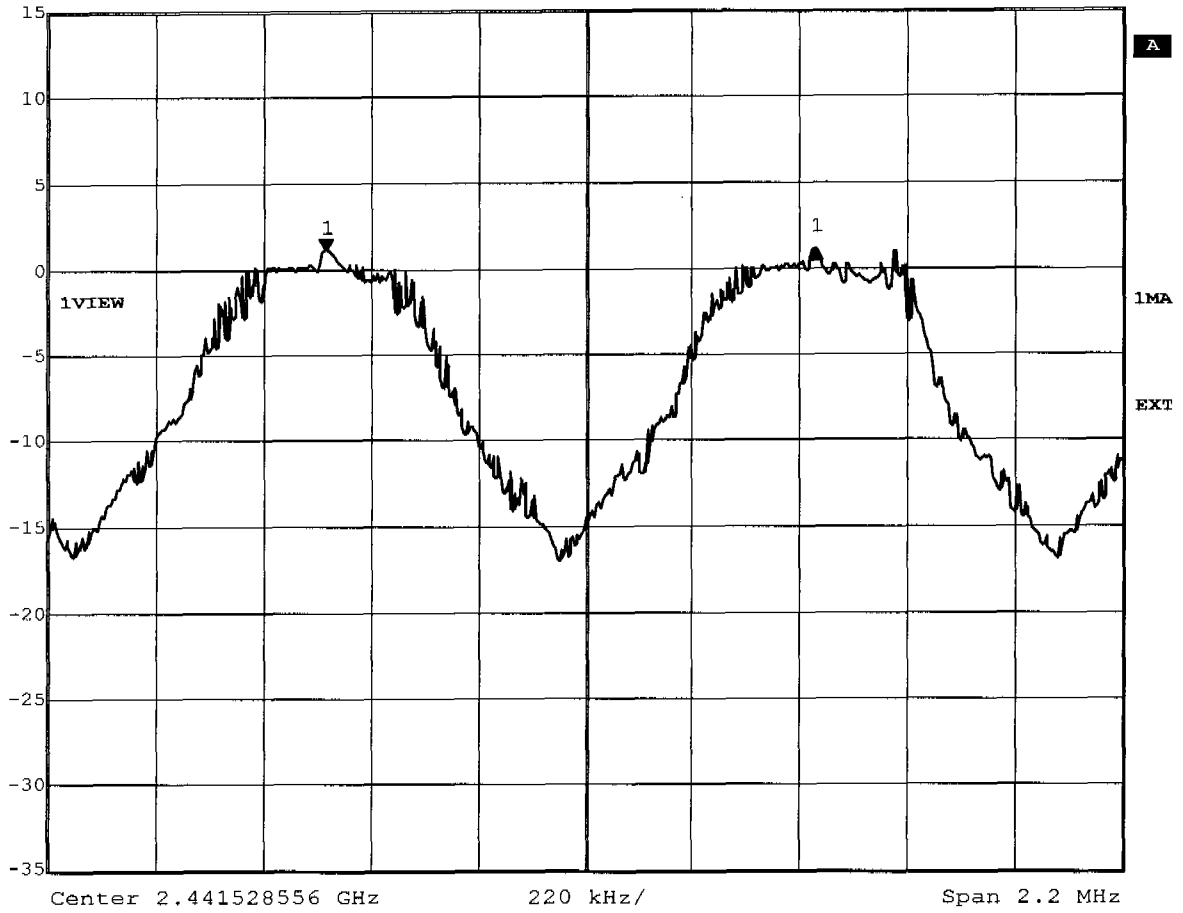


Title: Carrier Frequency Separation
Comment A: G800
Date: 2.FEB.2004 10:12:00

Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.90 dBm VBW 300 kHz
25 dBm 2.41499900 GHz SWT 5 ms Unit dBm

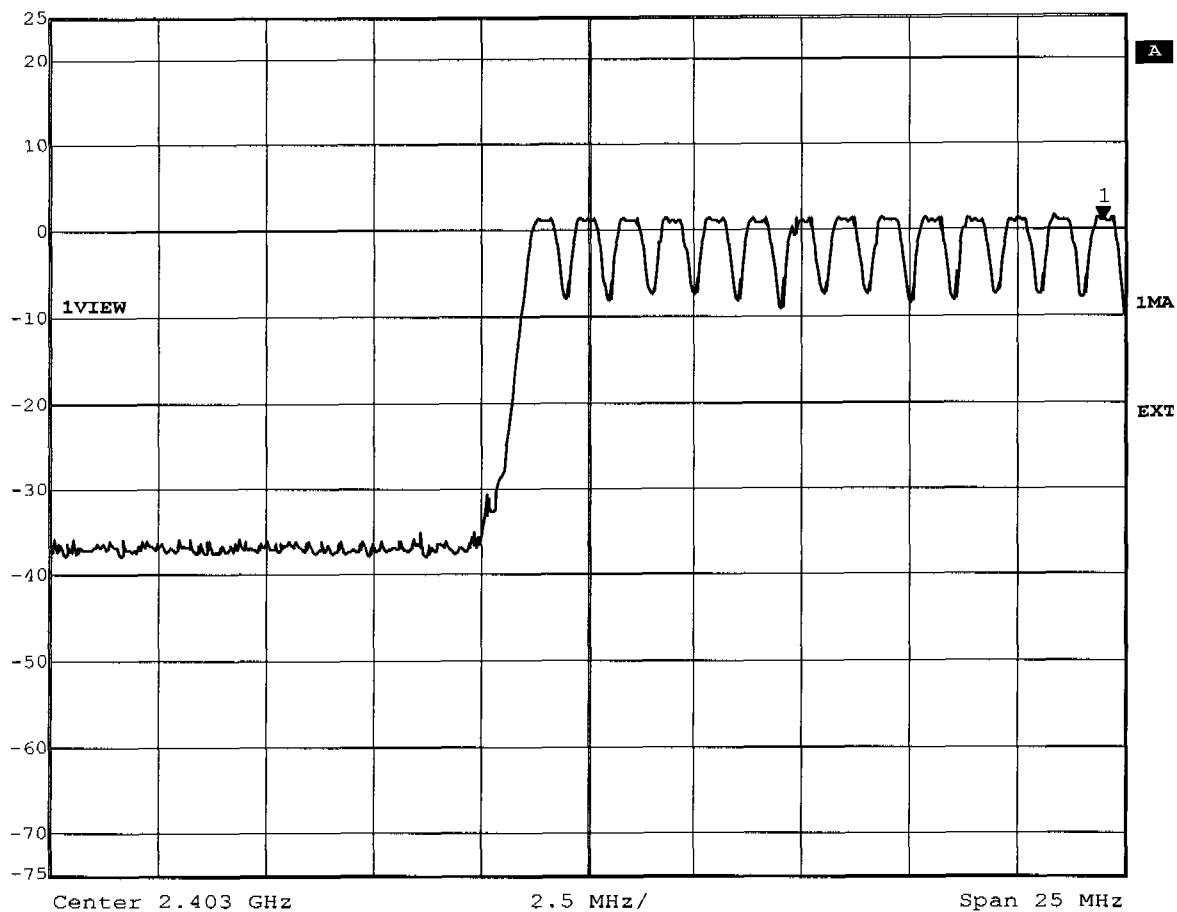

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: G800
Date: 2.FEB.2004 10:14:54




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.95 dBm VBW 300 kHz
25 dBm 2.41595090 GHz SWT 5 ms Unit dBm

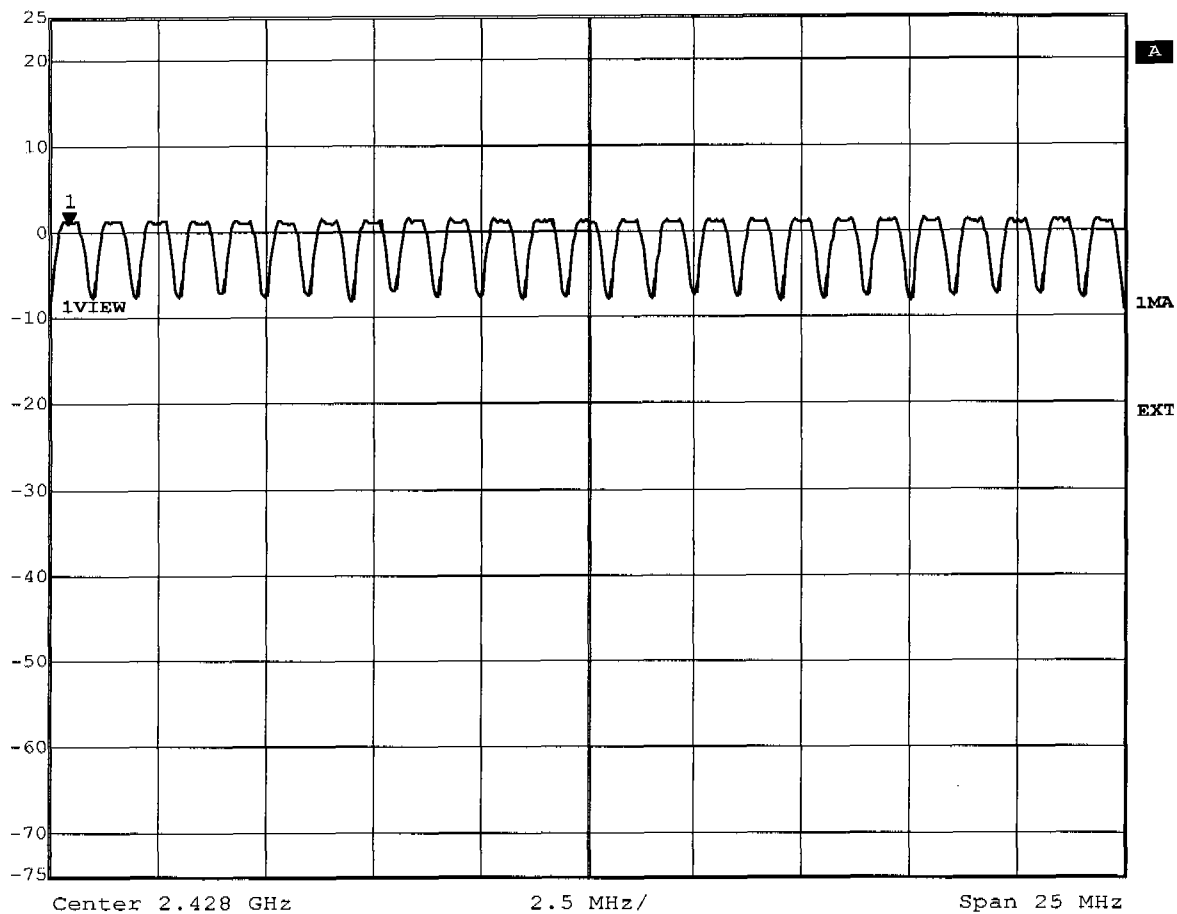

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: G800
Date: 2.FEB.2004 10:17:43




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.04 dBm VBW 300 kHz
25 dBm 2.44080060 GHz SWT 5 ms Unit dBm

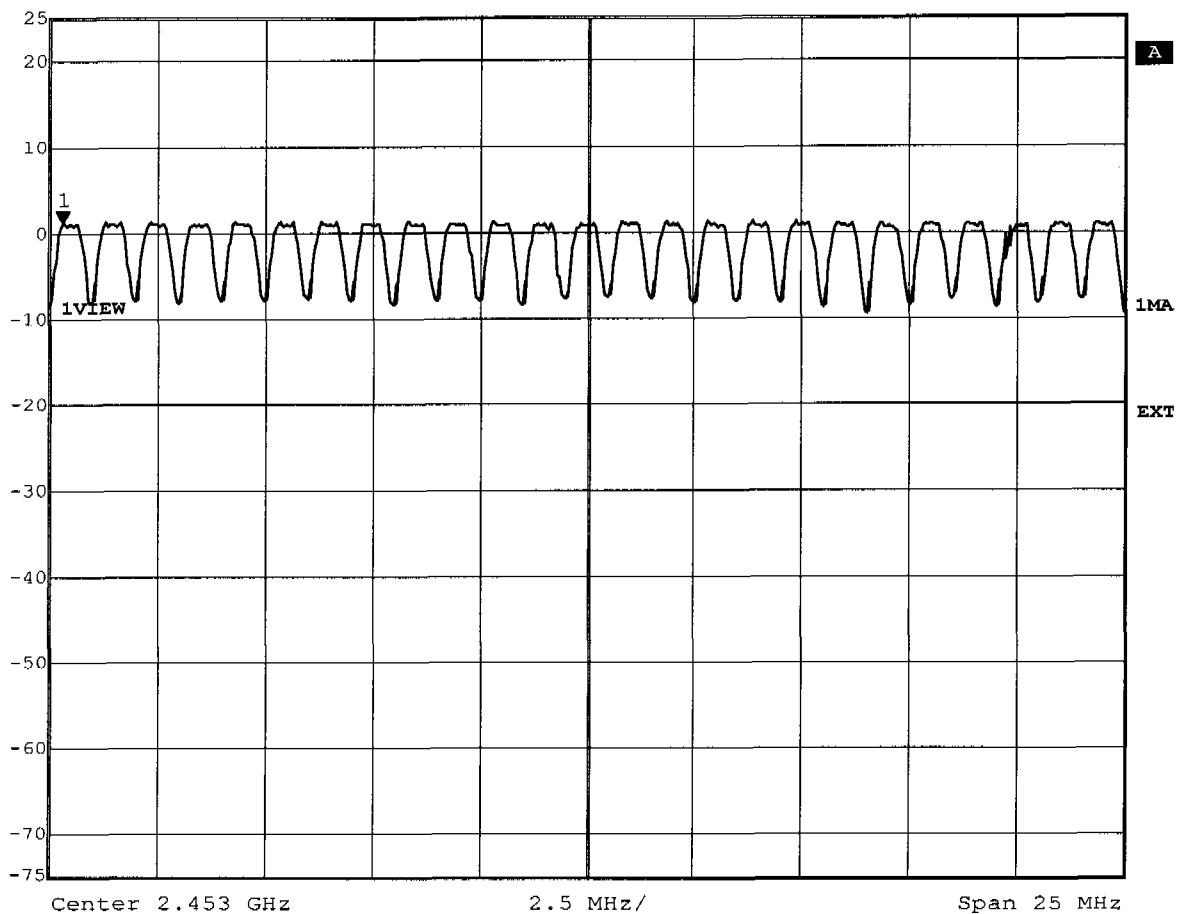

Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: G800
Date: 2.FEB.2004 10:19:23



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.86 dBm VBW 300 kHz
25 dBm 2.46580060 GHz SWT 5 ms Unit dBm

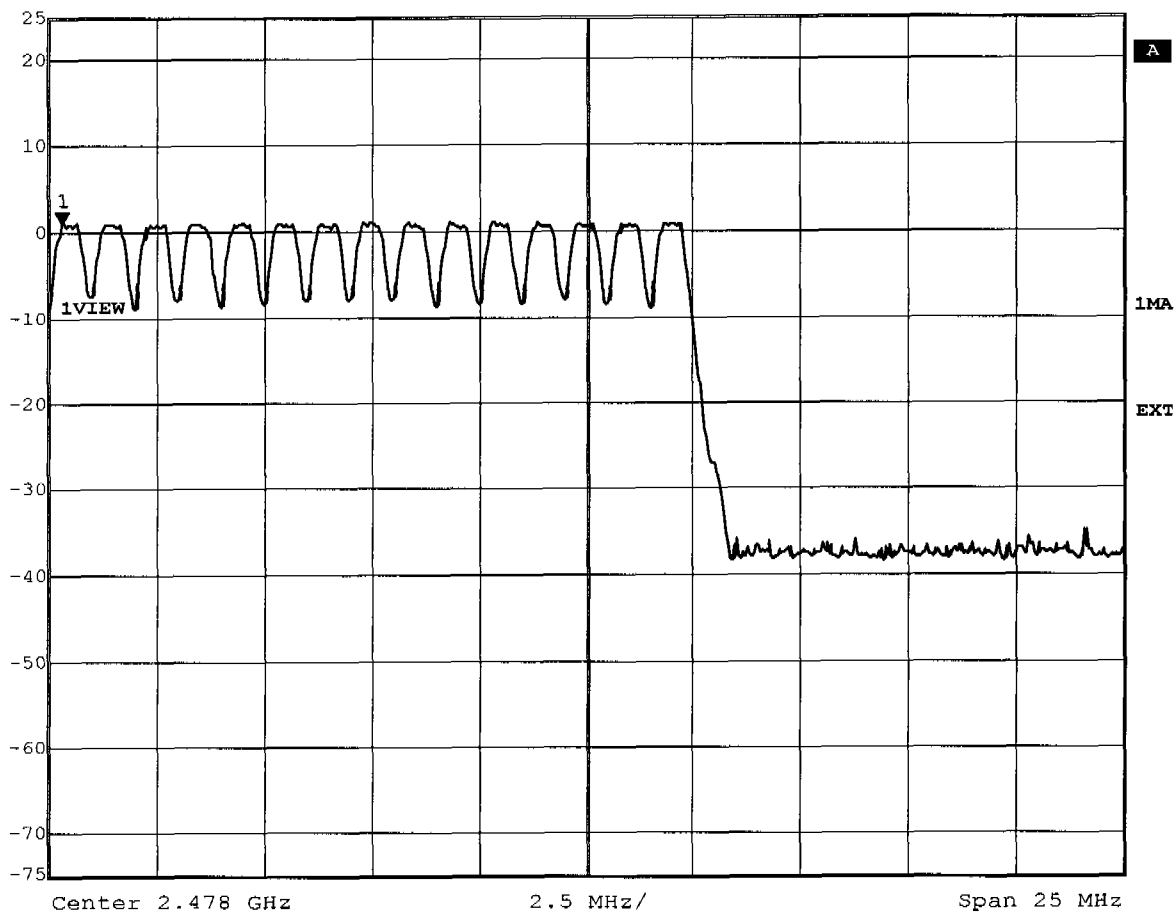


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: G800
Date: 2.FEB.2004 10:21:14



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

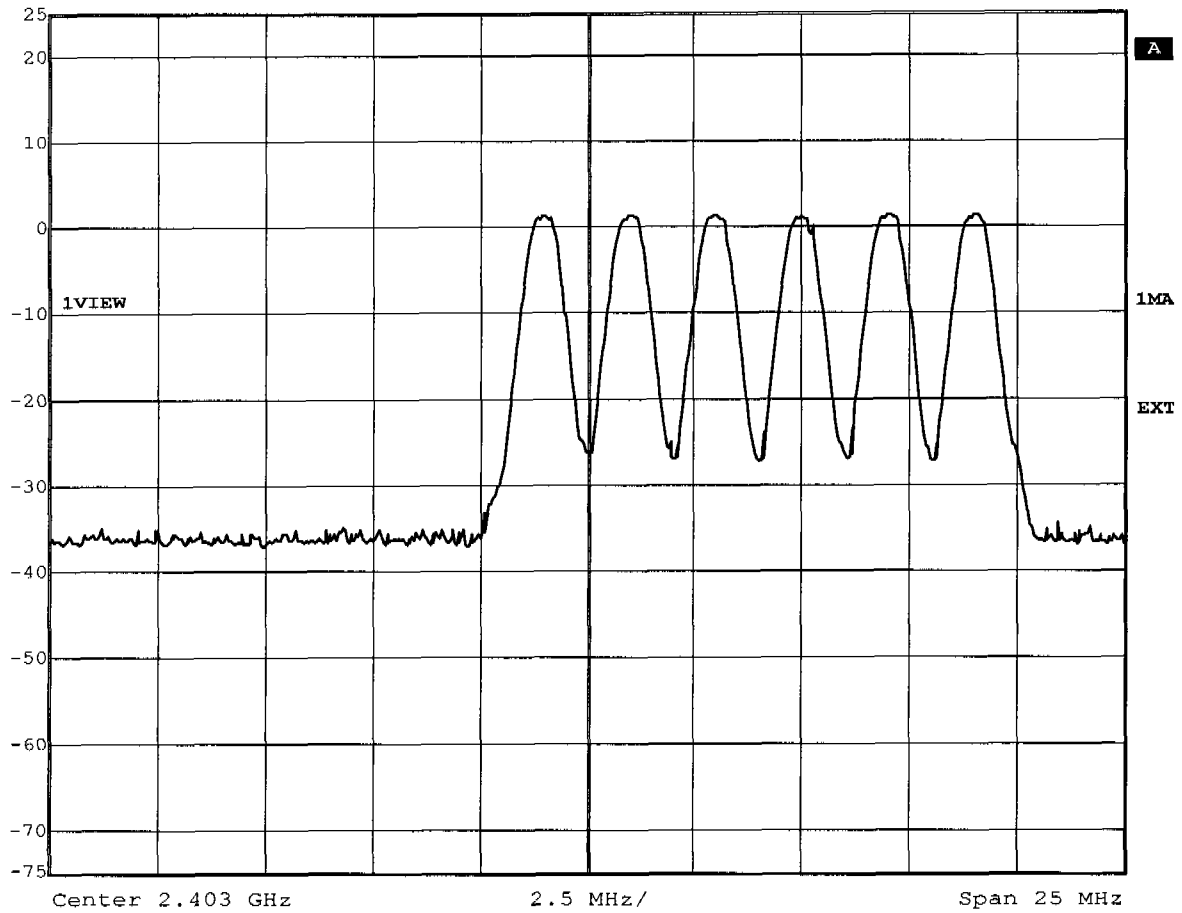


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: G800
Date: 5.FEB.2004 09:42:58



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

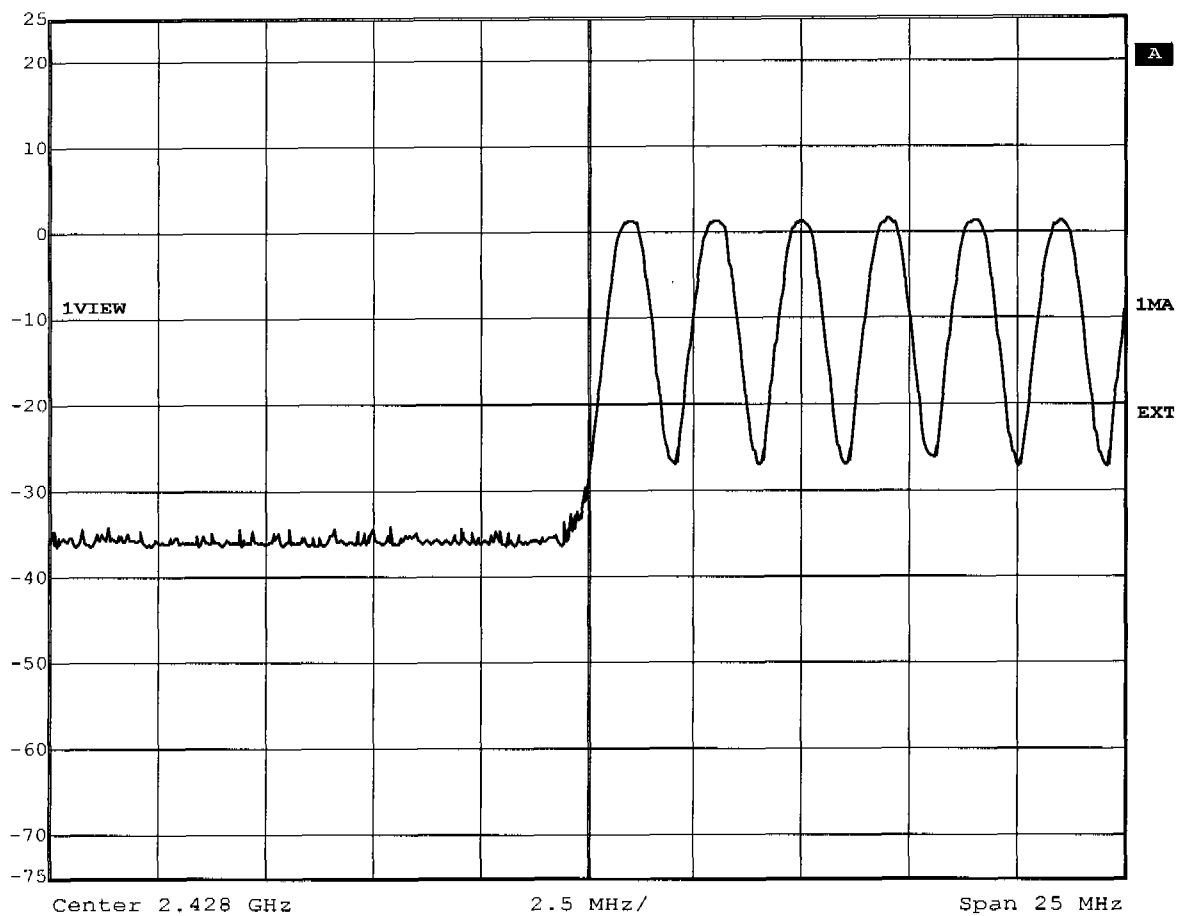


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: G800
Date: 5.FEB.2004 09:53:43



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

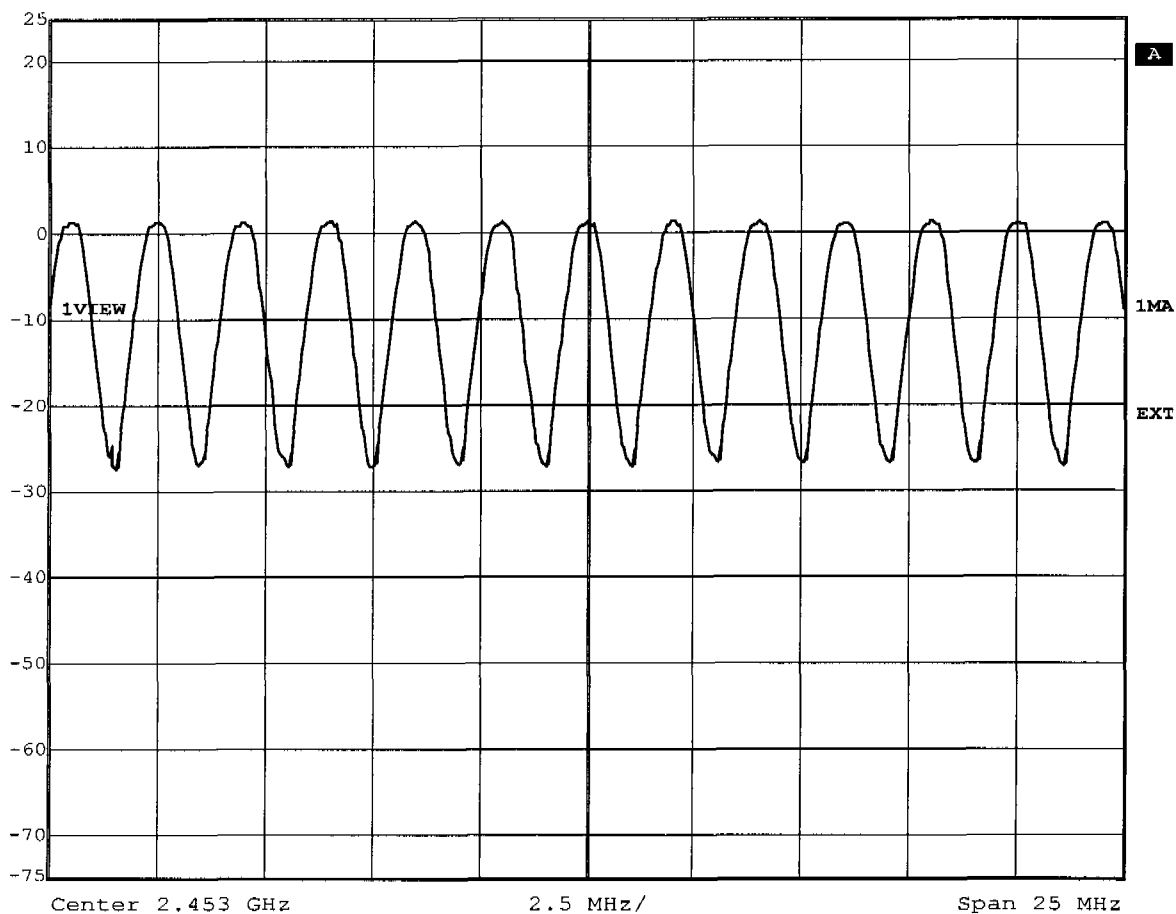


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: G800
Date: 5.FEB.2004 09:58:23



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

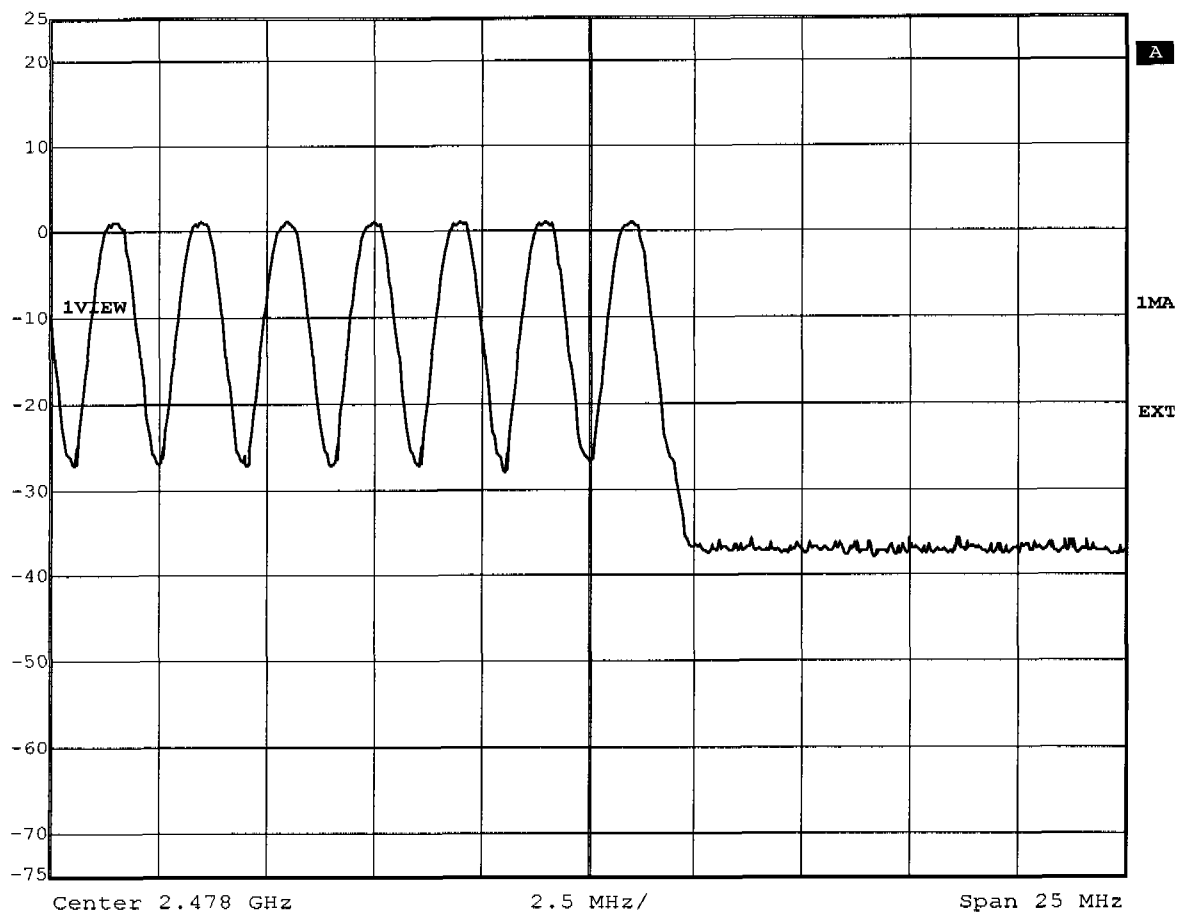


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: G800
Date: 5.FEB.2004 10:02:22

Appendix G

Time of Occupancy (Dwell Time)



Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.16 dB VBW 1 MHz
5 dBm 2.922709 ms SWT 5 ms Unit dBm

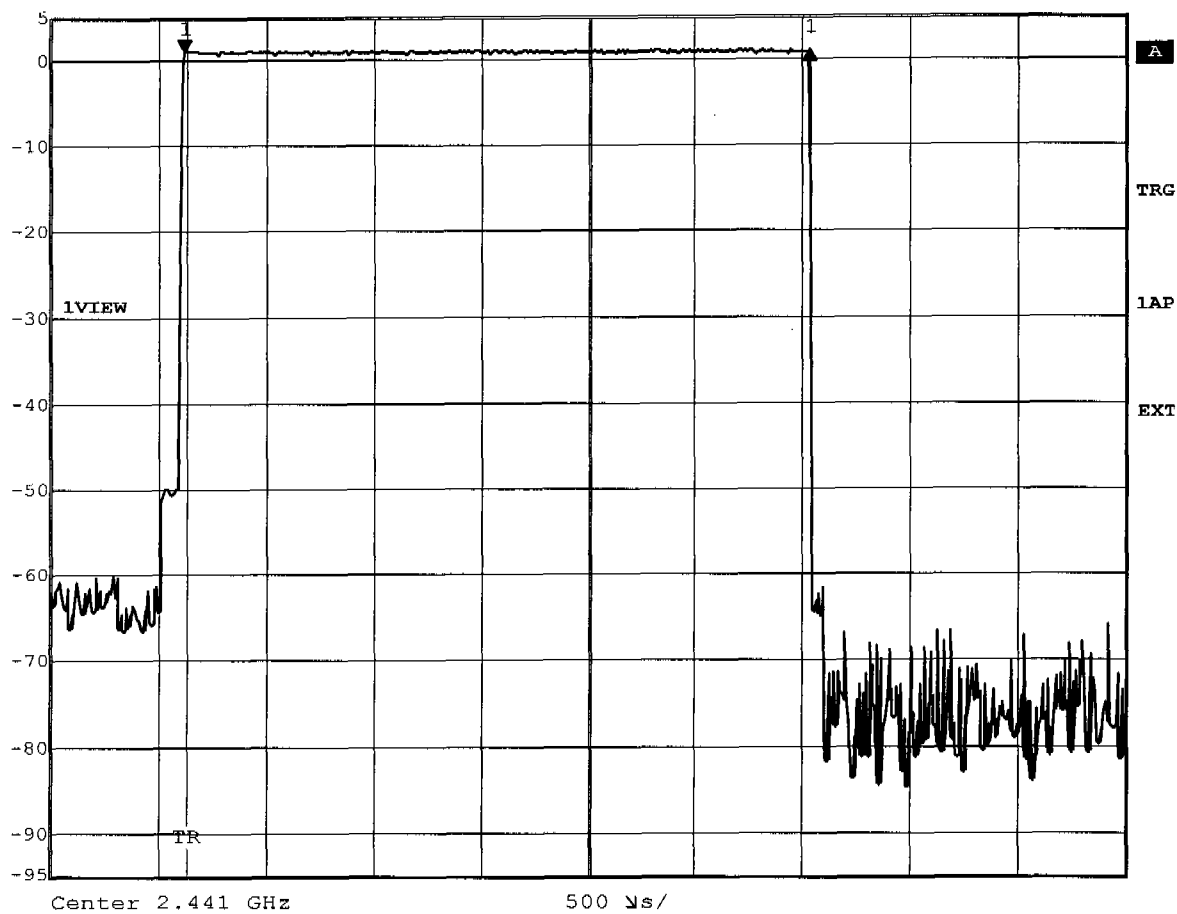

Title: Time of occupancy (Hopping DH5) 64 events * 2.923ms=187.72ms
Comment A: G800
Date: 2.FEB.2004 10:41:44



Ref Lvl
5 dBm

Delta 1 [T1]

-0.01 dB

119.311824 μ s

RBW

1 MHz

VBW

1 MHz

SWT


300 μ s

RF Att

30 dB

Unit


dBm

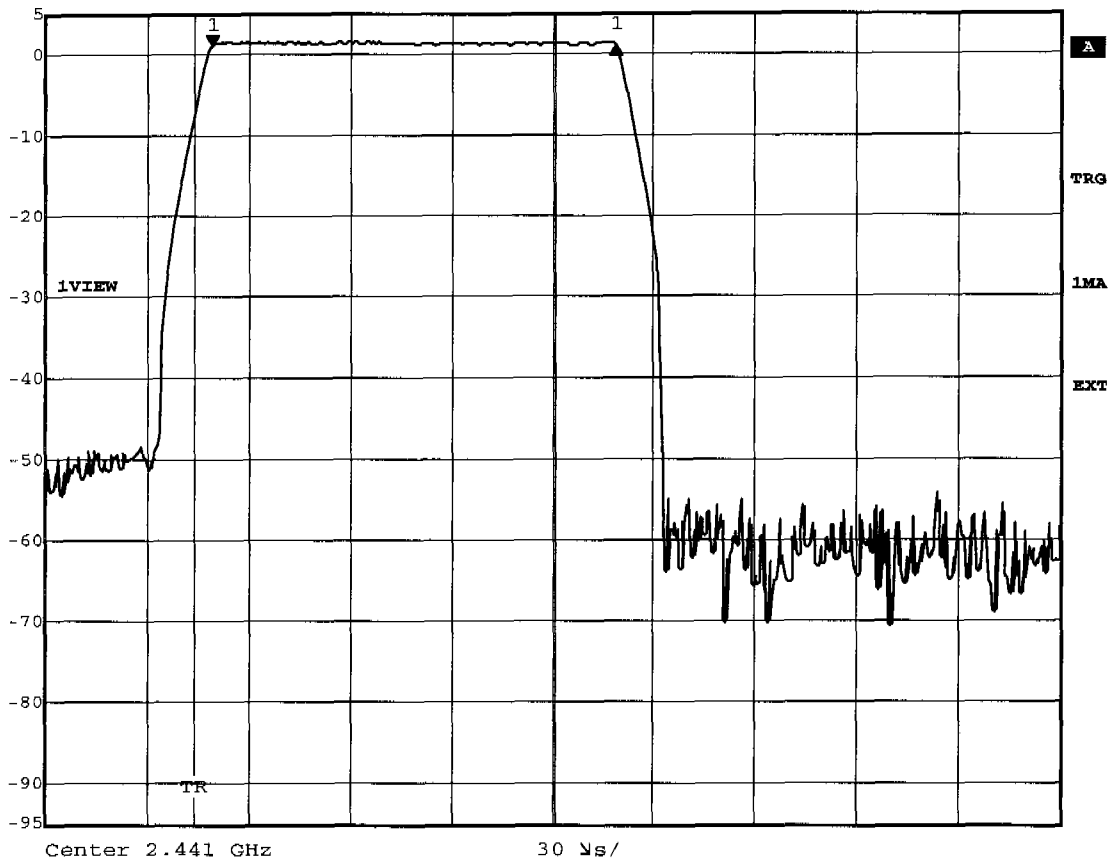

Title: Time of occupancy (Inquiry mode) 764 events*0.119ms=90.9ms
Comment A: G800
Date: 9.FEB.2004 08:24:57



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.02 dB VBW 1 MHz
27 dBm 6.266333 ms SWT 11 ms Unit dBm

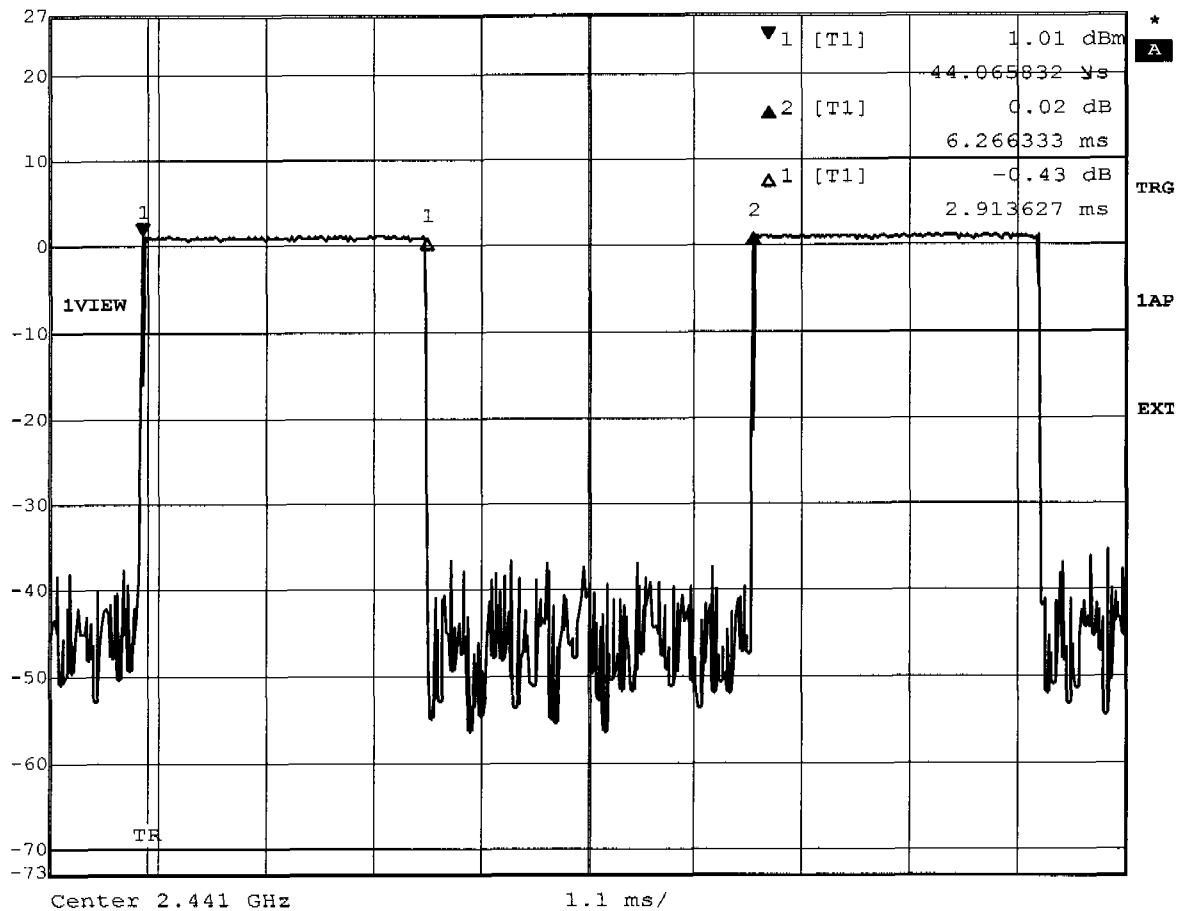


Title: Duty Cycle
Comment A: G800
Date: 2.FEB.2004 09:49:50

Appendix H

20dB Bandwidth




Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	-0.01 dB	VBW	10 kHz	
25 dBm	872.94589178 kHz	SWT	56 ms	Unit dBm

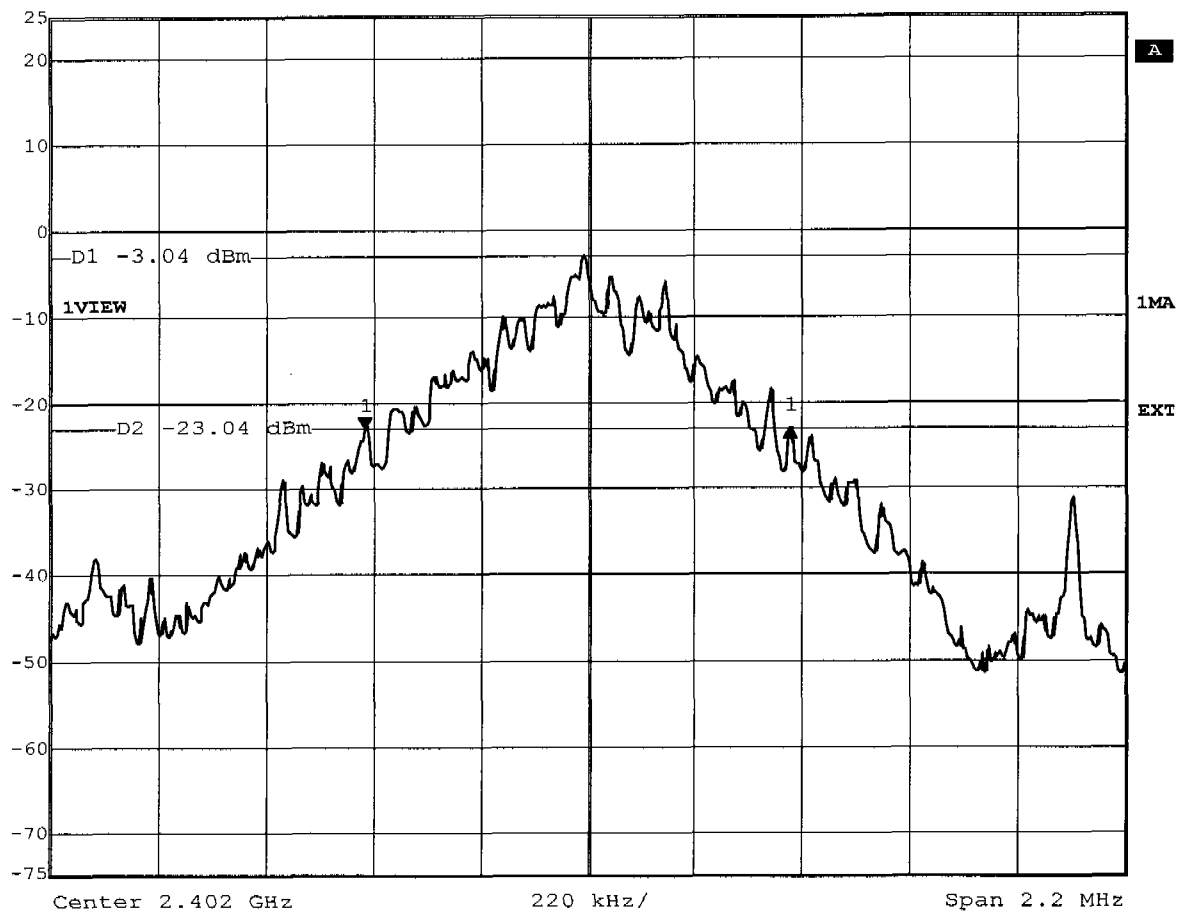

Title: -20dB Bandwidth Ch.: 0
Comment A: G800
Date: 2.FEB.2004 08:44:39




Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	0.00 dB	VBW	10 kHz	
25 dBm	872.94589178 kHz	SWT	56 ms	Unit dBm

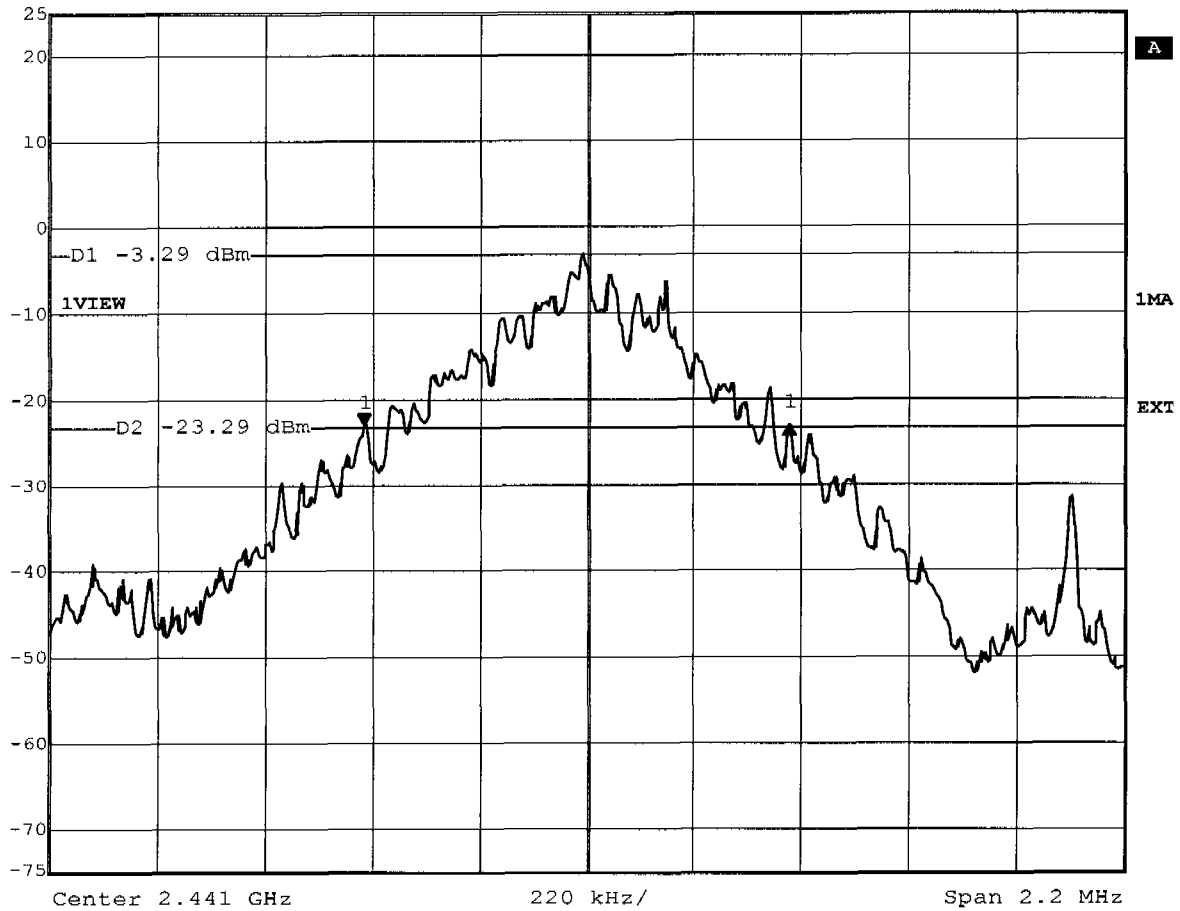

Title: -20dB Bandwidth Ch.: 39
Comment A: G800
Date: 2.FEB.2004 08:43:01



Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	-0.12 dB	VBW	10 kHz	
25 dBm	872.94589178 kHz	SWT	56 ms	Unit dBm

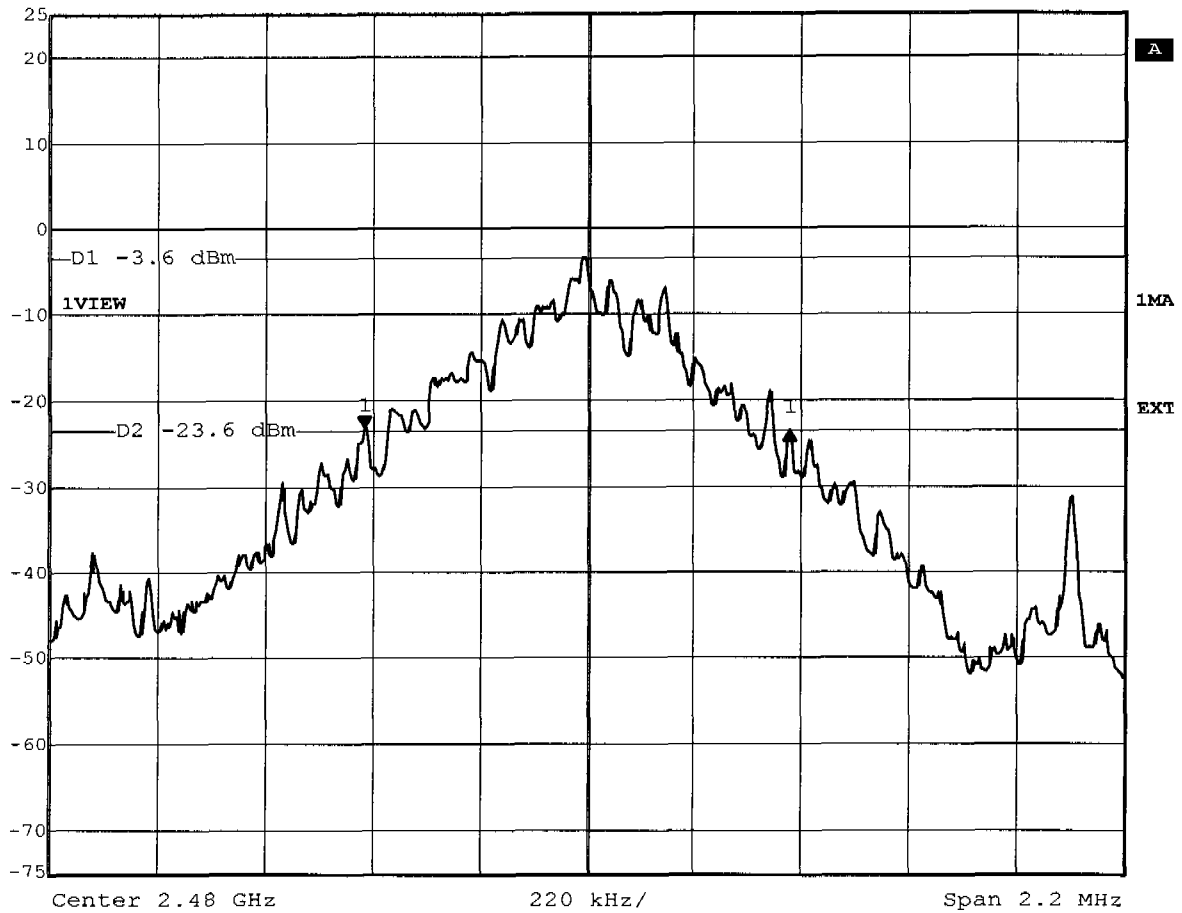


Title: -20dB Bandwidth Ch.: 78
Comment A: G800
Date: 2.FEB.2004 08:41:05

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 39.36 dB VBW 50 kHz
25 dBm 2.02585170 MHz SWT 5 ms Unit dBm

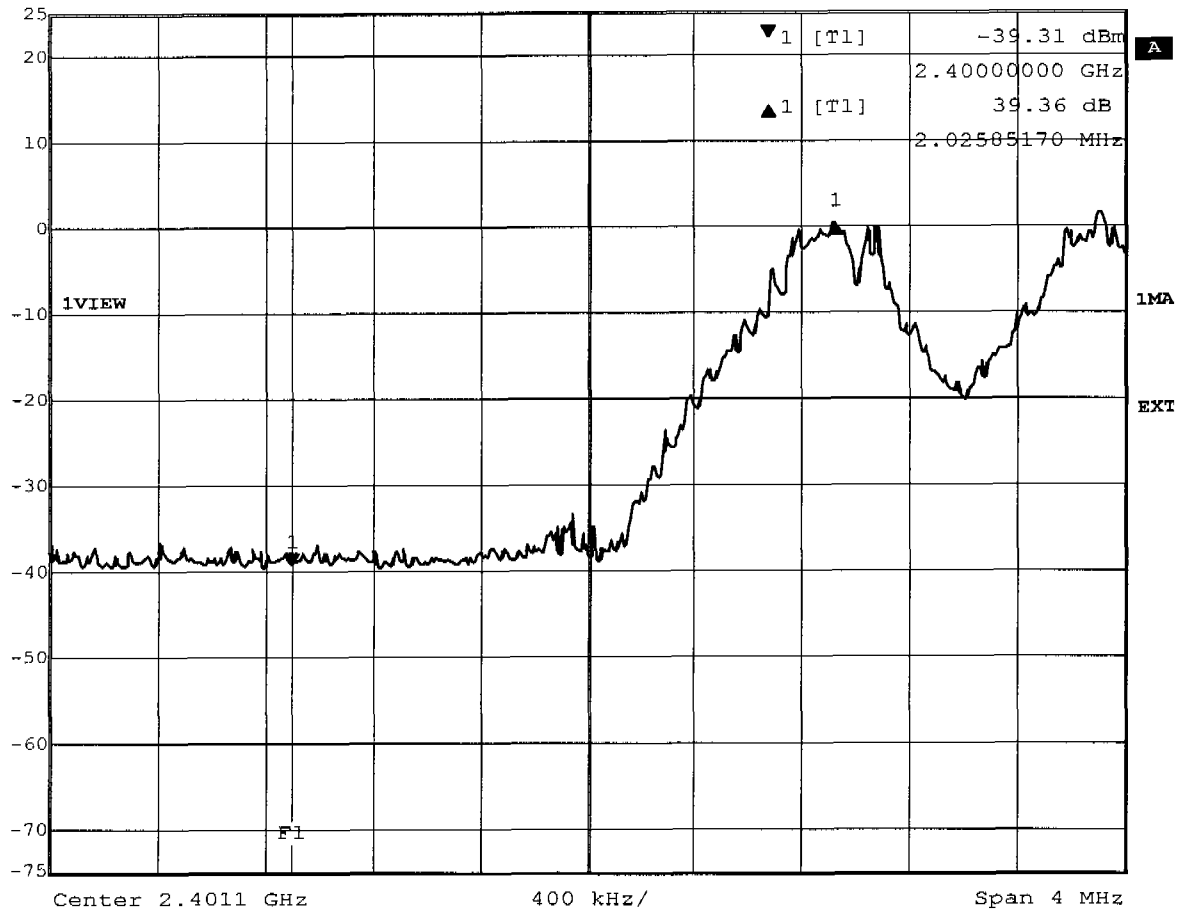

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: G800
Date: 2.FEB.2004 10:02:03




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 37.22 dB VBW 50 kHz
25 dBm -3.43715431 MHz SWT 5 ms Unit dBm

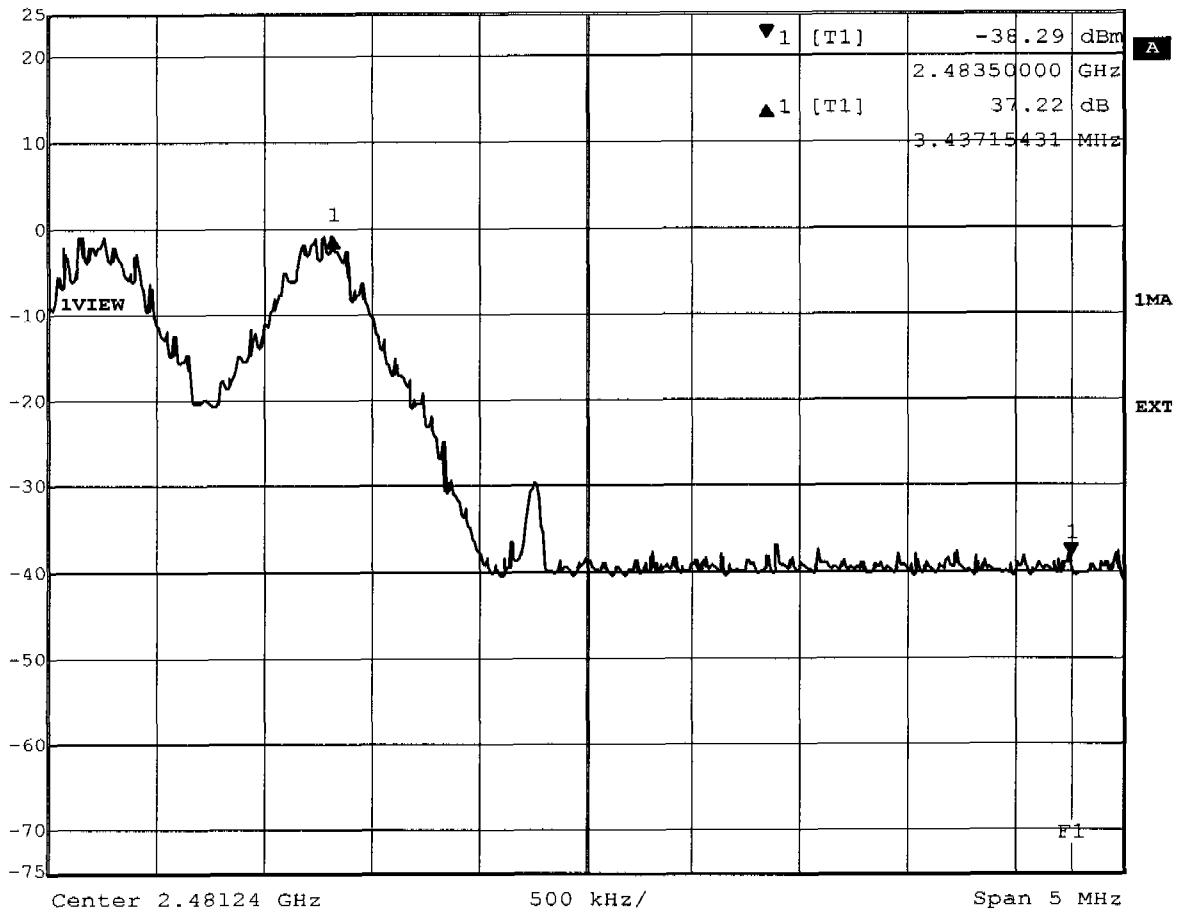

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: G800
Date: 2.FEB.2004 10:06:02




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 41.47 dB VBW 50 kHz
25 dBm 2.01102204 MHz SWT 5 ms Unit dBm

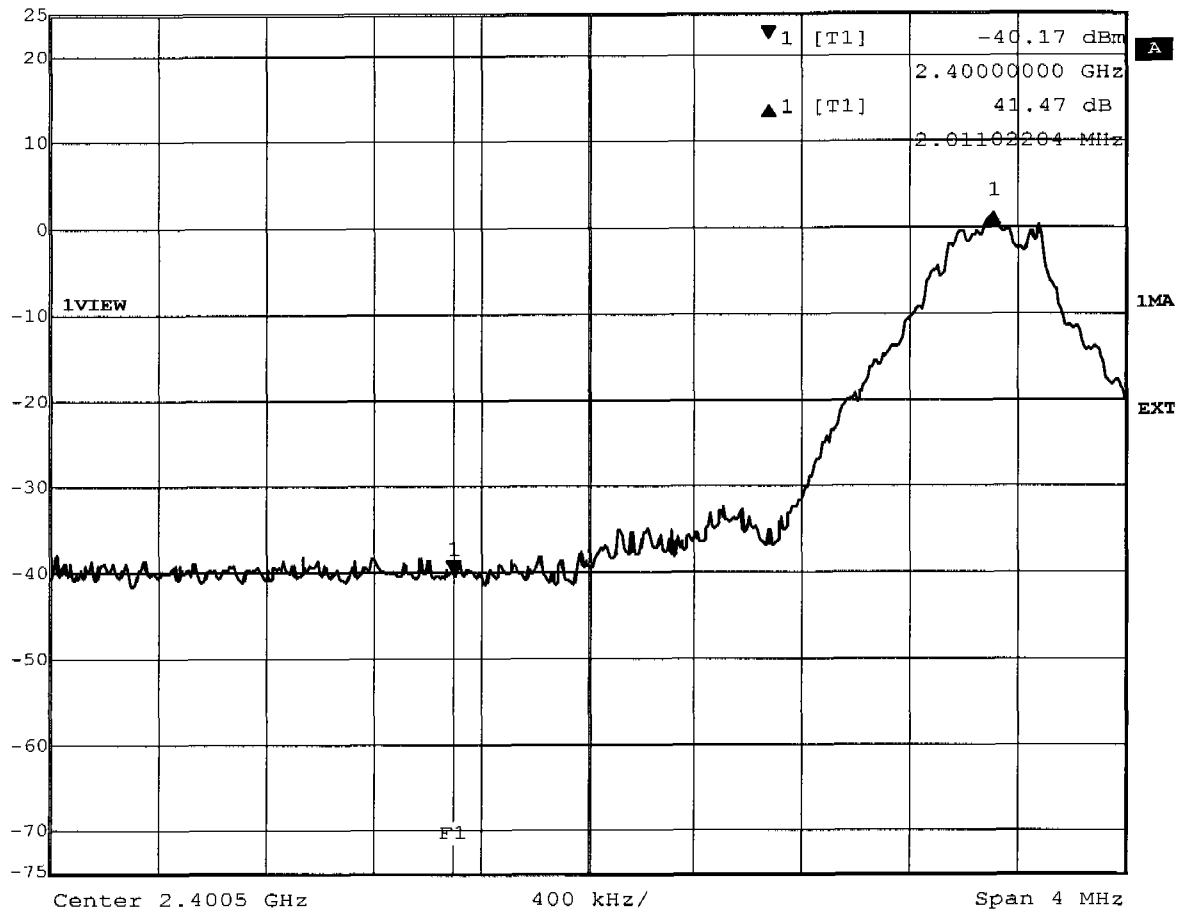

Title: Band-edge Compliance (conducted, single frequency)
Comment A: G800
Date: 2.FEB.2004 09:54:15



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 41.29 dB VBW 50 kHz
25 dBm -3.49943888 MHz SWT 5 ms Unit dBm

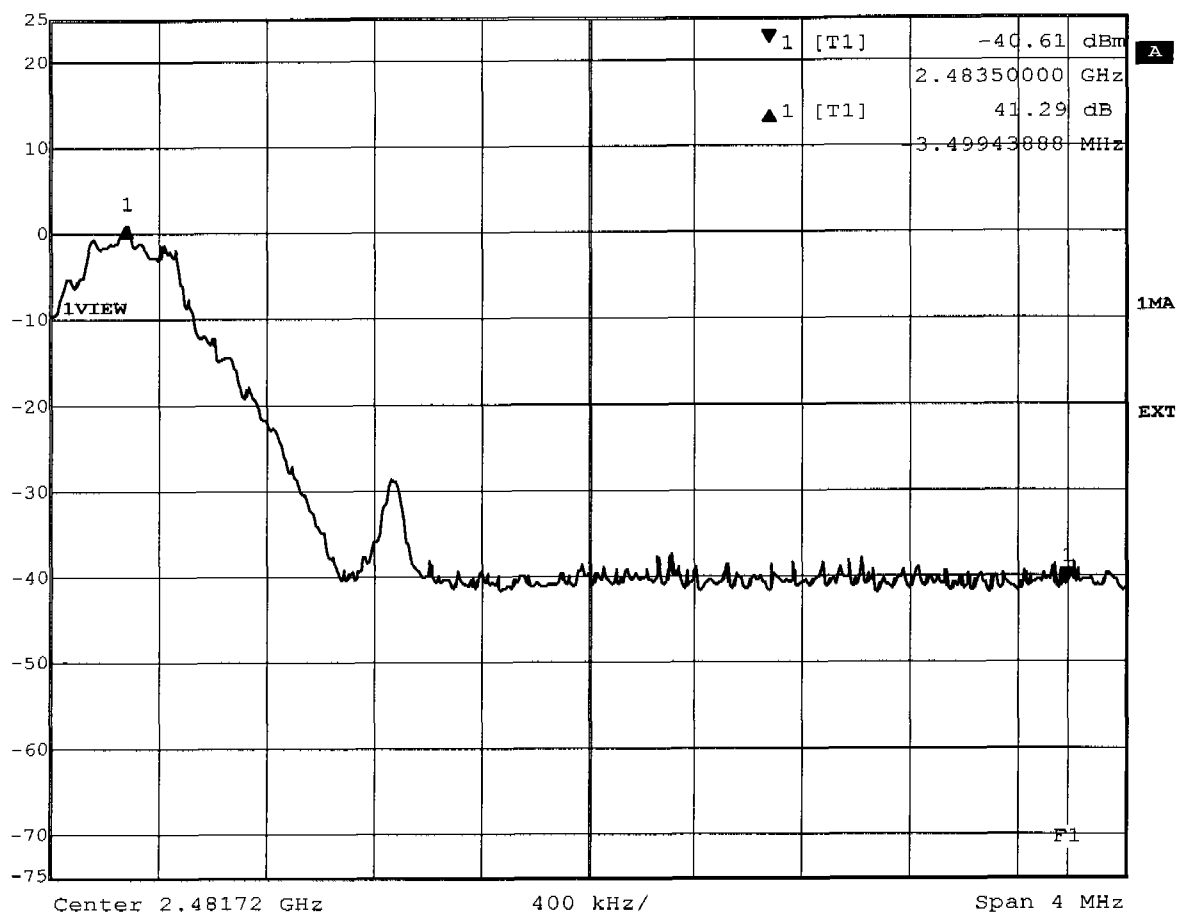

Title: Band-edge Compliance (conducted, single frequency)
Comment A: G800
Date: 2.FEB.2004 09:55:57

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Triple Band GSM 900 (E-GSM)/DCS 1800/PCS 1900 (with WAP & GP
Manufacturer: Pantech Co., Ltd
Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5
Comment: model: G800 mode: charging & bluetooth
AC/DC-adaptor: ANAM Model TA3521

