

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 1013
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.583 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.1 V/m; Power Drift = 0.129 dB
Peak SAR (extrapolated) = 0.728 W/kg
SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.392 mW/g
Maximum value of SAR (measured) = 0.588 mW/g

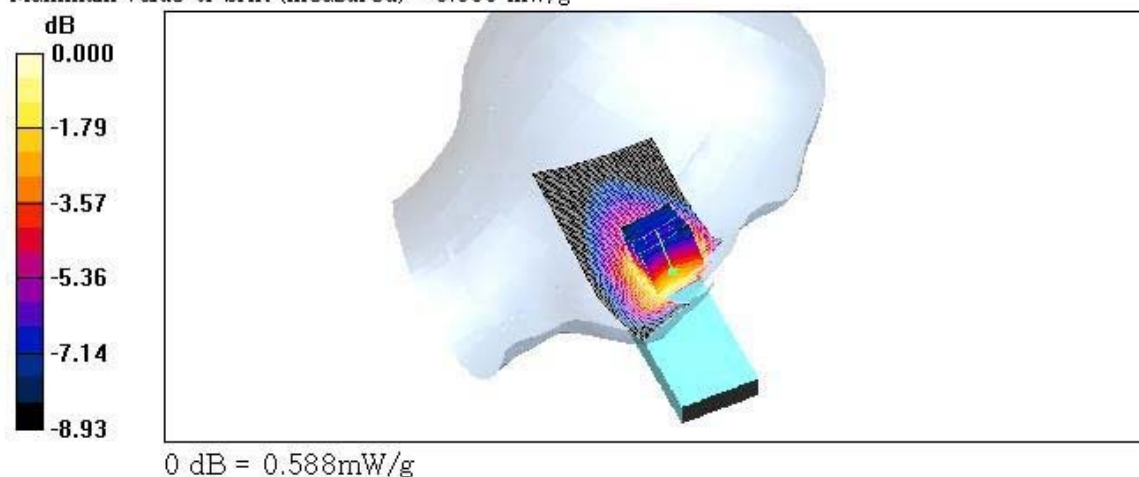

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : out / Channel : 1013
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$, $\sigma = 0.865 \text{ mho/m}$, $\epsilon_r = 41.2$, $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$
Maximum value of SAR (interpolated) = 1.14 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 33.1 V/m; Power Drift = -0.151 dB
Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.788 mW/g
Maximum value of SAR (measured) = 1.17 mW/g

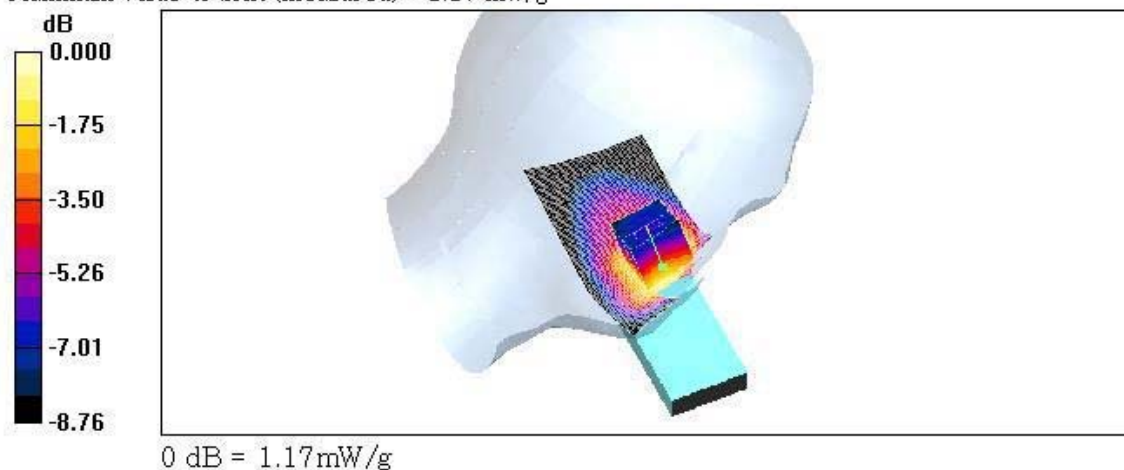

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.936 mW/g

Left touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 28.1 V/m; Power Drift = 0.060 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.645 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.968 mW/g

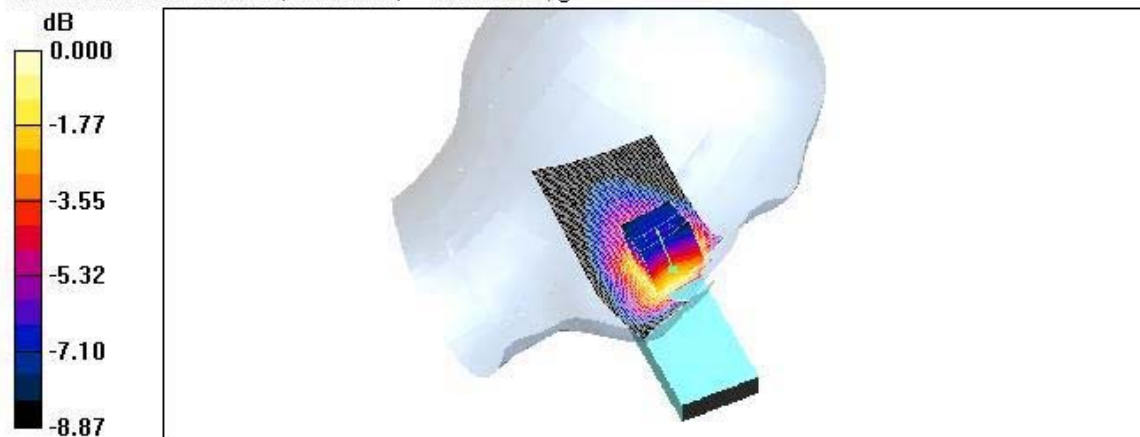

0 dB = 0.968mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : out / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.997 mW/g

Left touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 30.3 V/m; Power Drift = -0.118 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.953 mW/g; SAR(10 g) = 0.683 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.01 mW/g

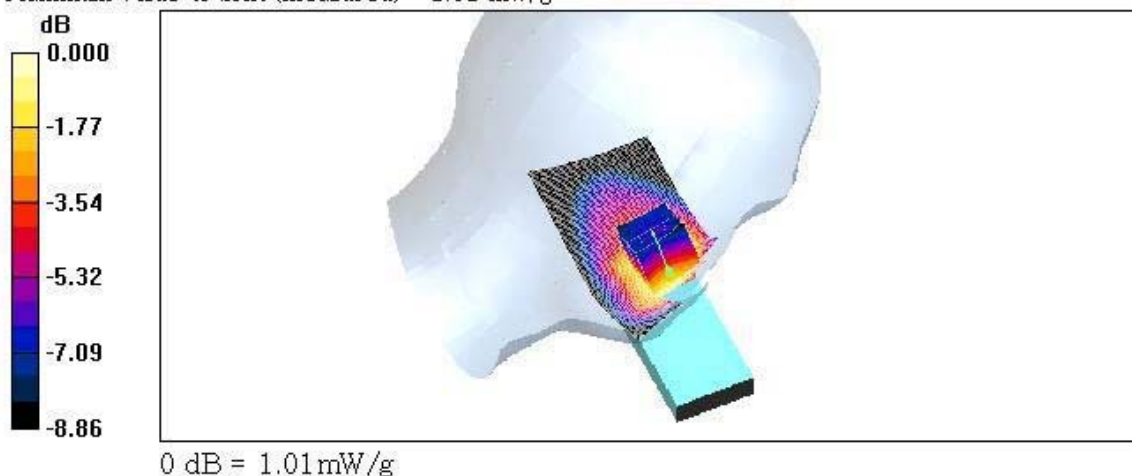

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 777
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.753 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 25.4 V/m; Power Drift = -0.116 dB
Peak SAR (extrapolated) = 0.997 W/kg
SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.535 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.783 mW/g

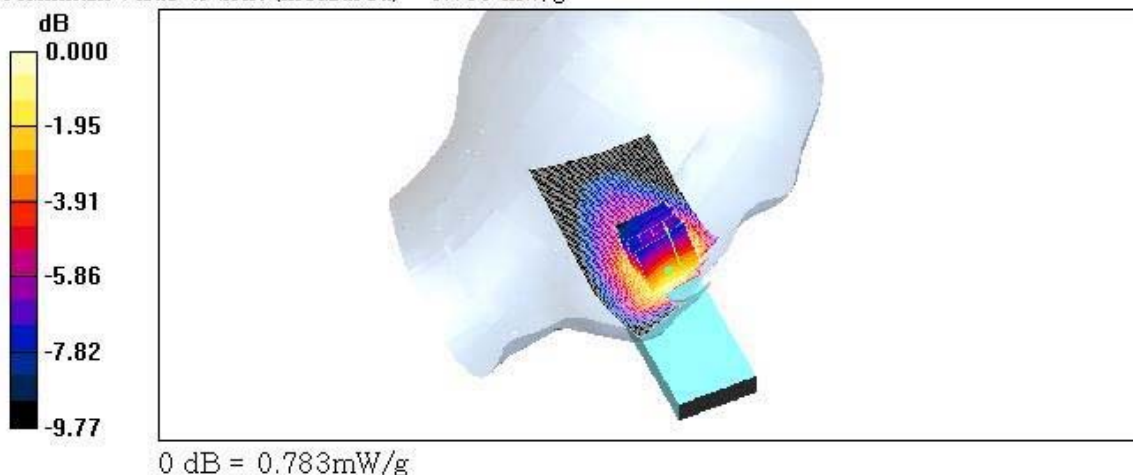

Test Laboratory: HCT

Company : Pantech co., Ltd.

Mode : CDMA835 / Antenna : out / Channel : 777

Date Tested : March 29, 2006

Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.18 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 31.7 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.784 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.17 mW/g

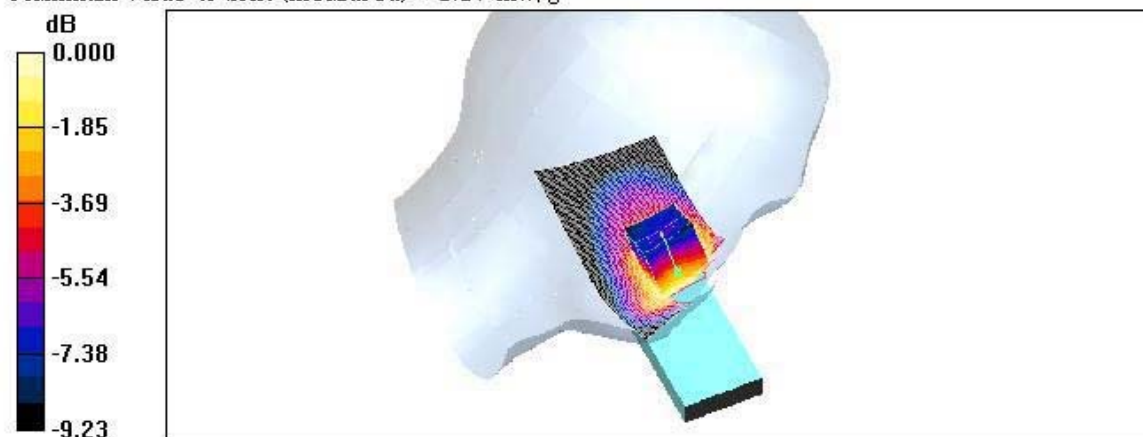

0 dB = 1.17 mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 1013
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.732 mW/g


Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.9 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.921 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.464 mW/g

Maximum value of SAR (measured) = 0.718 mW/g

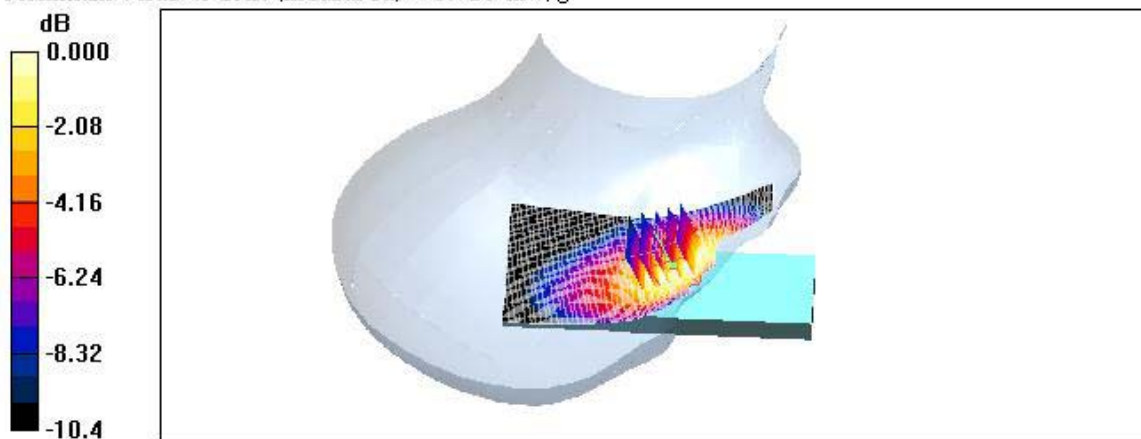

0 dB = 0.718mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : out / Channel : 1013
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.07 mW/g

Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 26.5 V/m; Power Drift = -0.130 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.666 mW/g
Maximum value of SAR (measured) = 1.03 mW/g

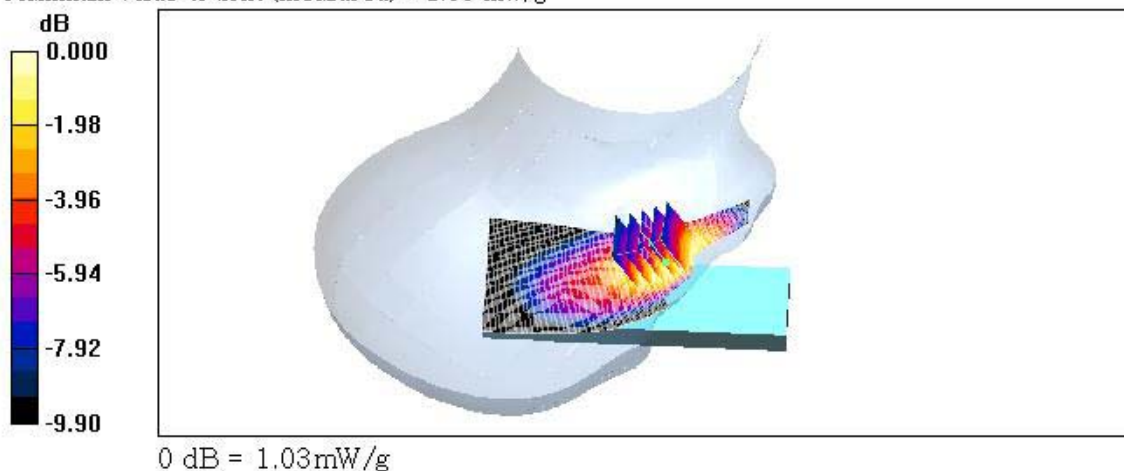

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 363/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.08 mW/g


Right touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.6 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.724 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.12 mW/g

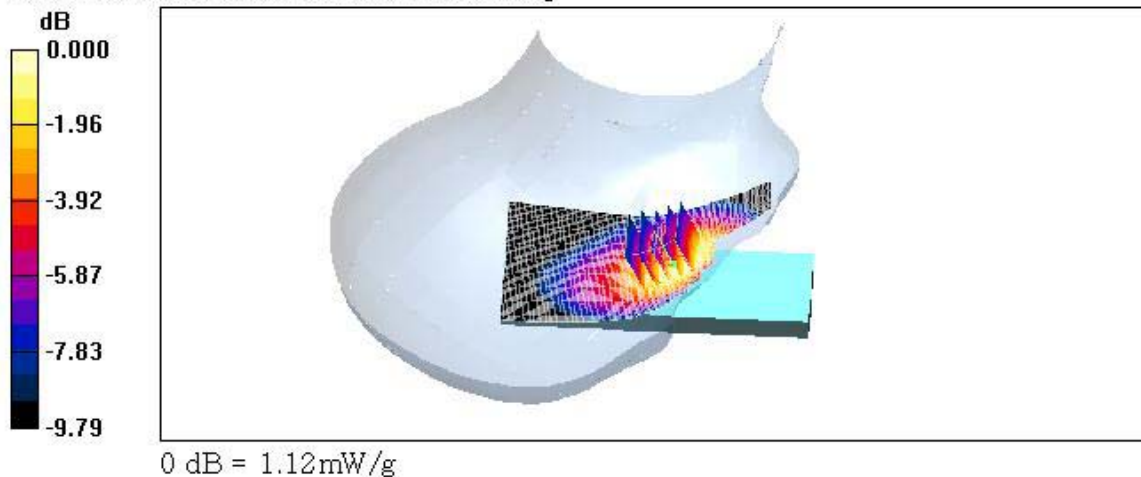

Test Laboratory: HCT

Company : Pantech co., Ltd.

Mode : CDMA835 / Antenna : out / Channel : 363

Date Tested : March 29, 2006

Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 835.89 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.26 mW/g

Right touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 32.5 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.791 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

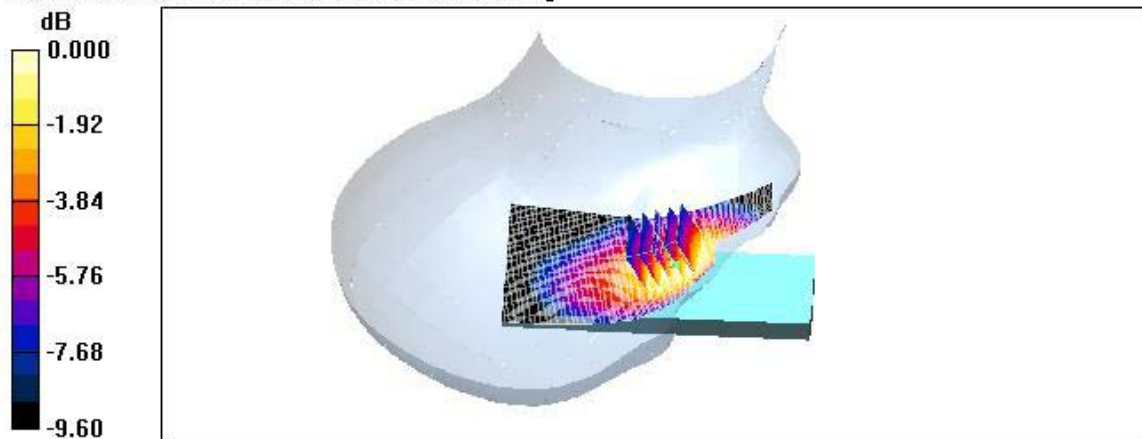

0 dB = 1.22mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 777
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.908 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 25.9 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.579 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.902 mW/g

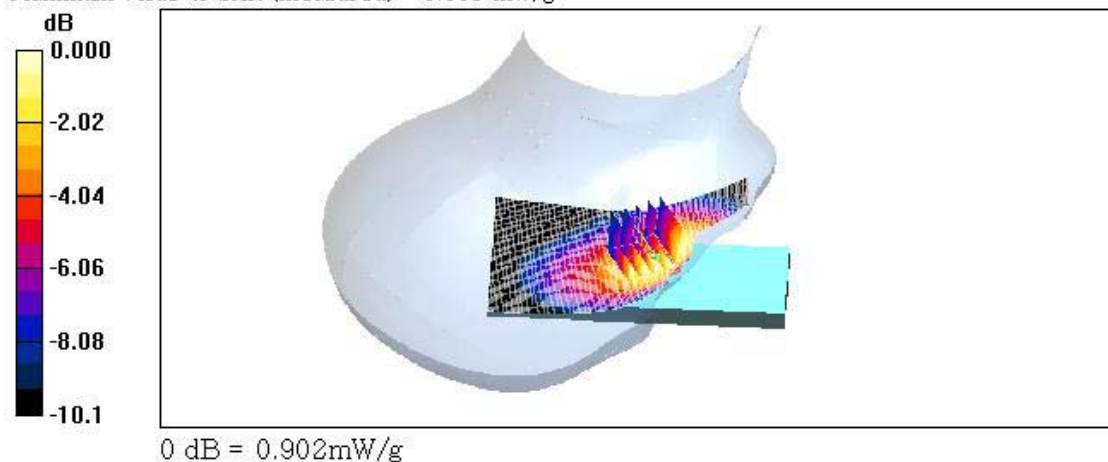

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : out / Channel : 777
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.893 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.32 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 29.0 V/m; Power Drift = -0.059 dB
Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.859 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.32 mW/g

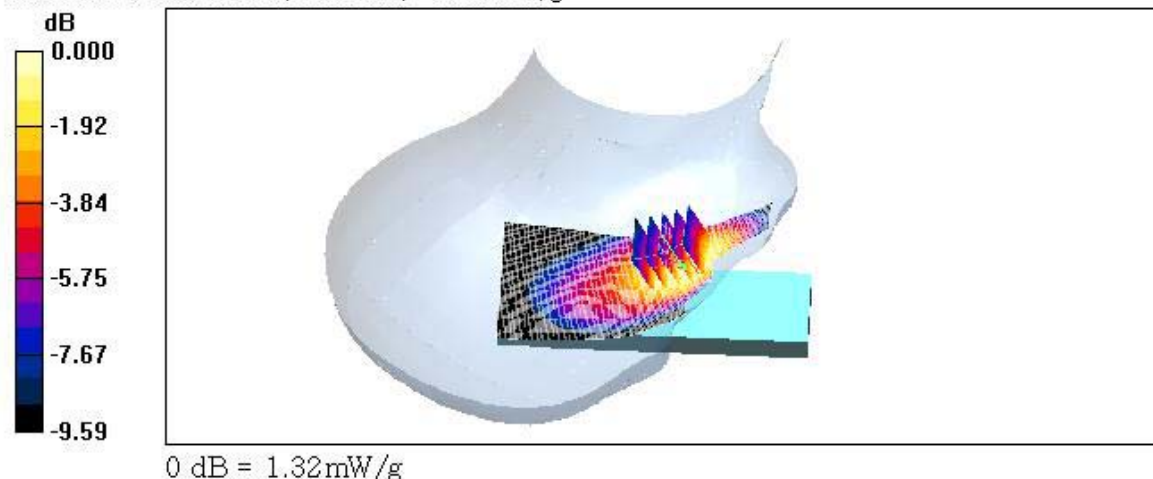

Test Laboratory: HCT

Company : Pantech co., Ltd.

Mode : CDMA835 / Antenna : out / Channel : 777(E-battery)

Date Tested : March 29, 2006

Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.893 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.22 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 27.0 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.762 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.18 mW/g

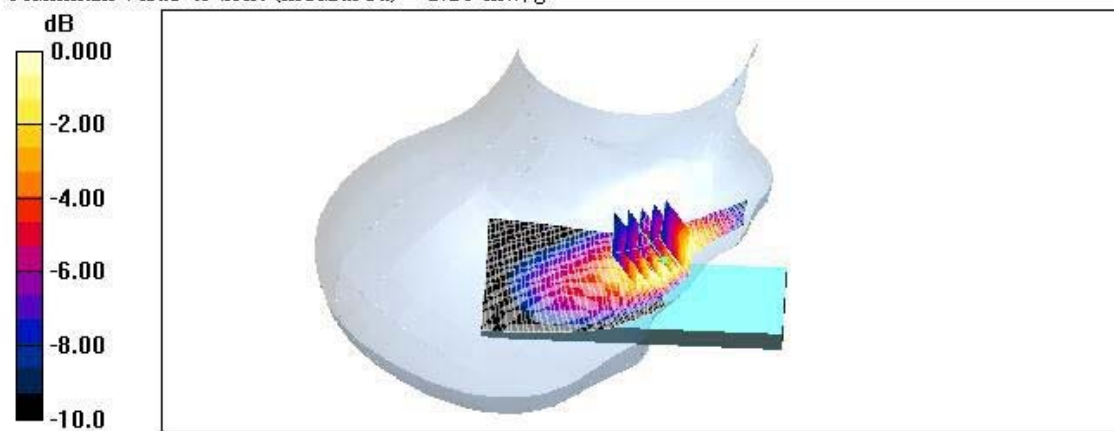

0 dB = 1.18mW/g

Test Laboratory: HCT

MODEL: PC-8200N

Company : Pantech co., Ltd.

Mode : CDMA835 / Channel : 777 (Bluetooth on)

Liquid Temperature : 21.7 °C

Date Tested : April 17, 2006

DUT: PC-8200N; Type: Folder; Serial: #1**Program Name: PC-8200N**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.16 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 28.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.750 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.17 mW/g

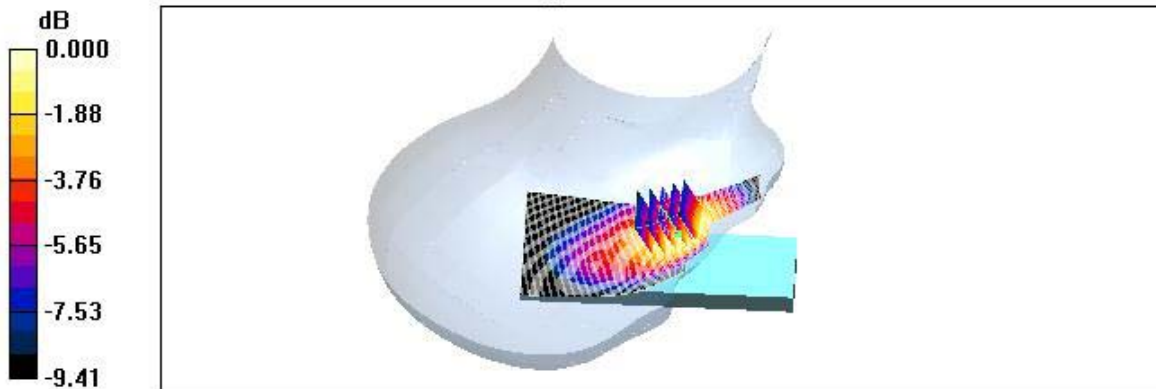

0 dB = 1.17mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.362 mW/g

Left tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 19.9 V/m; Power Drift = 0.112 dB
Peak SAR (extrapolated) = 0.418 W/kg
SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.263 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.355 mW/g

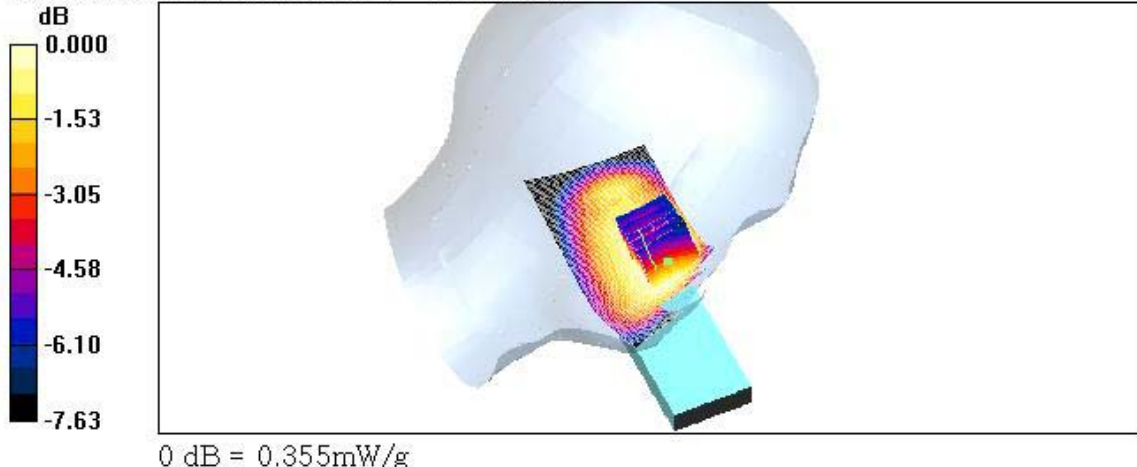

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : out / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 363/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.272 mW/g


Left tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 16.9 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.198 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.272 mW/g

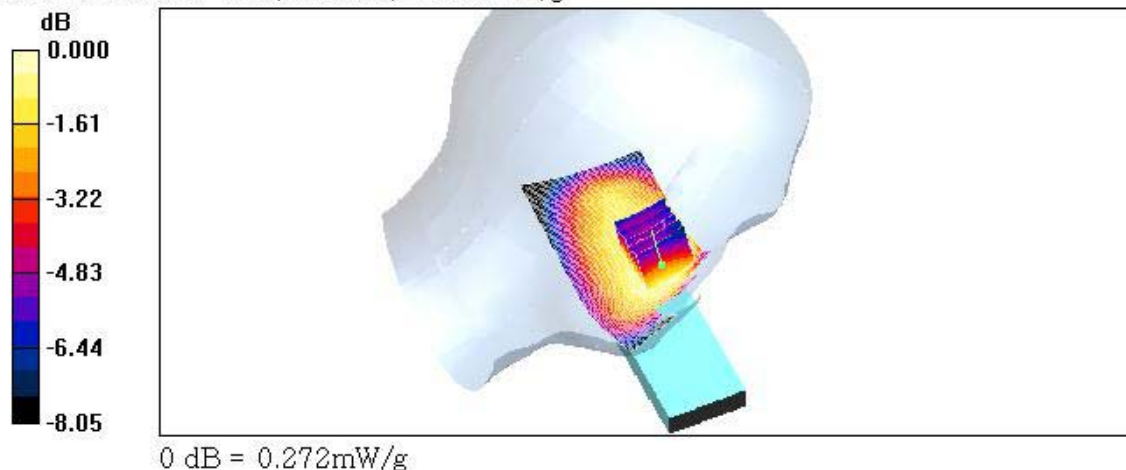

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : In / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.364 mW/g

Right tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.5 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.256 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.349 mW/g

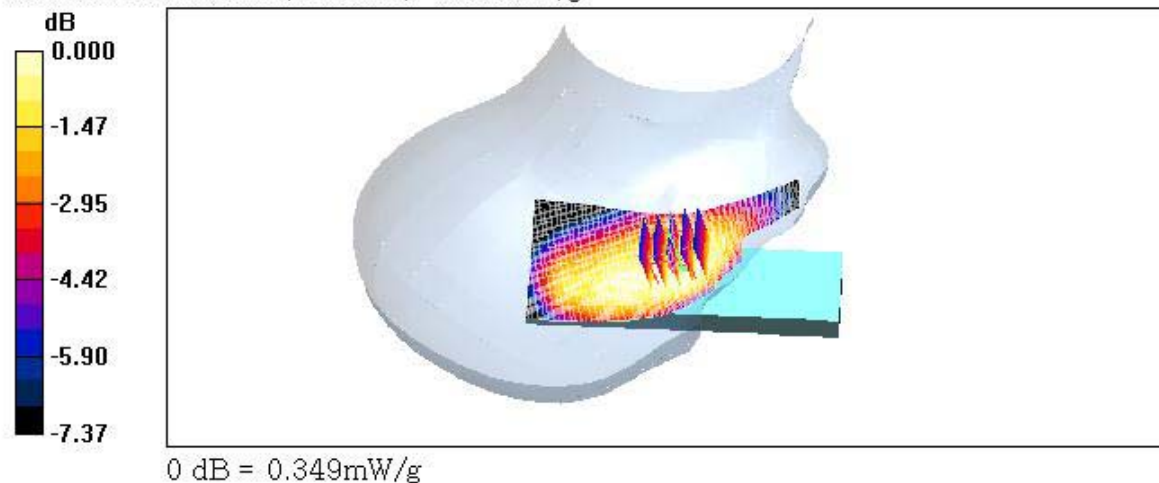

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : CDMA835 / Antenna : out / Channel : 363
Date Tested : March 29, 2006
Liquid Temperature : 21.6 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 363/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.277 mW/g

Right tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 17.9 V/m; Power Drift = -0.061 dB
Peak SAR (extrapolated) = 0.323 W/kg
SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.201 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.274 mW/g

