

ATTACHMENT O – SAR TEST PLOTS (2 of 3)

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 25
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 25/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.974 mW/g

Left touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.1 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.531 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.913 mW/g


Left touch 25/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.1 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.769 mW/g; SAR(10 g) = 0.464 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.846 mW/g

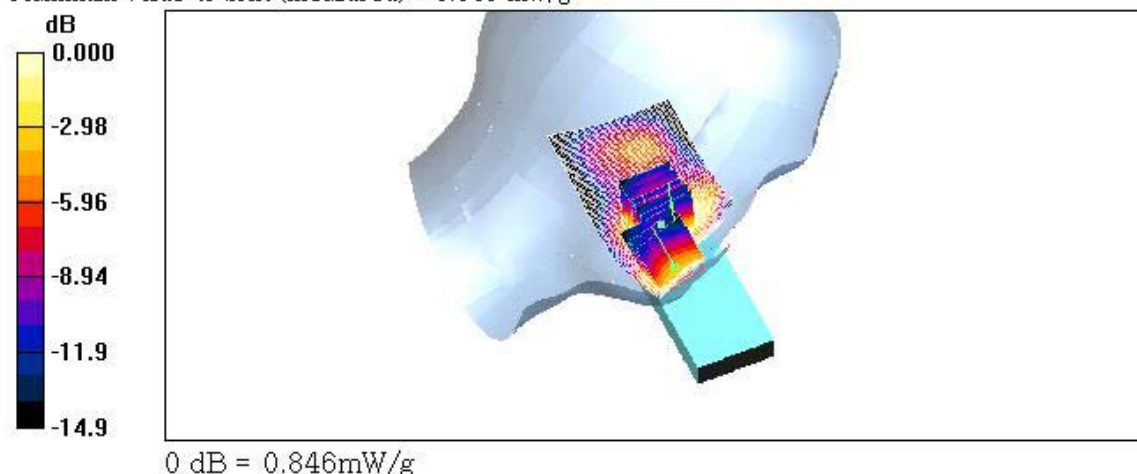

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 25
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 25/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.199 mW/g

Left touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 11.6 V/m; Power Drift = -0.082 dB
Peak SAR (extrapolated) = 0.230 W/kg
SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.097 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.161 mW/g

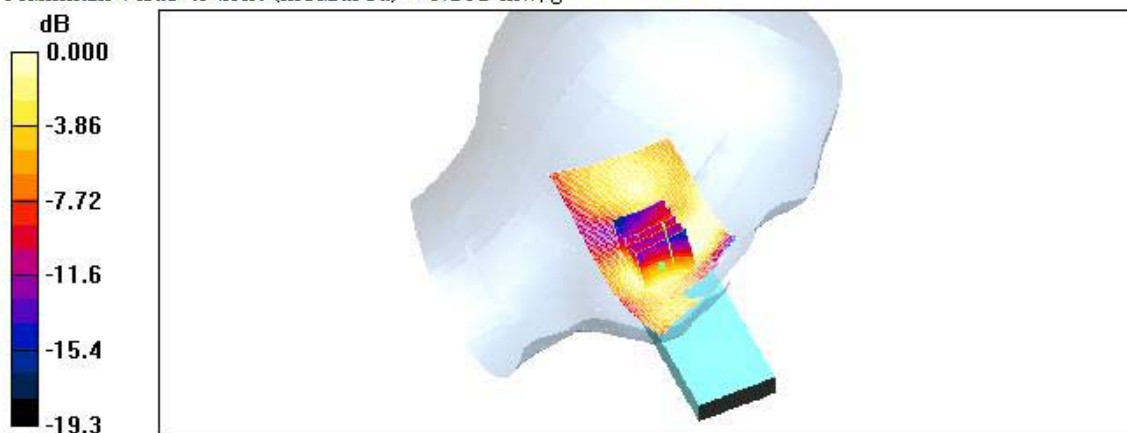

0 dB = 0.161mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 600/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 1.18 mW/g

Left touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 27.9 V/m; Power Drift = 0.167 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.989 mW/g; SAR(10 g) = 0.612 mW/g
Maximum value of SAR (measured) = 1.06 mW/g

Left touch 600/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 27.9 V/m; Power Drift = 0.167 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.826 mW/g; SAR(10 g) = 0.487 mW/g
Maximum value of SAR (measured) = 0.913 mW/g

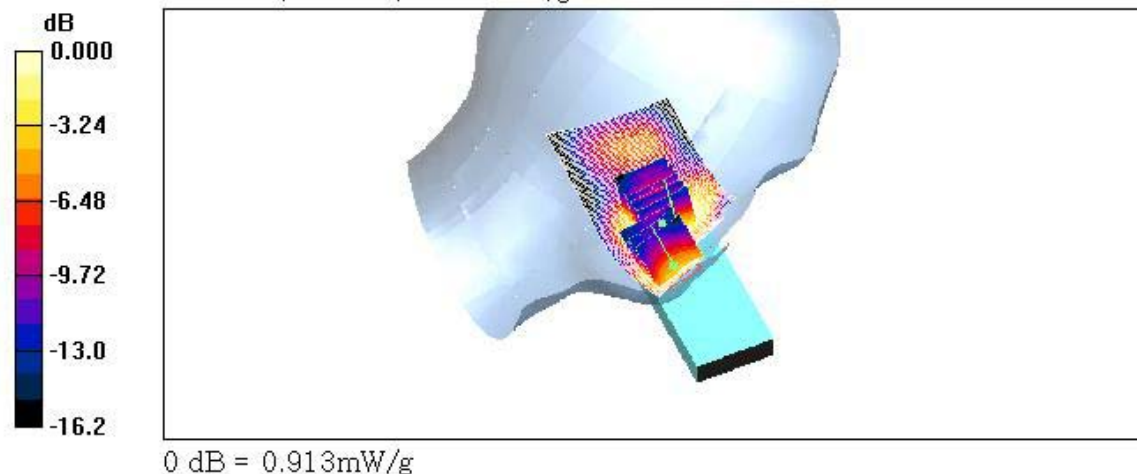

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.157 mW/g

Left touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 10.2 V/m; Power Drift = -0.122 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.078 mW/g
Maximum value of SAR (measured) = 0.136 mW/g

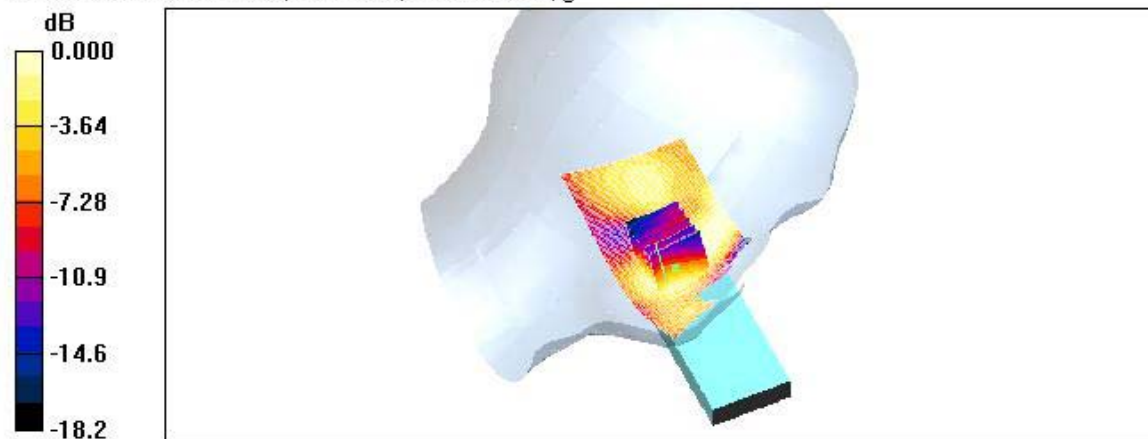

0 dB = 0.136mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 1175
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 1175/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 2.11 mW/g


Left touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.5 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.647 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.22 mW/g

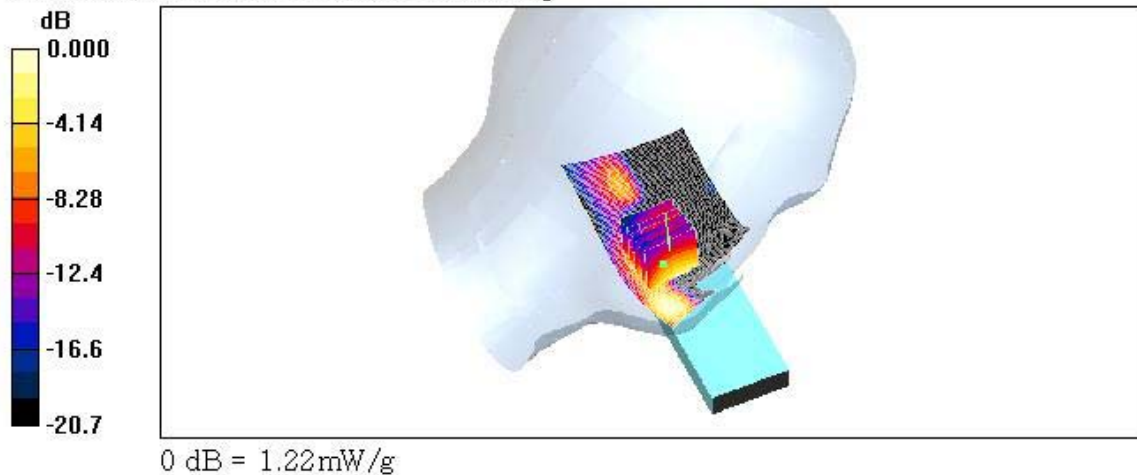

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 1175
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 1175/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.198 mW/g


Left touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 10.3 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.097 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.188 mW/g

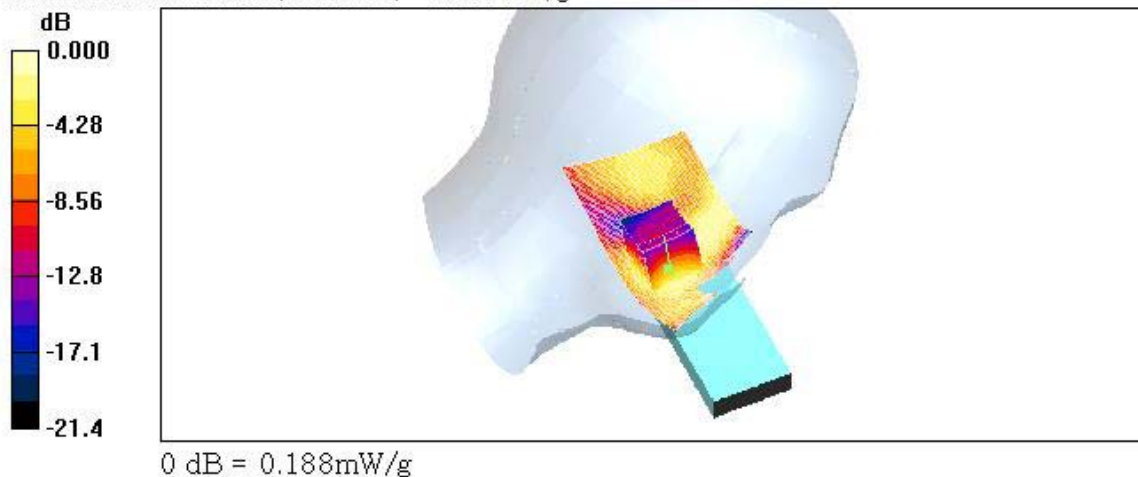

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 25
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 25/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.10 mW/g


Right touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.9 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.997 mW/g; SAR(10 g) = 0.588 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.07 mW/g

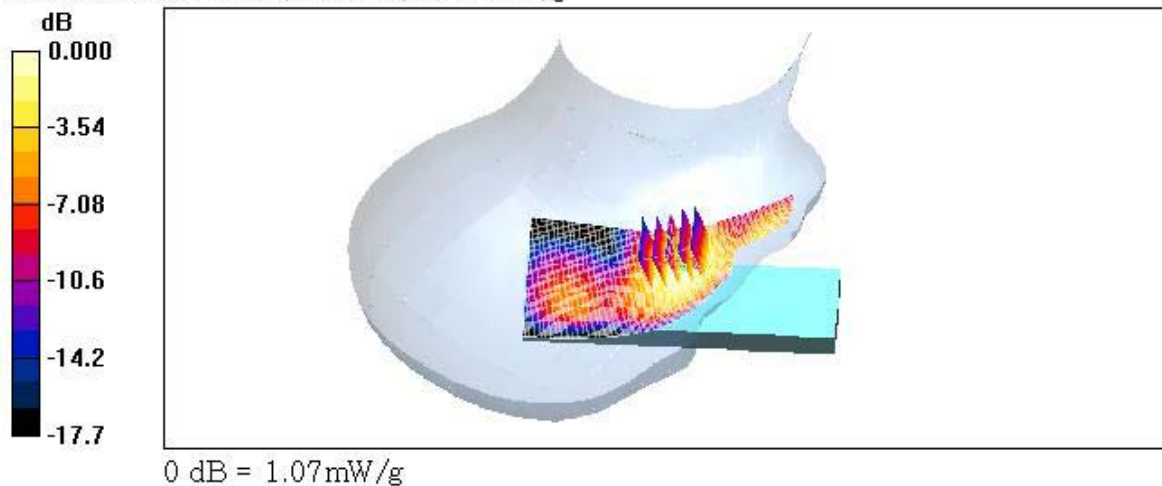

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 25
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 25/Area Scan (51x101x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.211 mW/g

Right touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$


Reference Value = 10.3 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.124 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.214 mW/g

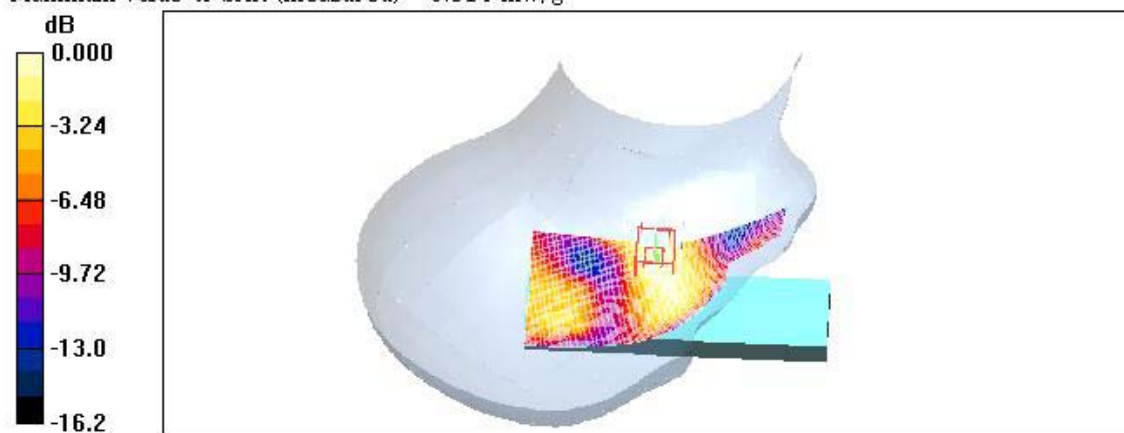

0 dB = 0.214 mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 600/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 1.21 mW/g

Right touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 24.4 V/m; Power Drift = 0.039 dB
Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.630 mW/g
Maximum value of SAR (measured) = 1.18 mW/g

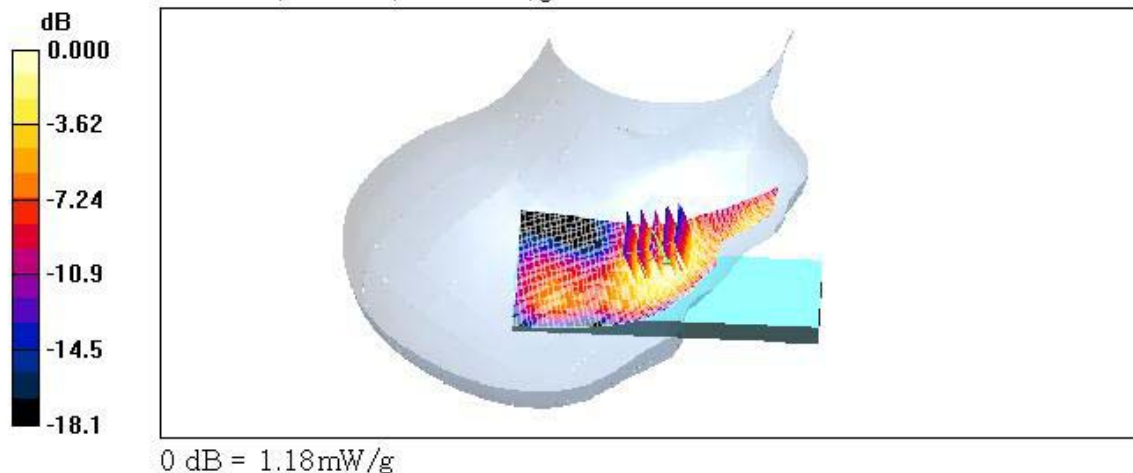

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.233 mW/g

Right touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 9.15 V/m; Power Drift = 0.132 dB
Peak SAR (extrapolated) = 0.212 W/kg
SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.094 mW/g
Maximum value of SAR (measured) = 0.161 mW/g

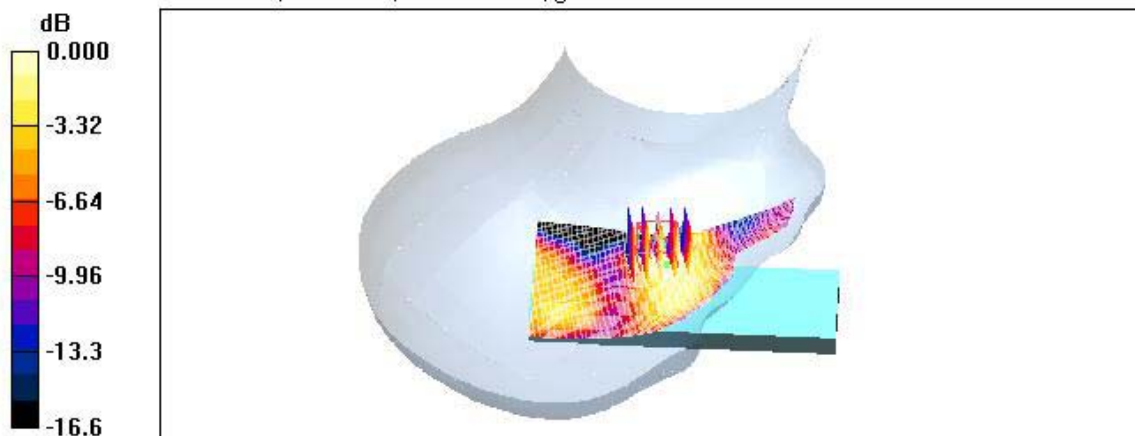

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 1175
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.26 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 22.7 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.672 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.25 mW/g

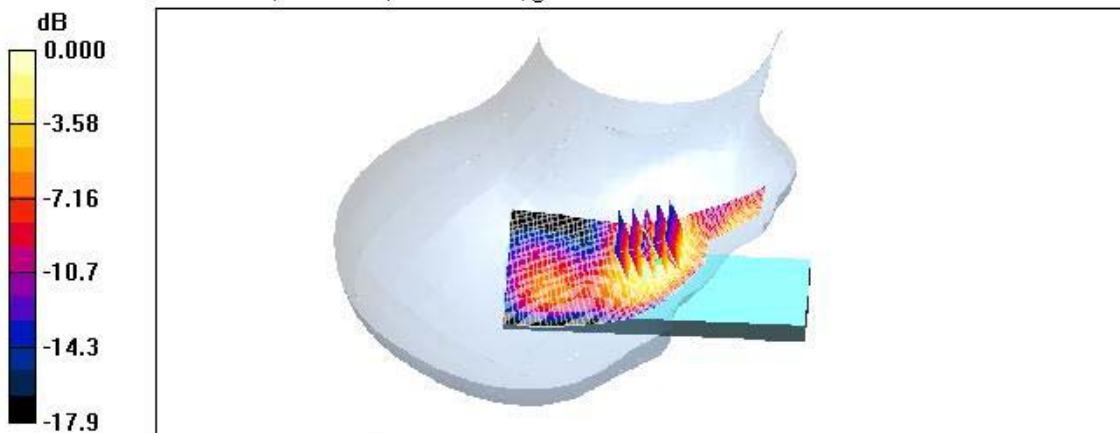

0 dB = 1.25mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 1175(E-battery)
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.34 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 23.9 V/m; Power Drift = 0.117 dB
Peak SAR (extrapolated) = 2.33 W/kg
SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.673 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.27 mW/g

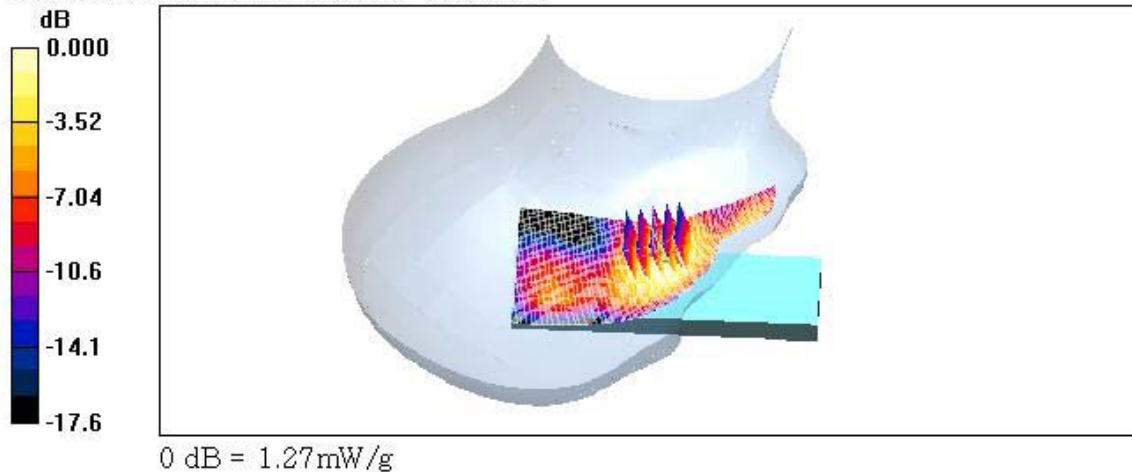

Test Laboratory: HCT

MODEL: PC-8200N

Company : Pantech co., Ltd.

Mode : PCS1900 / Channel : 1175 (Bluetooth on)

Liquid Temperature : 21.7 °C

Date Tested : April 17, 2006

DUT: PC-8200N; Type: Folder; Serial: #1**Program Name: PC-8200N**

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.26 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 24.2 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.626 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

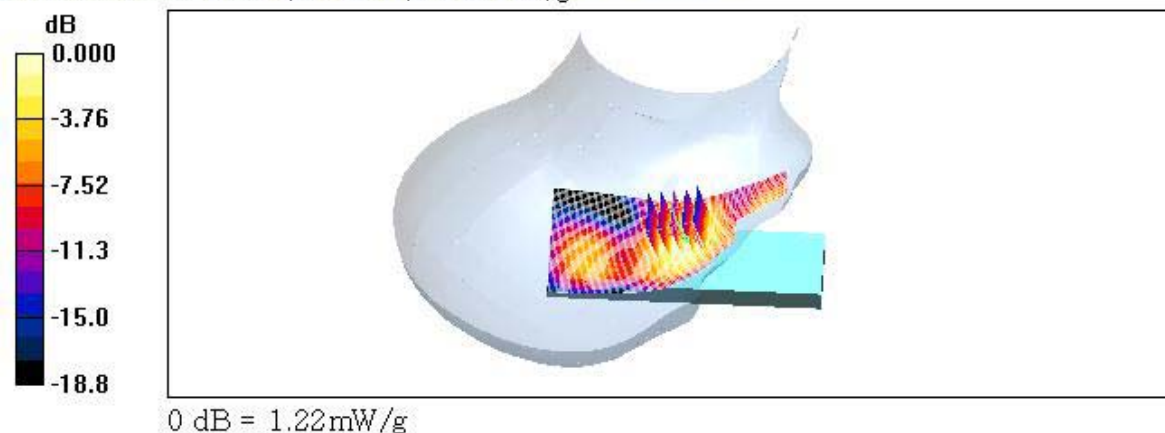

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 1175
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.173 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.68 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.099 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.173 mW/g

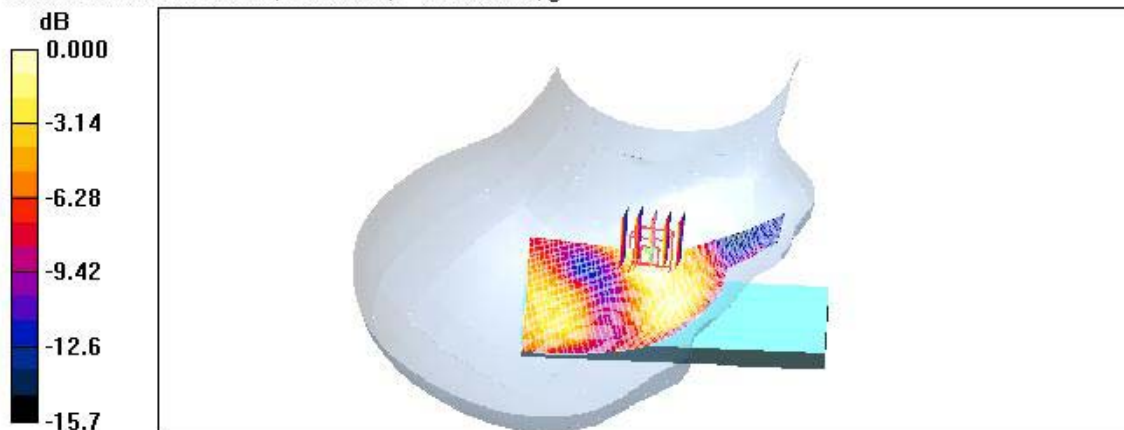

0 dB = 0.173mW/g

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-S200N; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.331 mW/g

Left tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 10.1 V/m; Power Drift = -0.039 dB
Peak SAR (extrapolated) = 0.438 W/kg
SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.175 mW/g
Maximum value of SAR (measured) = 0.314 mW/g

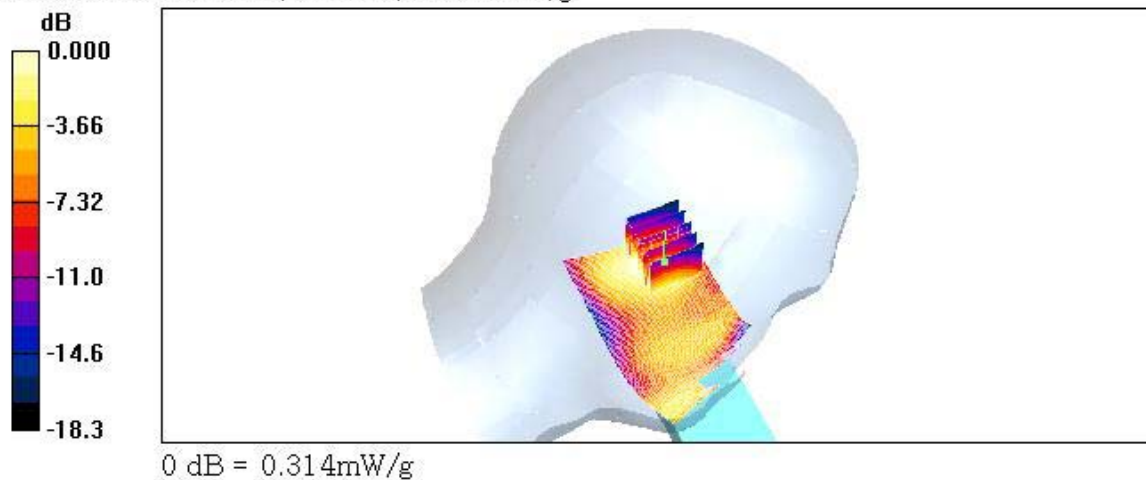

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 600/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.178 mW/g

Left tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.10 V/m; Power Drift = 0.165 dB
Peak SAR (extrapolated) = 0.189 W/kg
SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.074 mW/g
Maximum value of SAR (measured) = 0.135 mW/g

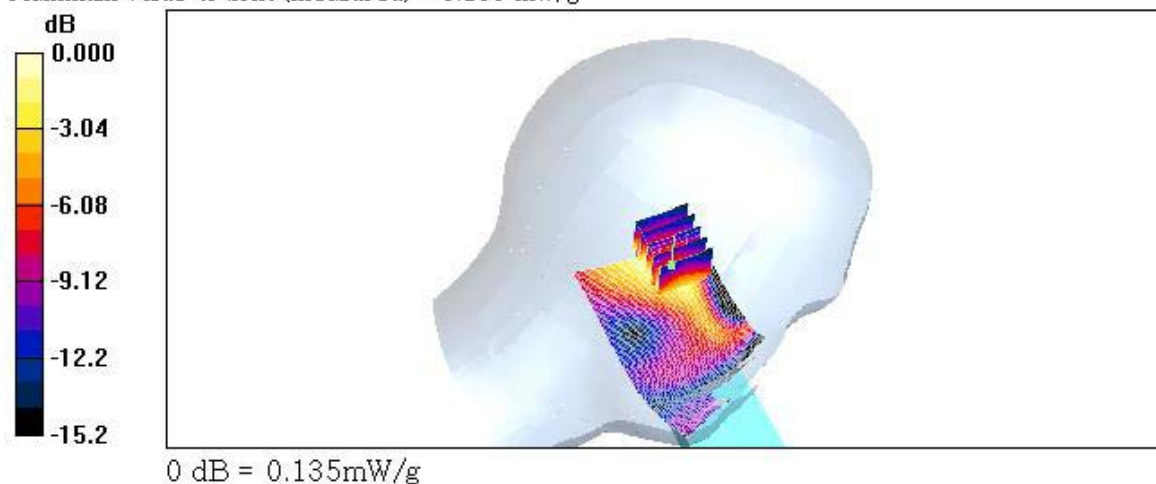

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : In / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 600/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.292 mW/g

Right tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.19 V/m; Power Drift = 0.102 dB
Peak SAR (extrapolated) = 0.382 W/kg
SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.157 mW/g
Maximum value of SAR (measured) = 0.269 mW/g

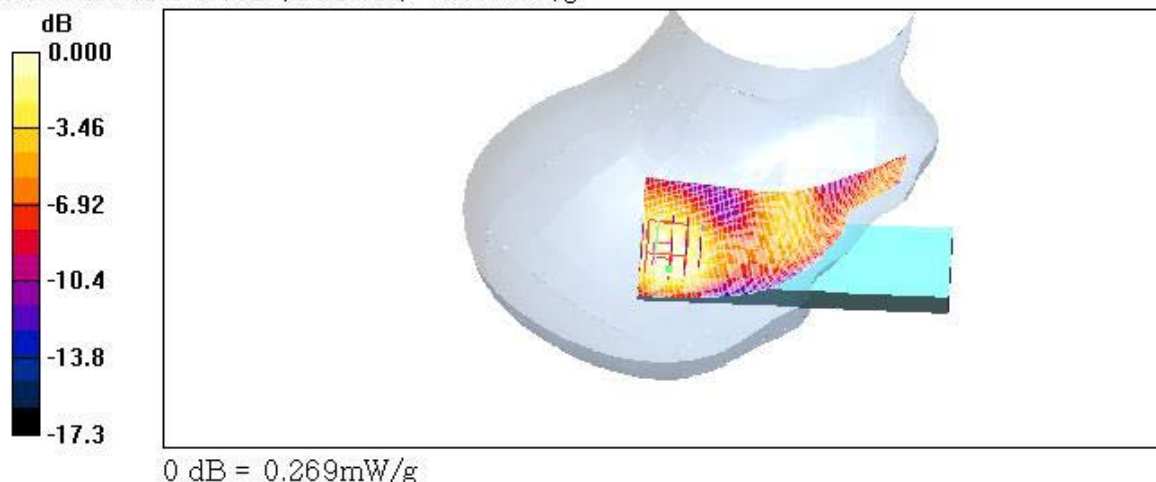

Test Laboratory: HCT

Company : Pantech co., Ltd.
Mode : PCS1900 / Antenna : out / Channel : 600
Date Tested : March 30, 2006
Liquid Temperature : 21.4 °C

DUT: PC-8200N; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.095 mW/g

Right tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 3.47 V/m; Power Drift = -0.146 dB
Peak SAR (extrapolated) = 0.138 W/kg
SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.052 mW/g
Maximum value of SAR (measured) = 0.091 mW/g

