

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch661_front_dist_0mm

DUT: Triple-Band GSM 850 / DCS 1800 / PCS1900 (with WAP & GPRS); Type: PG-C300;
Serial: ---

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.31, 4.31, 4.31); Calibrated: 11/21/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11/23/2005
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

PG-C300/Area Scan (81x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.500 mW/g


PG-C300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.3 V/m ; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.430 mW/g ; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

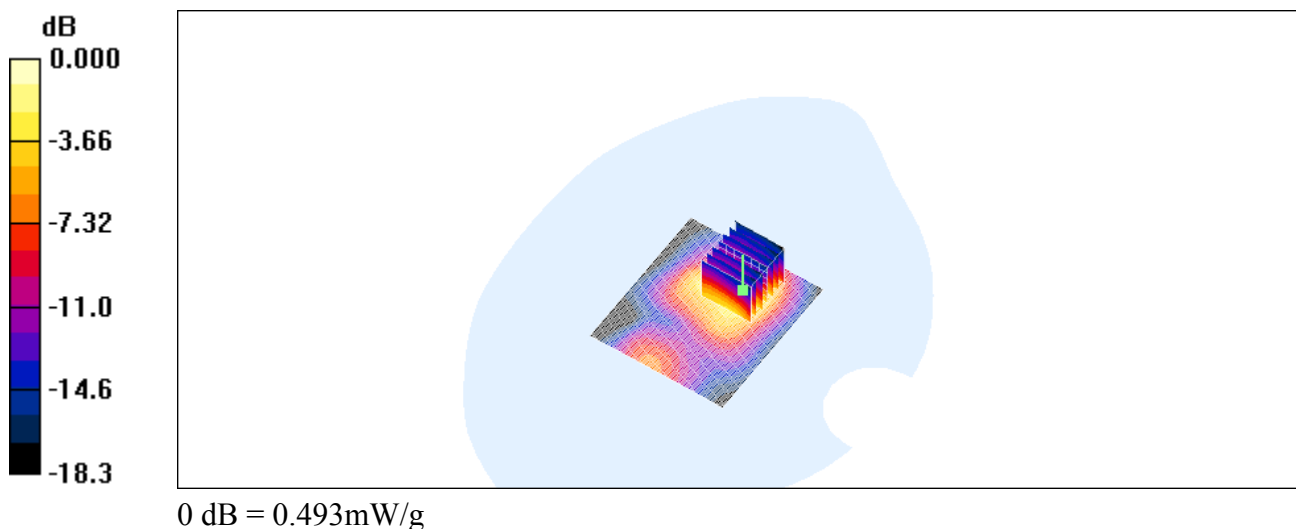

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch661_back_dist_0mm

DUT: Triple-Band GSM 850 / DCS 1800 / PCS1900 (with WAP & GPRS); Type: PG-C300;
Serial: ---

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.31, 4.31, 4.31); Calibrated: 11/21/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11/23/2005
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

PG-C300/Area Scan (81x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.36 mW/g


PG-C300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.4 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.664 mW/g

Maximum value of SAR (measured) = 1.38 mW/g

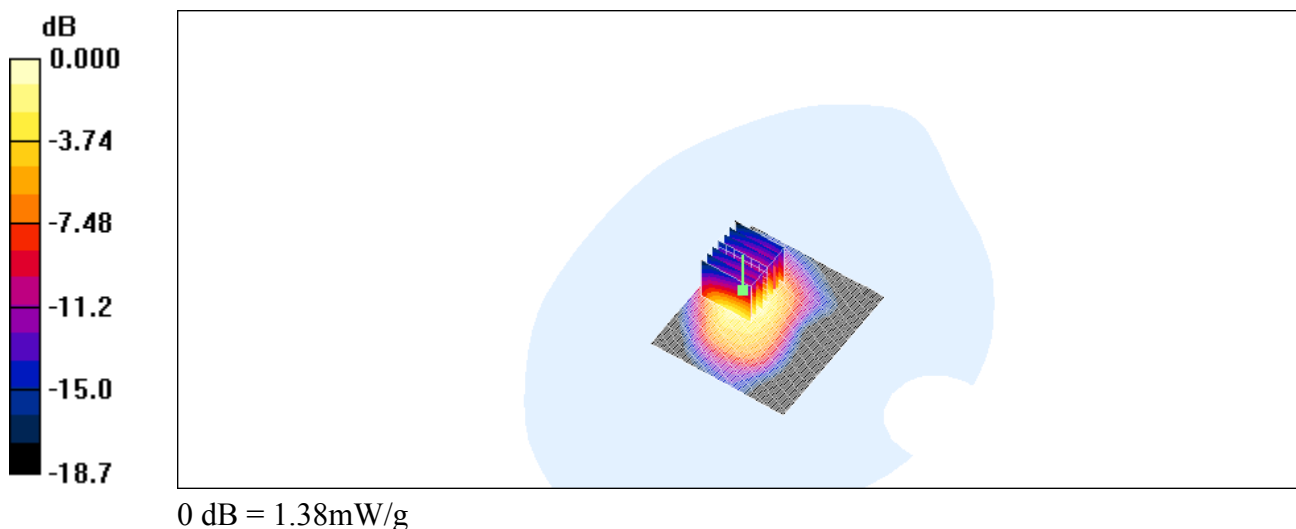

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch512_back_dist_0mm

DUT: Triple-Band GSM 850 / DCS 1800 / PCS1900 (with WAP & GPRS); Type: PG-C300;
Serial: ---

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.31, 4.31, 4.31); Calibrated: 11/21/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11/23/2005
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

PG-C300/Area Scan (81x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.12 mW/g



PG-C300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.2 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

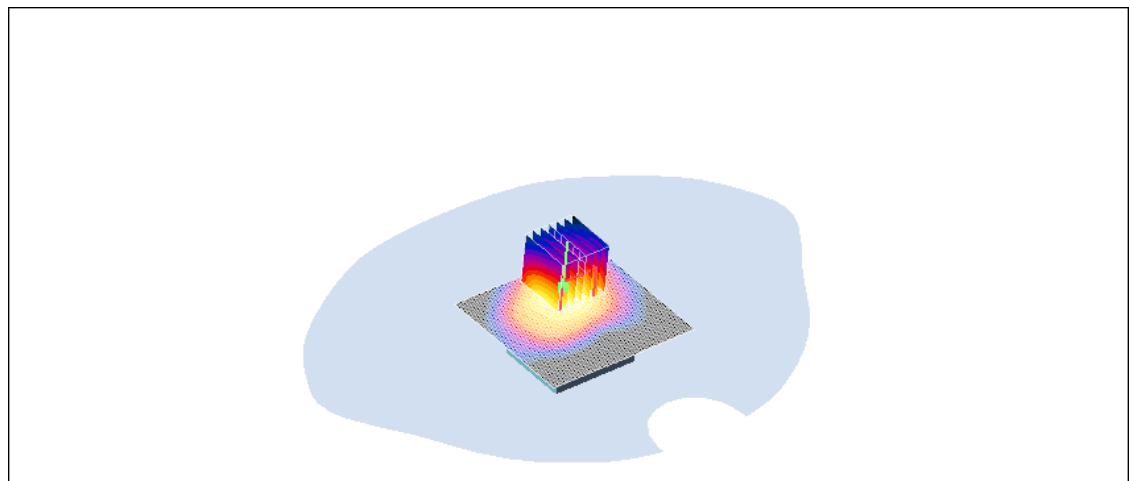

0 dB = 1.12mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch810_back_dist_0mm

DUT: Triple-Band GSM 850 / DCS 1800 / PCS1900 (with WAP & GPRS); Type: PG-C300;
Serial: ---

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 51.8$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.31, 4.31, 4.31); Calibrated: 11/21/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11/23/2005
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

PG-C300/Area Scan (81x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.59 mW/g


PG-C300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.804 mW/g

Maximum value of SAR (measured) = 1.58 mW/g

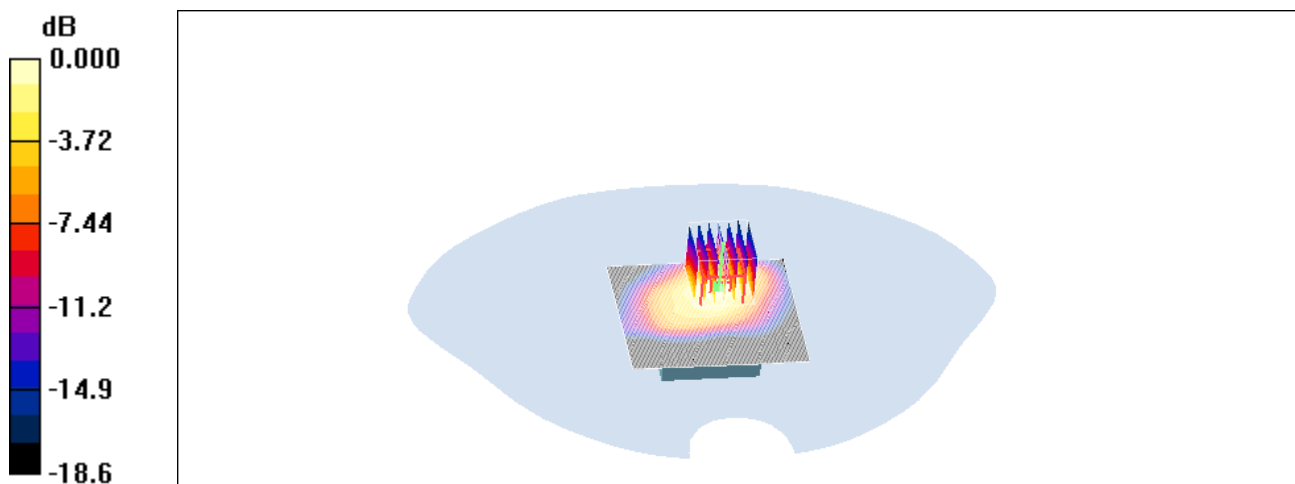

0 dB = 1.58mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch810_back_dist_0mm_z-axis scan

DUT: Triple-Band GSM 850 / DCS 1800 / PCS1900 (with WAP & GPRS); Type: PG-C300;
Serial: ---

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 51.8$;

$\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.31, 4.31, 4.31); Calibrated: 11/21/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11/23/2005
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

PG-C300/Area Scan (81x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.59 mW/g


PG-C300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.2 V/m ; Power Drift = 0.01dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.42 mW/g ; SAR(10 g) = 0.804 mW/g

Maximum value of SAR (measured) = 1.58 mW/g

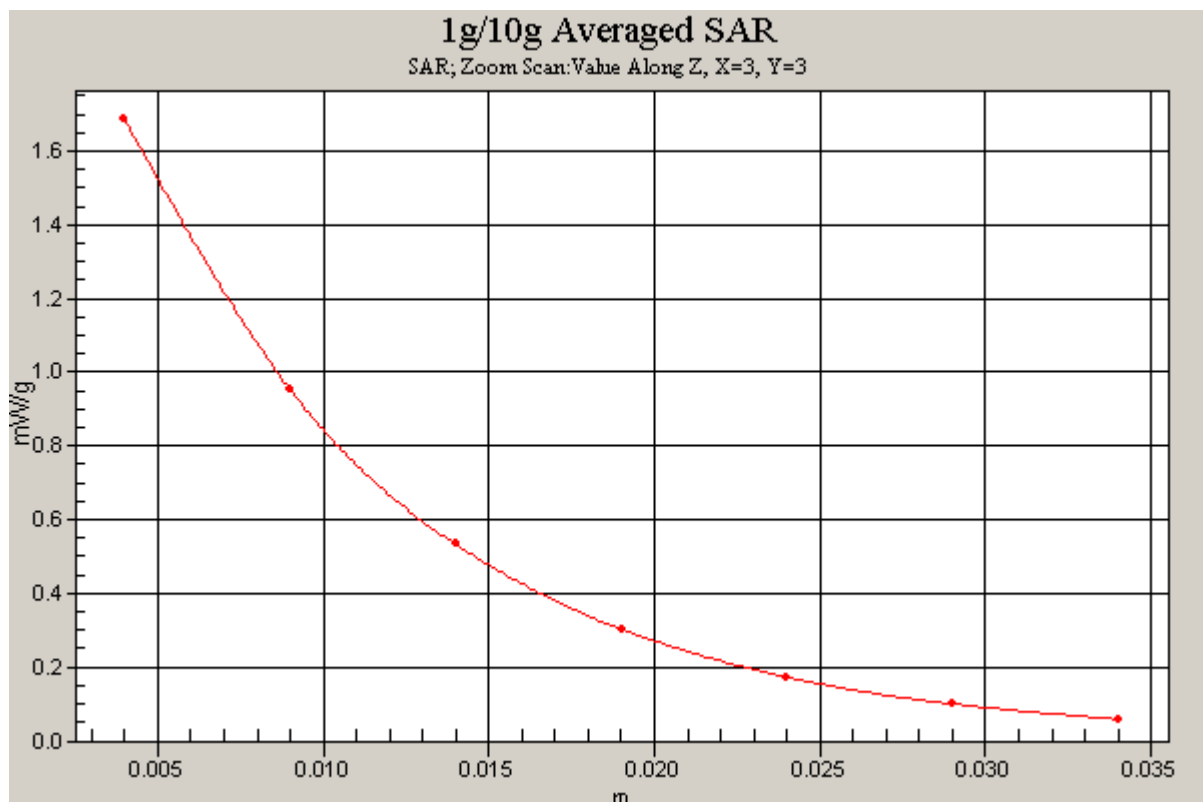

Appendix C

Pictures

Appendix


C. Pictures









Valid 850

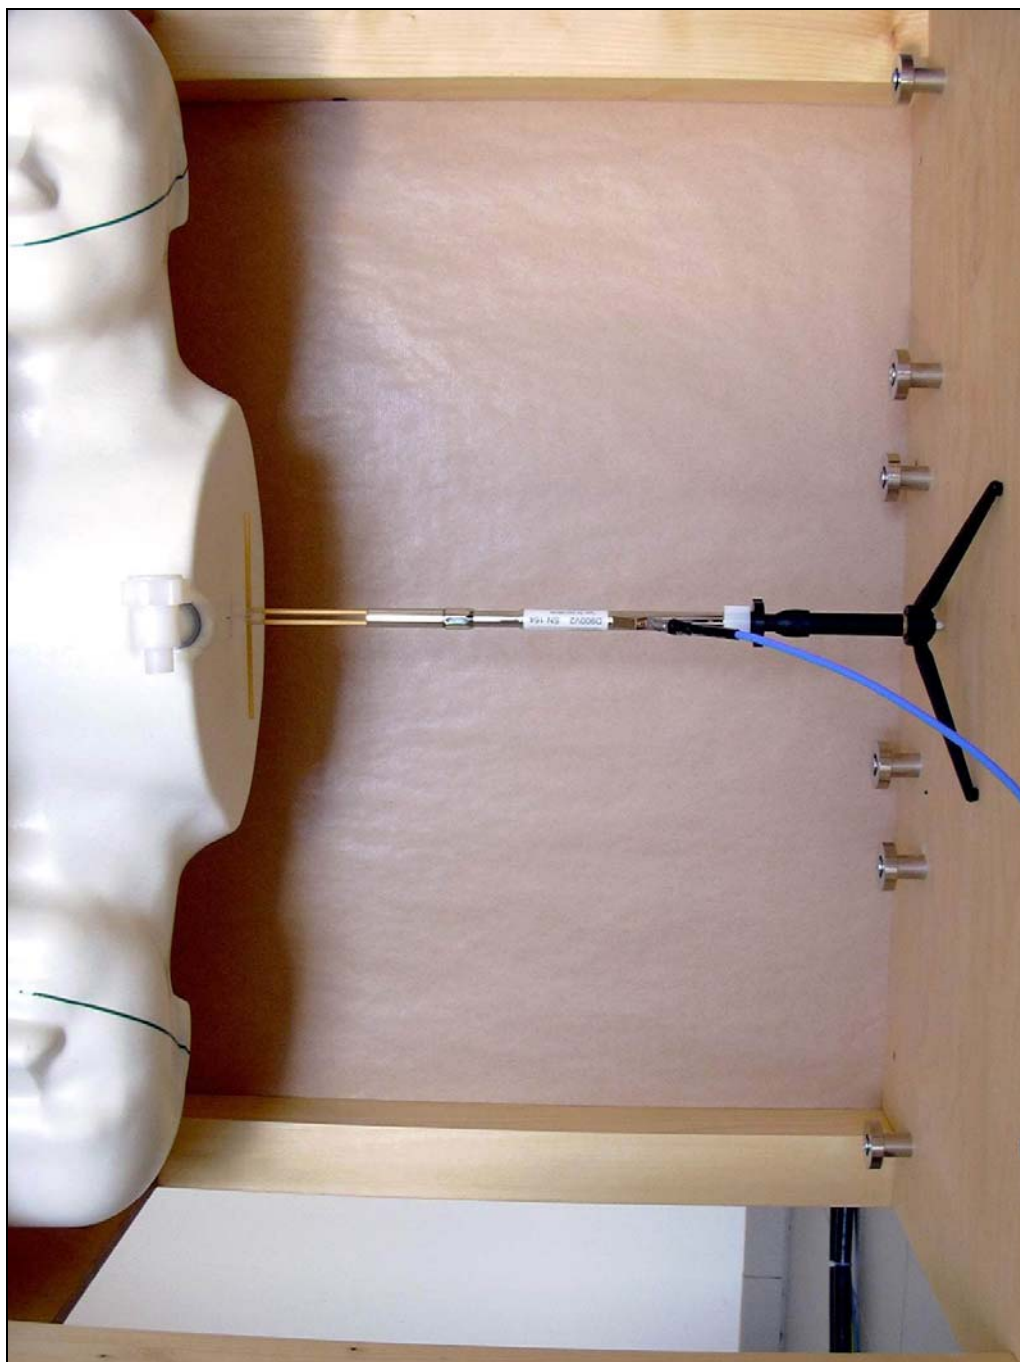

Liquid depth 850

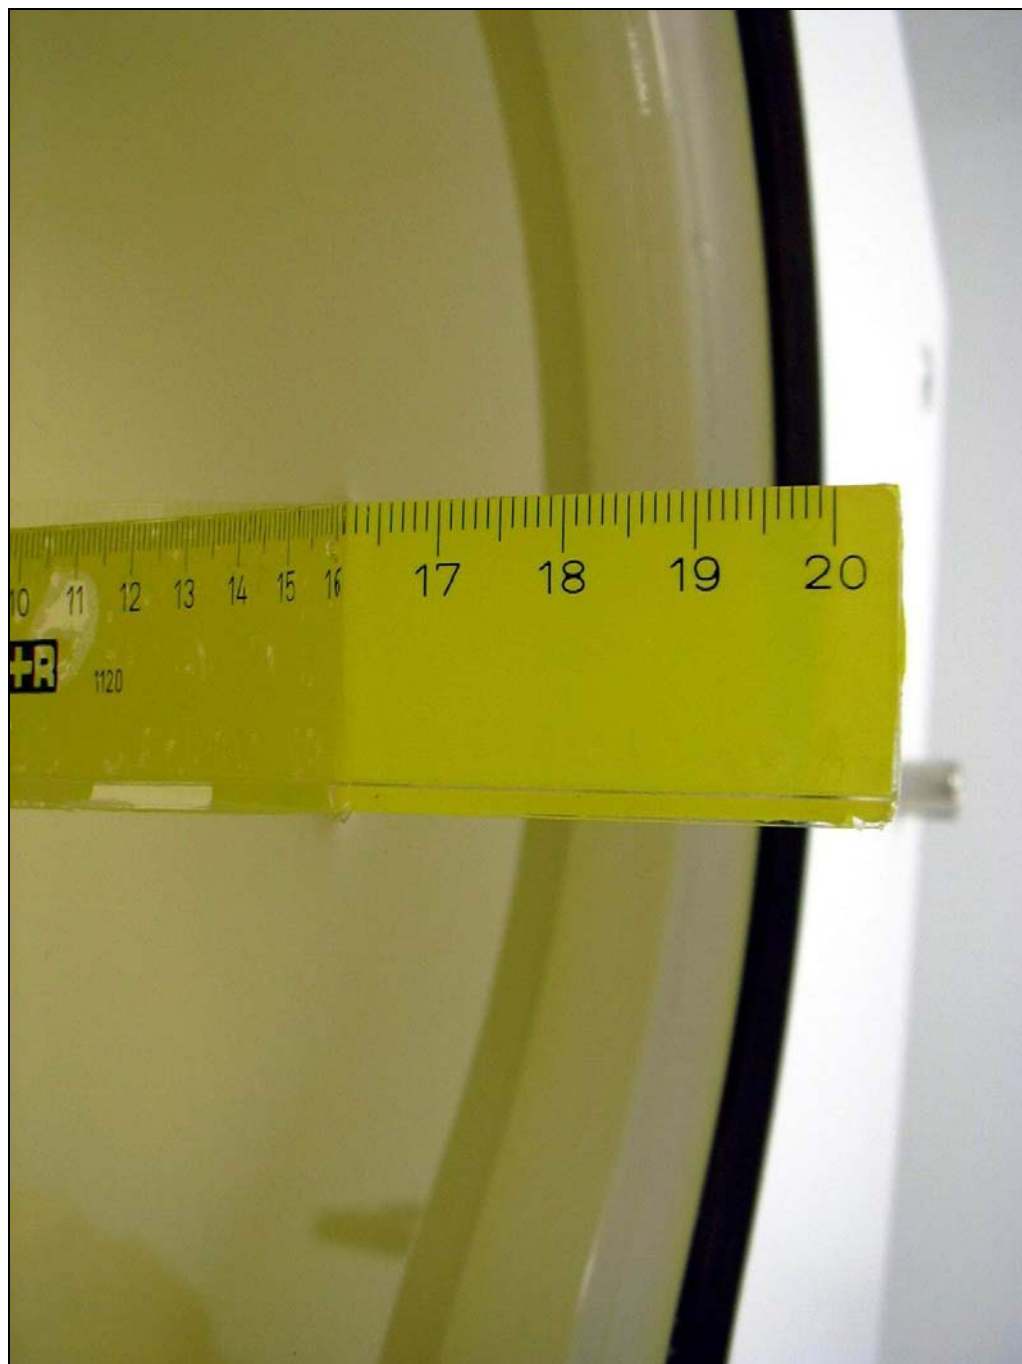

Valid 1900

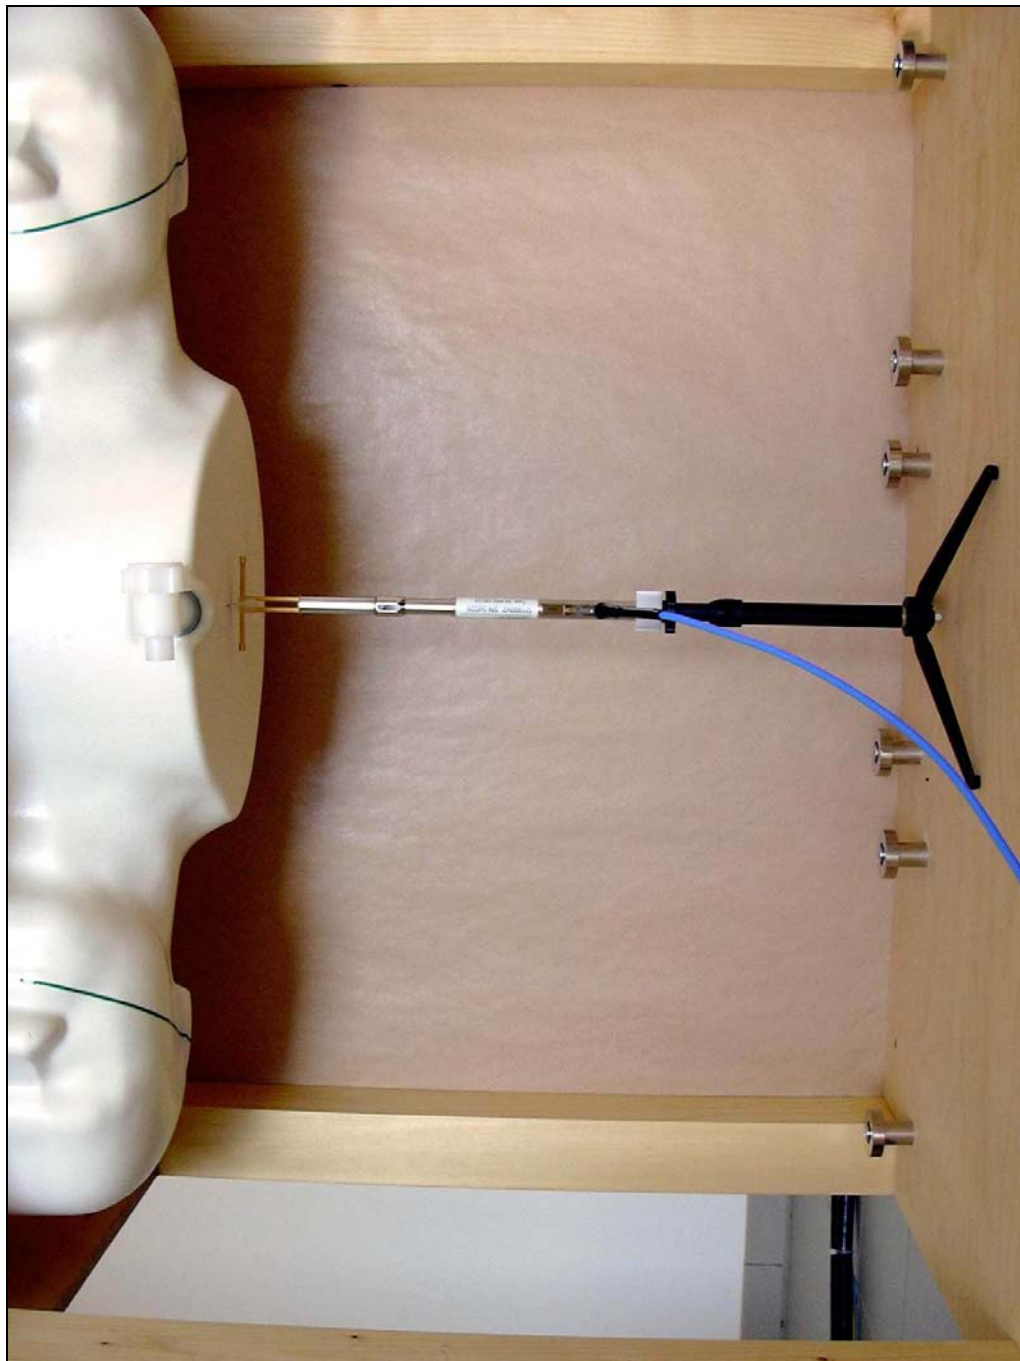

Liquid depth 1900

