

Date	Rev	Revision Record	Approved

**PMP 38.6 to 40 GHz
Agency Certification Test Report
For
SUB Low Band**

Prepared for
Hughes Network Systems
11717 Exploration Lane
Germantown, MD 20876

Hughes Proprietary II

Copyright © 2001 Hughes Network Systems

Notice of Proprietary Information

This document and its contents are proprietary to Hughes Network Systems and are intended solely for the internal use of Hughes Network Systems. This publication and its contents may not be reproduced or distributed for any other purpose without the written permission of Hughes Network Systems.

Job	Approvals	Date	<i>Hughes Network Systems</i>	
Originator:	S. Albanna			
Approved:	J. Rymkiewicz			
Checked:				
			Title: Point to Multipoint (PMP) FCC Part 101 Type Acceptance Test Results	
	Sheet 1 of 57	CAGE No.	52571	No. HNS-18122

TABLE OF CONTENTS

1.0 OVERVIEW.....	6
1.1 PRODUCT DESCRIPTION	6
1.2 CHANALIZATION.....	8
1.3 APPLICABLE STANDARDS.....	10
1.4 REFERENCE DOCUMENTS	11
2.0 SETUP	12
2.1 EQUIPMENT LIST	12
2.2 TEST SETUPS.....	14
3.0 FCC PART 101 TESTS.....	16
3.1 THE OUTPUT POWER	16
3.1.1 Performance Specifications	16
3.1.2 Test Procedures	16
3.1.3 Test Configuration	17
3.1.4 Test Results	17
3.2 OCCUPIED BANDWIDTH.....	23
3.2.1 Performance Specifications	23
3.2.2 Test Procedures	23
Table 6 Occupied Bandwidth Test Frequencies	23
3.2.3 Test Configuration	24
3.2.4 Test Results	24
3.3 CONDUCTED SPURIOUS EMISSIONS FROM THE TRANSMITTER	28
3.3.1 Performance Specifications	28
3.3.2 Test Procedures	28
3.3.3 Test Configuration	29
3.3.4 Tests Results.....	29
3.3.4.1 High Power (18 dBm) channel 1B1	30
3.3.4.2 High Power (18 dBm) , channel 7B4.....	33
3.3.4.3 Low power (-12 dBm) channel 1B1	36
3.3.4.4 Low Power (-12 dBm), channel 7B4.....	40
3.4 RADIATED SPURIOUS EMISSIONS FROM THE TRANSMITTER.....	43
3.4.1 Performance Specifications	43
3.4.2 Test Procedures	43
3.4.3 Test Configuration	44
3.4.4 Test Results	44
3.4.4.1 Horizontal and Vertical, 1-18 GHz.....	45
3.4.4.2 Horizontal Polarization, 18 – 40 GHz	46
3.4.4.3 Horizontal Polarization, 40 – 60 GHz	47
3.4.4.4 Horizontal Polarization, 60 – 90 GHz	47
3.4.4.5 Horizontal Polarization, 90 – 140 GHz	48
3.4.4.6 Horizontal Polarization, 140 – 220 GHz	49
3.4.4.7 Vertical Polarization, 18 – 40 GHz.....	51
3.4.4.8 Vertical Polarization, 40 – 60 GHz.....	52
3.4.4.9 Vertical Polarization, 60 – 90 GHz.....	52
3.4.4.10 Vertical Polarization, 90 – 140 GHz.....	53
3.4.4.11 Vertical Polarization, 140 – 220 GHz.....	54
3.5 FREQUENCY STABILITY	56
3.5.1 Performance Specifications	56
3.5.2 Test Results	56

LIST OF TABLES

No. HNS-18122

Rev.

Sheet 2 of 57

TABLE	Page
Table 1 HNS Transmitting Sub-channels.....	9
Table 2 Equipment Under Test (EUT) that are subject to the FCC 101 filling	12
Table 3 Equipment that were used in compliment to generate the traffic to the ODU	12
Table 4 Test Equipment used.....	13
Table 5 Test Results for the Output Power	17
Table 6 Occupied Bandwidth Test Frequencies	23
Table 7 Conducted Spurious Emissions Test Frequencies	28
Table 8 Radiated Spurious Emissions Test Frequencies.....	43
Table 9 Equipment for Radiated Emissions Test.....	44

LIST OF FIGURES

Figure	Page
Figure 1 Basic PMP RT/HT terminal.....	7
Figure 2 HNS Channalization	8
Figure 3 Transmitter Test Setup Configuration	14
Figure 4 Transmitter Test Setup Configuration - Conducted Spurious Emissions	15
Figure 5 Transmitter Test Setup Configuration - Radiated Spurious Emissions.....	15
Figure 6 Output Power for QPSK modulation on ch. 1B1	18
Figure 7 Output Power for QPSK modulation on ch. 4B3	18
Figure 8 Output Power for QPSK modulation on ch. 7B4	19
Figure 9 Output Power for 64-QAM modulation on ch. 1B1	19
Figure 10 Output Power for 64-QAM modulation on ch. 4B3	20
Figure 11 Output Power for 64-QAM modulation on ch. 7B4	20
Figure 12 Output Power for 16-QAMmodulation on ch. 1B1	21
Figure 13 Output Power for 16-QAMmodulation on ch. 4B3	21
Figure 14 Output Power for 16-QAMmodulation on ch. 7B4	22
Figure 15 FCC Mask for the HUB	24
Figure 16 Bandwidth for QPSK modulated signal on channel 1B1	25
Figure 17 Bandwidth for QPSK modulated signal on channel 7B4	25
Figure 18 Bandwidth for 64-QAM modulated signal on channel 1B1	26
Figure 19 Bandwidth for 64-QAM modulated signal on channel 7B4	26
Figure 20 Bandwidth for 16-QAM modulated signal on channel 1B1	27
Figure 21 Bandwidth for 16-QAM modulated signal on channel 7B4	27

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 3 of 57

Figure 22 Conducted Emissions in 0 – 40 GHz, for transmitting 18 dBm on channel 1B1	30
Figure 23 Conducted Emissions in 0 – 38.55 GHz, for transmitting 18 dBm on channel 1B1	30
Figure 24 Conducted Emissions in 40 - 60 GHz, for transmitting 18 dBm on channel 1B1	31
Figure 25 Conducted Emissions in 60 - 90 GHz, for transmitting 18 dBm on channel 1B1	31
Figure 26 Conducted Emissions in 90 – 140 GHz, for transmitting 18 dBm on channel 1B1	32
Figure 27 Conducted Emissions in 140 – 200 GHz, for transmitting 18 dBm on channel 1B1	32
Figure 28 Conducted Emissions in 39 – 40 GHz, for transmitting 18 dBm on channel 7B4	33
Figure 29 Conducted Emissions in 0 – 38.55 GHz, for transmitting 18 dBm on channel 7B4	33
Figure 30 Conducted Emissions in 40 – 60 GHz, for transmitting 18 dBm on channel 7B4	34
Figure 31 Conducted Emissions in 60 – 90 GHz, for transmitting 18 dBm on channel 7B4	34
Figure 32 Conducted Emissions in 90 – 140 GHz, for transmitting 18 dBm on channel 7B4	35
Figure 33 Conducted Emissions in 140 – 220 GHz, for transmitting 18 dBm on channel 7B4	35
Figure 34 Conducted Emissions in 0 – 38.55 GHz, for transmitting -12 dBm on channel 1B1	36
Figure 35 Conducted Emissions in 39 – 40 GHz, for transmitting -12 dBm on channel 1B1	37
Figure 36 Conducted Emissions in 40 – 60 GHz, for transmitting -12 dBm on channel 1B1	37
Figure 37 Conducted Emissions in 60 – 90 GHz, for transmitting -12 dBm on channel 1B1	38
Figure 38 Conducted Emissions in 90 – 140 GHz, for transmitting -12 dBm on channel 1B1	38
Figure 39 Conducted Emissions in 140 – 220 GHz, for transmitting -12 dBm on channel 1B1	39
Figure 40 Conducted Emissions in 0 – 38.55 GHz, for transmitting -12 dBm on channel 7B4	40
Figure 41 Conducted Emissions in 39 – 40 GHz, for transmitting -12 dBm on channel 7B4	40
Figure 42 Conducted Emissions in 40 – 60 GHz, for transmitting -12 dBm on channel 7B4	41
Figure 43 Conducted Emissions in 60 – 90 GHz, for transmitting -12 dBm on channel 7B4	41
Figure 44 Conducted Emissions in 90 – 140 GHz, for transmitting -12 dBm on channel 7B4	42
Figure 45 Conducted Emissions in 140 – 220 GHz, for transmitting -12 dBm on channel 7B4	42
Figure 46 Radiated Spurious Emissions from 1-18 GHz	45
Figure 47 Radiated Emissions in 18 – 26.5 GHz, for transmitting 18 dBm on channel 4B3	46
Figure 48 Radiated Emissions in 26.5 – 40 GHz, for transmitting 18 dBm on channel 4B3	46
Figure 49 Radiated Emissions in 40 – 60 GHz, for transmitting 18 dBm on channel 4B3	47
Figure 50 Radiated Emissions in 60 – 75 GHz, for transmitting 18 dBm on channel 4B3	47
Figure 51 Radiated Emissions in 75 – 90 GHz, for transmitting 18 dBm on channel 4B3	48
Figure 52 Radiated Emissions in 90 – 115 GHz, for transmitting 18 dBm on channel 4B3	48
Figure 53 Radiated Emissions in 115 – 140 GHz, for transmitting 18 dBm on channel 4B3	49
Figure 54 Radiated Emissions in 140 – 180 GHz, for transmitting 18 dBm on channel 4B3	49
Figure 55 Radiated Emissions in 180 – 220 GHz, for transmitting 18 dBm on channel 4B3	50
Figure 56 Radiated Emissions in 18 – 26.5 GHz, for transmitting 18 dBm on channel 4B3	51

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 4 of 57

Figure 57 Radiated Emissions in 26.5 – 40 GHz, for transmitting 18 dBm on channel 4B3.....	51
Figure 58 Radiated Emissions in 40 – 60 GHz, for transmitting 18 dBm on channel 4B3.....	52
Figure 59 Radiated Emissions in 60 – 75 GHz, for transmitting 18 dBm on channel 4B3.....	52
Figure 60 Radiated Emissions in 75 – 90 GHz, for transmitting 18 dBm on channel 4B3.....	53
Figure 61 Radiated Emissions in 90 – 115 GHz, for transmitting 18 dBm on channel 4B3.....	53
Figure 62 Radiated Emissions in 115 – 140 GHz, for transmitting 18 dBm on channel 4B3.....	54
Figure 63 Radiated Emissions in 140 – 180 GHz, for transmitting 18 dBm on channel 4B3.....	54
Figure 64 Radiated Emissions in 180 – 220 GHz, for transmitting 18 dBm on channel 4B3.....	55

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 5 of 57

1.0 OVERVIEW

This test plan has been prepared by Hughes Network Systems to document the required RF Type Acceptance FCC101 subparts C& H (Fixed Microwave Services) on the Point to Multipoint-Aireach product (PMP). The purpose of this testing is to determine performance against the requirements for the FCC 101 subsections mentioned.

1.1 PRODUCT DESCRIPTION

This test plan and report will demonstrate the compliance with the FCC 101 for the Low Band (LB) and High Band (HB) Subscriber systems. This test plan and report will be later be updated with the data for the High Band (HB) Subscriber test data. The following 38-40 GHz subsystem units are/will be tested and submitted:

LB SUB (Low Band Subscriber unit) Tx (38606.25- 38943.75) MHz

LB HUB (Low Band HUB unit) Tx (38606.25- 38943.75) MHz

HB SUB (High Band Subscriber unit) Tx (38606.25- 38943.75) MHz

LB HUB (Low Band Hub unit) Tx (38606.25- 38943.75) MHz

In this test plan and report we are verifying the LB Sub, the LB HUB data will be in another HNS test report HNS 1028991.

The HNS PMP provides services to carry voice and data efficiently and economically. The system is based upon multi-sector cells with TDMA/TDMA air Interface. It provides sophisticated multi-mode modulation (QPSK, 64-QAM, and 16-QAM) on a per-burst basis to efficiently handle broad ranging requirements for sector capacity and sector size.

The overall PMP network Architecture includes several elements, including the radios, the transmission equipment, and the central office equipment. The HNS portion of this system is the HNS 38 GHz Point-to Multi-point (PMP). This includes subscriber premises equipment, PMP HUB radio equipment, and interfaces to commercially available multiplexing equipment. These interfaces include the (SONET) backbone and dedicated trunks to the voice switch, as well as IP routers and other data delivery systems.

The PMP product is broken into two terminals, a hub terminal (HT) and a remote Terminal (RT). The HT is responsible on routing the data/voice signals from one RT to another. The RT is at the customer premises and comprises 3 components:

No. HNS-18122	
Rev.	

Sheet 6 of 57

ODU: Outdoor Unit: which is an integrated 38 GHz Transceiver and antenna,

IDU: Indoor Unit that provides modem and remote multiplexed function, and finally,

The Inter-facility Link (IFL): which is a single coaxial cable that interconnects the ODU and IDU. The HT has the same main components; it supports one sector with one over-the air frequency (12.5 MHz sub-channel).

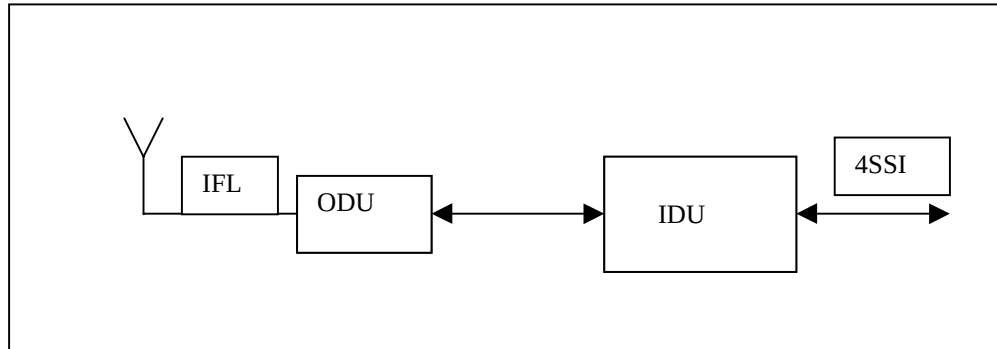


Figure 1 Basic PMP RT/HT terminal

Figure 1 shows a basic block diagram for the RT/HT system. The IFL cable shown carries DC power signal, reference carrier frequency, the Up-link and the Downlink IF signals and the telemetry control link signals. The IDU is installed indoors, often in a wiring closet. It includes the IF, modem, air frame formatting login, the IFL interface, and the subscriber interface multiplexer function in one unit. Each IDU has four multiport SSI slots to allow for several different user interfaces. For more description of product, it's operation and functionality, please refer to the DDD (Detailed Design document) HNS –13880.

1.2 CHANALIZATION

The channalization, taken from the FCC regulations, CFR-47& 101.147 Frequency assignments, is given in Table 1. The HNS product further breaks each 50 MHz license into four 12.5 MHz sub-channels (see figure 2) The first number and the first letter of each designator are the FCC number for the channel. The last number is the sub-channel designator. The figure shows the designation of FCC channel 1-A. Each of these sub-channels operates at a symbol rate of 10.0Msps in the TDMA mode. The QPSK Spectral Density is 20Mbps in 12.5 MHz or 1.6 bits/s/Hz and the 64-QAM spectral density is 60Mbps in 12.5 MHz or 4.8 bits/s/Hz

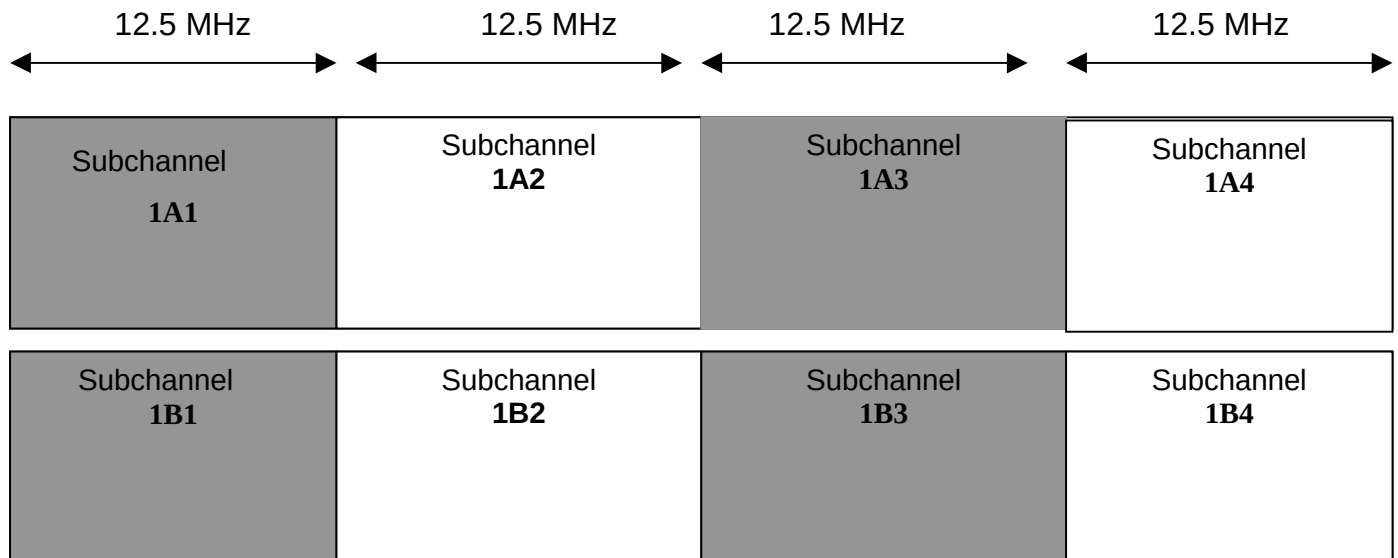


Figure 2 HNS Channelization

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 8 of 57

Channel Group A- Subscriber Transmitting channels		
LB		
Channel #	Tx Frequency Band Limits (MHz)	Rx Frequency Band Limits (MHz)
1-B	38600-38650	38300-38350
2-B	38650-38700	38350-38400
3-B	38700-38750	38400-38450
4-B	38800-38850	38450-38500
5-B	38850-38900	38500-38550
6-B	38850-38900	38550-38600
7-B	38900-38950	38600-38650
Low Band SUB SubChannels		
Channel #	Tx Center Frequency (MHz)	Rx Center Frequency (MHz)
1B1	38606.25	39306.25
1B2	38618.75	39318.75
1B3	38631.25	39331.25
1B4	38643.75	39343.75
2B1	38656.25	39356.25
2B2	38668.75	39368.75
2B3	38681.25	39381.25
2B4	38693.75	39393.75
3B1	38706.25	39406.25
3B2	38718.75	39418.75
3B3	38731.25	39431.25
3B4	38743.75	39443.75
4B1	38756.25	39456.25
4B2	38768.75	39468.75
4B3	38781.25	39481.25
4B4	38793.75	39493.75
5B1	38806.25	39506.25
5B2	38818.75	39518.75
5B3	38831.25	39531.25
5B4	38843.75	39543.75
6B1	38856.25	39556.25
6B2	38868.75	39568.75
6B3	38881.25	39581.25
6B4	38893.75	39593.75
7B1	38906.25	39606.25
7B2	38918.75	39618.75
7B3	38931.25	39631.25
7B4	38943.75	39643.75

Table 1 HNS Transmitting Sub-channels

No. HNS-18122

Rev.

1.3 APPLICABLE STANDARDS

The considered standards are as follows:

1. FCC CFR 47 Part 101 Subparts C & H - Fixed Microwave Services
2. FCC CFR 47 Part 15 - Radio Frequency Devices
3. FCC CFR 47 Part 2 - General Rules and Regulations

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 10 of 57

1.4 REFERENCE DOCUMENTS

1. HNS-13880, 38GHz Point to Multipoint radio System Detailed Design and Requirements Documents
2. HNS 1024668, 38 GHz Radio Integrated Outdoor units for Subscribers and Hub Stations
3. ODU Detailed test data for Subscriber Remote Terminal ODU S/N 201.
4. HP 8564E Spectrum Analyzer Manual
5. Specification for the parts used during the type acceptance test.
6. 38- 40 GHz Antenna Specification HNS #

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 11 of 57

2.0 SETUP

This section documents the RF transmit and receive test setup, parts and test equipment used. Table 2 section 2.1 lists the EUT (Equipment Under Test) that are subject for testing for FCC 101, with part numbers and revision levels. Table 3 and the test equipment used in the evaluations. Section 2.2 shows the various test configuration diagrams. The measurements will be done using a HP 8564E series Spectrum Analyzer as the final measuring device. All the data plots will be captured via HP Bench screen capture software and saved as *.GIF images which may then be inserted into test report documents digitally. The EUT is configured for transmission mode using custom software prepared by Hughes Network Systems for channel selection and simulation of the signals that are normally transmitted to the Hub terminal

2.1 EQUIPMENT LIST

PART NUMBER	DESCRIPTION	SERIAL NUMBER	REVISION LEVEL
1028585-0001	Out Door unit ODU SUB LB	201	Gamma

Table 2 Equipment under Test (EUT) that is subject to the FCC 101 filling

PART NUMBER	DESCRIPTION	SERIAL NUMBER	REVISION LEVEL
1027181-001	Channel and Control module (CCM) HUB Terminal HT [Indoor unit} IDU	123	B
1027181-002	Channel and Control module (CCM) SUB (Remote Terminal RT [Indoor unit} IDU	146	B
1027094-001	DS3 TDM module [Indoor unit} IDU	9	A
1027070-001	Quad DS1 module [Indoor unit} IDU	8	12
1027070-001	Quad DS1 module [Indoor unit} IDU	3	12
1027070-001	Quad DS1 module [Indoor unit} IDU	56	B
1024668-0017	38-40 GHz Antenna Assembly Subscriber	42	12

Table 3 Equipment that were used to generate the traffic to the ODU

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 12 of 57

Hughes Proprietary II

REF #	PART NUMBER	MANUFACTURER	DESCRIPTION	Calibration Dates	SERIAL NUMBER
1	8564E	HP	40 GHz Spectrum Analyzer	12/16/00	3846A01362
2	UFB142A-0-0394-110110	Micro Coax	Low Loss 40 GHz cable	NA	99A0483
3	ETS42S-28S ETS28S-19R, ET28S-12R, ET28S-8R, ET28S-5R	Custom Microwave	Waveguide transitions	NA	- S0550 S0725 S0680 S0320 S0957
4	R281A	HP	Waveguide to Cable adapter 2.4mm to WR-28	NA	2687-
5	WA-42K	Dorado International	Waveguide to Cable adapter 3.5mm to WR-42	NA	-
6	3142	EMCO	BI-Log Antenna 30 to 1000 MHz	NA	9701-1120
7	3115	EMCO	Horn Antenna 1 to 18 GHz	NA	9701-5069
8	HO42S, HO28S, HO19R, HO12R, HO8R, HO5R	Custom Microwave	Standard Gain Horn Antennas Covering 18 to 220 GHz ranges	NA	- S0656 S0750 S0746 S0683 NA
9	M19HW, M12HW, MO8HW, MO5HW, O/IFDIPLEXER	Olsen Microwave	Harmonic Mixers covering 40 to 220 GHz ranges	NA	U90108-2 E90108-1 F90108-1 G90222-1 OS 26805-
10	-	Antenna port to WR-28 adapter	-	NA	
11	N/A	Circular Waveguide to Rectangular wave Guide adapter	00010	NA	1
12		T- BERD 224	Metrology	06/29/00	12825
13	SS300e	SunSet T3 SS300e by Sunrise telecom	Sunrise telecom	NA	07373
14	HP 438	Power meter (HP)	Hewlett Packard		H-D24993770
15					
16					
17					
18					

Table 4 Test Equipment used

No. HNS-18122


Rev.

Hughes Proprietary II

Sheet 13 of 57

2.2 TEST SETUPS

This section documents the test plan, and requirements for the transmitter testing.

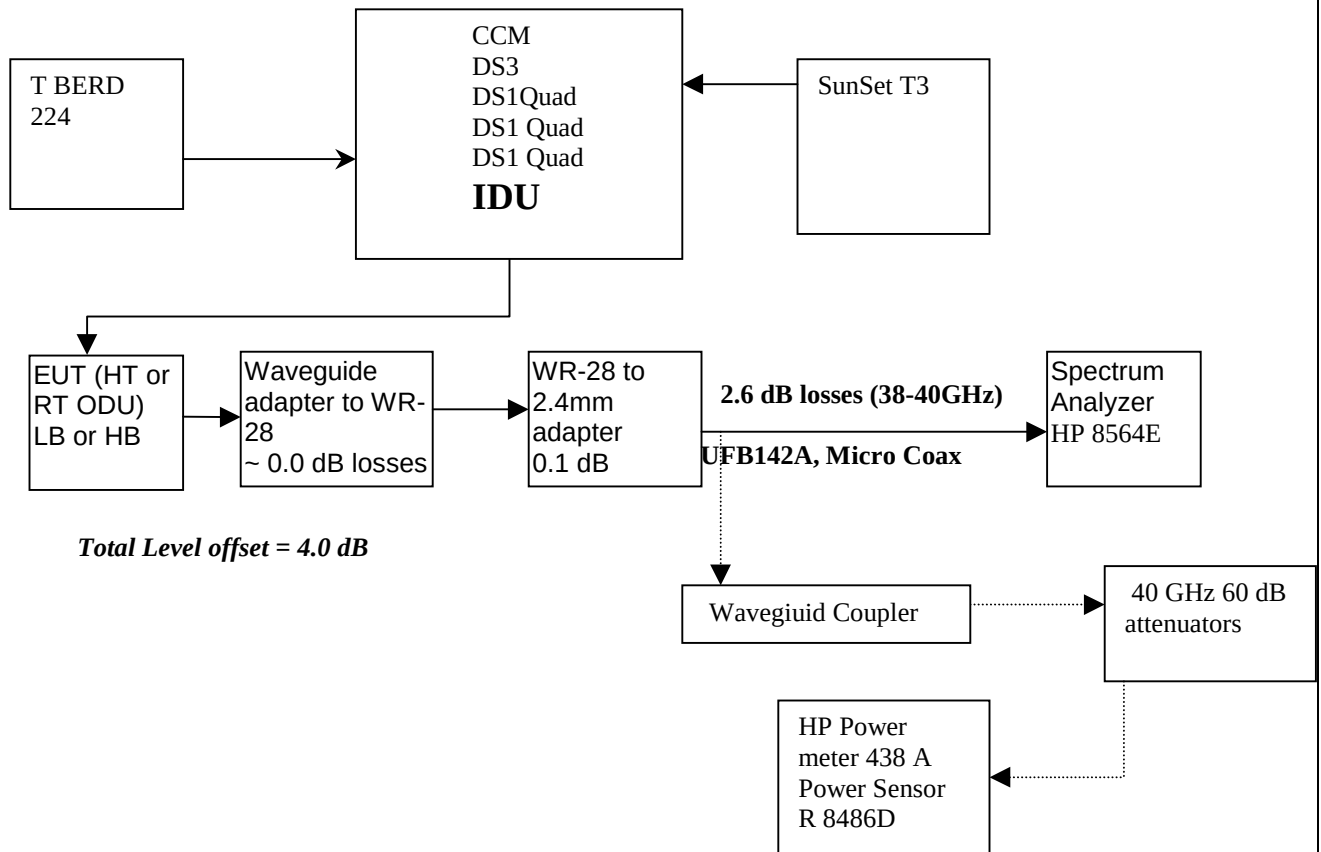

Total Spectrum Analyzer offset Level offset = 4.0 dB

0.1 dB WR 28

0.1 dB F/F 2.4mm Adapter

2.6 dB cable losses

1.2 dB is the difference in the reading between the Power meter and CW power.

Actual Measured Transmitted power = Power meter Reading + 59.8 dB (due to attenuators and waveguide coupler)

Figure 3 Transmitter Test Setup Configuration

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 14 of 57

Hughes Proprietary II

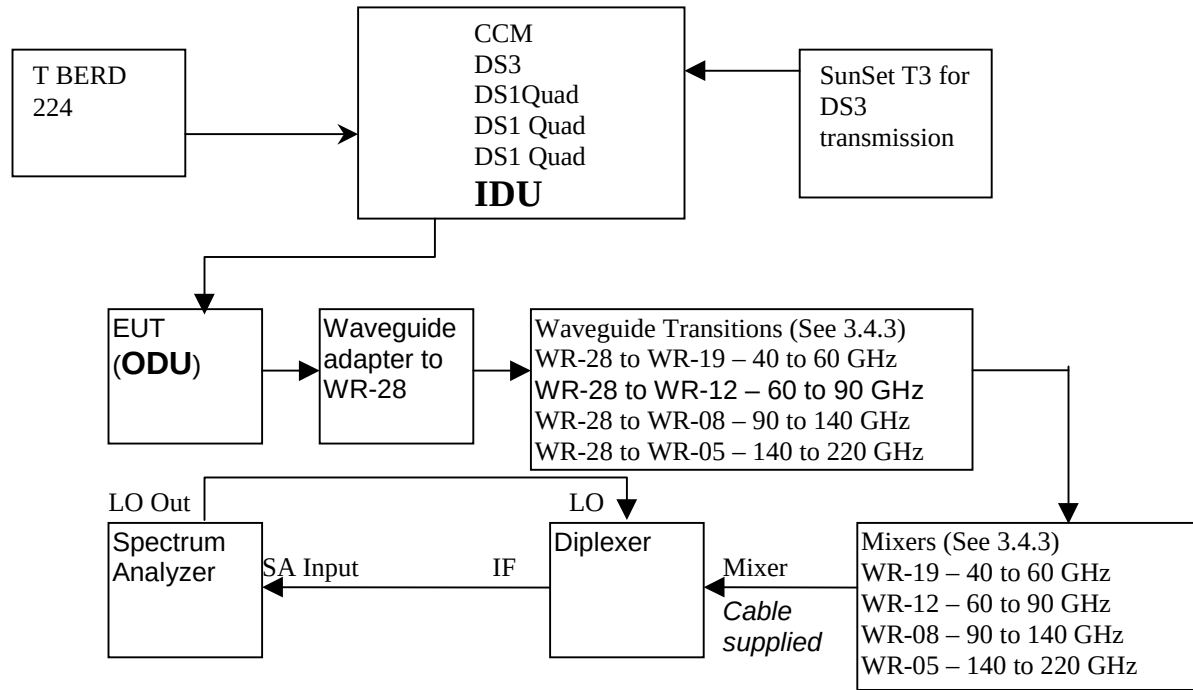


Figure 4 Transmitter Test Setup Configuration - Conducted Spurious Emissions

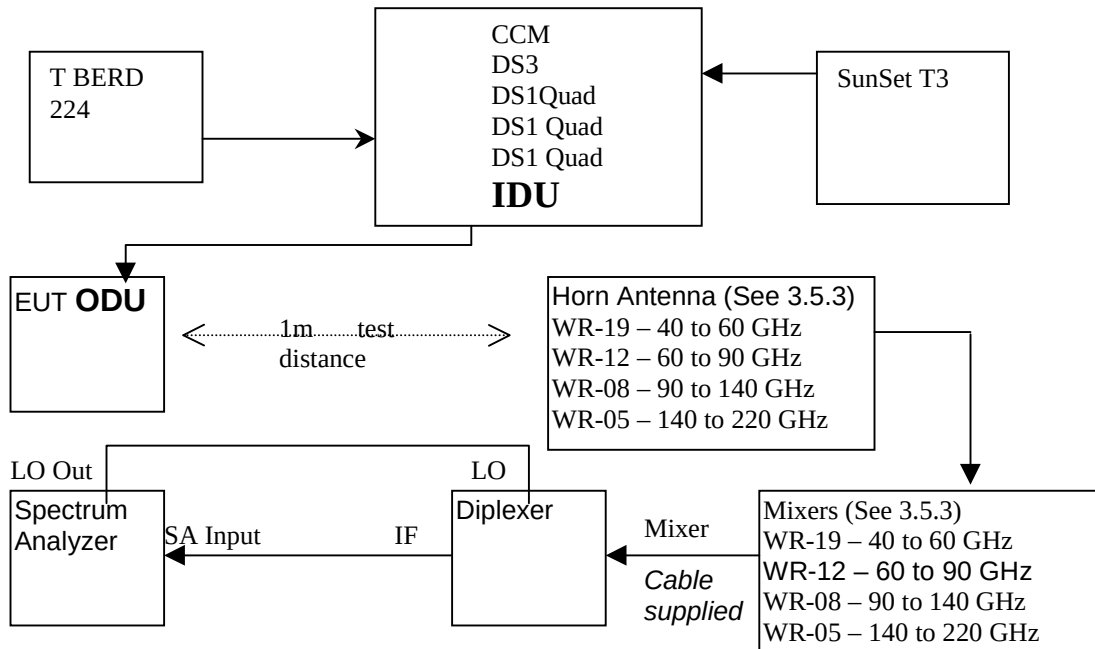


Figure 5 Transmitter Test Setup Configuration - Radiated Spurious Emissions

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 15 of 57

3.0 FCC PART 101 TESTS

3.1 THE OUTPUT POWER

This test demonstrates the maximum transmitter power level of the EUT antenna output. The maximum power transmitted will be 18.0 dBm and the minimum output power transmitted will be -12 dBm at the Antenna port. All the measurements are within ± 1 dB of tolerance. The power measurement procedure was followed over the entire test suit.

3.1.1 Performance Specifications

As per FCC CFR 47 Part 2.1046 (previously 2.985) and 101.113

EIRP Max = +55dBW after the antenna. The Subscriber Antenna has a gain of 40.5dBi.

Therefore the maximum allowable limit is dBm is

$$\text{Maximum EIRP (dBW)} = 10 \log (1\text{mw} * 10^{\text{EIRP (dBm)/10}})$$

$$55\text{dBw} = 85 \text{ dBm}$$

Maximum allowable transmitted power from the Antenna port is for the transmitting bands (:

$$\text{PTx max} = 85\text{dBm} - 40.5 \text{ dB} = 44.5 \text{ dBm} \text{ This is @ 1MHz resolution Bandwidth (RBW)}$$

To get a more accurate readings, and after consulting with the FCC, we have done all the test measurements RBW = 100 kHz and eventually dropped the limit 10 dB down to 35dBm. The transmitted power level of the ODU will be compared to that power limit.

3.1.2 Test Procedures

The equipment under test will be operated at different frequencies across the transmit frequency band (low end, center, and high end of the FCC authorized bands. The modulated carrier (TDMA signal) and CW power levels will be monitored and data plots will be obtained for each modulation type. There are 3 types of modulations (QPSK, 16-QAM, and 64-QAM). The RMS power of the Tx signal is measured using a HP power meter with a power sensor adapter that ranges up to 50 GHz. The spectral analyzer will also be used to display the modulated Tx signal in addition to the power level of the signal. Since the spectral analyzer can't give a very accurate reading in reading the power of a modulated signal, we will base our reading on the power meter reading. The reading was taken from the Power meter, and the difference between the SA reading of the CW transmitted power (1.2 dB) was taken into account by adding an offset to the reference level in the SA. Total offset level was 4 dB as described in Figure 3.

The following channels will be used according to the band tested.

No. HNS-18122	
Rev.	Sheet 16 of 57

3.1.3 Test Configuration

Please reference to Figure 2.2.1 for the test configuration used during this test.

a. Spectrum Analyzer setup:

Channel Power test was not used.

Channel spacing -(12.5 MHz)

Channel Bandwidth (12.5Mhz)

Resolution Bandwidth – 100 kHz

Video Bandwidth – 100 kHz

Amplitude Units dBm

b. Power Meter Setup

The actual RMS Tx power =The power meter reading + 58.9 dB attenuation and coupler losses

3.1.4 Test Results

LB SUB				
Modulation type				
Channel	Frequency (MHz)	QPSK	16-QAM	64-QAM
		P _{Tx} (dBm)	P _{Tx} (dBm)	P _{Tx} (dBm)
1B1	38606.25	18.5	18.5	18.3
4B3	38781.25	18.5	18.5	18.33
7B4	38943.75	18.5	18.5	18.2

Table 5 Test Results for the Output Power

Please refer to the attached plots

PASS: X Fail:

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 17 of 57

High Power level (18 dBm)

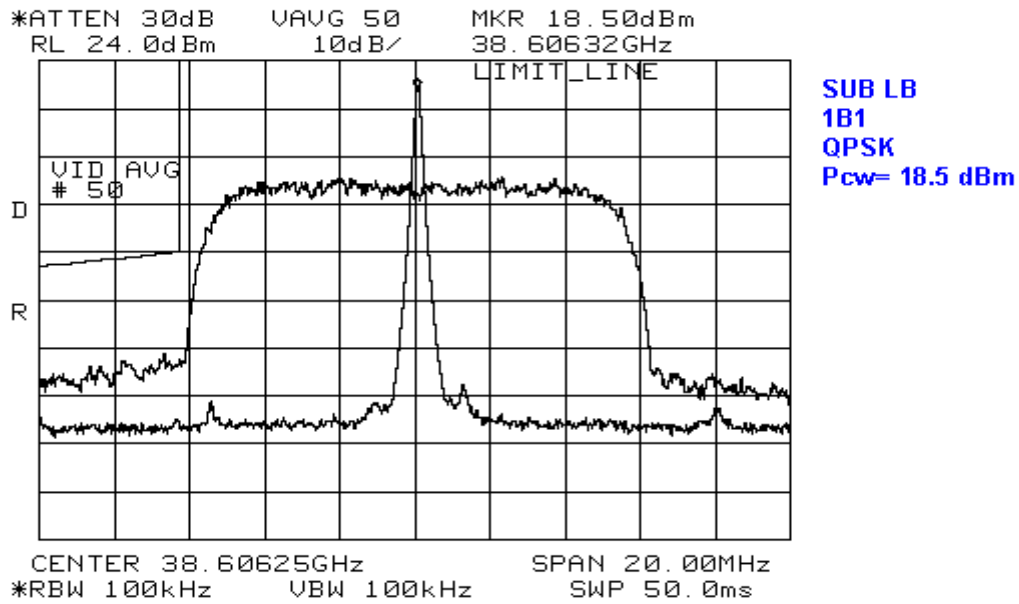


Figure 6 Output Power for QPSK modulation on ch. 1B1


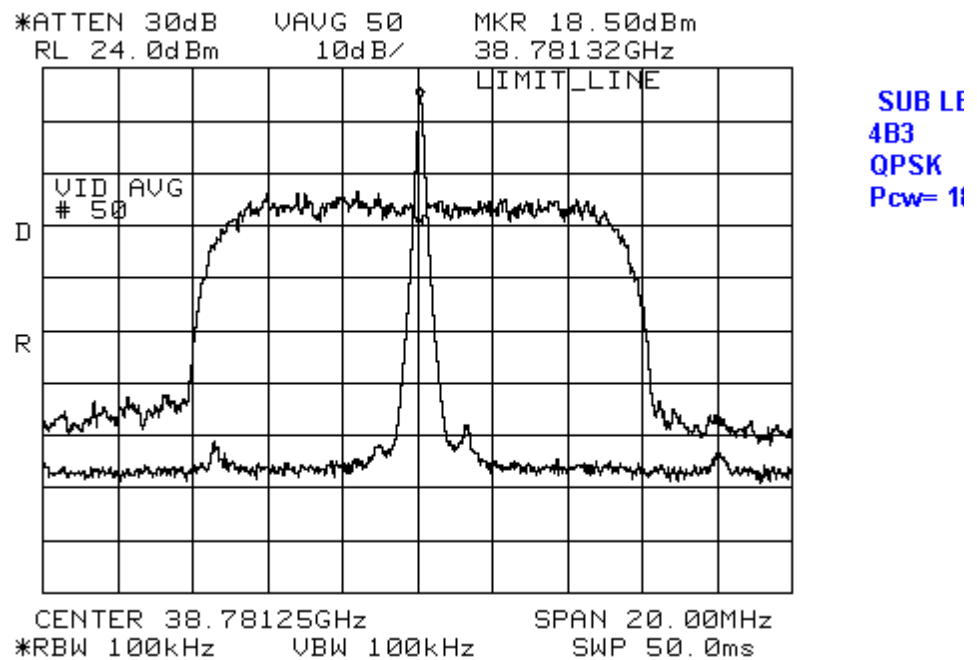


Figure 7 Output Power for QPSK modulation on ch. 4B3


No. HNS-18122

Rev.

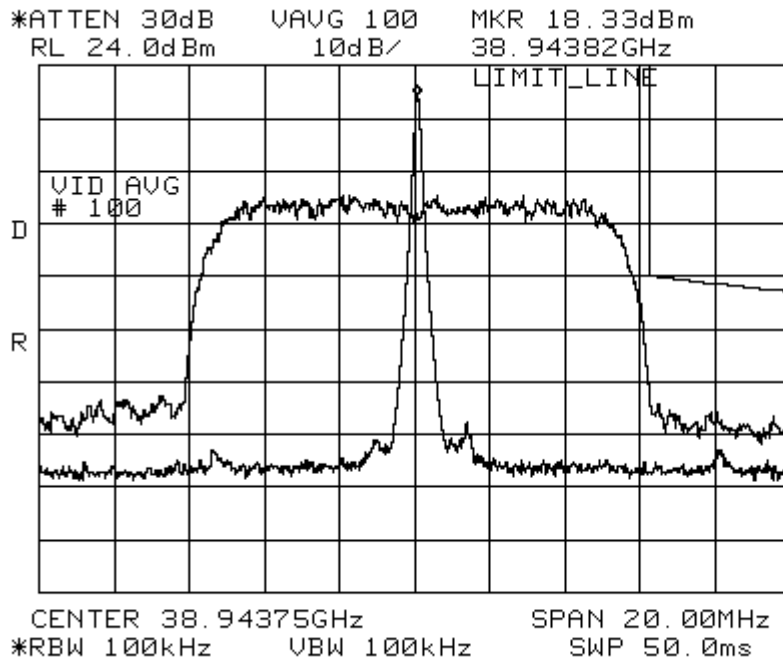

LB SUB
channel 7B4
QPSK
Pcw= 18.33 dBm

Figure 8 Output Power for QPSK modulation on ch. 7B4

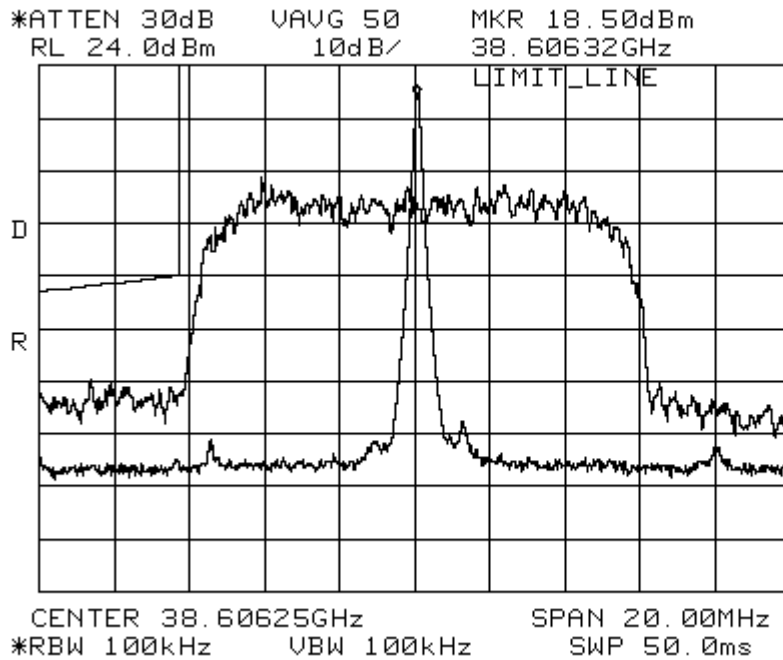


SUB LB
channel 1B1
64-QAM
Pcw= 18.5 dBm

Figure 9 Output Power for 64-QAM modulation on ch. 1B1


No. HNS-18122

Rev.

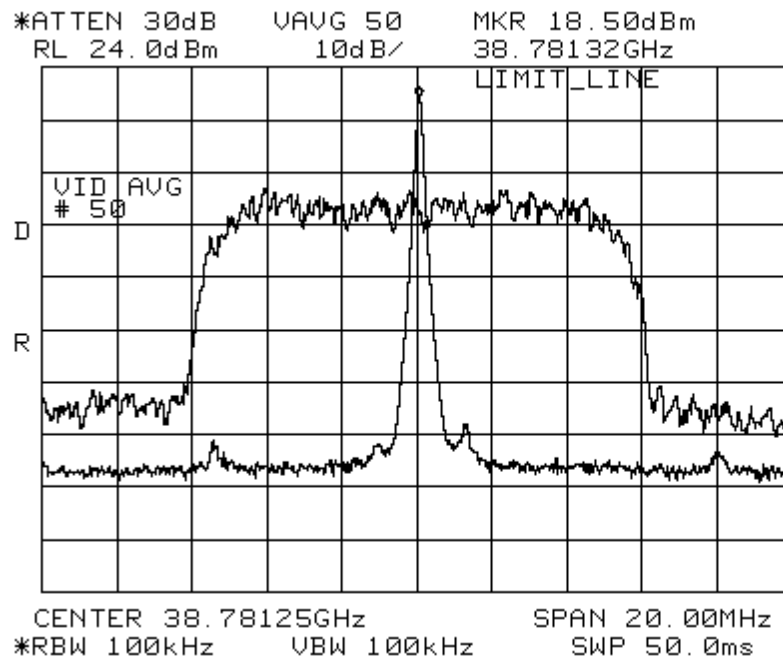

LB SUB
4B3
64-QAM
Pcw= 18.5 dBm

Figure 10 Output Power for 64-QAM modulation on ch. 4B3

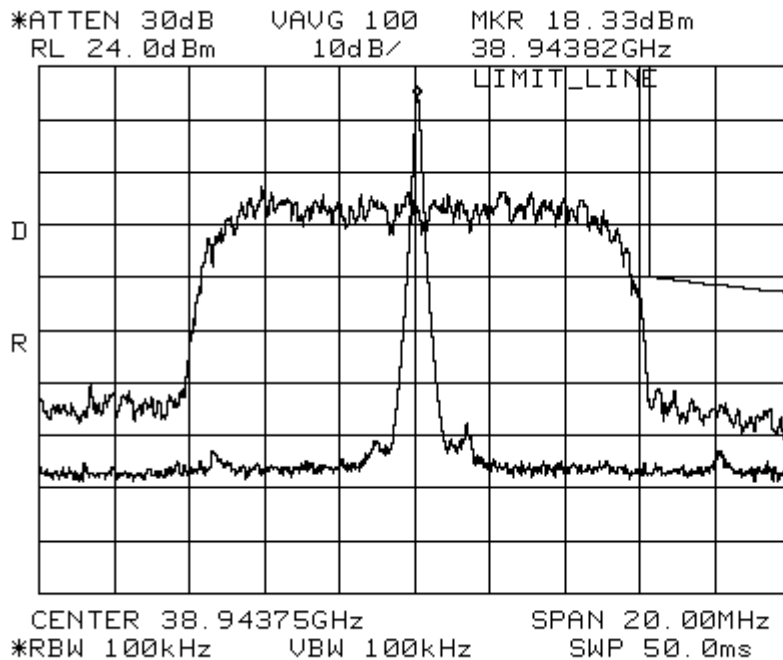


LB SUB
7B4
64-QAM
Pcw= 18.33
dBm

Figure 11 Output Power for 64-QAM modulation on ch. 7B4


No. HNS-18122

Rev.

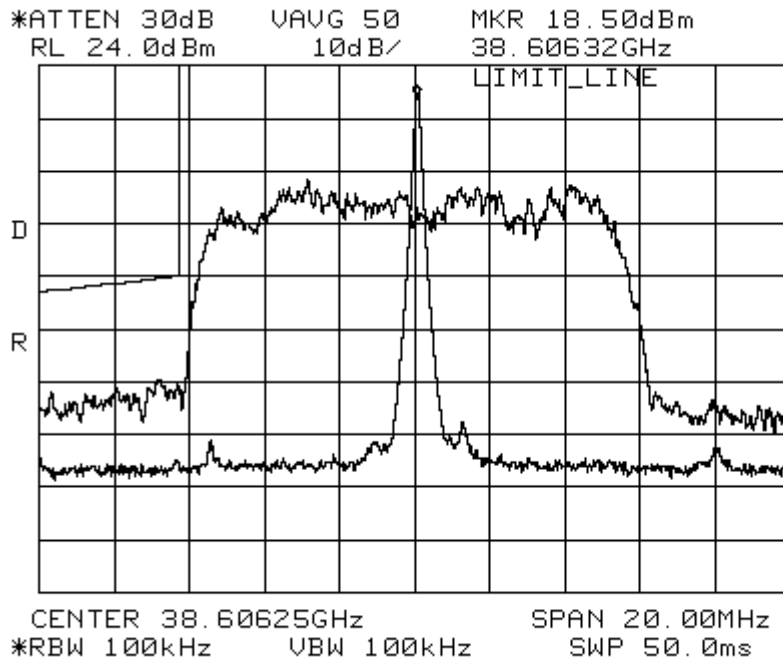

SUB LB
1B1
16- QAM
PCw= 18.5 dBm

Figure 12 Output Power for 16-QAM modulation on ch. 1B1

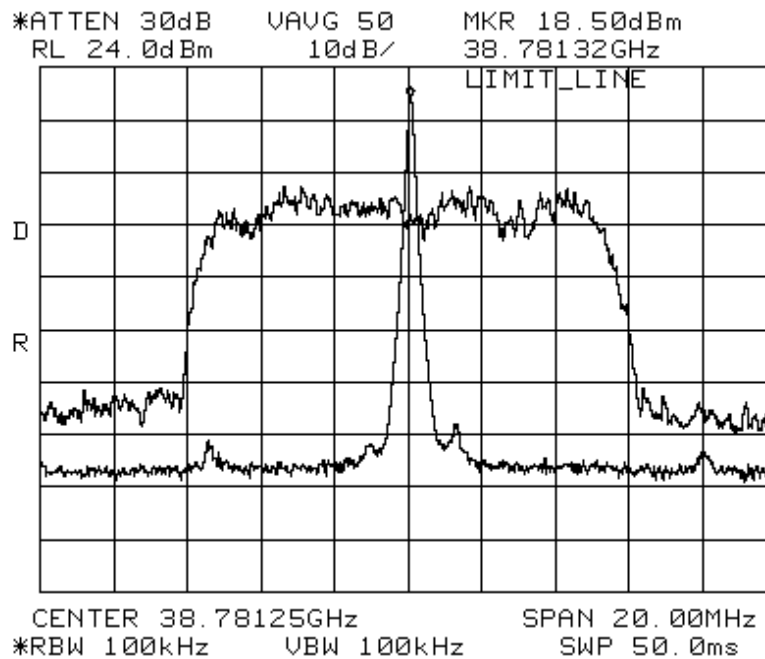

SUB LB
Channel 4B3
16- QAM
Pcw= 18.5 dBm

Figure 13 Output Power for 16-QAM modulation on ch. 4B3

No. HNS-18122

Rev.

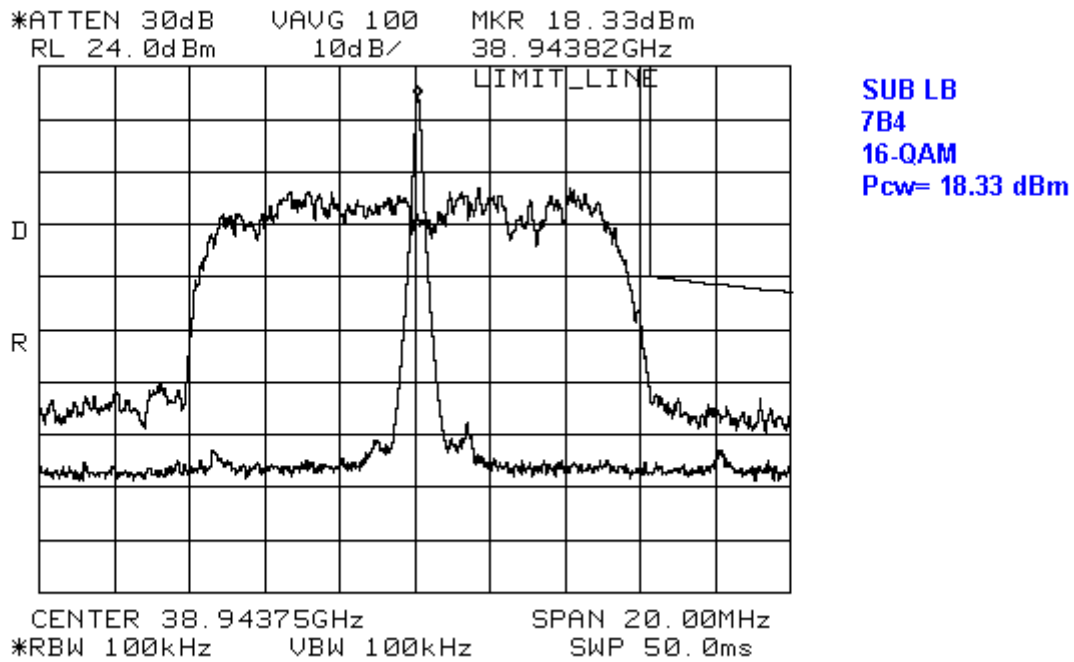


Figure 14 Output Power for 16-QAM modulation on ch. 7B4

No. HNS-18122

Rev.

3.2 OCCUPIED BANDWIDTH

This test demonstrates that occupied bandwidth of the transmitter is within the FCC 101.109 requirements.

3.2.1 Performance Specifications

As per FCC CFR 47 Part 2.1050 (previously 2.989) and 101.109

Maximum authorized bandwidth 50MHz. Unwanted emissions must be suppressed at the aggregate channel block edges based on the same roll-off rate as specified for a single channel block in 101.111 (a) (ii) and (iii).

(a) (2)(ii) In 1 MHz Band: 50% to 250%: $A = 11 + 0.4(P - 50) + 10\log(B)$ or no less than 11dB down but no more than 56dB down is required

Where: A = Attenuation in dB below mean output power level

P = percent removed from center frequency

B = Authorized bandwidth in MHz

Example calculation:

Since the authorized bandwidth is 50MHz,

At 50 % for the authorized bandwidth (f=38600, 389500 MHz)

: $A = 11 + 0.4(50 - 50) + 10\log(50) = 27.9 \sim 28\text{dB}$ down from the maximum transmitted power

The Maximum power is 18 dBm when 1 MHz RBW is used,

@ 100 kHz, the levels 18 - 10 dB = 8 dBm

Therefore the limit @ f = 38600 MHz and 39500 MHz should be 8dBm - 28 dB = -20 dBm

At 125 %: $A = 11 + 0.4(125 - 50) + 10\log(50) = 58\text{ dB}$ or 56 whichever is lower

Therefore the limit will be 8dBm - 56 = -48 dBm

(a)(2)(iii) In 4kHz band >250% at least $43 + 10\log(\text{output power in Watts})$ or 80dB

Example calculation:

If your power were = 18 dBm = 63.09 mW

250% and out: $A = 43 + 10\log(0.06309) = -30.9\text{dB}$ down from the 18 dBm

Therefore limit = - 13 dBm

3.2.2 Test Procedures

The equipment under test will be operated at different frequencies across the transmit frequency band (low end, center, and high end). The modulated carrier will be examined and the occupied bandwidth will be viewed for compliance.

Test Frequencies	
Channel	Frequency MHz
1-A	38600-38650
1-B	39300-39350

Table 6 Occupied Bandwidth Test Frequencies

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 23 of 57

3.2.3 Test Configuration

Please reference to Figure 3 for the test configuration used during this test.

The test limit has been determined as shown in the following figure. The mask is based on 100kHz Resolution Bandwidth. According to the FCC, the maximum allowable power is 34.5dBm. However, the maximum output transmit power is 18dBm.

50 % points = 38600 MHz, 38950MHz, allowable level = -20dBm

From 50% to 250% points = based on the given equation, limited to -48dBm. This point is reached at about 120% points.

250% points = 39500 MHz, 39050 MHz., allowable level = -48dBm

250% and beyond, allowable level = -13dBm.

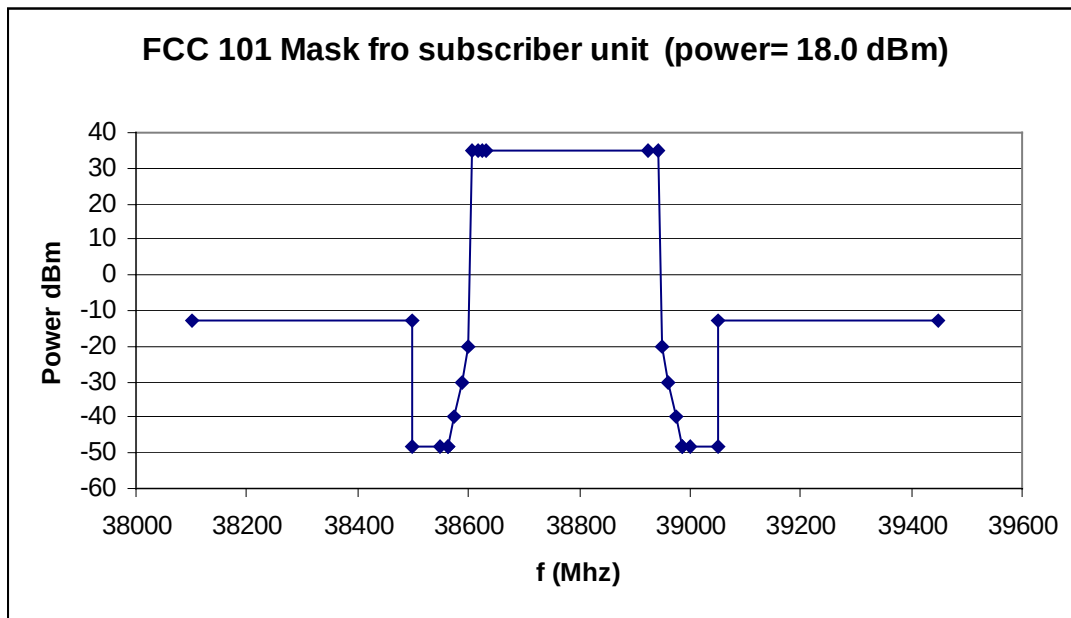


Figure 15 FCC Mask for the HUB

Spectrum Analyzer Setup:

Occupied bandwidth test

Resolution Bandwidth 100 kHz

Video Bandwidth=100 kHz

3.2.4 Test Results

The test for occupied bandwidth is identical to the conducted emission testing, please refer to the following section for the results


PASS: ☒ Fail: ☐

No. HNS-18122

Rev.


Hughes Proprietary II

Sheet 24 of 57

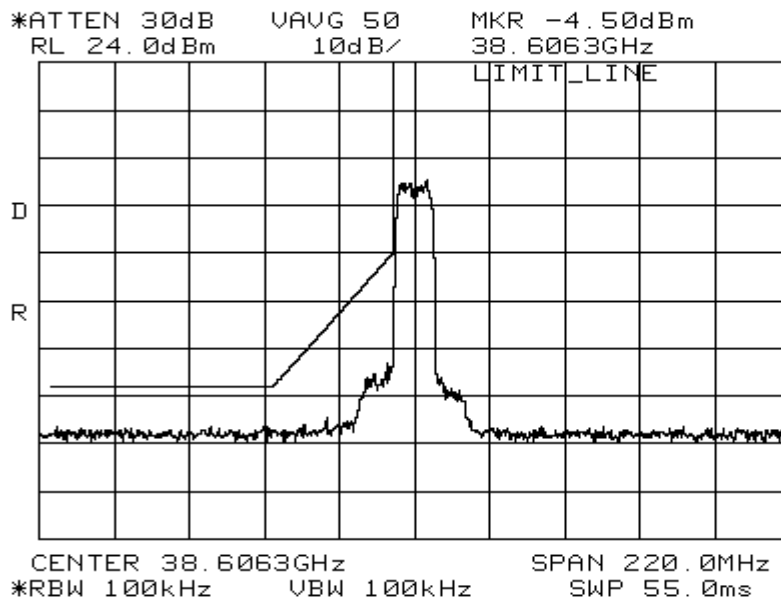

SUB LB
1B1
QPSK
Pcw= 18.5

Figure 16 Bandwidth for QPSK modulated signal on channel 1B1

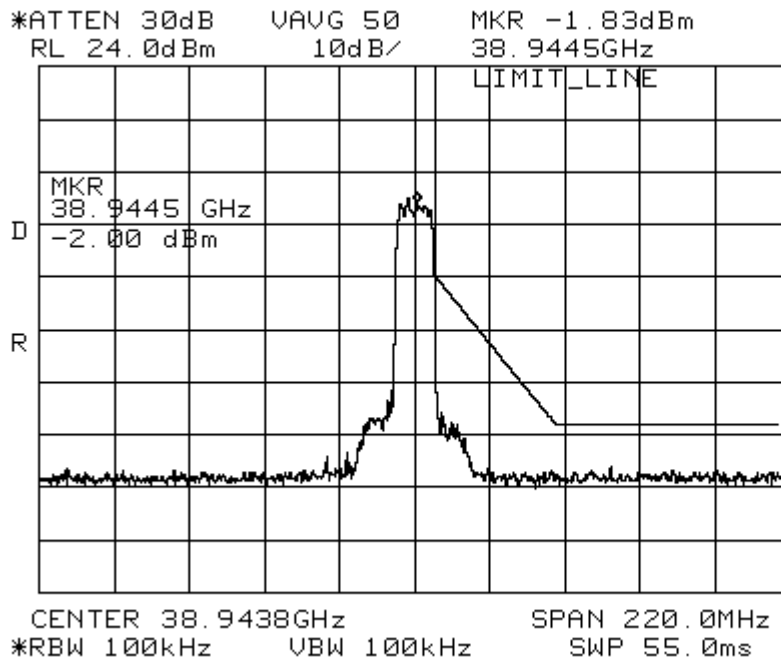

SUB LB
Channel 7B4
QPSK
Pcw= 18.33
dBm

Figure 17 Bandwidth for QPSK modulated signal on channel 7B4

No. HNS-18122

Rev.

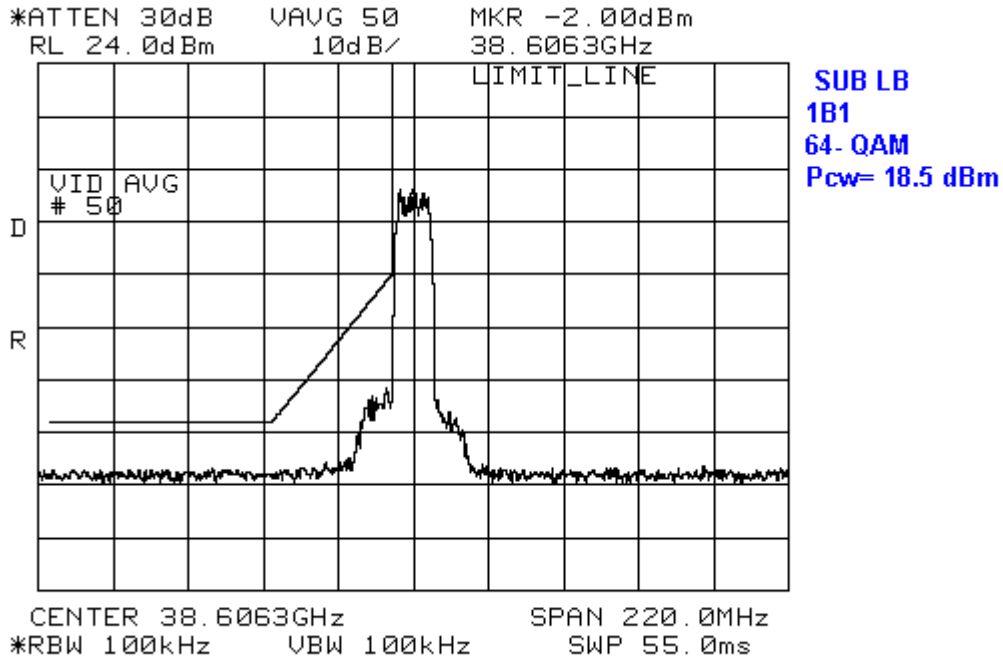


Figure 18 Bandwidth for 64-QAM modulated signal on channel 1B1

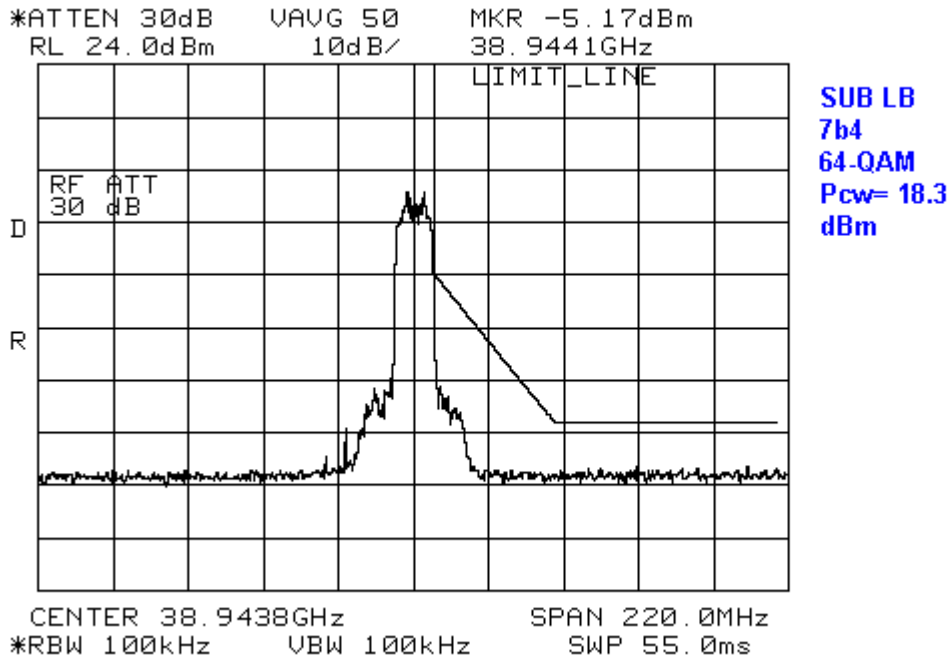


Figure 19 Bandwidth for 64-QAM modulated signal on channel 7B4

No. HNS-18122

Rev.

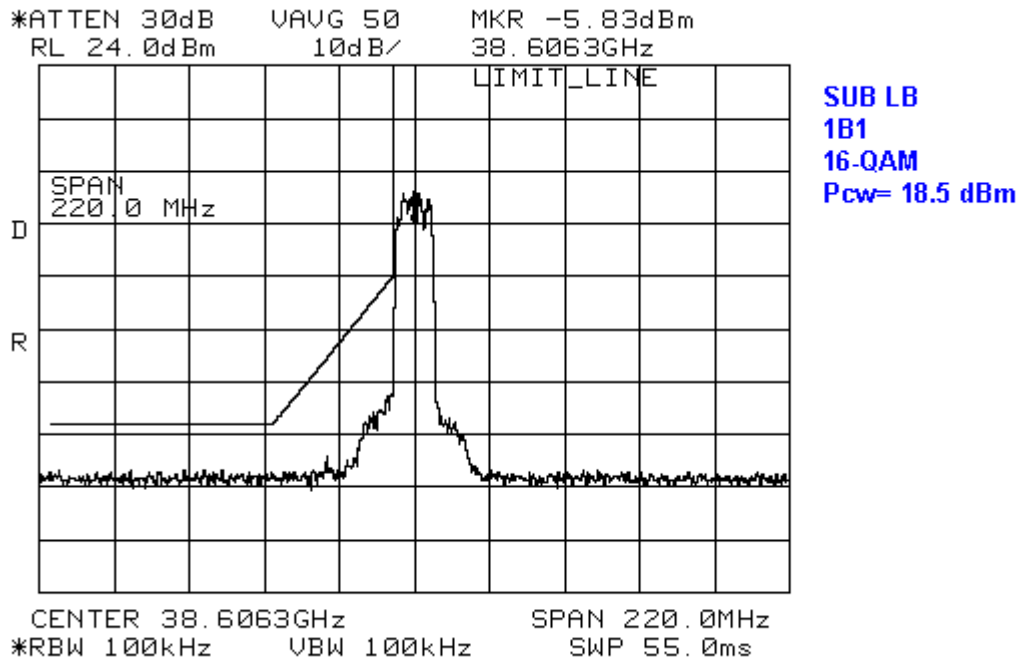


Figure 20 Bandwidth for 16-QAM modulated signal on channel 1B1

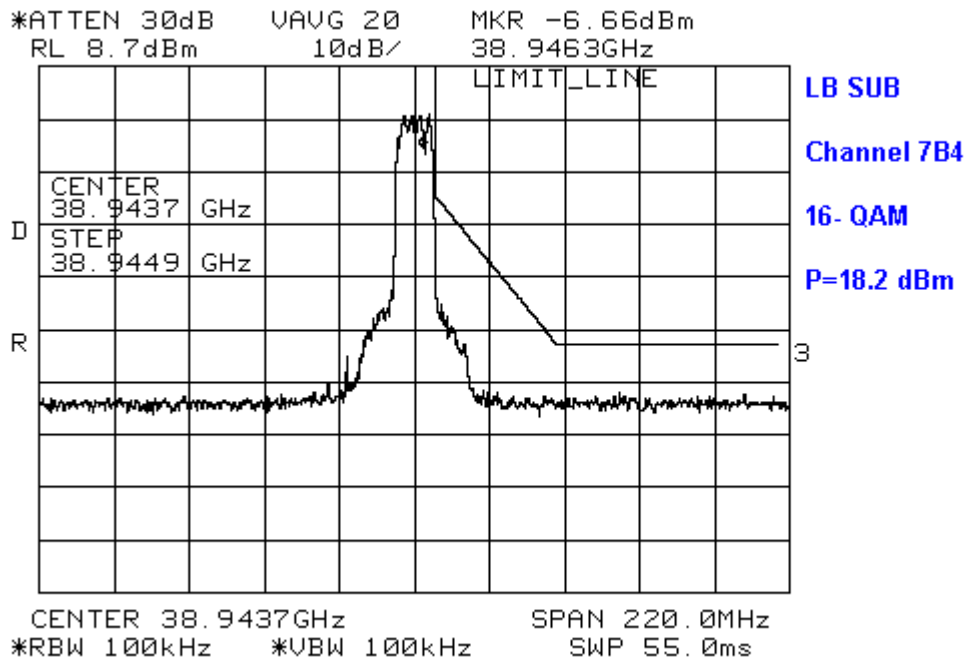


Figure 21 Bandwidth for 16-QAM modulated signal on channel 7B4

No. HNS-18122

Rev.

3.3 CONDUCTED SPURIOUS EMISSIONS FROM THE TRANSMITTER

These tests demonstrate the spurious emission levels, which are produced by EUT at the antenna terminals. The tests for the conducted emissions document the spurious levels conducted from the transmit filter output port (antenna connector), which connects to the transmit antenna.

3.3.1 Performance Specifications

As per FCC CFR 47 Part 2.1050 (previously 2.989) and 101.109

Maximum authorized bandwidth 50MHz. Unwanted emissions must be suppressed at the aggregate channel block edges based on the same roll-off rate as specified for a single channel block in 101.111 (a) (ii) and (iii).

(a)(2)(ii) In 1 MHz Band: 50 % to 250 %: $A = 11 + 0.4(P - 50) + 10\log(B)$ or no less than 11dB down but no more than 56dB down is required

Where: A = Attenuation in dB below mean output power level

P = percent removed from center frequency

B = Authorized bandwidth in MHz

Example calculation:

Since the authorized bandwidth is 50MHz,

At 50 % for the authorized bandwidth ($f = 38600, 389500$ MHz)

: $A = 11 + 0.4(50 - 50) + 10\log(50) = 27.9 \sim 28\text{dB}$ down from the maximum transmitted power

The Maximum power is 18 dBm when 1MHz RBW is used,

@ 100 kHz, the levels 18 -10 dB = 8 dBm

Therefore The limit @ $f = 38600$ MHz and 39500 MHz should be 8dBm- 28 dB = -20 dBm

At 125%: $A = 11 + 0.4(125 - 50) + 10\log(50) = 58\text{dB}$ or 56 whichever is lower

Therefore the limit will be 8dBm- 56 = -48 dBm

(a)(2)(iii) In 4kHz band >250% at least $43 + 10\log(\text{output power in Watts})$ or 80dB

Example calculation:

If your power were = 18 dBm = 63.09 mW

250% and out: $A = 43 + 10\log(0.06309) = -30.9\text{dB}$ down from the 18 dBm

Therefore limit = - 13 dBm

Note: 4 kHz Bandwidth will be difficult to use. You may adjust the limit accordingly. If it passes and the higher Bandwidth, it will certainly pass at 4 kHz

3.3.2 Test Procedures

The EUT will be initialized in the transmit mode. The transmit output will be connected to the spectrum analyzer. Spurious emissions measurements will be done in the frequency bands detailed above.

The equipment under test will be operated at different frequencies across the transmit frequency band (low end, center, and high end). The entire frequency spectrum from as low as possible to 200 GHz shall be investigated and any spur or emission shall be documented.

Test Frequencies	
Channel	Frequency MHz
1-B1	38606.25
7B4	38943.75

Table 7 Conducted Spurious Emissions Test Frequencies

No. HNS-18122

Rev.

Sheet 28 of 57

3.3.3 Test Configuration

Refer to Fig. 4 for the Basic Test configuration.

Transitions and waveguide adapters will need to be used to connect the EUT transmit port to the various harmonic mixers. The mixers along with a Diplexer will be used to connect the signal to the spectrum analyzer and mix it down to a frequency range that can be measured. This must be done since the analyzer used only goes to 40 GHz and signals must be measured up to 200 GHz. Please refer to the documentation supplied with the mixers for instructions on how to make measurements. Also note that any measurements made over 40 GHz will not be calibrated, they will only be referenced upon the factors supplied by the mixer manufacturer. There are no NIST traceable measurements above 75GHz(they may be up to 97GHz now). Therefore, we must use engineering judgment when taking these measurements. Care must be taken to not overload the mixers. Also care must be taken when connecting and disconnecting the waveguide pieces.

The following connections will need to be made:

EUT has WR-28

Adapter	Cable	Frequency Range
WR-28 to 2.4mm connector	Low loss to 40 GHz	0 to 40 GHz
Transition	Mixer	Frequency Range
WR-28 to WR-19	WR-19	40 to 60 GHz
WR-28 to WR-12	WR-12	60 to 90 GHz
WR-28 to WR-08	WR-08	90 to 140 GHz
WR-28 to WR-05	WR-05	140 to 220 GHz

3.3.4 Tests Results

PASS: X Fail:

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 29 of 57

3.3.4.1 High Power (18 dBm) channel 1B1

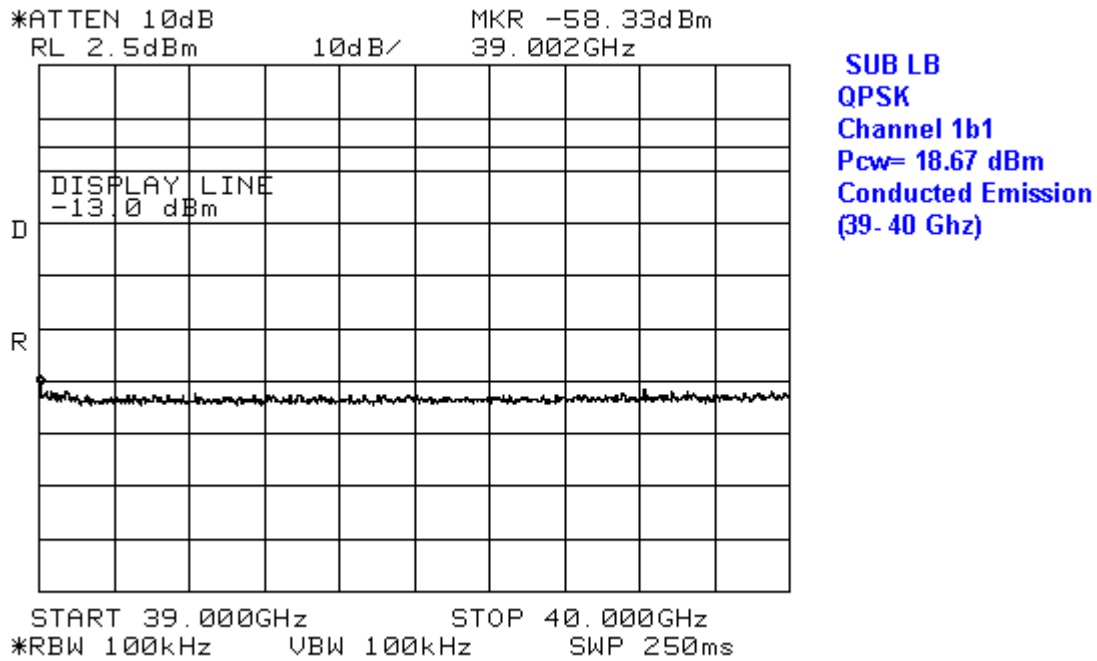


Figure 22 Conducted Emissions in 0 – 40 GHz, for transmitting 18 dBm on channel 1B1


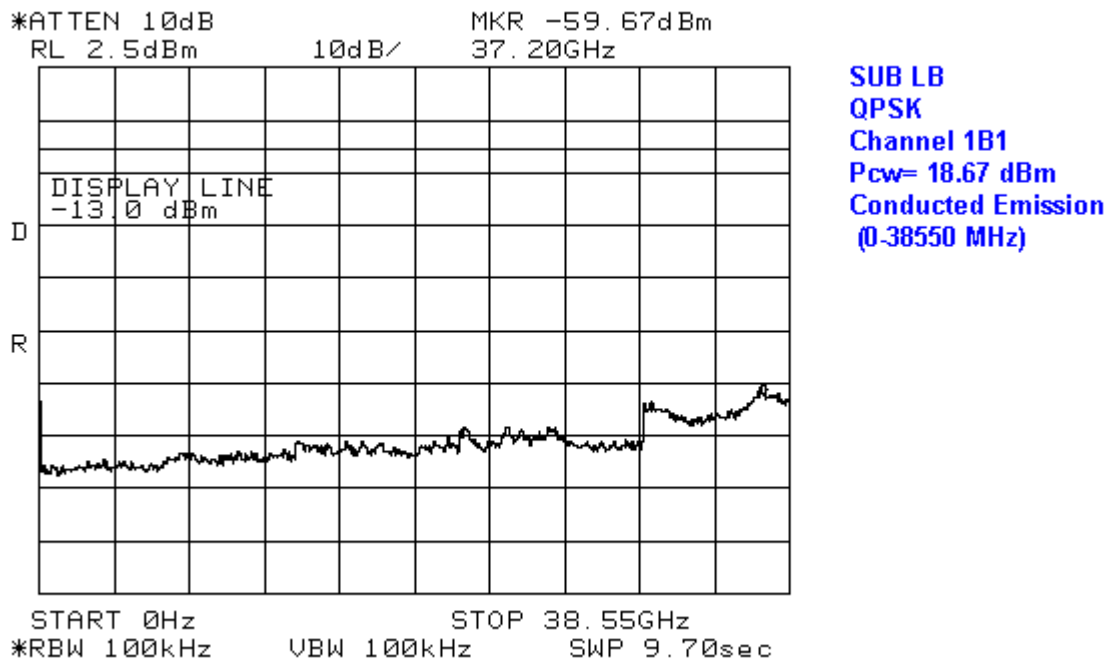


Figure 23 Conducted Emissions in 0 – 38.55 GHz, for transmitting 18 dBm on channel 1B1


No. HNS-18122

Rev.

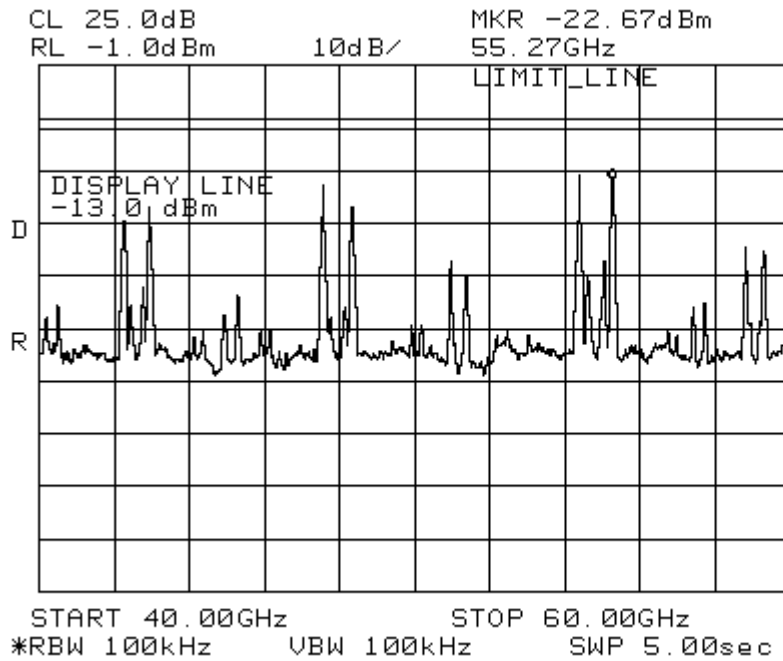

SUB LB
QPSK Modulated
Pcw= 18.33 dBm
Channel 1b1
Max and hold
enabled

Figure 24 Conducted Emissions in 40 - 60 GHz, for transmitting 18 dBm on channel 1B1

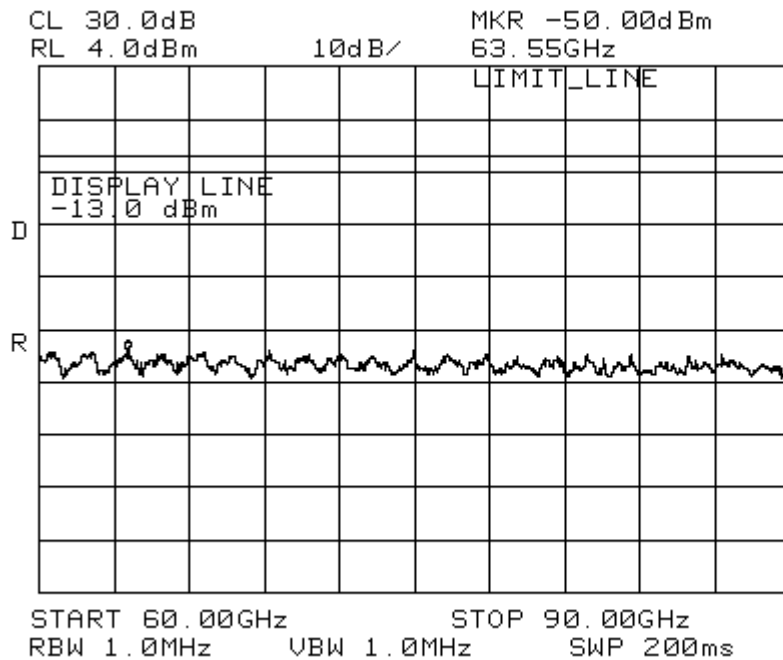

SUB LB
QPSK
Channel 1b1
Pcw= 18.1 dBm
60.90 Ghz

Figure 25 Conducted Emissions in 60 - 90 GHz, for transmitting 18 dBm on channel 1B1

No. HNS-18122

Rev.

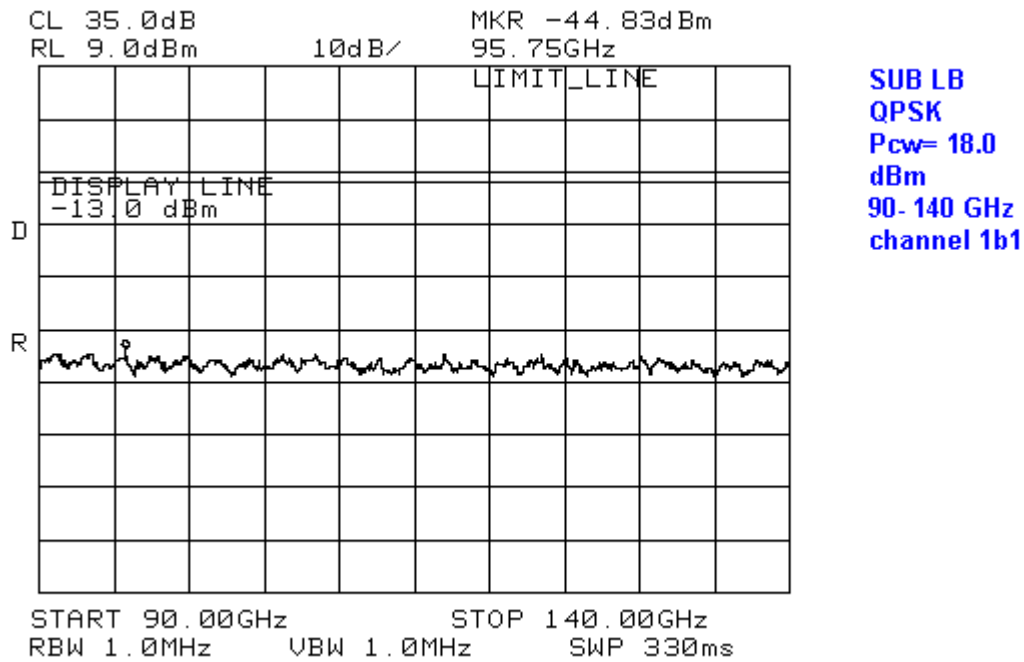


Figure 26 Conducted Emissions in 90 – 140 GHz, for transmitting 18 dBm on channel 1B1


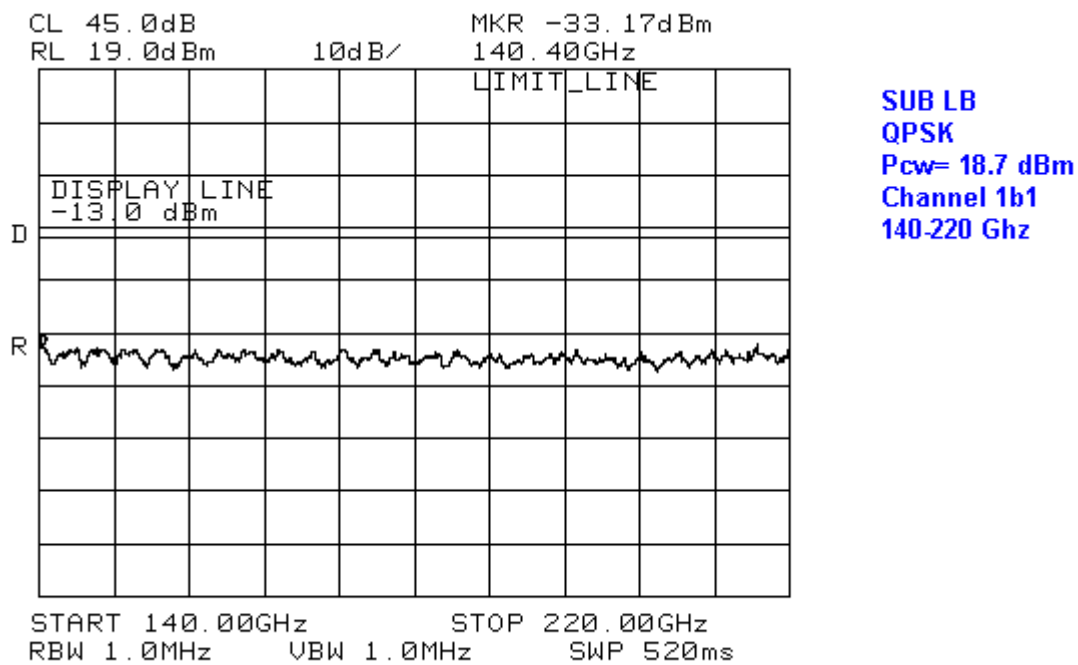


Figure 27 Conducted Emissions in 140 – 200 GHz, for transmitting 18 dBm on channel 1B1

No. HNS-18122


Rev.

3.3.4.2 High Power (18 dBm) , channel 7B4

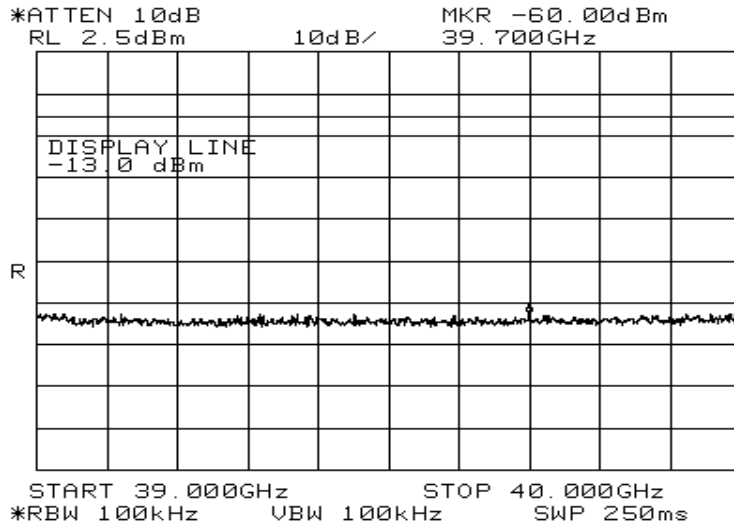

SUB LB
QPSK
Channel 7B4
Pcw= 18.67 dBm
Conducted
Emission testing
(39000-40000
Mhz)

Figure 28 Conducted Emissions in 39 – 40 GHz, for transmitting 18 dBm on channel 7B4

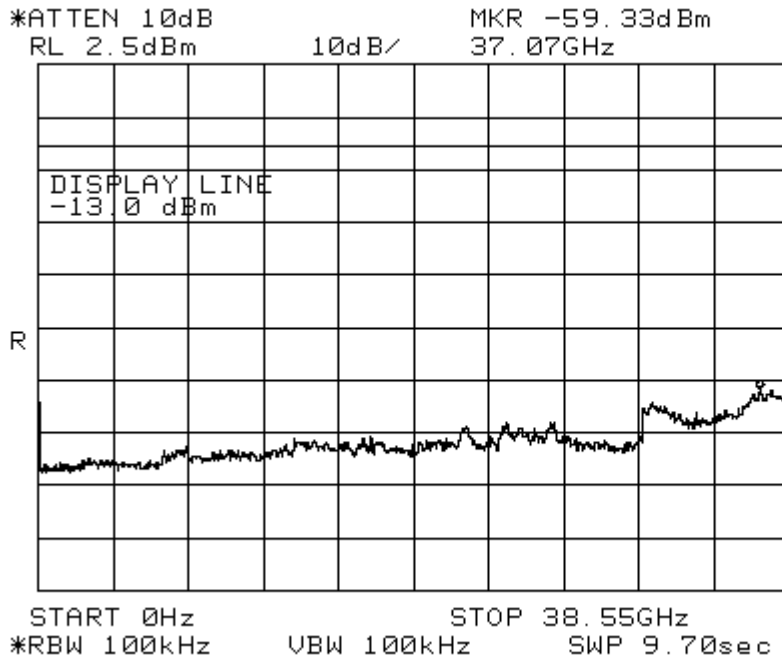

SUB LB
QPSK
Channel 7B4
Pcw= 18.67 dBm
(0Hz-38550 GHz)
Conducted emission

Figure 29 Conducted Emissions in 0 – 38.55 GHz, for transmitting 18 dBm on channel 7B4

No. HNS-18122

Rev.

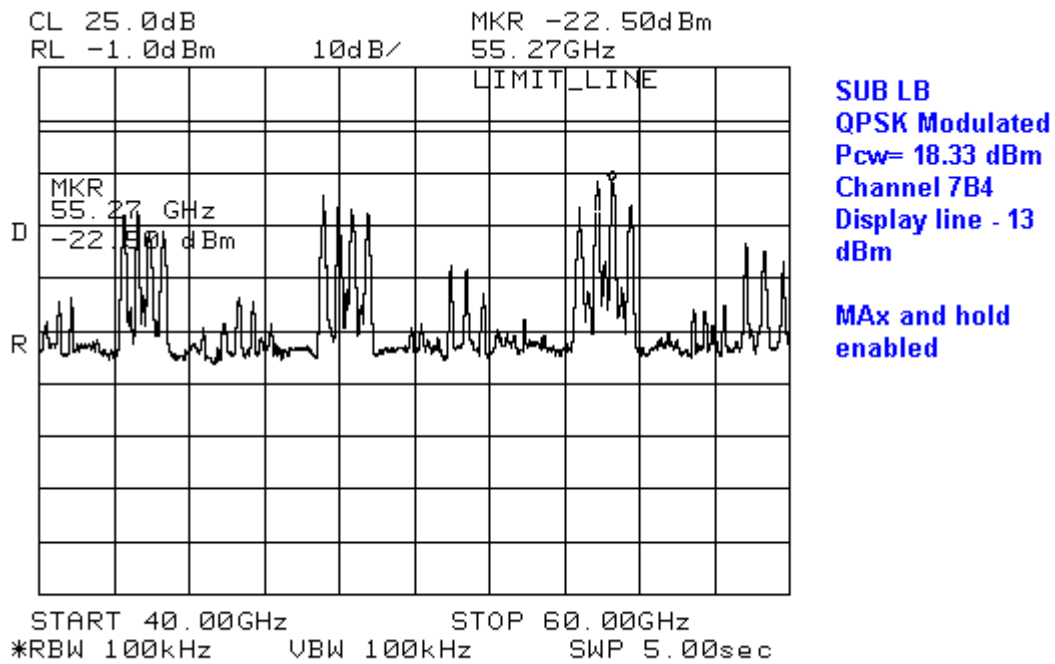


Figure 30 Conducted Emissions in 40 – 60 GHz, for transmitting 18 dBm on channel 7B4

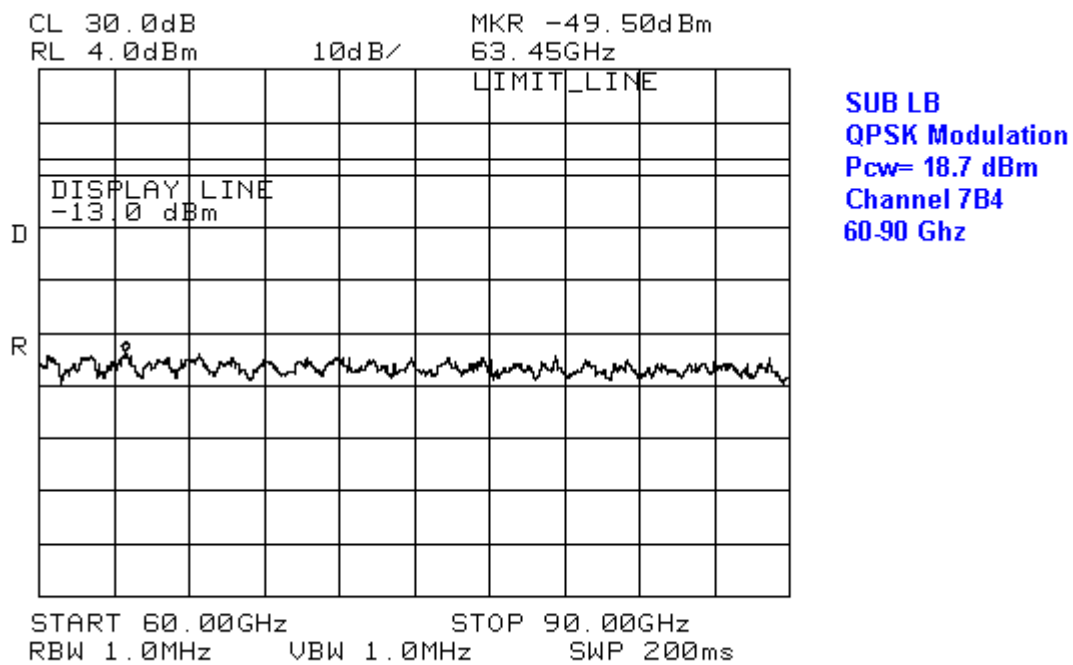


Figure 31 Conducted Emissions in 60 – 90 GHz, for transmitting 18 dBm on channel 7B4

No. HNS-18122

Rev.

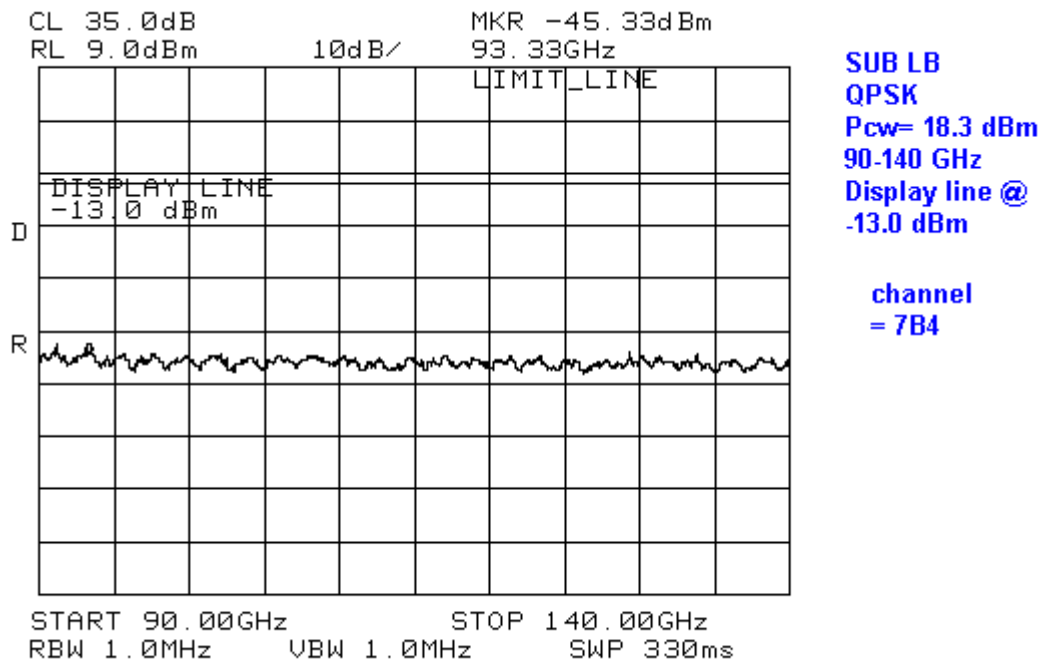


Figure 32 Conducted Emissions in 90 – 140 GHz, for transmitting 18 dBm on channel 7B4

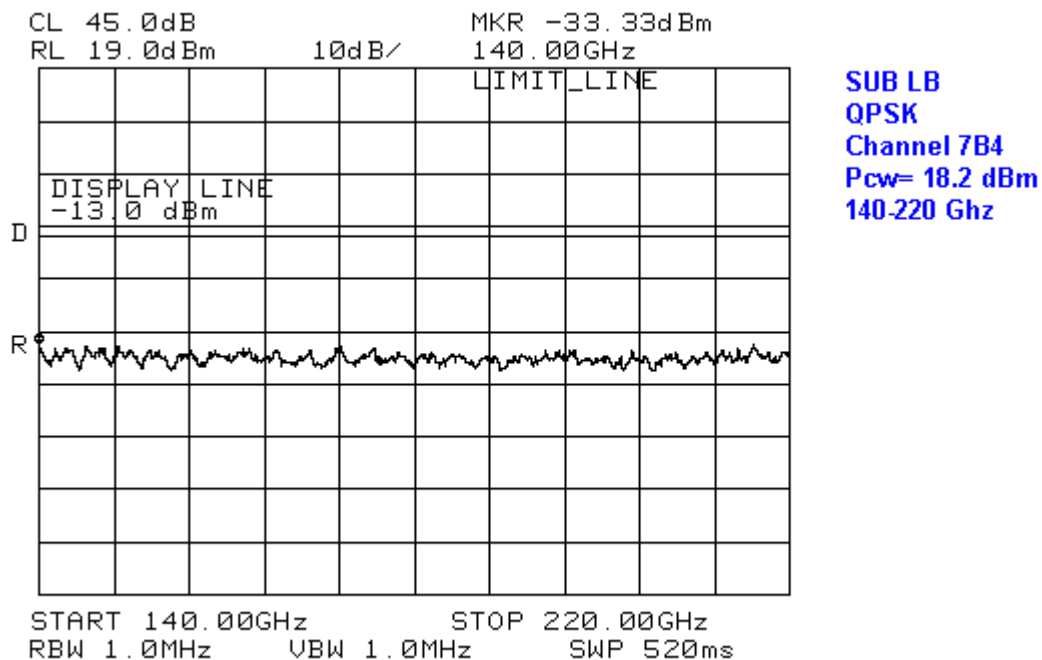


Figure 33 Conducted Emissions in 140 – 220 GHz, for transmitting 18 dBm on channel 7B4

No. HNS-18122

Rev.

3.3.4.3 Low power (-12 dBm) channel 1B1

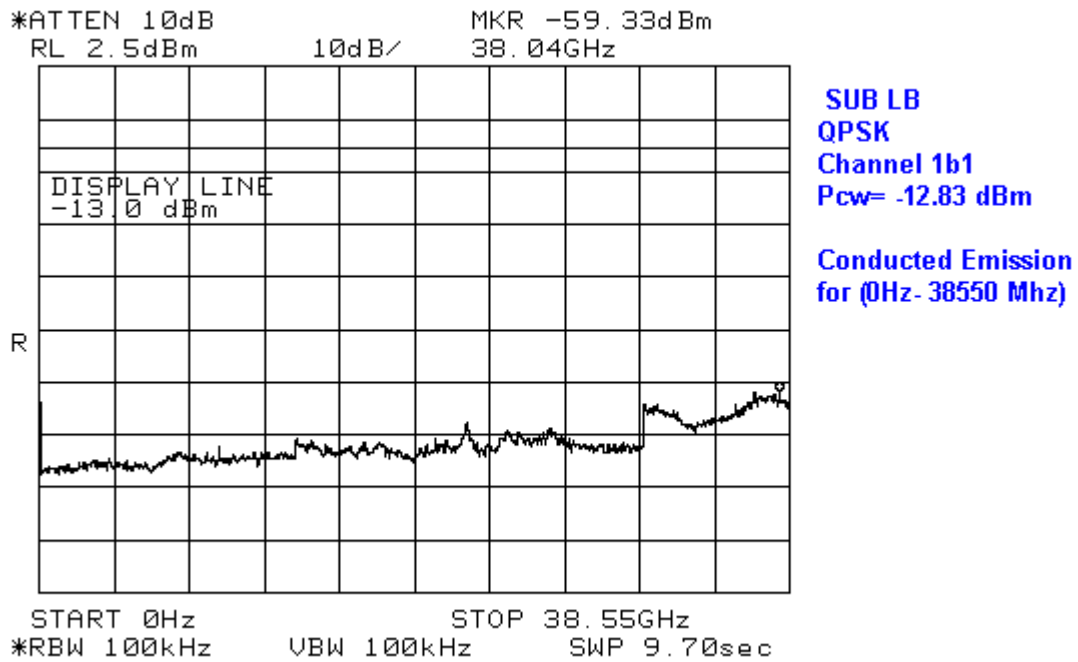


Figure 34 Conducted Emissions in 0 – 38.55 GHz, for transmitting -12 dBm on channel 1B1

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 36 of 57

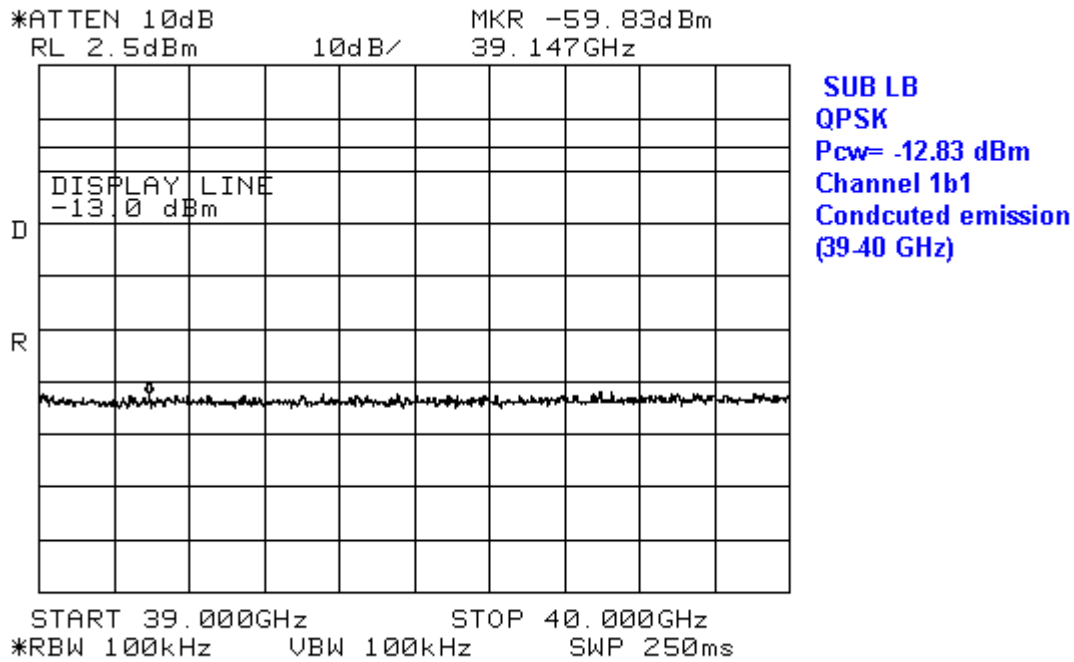


Figure 35 Conducted Emissions in 39 – 40 GHz, for transmitting -12 dBm on channel 1B1

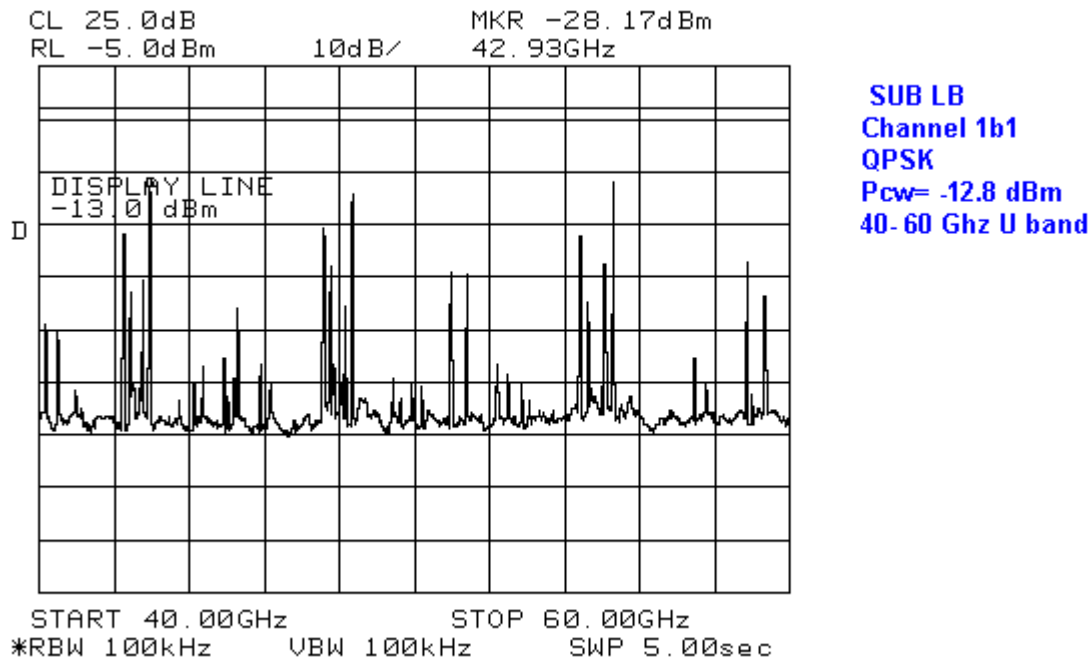


Figure 36 Conducted Emissions in 40 – 60 GHz, for transmitting -12 dBm on channel 1B1

No. HNS-18122

Rev.

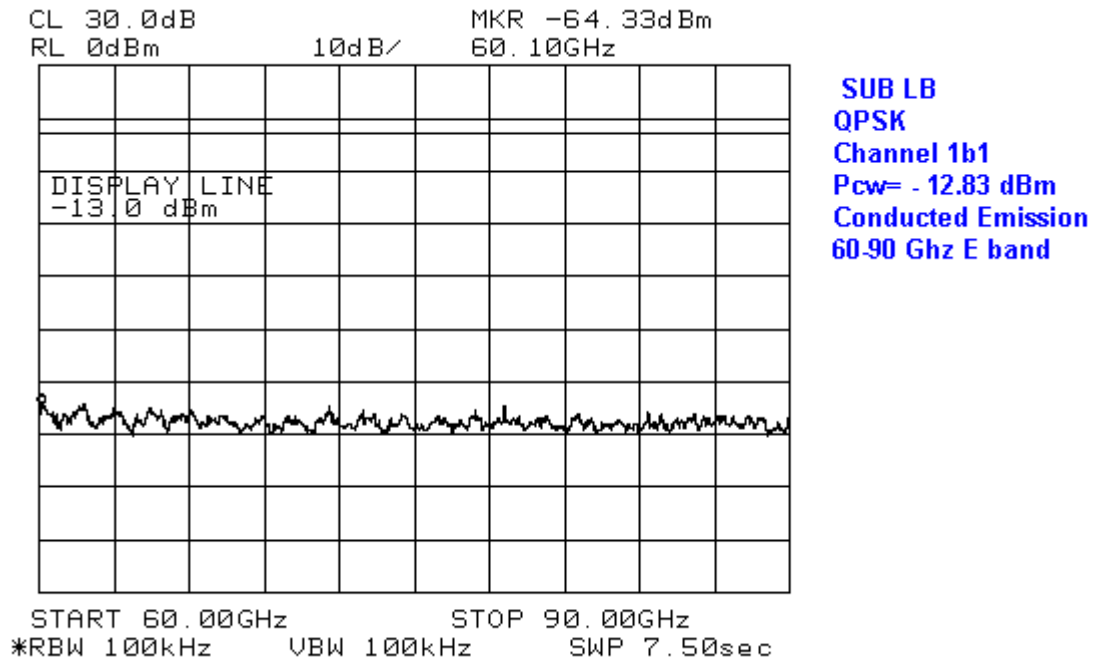


Figure 37 Conducted Emissions in 60 – 90 GHz, for transmitting -12 dBm on channel 1B1

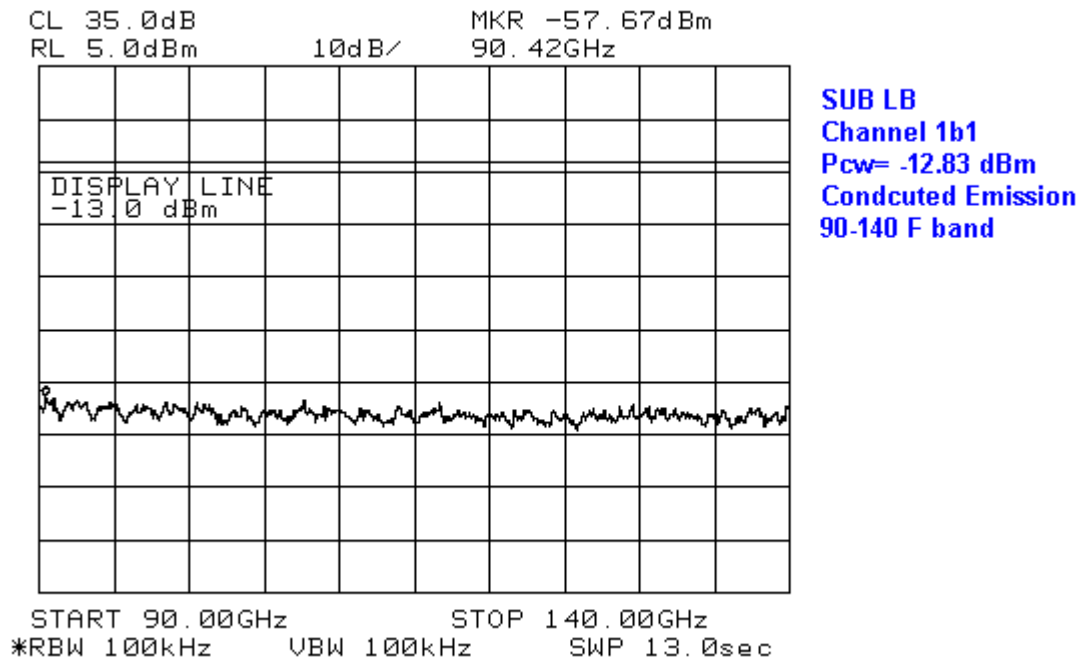


Figure 38 Conducted Emissions in 90 – 140 GHz, for transmitting -12 dBm on channel 1B1

No. HNS-18122

Rev.

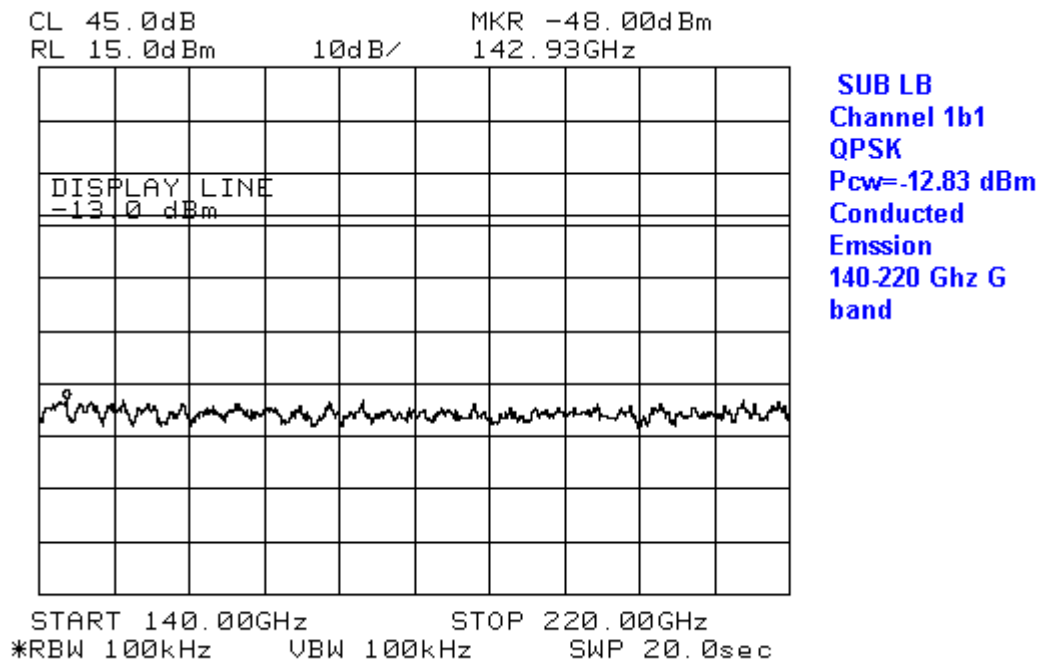


Figure 39 Conducted Emissions in 140 – 220 GHz, for transmitting -12 dBm on channel 1B1

3.3.4.4 Low Power (-12 dBm), channel 7B4

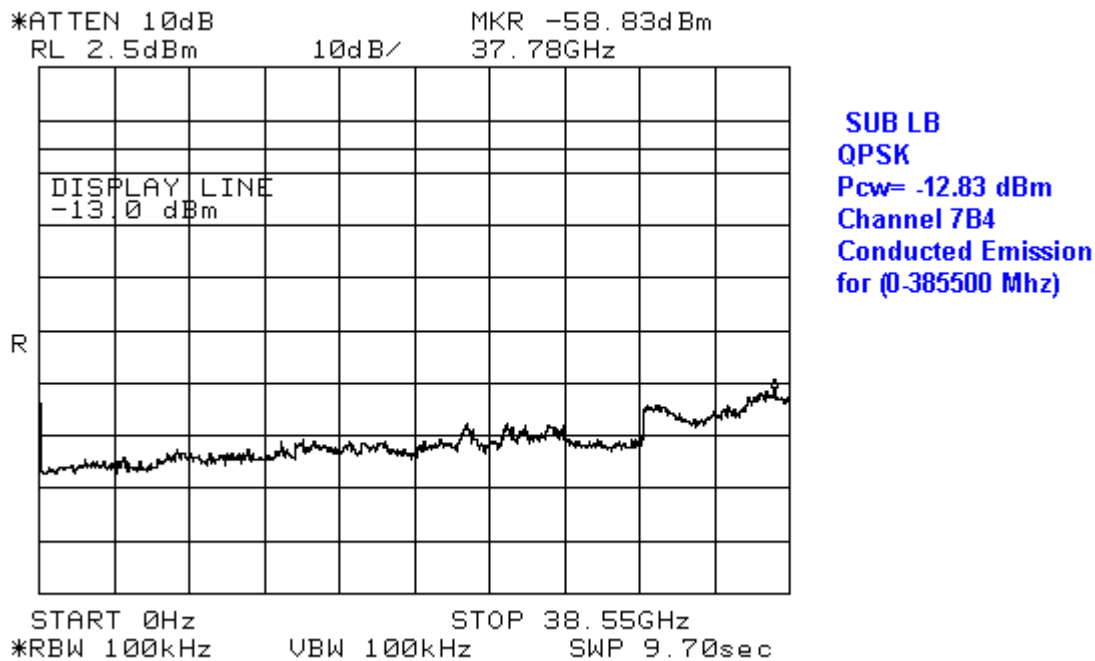


Figure 40 Conducted Emissions in 0 – 38.55 GHz, for transmitting -12 dBm on channel 7B4

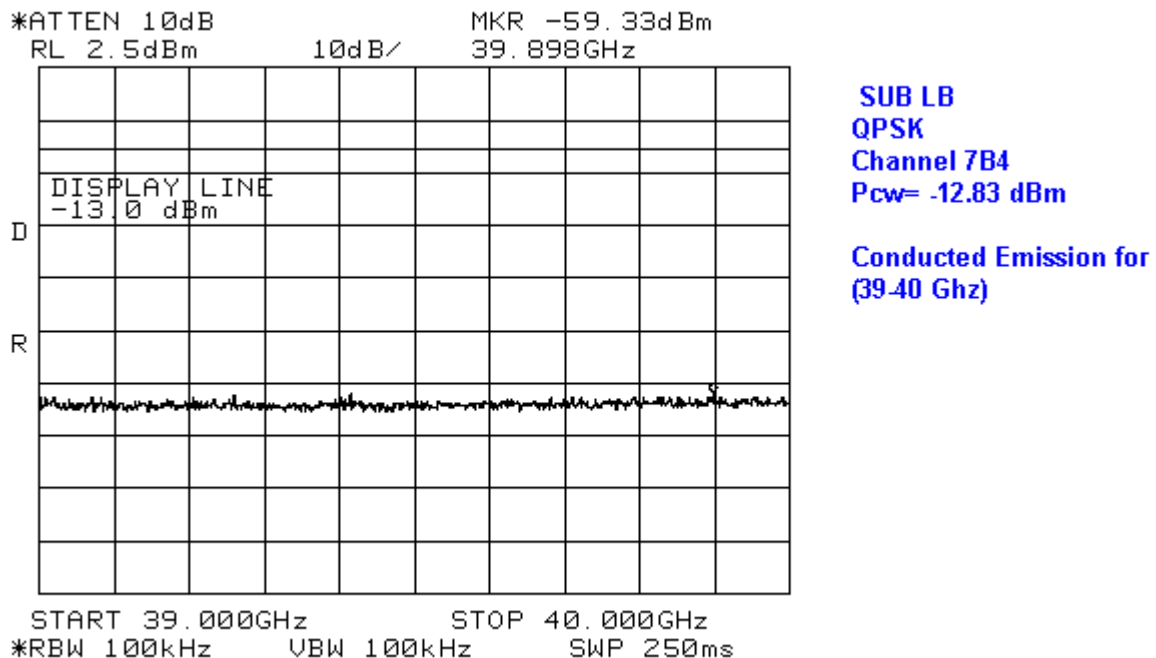



Figure 41 Conducted Emissions in 39 – 40 GHz, for transmitting -12 dBm on channel 7B4

No. HNS-18122

Rev.


Hughes Proprietary II

Sheet 40 of 57

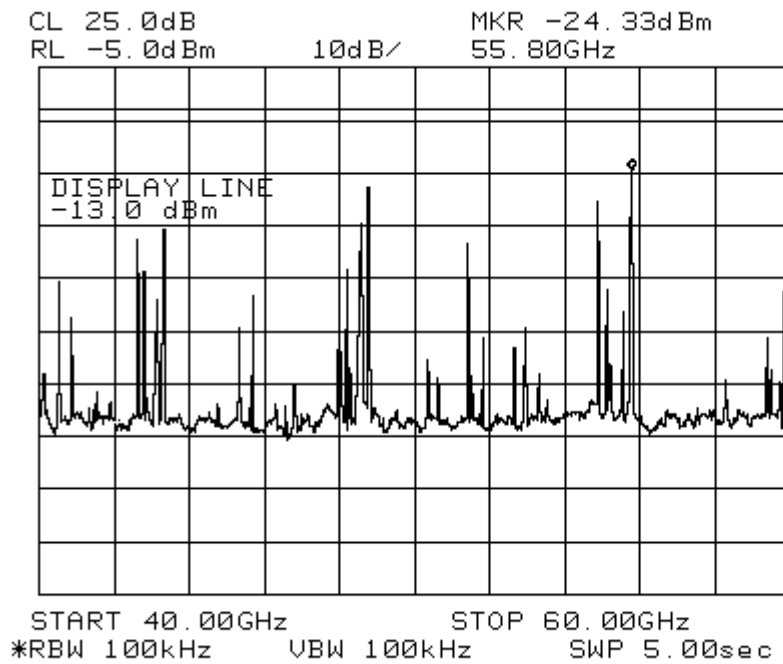

SUB LB
Channel 7B4
Pcw= -12.83 dBm
40-60 Ghz U Band

Figure 42 Conducted Emissions in 40 – 60 GHz, for transmitting -12 dBm on channel 7B4

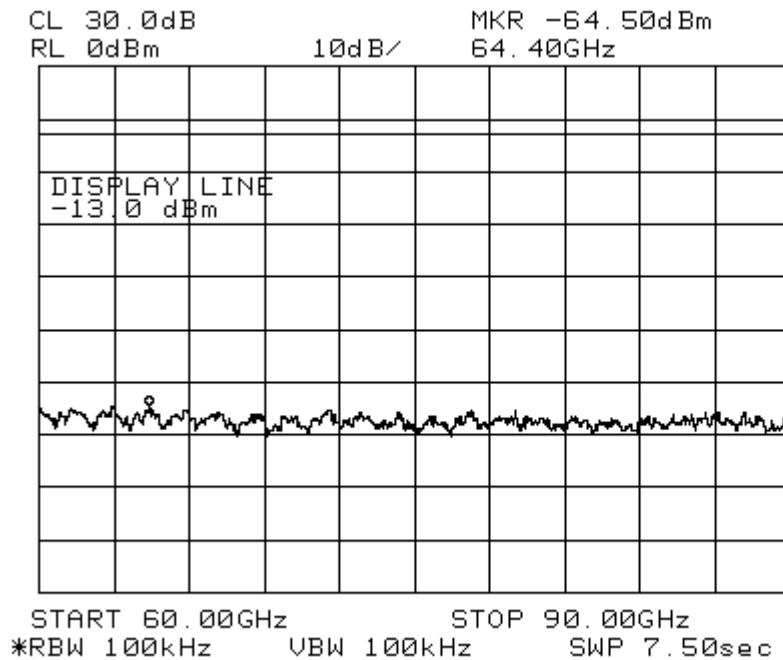


SUB LB
Channel 7b4
QPSK
Pcw= -12.84 dBm
conducted
Emission
60-90 Ghz E band

Figure 43 Conducted Emissions in 60 – 90 GHz, for transmitting -12 dBm on channel 7B4


No. HNS-18122

Rev.

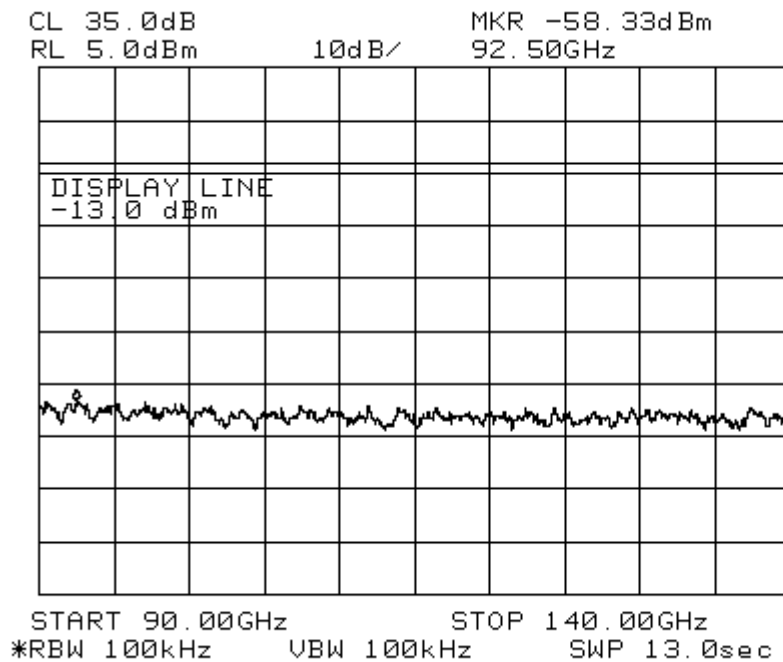

SUB LB
QPSK
Channel 7B4
Pcw= -12.83 dBm
Conducted Emission
90-140 GHz F band

Figure 44 Conducted Emissions in 90 – 140 GHz, for transmitting -12 dBm on channel 7B4

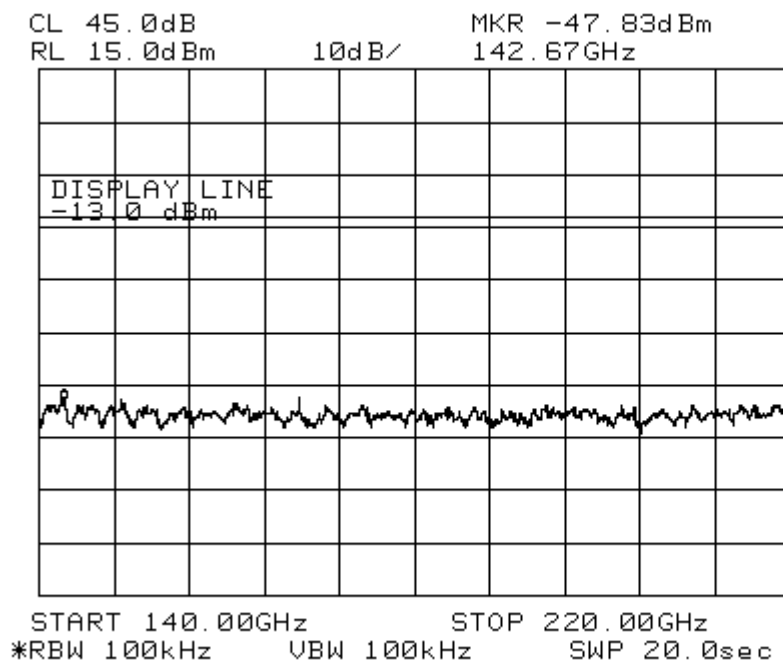

SUB LB
Channel 7B4
QPSK
Pcw= -12.83 dBm
Conducted Emission
(140-220 GHz) G band

Figure 45 Conducted Emissions in 140 – 220 GHz, for transmitting -12 dBm on channel 7B4

No. HNS-18122

Rev.

3.4 RADIATED SPURIOUS EMISSIONS FROM THE TRANSMITTER

These tests demonstrate the spurious emission levels, which are produced by EUT. The tests for the radiated emissions document the spurious levels radiated from the EUT enclosure and cables, while the transmit output port (antenna connector) will be terminated by a “dummy load”.

3.4.1 Performance Specifications

As per FCC CFR 47 Part 2.1050 (previously 2.989) and 101.109

Maximum authorized bandwidth 50MHz. Unwanted emissions must be suppressed at the aggregate channel block edges based on the same roll-off rate as specified for a single channel block in 101.111 (a) (ii) and (iii).

(a)(2)(ii) In 1 MHz Band: 50% to 250%: $A = 11 + 0.4(P - 50) + 10\log(B)$ or no less than 11dB down but no more than 56dB down is required

Where: A = Attenuation in dB below mean output power level

P = percent removed from center frequency

B = Authorized bandwidth in MHz

Example calculation:

Since the authorized bandwidth is 50MHz,

At 50 % for the authorized bandwidth ($f = 38600, 389500$ MHz)

: $A = 11 + 0.4(50 - 50) + 10\log(50) = 27.9 \sim 28\text{dB}$ down from the maximum transmitted power

The Maximum power is 18 dBm when 1MHz RBW is used,

@ 100 kHz, the levels $18 - 10\text{ dB} = 8\text{ dBm}$

Therefore the limit @ $f = 38600$ MHz and 39500 MHz should be $8\text{dBm} - 28\text{ dB} = -20\text{ dBm}$

At 125%: $A = 11 + 0.4(125 - 50) + 10\log(50) = 58\text{ dB}$ or 56 whichever is lower

Therefore the limit will be $8\text{dBm} - 56 = -48\text{ dBm}$

(a)(2)(iii) In 4kHz band >250% at least $43 + 10\log(\text{output power in Watts})$ or 80dB

Example calculation:

If your power were = 18 dBm = 63.09 mW

250% and out: $A = 43 + 10\log(0.06309) = -30.9\text{dB}$ down from the 18 dBm

Therefore limit = - 13 dBm

3.4.2 Test Procedures

The EUT will be initialized in the transmit mode. The transmit output will be terminated by a “dummy load = 50 Ohms”. Spurious emissions measurements will be done in the frequency bands detailed above. The equipment under test will be operated at different frequencies across the transmit frequency band (low end, and high end). The entire frequency spectrum from as low as possible (18 GHz to 220 GHz) shall be investigated and any spur or emission shall be documented.

Test Frequencies	
Channel	Frequency
4B3	38781.25 MHz

Table 8 Radiated Spurious Emissions Test Frequencies

No. HNS-18122

Rev.

Sheet 43 of 57

3.4.3 Test Configuration

Refer to Fig. 5 for the Basic Test configuration.

Standard gain horn antennas and harmonic mixers will be used to take the measurements. The mixers along with a Diplexer will be used to connect the signal to the spectrum analyzer and mix it down to a frequency range that can be measured. This must be done since the analyzer used only goes to 40 GHz and signals must be measured up to 220 GHz. Please refer to the documentation supplied with the mixers for instructions on how to make measurements. Also note that any measurements made over 40 GHz will not be calibrated, they will only be referenced upon the factors supplied by the mixer manufacturer. There are no NIST traceable measurements above 75GHz (they may be up to 97GHz now). Therefore, we must use engineering judgment when taking these measurements. Care must be taken to not overload the mixers. Also care must be taken when connecting and disconnecting the waveguide pieces and horn antennas.

The following connections will need to be made:

Antenna	Connector	Adapter	Frequency Range
Bi-Log	Type N	N/A	30 to 1000 MHz
Horn	Type N	N/A	1 to 18 GHz
Standard Gain Horn	WR-42	WR-42 to 3.5mm connector	18 to 26.5GHz
Standard Gain Horn	WR-28	WR-28 to 2.4mm connector	26.5 to 40 GHz
Antenna	Connector	Mixer	Frequency Range
Standard Gain Horn	WR-19	WR-19	40 to 60 GHz
Standard Gain Horn	WR-12	WR-12	60 to 90 GHz
Standard Gain Horn	WR-08	WR-08	90 to 140 GHz
Standard Gain Horn	WR-05	WR-05	140 to 220 GHz

Table 9 Equipment for Radiated Emissions Test

Recommend that test distance be 3m below 1GHz and 1m above. Tests may need to be made closer due to low field levels.

3.4.4 Test Results

PASS: X Fail:

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 44 of 57

3.4.4.1 Horizontal and Vertical, 1-18 GHz

WASHINGTON LABORATORIES, LTD
 7560 LINDBERGH DRIVE
 GAITHERSBURG, MD 20879
 (301) 417-0220 FAX: (301) 417-9069

TABLE 2

FCC CLASS B 3M RADIATED EMISSIONS DATA - SITE 2

CLIENT: HNS
 MODEL NO: ODU(PMP) Sub Unit
 DATE: 11/29/1999
 CLK SPEED(S): 160 MHz LO
 BY: Herb Meadows
 JOB #: 5535

CONFIGURATION: Output Transmitting into 40 db pad- No load
 38.94375 GHz TX Fund.
 Scanned 30MHz-18 GHz

FREQ	POL	Azimuth	Ant Height	SA LEVEL (QP)	Afc	E-FIELD	E-FIELD	LIMIT	MRGN
MHz	H/V	Degree	m	dBuV	dB/m	dBuV/m	uV/m	uV/m	dB
160.00	V	0.0	1	8.4	10.2	18.6	8.5	150.0	-24.9
321.00	V	0.0	1	5.4	16.7	22.1	12.7	200.0	-24.0
449.45	V	0.0	1	13.4	19.7	33.1	45.2	200.0	-12.9
498.36	V	0.0	1	7.8	21.0	28.8	27.7	200.0	-17.2
699.23	V	0.0	1	9.2	25.5	34.7	54.2	200.0	-11.3
960.00	V	0.0	1	10.1	29.0	39.1	90.6	200.0	-6.9

Figure 46 Radiated Spurious Emissions from 1-18 GHz

Radiated spurious emissions from 1 to 18 GHz were evaluated at Washington Laboratories, Ltd. The results are enclosed above. Both horizontal and vertical polarizations were tested. There were no spurs found.

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 45 of 57

3.4.4.2 Horizontal Polarization, 18 – 40 GHz

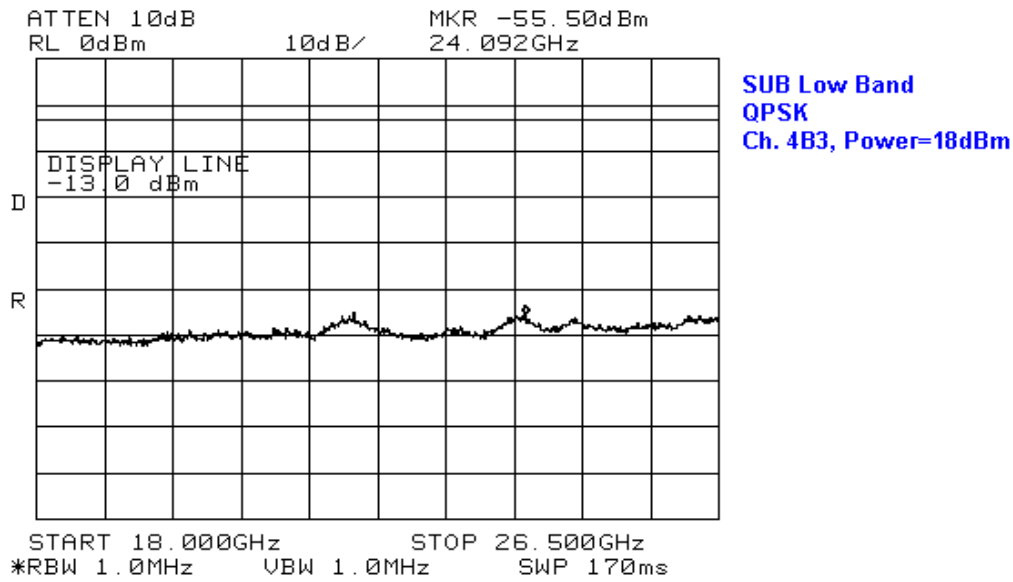


Figure 47 Radiated Emissions in 18 – 26.5 GHz, for transmitting 18 dBm on channel 4B3


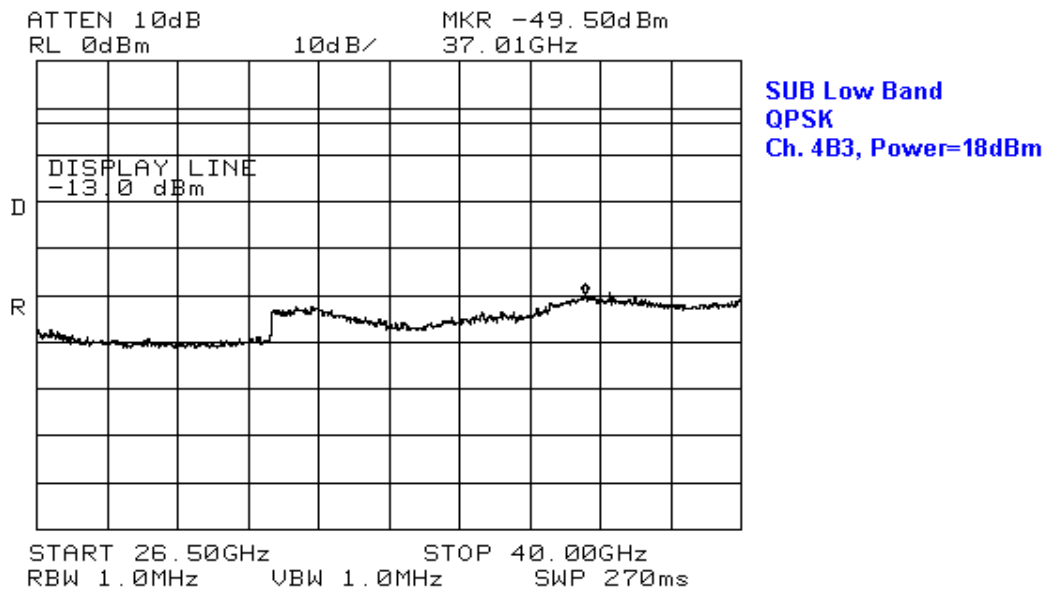


Figure 48 Radiated Emissions in 26.5 – 40 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.


3.4.4.3 Horizontal Polarization, 40 – 60 GHz

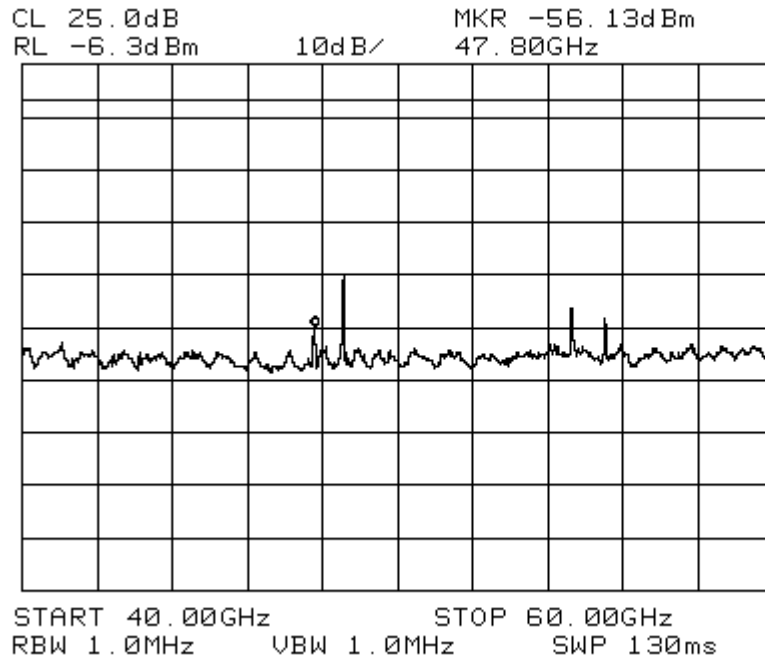

SUB Low Band
QPSK
Ch. 4B3, Power=18dBm

Figure 49 Radiated Emissions in 40 – 60 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.4 Horizontal Polarization, 60 – 90 GHz

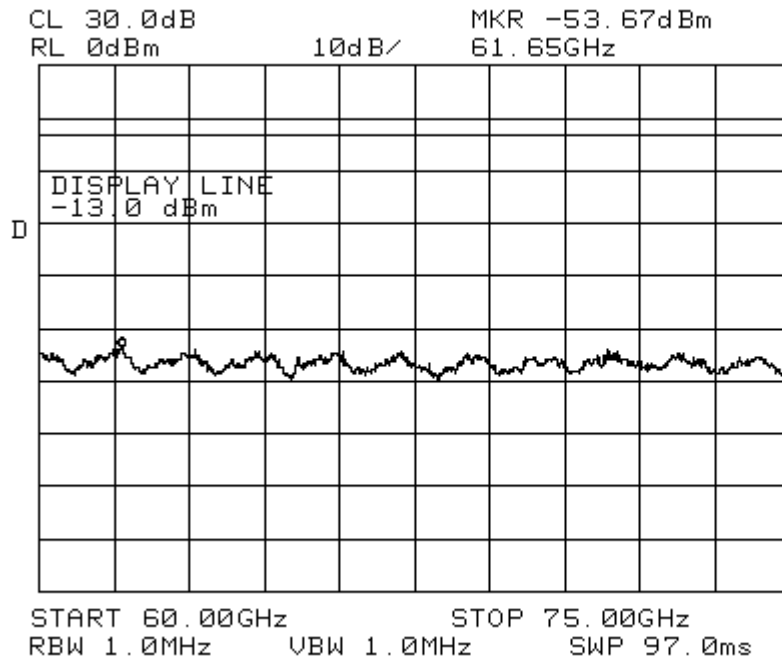

SUB Low Band
QPSK
Ch. 4B3, Power=18dBm

Figure 50 Radiated Emissions in 60 – 75 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 47 of 57

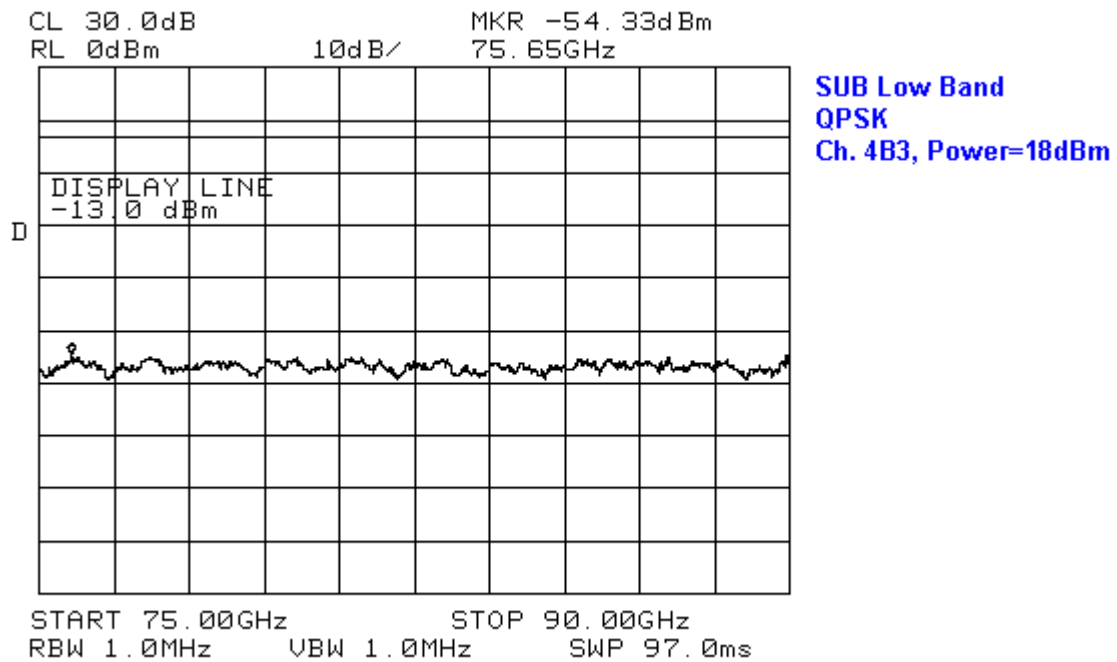


Figure 51 Radiated Emissions in 75 – 90 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.5 Horizontal Polarization, 90 – 140 GHz

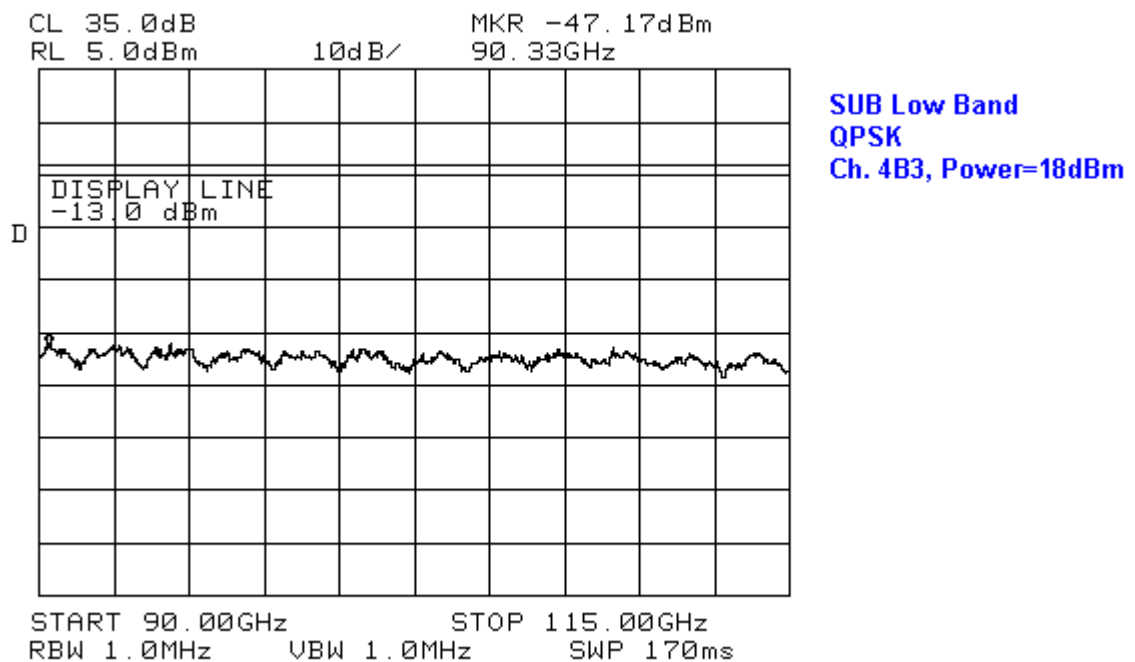


Figure 52 Radiated Emissions in 90 – 115 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

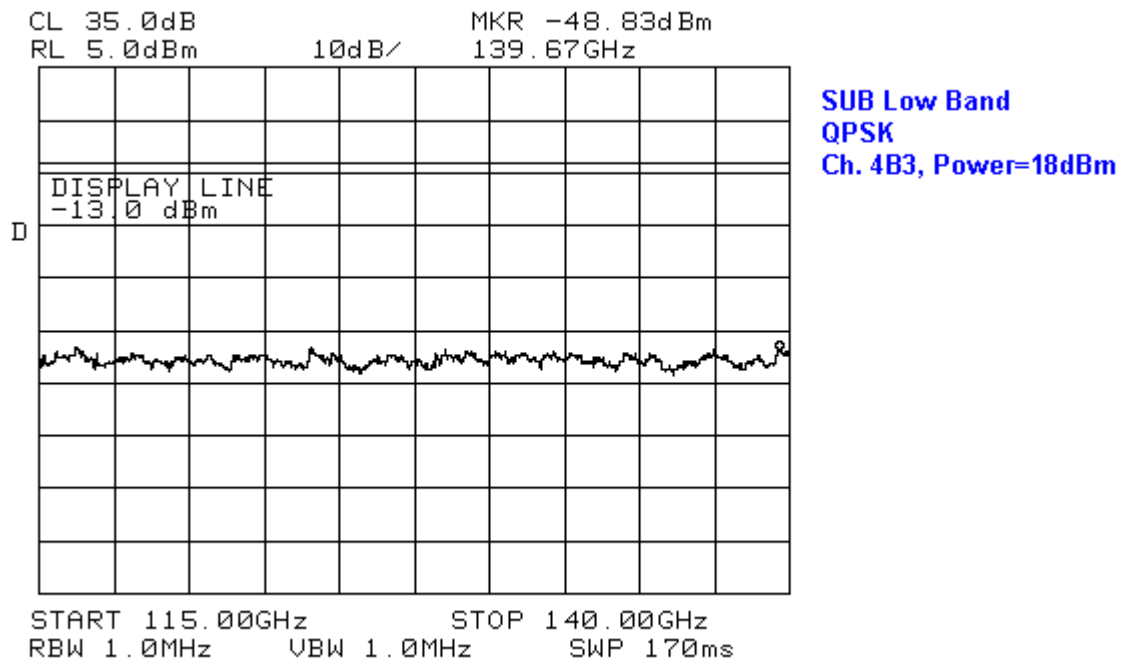


Figure 53 Radiated Emissions in 115 – 140 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.6 Horizontal Polarization, 140 – 220 GHz

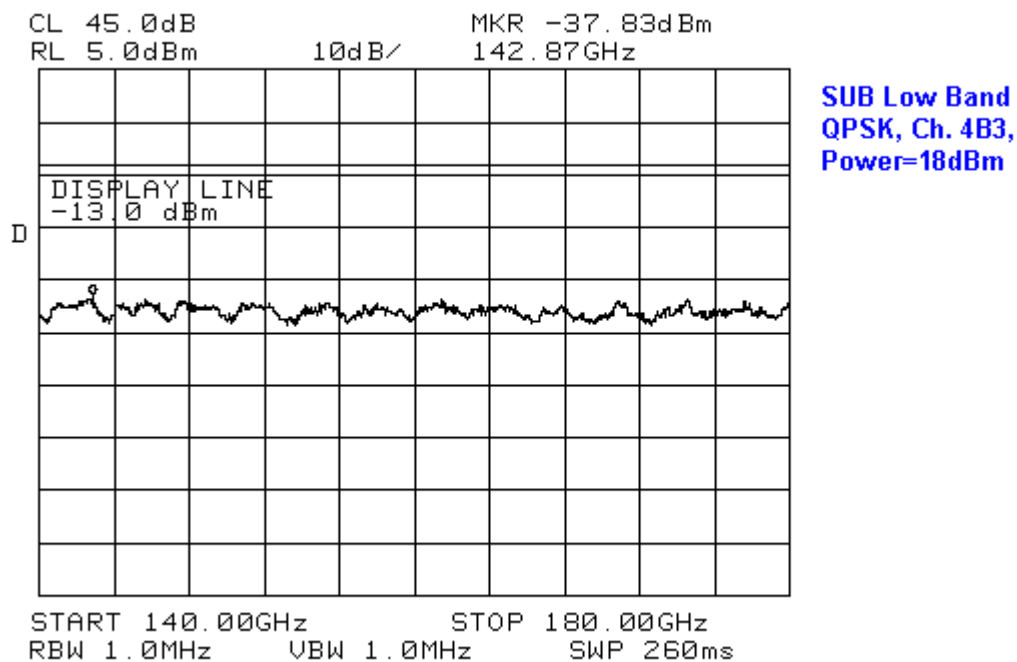


Figure 54 Radiated Emissions in 140 – 180 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.


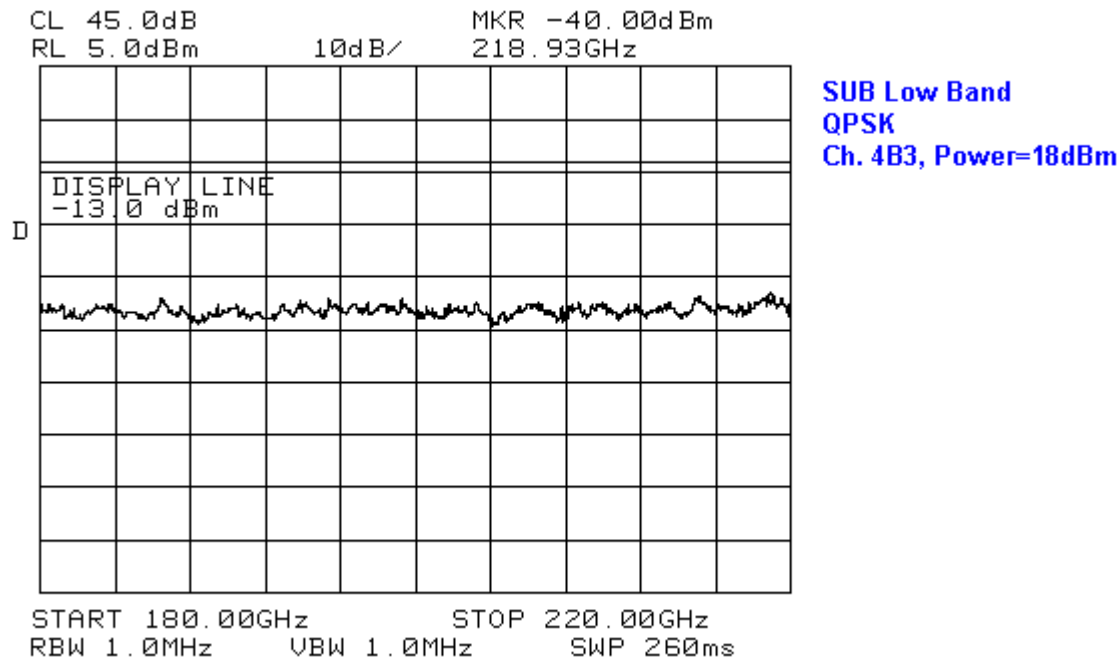



Figure 55 Radiated Emissions in 180 – 220 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.7 Vertical Polarization, 18 – 40 GHz

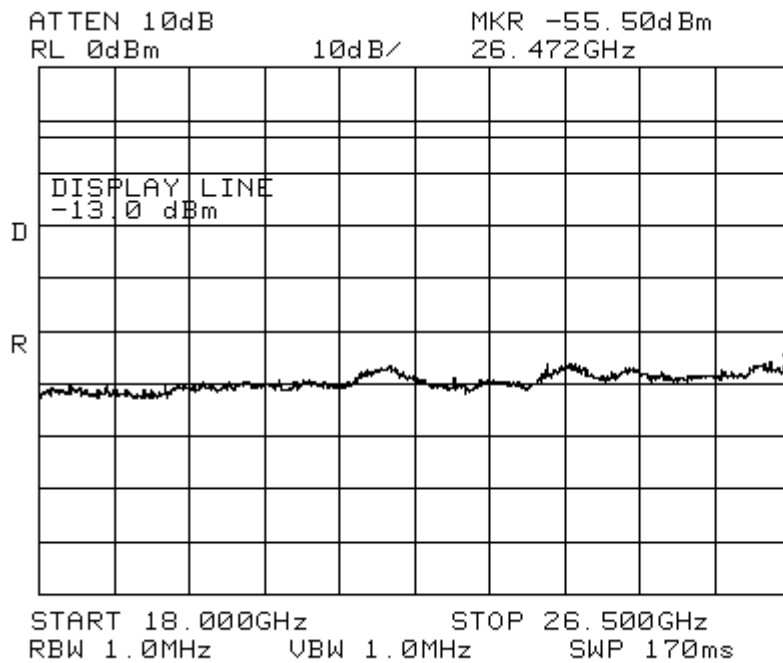

SUB Low Band
QPSK
Ch. 4B3, Power=18dBm

Figure 56 Radiated Emissions in 18 – 26.5 GHz, for transmitting 18 dBm on channel 4B3

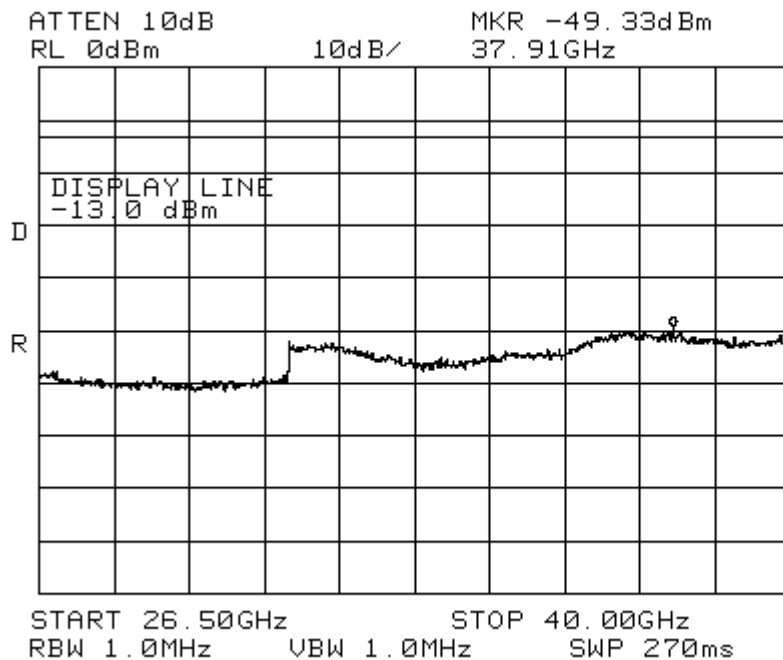

SUB Low Band
QPSK
Ch. 4B3, Power=18dBm

Figure 57 Radiated Emissions in 26.5 – 40 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 51 of 57

3.4.4.8 Vertical Polarization, 40 – 60 GHz

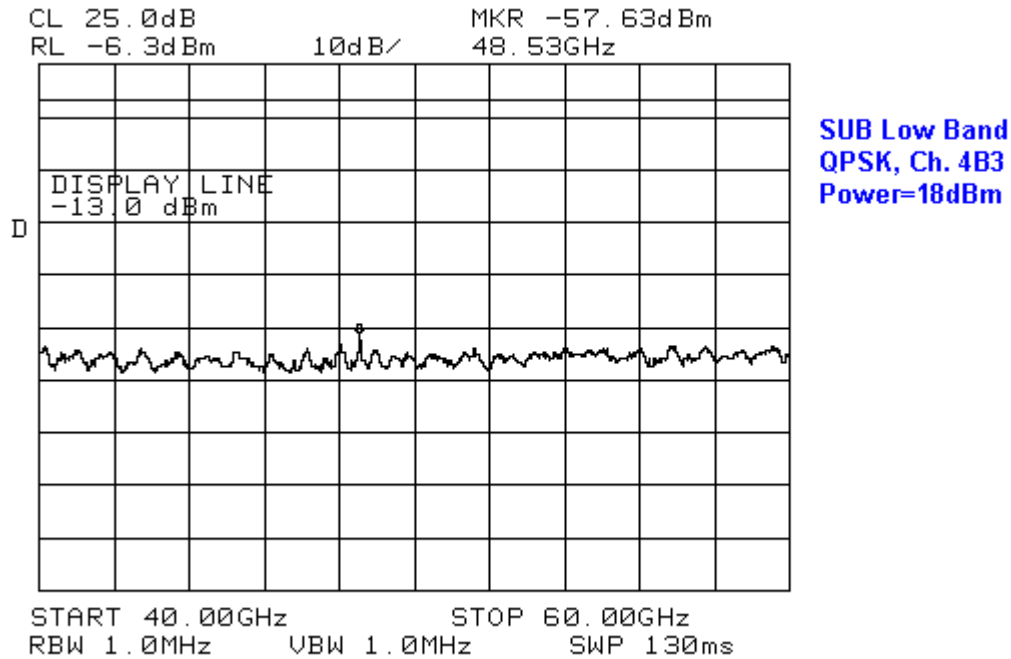


Figure 58 Radiated Emissions in 40 – 60 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.9 Vertical Polarization, 60 – 90 GHz

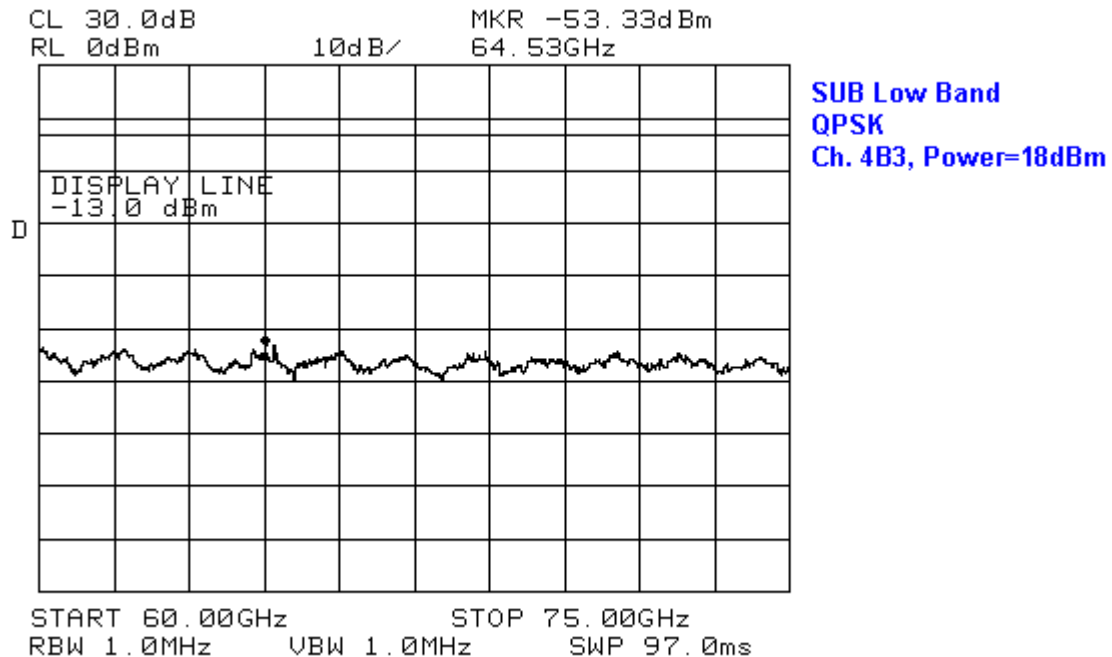


Figure 59 Radiated Emissions in 60 – 75 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 52 of 57

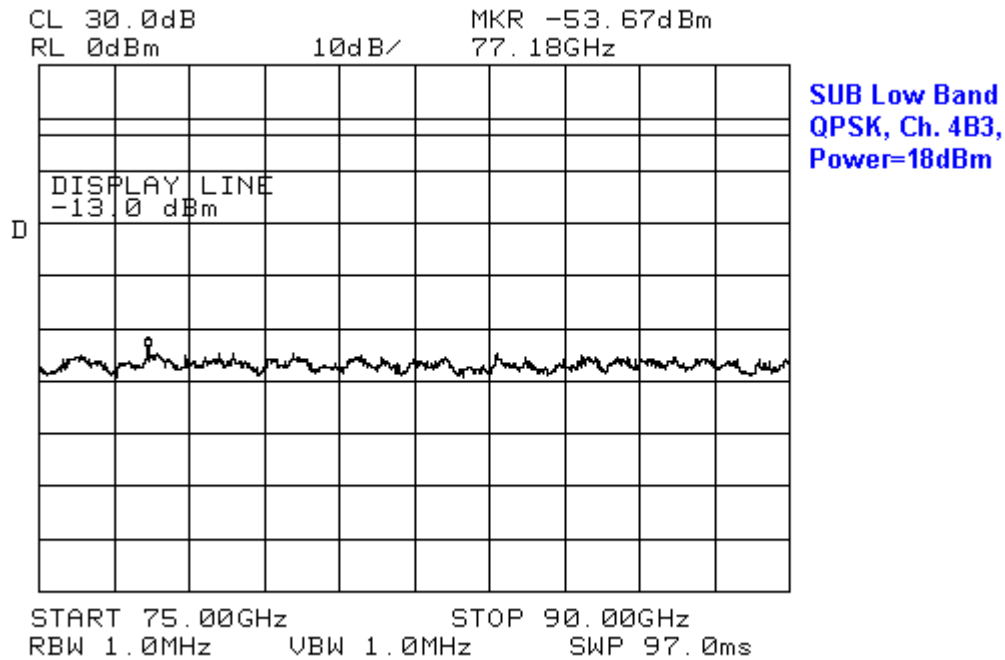


Figure 60 Radiated Emissions in 75 – 90 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.10 Vertical Polarization, 90 – 140 GHz

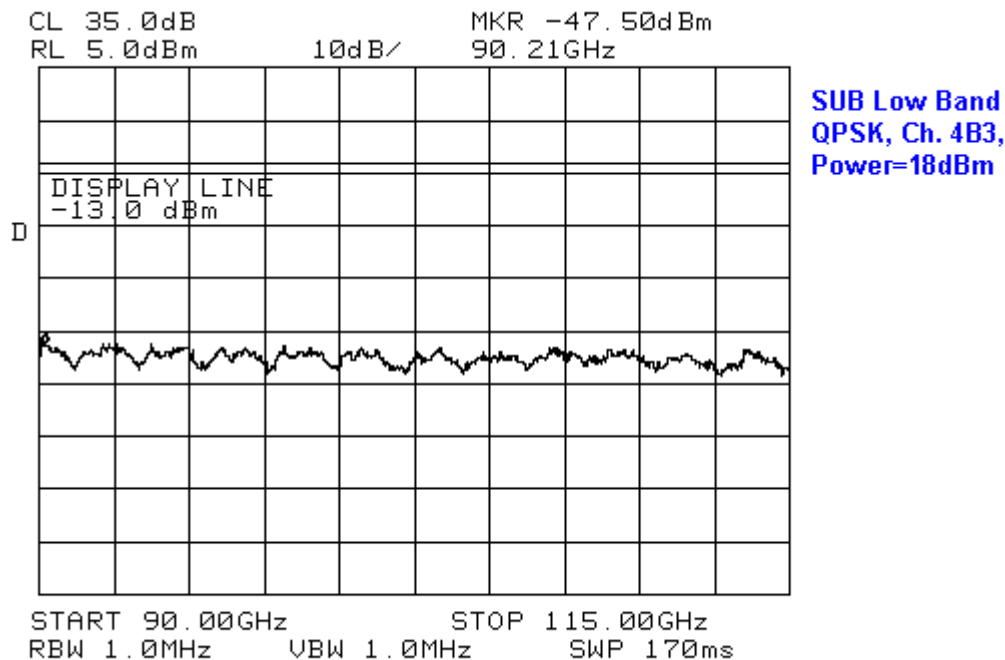


Figure 61 Radiated Emissions in 90 – 115 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

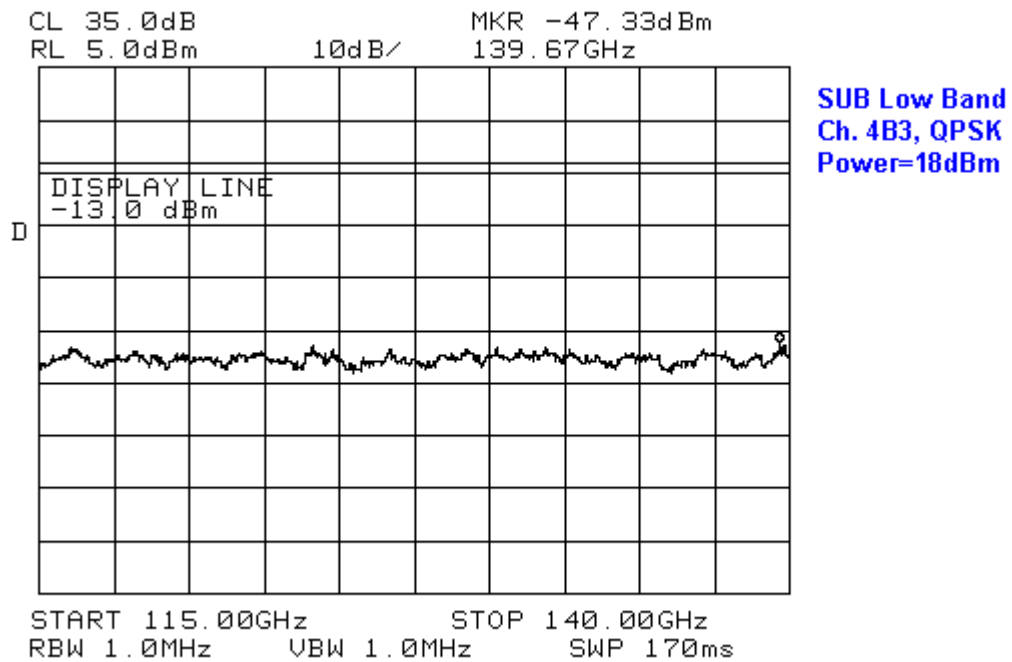


Figure 62 Radiated Emissions in 115 – 140 GHz, for transmitting 18 dBm on channel 4B3

3.4.4.11 Vertical Polarization, 140 – 220 GHz

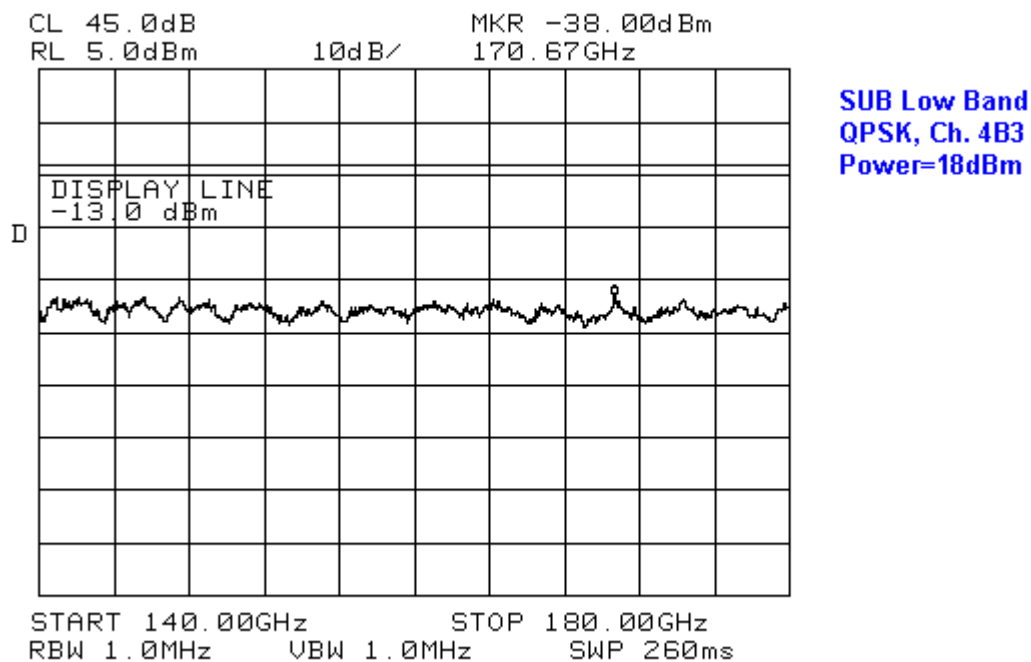


Figure 63 Radiated Emissions in 140 – 180 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

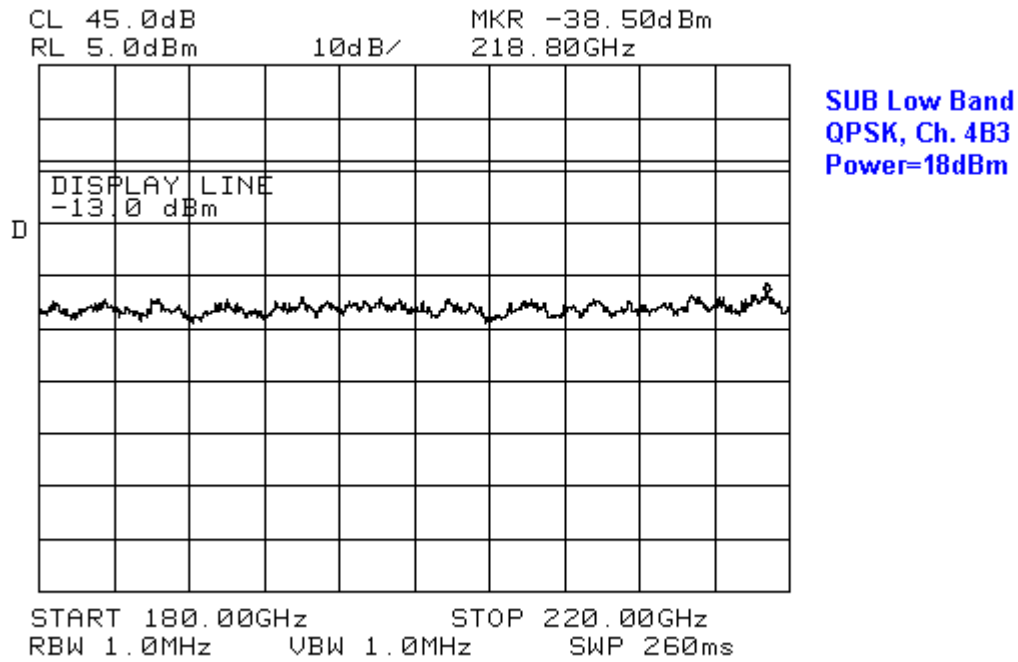


Figure 64 Radiated Emissions in 180 – 220 GHz, for transmitting 18 dBm on channel 4B3

No. HNS-18122

Rev.

3.5 FREQUENCY STABILITY

This test demonstrates the frequency stability of the EUT over the temperature ranges of the equipment.

3.5.1 Performance Specifications

NOTE: Equipment in the 38.6 to 40 GHz range is exempt from this requirement under 101.107

3.5.2 Test Results

Our Engineering department has performed frequency stability evaluation and has provided letter that is shown on the next page.

No. HNS-18122

Rev.

Hughes Proprietary II

Sheet 56 of 57

Memo

To: John Rymkiewicz
From: Harry Johnson
CC: Jim Worley, Dan Wendling
Date: 05/07/01
Re: Point to Multipoint Frequency Tolerance

The point to multipoint equipment frequency stability is traceable to the CCM crystal time base, which in turn is phase locked to network timing with Sonet Stratum 3 stability or better. This results in frequency stability of the RF systems to within ± 4.6 ppm.

This meets the FCC 101.107 and Frequency Tolerance requirements.

No. HNS-18122	
Rev.	Sheet 57 of 57