



TEST REPORT

REGULATION :

FCC Part 2, 90
RSS-119 Issue 12

Applicant	Testing Laboratory
JVC KENWOOD Corporation 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan Tel.: +81 45 939 6254 Fax.: +81 45 939 6261	Intertek Japan K.K. Kashima Laboratory URL: http://www.japan.intertek-etlsemko.com (Anechoic chamber) 298-6 Sada, Kashima, Ibaraki 314-0027 Japan Tel. +81 299 82 8464 (Open area test site) 3-2 Sunayama, Kamisu, Ibaraki 314-0255 Japan Tel. +81 479 40 1097 Intertek Japan K. K. Tochigi Laboratory 870 Nakaawano, Kanuma-shi, Tochigi-ken 322-0306 Japan Tel.: +81 289 86 7121

Equipment type	VHF DIGITAL BASE-REPEATER
Trademark	KENWOOD
FCC Model(s)	NXR-5700-K
IC Model(s)	NXR-5700-K
Serial No.	20
FCC ID	K44474500
IC CN and UPN	282F-474500
Test Result	Complied
Report Number	15060280JKA-001
Original Issue Date	July 31, 2015
Revised Issue Date	August 11, 2015

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Hideaki Kosemura

[Technical Dept. Manager]

Tested by

Koichi Wagatsuma

[Engineer]

Toru Fukuda

[Engineer]

In Accordance with FCC Rules and Regulations, Volume II, Part 2 and 90**Sub-part 2.1033**

Applicant and Manufacture Information	
APPLICANT	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
Contact Person	: Tamaki Shimamura Manager, Communications Systems Business Operation
MANUFACTURER	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
(c)(2) FCC ID	
FCC ID	: K44474500
Model number	: NXR-5700-K
Serial number	: 20
Instruction Manual(S)	
Instruction manual(s)	: Please refer to attached Exhibits F
Type of Emission	
Emission Designation	: 16K0F3E(Wide) 16K0F3E is IC Only 11K0F3E(Narrow) 8K30F1E(Narrow) / 8K30F1D(Narrow) / 8K30F7W(Narrow) 4K00F1E(Very Narrow) / 4K00F1D(Very Narrow) / 4K00F7W(Very Narrow) 4K00F2D(Very Narrow)
Frequency range	
Frequency Range	: FCC: 150 to 174 MHz IC: 138 to 144 MHz and 148 to 174 MHz
Power Rating	
Output Power	: 0.5 to 25 W
Type	: Continuously Variable
Maximum Power Rating	
Output Power	: 25W
Voltages & currents in all elements in final RF stage, including final transistor or solid-state device	
Collector Current, A	: 9.0 A Maximum
Collector Voltage, Vdc	: 13.6 Vdc
Supply Voltage, Vdc	: 13.6 Vdc
Other Information	
Number of Channel	: 30 channels
Maximum Deviation	: ± 5 kHz (16K0F3E), ± 2.5 kHz (11K0F3E)
Frequency Stability	: 0.5 ppm
	: 0.1 ppm with OCXO unit
Antenna Impedance	: 50 Ω Norminal
Note	

TABLE OF CONTENTS

	Page
SECTION 1. GENERAL INFORMATION	4
SECTION 2. SUMMARY OF TEST RESULT	5
SECTION 3. TEST AND MEASUREMENT DATA	6
SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)	7
SECTION 5. SUPPORT EQUIPMENT	8
SECTION 6. USED CABLE(S)	9
SECTION 7. TEST CONFIGURATION	10
SECTION 8. OPERATING CONDITION	11
SECTION 9. MEASUREMENT UNCERTAINTY	12
SECTION 10. TEST DATA	
10.1 Carrier Output Power (Conducted)	13
10.2 Unwanted Emissions (Transmitter Conducted)	16
10.3 Field Strength of Spurious Radiation	19
10.4 Emission Masks (Occupied Bandwidth)	25
10.5 Transient Frequency Behavior	39
10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)	48
10.7 Modulation Limiting	52
10.8 Frequency Stability (Temperature Variation)	57
10.9 Frequency Stability (Voltage Variation)	63
10.10 Receiver Spurious Emissions(Radiated)	65
10.11 Necessary Bandwidth and Emission Bandwidth	69
10.12 99% Occupied Bandwidth	70
APPENDIX PHOTOGRAPHS	

SECTION 1. GENERAL INFORMATION**TEST PERFORMED**

Location	Kashima No.1 Test Site, No.12 Test Site and Tochigi No.1 Test Site		
EUT Received	June 19, 2015		
Date of Test	June 20, 2015	to	July 29, 2015
Standard Applied	FCC Part 2, 90 RSS-119 Issue 12		
Measurement Method	ANSI/TIA-603-D-2010 / RSS-119 Issue 12(2015), RSS-Gen Issue 4(2014)		
Deviation from Standard(s)	Not applicable		

QUALIFICATIONS OF TESTING LABORATORY (Kashima Lab.)

ACCREDITATION	SCOPE	LAB. CODE	Remarks
VLAC	EMC Testing	VLAC-008-1	JAPAN
BSMI	EMC Testing	SL2-IN-E-6008	TAIWAN
FILING			
VCCI	EMC Testing	A-0126	JAPAN
FCC	EMC Testing	JP0008	
IC	EMC Testing	IC-2042K-3, IC-2042Q-12	CANADA
CB-Scheme	EMC Testing	TL222	IECEE

QUALIFICATIONS OF TESTING LABORATORY (Tochigi Lab.)

ACCREDITATION	SCOPE	LAB. CODE	Remarks
VLAC	EMC Testing	VLAC-008-5	JAPAN
BSMI	EMC Testing	SL2-IN-E-6017, SL2-A-E-6017	TAIWAN
FILING			
VCCI	EMC Testing	A-0129	JAPAN
FCC	EMC Testing	JP0011	USA
IC	EMC Testing	IC-2042P-1, IC-2042P-2	CANADA

ABBREVIATIONS

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	4LEVEL FSK	4LEVEL Frequency Shift Key
GMSK	Gaussian Maximum Shift Key	CW ID	Continuously Repeating bit stream
FM	Frequency Modulation	C4FM	Constant envelope 4 Level FM
PTT	Push to Talk	AFC	Automatic frequency control

Revision Summary

Revised Date	Section	Description of Changes
Aug 10, 2015	10.1	Added the RF power measured value.
Aug 10, 2015	10.3	The Antenna Gain unit(dBi) and the Antenna Gain value were changed.
Aug 10, 2015	10.2.3 10.3.2	Added the VBW value.
Aug 10, 2015	10.4	Added Mask plots.
Aug 10, 2015	10.6	Changed Plots data.
Aug 10, 2015	10.12	Changed 99% OBW value
Aug 11, 2015	10.1	Corrected the Setting description.

SECTION 2. SUMMARY OF TEST RESULT

FCC Part2	Part90	IC RSS-119	TEST ITEM	RESULTS	Comments
2.1046 (a)	-	5.4	Carrier Output Power (Conducted)	PASS	
2.1051	90.210	5.8	Unwanted Emissions (Transmitter Conducted)	PASS	
2.1053 (a)	90.210	5.8	Field Strength of Spurious Radiation	PASS	
2.1049 (c) (1)	90.210	5.5	Emission Masks (Occupied Bandwidth)	PASS	
-	90.214	5.9	Transient Frequency Behavior	PASS	
2.1047 (a)	-	-	Audio Low Pass Filter (Voice Input)	PASS	
2.1047 (a)	-	-	Audio Frequency Response	PASS	
2.1047 (b)	-	-	Modulation Limiting	PASS	
2.1055 (a) (1)	90.213 (a)	5.3	Frequency Stability (Temperature Variation)	PASS	
2.1055 (d) (1)	90.213 (a)	5.3	Frequency Stability (Voltage Variation)	PASS	
-	-	RSS-Gen 7.1	Receiver Spurious Emissions	PASS	
-	90.203 (j)(3)	-	Certification required (FCC Part 90.203(j)(3))	Complied	
-	90.203 (j)(4)	-	Certification required (FCC Part 90.203(j)(4))	Complied	
-	90.203 (j)(5)	-	Certification required (FCC Part 90.203(j)(5))	Complied	
-	90.203 (e)	-	Certification required (FCC Part 90.203(e))	Complied	
-	-	5.5	99% Occupied Bandwidth	PASS	

Limitation on Results

The test result of this report is effective equipment under test itself and under the test configuration described on the report.

This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

Note:

As for the FCC Part 15 Subpart B-Unintentional Radiators, the EUT has been measured and declared as Verification by JVC Kenwood Corporation.

SECTION 3. TEST AND MEASUREMENT DATA

All test and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J and Industry Canada as the following individual parts:

FCC Rule	Test Item	Tested
Part 21	Domestic Public Fixed radio Services	N.A.
Part 22	Non Cellular	N.A.
Part 22	Public Mobile Services	N.A.
Part 22	Subpart H - Cellular Radiotelephone Service	N.A.
Part 22	Alternative technologies and auxiliary service	N.A.
Part 23	International Fixed Public Radiocommunication service	N.A.
Part 24	Personal Communications Services	N.A.
Part 74	Experimental Radio Auxiliary , Special Broadcast and Other Program Distributional Services	N.A.
Part 80	Stations in the Maritime Services	N.A.
Part 80	Subpart E - general Technical Standards	N.A.
Part 80	Subpart F - Equipment Authorization for Compulsory Ships	N.A.
Part 80	Subpart K - Private Coast Stations and Marine Utility Stations	N.A.
Part 80	Subpart S - Compulsory radiotelephone Installations for Small Passenger Boats	N.A.
Part 80	Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes	N.A.
Part 80	Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act	N.A.
Part 80	Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)	N.A.
Part 80	Subpart W - Global Maritime Distress and Safety System (GMDSS)	N.A.
Part 80	Subpart X - Voluntary Radio Installations	N.A.
Part 87	Aviation Services	N.A.
Part 90	Private Land Mobile radio Services	YES
Part 94	Private Operational - Fixed Microwave Service	N.A.
Part 95	Subpart A - General Mobile radio Service	N.A.
Part 95	Subpart C - Radio Control (R/C) radio Service	N.A.
Part 95	Subpart D - Citizens Band (CB) Radio Service	N.A.
Part 95	Subpart E -Family radio Service	N.A.
Part 95	Subpart F -Interactive Video and Data Service (IVDS)	N.A.
Part 97	Amateur Radio Service	N.A.
Part 101	Fixed Microwave Service	N.A.

IC Rule	Test Item	Tested
RSS-119	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.4-960 MHz	YES
RSS-134	900MHz Narrowband Personal Communication Service	N.A.
RSS-Gen	General Requirements for Compliance of Radio Apparatus	YES

SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)**4.1 List of System Configuration**

4.1 List of System Configuration					
Symbol	Item	Model No.	Serial No.	Manufacture	Remarks
A	VHF DIGITAL BASE-REPEATER	NXR-5700-K	20	JVC KENWOOD Corporation	EUT
Power Ratings of EUT :		DC 10.8 to 15.6 V		9.0 A Maximum	
Power Supply :		DC 13.6 V			
Condition of Equipment		Proto type			
Type		Rack Mount type			
Suppression Devices		No Modifications by the laboratory were made to the device			

4.2 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
RX	BNC	2pin	
REF OUT	BNC	2pin	
REF IN	BNC	2pin	
DC 13.6 V	JST VLR-02V	2pin	
TX	BNC	2pin	
TEST/SPKR	MOLEX 1625-15p	15pin	
Control I/O	D-sub	25pin	
SYNC 1	RJ-11	4pin	
SYNC 2	RJ-11	4pin	
LAN	RJ-45	8pin	
MICROPHONE	RJ-45	8pin	
USB	Type B	4pin	use for maintenance

4.3 Highest Frequency Oscillator(s)/Crystal(s)

Operating Frequency	Board Name	Remarks
232.05 MHz	TXRX UNIT	

SECTION 5. SUPPORT EQUIPMENT

The EUT was supported by the following equipment during the test

Symbol	Item	Model No.	Serial No.	Manufacture	FCC ID
B	Microphone	KMC-35	none	JVC KENWOOD Corporation	N/A
C	Hub	SD205	PSJ1341D2C	CISCO	DoC
D	Controller	none	none	JVC KENWOOD Corporation	N/A
E	External Speaker	KES-5	none	JVC KENWOOD Corporation	N/A
F	Terminator	3204-BNCM	No1	JVC KENWOOD Corporation	N/A
G	Terminator	3204-BNCM	No2	JVC KENWOOD Corporation	N/A
H	Terminator	CT-01	F0100013	TME	N/A
I	Terminator	CT-01	F0200013	TME	N/A
J	Terminator	CT-01	F0500017	TME	N/A
K	Terminator	CT-01	F05050012	TME	N/A
L	Base-Repeater (1)	NXR-JIG1	none	JVC KENWOOD Corporation	N/A
M	Base-Repeater (2)	NXR-JIG2	none	JVC KENWOOD Corporation	N/A
N	DC Power Supply (1)	HWS300-15	5JY-139MC2-0005	TDK-Lambda	N/A
O	DC Power Supply (2)	AD-52M	F03999930	Daiwa	N/A
P	AC Adapter	EA0061WAA	09H114123	Bestec	Doc

Supplied Power:

N, O, P	AC	100V,60Hz
---------	----	-----------

SECTION 6. USED CABLE(S)

The following cable(s) was used for the test.


No.	Name	Length (m)	Shield	Connector	Ferrite core
1	Mic. cable	0.60	No	No	
2	LAN cable	1.00	Yes	Yes	
3	D-sub	1.40	Yes	No	
4	Speaker cable	2.80	No	No	
5	Modular cable	0.20	No	No	
6	Modular cable	0.20	No	No	
7	Coaxial cable	1.00	Yes	Yes	
8	Coaxial cable	1.00	Yes	Yes	
9	DC cable for EUT	4.00	No	No	Removable x 1
10	DC cable for Base-Repeater (1)	4.00	No	No	Removable x 1
11	DC cable for Base-Repeater (2)	4.00	No	No	Removable x 1
12	DC cable for Hub	2.00	No	No	Removable x 2
13	Power cable for DC Power Supply (1)	1.90	No	No	
14	Power cable for DC Power Supply (2)	1.30	No	No	

SECTION 7. TEST CONFIGURATION

Details of Configuration and Connection

Example: Case of Section 10.10Test

- * : EUT
- : Ferrite core
- : Joint Connector

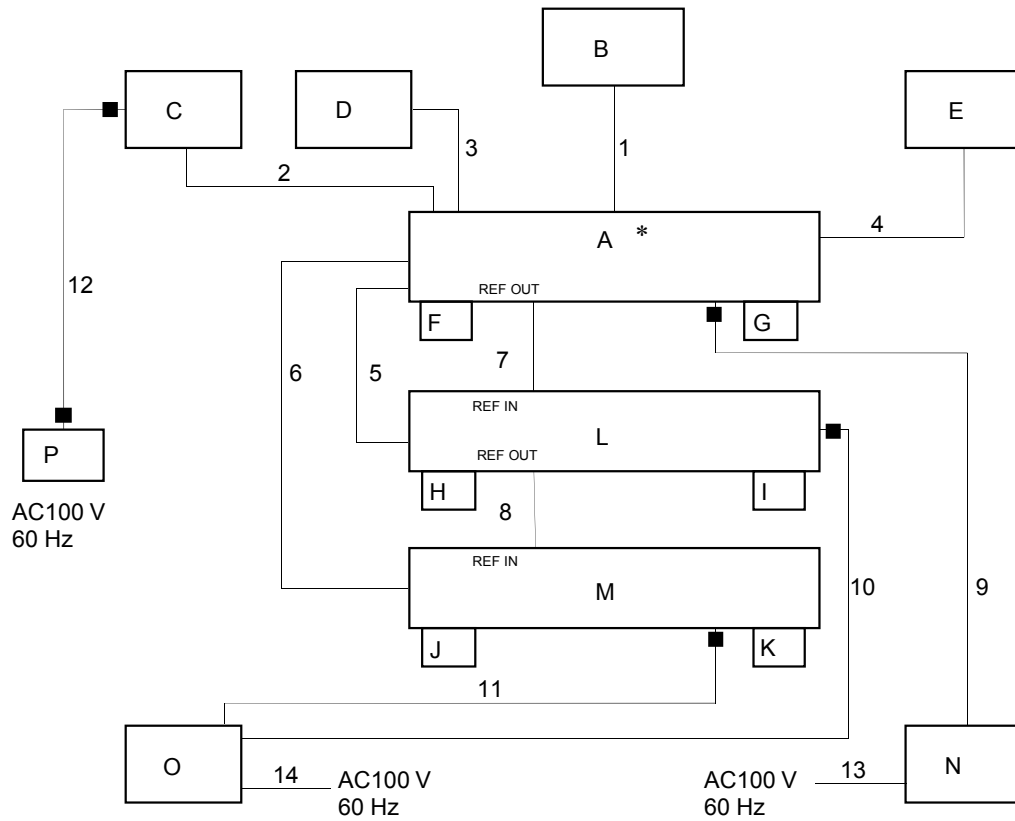

SECTION 8. OPERATING CONDITION

The EUT was operated under the following condition during the test.

8.1 Operating Condition

The test was carried out under Transmit mode.

(FCC:150.05MHz, 162.05MHz, 173.95MHz, RSS:138.05MHz, 158.05MHz, 173.95MHz)

(High Power : 25W, Low Power : 0.5 W)


The test was carried out under Receive mode.

(138.05MHz, 158.05MHz, 173.95MHz)

EUT was examined in the operating conditions that had maximum emissions.


8.2 Operating Flow [Transmit mode]

Following operations were performed continuously.

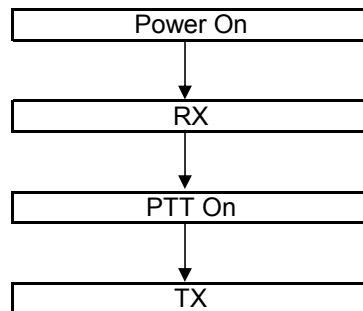

8.3 Operating Flow [Receive mode]

Following operations were performed continuously.



SECTION 9. MEASUREMENT UNCERTAINTY

Carrier Output Power (Conducted)	U _{lab}	Utia-603-d
	+/- 0.29dB (k = 2)	+/- 0.59 dB
Unwanted Emissions (Transmitter Conducted)		
	+/- 2.19 dB (k = 2)	+/- 1.1 dB
Field Strength of Spurious Radiation		
	+/- 2.78dB (k = 2)	+/- 3.3 dB
Emission Masks (Occupied Bandwidth)		
	+/- 0.5dB (k = 2)	+/- 2.1 dB
Transient Frequency Behavior		
	+/- 1.10% (k = 2)	+/- 21.6 %
Audio Low Pass Filter (Voice Input)		
	+/- 0.1dB (k = 2)	+/- 1.2 dB
Audio Frequency Response		
	+/- 0.1dB (k = 2)	+/- 1.2 dB
Modulation Limiting		
	+/- 1% (k = 2)	+/- 1.0 %
Frequency Stability (Temperature Variation)		
	+/- 10.1Hz (k=2)	+/-34.2 Hz
Frequency Stability (Voltage Variation)		
	+/- 10.1Hz (k=2)	+/-34.2 Hz
Receiver Spurious Emissions	U _{lab}	Ucisp
30-1000MHz	+/- 4.05dB (k = 2)	+/- 6.3 dB
abobe 1GHz	+/- 4.80dB (k = 2)	

SECTION 10. TEST DATA**10.1 Carrier Output Power (Conducted)**

REGULATIONS : FCC Part 2 Section 1046 (a) / RSS-119 Section 5.4

TEST METHOD/GUIDE : ANSI/TIA-603-D Section 2.2.1.2 / RSS-119 Section 4.1

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The EUT was conducted to a resistive coaxial attenuator of normal load impedance.
 $\text{RF Power (dBm)} = \text{Power Meter reading (dBm)} + \text{Attenuator Loss (dB)} + \text{Cable Loss (dB)}$
 $\text{RF Power (W)} = 10^{(\text{RF Power (dBm)}/10)/1000}$
- 3 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only as for the test of RSS)

Measuring Equipments


No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 09, 15	Jun. 30, 16
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 09, 15	Jun. 30, 16
3	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
4	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
5	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
6	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
7	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
8	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15
9	JIG	HP	EliteBook 2561p	CNU2262D0Q	None	None

Measuring Cables


No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W4	USB Adapter	SANWA	USB-CVR59	FXLA00701	None	None
W5	PROGRAMMING INTERFACE Cable	SANWA	KR-MDI	None	None	None

Measuring Equipment Configuration

<Analog Modulation Case>

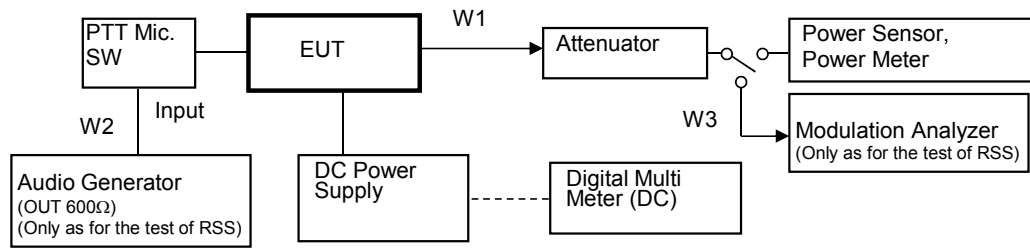

<Digital Modulation Case>

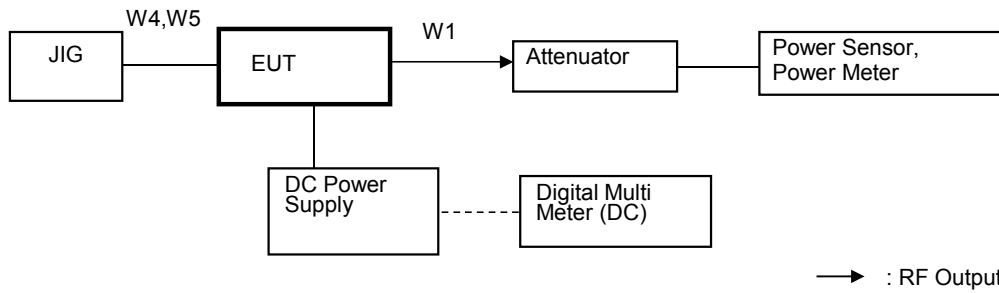

Test Results

Test date	Jun 19, 2015	
Location	Kashima No.1 Test Site	
temperature	23.0	[degree C]
Humidity Variation	50.0	[%]
Atmospheric Pressure	100.6	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the Authorized Bandwidth.

State the worst case (below).

No.	Frequency (MHz)	Band	Setting		RF Power (W)
1	138.05 (RSS)	Low	16K0F3E	High Power	24.98
2	138.05 (RSS)	Low	11K0F3E	High Power	24.98
3	138.05 (RSS)	Low	8K30F1E/F1D/F7W	High Power	24.98
4	138.05 (RSS)	Low	4K00F1E/F1D/F7W	High Power	24.98
5	138.05 (RSS)	Low	4K00F2D	High Power	24.98
6	150.05 (FCC)	Low	11K0F3E	High Power	24.95
7	150.05 (FCC)	Low	8K30F1E/F1D/F7W	High Power	24.95
8	150.05 (FCC)	Low	4K00F1E/F1D/F7W	High Power	24.95
9	150.05 (FCC)	Low	4K00F2D	High Power	24.95
10	158.05 (RSS)	Middle	16K0F3E	High Power	24.95
11	158.05 (RSS)	Middle	11K0F3E	High Power	24.95
12	158.05 (RSS)	Middle	8K30F1E/F1D/F7W	High Power	24.95
13	158.05 (RSS)	Middle	4K00F1E/F1D/F7W	High Power	24.95
14	158.05 (RSS)	Middle	4K00F2D	High Power	24.95
15	162.05 (FCC)	Middle	11K0F3E	High Power	24.98
16	162.05 (FCC)	Middle	8K30F1E/F1D/F7W	High Power	24.98
17	162.05 (FCC)	Middle	4K00F1E/F1D/F7W	High Power	24.98
18	162.05 (FCC)	Middle	4K00F2D	High Power	24.98
19	173.95 (RSS)	High	16K0F3E	High Power	24.95
20	173.95 (FCC/RSS)	High	11K0F3E	High Power	24.95
21	173.95 (FCC/RSS)	High	8K30F1E/F1D/F7W	High Power	24.95
22	173.95 (FCC/RSS)	High	4K00F1E/F1D/F7W	High Power	24.95
23	173.95 (FCC/RSS)	High	4K00F2D	High Power	24.95
24	138.05 (RSS)	Low	16K0F3E	Low Power	0.50
25	138.05 (RSS)	Low	11K0F3E	Low Power	0.50
26	138.05 (RSS)	Low	8K30F1E/F1D/F7W	Low Power	0.50
27	138.05 (RSS)	Low	4K00F1E/F1D/F7W	Low Power	0.50
28	138.05 (RSS)	Low	4K00F2D	Low Power	0.50
29	150.05 (FCC)	Low	11K0F3E	Low Power	0.50
30	150.05 (FCC)	Low	8K30F1E/F1D/F7W	Low Power	0.50
31	150.05 (FCC)	Low	4K00F1E/F1D/F7W	Low Power	0.50
32	150.05 (FCC)	Low	4K00F2D	Low Power	0.50
33	158.05 (RSS)	Middle	16K0F3E	Low Power	0.50
34	158.05 (RSS)	Middle	11K0F3E	Low Power	0.50
35	158.05 (RSS)	Middle	8K30F1E/F1D/F7W	Low Power	0.50
36	158.05 (RSS)	Middle	4K00F1E/F1D/F7W	Low Power	0.50
37	158.05 (RSS)	Middle	4K00F2D	Low Power	0.50
38	162.05 (FCC)	Middle	11K0F3E	Low Power	0.50
39	162.05 (FCC)	Middle	8K30F1E/F1D/F7W	Low Power	0.50
40	162.05 (FCC)	Middle	4K00F1E/F1D/F7W	Low Power	0.50
41	162.05 (FCC)	Middle	4K00F2D	Low Power	0.50
42	173.95 (RSS)	High	16K0F3E	Low Power	0.50
43	173.95 (FCC/RSS)	High	11K0F3E	Low Power	0.50
44	173.95 (FCC/RSS)	High	8K30F1E/F1D/F7W	Low Power	0.50
45	173.95 (FCC/RSS)	High	4K00F1E/F1D/F7W	Low Power	0.50
46	173.95 (FCC/RSS)	High	4K00F2D	Low Power	0.50

RF Power: Peak reading

10.2 Unwanted Emissions (Transmitter Conducted)

REGULATIONS : FCC Part 2 Section 1051, Part 90 Section 210 / RSS-119 Section 5.8

TEST METHOD/GUIDE : RSS-119 Section 4.2, RSS-Gen Section 4.9

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.
- 3 Adjust the spectrum analyzer for the following setting:
 - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
 - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
 - c) Detector mode : Average power (FM Modulation) , Positive peak with peak hold (Digital Modulation)
- 4 The emissions were measured for the worst case as follows:
 - a) : within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - b) : from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Highpass Filter	Anritsu	MP526B	6200220636	Jan. 20, 15	Jan. 31, 16
4	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
5	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
6	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
7	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
8	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
9	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W3	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 15	Jan. 31, 16

Measuring Equipment Configuration

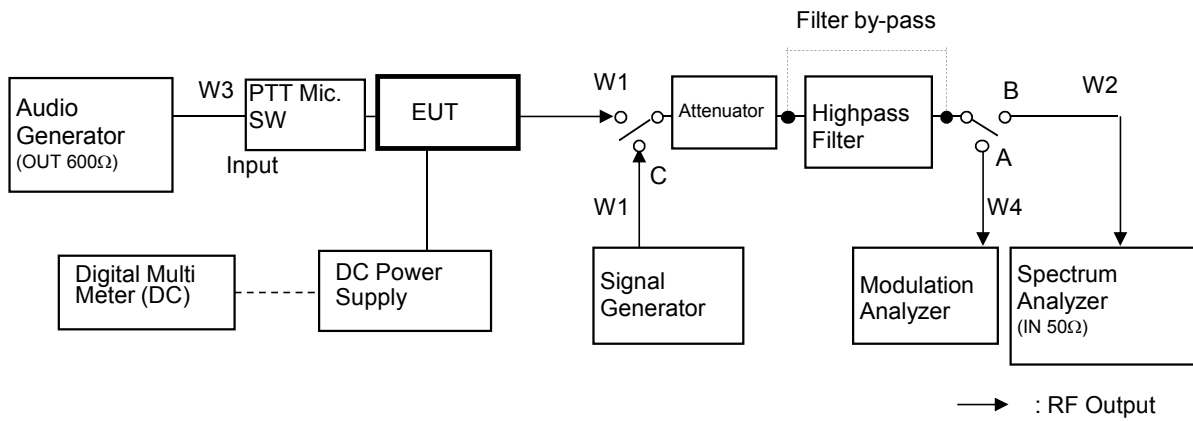

Test Results

Test date	Jun 20, 2015
Location	Kashima No.1 Test Site
temperature	25 [degree C]
Humidity Variation	57 [%]
Atmospheric Pressure	100.7 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1

State the worst case (below).

State : High Power / Authorized Bandwidth 6 kHz

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask E Limit (dBc)	Margin (dB)
1	138.05(RSS)	Low	276.10	-56.50	-100.48	-65.0	35.5
2	150.05(FCC)	Low	450.15	-55.04	-99.02	-65.0	34.0
3	158.05(RSS)	Middle	474.15	-55.40	-99.38	-65.0	34.4
4	162.05(FCC)	Middle	486.15	-53.10	-97.08	-65.0	32.1
5	173.95(FCC/RSS)	High	521.85	-53.20	-97.18	-65.0	32.2
There is the margin of 20dB over except for the above points.							

Mask E Limit (dBc) = whichever is the lesser attenuation ; $-(55+10\log(P))$ or -65

Correct Level (dBm) = Substitute SG Level (dBm)

Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 6 kHz

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask E Limit (dBc)	Margin (dB)
1	138.05(RSS)	Low	No Point detected	-	-	-52.0	-
2	150.05(FCC)	Low	No Point detected	-	-	-52.0	-
3	158.05(RSS)	Middle	No Point detected	-	-	-52.0	-
4	162.05(FCC)	Middle	No Point detected	-	-	-62.0	-
5	173.95(FCC/RSS)	High	No Point detected	-	-	-62.0	-
There is the margin of 20dB over except for the above points.							

Mask E Limit (dBc) = whichever is the lesser attenuation ; $-(55+10\log(P))$ or -65

Correct Level (dBm) = Substitute SG Level (dBm)

Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

10.3 Field Strength of Spurious Radiation

REGULATIONS : FCC Part 2 Section 1053 (a), Part 90 Section 210 / RSS-119 Section 5.8

TEST METHOD/GUIDE : ANSI/TIA-603-D Section 2.2.12.2 / RSS-119 Section 4.2

Test Procedure


- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the spectrum analyzer for the following setting:
 - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
 - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
 - c) Detector mode : Positive Peak
- 3 The transmitter was placed on a wooden turntable, and it was transmitting into non-radiating load which was also placed on the turntable.
- 4 The measurement antenna was placed at a distance of 3 meters from the EUT.
During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.
The test was performed by placing the EUT on 3-orthogonal axis.
- 5 The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 6 Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable.
The absolute levels of the spurious emissions were measured by the substitution.
- 7 Spurious emissions in dB = 10 Log (TX power in Watts/0.001) – the absolute level

Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator(6dB)	HUBER+SUHNER	6806.17B	4962	Jan. 23, 15	Jan. 31, 16
2	Attenuator(10dB)	HUBER+SUHNER	6810.17B	5061	Jun. 01, 15	Jun. 30, 16
3	Dummy Load	TME	CT-150NP	1138693	Jan. 20, 15	Jan. 31, 16
4	Signal Generator	Rohde&Schwarz	SMB 100A	1E+05	Mar. 18, 15	Mar. 31, 16
5	Signal Generator	Rohde&Schwarz	SMP02	845275/007	Feb. 17, 15	Feb. 29, 16
6	Spectrum Analyzer	Agilent	N9030A	US51350170	Mar. 12, 15	Mar. 31, 16
7	D.R.G Antenna(RX)	Schwarzbeck	3115	5044	Jul. 16, 14	Jul. 31, 15
8	D.R.G Antenna(TX)	Schwarzbeck	3115	5045	Apr. 15, 15	Apr. 30, 16
9	Dipole Antenna(TX)	Schwarzbeck	UHA9105	AM0082002	Jul. 31, 14	Jul. 31, 15
10	Dipole Antenna(TX)	Schwarzbeck	VHA9103	C01082007	Jul. 31, 14	Jul. 31, 15
11	Tri-log Antenna(RX)	Schwarzbeck	VULB9168WP	288	Jul. 14, 14	Jul. 31, 15
12	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
13	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290932	None	None
14	Digital Multi Meter	Agilent	34401A	US36043517	Jul. 01, 14	Jul. 31, 15
15	Amplifier	Intertek Japan	ZFL-1200GH+L	2013075-2	Jul. 11, 14	Jul. 31, 15
16	Amplifier	TOYO	TPA0118-30	0402	Feb. 23, 15	Feb. 29, 16
17	Attenuator	HUBER + SUHNER	6803.17.B	5111	Feb. 23, 15	Feb. 29, 16

Measuring Cables

No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
R2	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W5	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 09, 15	Jun. 30, 16
R12	Coaxial Cable	SUHNER	SUCOFLEX 104	229603	Feb. 23, 15	Feb. 29, 16
R11	Coaxial Cable	Candox	5B-048-98-98-5000	111130	Feb. 23, 15	Feb. 29, 16
R1	Coaxial Cable	FUJIKURA	5D-2W	KSR00312	Jun. 09, 15	Jun. 30, 16
W13	Coaxial Cable	Suhner	SUCOFLEX106	KSR00207	Jun. 09, 15	Jun. 30, 16

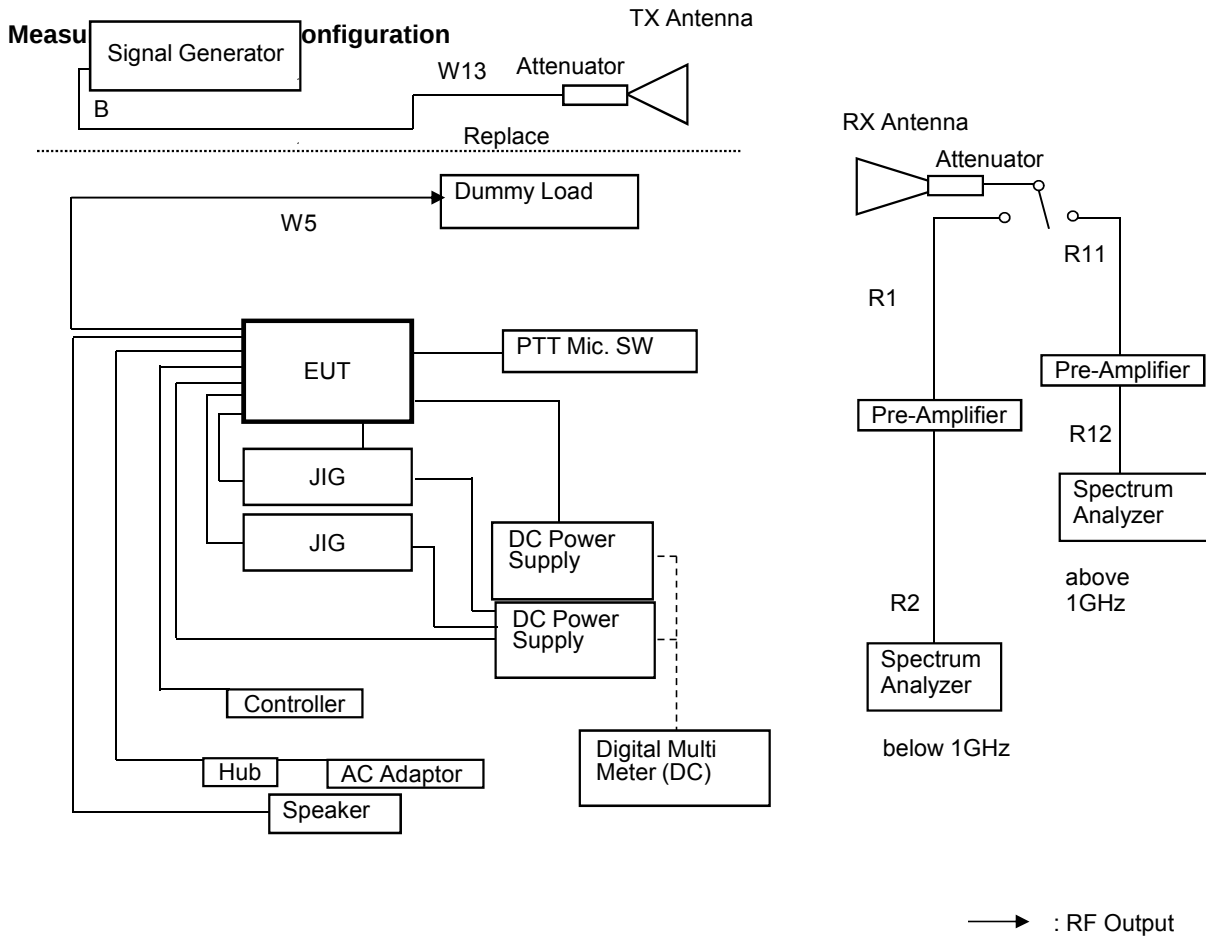

Test Results

Test date	Jul 07, 2015 to Jul 08, 2015
Location	Kashima No.12 Test Site
temperature	21 to 25 [degree C]
Humidity Variation	50 to 60 [%]
Atmospheric Pressure	101.0 to 102.3 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1

State the worst case (below).

State : High Power / Authorized Bandwidth 6 kHz / 162.05MHz(FCC)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBd)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK E Limit Level (dBc)	Margin (dB)
1	324.10	Hor.	-72.70	-64.82	0.00	11.41	-76.2	-120.2	-65.0	55.2
		Ver.	-71.90	-59.33	0.00	11.41	-70.7	-114.7	-65.0	49.7
2	486.15	Hor.	-68.50	-54.37	0.00	11.73	-66.1	-110.1	-65.0	45.1
		Ver.	-70.86	-56.86	0.00	11.73	-68.6	-112.6	-65.0	47.6
3	648.20	Hor.	-	-	0.00	12.01	-	-	-65.0	-
		Ver.	-	-	0.00	12.01	-	-	-65.0	-
4	810.25	Hor.	-72.30	-53.50	0.00	12.24	-65.7	-109.7	-65.0	44.7
		Ver.	-74.30	-52.70	0.00	12.24	-64.9	-108.9	-65.0	43.9
5	972.30	Hor.	-	-	0.00	12.45	-	-	-65.0	-
		Ver.	-	-	0.00	12.45	-	-	-65.0	-
6	1134.35	Hor.	-57.20	-45.40	4.48	12.63	-53.6	-97.5	-65.0	32.5
		Ver.	-59.40	-48.25	4.48	12.63	-56.4	-100.4	-65.0	35.4
7	1296.40	Hor.	-63.00	-52.10	5.31	12.81	-59.6	-103.6	-65.0	38.6
		Ver.	-62.00	-51.57	5.31	12.81	-59.1	-103.0	-65.0	38.0
8	1458.45	Hor.	-	-	6.01	12.98	-	-	-65.0	-
		Ver.	-	-	6.01	12.98	-	-	-65.0	-
9	1620.50	Hor.	-	-	6.27	13.15	-	-	-65.0	-
		Ver.	-62.30	-52.13	6.27	13.15	-59.0	-103.0	-65.0	38.0

There is the margin of 20dB over except for the above points.

Mask E Limit (dBc) = whichever is the lesser attenuation ; $-(55+10\log(P))$ or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBi) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 6 kHz / 173.95MHz(FCC)

State : Low Power / Authorized Bandwidth 0.000000 MHz / 0.000000 MHz

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBd)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK E Limit Level (dBc)	Margin (dB)
1	347.90	Hor.	-	-	0.00	11.45	-	-	-52.0	-
		Ver.	-	-	0.00	11.45	-	-	-52.0	-
2	521.85	Hor.	-76.10	-62.10	0.00	11.80	-73.9	-100.9	-52.0	48.9
		Ver.	-76.50	-61.22	0.00	11.80	-73.0	-100.0	-52.0	48.0
3	695.80	Hor.	-	-	0.00	12.09	-	-	-52.0	-
		Ver.	-	-	0.00	12.09	-	-	-52.0	-
4	869.75	Hor.	-	-	0.00	12.32	-	-	-52.0	-
		Ver.	-	-	0.00	12.32	-	-	-52.0	-
5	1043.70	Hor.	-	-	3.94	12.54	-	-	-52.0	-
		Ver.	-	-	3.94	12.54	-	-	-52.0	-
6	1217.65	Hor.	-62.00	-50.89	4.93	12.72	-58.7	-85.7	-52.0	33.7
		Ver.	-61.20	-50.84	4.93	12.72	-58.6	-85.6	-52.0	33.6
7	1391.60	Hor.	-	-	5.74	12.91	-	-	-52.0	-
		Ver.	-	-	5.74	12.91	-	-	-52.0	-
8	1565.55	Hor.	-	-	6.23	13.09	-	-	-52.0	-
		Ver.	-	-	6.23	13.09	-	-	-52.0	-
9	1739.50	Hor.	-	-	6.33	13.28	-	-	-52.0	-
		Ver.	-	-	6.33	13.28	-	-	-52.0	-

There is the margin of 20dB over except for the above points.

Mask E Limit (dBc) = whichever is the lesser attenuation ; $-(55+10\log(P))$ or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBi) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : High Power / Authorized Bandwidth 6 kHz / 173.95MHz(RSS)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK E Limit Level (dBc)	Margin (dB)
1	347.90	Hor.	-58.60	-50.10	0.00	11.45	-61.6	-105.5	-65.0	40.5
		Ver.	-60.56	-48.35	0.00	11.45	-59.8	-103.8	-65.0	38.8
2	521.85	Hor.	-67.66	-53.66	0.00	11.80	-65.5	-109.4	-65.0	44.4
		Ver.	-69.25	-53.97	0.00	11.80	-65.8	-109.7	-65.0	44.7
3	695.80	Hor.	-72.85	-55.70	0.00	12.09	-67.8	-111.8	-65.0	46.8
		Ver.	-73.35	-54.47	0.00	12.09	-66.6	-110.5	-65.0	45.5
4	869.75	Hor.	-	-	0.00	12.32	-	-	-65.0	-
		Ver.	-	-	0.00	12.32	-	-	-65.0	-
5	1043.70	Hor.	-56.90	-48.05	3.94	12.54	-56.6	-100.6	-65.0	35.6
		Ver.	-56.80	-47.35	3.94	12.54	-55.9	-99.9	-65.0	34.9
6	1217.65	Hor.	-60.80	-49.69	4.93	12.72	-57.5	-101.5	-65.0	36.5
		Ver.	-60.40	-50.04	4.93	12.72	-57.8	-101.8	-65.0	36.8
7	1391.60	Hor.	-	-	5.74	12.91	-	-	-65.0	-
		Ver.	-	-	5.74	12.91	-	-	-65.0	-
8	1565.55	Hor.	-	-	6.23	13.09	-	-	-65.0	-
		Ver.	-	-	6.23	13.09	-	-	-65.0	-
9	1739.50	Hor.	-62.20	-51.27	6.33	13.28	-58.2	-102.2	-65.0	37.2
		Ver.	-61.20	-50.08	6.33	13.28	-57.0	-101.0	-65.0	36.0

There is the margin of 20dB over except for the above points.

Mask E Limit (dBc) = whichever is the lesser attenuation ; $-(55+10\log(P))$ or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dB) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 6 kHz / 158.05MHz(RSS)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK E Limit Level (dBc)	Margin (dB)
1	316.10	Hor.	-73.87	-66.33	0.00	11.39	-77.7	-104.7	-52.0	52.7
		Ver.	-75.45	-63.56	0.00	11.39	-74.9	-101.9	-52.0	49.9
2	474.15	Hor.	-	-	0.00	11.71	-	-	-52.0	-
		Ver.	-	-	0.00	11.71	-	-	-52.0	-
3	632.20	Hor.	-	-	0.00	11.98	-	-	-52.0	-
		Ver.	-	-	0.00	11.98	-	-	-52.0	-
4	790.25	Hor.	-	-	0.00	12.21	-	-	-52.0	-
		Ver.	-	-	0.00	12.21	-	-	-52.0	-
5	948.30	Hor.	-	-	0.00	12.42	-	-	-52.0	-
		Ver.	-	-	0.00	12.42	-	-	-52.0	-
6	1106.35	Hor.	-	-	4.32	12.60	-	-	-52.0	-
		Ver.	-	-	4.32	12.60	-	-	-52.0	-
7	1264.40	Hor.	-61.20	-50.27	5.16	12.77	-57.9	-84.9	-52.0	32.9
		Ver.	-58.70	-48.98	5.16	12.77	-56.6	-83.6	-52.0	31.6
8	1422.45	Hor.	-	-	5.86	12.94	-	-	-52.0	-
		Ver.	-	-	5.86	12.94	-	-	-52.0	-
9	1580.50	Hor.	-	-	6.24	13.11	-	-	-52.0	-
		Ver.	-	-	6.24	13.11	-	-	-52.0	-

There is the margin of 20dB over except for the above points.

Mask E Limit (dBc) = whichever is the lesser attenuation ; $-(55+10\log(P))$ or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dB) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

10.4 Emission Masks (Occupied Bandwidth)

REGULATIONS : FCC Part 2 Section 1049 (c) (1), Part 90 Section 210 / RSS-119 Section 5.5

TEST METHOD/GUIDE : ANSI/TIA-603-D Section 2.2.11.2 / RSS-119 Section 5.5

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 For EUT supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for +/- 2.5 kHz deviation (or 50 % modulation). (FM modulation).
- 3 With level constant, the signal level was increased 16 dB.
- 4 For EUT supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- 5 Adjust the spectrum analyzer for the following setting:
 - a) RBW : 100Hz (Non modulation and Authorized Band 6 kHz),
100Hz (Non modulation and Authorized Band 11.25 kHz),
300Hz (Non modulation and Authorized Band 20 kHz).
 - b) VBW : 10times the RBW (Non modulation , Authorized Band 11.25 kHz and Authorized Band 20 kHz).
 - c) RBW and VBW : 30 kHz (Non Modulation / Digital Modulation).
- 6 The occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
5	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W3	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 15	Jan. 31, 16
W20	USB Adapter	SANWA	USB-CVR59	FXLA00701	None	None
W21	PROGRAMMING INTERFACE Cable	SANWA	KR-MDI	None	None	None

Measuring Equipment Configuration

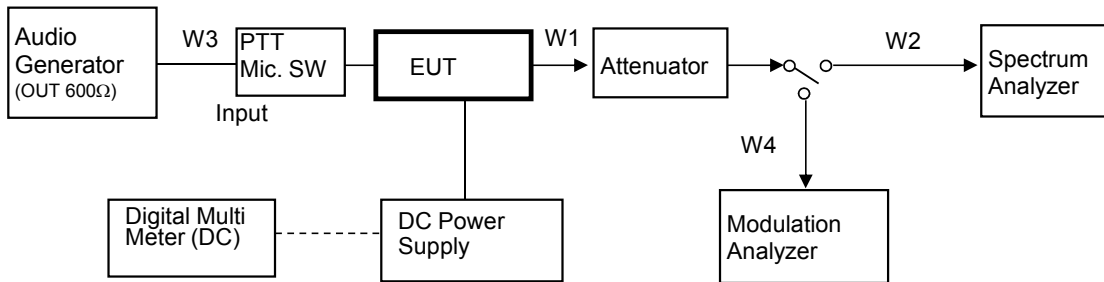


Note: Configuration of other Modulation test is composed without the Audio Generator.



: RF Output

<CW ID Modulation Case>

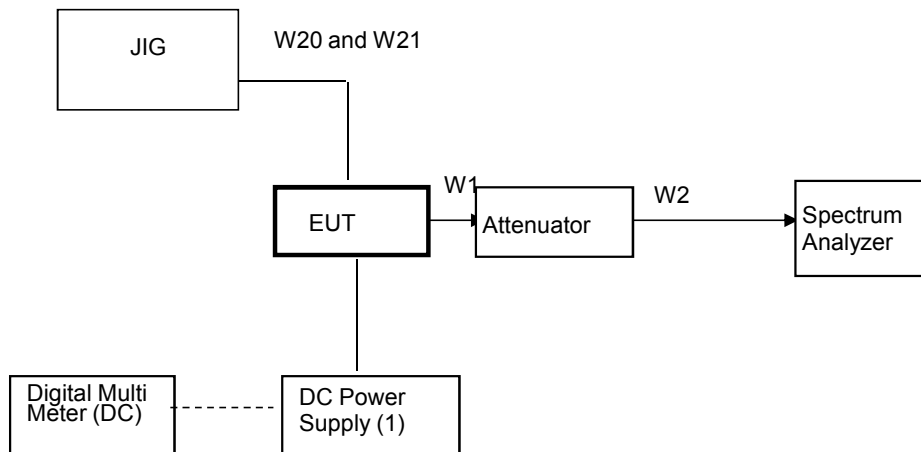

Test Results

: RF Output


Test date	Jun 22, 2015	
Location	Kashima No.1 Test Site	
temperature	23	[degree C]
Humidity Variation	60	[%]
Atmospheric Pressure	101.1	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1

State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 173.95 MHz(RSS)

Limit : Mask B

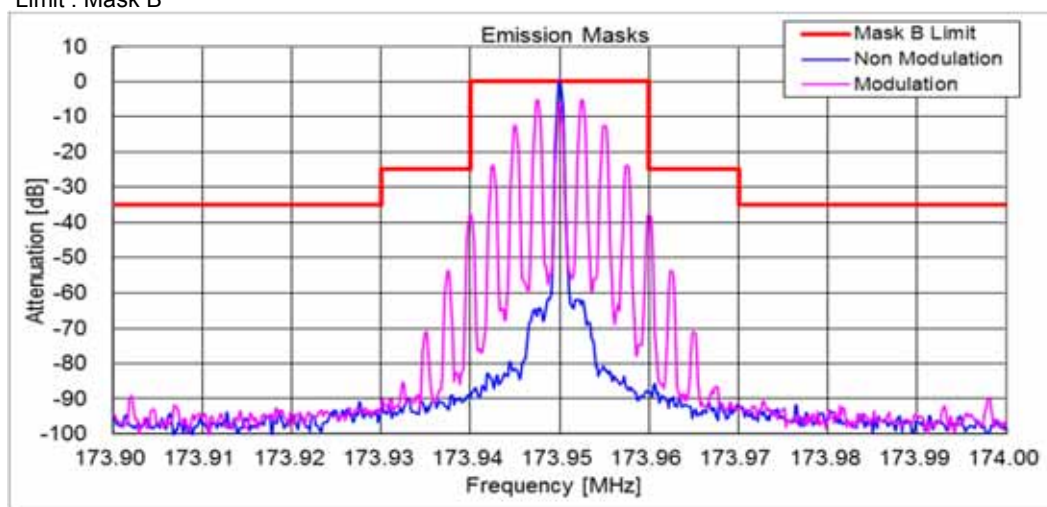


State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 162.05 MHz(FCC)


Limit : Mask D

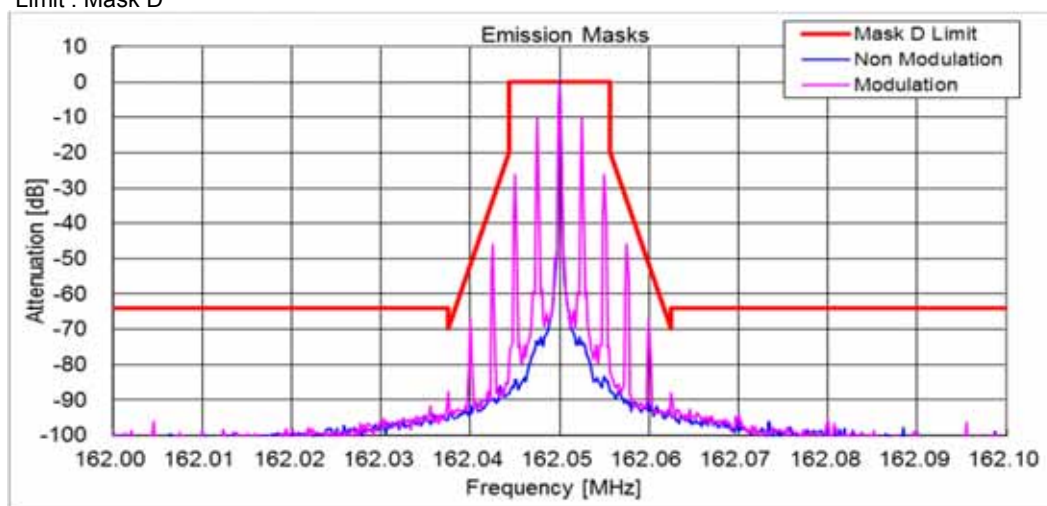


State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 158.05 MHz(RSS)
Limit : Mask D

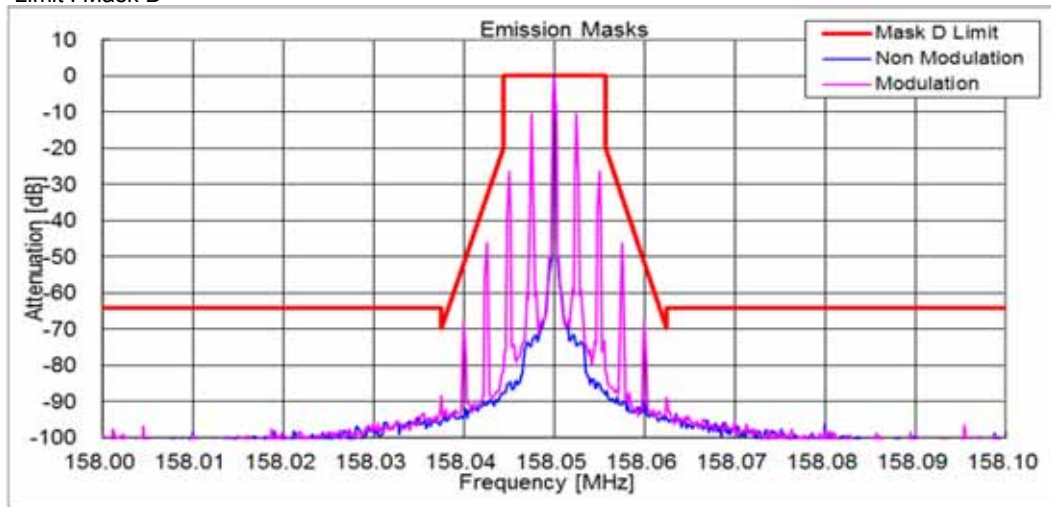


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E / 173.95 MHz(FCC/RSS)
Limit : Mask D

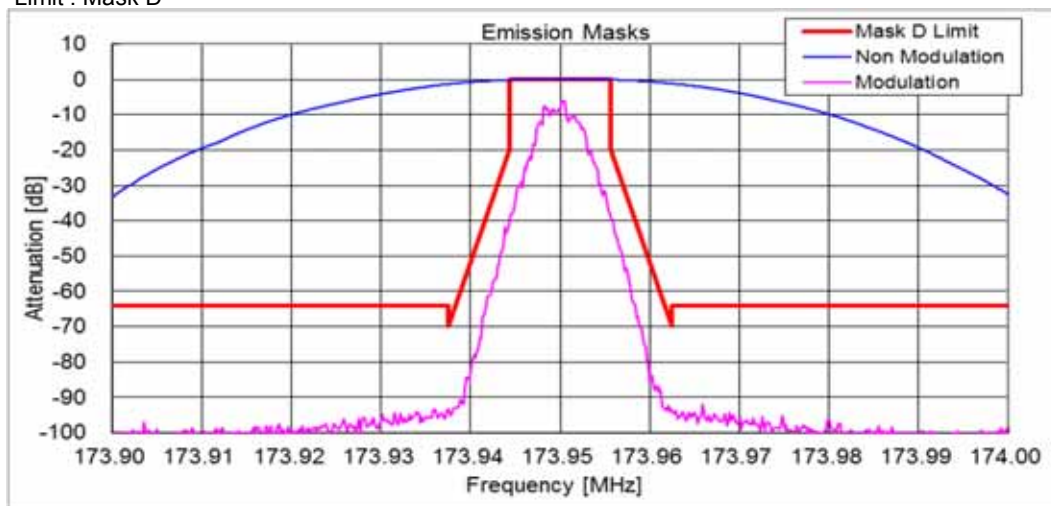


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1D / 173.95 MHz(FCC/RSS)
Limit : Mask D

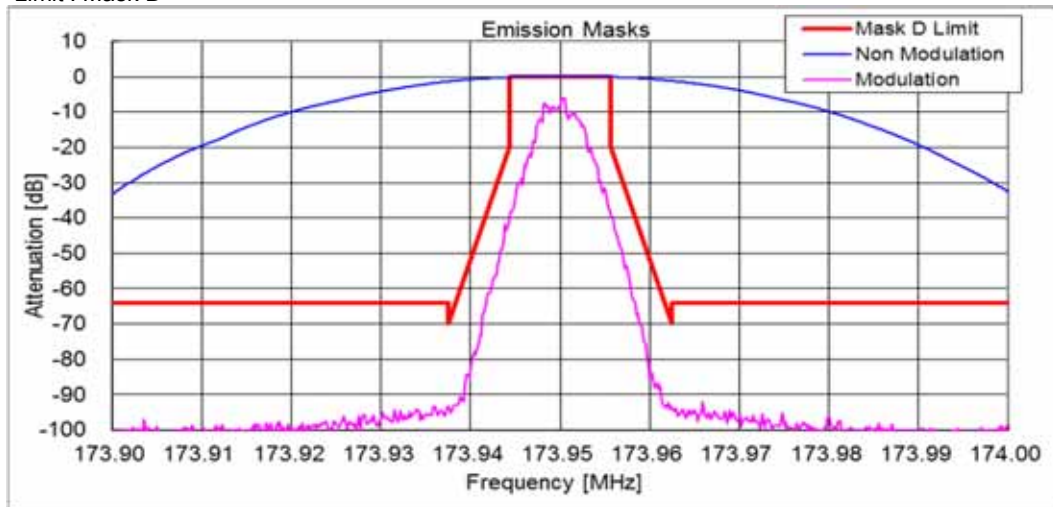


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F7W / 173.95 MHz(FCC/RSS)
Limit : Mask D

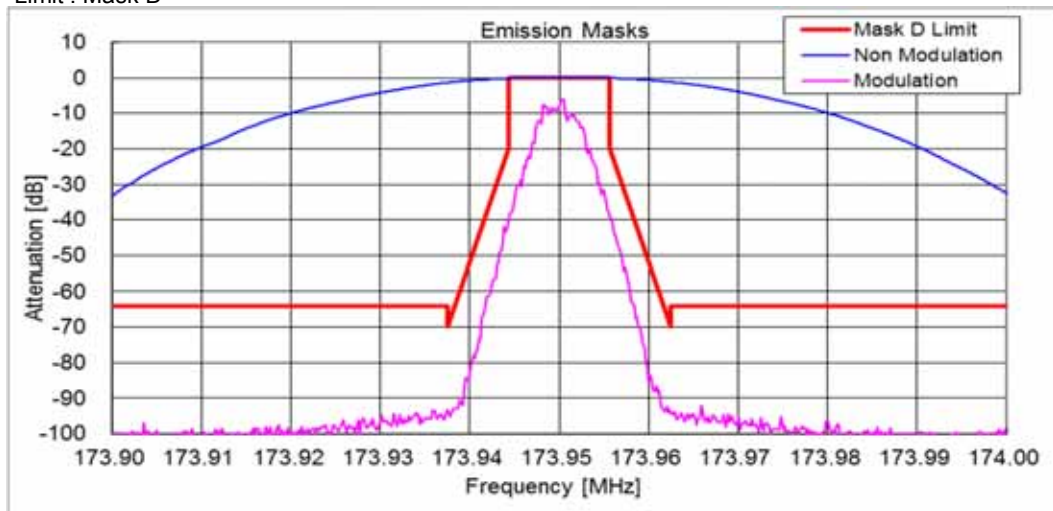


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F1E / 173.95 MHz(FCC/RSS)
Limit : Mask E

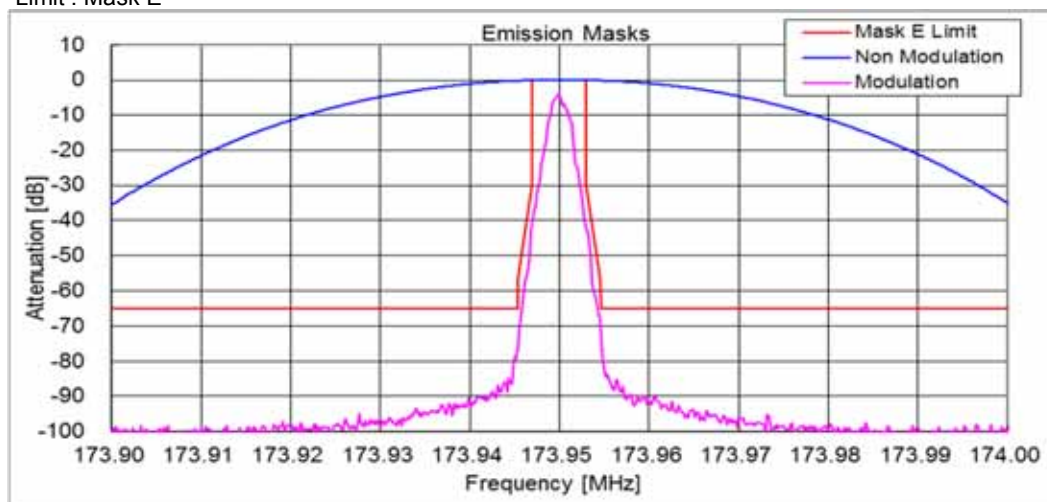


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F1D / 173.95 MHz(FCC/RSS)
Limit : Mask E

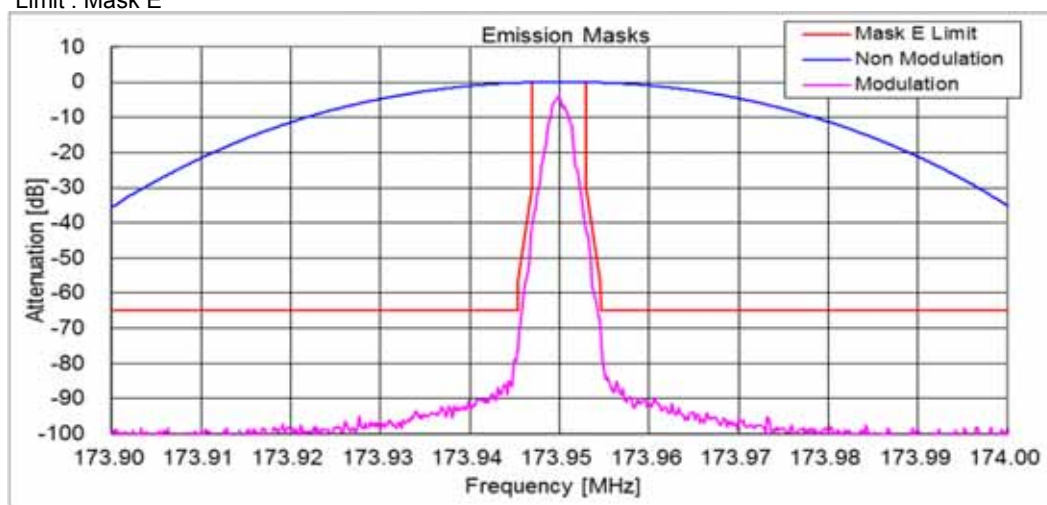


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F7W / 173.95 MHz(FCC/RSS)
Limit : Mask E

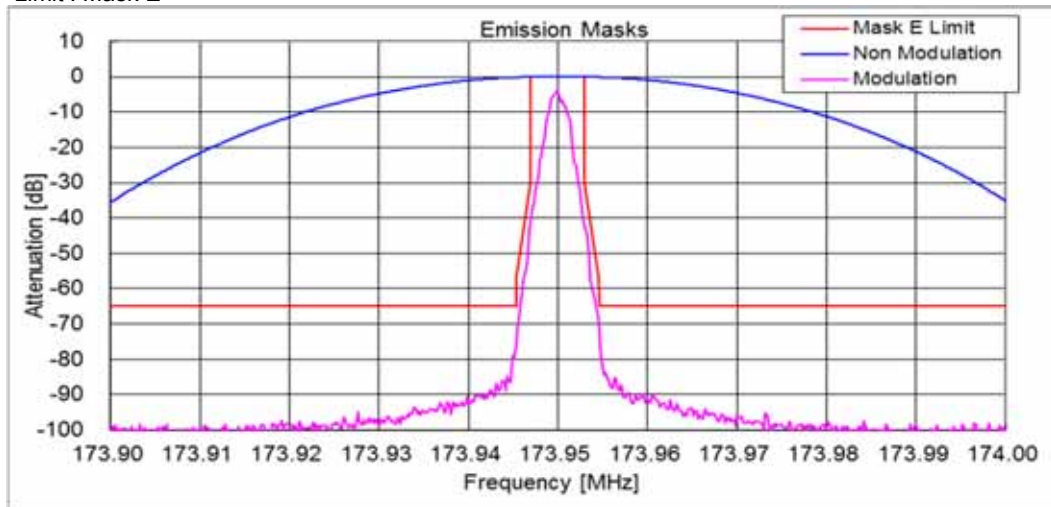


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F2D / 162.05 MHz(FCC)
Limit : Mask E

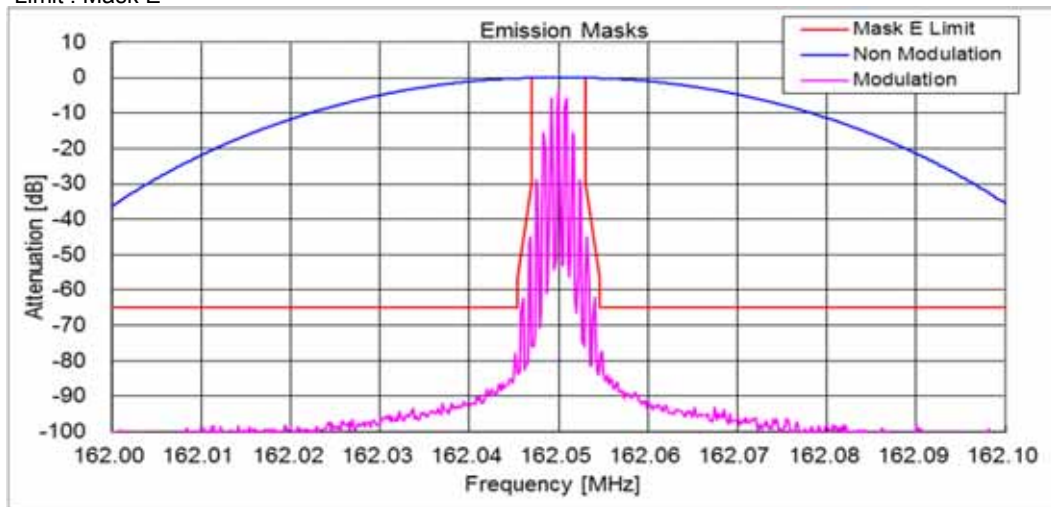


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F2D / 158.05 MHz(RSS)
Limit : Mask E

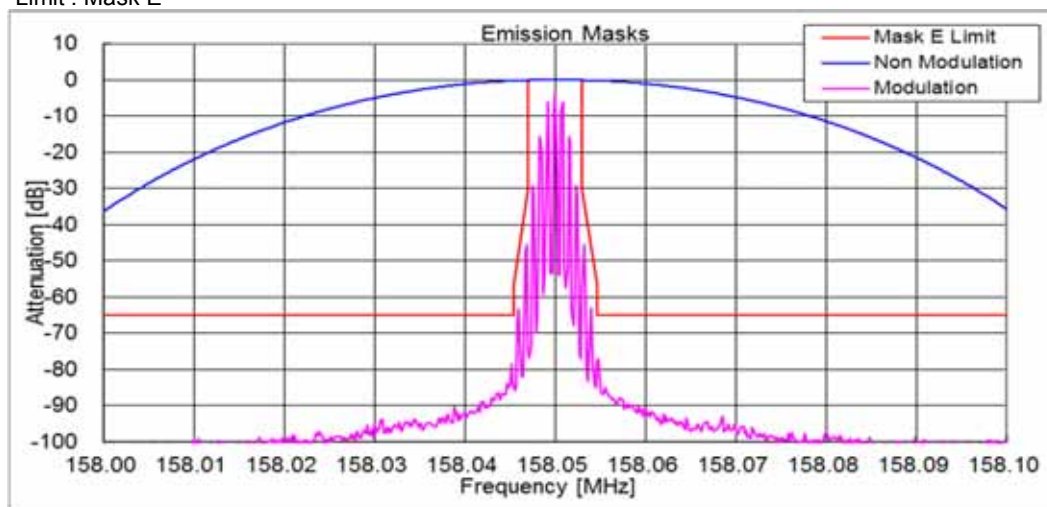


State : Low Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 138.05 MHz(RSS)
Limit : Mask B

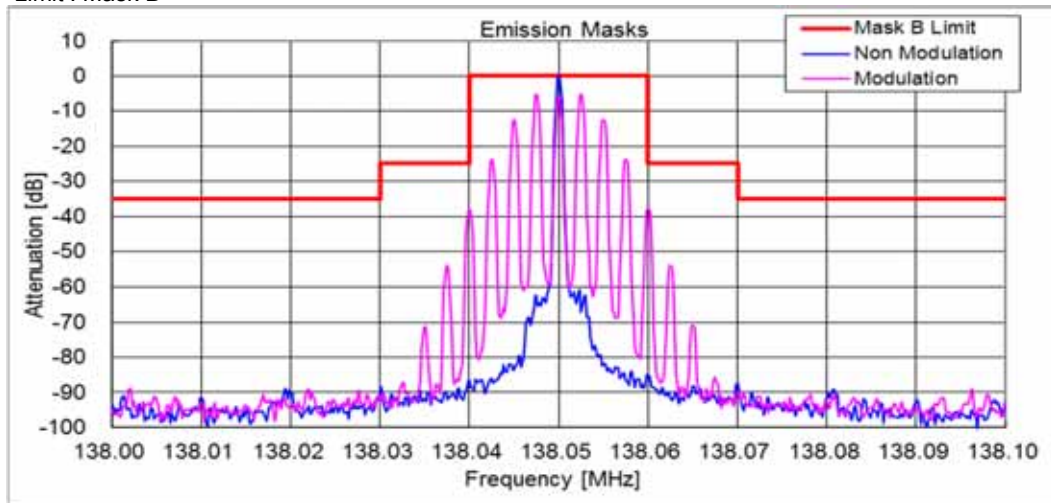


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 162.05 MHz(FCC)
Limit : Mask D

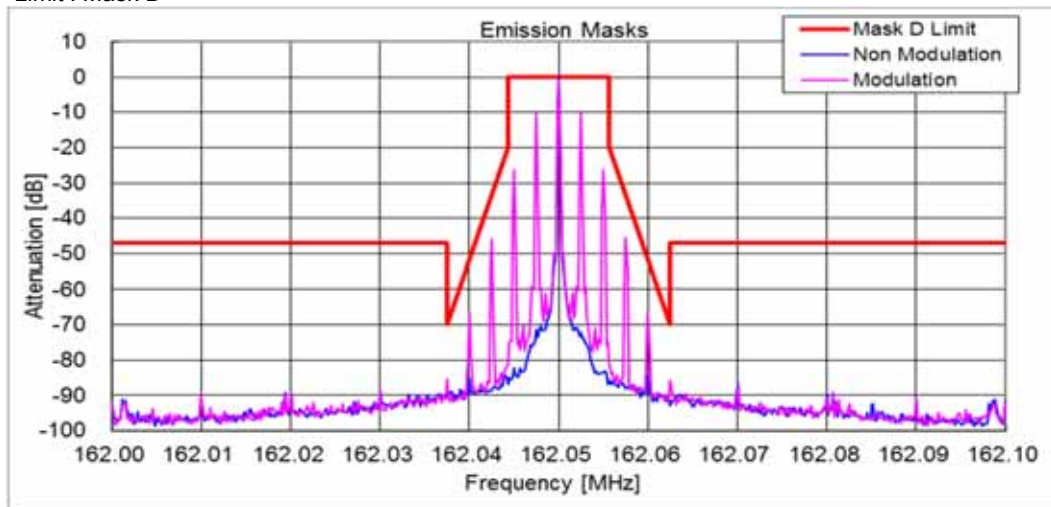


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 158.05 MHz(RSS)
Limit : Mask D

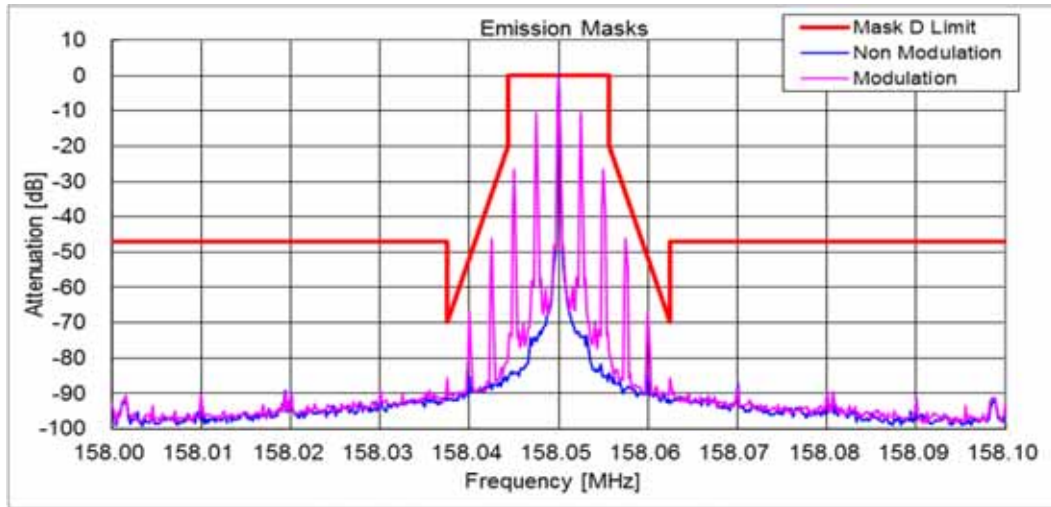


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E / 173.95 MHz(FCC/RSS)
Limit : Mask D

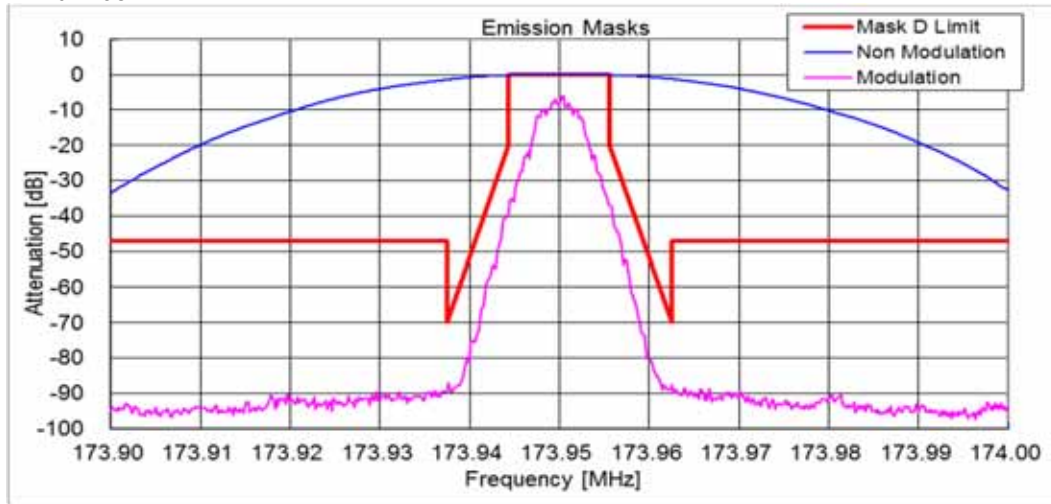


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1D / 173.95 MHz(FCC/RSS)
Limit : Mask D

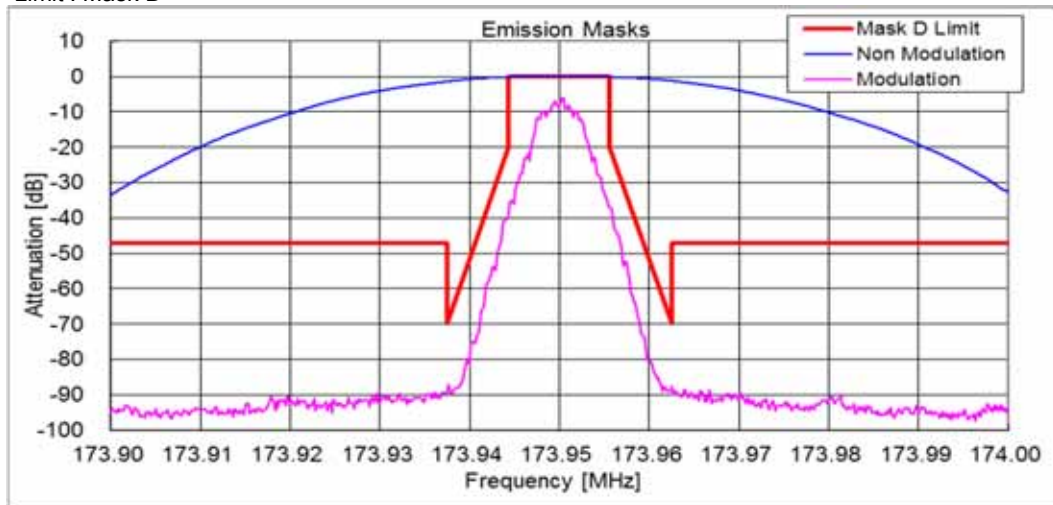


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F7W / 173.95 MHz(FCC/RSS)
Limit : Mask D

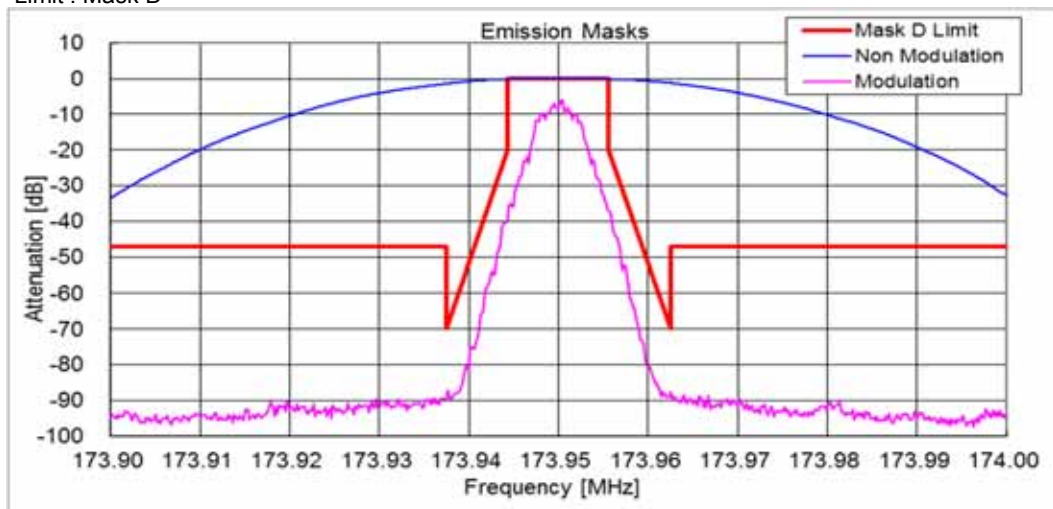


State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F1E / 173.95 MHz(FCC/RSS)
Limit : Mask E

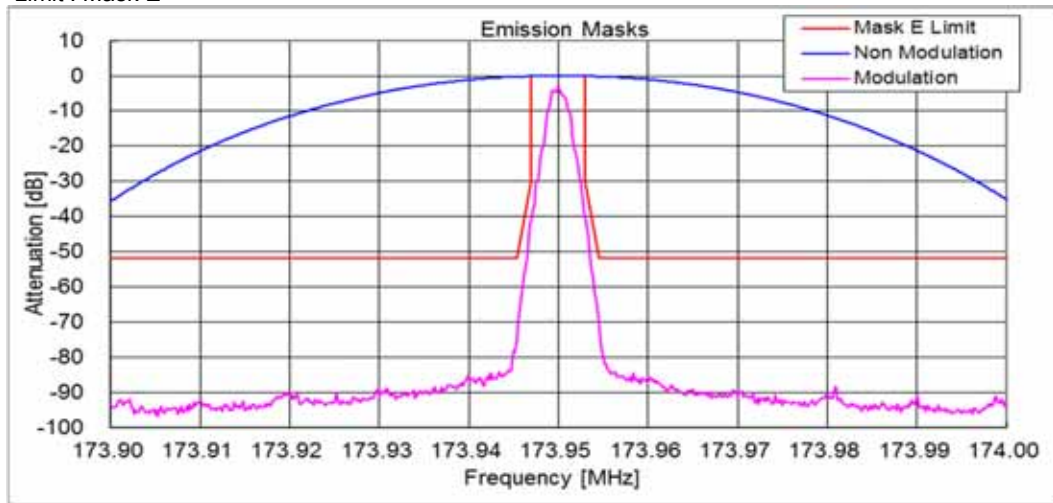


State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F1D / 173.95 MHz(FCC/RSS)
Limit : Mask E

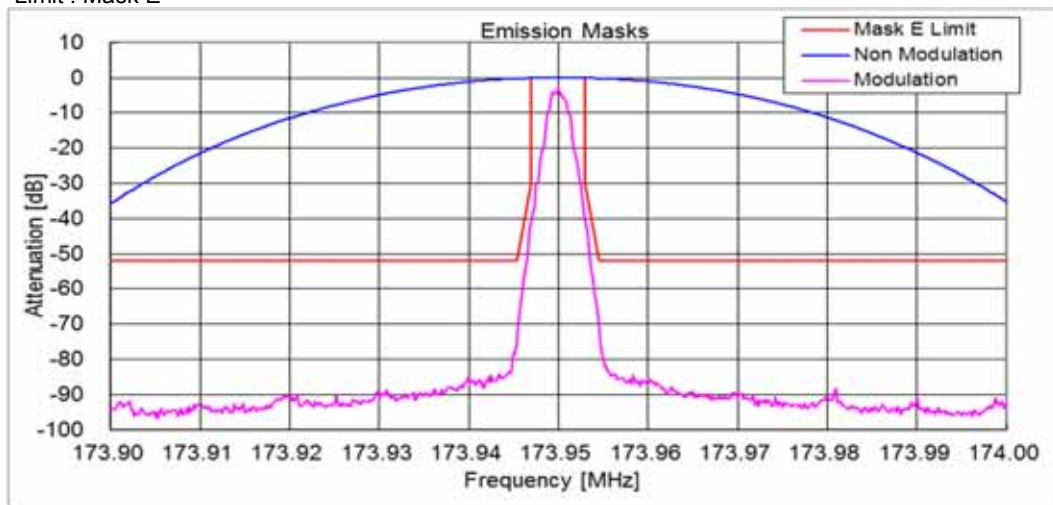


State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F7W / 173.95 MHz(FCC/RSS)
Limit : Mask E

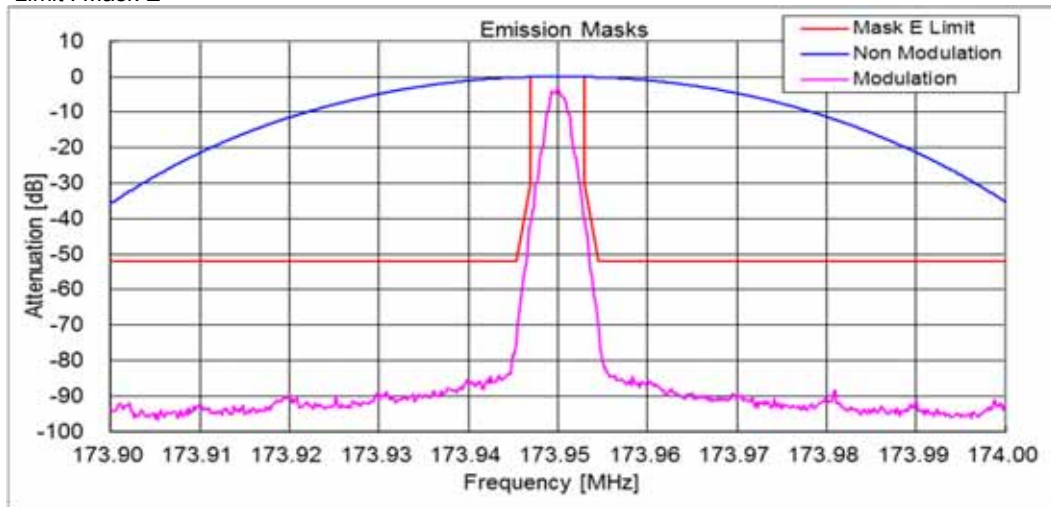

State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F2D / 162.05 MHz(FCC)
Limit : Mask E

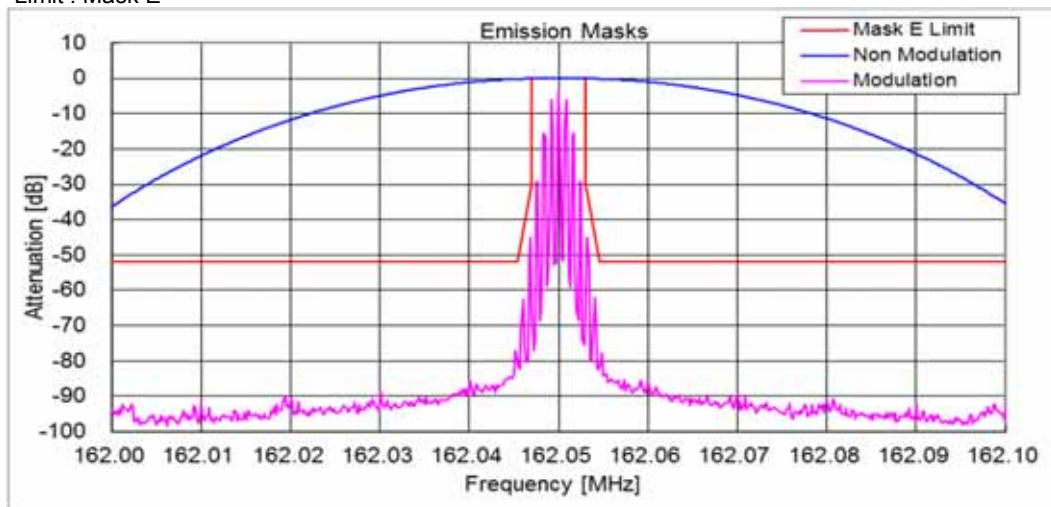

State : Low Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 158.05 MHz(RSS)
Limit : Mask E

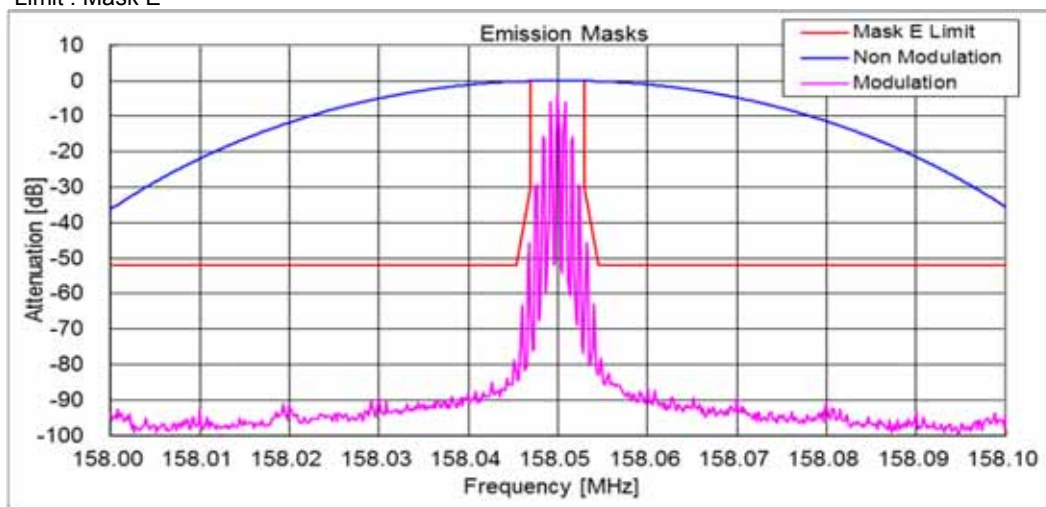

10.5 Transient Frequency Behavior

REGULATIONS : FCC Part 90 Section 214

TEST METHOD/GUIDE : ANSI/TIA-603-D, Section 2.2.19.3


Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The transmitter was turned on.
- 3 The transmitter carrier level was measured at the output of the combiner .
- 4 The transmitter was turned off.
- 5 An RF signal generator (1) modulated with a 1 kHz tone at either 25 kHz or 12.5 kHz or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -30 dB below the level recorded in Procedure 3, as measured at the output of the combiner.
This level was then fixed for the remainder of the test and is recorded at step h.
- 6 The oscilloscope was setup using TIA-603 steps j and k as a guide, however 1000 Hz tone was adjusted at +- 2.5 /div vertically centered on the display.
- 7 The transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
- 8 The carrier on-time as referenced in TIA-603 steps m, n, and o was captured and plotted.
- 9 The carrier off-time as referenced in TIA-603 steps p, q, r, and s was captured and plotted.

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 09, 15	Jun. 30, 16
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 09, 15	Jun. 30, 16
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
4	Attenuator (3dB)	TME	CFA-20NPJ-3	679701	Jun. 01, 15	Jun. 30, 16
5	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
6	Step Attenuator	Hewlett Packard	8494B	272614515	Jan. 23, 15	Jan. 31, 16
7	Combiner(1)	Anritsu	Z-164A	M89249	Jan. 20, 15	Jan. 31, 16
8	Combiner(2)	Anritsu	Z-164A	M89549	Jan. 20, 15	Jan. 31, 16
9	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
10	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
11	Oscilloscope	Tektronix	TDS 680B	B010292	Jan. 30, 15	Jan. 31, 16
12	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
13	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00094	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Jan. 23, 15	Jan. 31, 16
W5	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00041	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

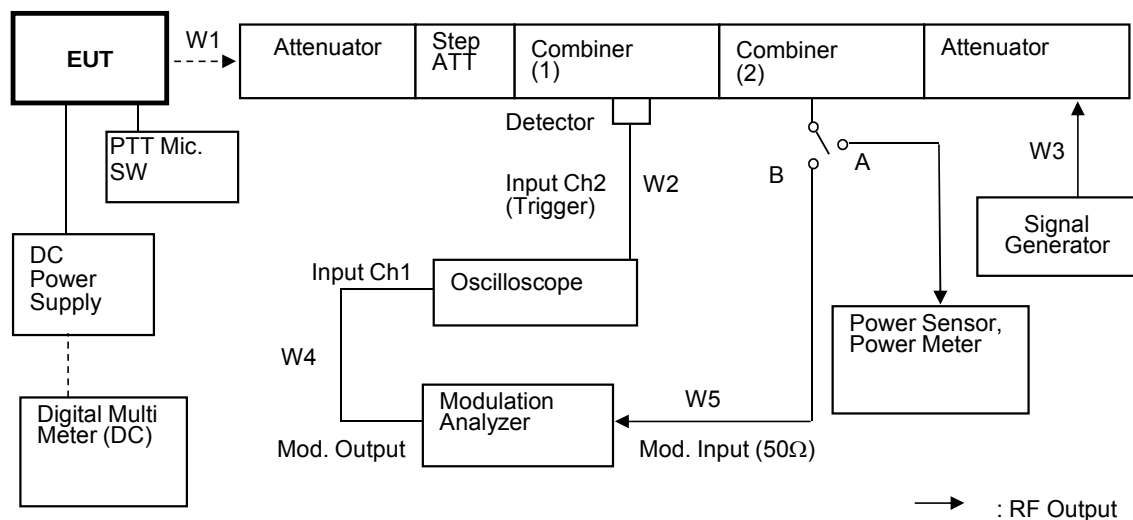
Measuring Equipment Configuration

Test Results


Test date	Jun 24, 2015	
Location	Kashima No.1 Test Site	
temperature	25	[degree C]
Humidity Variation	55	[%]
Atmospheric Pressure	101	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1
State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz (RSS)/ PTT:OFF -ON

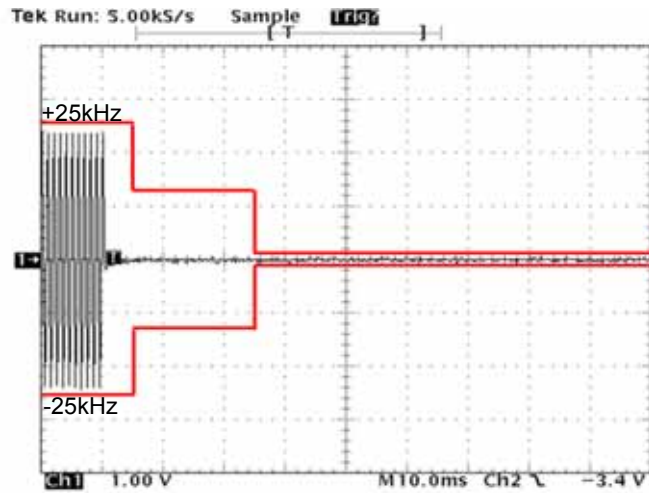


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz (RSS)/ PTT:ON -OFF

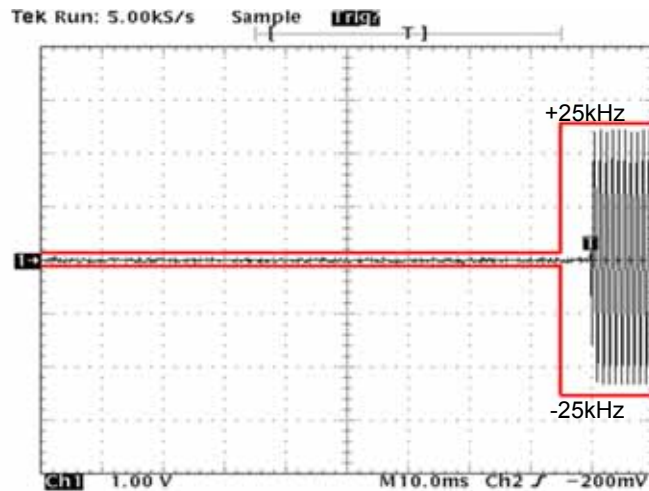


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz (FCC)/ PTT:OFF -ON

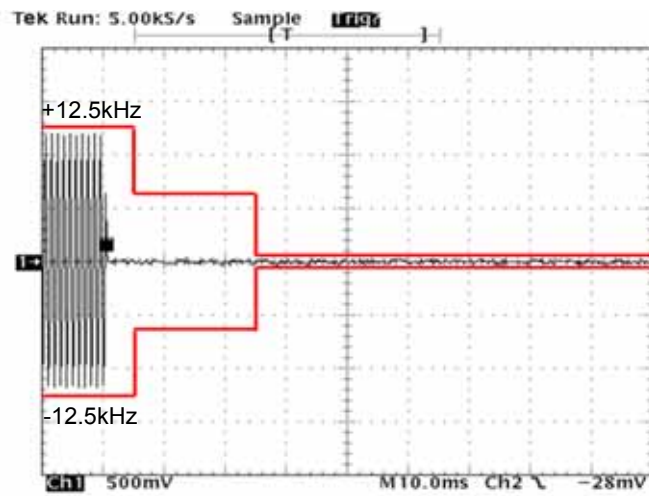


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz (FCC)/ PTT:ON-OFF

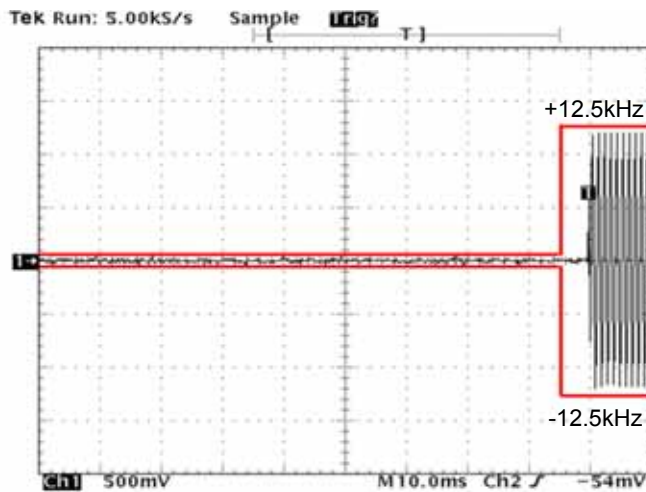


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 158.05 MHz (RSS)/ PTT:OFF -ON

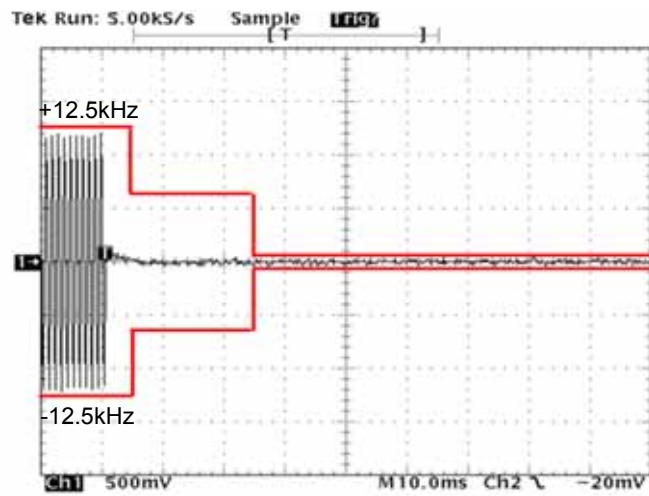


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 158.05 MHz (RSS)/ PTT:ON-OFF

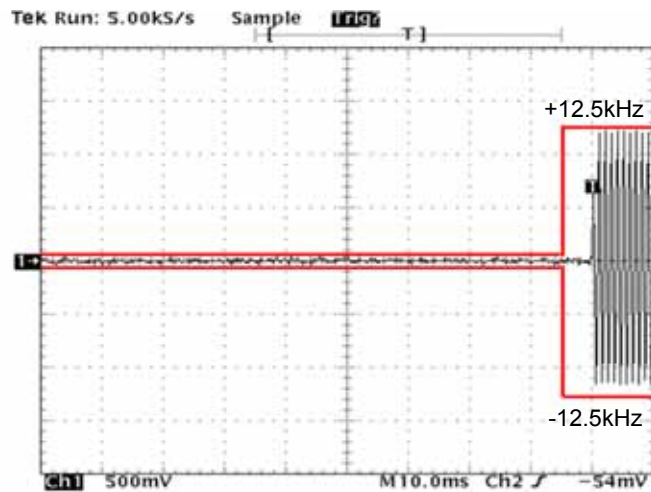


State : High Power / Authorized Bandwidth 11.25 kHz / 8K30F1E/F1D/F7W / 173.95 MHz (FCC/RSS)/ PTT:OFF -ON

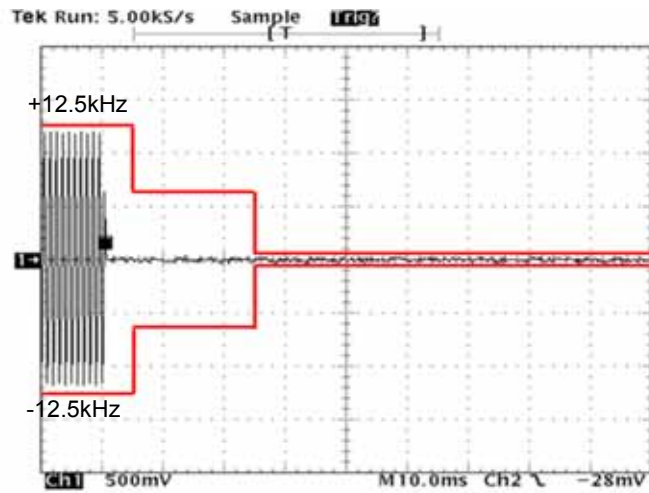


State : High Power / Authorized Bandwidth 11.25 kHz / 8K30F1E/F1D/F7W / 173.95 MHz (FCC/RSS)/ PTT:ON-OFF

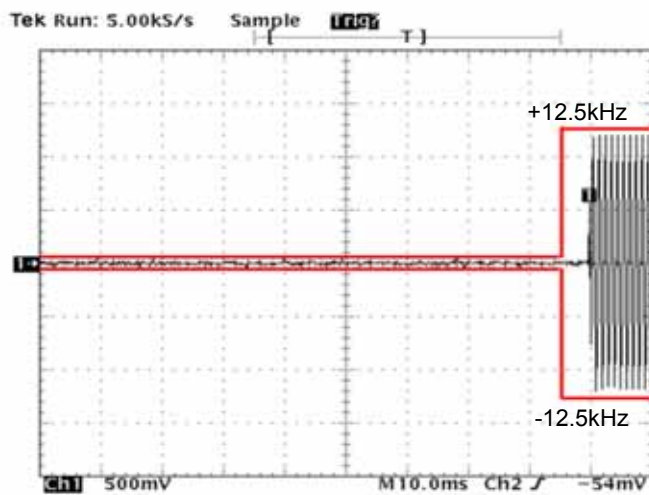


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E / F1D / F7W / 162.05 MHz (FCC)/ PTT:OFF -ON

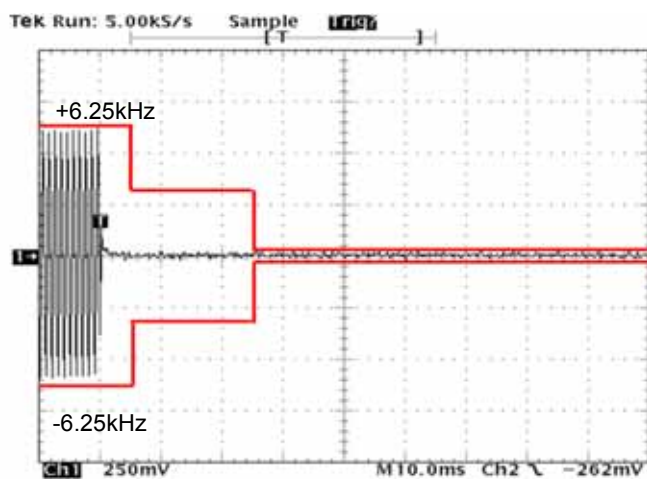


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E / F1D / F7W / 162.05 MHz (FCC)/ PTT:ON-OFF

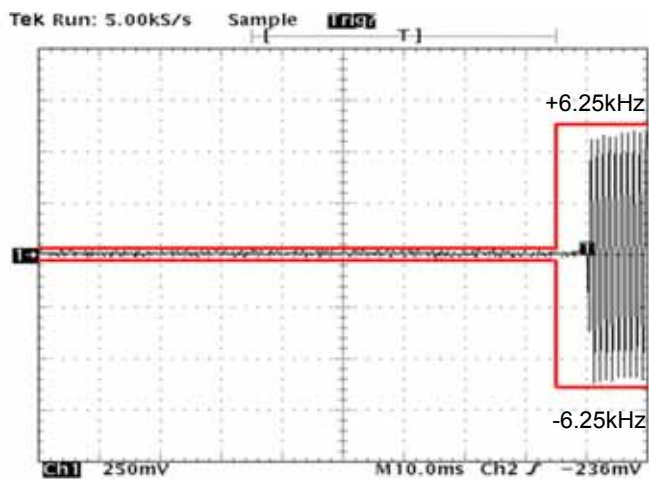


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E / F1D / F7W / 138.05 MHz (RSS)/ PTT:OFF -ON

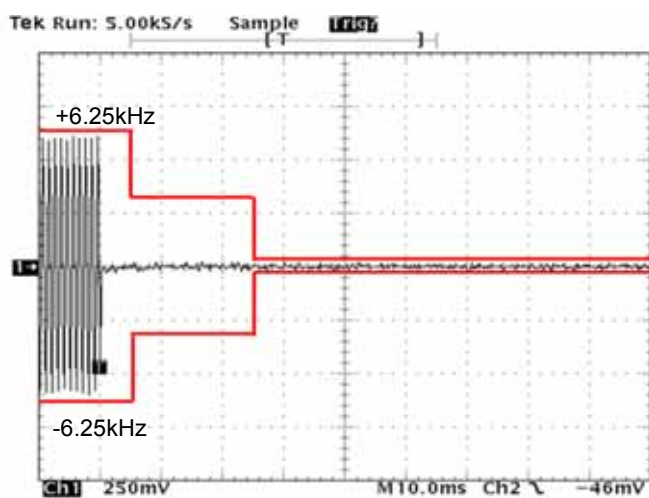


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E / F1D / F7W / 138.05 MHz (RSS)/ PTT:ON-OFF

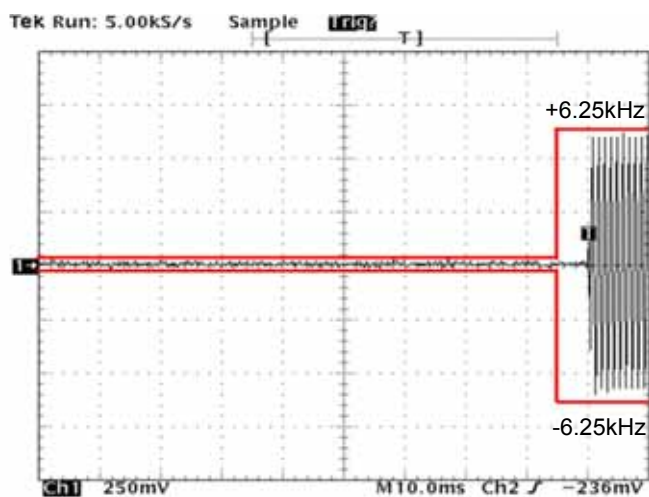

State : High Power / Authorized Bandwidth 6 kHz / 4K00F2D / 173.95 MHz (FCC/RSS)/ PTT:OFF -ON

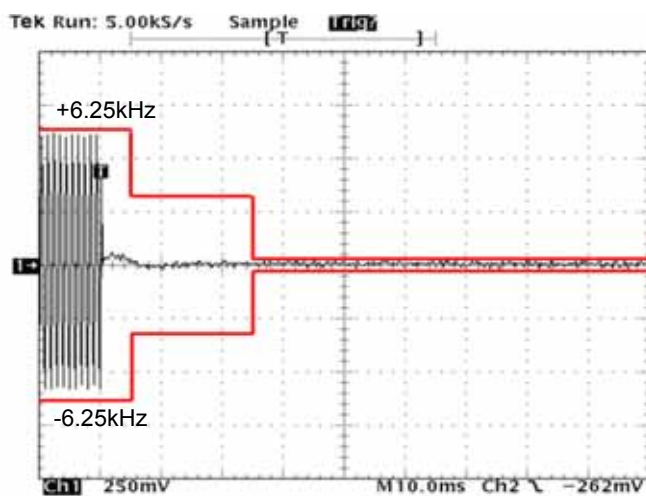

State : High Power / Authorized Bandwidth 6 kHz / 4K00F2D / 173.95 MHz (FCC/RSS)/ PTT:ON-OFF

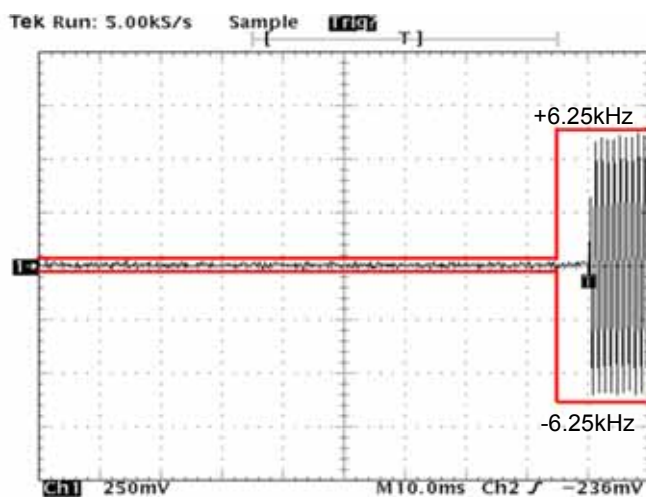

10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)

REGULATIONS : FCC Part 2 Section 1047 (a)

TEST METHOD/GUIDE : ANSI/TIA-603-D Section 2.2.6.2.2, 3.2.6.2

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
 - a) High-pass filter : 50 Hz
 - b) Low-pass filter : 15 kHz
 - c) Detector : positive peak
 - d) Function : FM
- 3 The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- 4 With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 5 kHz.
- 5 The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
5	Audio Analyzer	Hewlett Packard	8903B	2818A04372	Jul. 19, 14	Jul. 31, 15
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Jan. 23, 15	Jan. 31, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

Measuring Equipment Configuration

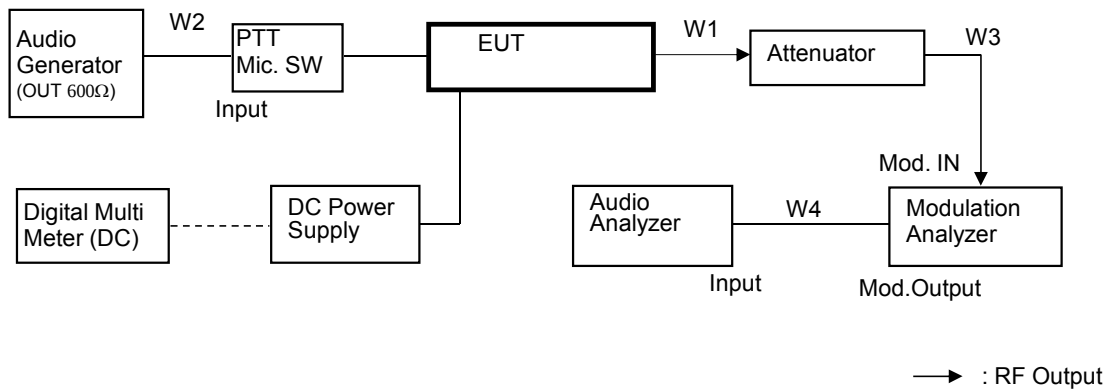


Test Results

Test date	Jun 24, 2015	
Location	Kashima No.1 Test Site	
temperature	25	[degree C]
Humidity Variation	50	[%]
Atmospheric Pressure	101	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1

State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz(RSS)

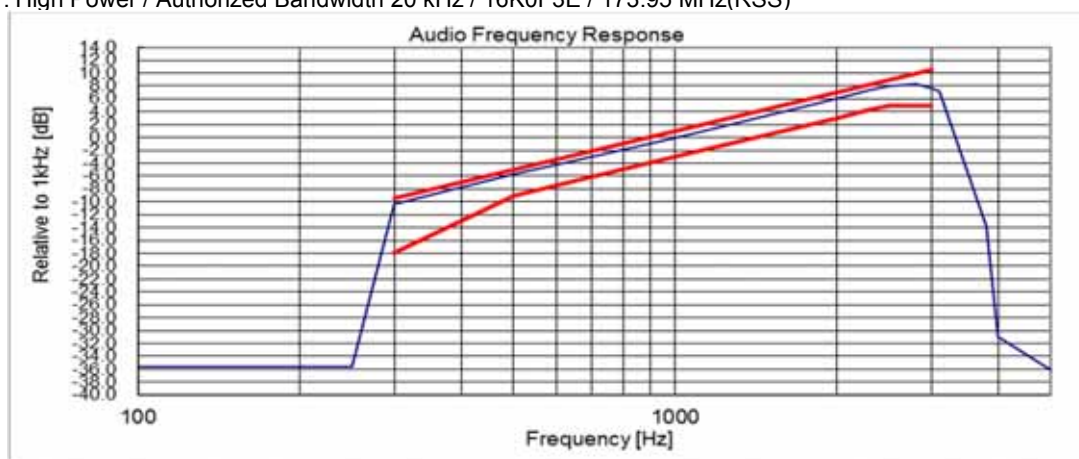**Note:**


Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.

On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz(FCC)

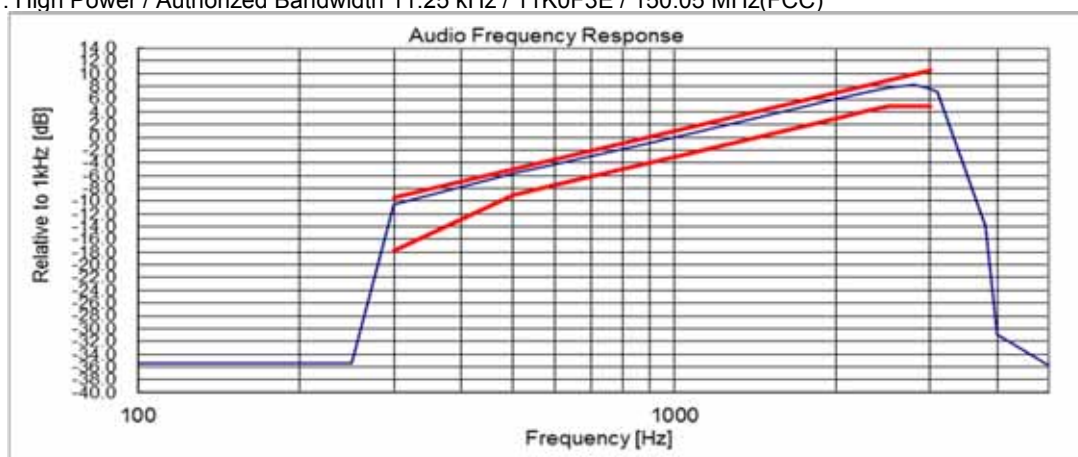

Note:


Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.

On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 173.95 MHz(RSS)

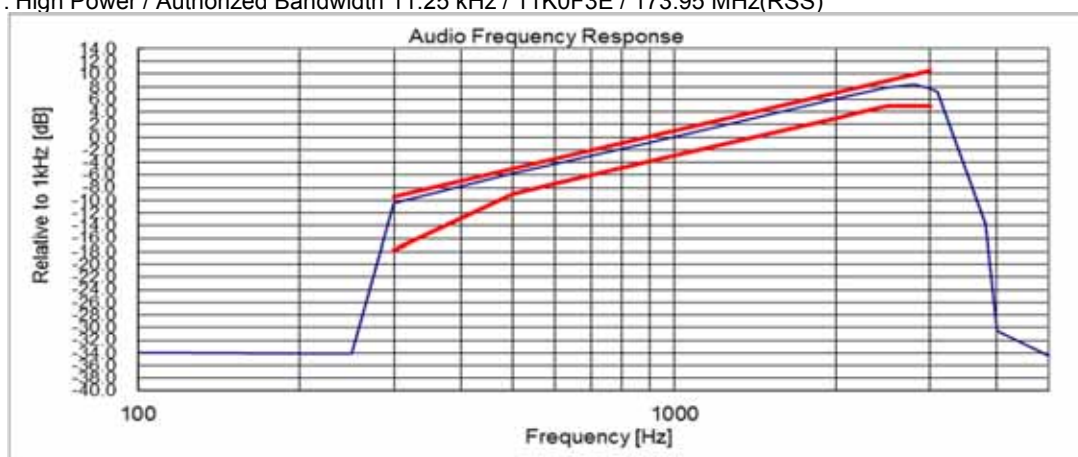

Note:

Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.

On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

10.7 Modulation Limiting

REGULATIONS	: FCC Part 2 Section 1047 (b)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.3.2, 1.3.4.4

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
 - a) High-pass filter : off
 - b) Low-pass filter : 15 kHz
 - c) Detector : positive peak
 - d) Function : FM
- 3 Apply a 1kHz modulation signal to the transmitter from the audio generator, and adjust the level to obtain 60% of full rated system deviation.
- 4 Measure the modulation frequency that was showed on the Modulation Analyzer when the output levels of the Audio Generator were changed from -20 dB to +50 dB by 10 dB.
- 5 Set the output frequencies of the Audio Generator 300 Hz and 3 kHz, and repeat test procedure 4.
- 6 Set the Detector of the Modulation Analyzer Negative Peak.
- 7 Repeat test procedure 4 and 5.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
5	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
4	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

Measuring Equipment Configuration

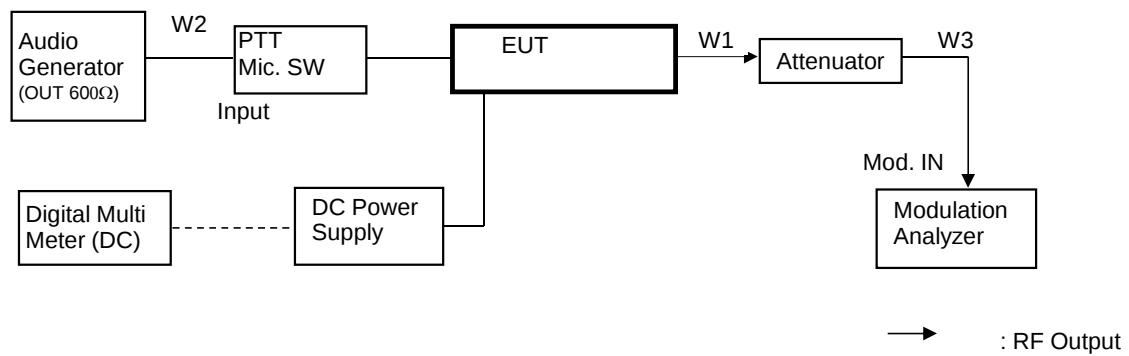


Test Results


Test date	Jun 24, 2015		
Location	Kashima No.1 Test Site		
temperature	26	[degree C]	
Humidity Variation	50	[%]	
Atmospheric Pressure	101	[kPa]	
Test Engineer	Koichi Wagatsuma		

Test was carried out for all the frequency band of section 10.1
State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz(RSS)

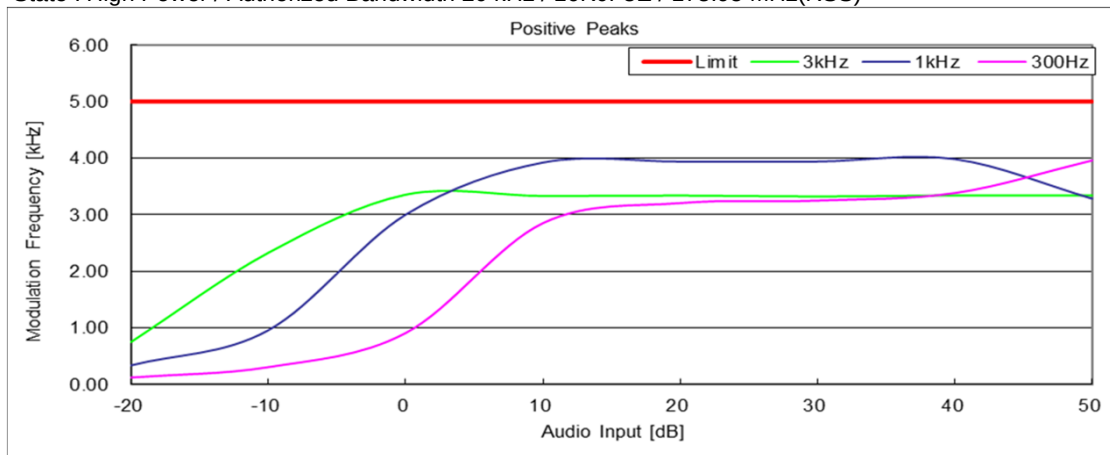


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz(RSS)

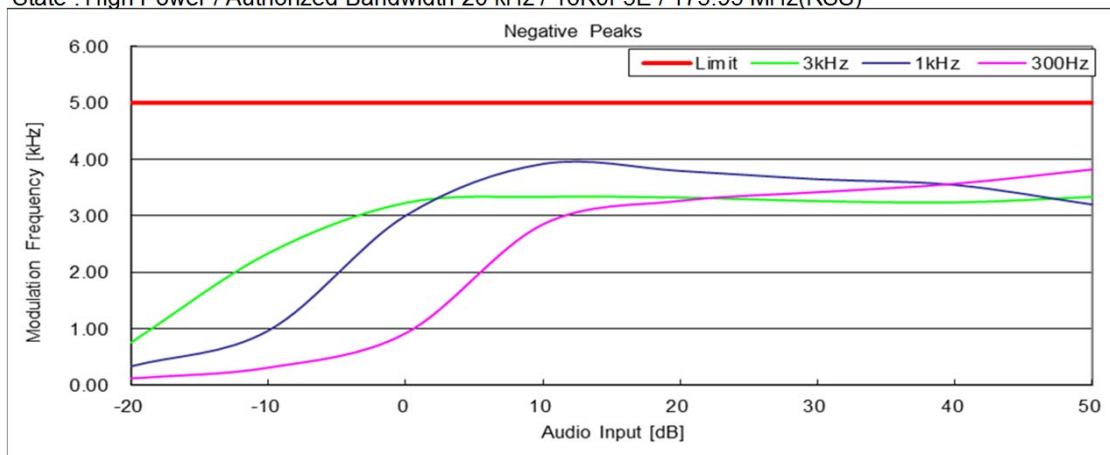


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz(FCC)

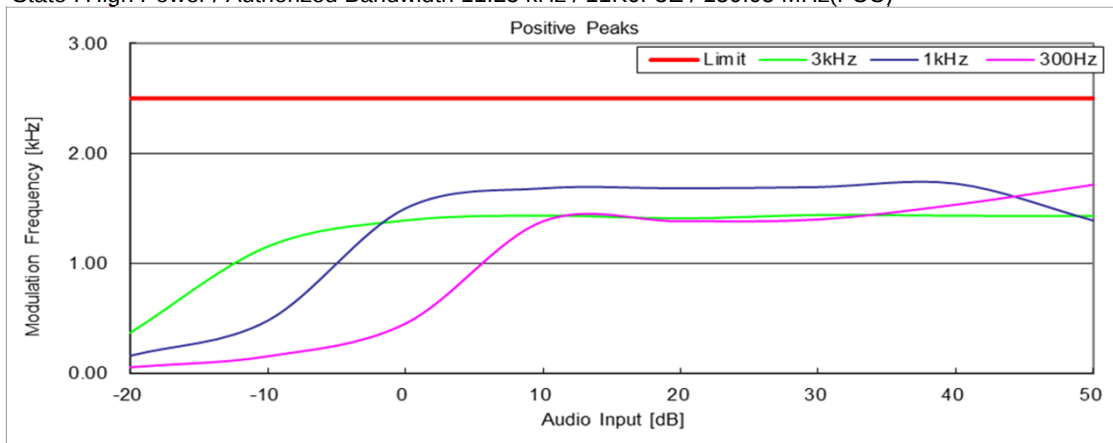


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz(FCC)

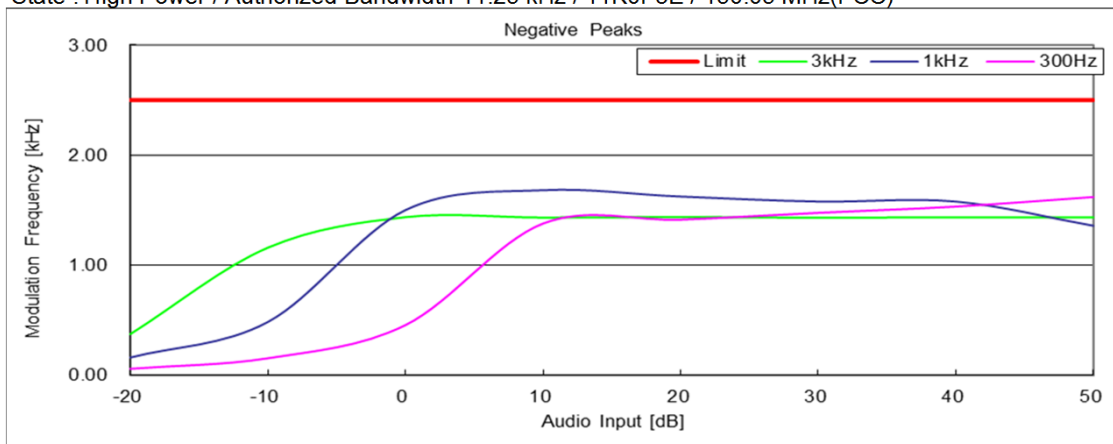

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 173.95 MHz(RSS)

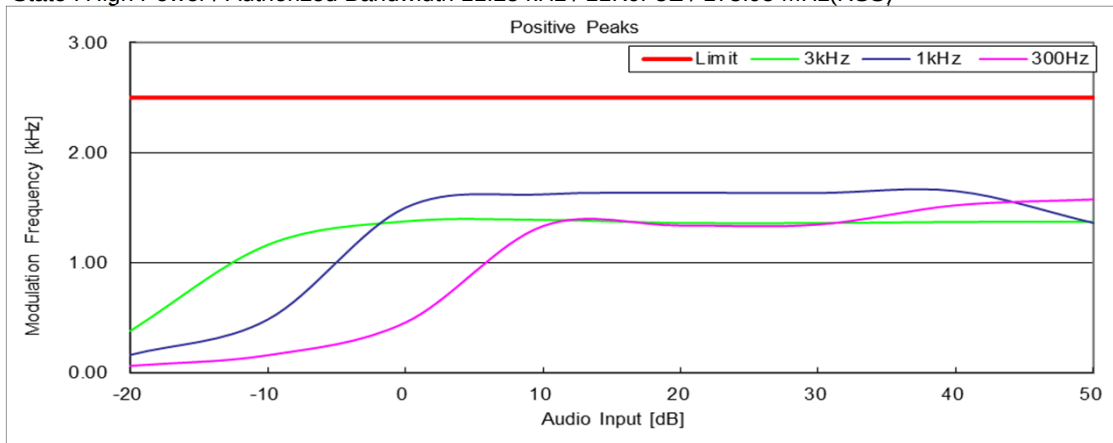

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 173.95 MHz(RSS)

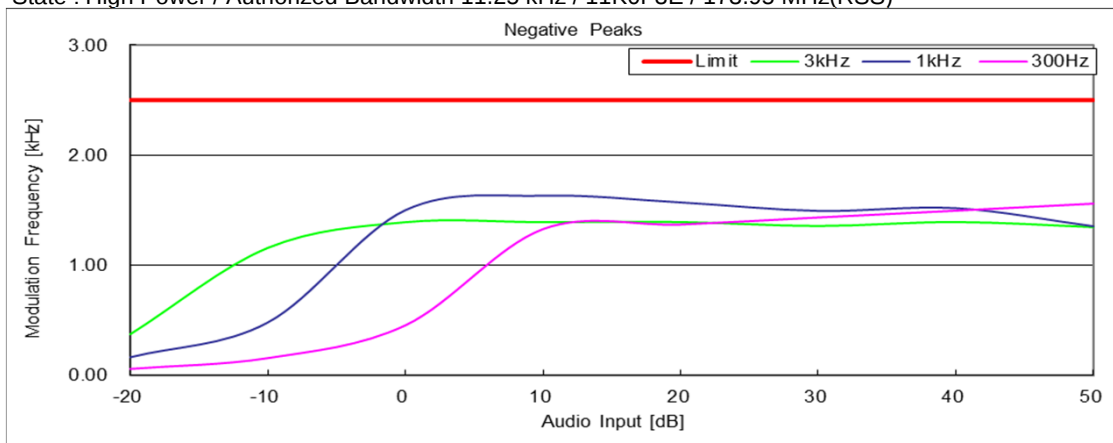

10.8 Frequency Stability (Temperature Variation)

REGULATIONS : FCC Part 2 Section 1055 (a) (1), Part 90 Section 213(a)

TEST METHOD/GUIDE : ANSI/TIA-603-D Section 2.2.2.2

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Set the temperature -30 degrees C.
- 3 Leave the EUT for 1 hour after it became the temperature that was set up.
- 4 Make the EUT the transmitting state.
One minutes later, measure the output frequency.
- 5 Make the EUT the receiving state.
- 6 Set the temperature 50 degrees C by 10 degrees C.
And repeat test procedure 3 to 5.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8924	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
4	DC Power Supply	Takasago	GP035-20R	1014199060	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16
6	Temperature Chamber	Tabai	PL-3F	5103661	None	None
7	Temperature Meter	Sato	PC-5000TRH-II	A11999972	Jun. 23, 15	Jun. 30, 16
8	GPS Receiver	Hewlett Packard	HP Z3801A	3542A02414	None	None

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 09, 15	Jun. 30, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 09, 15	Jun. 30, 16

Measuring Equipment Configuration

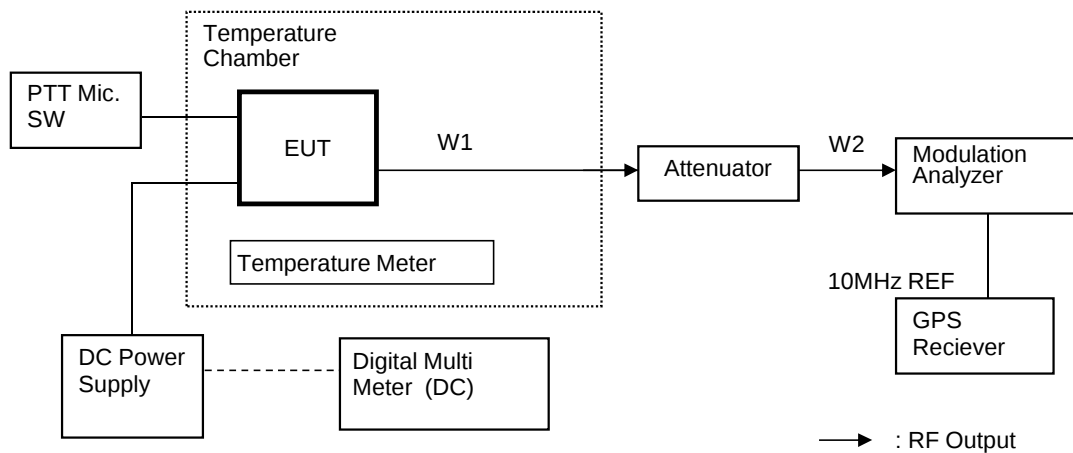

Test Results


Test date	Jul 28, 2015	to	Jul 29, 2015
Location	Kashima No.1 Test Site		
Test Engineer	Koichi Wagatsuma		

Test was carried out for all the frequency band of section 10.1
State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05 MHz (FCC)(with OCXO)

Reference Frequency: 150.050000 MHz(FCC Stability)
150.050000 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	150.050000	0.00	0.00	0.1	0.10
2	-20	150.050000	0.00	0.00	0.1	0.10
3	-10	150.050000	0.00	0.00	0.1	0.10
4	0	150.050000	0.00	0.00	0.1	0.10
5	10	150.050000	0.00	0.00	0.1	0.10
6	20	150.050000	0.00	0.00	0.1	0.10
7	30	150.049990	-0.07	-0.07	0.1	0.03
8	40	150.050000	0.00	0.00	0.1	0.10
9	50	150.050000	0.00	0.00	0.1	0.10

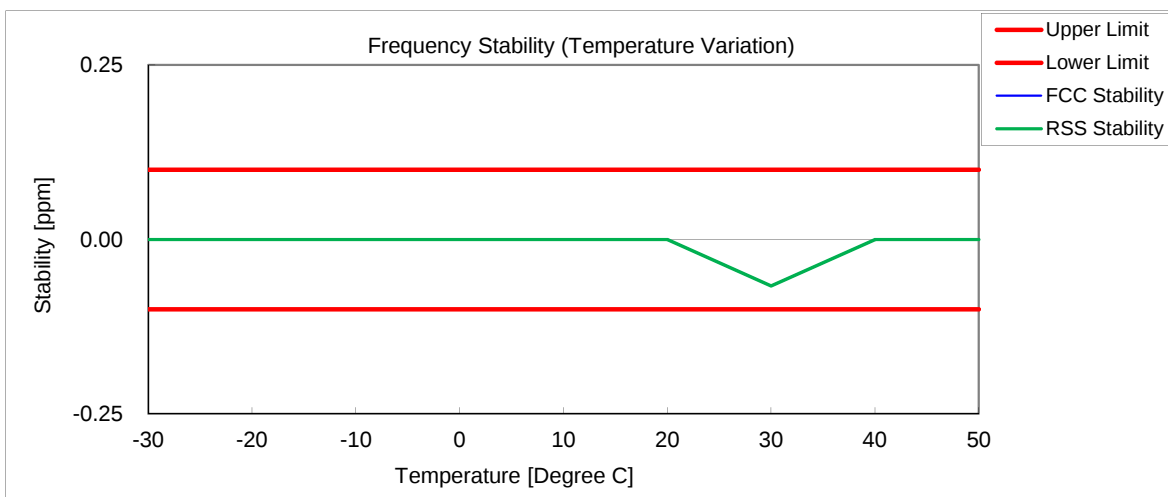


State : High Power / Authorized Bandwidth 20 kHz / 138.05 MHz (RSS)(with OCXO)

Reference Frequency: 138.050000 MHz(FCC Stability)

138.050000 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	138.050000	0.00	0.00	0.1	0.10
2	-20	138.050000	0.00	0.00	0.1	0.10
3	-10	138.050000	0.00	0.00	0.1	0.10
4	0	138.049990	-0.07	-0.07	0.1	0.03
5	10	138.049990	-0.07	-0.07	0.1	0.03
6	20	138.050000	0.00	0.00	0.1	0.10
7	30	138.050000	0.00	0.00	0.1	0.10
8	40	138.050000	0.00	0.00	0.1	0.10
9	50	138.049990	-0.07	-0.07	0.1	0.03

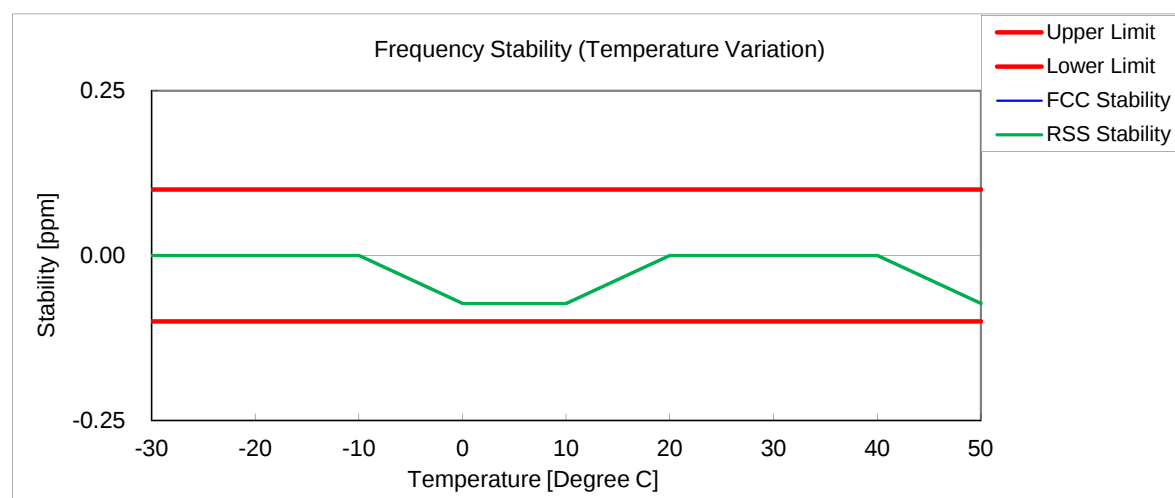


State : High Power / Authorized Bandwidth 11.25 kHz / 173.95 MHz (FCC)(Without OCXO)

Reference Frequency: 173.950000 MHz(FCC Stability)

173.950000 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	173.950040	0.23	0.23	0.5	0.27
2	-20	173.950030	0.17	0.17	0.5	0.33
3	-10	173.950020	0.11	0.11	0.5	0.39
4	0	173.950020	0.11	0.11	0.5	0.39
5	10	173.950010	0.06	0.06	0.5	0.44
6	20	173.950000	0.00	0.00	0.5	0.50
7	30	173.950000	0.00	0.00	0.5	0.50
8	40	173.950000	0.00	0.00	0.5	0.50
9	50	173.950000	0.00	0.00	0.5	0.50

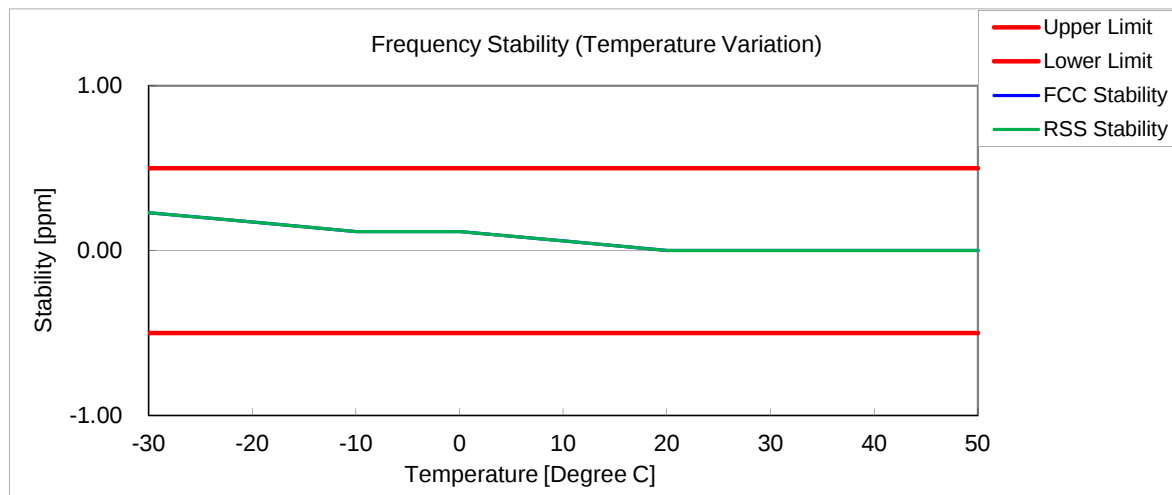


State : High Power / Authorized Bandwidth 20 kHz / 158.05 MHz (RSS)(Without OCXO)

Reference Frequency: 158.050000 MHz(FCC Stability)

158.050000 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	158.050040	0.25	0.25	0.5	0.25
2	-20	158.050030	0.19	0.19	0.5	0.31
3	-10	158.050020	0.13	0.13	0.5	0.37
4	0	158.050020	0.13	0.13	0.5	0.37
5	10	158.050010	0.06	0.06	0.5	0.44
6	20	158.050000	0.00	0.00	0.5	0.50
7	30	158.050000	0.00	0.00	0.5	0.50
8	40	158.050000	0.00	0.00	0.5	0.50
9	50	158.050010	0.06	0.06	0.5	0.44

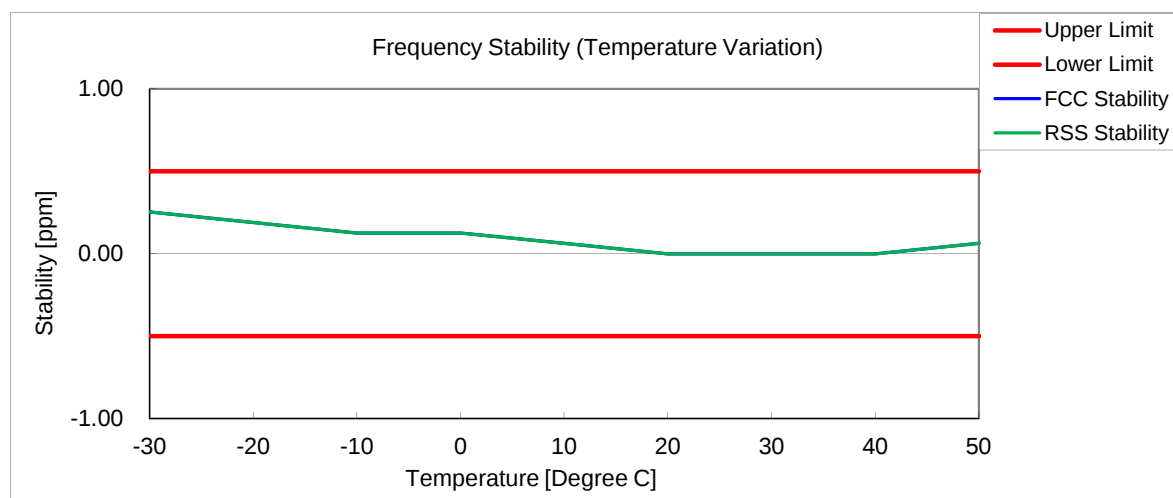

10.9 Frequency Stability (Voltage Variation)

REGULATIONS	: FCC Part 2 Section 1055 (d) (1), Part 90 Section 213(a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.2.2

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The power supply voltage to the EUT was varied from 85 % to 115 % of the nominal value measured at the input to the EUT.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8924	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
4	DC Power Supply	Takasago	GP035-20R	1014199060	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16
6	Temperature Chamber	Tabai	PL-3F	5103661	None	None
7	Temperature Meter	Sato	PC-5000TRH-II	A11999972	Jun. 23, 15	Jun. 30, 16
8	GPS Receiver	Hewlett Packard	HP Z3801A	3542A02414	None	None

Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 09, 15	Jun. 30, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 09, 15	Jun. 30, 16

Measuring Equipment Configuration

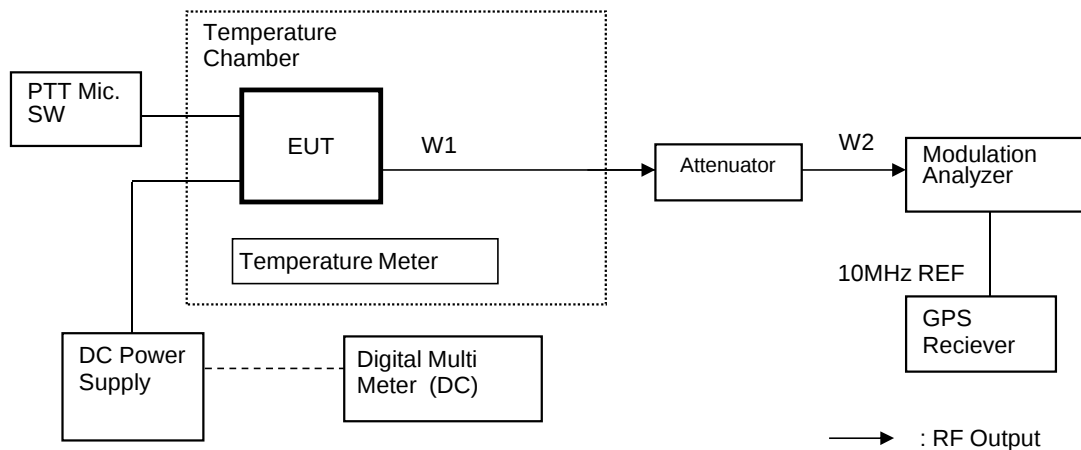

Test Results

Test date	Jul 28, 2015 to Jul 29, 2015
Location	Kashima No.1 Test Site
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1

State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05 MHz (With OCXO)(FCC)

Reference Frequency: 150.050000 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.56	150.049990	-0.07	0.1	0.03
2	20+/-5	100	13.60	150.050000	0.00	0.1	0.10
3	20+/-5	115	15.64	150.050000	0.00	0.1	0.10

State : High Power / Authorized Bandwidth 20 kHz / 138.05 MHz (With OCXO)(RSS)

Reference Frequency: 138.050000 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.56	138.050000	0.00	0.1	0.10
2	20+/-5	100	13.60	138.050000	0.00	0.1	0.10
3	20+/-5	115	15.64	138.049990	-0.07	0.1	0.03

State : High Power / Authorized Bandwidth 11.25 kHz / 173.95 MHz (Without OCXO)(FCC)

Reference Frequency: 173.950000 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.22	173.949990	-0.06	0.5	0.44
2	20+/-5	100	13.20	173.950000	0.00	0.5	0.50
3	20+/-5	115	15.18	173.950000	0.00	0.5	0.50

State : High Power / Authorized Bandwidth 20 kHz / 138.05 MHz (Without OCXO)(RSS)

Reference Frequency: 138.050000 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.22	138.050000	0.00	0.5	0.50
2	20+/-5	100	13.20	138.049990	-0.07	0.5	0.43
3	20+/-5	115	15.18	138.049990	-0.07	0.5	0.43

10.10 Receiver Spurious Emissions(Radiated)

REGULATIONS	:	RSS-119 Section 5.11, RSS-Gen Section 7
TEST METHOD/GUIDE	:	RSS-Gen Section 7

TEST PROCEDURE

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Tabletop Equipment
EUT is placed on the wooden table, the top of which is 0.8meter above the metal ground plane(turntable).
- 3 Interconnecting Cables
Excess part of the interconnecting cables longer than 1 meter are bundled in the center.
Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle to 40 cm long, hanging approx, in the middle between ground plane and table.
- 4 Measuring Instruments
Measuring instruments list and their calibration schedule are shown on Measurement Equipment Configuration.
The brief description are as follows;
- 5 Antennas
The broadband Bi-cog antenna is used for measurement on the frequency range 30 – 1000 MHz.
The Double ridged guide antenna is used for frequency higher than 1000 MHz.
- 6 Pre-amplifier
The broadband pre-amplifier is used for radiated emission measurement.
The signal to noise ratio is improved by using pre-amplifier.
- 7 Spectrum Analyzer
The spectrum analyzer is used for preliminary measurement of frequency range 30 – 1000 MHz, and also used for final measurement of higher than 1000 MHz (RBW : 1 MHz).
- 8 EMI Test Receiver
The Quasi-peak detector (IF bandwidth : 120 kHz) built in test receiver is used for final measurement of the frequency 30 – 1000 MHz.
The test receiver is complied with the specification of the CISPR publication 16.
- 9 Turntable
The turntable is capable for EUT weight and rotatable 0 to 360 degree horizontally by remote control in the test room.
- 10 Antenna Mast
The antenna mast is attachable to all antennas described on antenna height is adjustable 1 to 4 meters continuously by remote control at the test room, and antenna polarization is also changed by the remote control.
- 11 Preliminary Measurement
EUT is tested on all operating conditions.
The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to find the worst emission conditions in configuration, operating mode, or ambient noise notation.

12 Final Measurement

The EUT operated in the condition where maximum emission is found in the preliminary test.

The turntable azimuth(EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.


TEST EQUIPMENTS

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Biconical Antenna	Schwarzbeck	BBA9106	A12082007	Jun. 26, 15	Jun. 30, 16
2	Log periodic Antenna	Schwarzbeck	USLP9143B	9143B040	May. 20, 15	May. 31, 16
3	6dB Attenuator	TAMAGAWA	CFA-01(NPJ-6)	F0100002	Apr. 23, 15	Apr. 30, 16
4	Step Attenuator	Hewlett Packard	8494B	2805A14560	Apr. 23, 15	Apr. 30, 16
5	Amplifier	Hewlett Packard	8447D	2443A04415	Apr. 23, 15	Apr. 30, 16
6	Double ridged antenna	EMCO	3115	9903-5699	Jul. 04, 14	Jul. 31, 15
7	6dB Attenuator	Agilent	8493C	75550	Jul. 01, 14	Jul. 31, 15
8	Amplifier	Hewlett Packard	8449B	3008A01182	Jul. 01, 14	Jul. 31, 15
9	Spectrum analyzer	Hewlett Packard	8563E	3821A09565	May. 22, 15	May. 31, 16
10	Site Attenuation	Intertek			Aug. 12, 14	Aug. 31, 15
11	SVSWR	Intertek			Aug. 11, 14	Aug. 31, 15

USED CABLES

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
R1	Coaxial cable	Intertek	5D-2W	1R1001a	Apr 23, 15	Apr. 30, 16
R2	Coaxial cable	Intertek	RG-177/U	1R1002	Apr 23, 15	Apr. 30, 16
R3	Coaxial cable	Intertek	RG-5A/U	1R1003	Apr 23, 15	Apr. 30, 16
R4	Coaxial cable	Intertek	RG-5A/U	1R1004	Apr 23, 15	Apr. 30, 16
R5	Coaxial cable	Intertek	5D-2W	1R1005	Apr 23, 15	Apr. 30, 16
R6	Coaxial cable	Intertek	5D-2W	1R1006	Apr 23, 15	Apr. 30, 16
R7	Coaxial cable	Intertek	5D-2W	1R1007a	Apr 23, 15	Apr. 30, 16
R8	Coaxial cable	Intertek	5D-2W	1R1008a	Apr 23, 15	Apr. 30, 16
RG1	Coaxial cable	SUHNER	S 04272 B	25799	Jul 23, 14	Jul. 31, 15
RG2	Coaxial cable	SUHNER	SUCOFLEX	290800/4	Jul 01, 14	Jul. 31, 15

MEASUREMENT EQUIPMENT CONFIGURATION

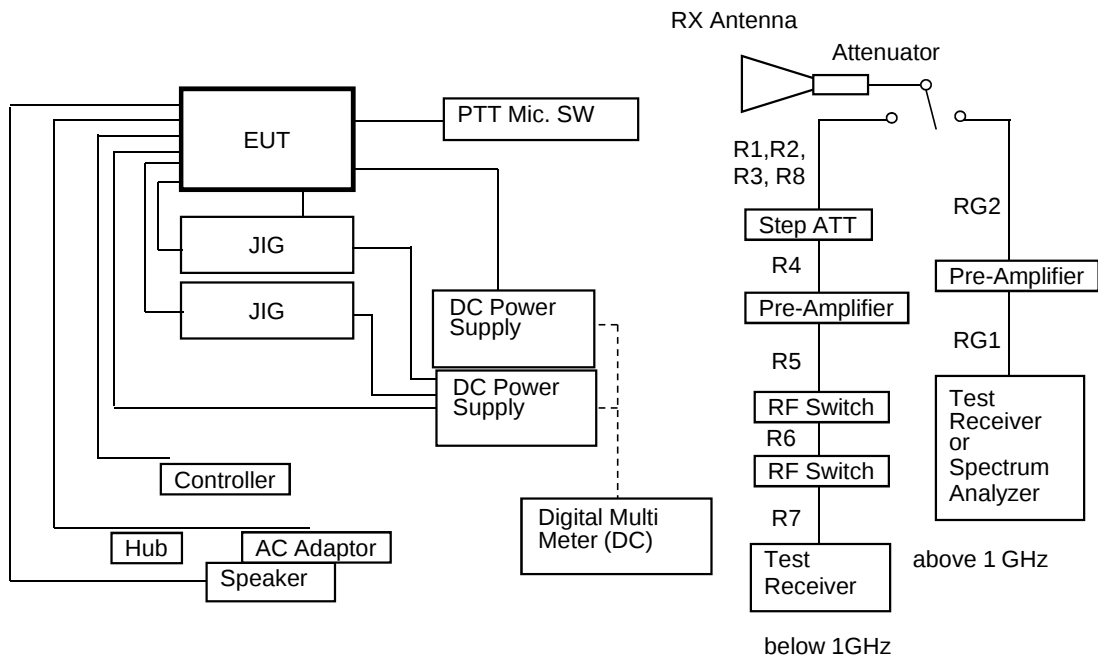

TEST RESULTS

Test date	Jul. 15, 2015 and Jul. 17, 2015
Location	Tochigi No.1 Test Site
temperature	22 to 27 [degree C]
Humidity Variation	50 to 61 [%]
Atmospheric Pressure	100.4 to 101 [kPa]
Test Engineer	Toru Fukuda

Test was carried out for the frequency band of section 10.1
State the worst case (below).

State : 158.05 MHz Receiver Condition (OCXO External)

No.	Frequency (MHz)	Pol	Mode	Reading Level (dBuv)	Factor* (dB)	Emission Level (dBuV/m)	Limit Level (dBuV/m)	Margin (dB)
1	37.17	Hor.		-	-6.5	-	40.0	-
		Ver.		41.6	-6.5	35.1	40.0	4.9
2	107.22	Hor.		32.8	-9.5	23.3	43.5	20.2
		Ver.		37.0	-9.5	27.5	43.5	16.0
3	216.10	Hor.		-	-2.4	-	46.0	-
		Ver.		38.1	-2.4	35.7	46.0	10.3
4	648.30	Hor.		24.2	3.9	28.1	46.0	17.9
		Ver.		24.2	3.9	28.1	46.0	17.9
5	740.00	Hor.		-	6.0	-	46.0	-
		Ver.		35.8	6.0	41.8	46.0	4.2
6	780.00	Hor.		-	7.3	-	46.0	-
		Ver.		35.4	7.3	42.7	46.0	3.3
7	830.00	Hor.		23.5	8.2	31.7	46.0	14.3
		Ver.		24.9	8.2	33.1	46.0	12.9
8	1375.00	Hor.	AVG	-	0.9	-	54.0	-
		Ver.	AVG	33.8	0.9	34.7	54.0	19.3
9	1944.90	Hor.	AVG	32.3	4.3	36.6	54.0	17.4
		Ver.	AVG	32.3	4.3	36.6	54.0	17.4

There is the margin of 20dB over except for the above points.
* Factor = Antenna,Antenna Pad,Cable,Preamp
Emission Level = Reading Level + Factor

Note:

- 1 Measurement distance is 3 metres. (Above 1GHz is 3.79 meteres)
- 2 Scanned frequency are 30 to 2000 MHz.
- 3 Highest oscillator frequency is 232.05 MHz.

10.11 Necessary Bandwidth and Emission Bandwidth

REGULATIONS	: FCC Part 2 Section 202 (g) & Federal Register/ Vol.68, No236 TRC 43
-------------	--

Calculation Results

State : 16K0F3E (Authorized Bandwidth 20 kHz)

Item	Mark		
Maximum Modulation	(M)	3	kHz
Maximum Deviation	(D)	5	kHz
Constant Factor	(K)	1	
Necessary Bandwidth	(Bn)	16	kHz

$$B_n = (2 \times M) + (2 \times D \times K)$$

State : 11K0F3E (Authorized Bandwidth 11.25 kHz)

Item	Mark		
Maximum Modulation	(M)	3	kHz
Maximum Deviation	(D)	2.5	kHz
Constant Factor	(K)	1	
Necessary Bandwidth	(Bn)	11	kHz

$$B_n = (2 \times M) + (2 \times D \times K)$$

State : 8K30F1E / 8K30F1D / 8K30F7W (4Level FSK / 9600bps, Authorized Bandwidth 11.25 kHz)

Item	Mark		
Digital information rate	(R)	9600	bps
Peak frequency deviation	(D)	3.391	kHz
Signaling states	(S)	4	
Numerical factor	(K)	0.516	
Necessary Bandwidth	(Bn)	8.3	kHz

$$B_n = (R / \log_2 S) + 2 \times D \times K$$

State : 4K00F1E / 4K00F1D / 4K00F7W (4Level FSK / 4800bps, Authorized Bandwidth 6 kHz)

Item	Mark		
Digital information rate	(R)	4800	bps
Peak frequency deviation	(D)	1.55	kHz
Signaling states	(S)	4	
Numerical factor	(K)	0.516	
Necessary Bandwidth	(Bn)	4	kHz

$$B_n = (R / \log_2 S) + 2 \times D \times K$$

State : 4K00F2D (CWID, Authorized Bandwidth 6 kHz)

Item	Mark		
Maximum Modulation	(M)	0.8	kHz
Maximum Deviation	(D)	1.2	kHz
Numerical factor	(K)	1	
Necessary Bandwidth	(Bn)	4	kHz

$$B_n = (2 \times M) + (2 \times D \times K)$$

10.12 99% Occupied Bandwidth

REGULATIONS	: RSS-119 Section 5.5
TEST METHOD/GUIDE	: RSS-Gen Section 6.6


Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the test instrument for the following setting:
RBW : 1 % to 5 % of the Necessary bandwidth
VBW : at least 3 times the RBW
Detector : Peak
Sweep Time : Auto
Trace mode : Max Hold
- 3 Allow trace to fully stabilize.
- 4 Use "Occupied Bandwidth Measurement" function to measure the 99% Occupied Bandwidth.
- 5 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only 16K0F3E, 11K0F3E)

Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 2015	Jun. 30, 2016
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 2015	Jun. 30, 2016
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 2014	Oct. 31, 2015
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 2015	Jun. 30, 2016
5	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 2014	Jul. 31, 2015
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 2014	Jun. 30, 2015
8	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 2015	Jan. 31, 2016
9	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 2015	Jun. 30, 2016
10	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 2015	Jan. 31, 2016
11	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 2015	Jan. 31, 2016

Measuring Equipment Configuration

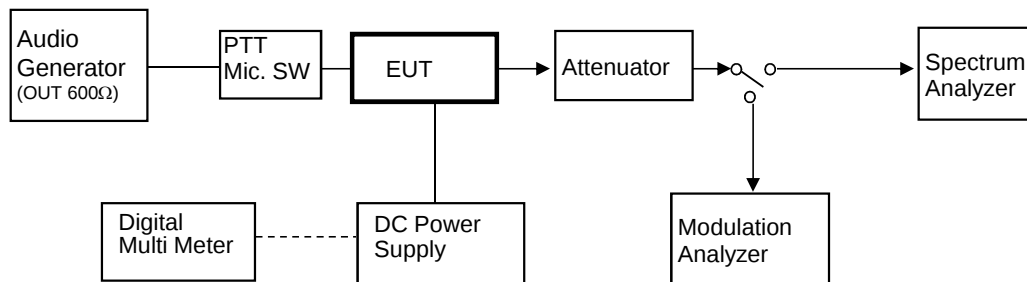




Test Results

Test date	Jun 23, 2015
Location	Kashima No.1 Test Site
temperature	20 [degree C]
Humidity Variation	60 [%]
Atmospheric Pressure	101 [kPa]
Test Engineer	Koichi Wagatsuma

Emission Designation	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Authorized bandwidth (kHz)
16K0F3E	138.05 158.05 173.95	10.693 10.634 10.717	20
11K0F3E	138.05 158.05 173.95	5.172 5.169 5.172	11.25
8K30F1E/F1D/F7W	138.05 158.05 173.95	7.169 7.052 7.182	11.25
4K00F1E/F1D/F7W	138.05 158.05 173.95	3.247 3.180 3.251	6
4K00F2D	138.05 158.05 173.95	3.308 3.300 3.310	6

Frequency (MHz)	Emission Designation	
	16K0F3E	11K0F3E
138.05	Agilent Spectrum Analyzer - Occupied BW Center Freq 138.050000 MHz Center Freq 138.050000 MHz Trig: Free Run AvgHold: 5000 Radio Std: None Radio Device: BTS Center 138.1 MHz Res BW 300 Hz VBW 3 kHz Span 50 kHz Sweep 512.8 ms Occupied Bandwidth 10.693 kHz Total Power 6.37 dBm Transmit Freq Error 1 Hz OBW Power 99.00 % x dB Bandwidth 15.25 kHz x dB -20.00 dB	Agilent Spectrum Analyzer - Occupied BW Center Freq 138.050000 MHz Center Freq 138.050000 MHz Trig: Free Run AvgHold: 500000 Radio Std: None Radio Device: BTS Center 138.1 MHz Res BW 110 Hz VBW 1.1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 5.172 kHz Total Power 6.16 dBm Transmit Freq Error -1 Hz OBW Power 99.00 % x dB Bandwidth 5.222 kHz x dB -20.00 dB
158.05	Agilent Spectrum Analyzer - Occupied BW Center Freq 158.050000 MHz Center Freq 158.050000 MHz Trig: Free Run AvgHold: 5000 Radio Std: None Radio Device: BTS Center 158.1 MHz Res BW 300 Hz VBW 3 kHz Span 50 kHz Sweep 512.8 ms Occupied Bandwidth 10.634 kHz Total Power 6.32 dBm Transmit Freq Error 1 Hz OBW Power 99.00 % x dB Bandwidth 15.22 kHz x dB -20.00 dB	Agilent Spectrum Analyzer - Occupied BW Center Freq 158.050000 MHz Center Freq 158.050000 MHz Trig: Free Run AvgHold: 500000 Radio Std: None Radio Device: BTS Center 158.1 MHz Res BW 110 Hz VBW 1.1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 5.169 kHz Total Power 6.13 dBm Transmit Freq Error 6 Hz OBW Power 99.00 % x dB Bandwidth 5.223 kHz x dB -20.00 dB
173.95	Agilent Spectrum Analyzer - Occupied BW Center Freq 173.950000 MHz Center Freq 173.950000 MHz Trig: Free Run AvgHold: 5000 Radio Std: None Radio Device: BTS Center 174 MHz Res BW 300 Hz VBW 3 kHz Span 50 kHz Sweep 512.8 ms Occupied Bandwidth 10.717 kHz Total Power 6.30 dBm Transmit Freq Error 1 Hz OBW Power 99.00 % x dB Bandwidth 15.26 kHz x dB -20.00 dB	Agilent Spectrum Analyzer - Occupied BW Center Freq 173.950000 MHz Center Freq 173.950000 MHz Trig: Free Run AvgHold: 500000 Radio Std: None Radio Device: BTS Center 174 MHz Res BW 110 Hz VBW 1.1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 5.172 kHz Total Power 6.13 dBm Transmit Freq Error 6 Hz OBW Power 99.00 % x dB Bandwidth 5.222 kHz x dB -20.00 dB

Ferquency (MHz)	Emission Designation	
	8K30F1E/F1D/F7W	4K00F1E/F1D/F7W
138.05	Agilent Spectrum Analyzer - Occupied BW Center Freq: 138.050000 MHz RBW 100.00 Hz #F Gain: Low #Att: 20 dB Radio Device: BTS Center 138.1 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 7.169 kHz Total Power 11.2 dBm Transmit Freq Error 1 Hz OBW Power 99.00 % x dB Bandwidth 7.692 kHz x dB -20.00 dB	Agilent Spectrum Analyzer - Occupied BW Center Freq: 138.050000 MHz RBW 100.00 Hz #F Gain: Low #Att: 20 dB Radio Device: BTS Center 138.1 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 3.247 kHz Total Power 11.2 dBm Transmit Freq Error 1 Hz OBW Power 99.00 % x dB Bandwidth 3.897 kHz x dB -20.00 dB
158.05	Agilent Spectrum Analyzer - Occupied BW Center Freq: 158.050000 MHz RBW 100.00 Hz #F Gain: Low #Att: 20 dB Radio Device: BTS Center 158.1 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 7.052 kHz Total Power 11.2 dBm Transmit Freq Error 5 Hz OBW Power 99.00 % x dB Bandwidth 7.655 kHz x dB -20.00 dB	Agilent Spectrum Analyzer - Occupied BW Center Freq: 158.050000 MHz RBW 100.00 Hz #F Gain: Low #Att: 20 dB Radio Device: BTS Center 158.1 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 3.180 kHz Total Power 11.2 dBm Transmit Freq Error 2 Hz OBW Power 99.00 % x dB Bandwidth 3.869 kHz x dB -20.00 dB
173.95	Agilent Spectrum Analyzer - Occupied BW Center Freq: 173.950000 MHz RBW 100.00 Hz #F Gain: Low #Att: 20 dB Radio Device: BTS Center 174 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 7.182 kHz Total Power 11.1 dBm Transmit Freq Error 6 Hz OBW Power 99.00 % x dB Bandwidth 7.689 kHz x dB -20.00 dB	Agilent Spectrum Analyzer - Occupied BW Center Freq: 173.950000 MHz RBW 100.00 Hz #F Gain: Low #Att: 20 dB Radio Device: BTS Center 174 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 3.251 kHz Total Power 11.2 dBm Transmit Freq Error 5 Hz OBW Power 99.00 % x dB Bandwidth 3.895 kHz x dB -20.00 dB

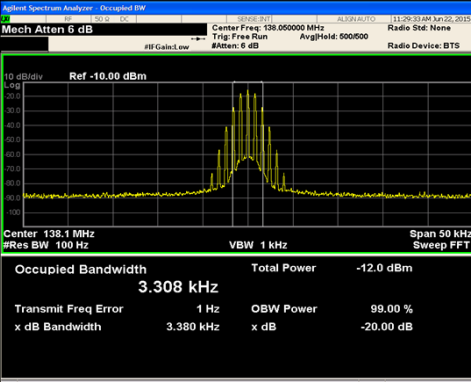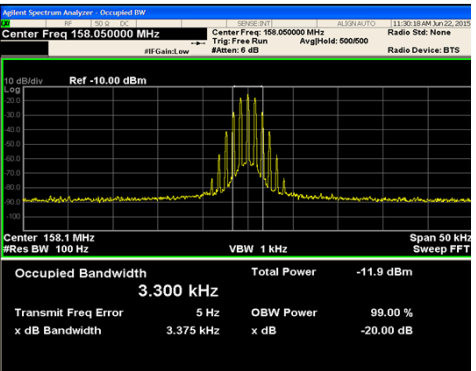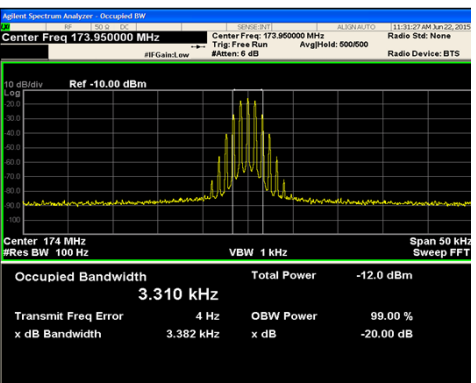Ferquency (MHz)	Emission Designation	
138.05	4K00F2D  Center 138.1 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 3.308 kHz Total Power -12.0 dBm Transmit Freq Error 1 Hz OBW Power 99.00 % x dB Bandwidth 3.380 kHz x dB -20.00 dB	
158.05	 Center 158.1 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 3.300 kHz Total Power -11.9 dBm Transmit Freq Error 5 Hz OBW Power 99.00 % x dB Bandwidth 3.375 kHz x dB -20.00 dB	
173.95	 Center 174.0 MHz #Res BW 100 Hz VBW 1 kHz Span 50 kHz Sweep FFT Occupied Bandwidth 3.310 kHz Total Power -12.0 dBm Transmit Freq Error 4 Hz OBW Power 99.00 % x dB Bandwidth 3.382 kHz x dB -20.00 dB	