



## TEST REPORT

**REGULATION :** FCC Part 2, 90  
RSS-119 Issue 12

| Applicant                                                                                                                                             | Testing Laboratory                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JVC KENWOOD Corporation<br><br>1-16-2, Hakusan, Midori-ku, Yokohama-shi<br>Kanagawa, 226-8525 Japan<br>Tel.: +81 45 939 6254<br>Fax.: +81 45 939 6261 | Intertek Japan K.K. Kashima Laboratory<br>URL: <a href="http://www.japan.intertek-etlsemko.com">http://www.japan.intertek-etlsemko.com</a><br>(No.12 Test site)<br>298-6 Sada, Kashima, Ibaraki<br>314-0027 Japan<br>Tel. +81 299 82 8464<br>(No.1 Test site)<br>3-2 Sunayama, Kamisu, Ibaraki<br>314-0255 Japan<br>Tel. +81 479 40 1097 |

|                            |                              |
|----------------------------|------------------------------|
| <b>Equipment type</b>      | 800MHz DIGITAL BASE-REPEATER |
| <b>Trademark</b>           | KENWOOD                      |
| <b>FCC Model(s)</b>        | NXR-5900-K                   |
| <b>IC Model(s)</b>         | NXR-5900-K                   |
| <b>Serial No.</b>          | B7390014                     |
| <b>FCC ID</b>              | K44474700                    |
| <b>IC CN and UPN</b>       | 282F-474700                  |
| <b>Test Result</b>         | Complied                     |
| <b>Report Number</b>       | 17080104JKA-002              |
| <b>Original Issue Date</b> | September 29, 2017           |

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Hideaki Kosemura

[Technical Manager]

Tested by

Koichi Wagatsuma

[Engineer]



**In Accordance with FCC Rules and Regulations, Volume II, Part 2 and 90****Sub-part 2.1033**

|                                                                                                                        |                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant and Manufacture Information</b>                                                                           |                                                                                                                                                                                                         |
| APPLICANT                                                                                                              |                                                                                                                                                                                                         |
| Company                                                                                                                | : JVC KENWOOD Corporation                                                                                                                                                                               |
| Address                                                                                                                | : 1-16-2, Hakusan, Midori-ku, Yokohama-shi<br>Kanagawa, 226-8525 Japan                                                                                                                                  |
| Contact Person                                                                                                         | : Tamaki Shimamura<br>Manager, Communications Systems Devision                                                                                                                                          |
| MANUFACTURER                                                                                                           |                                                                                                                                                                                                         |
| Company                                                                                                                | : JVC KENWOOD Corporation                                                                                                                                                                               |
| Address                                                                                                                | : 1-16-2, Hakusan, Midori-ku, Yokohama-shi<br>Kanagawa, 226-8525 Japan                                                                                                                                  |
| <b>(c)(2) FCC ID</b>                                                                                                   |                                                                                                                                                                                                         |
| FCC ID                                                                                                                 | : K44474700                                                                                                                                                                                             |
| Model number                                                                                                           | : NXR-5900-K                                                                                                                                                                                            |
| Serial number                                                                                                          | : B7390014                                                                                                                                                                                              |
| <b>Instruction Manual(S)</b>                                                                                           |                                                                                                                                                                                                         |
| Instruction manual(s)                                                                                                  | : Please refer to attached Exhibits F                                                                                                                                                                   |
| <b>Type of Emission</b>                                                                                                |                                                                                                                                                                                                         |
| Emission Designation                                                                                                   | : 16K0F3E(Wide) , 14K0F3E(Wide)<br>11K0F3E(Narrow)<br>8K30F1E(Narrow) / 8K30F1D(Narrow) / 8K30F7W(Narrow)<br>4K00F1E(Very Narrow) / 4K00F1D(Very Narrow) / 4K00F7W(Very Narrow)<br>4K00F2D(Very Narrow) |
| <b>Frequency range</b>                                                                                                 |                                                                                                                                                                                                         |
| Frequency Range                                                                                                        | : TX : 851 to 869 MHz<br>RX : 806 to 824 MHz                                                                                                                                                            |
| <b>Power Rating</b>                                                                                                    |                                                                                                                                                                                                         |
| Output Power                                                                                                           | : 100m to 360m W                                                                                                                                                                                        |
| Type                                                                                                                   | : Continuously Variable                                                                                                                                                                                 |
| <b>Maximum Power Rating</b>                                                                                            |                                                                                                                                                                                                         |
| Output Power                                                                                                           | : 360m W                                                                                                                                                                                                |
| <b>Voltages &amp; currents in all elements in final RF stage,<br/>including final transistor or solid-state device</b> |                                                                                                                                                                                                         |
| Collector Current, A                                                                                                   | : 5.0 A Maximum                                                                                                                                                                                         |
| Collector Voltage, Vdc                                                                                                 | : 13.8 Vdc                                                                                                                                                                                              |
| Supply Voltage, Vdc                                                                                                    | : 13.8 Vdc                                                                                                                                                                                              |
| <b>Other Information</b>                                                                                               |                                                                                                                                                                                                         |
| Number of Channel                                                                                                      | : 30 channels                                                                                                                                                                                           |
| Maximum Deviation                                                                                                      | : $\pm 5$ kHz (16K0F3E), $\pm 4$ kHz (14K0F3E), $\pm 2.5$ kHz (11K0F3E)                                                                                                                                 |
| Frequency Stability                                                                                                    | : FCC : 0.5 ppm, IC : 0.1 ppm                                                                                                                                                                           |
|                                                                                                                        | :                                                                                                                                                                                                       |
| Antenna Impedance                                                                                                      | : 50 $\Omega$ Norminal                                                                                                                                                                                  |
| <b>Note</b>                                                                                                            |                                                                                                                                                                                                         |
|                                                                                                                        |                                                                                                                                                                                                         |

## TABLE OF CONTENTS

---

|                                                                     | Page |
|---------------------------------------------------------------------|------|
| SECTION 1. GENERAL INFORMATION                                      | 4    |
| SECTION 2. SUMMARY OF TEST RESULT                                   | 5    |
| SECTION 3. TEST AND MEASUREMENT DATA                                | 6    |
| SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)           | 7    |
| SECTION 5. SUPPORT EQUIPMENT                                        | 8    |
| SECTION 6. USED CABLE(S)                                            | 9    |
| SECTION 7. TEST CONFIGURATION                                       | 10   |
| SECTION 8. OPERATING CONDITION                                      | 11   |
| SECTION 9. MEASUREMENT UNCERTAINTY                                  | 12   |
| SECTION 10. TEST DATA                                               |      |
| 10.1 Carrier Output Power (Conducted)                               | 13   |
| 10.2 Unwanted Emissions (Transmitter Conducted)                     | 16   |
| 10.3 Field Strength of Spurious Radiation                           | 19   |
| 10.4 Emission Masks (Occupied Bandwidth)                            | 23   |
| 10.5 Audio Frequency Response / Audio Low Pass Filter (Voice Input) | 50   |
| 10.6 Modulation Limiting                                            | 54   |
| 10.7 Frequency Stability (Temperature Variation)                    | 59   |
| 10.8 Frequency Stability (Voltage Variation)                        | 62   |
| 10.9 Receiver Spurious Emissions(Radiated)                          | 64   |
| 10.10 Necessary Bandwidth and Emission Bandwidth                    | 68   |
| 10.11 99% Occupied Bandwidth                                        | 70   |
| APPENDIX PHOTOGRAPHS                                                |      |

---

## SECTION 1. GENERAL INFORMATION

### TEST PERFORMED

|                            |                                                                     |    |                    |
|----------------------------|---------------------------------------------------------------------|----|--------------------|
| Location                   | Kashima No.1 Test Site and No.12 Test Site                          |    |                    |
| EUT Received               | August 24, 2017                                                     |    |                    |
| Date of Test               | August 24, 2017                                                     | to | September 21, 2017 |
| Standard Applied           | FCC Part 2, 90<br>RSS-119 Issue 12                                  |    |                    |
| Measurement Method         | ANSI/TIA-603-E-2016 / RSS-119 Issue 12(2015), RSS-Gen Issue 4(2014) |    |                    |
| Deviation from Standard(s) | Not applicable                                                      |    |                    |

### QUALIFICATIONS OF TESTING LABORATORY (Kashima Lab.)

| ACCREDITATION | SCOPE       | LAB. CODE   | Remarks |
|---------------|-------------|-------------|---------|
| VLAC          | EMC Testing | VLAC-008-1  | JAPAN   |
| FILING        |             |             |         |
| VCCI          | EMC Testing | A-0126      | JAPAN   |
| FCC           | EMC Testing | JP0008      |         |
| IC            | EMC Testing | IC-2042Q-12 | CANADA  |
| CB-Scheme     | EMC Testing | TL222       | IECEE   |

### ABBREVIATIONS

|      |                                      |            |                                   |
|------|--------------------------------------|------------|-----------------------------------|
| EUT  | Equipment Under Test                 | DoC        | Declaration of Conformity         |
| AMN  | Artificial Mains Network             | ISN        | Impedance Stabilization Network   |
| LISN | Line Impedance Stabilization Network | Q-P        | Quasi-peak                        |
| AMP  | Amplifier                            | AVG        | Average                           |
| ATT  | Attenuator                           | PK         | Peak                              |
| ANT  | Antenna                              | Cal        | Calibration                       |
| BBA  | Broadband Antenna                    | N/A        | Not applicable or Not available   |
| DIP  | Dipole Antenna                       | LCD        | Liquid-Crystal Display            |
| AE   | Associated Equipment                 | 4LEVEL FSK | 4LEVEL Frequency Shift Key        |
| GMSK | Gaussian Maximum Shift Key           | CW ID      | Continuously Repeating bit stream |
| FM   | Frequency Modulation                 | C4FM       | Constant envelope 4 Level FM      |
| PTT  | Push to Talk                         | AFC        | Automatic frequency control       |

### Revision Summary

| Revised Date | Section | Description of Changes |
|--------------|---------|------------------------|
|              |         |                        |
|              |         |                        |
|              |         |                        |

## SECTION 2. SUMMARY OF TEST RESULT

| FCC Part2      | Part90     | IC RSS-119  | TEST ITEM                                   | RESULTS         | Comments |
|----------------|------------|-------------|---------------------------------------------|-----------------|----------|
| 2.1046 (a)     | -          | 5.4         | Carrier Output Power (Conducted)            | <b>PASS</b>     |          |
| 2.1051         | 90.210     | 5.8         | Unwanted Emissions (Transmitter Conducted)  | <b>PASS</b>     |          |
| 2.1053 (a)     | 90.210     | 5.8         | Field Strength of Spurious Radiation        | <b>PASS</b>     |          |
| 2.1049 (c) (1) | 90.210     | 5.5         | Emission Masks (Occupied Bandwidth)         | <b>PASS</b>     |          |
| 2.1047 (a)     | -          | -           | Audio Low Pass Filter (Voice Input)         | <b>PASS</b>     |          |
| 2.1047 (a)     | -          | -           | Audio Frequency Response                    | <b>PASS</b>     |          |
| 2.1047 (b)     | -          | -           | Modulation Limiting                         | <b>PASS</b>     |          |
| 2.1055 (a) (1) | 90.213 (a) | 5.3         | Frequency Stability (Temperature Variation) | <b>PASS</b>     |          |
| 2.1055 (d) (1) | 90.213 (a) | 5.3         | Frequency Stability (Voltage Variation)     | <b>PASS</b>     |          |
| -              | -          | RSS-Gen 7.1 | Receiver Spurious Emissions                 | <b>PASS</b>     |          |
| -              | 90.203 (e) | -           | Certification required (FCC Part 90.203(e)) | <b>Complied</b> |          |
| -              | -          | 5.5         | 99% Occupied Bandwidth                      | <b>PASS</b>     |          |

### Limitation on Results

The test result of this report is effective equipment under test itself and under the test configuration described on the report.

This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

### Note:

As for the FCC Part 15 Subpart B-Unintentional Radiators, the EUT has been measured and declared as Verification by JVC Kenwood Corporation.

### SECTION 3. TEST AND MEASUREMENT DATA

All test and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J and Industry Canada as the following individual parts:

| FCC Rule       | Test Item                                 | Tested     |
|----------------|-------------------------------------------|------------|
| Part 24        | Personal Communications Services          | N.A.       |
| Part 80        | Stations in the Maritime Services         | N.A.       |
| <b>Part 90</b> | <b>Private Land Mobile radio Services</b> | <b>YES</b> |

| IC Rule        | Test Item                                                                                                                   | Tested     |
|----------------|-----------------------------------------------------------------------------------------------------------------------------|------------|
| <b>RSS-119</b> | <b>Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.4-960 MHz</b> | <b>YES</b> |
| RSS-134        | 900MHz Narrowband Personal Communication Service                                                                            | N.A.       |
| <b>RSS-Gen</b> | <b>General Requirements for Compliance of Radio Apparatus</b>                                                               | <b>YES</b> |

**SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)****4.1 List of System Configuration**

| Symbol                 | Item                         | Model No.                                                  | Serial No. | Manufacture             | Remarks |
|------------------------|------------------------------|------------------------------------------------------------|------------|-------------------------|---------|
| A1                     | 800MHz DIGITAL BASE-REPEATER | NXR-5900-K                                                 | B7390014   | JVC KENWOOD Corporation | EUT     |
| A2                     | OCXO Unit                    | KXK-3M3                                                    | B7390014   | JVC KENWOOD Corporation | EUT     |
| Power Ratings of EUT : |                              | DC 13.8 V (10.8 to 15.9V)                                  |            | 5.0 A Maximum           |         |
| Power Supply :         |                              | DC 13.8 V                                                  |            |                         |         |
| Condition of Equipment |                              | Proto type                                                 |            |                         |         |
| Type                   |                              | Rack Mount type                                            |            |                         |         |
| Suppression Devices    |                              | No Modifications by the laboratory were made to the device |            |                         |         |

**4.2 Port(s)/Connector(s)**

| Port Name   | Connector Type | Connector Pin | Remarks         |
|-------------|----------------|---------------|-----------------|
| RX          | BNC            | 2pin          |                 |
| REF OUT     | BNC            | 2pin          |                 |
| REF IN      | BNC            | 2pin          |                 |
| TX          | BNC            | 2pin          |                 |
| TEST/SPKR   | MOLEX 1625-15p | 15pin         |                 |
| Control I/O | D-sub          | 25pin         |                 |
| SYNC 1      | RJ-11          | 4pin          |                 |
| SYNC 2      | RJ-11          | 4pin          |                 |
| LAN         | RJ-45          | 8pin          |                 |
| MICROPHONE  | RJ-45          | 8pin          |                 |
| USB         | Type B         | 4pin          | For maintenance |

**4.3 Highest Frequency Oscillator(s)/Crystal(s)**

| Operating Frequency | Board Name | Remarks |
|---------------------|------------|---------|
| 869 MHz             | TXRX UNIT  |         |

## SECTION 5. SUPPORT EQUIPMENT

The EUT was supported by the following equipment during the test.

| Symbol          | Item                | Model No.           | Serial No.    | Manufacture     | FCC ID |
|-----------------|---------------------|---------------------|---------------|-----------------|--------|
| B               | Microphone          | KMC-35              | none          | Kenwood         | N/A    |
| C               | Hub                 | SD205               | PSJ13420D34   | CISCO           | DoC    |
| D               | Controller          | none                | none          | none            | N/A    |
| E               | External Speaker    | KES-5               | none          | Kenwood         | N/A    |
| F               | Terminator          | CT-03NP             | 4B336         | TME             | N/A    |
| G               | Terminator          | 3204-BNCM           | No2           | api technoogies | N/A    |
| H               | Terminator          | 3204-BNCM           | No3           | api technoogies | N/A    |
| I               | Terminator          | 3204-BNCM           | No4           | api technoogies | N/A    |
| J               | Terminator          | 3204-BNCM           | No5           | api technoogies | N/A    |
| K               | Terminator          | 3204-BNCM           | No6           | api technoogies | N/A    |
| L               | Base-Repeater (1)   | NXR-JIG1            | none          | Kenwood         | N/A    |
| M               | Base-Repeater (2)   | NXR-JIG2            | none          | Kenwood         | N/A    |
| N               | DC Power Supply (1) | PMC35-3A            | LE000716      | Kikusui         | N/A    |
| O               | DC Power Supply (2) | PS-3020             | 301027        | Daiwa           | N/A    |
| P               | AC Adapter          | GPSESU-12P50F-AM7BE | R090815002786 | Bestec          | DoC    |
| Supplied Power: |                     |                     |               |                 |        |
| N, O, P         | AC                  | 100V,60Hz           |               |                 |        |



## SECTION 6. USED CABLE(S)


The following cable(s) was used for the test.

| No. | Name                                | Length (m) | Shield | Metal Connector | Ferrite core  |
|-----|-------------------------------------|------------|--------|-----------------|---------------|
| 1   | Mic. cable                          | 0.60       | No     | No              |               |
| 2   | LAN cable                           | 1.00       | No     | No              |               |
| 3   | D-Sub                               | 1.40       | Yes    | Yes             |               |
| 4   | Speaker cable                       | 2.80       | No     | No              |               |
| 5   | Modular cable                       | 0.20       | No     | No              |               |
| 6   | Modular cable                       | 0.20       | No     | No              |               |
| 7   | Coaxial cable                       | 1.00       | Yes    | Yes             |               |
| 8   | Coaxial cable                       | 1.00       | Yes    | Yes             |               |
| 9   | I/O cable                           | 0.80       | No     | No              |               |
| 10  | DC cable for EUT                    | 4.00       | No     | No              | Removable x 1 |
| 11  | DC cable for Base-Repeater (1)      | 4.00       | No     | No              | Removable x 1 |
| 12  | DC cable for Base-Repeater (2)      | 4.00       | No     | No              | Removable x 1 |
| 13  | DC cable for HUB                    | 2.00       | No     | No              | Removable x 2 |
| 14  | Power cable for DC Power Supply (1) | 1.50       | No     | No              |               |
| 15  | Power cable for DC Power Supply (2) | 1.30       | No     | No              |               |

## SECTION 7. TEST CONFIGURATION

### Details of Configuration and Connection

Example: Case of Section 10.9 Test

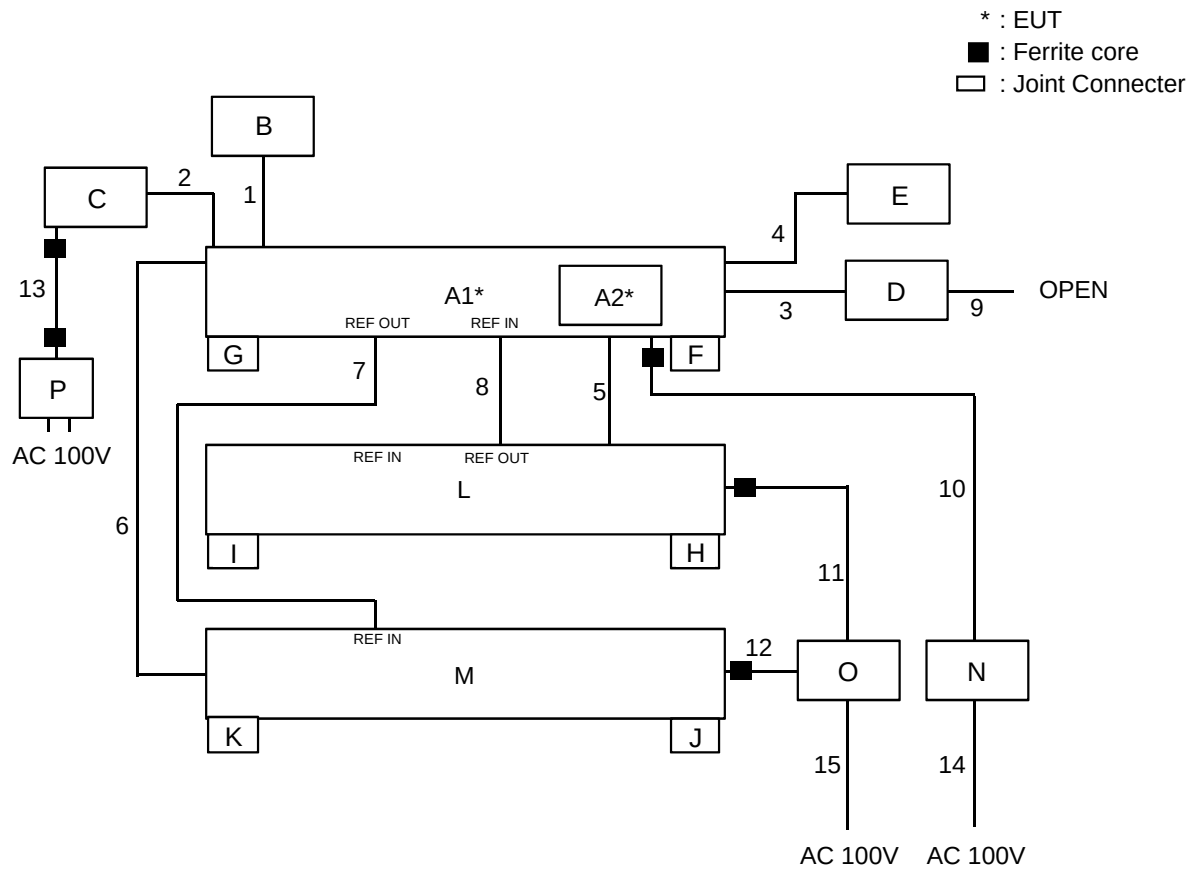

## SECTION 8. OPERATING CONDITION

The EUT was operated under the following condition during the test.

### 8.1 Operating Condition

The test was carried out under Transmit mode.

(FCC:851.05MHz, 860.05MHz, 868.95MHz)

(RSS:851.05MHz, 860.05MHz, 868.95MHz)

(High Power : 360mW, Low Power : 100mW)


The test was carried out under Receive mode.

(806.05MHz, 815.05MHz, 823.95MHz)

EUT was examined in the operating conditions that had maximum emissions.


### 8.2 Operating Flow [Transmit mode]

Following operations were performed continuously.

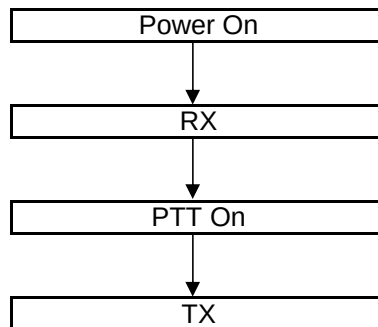

### 8.3 Operating Flow [Receive mode]

Following operations were performed continuously.



## SECTION 9. MEASUREMENT UNCERTAINTY

|                                             |                         |                 |
|---------------------------------------------|-------------------------|-----------------|
| Carrier Output Power (Conducted)            | $U_{lab}$               | $U_{tia-603-d}$ |
|                                             | +/- 0.29dB ( $k = 2$ )  | +/- 0.59 dB     |
| Unwanted Emissions (Transmitter Conducted)  |                         |                 |
|                                             | +/- 2.19 dB ( $k = 2$ ) | +/- 1.1 dB      |
| Field Strength of Spurious Radiation        |                         |                 |
|                                             | +/- 2.78dB ( $k = 2$ )  | +/- 3.3 dB      |
| Emission Masks (Occupied Bandwidth)         |                         |                 |
|                                             | +/- 0.5dB ( $k = 2$ )   | +/- 2.1 dB      |
| Transient Frequency Behavior                |                         |                 |
|                                             | +/- 1.10% ( $k = 2$ )   | +/- 21.6 %      |
| Audio Low Pass Filter (Voice Input)         |                         |                 |
|                                             | +/- 0.1dB ( $k = 2$ )   | +/- 1.2 dB      |
| Audio Frequency Response                    |                         |                 |
|                                             | +/- 0.1dB ( $k = 2$ )   | +/- 1.2 dB      |
| Modulation Limiting                         |                         |                 |
|                                             | +/- 1% ( $k = 2$ )      | +/- 1.0 %       |
| Frequency Stability (Temperature Variation) |                         |                 |
|                                             | +/- 10.1Hz ( $k=2$ )    | +/-34.2 Hz      |
| Frequency Stability (Voltage Variation)     |                         |                 |
|                                             | +/- 10.1Hz ( $k=2$ )    | +/-34.2 Hz      |
| Receiver Spurious Emissions                 | $U_{lab}$               | $U_{cispr}$     |
| 30-1000MHz                                  | +/- 4.83dB ( $k = 2$ )  | +/- 6.3 dB      |
| above 1GHz                                  | +/- 4.33dB ( $k = 2$ )  | +/- 5.2 dB      |
| Bandwidth                                   |                         |                 |
|                                             | +/- 1.02% ( $k = 2$ )   | -               |

## SECTION 10. TEST DATA

### 10.1 Carrier Output Power (Conducted)

|                   |                                                        |
|-------------------|--------------------------------------------------------|
| REGULATIONS       | : FCC Part 2 Section 1046 (a) / RSS-119 Section 5.4    |
| TEST METHOD/GUIDE | : ANSI/TIA-603-E Section 2.2.1.2 / RSS-119 Section 4.1 |

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The EUT was conducted to a resistive coaxial attenuator of normal load impedance.  

$$\text{RF Power (dBm)} = \text{Power Meter reading (dBm)} + \text{Attenuator Loss (dB)} + \text{Cable Loss (dB)}$$

$$\text{RF Power (W)} = 10^{(\text{RF Power (dBm)}/10)}/1000$$
- 3 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only as for the test of RSS)


#### Measuring Equipments

| No. | Equipment           | Manufacture         | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|---------------------|-------------|------------|---------------|------------------|
| 1   | Power Meter         | Hewlett Packard     | E4418B      | GB38410265 | 1Y            | Aug. 31, 18      |
| 2   | Power Sensor        | Hewlett Packard     | 8482A       | US37292237 | 1Y            | Aug. 31, 18      |
| 3   | Attenuator (30dB)   | Weinschel           | WA-29-30-34 | 8923       | 1Y            | Aug. 31, 18      |
| 4   | Modulation          | Hewlett Packard     | 8901B       | 3403A04852 | 1Y            | Dec. 31, 17      |
| 5   | Audio Generator     | Anritsu             | MG443B      | M70150     | 1Y            | Aug. 31, 18      |
| 6   | DC Power Supply     | Daiichi denpa kogyo | GZV4000     | 90290931   | None          | None             |
| 7   | Digital Multi Meter | FLUKE               | 8846A       | 9642018    | 1Y            | Jul. 31, 18      |

#### Measuring Cables

| No. | Cable         | Manufacturer   | Model No. | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-----------|------------|---------------|------------------|
| W2  | Balance Cable | Nicoon         | 3D-2V     | KSR00092   | 1Y            | Mar. 31, 18      |
| W3  | Coaxial Cable | Pacific custom | RG-58 C/U | AM90C04    | 1Y            | Feb. 28, 18      |

## Measuring Equipment Configuration

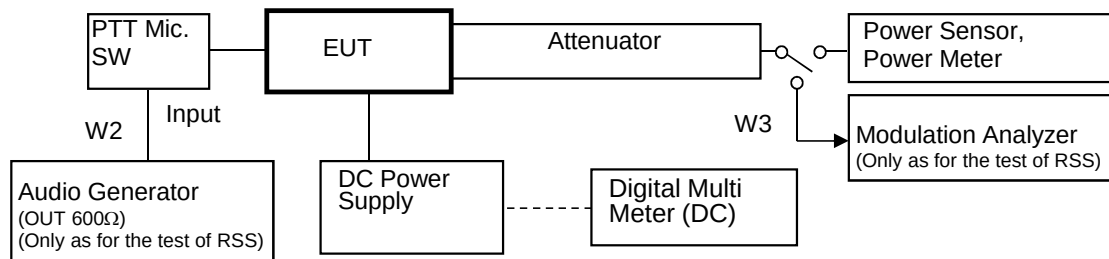

Note: Configuration of other Modulation test is composed without the Audio Generator.

## Test Results

|                      |                         |            |
|----------------------|-------------------------|------------|
| Test date            | Aug. 24, 2017           |            |
| Location             | Kashima No.12 Test Site |            |
| temperature          | 26.1                    | [degree C] |
| Humidity Variation   | 50.0                    | [%]        |
| Atmospheric Pressure | 100.3                   | [kPa]      |
| Test Engineer        | Koichi Wagatsuma        |            |

Test was carried out for all the Authorized Bandwidth.  
State the worst case (below).

| No. | Frequency (MHz) | Band   |                 | Setting    | RF Power (W) |
|-----|-----------------|--------|-----------------|------------|--------------|
| 1   | 851.05          | Low    | 16K0F3E         | High Power | 0.360        |
| 2   | 851.05          | Low    | 14K0F3E         | High Power | 0.360        |
| 3   | 851.05          | Low    | 11K0F3E         | High Power | 0.360        |
| 4   | 851.05          | Low    | 8K30F1E/F1D/F7W | High Power | 0.360        |
| 5   | 851.05          | Low    | 4K00F1E/F1D/F7W | High Power | 0.360        |
| 6   | 851.05          | Low    | 4K00F2D         | High Power | 0.360        |
| 7   | 860.05          | Middle | 16K0F3E         | High Power | 0.359        |
| 8   | 860.05          | Middle | 14K0F3E         | High Power | 0.359        |
| 9   | 860.05          | Middle | 11K0F3E         | High Power | 0.359        |
| 10  | 860.05          | Middle | 8K30F1E/F1D/F7W | High Power | 0.359        |
| 11  | 860.05          | Middle | 4K00F1E/F1D/F7W | High Power | 0.359        |
| 12  | 860.05          | Middle | 4K00F2D         | High Power | 0.359        |
| 13  | 868.95          | High   | 16K0F3E         | High Power | 0.359        |
| 14  | 868.95          | High   | 14K0F3E         | High Power | 0.359        |
| 15  | 868.95          | High   | 11K0F3E         | High Power | 0.359        |
| 16  | 868.95          | High   | 8K30F1E/F1D/F7W | High Power | 0.359        |
| 17  | 868.95          | High   | 4K00F1E/F1D/F7W | High Power | 0.359        |
| 18  | 868.95          | High   | 4K00F2D         | High Power | 0.359        |
| 1   | 851.05          | Low    | 16K0F3E         | Low Power  | 0.100        |
| 2   | 851.05          | Low    | 14K0F3E         | Low Power  | 0.100        |
| 3   | 851.05          | Low    | 11K0F3E         | Low Power  | 0.100        |
| 4   | 851.05          | Low    | 8K30F1E/F1D/F7W | Low Power  | 0.100        |
| 5   | 851.05          | Low    | 4K00F1E/F1D/F7W | Low Power  | 0.100        |
| 6   | 851.05          | Low    | 4K00F2D         | Low Power  | 0.100        |
| 7   | 860.05          | Middle | 16K0F3E         | Low Power  | 0.100        |
| 8   | 860.05          | Middle | 14K0F3E         | Low Power  | 0.100        |
| 9   | 860.05          | Middle | 11K0F3E         | Low Power  | 0.100        |
| 10  | 860.05          | Middle | 8K30F1E/F1D/F7W | Low Power  | 0.100        |
| 11  | 860.05          | Middle | 4K00F1E/F1D/F7W | Low Power  | 0.100        |
| 12  | 860.05          | Middle | 4K00F2D         | Low Power  | 0.100        |
| 13  | 868.95          | High   | 16K0F3E         | Low Power  | 0.100        |
| 14  | 868.95          | High   | 14K0F3E         | Low Power  | 0.100        |
| 15  | 868.95          | High   | 11K0F3E         | Low Power  | 0.100        |
| 16  | 868.95          | High   | 8K30F1E/F1D/F7W | Low Power  | 0.100        |
| 17  | 868.95          | High   | 4K00F1E/F1D/F7W | Low Power  | 0.100        |
| 18  | 868.95          | High   | 4K00F2D         | Low Power  | 0.100        |

RF Power: Peak reading

**10.2 Unwanted Emissions (Transmitter Conducted)**

REGULATIONS : FCC Part 2 Section 1051, Part 90 Section 210 / RSS-119 Section 5.8

TEST METHOD/GUIDE : ANSI/TIA-603-E Section 2.2.13.2 / RSS-119 Section 4.2

**Test Procedure**

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.
- 3 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
  - c) Detector mode : Average power (FM Modulation) , Positive peak with peak hold (Digital Modulation)
- 4 The emissions were measured for the worst case as follows:
  - a) : within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - b) : from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.

**Measuring Equipments**


| No. | Equipment           | Manufacture         | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|---------------------|-------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel           | WA-29-30-34 | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Highpass Filter     | TME                 | UHP-127     | 1511798E   | 1Y            | Aug. 31, 18      |
| 3   | Modulation Analyzer | Hewlett Packard     | 8901B       | 3403A04852 | 1Y            | Dec. 31, 17      |
| 4   | Signal Generator    | Rohde&Schwarz       | SMP02       | 845275/007 | 1Y            | Jul. 31, 18      |
| 5   | Audio Generator     | Anritsu             | MG443B      | M70150     | 1Y            | Aug. 31, 18      |
| 6   | Spectrum Analyzer   | Agilent             | N9030A      | US51350220 | 1Y            | Feb. 28, 18      |
| 7   | DC Power Supply     | Daiichi denpa kogyo | GZV4000     | 90290931   | None          | None             |
| 8   | Digital Multi Meter | FLUKE               | 8846A       | 9642018    | 1Y            | Jul. 31, 18      |

**Measuring Cables**

| No. | Cable         | Manufacture    | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-------------|------------|---------------|------------------|
| W3  | Balance Cable | Nicoon         | 3D-2V       | KSR00092   | 1Y            | Mar. 31, 18      |
| W4  | Coaxial Cable | Pacific custom | RG-58 C/U   | AM90C04    | 1Y            | Feb. 28, 18      |
| W2  | Coaxial Cable | Suhner         | SUCOFLEX104 | F0000018   | 1Y            | Jan. 31, 18      |



## Measuring Equipment Configuration

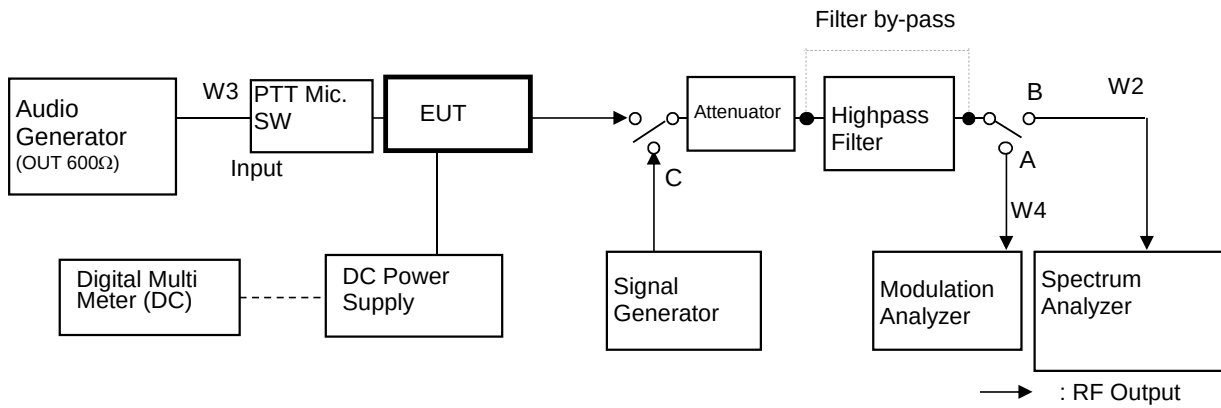

Note: Configuration of other Modulation test is composed without the Audio Generator.

**Test Results**

|                      |                         |
|----------------------|-------------------------|
| Test date            | Aug. 28, 2017           |
| Location             | Kashima No.12 Test Site |
| temperature          | 24 [degree C]           |
| Humidity Variation   | 58 [%]                  |
| Atmospheric Pressure | 100.1 [kPa]             |
| Test Engineer        | Koichi Wagatsuma        |

Test was carried out for all the frequency band of section 10.1

State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz (FCC), 6 kHz (RSS)

| No. | Tuned Frequency (MHz) | Band   | Spurious Frequency (MHz) | Correct Level (dBm) | Emission Level (dBc) | Mask H/G/EA Limit (dBc) | Mask E Limit (dBc) | Margin (Worst) (dB) |
|-----|-----------------------|--------|--------------------------|---------------------|----------------------|-------------------------|--------------------|---------------------|
| 1   | 851.05                | Low    | 3404.20                  | -48.04              | <b>-73.60</b>        | -38.6                   | -50.6              | 23.0                |
| 2   | 860.05                | Middle | 3440.20                  | -47.92              | <b>-73.49</b>        | -38.6                   | -50.6              | 22.9                |
| 3   | 868.95                | High   | 3475.80                  | -47.58              | <b>-73.14</b>        | -38.6                   | -50.6              | 22.5                |

There is the margin of 20dB over except for the above points.

Mask H/G/EA Limit(dBc)=- (43+10Log(P))

Mask E Limit (dBc) = whichever is the lesser attenuation ; -(55+10Log(P)) or -65

Correct Level (dBm) = Substitute SG Level (dBm)

Emission Level (dBc) = Correct Level (dBm) - 10Log(P\*1000)

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 20 kHz (FCC), 6 kHz (RSS)

| No. | Tuned Frequency (MHz) | Band   | Spurious Frequency (MHz) | Correct Level (dBm) | Emission Level (dBc) | Mask H/G/EA Limit (dBc) | Mask E Limit (dBc) | Margin (Worst) (dB) |
|-----|-----------------------|--------|--------------------------|---------------------|----------------------|-------------------------|--------------------|---------------------|
| 1   | 851.05                | Low    | No Point detected        | -                   | -                    | -33.0                   | -45.0              | -                   |
| 2   | 860.05                | Middle | No Point detected        | -                   | -                    | -33.0                   | -45.0              | -                   |
| 3   | 868.95                | High   | No Point detected        | -                   | -                    | -33.0                   | -45.0              | -                   |

There is the margin of 20dB over except for the above points.

Mask H/G/EA Limit(dBc)=- (43+10Log(P))

Mask E Limit (dBc) = whichever is the lesser attenuation ; -(55+10Log(P)) or -65

Correct Level (dBm) = Substitute SG Level (dBm)

Emission Level (dBc) = Correct Level (dBm) - 10Log(P\*1000)

P = Carrier Level (W)

" - " = Measurement Limit

### 10.3 Field Strength of Spurious Radiation

|                   |   |                                                                        |
|-------------------|---|------------------------------------------------------------------------|
| REGULATIONS       | : | FCC Part 2 Section 1053 (a), Part 90 Section 210 / RSS-119 Section 5.8 |
| TEST METHOD/GUIDE | : | ANSI/TIA-603-E Section 2.2.12.2 / RSS-119 Section 4.2                  |

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
  - c) Detector mode : Positive Peak
- 3 The transmitter was placed on a wooden turntable, and it was transmitting into non-radiating load which was also placed on the turntable.
- 4 The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 5 The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 6 Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- 7 Spurious emissions in dB = 10 Log (TX power in Watts/0.001) – the absolute level


#### Measuring Equipments

| No. | Equipment           | Manufacture         | Model No.  | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|---------------------|------------|------------|---------------|------------------|
| 1   | Attenuator(10dB)    | HUBER+SUHNER        | 6810.17B   | 5061       | 1Y            | Feb. 28, 18      |
| 2   | Dummy Load          | TME                 | CT-03BP    | 4B336      | 1Y            | Sep. 30, 18      |
| 3   | Signal Generator    | Rohde&Schwarz       | SMP02      | 845275/007 | 1Y            | Jul. 31, 18      |
| 4   | Spectrum Analyzer   | Agilent             | N9030A     | US51350220 | 1Y            | Feb. 28, 18      |
| 5   | D.R.G Antenna(RX)   | Schwarzbeck         | 3115       | 5044       | 1Y            | May. 31, 18      |
| 6   | D.R.G Antenna(RX)   | Schwarzbeck         | 3115       | 5045       | 1Y            | Mar. 31, 18      |
| 7   | Dipole Antenna(TX)  | Schwarzbeck         | UHA9105    | AM0082002  | 1Y            | Aug. 31, 18      |
| 8   | Dipole Antenna(TX)  | Schwarzbeck         | VHA9103    | C01082007  | 1Y            | Aug. 31, 18      |
| 9   | Tri-log Antenna(RX) | Schwarzbeck         | VULB9168WP | 126        | 1Y            | Dec. 31, 17      |
| 10  | DC Power Supply     | Daiichi denpa kogyo | GZV4000    | 90290931   | None          | None             |
| 11  | DC Power Supply     | Daiwa               | PS-3020    | 301027     | None          | None             |
| 12  | Digital Multi Meter | FLUKE               | 8846A      | 9642018    | 1Y            | Jul. 31, 18      |
| 13  | Amplifier           | TOYO                | TPA0118-30 | 0402       | 1Y            | Apr. 30, 18      |
| 14  | Attenuator          | HUBER + SUHNER      | 6803.17.B  | 5111       | 1Y            | Apr. 30, 18      |
| 15  | Amplifier           | Intertek Japan      | ZX60-3018G | 005        | 1Y            | Feb. 28, 18      |
| 16  | Attenuator          | TAMAGAWA            | CFA-01     | A00040805  | 1Y            | Feb. 28, 18      |
| 17  | RF Switch           | Intertek Japan      | ACX-150-1  | A12301501  | 1Y            | Feb. 28, 18      |

## Measuring Cables

| No. | Cable         | Manufacturer | Model No.         | Serial No. | Cal. Interval | Effective period |
|-----|---------------|--------------|-------------------|------------|---------------|------------------|
| R11 | Coaxial Cable | FUJIKURA     | 5D-2W             | R11        | 1Y            | Feb. 28, 18      |
| R1  | Coaxial Cable | FUJIKURA     | 5D-2W             | R1         | 1Y            | Feb. 28, 18      |
| R3  | Coaxial Cable | FUJIKURA     | 10D-2W            | R3         | 1Y            | Feb. 28, 18      |
| R5  | Coaxial Cable | FUJIKURA     | RG-5A/U           | R5         | 1Y            | Feb. 28, 18      |
| R7  | Coaxial Cable | MIYAZAKI     | 5D-2W             | R7         | 1Y            | Feb. 28, 18      |
| R10 | Coaxial Cable | FUJIKURA     | 5D-2W             | R10        | 1Y            | Feb. 28, 18      |
| R13 | Coaxial Cable | SUHNER       | SUCOFLEX 104      | 229603     | 1Y            | Apr. 30, 18      |
| R12 | Coaxial Cable | Candox       | 5B-048-98-98-5000 | 111130     | 1Y            | Apr. 30, 18      |
| W13 | Coaxial Cable | Suhner       | SUCOFLEX106       | KSR00207   | 1Y            | Feb. 28, 18      |

## Measuring Equipment Configuration

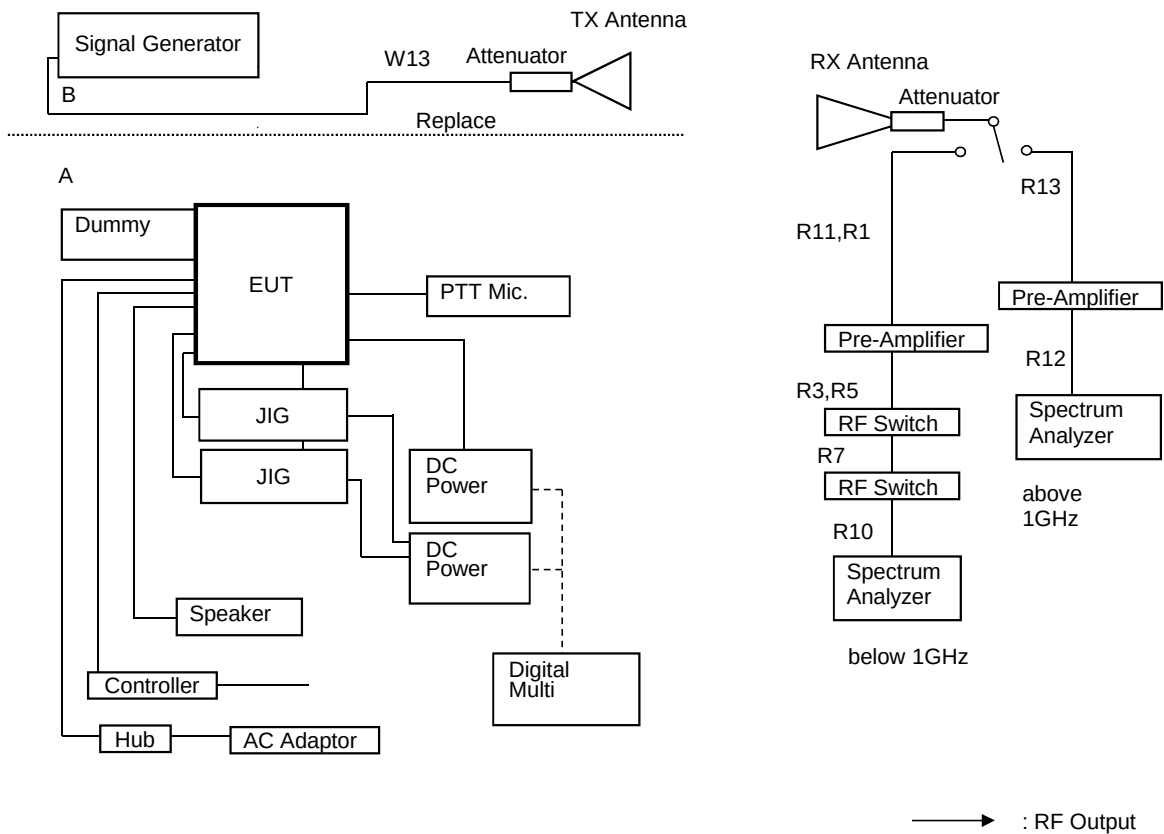

## Test Results

|                      |                              |
|----------------------|------------------------------|
| Test date            | Sep 20, 2017 to Sep 21, 2017 |
| Location             | Kashima No.12 Test Site      |
| temperature          | 20.3 to 22.4 [degree C]      |
| Humidity Variation   | 42 to 59 [%]                 |
| Atmospheric Pressure | 99.9 to 100.9 [kPa]          |
| Test Engineer        | Koichi Wagatsuma             |

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz(FCC), 6 kHz(RSS) / 860.05MHz(FCC /RSS)

| No | Frequency (MHz) | Pol  | Reading Level (dBm) | SG Out Level (dBm) | Antenna Gain (dBd) | Loss (dB) | Correct Level (dBm) | Emission Level (dBc) | Mask H / G / EA Limit Level (dBc) | MASK E Limit Level (dBc) | Margin (Worst) (dB) |
|----|-----------------|------|---------------------|--------------------|--------------------|-----------|---------------------|----------------------|-----------------------------------|--------------------------|---------------------|
| 1  | 1720.10         | Hor. | -52.71              | -40.61             | 6.12               | 13.39     | -47.9               | <b>-73.4</b>         | -38.6                             | -50.6                    | 22.8                |
|    |                 | Ver. | -52.55              | -40.03             | 6.12               | 13.39     | -47.3               | <b>-72.9</b>         | -38.6                             | -50.6                    | 22.3                |
| 2  | 2580.15         | Hor. | -47.84              | -32.52             | 7.54               | 14.22     | -39.2               | <b>-64.8</b>         | -38.6                             | -50.6                    | 14.2                |
|    |                 | Ver. | -45.78              | -29.15             | 7.54               | 14.22     | -35.8               | <b>-61.4</b>         | -38.6                             | -50.6                    | 10.8                |
| 3  | 3440.20         | Hor. | -52.50              | -33.45             | 7.74               | 14.91     | -40.6               | <b>-66.2</b>         | -38.6                             | -50.6                    | 15.6                |
|    |                 | Ver. | -50.06              | -31.61             | 7.74               | 14.91     | -38.8               | <b>-64.3</b>         | -38.6                             | -50.6                    | 13.7                |
| 4  | 4300.25         | Hor. | -59.10              | -39.53             | 8.55               | 15.49     | -46.5               | <b>-72.0</b>         | -38.6                             | -50.6                    | 21.4                |
|    |                 | Ver. | -53.78              | -35.03             | 8.55               | 15.49     | -42.0               | <b>-67.5</b>         | -38.6                             | -50.6                    | 16.9                |
| 5  | 5160.30         | Hor. | -60.78              | -38.35             | 9.01               | 15.97     | -45.3               | <b>-70.9</b>         | -38.6                             | -50.6                    | 20.3                |
|    |                 | Ver. | -58.50              | -36.43             | 9.01               | 15.97     | -43.4               | <b>-69.0</b>         | -38.6                             | -50.6                    | 18.4                |
| 6  | 6020.35         | Hor. | -                   | -                  | 9.54               | 16.49     | -                   | -                    | -38.6                             | -50.6                    | -                   |
|    |                 | Ver. | -                   | -                  | 9.54               | 16.49     | -                   | -                    | -38.6                             | -50.6                    | -                   |
| 7  | 6880.40         | Hor. | -                   | -                  | 9.52               | 16.89     | -                   | -                    | -38.6                             | -50.6                    | -                   |
|    |                 | Ver. | -                   | -                  | 9.52               | 16.89     | -                   | -                    | -38.6                             | -50.6                    | -                   |
| 8  | 7740.45         | Hor. | -                   | -                  | 9.43               | 17.46     | -                   | -                    | -38.6                             | -50.6                    | -                   |
|    |                 | Ver. | -                   | -                  | 9.43               | 17.46     | -                   | -                    | -38.6                             | -50.6                    | -                   |
| 9  | 8600.50         | Hor. | -                   | -                  | 8.97               | 17.96     | -                   | -                    | -38.6                             | -50.6                    | -                   |
|    |                 | Ver. | -                   | -                  | 8.97               | 17.96     | -                   | -                    | -38.6                             | -50.6                    | -                   |

There is the margin of 20dB over except for the above points.

Mask H/G/EA Limit (dBc) =  $-(43+10\log(P))$

Mask E Limit (dBc) = whichever is the lesser attenuation ;  $-(55+10\log(P))$  or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBd) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 20 kHz(FCC), 6 kHz(RSS) / 868.95MHz(FCC /RSS)

|                                                               |                    |      |                           |                          |                          |              |                           |                            | Mask H /<br>G / EA      |                                |                           |
|---------------------------------------------------------------|--------------------|------|---------------------------|--------------------------|--------------------------|--------------|---------------------------|----------------------------|-------------------------|--------------------------------|---------------------------|
| No                                                            | Frequency<br>(MHz) | Pol  | Reading<br>Level<br>(dBm) | SG Out<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd) | Loss<br>(dB) | Correct<br>Level<br>(dBm) | Emission<br>Level<br>(dBc) | Limit<br>Level<br>(dBc) | MASK E<br>Limit Level<br>(dBc) | Margin<br>(Worst)<br>(dB) |
| 1                                                             | 1737.90            | Hor. | -57.57                    | -45.47                   | 6.12                     | 13.41        | -52.8                     | <b>-72.8</b>               | -33.0                   | -45.0                          | 27.8                      |
|                                                               |                    | Ver. | -55.94                    | -43.30                   | 6.12                     | 13.41        | -50.6                     | <b>-70.6</b>               | -33.0                   | -45.0                          | 25.6                      |
| 2                                                             | 2606.85            | Hor. | -62.00                    | -46.32                   | 7.53                     | 14.24        | -53.0                     | <b>-73.0</b>               | -33.0                   | -45.0                          | 28.0                      |
|                                                               |                    | Ver. | -59.18                    | -42.47                   | 7.53                     | 14.24        | -49.2                     | <b>-69.2</b>               | -33.0                   | -45.0                          | 24.2                      |
| 3                                                             | 3475.80            | Hor. | -                         | -                        | 7.77                     | 14.94        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -61.55                    | -43.06                   | 7.77                     | 14.94        | -50.2                     | <b>-70.2</b>               | -33.0                   | -45.0                          | 25.2                      |
| 4                                                             | 4344.75            | Hor. | -                         | -                        | 8.65                     | 15.51        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -                         | -                        | 8.65                     | 15.51        | -                         | -                          | -33.0                   | -45.0                          | -                         |
| 5                                                             | 5213.70            | Hor. | -                         | -                        | 9.00                     | 16.01        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -                         | -                        | 9.00                     | 16.01        | -                         | -                          | -33.0                   | -45.0                          | -                         |
| 6                                                             | 6082.65            | Hor. | -                         | -                        | 9.61                     | 16.52        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -                         | -                        | 9.61                     | 16.52        | -                         | -                          | -33.0                   | -45.0                          | -                         |
| 7                                                             | 6951.60            | Hor. | -                         | -                        | 9.57                     | 16.93        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -                         | -                        | 9.57                     | 16.93        | -                         | -                          | -33.0                   | -45.0                          | -                         |
| 8                                                             | 7820.55            | Hor. | -                         | -                        | 9.38                     | 17.51        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -                         | -                        | 9.38                     | 17.51        | -                         | -                          | -33.0                   | -45.0                          | -                         |
| 9                                                             | 8689.50            | Hor. | -                         | -                        | 8.98                     | 18.01        | -                         | -                          | -33.0                   | -45.0                          | -                         |
|                                                               |                    | Ver. | -                         | -                        | 8.98                     | 18.01        | -                         | -                          | -33.0                   | -45.0                          | -                         |
| There is the margin of 20dB over except for the above points. |                    |      |                           |                          |                          |              |                           |                            |                         |                                |                           |

Mask H/G/EA Limit (dBc) =  $-(43+10\log(P))$

Mask E Limit (dBc) = whichever is the lesser attenuation ;  $-(55+10\log(P))$  or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBd) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

#### 10.4 Emission Masks (Occupied Bandwidth)

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| REGULATIONS       | : FCC Part 2 Section 1049 (c) (1), Part 90 Section 210<br>RSS-119 Section 5.5 |
| TEST METHOD/GUIDE | : ANSI/TIA-603-E Section 2.2.11.2 / RSS-119 Section 5.8                       |

#### Test Procedure

- The EUT and test equipment were set up as shown on the following page.
- For EUT supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for +/- 2.5 kHz deviation (or 50 % modulation). (FM modulation).
- With level constant, the signal level was increased 16 dB.
- For EUT supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- Adjust the spectrum analyzer for the following setting:
  - RBW : 100Hz (Non modulation and Authorized Band 6 kHz),  
100Hz (Non modulation and Authorized Band 11.25 kHz),  
300Hz (Non modulation and Authorized Band 20 kHz).
  - VBW : 10times the RBW (Non modulation , Authorized Band 6kHz, 11.25 kHz and 20 kHz).
  - RBW and VBW : 30 kHz (Non modulation(Digital Modulation)).
- The occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

#### The selection of Emission Mask

| No. Frequency          |        |         | Authorized Bandwidth |       | Selection of  |    |
|------------------------|--------|---------|----------------------|-------|---------------|----|
| (MHz)                  |        |         | (kHz)                |       | Emission Mask |    |
| Audio Filter           |        |         | FCC                  | IC    | FCC           | IC |
| Emission Designation : |        |         | 16K0F3E              |       |               |    |
| 1                      | 851.05 | With    | 20                   | 20    | B             | B  |
| 2                      | 860.05 | With    | 20                   | 20    | B / EA        | B  |
| 3                      | 868.95 | With    | 20                   | 20    | B / EA        | B  |
| Emission Designation : |        |         | 14K0F3E              |       |               |    |
| 1                      | 851.05 | With    | 20                   | 20    | B             | B  |
| 2                      | 860.05 | With    | 20                   | 20    | B / EA        | B  |
| 3                      | 868.95 | With    | 20                   | 20    | B / EA        | B  |
| Emission Designation : |        |         | 11K0F3E              |       |               |    |
| 1                      | 851.05 | With    | 20                   | 11.25 | B             | D  |
| 2                      | 860.05 | With    | 20                   | 11.25 | B / EA        | D  |
| 3                      | 868.95 | With    | 20                   | 11.25 | B / EA        | D  |
| Emission Designation : |        |         | 8K30F1E/F1D/F7W      |       |               |    |
| 1                      | 851.05 | Without | 20                   | 11.25 | H             | D  |
| 2                      | 860.05 | Without | 20                   | 11.25 | G /EA         | D  |
| 3                      | 868.95 | Without | 20                   | 11.25 | G /EA         | D  |
| Emission Designation : |        |         | 4K00F1E / F1D / F7W  |       |               |    |
| 1                      | 851.05 | Without | 20                   | 6     | H             | E  |
| 2                      | 860.05 | Without | 20                   | 6     | G /EA         | E  |
| 3                      | 868.95 | Without | 20                   | 6     | G /EA         | E  |
| Emission Designation : |        |         | 4K00F2D              |       |               |    |
| 1                      | 851.05 | Without | 20                   | 6     | H             | E  |
| 2                      | 860.05 | Without | 20                   | 6     | G /EA         | E  |
| 3                      | 868.95 | Without | 20                   | 6     | G /EA         | E  |


## Measuring Equipments

| No. | Equipment           | Manufacture         | Model No.       | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|---------------------|-----------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel           | WA-29-30-34     | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Modulation Analyzer | Hewlett Packard     | 8901B           | 3403A04852 | 1Y            | Dec. 31, 17      |
| 3   | Audio Generator     | Anritsu             | MG443B          | M70150     | 1Y            | Aug. 31, 18      |
| 4   | Spectrum Analyzer   | Agilent             | N9030A          | US51350220 | 1Y            | Feb. 28, 18      |
| 5   | DC Power Supply     | Daiichi denpa kogyo | GZV4000         | 90290931   | None          | None             |
| 6   | Digital Multi Meter | FLUKE               | 8846A           | 9642018    | 1Y            | Jul. 31, 18      |
| 7   | JIG                 | HP                  | EliteBook 2561p | CNU2262D0Q | None          | None             |

## Measuring Cables

| No. | Cable         | Manufacture    | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-------------|------------|---------------|------------------|
| W3  | Balance Cable | Nicoon         | 3D-2V       | KSR00092   | 1Y            | Mar. 31, 18      |
| W4  | Coaxial Cable | Pacific custom | RG-58 C/U   | AM90C04    | 1Y            | Feb. 28, 18      |
| W2  | Coaxial Cable | Suhner         | SUCOFLEX104 | F0000018   | 1Y            | Jan. 31, 18      |


## Measuring Equipment Configuration

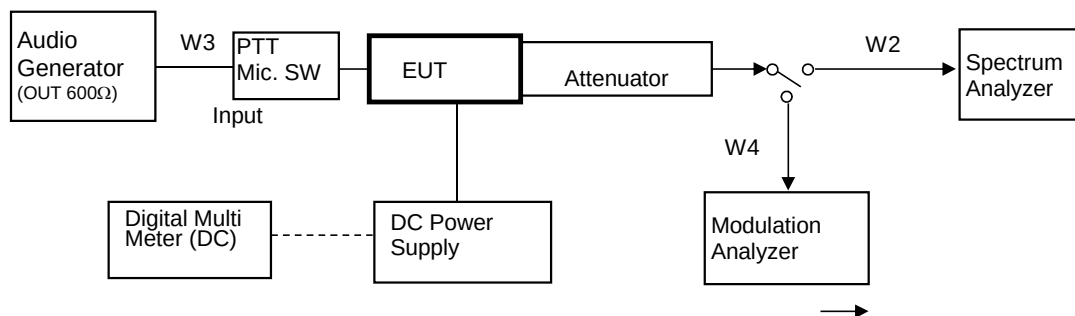

FM Modulation test is with the the Audio Generator.

Configuration of other Modulation test is composed without the Audio Generator. : RF Output

## <CWID Modulation Case>

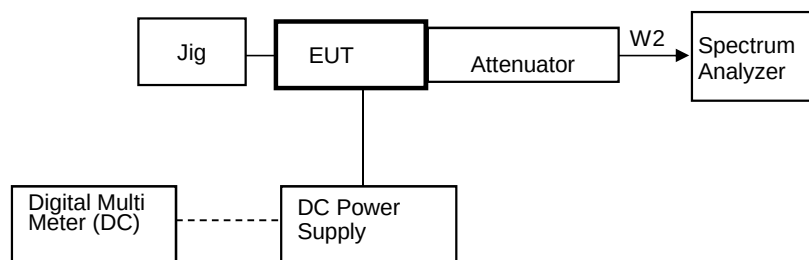



## Test Results


|                      |                         |            |  |
|----------------------|-------------------------|------------|--|
| Test date            | Aug. 28, 2017           |            |  |
| Location             | Kashima No.12 Test Site |            |  |
| temperature          | 23.2                    | [degree C] |  |
| Humidity Variation   | 61                      | [%]        |  |
| Atmospheric Pressure | 100.9                   | [kPa]      |  |
| Test Engineer        | Koichi Wagatsuma        |            |  |

Test was carried out for all the frequency band of section 10.1

State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 860.05 MHz(FCC/RSS)

Limit : Mask B / EA

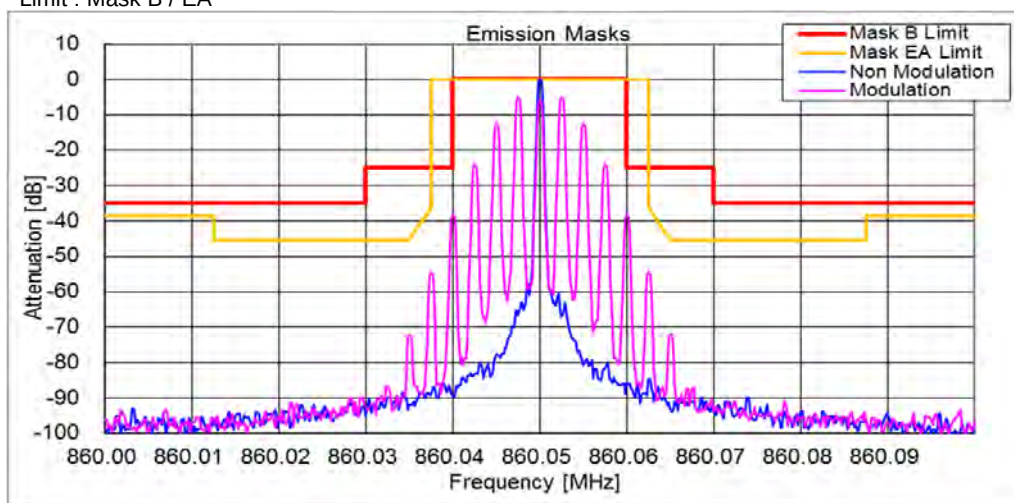


State : Low Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 868.95 MHz(FCC/RSS)


Limit : Mask B / EA

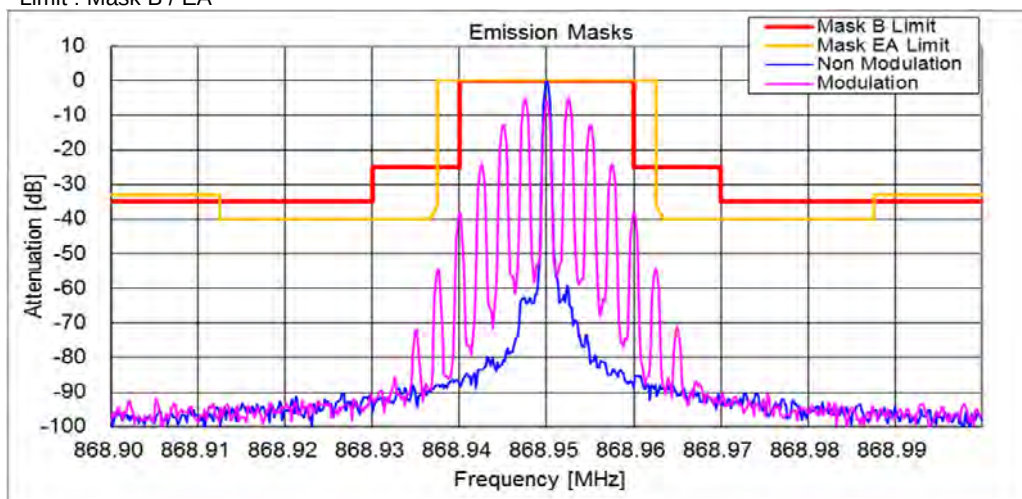


State : High Power / Authorized Bandwidth 20 kHz/ 14K0F3E / 868.95 MHz(FCC/RSS)  
Limit : Mask B / EA

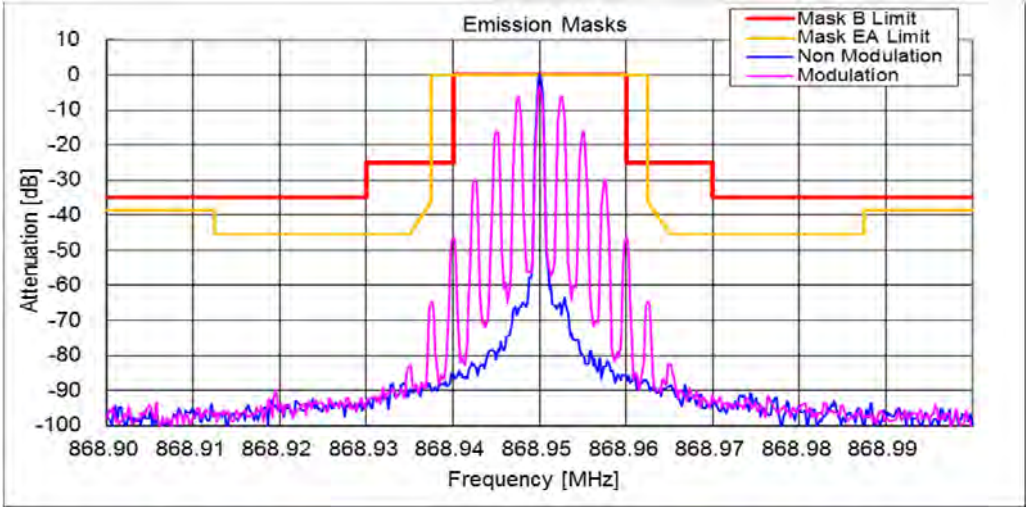


State : Low Power / Authorized Bandwidth 20 kHz/ 14K0F3E / 868.95 MHz(FCC/RSS)  
Limit : Mask B / EA

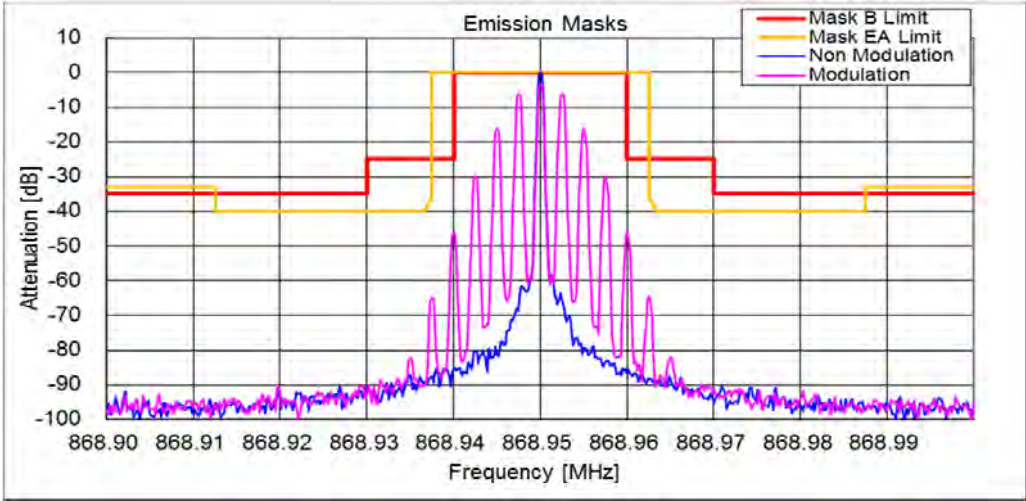

State : High Power / Authorized Bandwidth 20 kHz/ 11K0F3E / 868.95 MHz(FCC)  
Limit : Mask B / EA

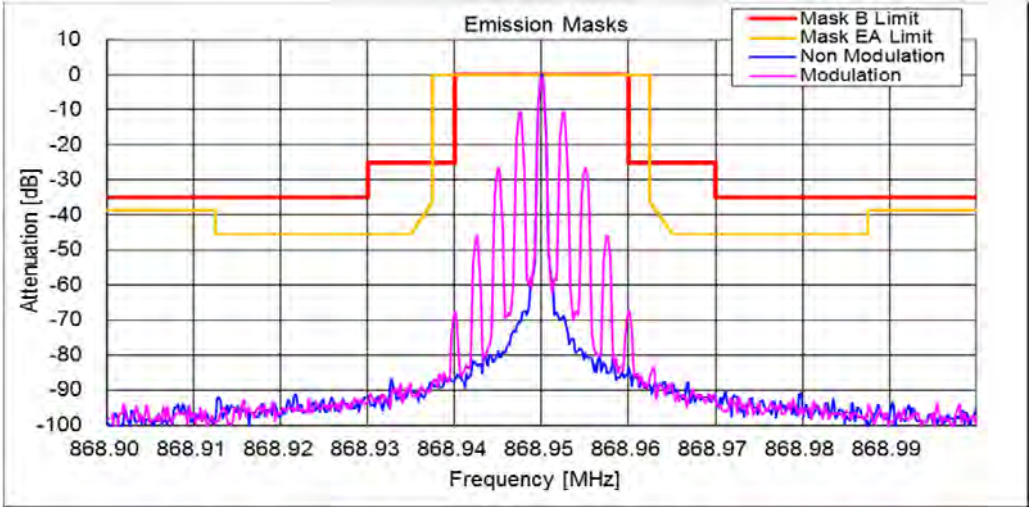


State : Low Power / Authorized Bandwidth 20 kHz/ 11K0F3E / 868.95 MHz(FCC)  
Limit : Mask B / EA

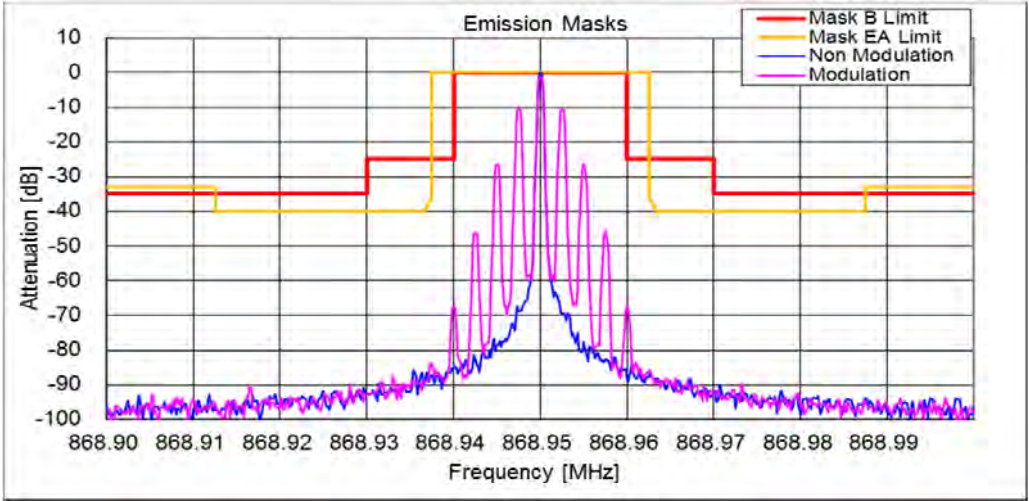





State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 860.05 MHz(RSS)  
 Limit : Mask D

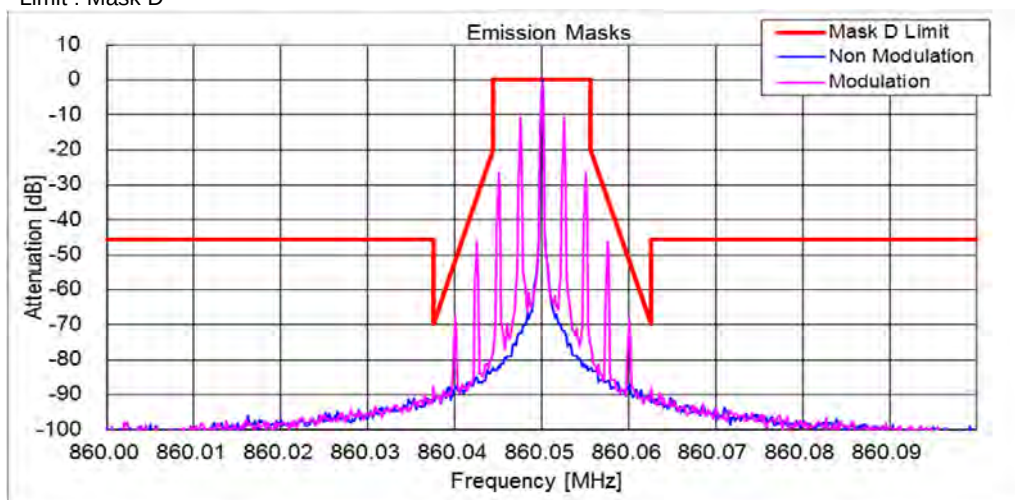


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 860.05 MHz(RSS)  
 Limit : Mask D

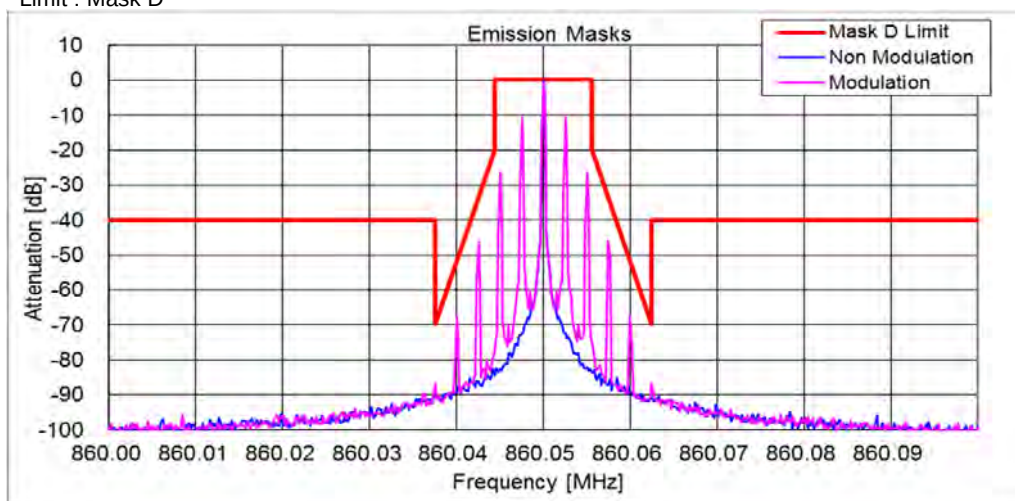


State : High Power / Authorized Bandwidth 20 kHz/ 8K30F1E / 851.05 MHz(FCC)  
Limit : Mask H

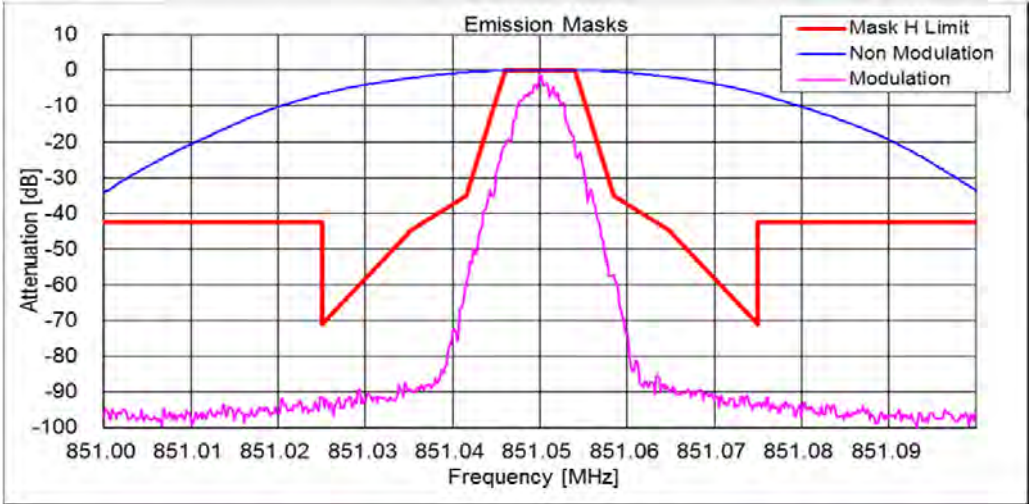


State : Low Power / Authorized Bandwidth 20 kHz/ 8K30F1E / 851.05 MHz(FCC)  
Limit : Mask H

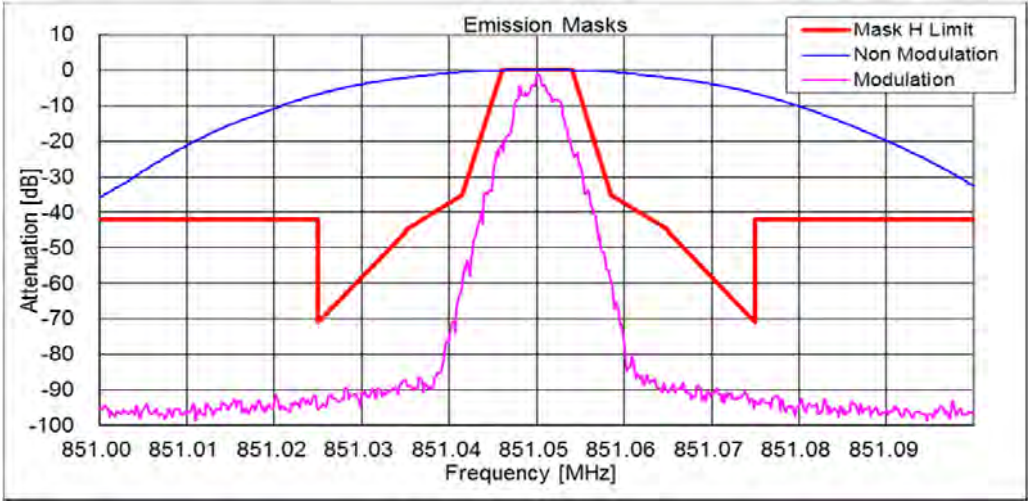


State : High Power / Authorized Bandwidth 20 kHz/ 8K30F1D / 851.05 MHz(FCC)  
Limit : Mask H

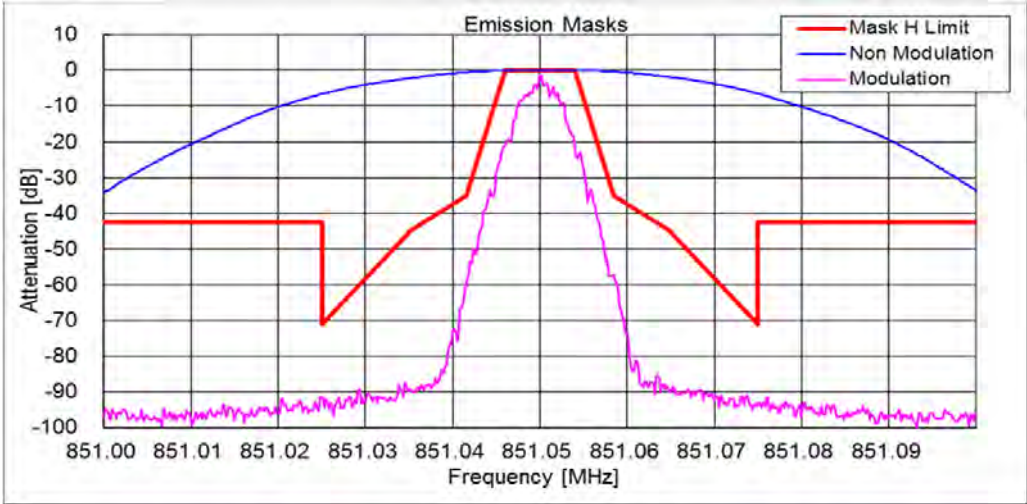


State : Low Power / Authorized Bandwidth 20 kHz/ 8K30F1D / 851.05 MHz(FCC)  
Limit : Mask H

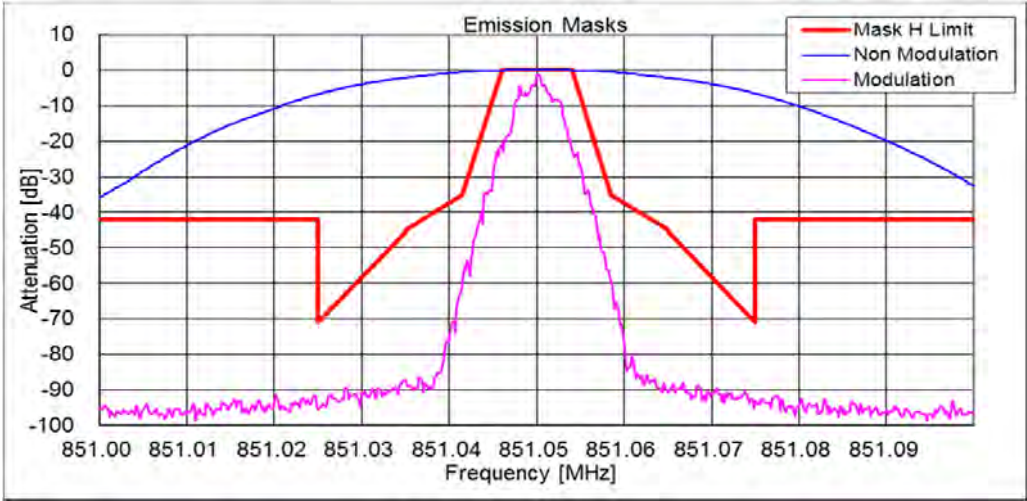

State : High Power / Authorized Bandwidth 20 kHz/ 8K30F7W / 851.05 MHz(FCC)  
Limit : Mask H

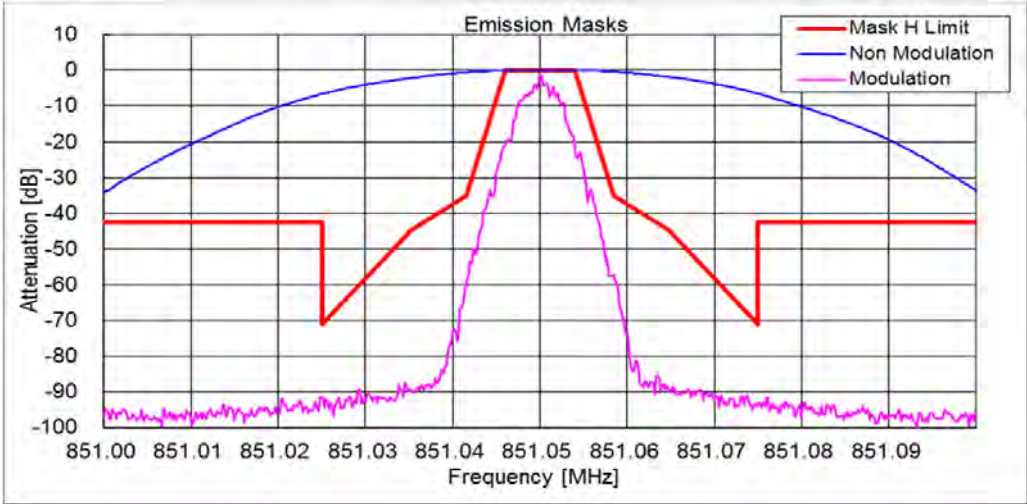


State : Low Power / Authorized Bandwidth 20 kHz/ 8K30F7W / 851.05 MHz(FCC)  
Limit : Mask H

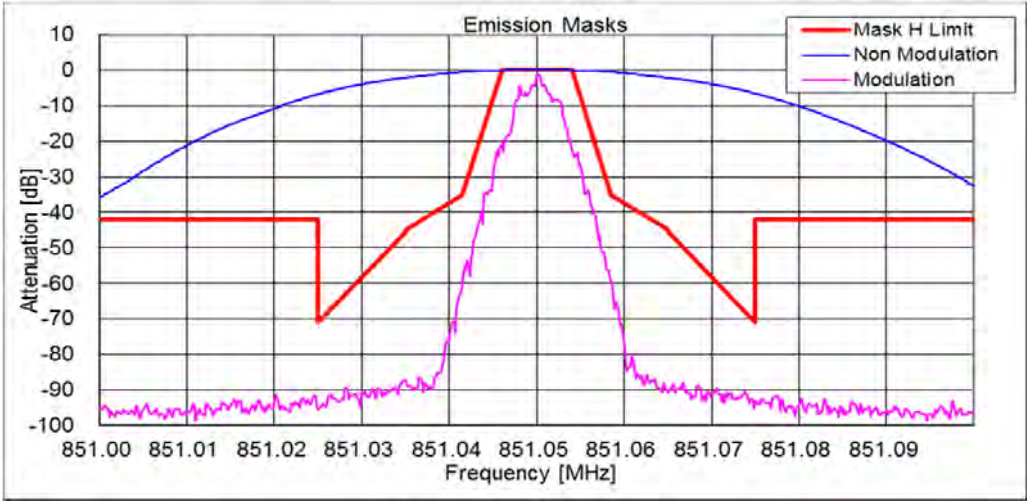




State : High Power / Authorized Bandwidth 20 kHz/ 8K30F1E / 860.05 MHz(FCC)  
Limit : Mask G / EA

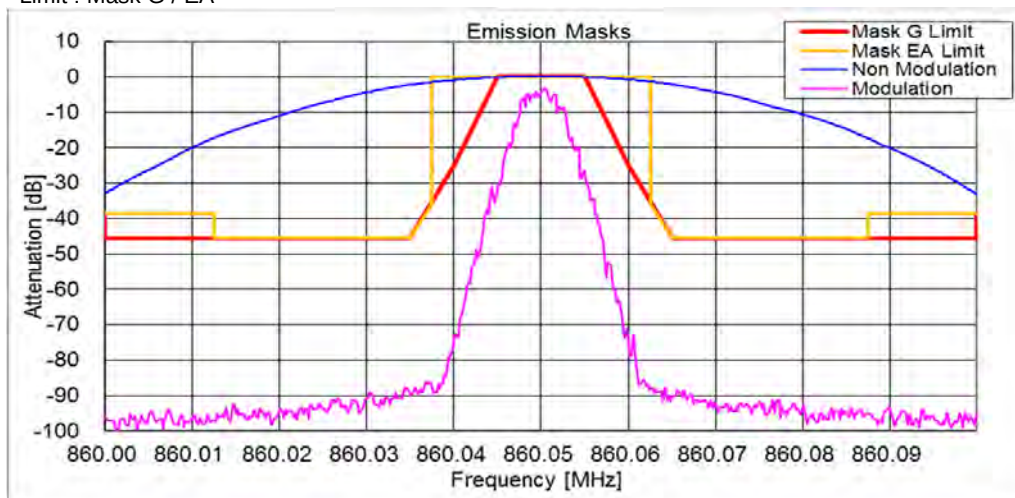


State : Low Power / Authorized Bandwidth 20 kHz/ 8K30F1E / 860.05 MHz(FCC)  
Limit : Mask G / EA

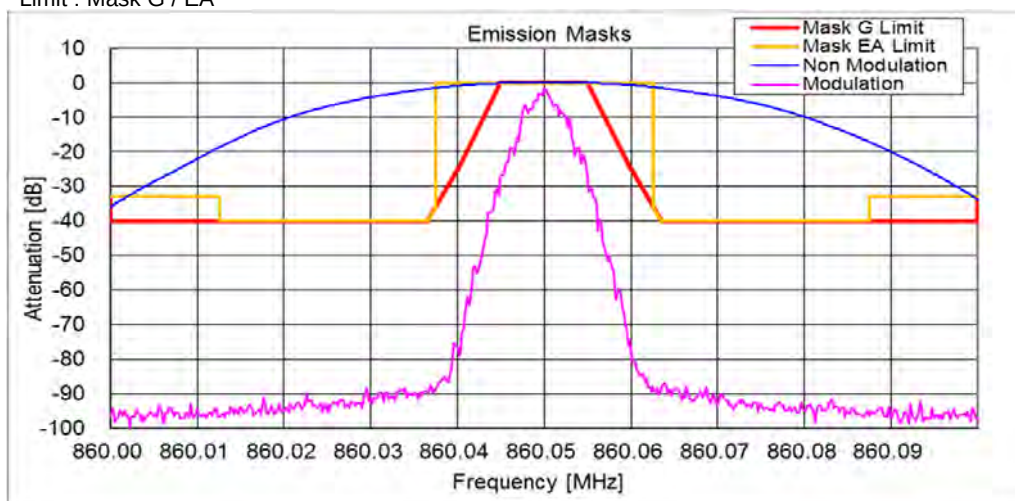





State : High Power / Authorized Bandwidth 20 kHz/ 8K30F1D / 860.05 MHz(FCC)  
Limit : Mask G / EA

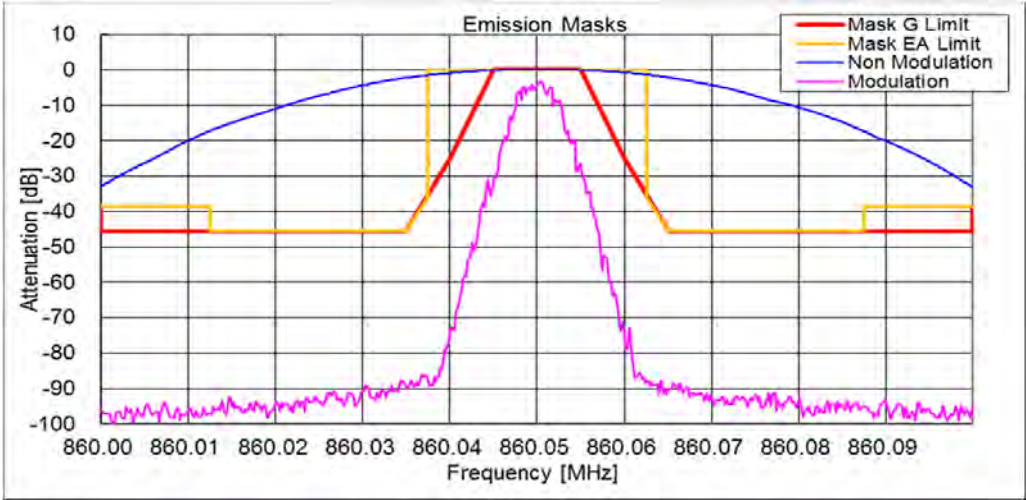


State : Low Power / Authorized Bandwidth 20 kHz/ 8K30F1D / 860.05 MHz(FCC)  
Limit : Mask G / EA

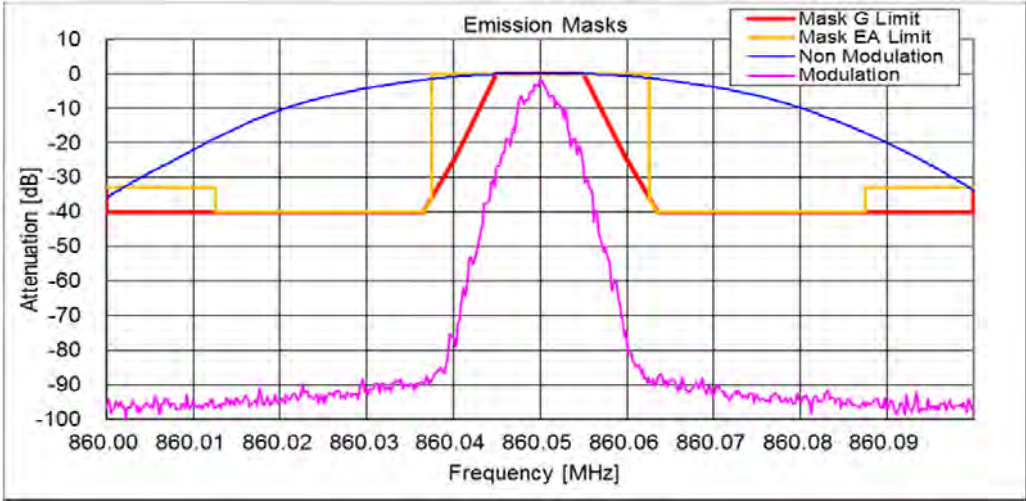


State : High Power / Authorized Bandwidth 20 kHz/ 8K30F7W / 860.05 MHz(FCC)  
Limit : Mask G / EA

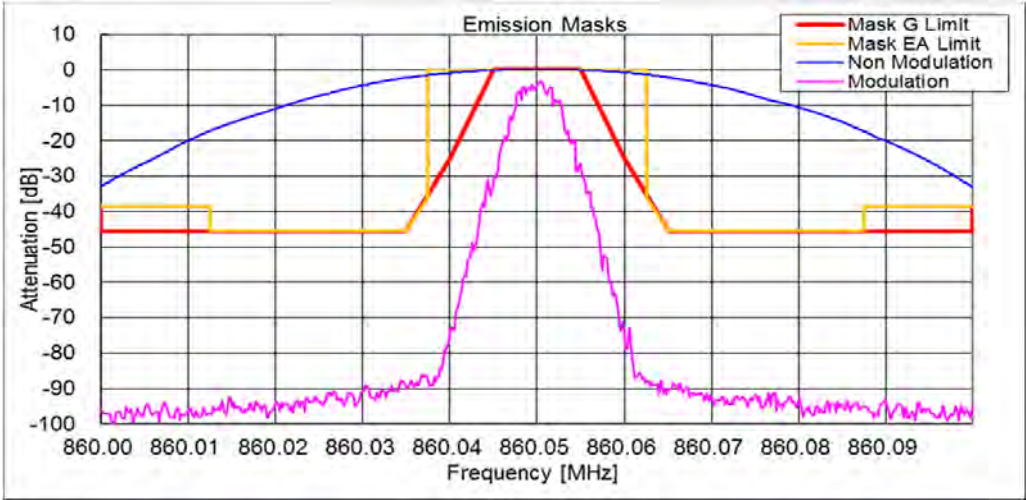


State : Low Power / Authorized Bandwidth 20 kHz/ 8K30F7W / 860.05 MHz(FCC)  
Limit : Mask G / EA

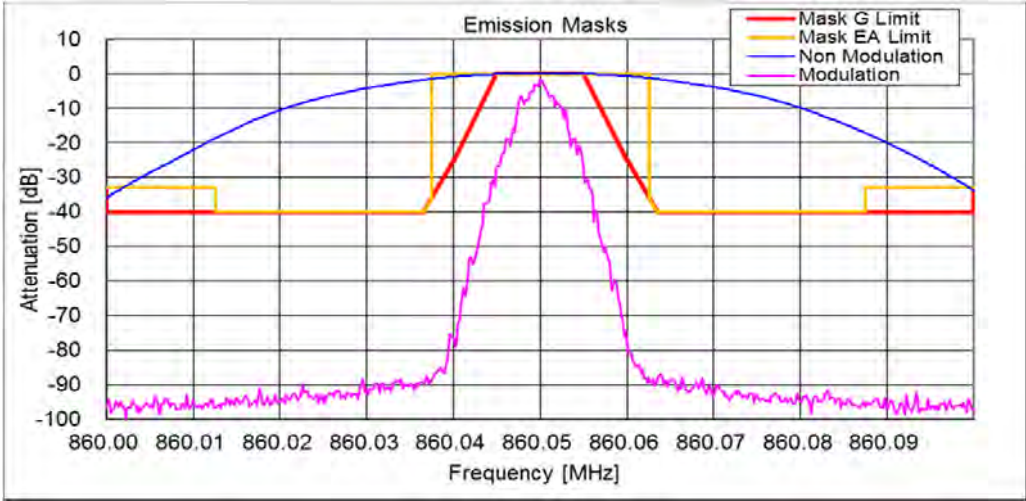


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E / 860.05 MHz(RSS)  
Limit : Mask D

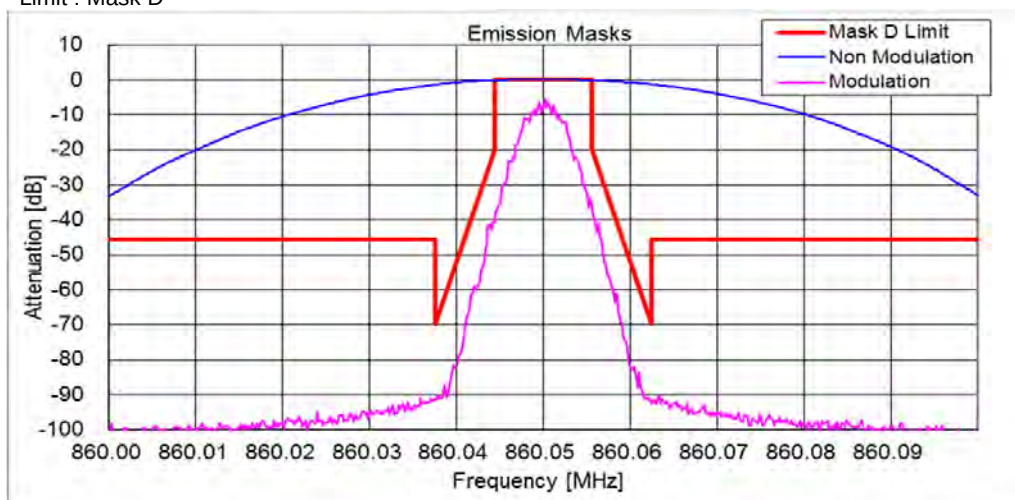


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E / 851.05 MHz(RSS)  
Limit : Mask D

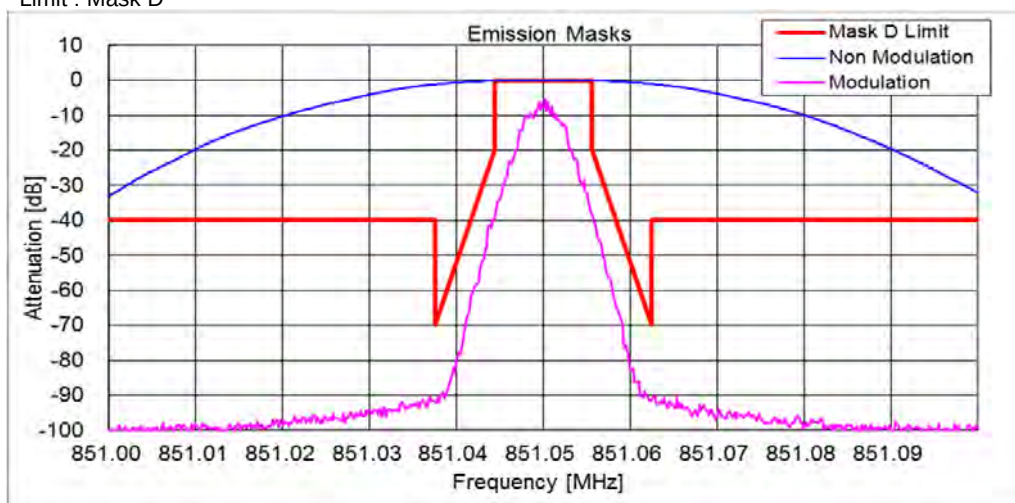

State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1D / 860.05 MHz(RSS)  
Limit : Mask D

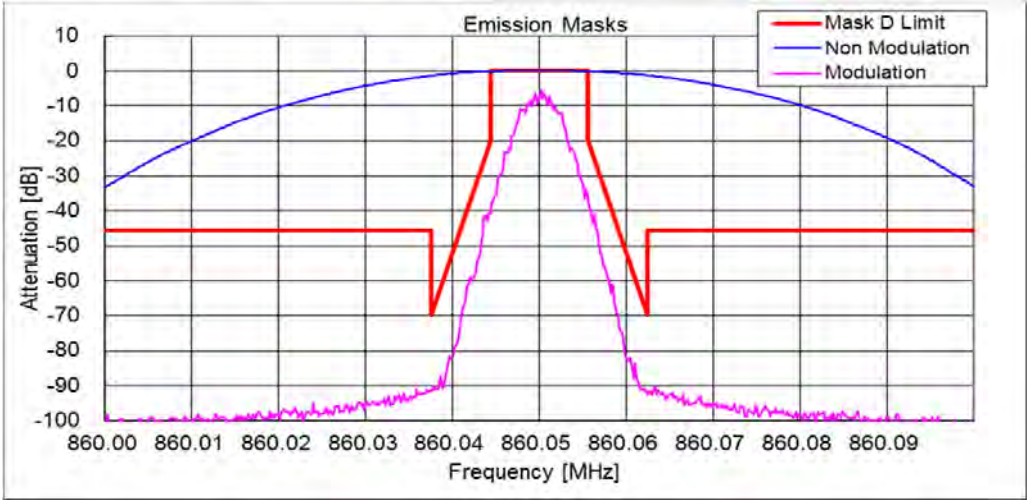


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1D / 851.05 MHz(RSS)  
Limit : Mask D

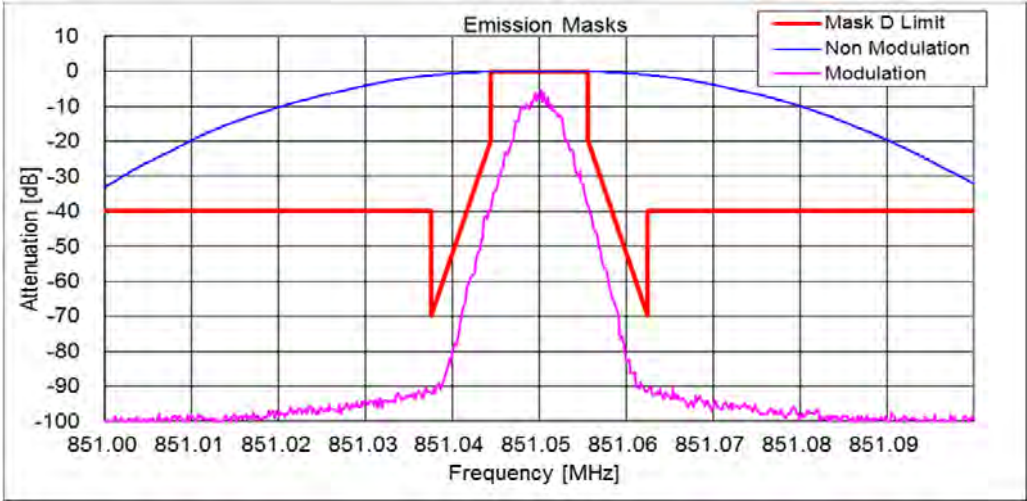





State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F7W / 860.05 MHz(RSS)  
Limit : Mask D

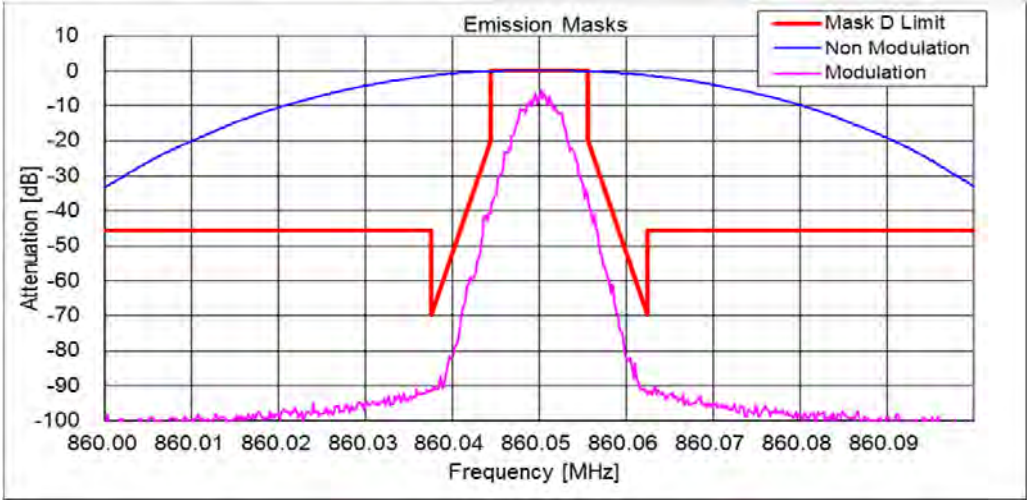


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F7W / 851.05 MHz(RSS)  
Limit : Mask D

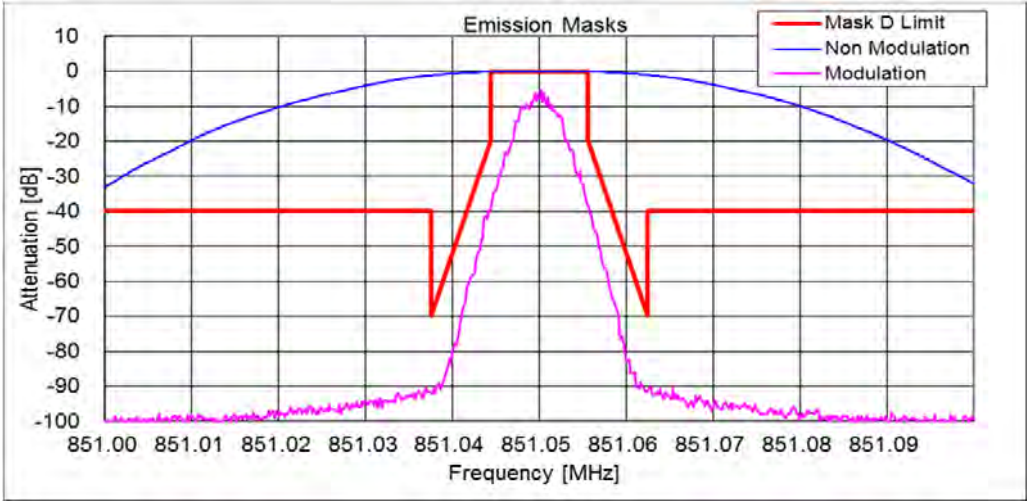


State : High Power / Authorized Bandwidth 20 kHz/ 4K00F1E / 851.05 MHz(FCC)  
Limit : Mask H

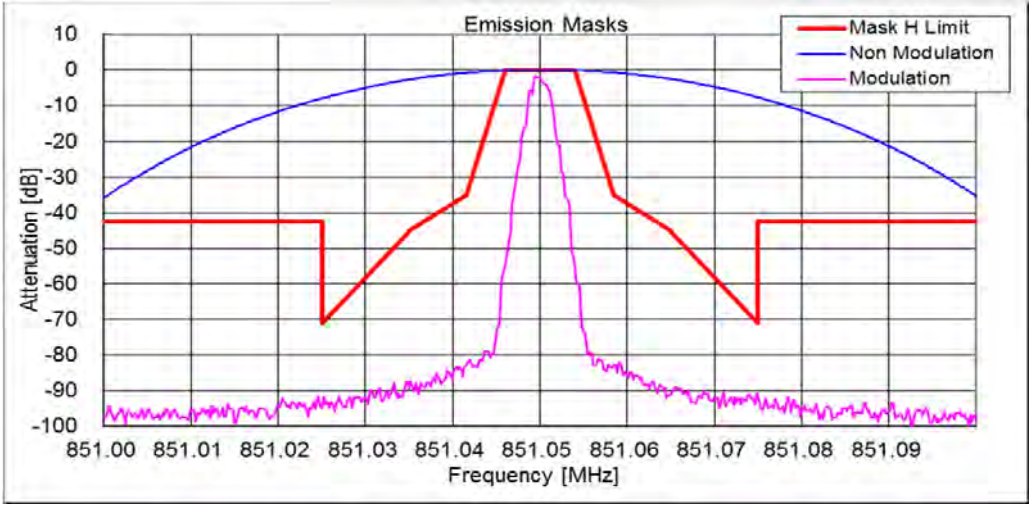


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F1E / 851.05 MHz(FCC)  
Limit : Mask H

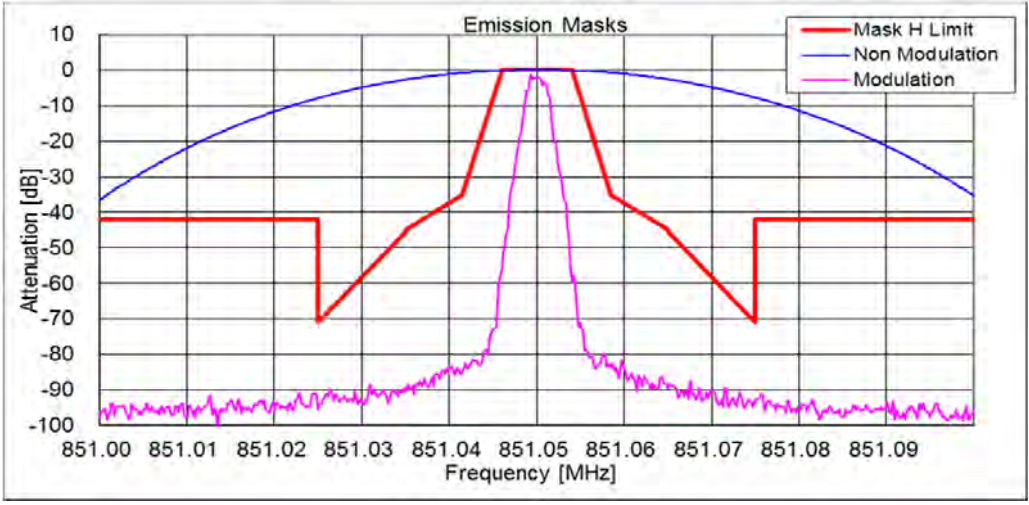


State : High Power / Authorized Bandwidth 20 kHz/ 4K00F1D / 851.05 MHz(FCC)  
Limit : Mask H

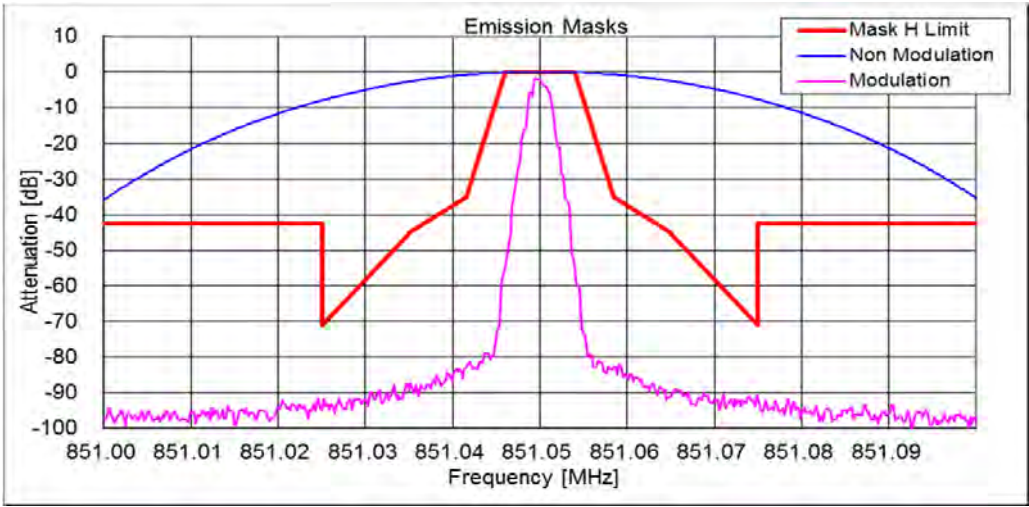


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F1D / 851.05 MHz(FCC)  
Limit : Mask H

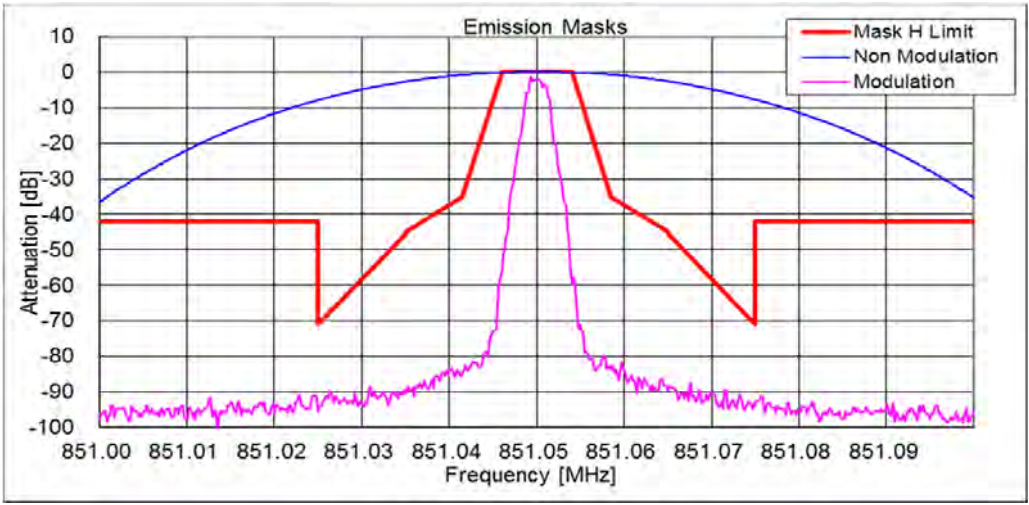

State : High Power / Authorized Bandwidth 20 kHz/ 4K00F7W / 851.05 MHz(FCC)  
Limit : Mask H

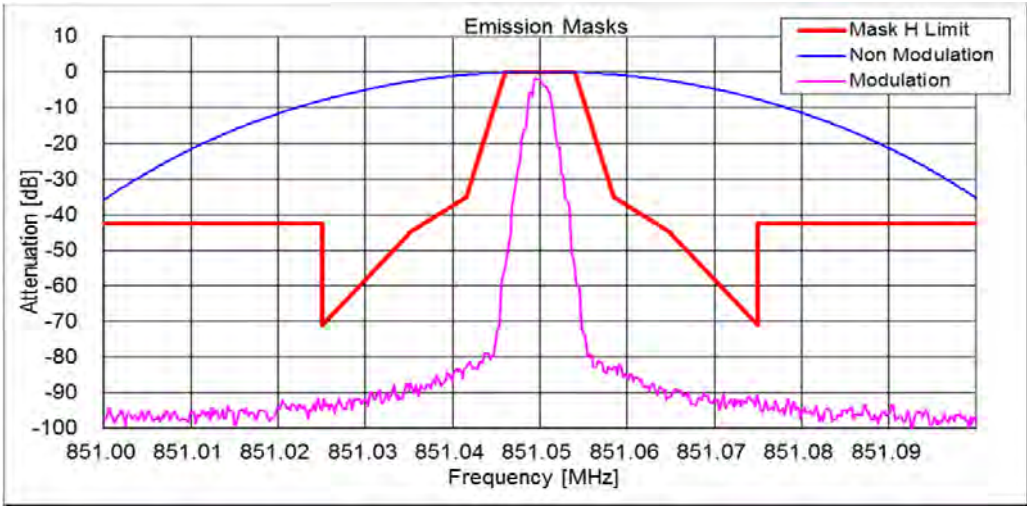


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F7W / 851.05 MHz(FCC)  
Limit : Mask H

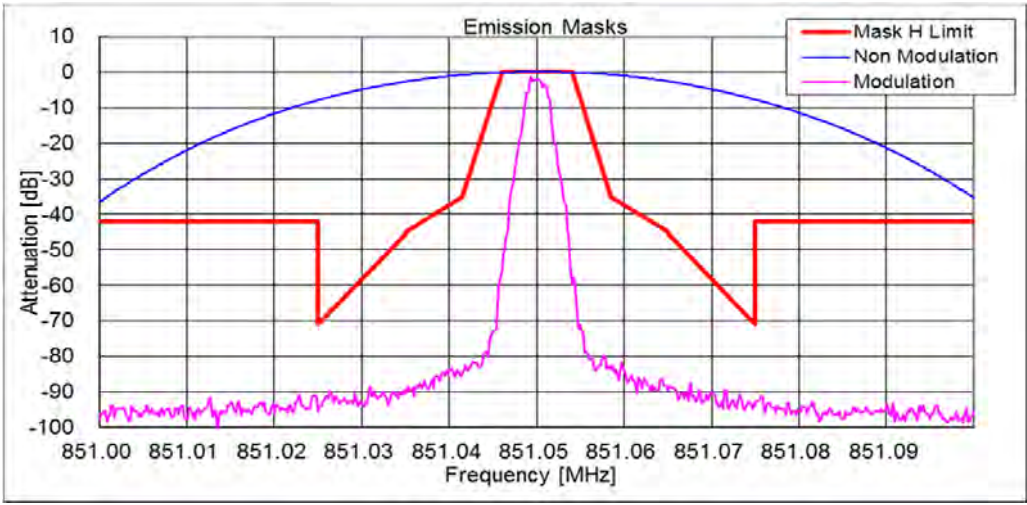





State : High Power / Authorized Bandwidth 20 kHz/ 4K00F1E / 860.05 MHz(FCC)  
Limit : Mask G /EA

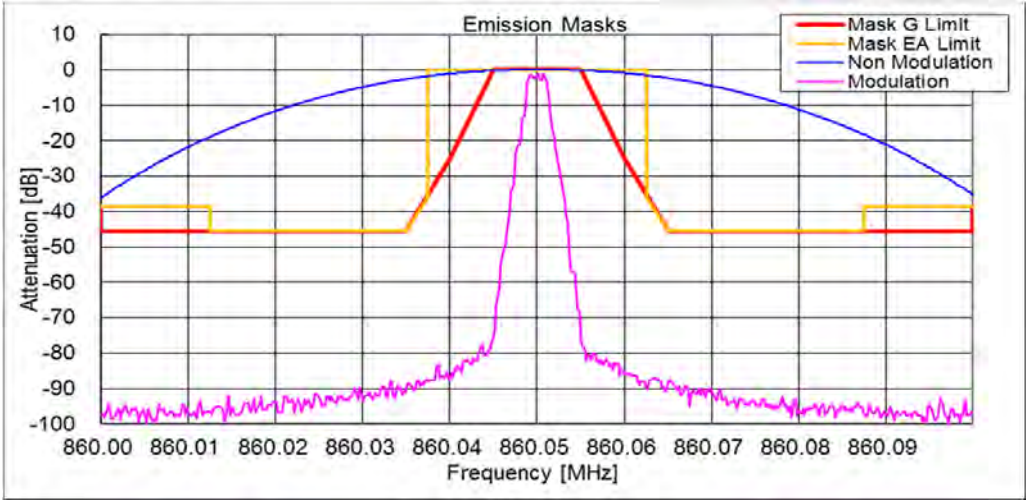


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F1E / 868.95 MHz(FCC)  
Limit : Mask G /EA

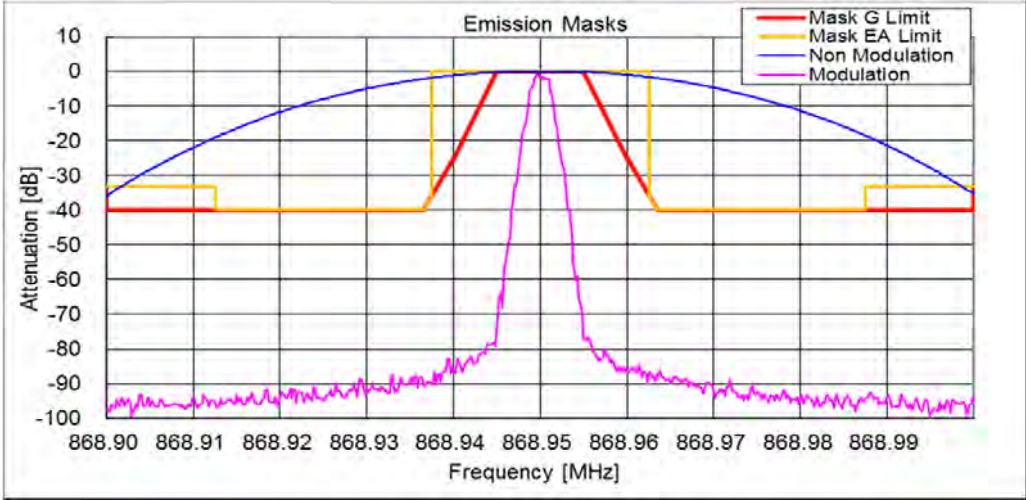


State : High Power / Authorized Bandwidth 20 kHz/ 4K00F1D / 860.05 MHz(FCC)  
Limit : Mask G /EA

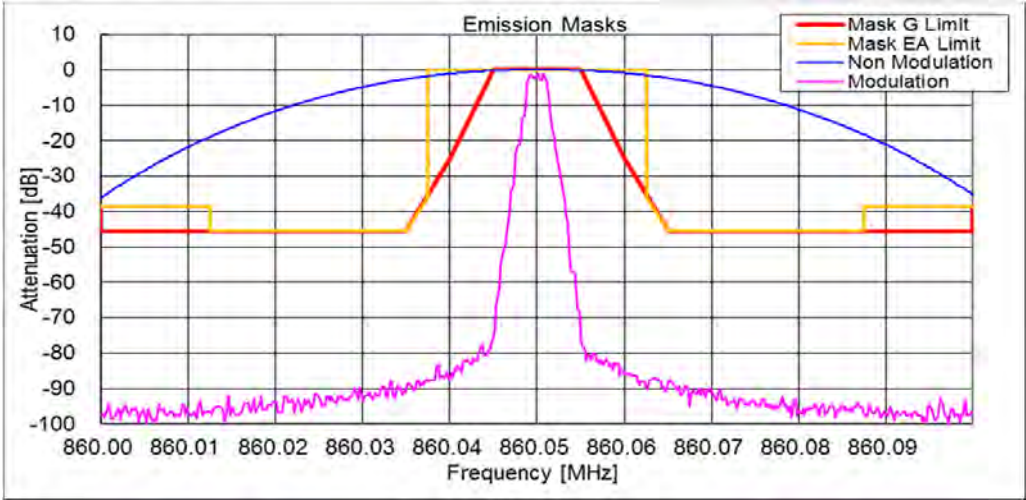


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F1D / 868.95 MHz(FCC)  
Limit : Mask G /EA

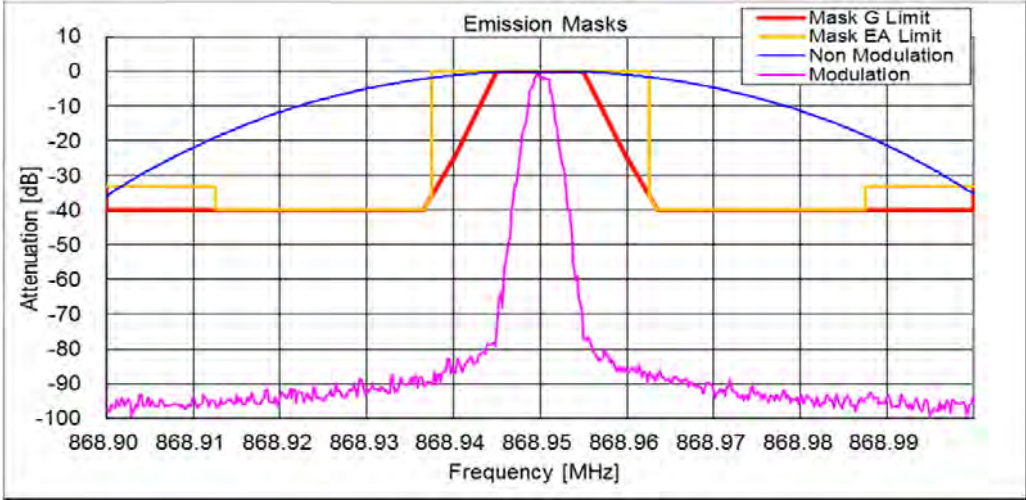


State : High Power / Authorized Bandwidth 20 kHz/ 4K00F7W / 860.05 MHz(FCC)  
Limit : Mask G /EA

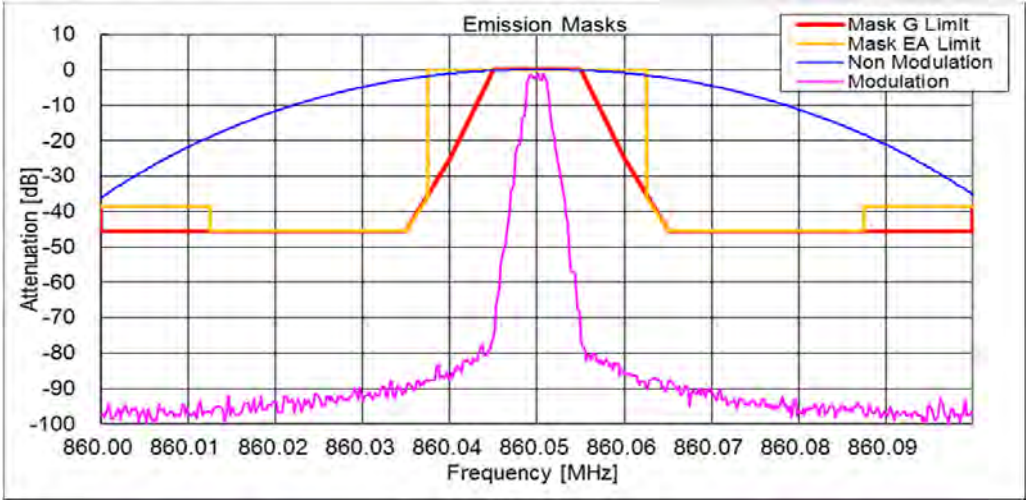


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F7W / 868.95 MHz(FCC)  
Limit : Mask G /EA

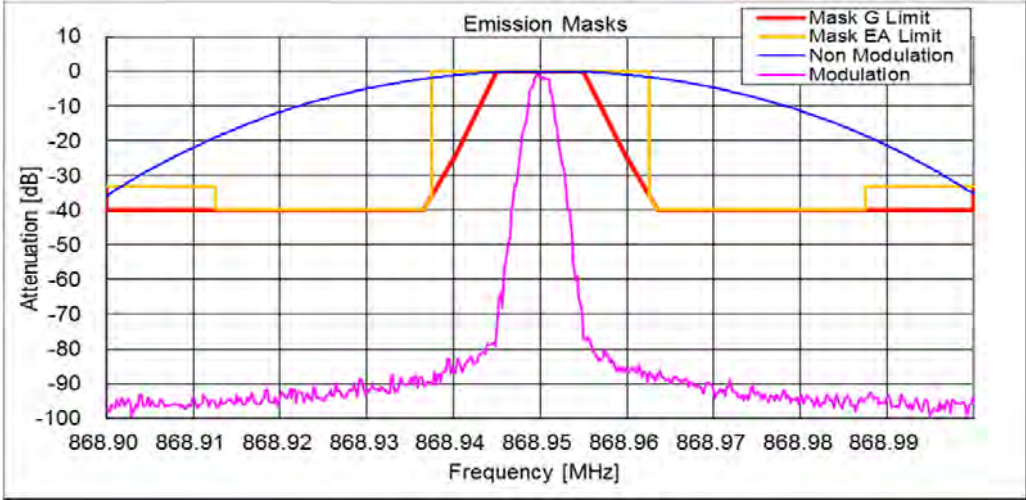

State : High Power / Authorized Bandwidth 6 kHz/ 4K00F1E / 868.95 MHz(RSS)  
Limit : Mask E

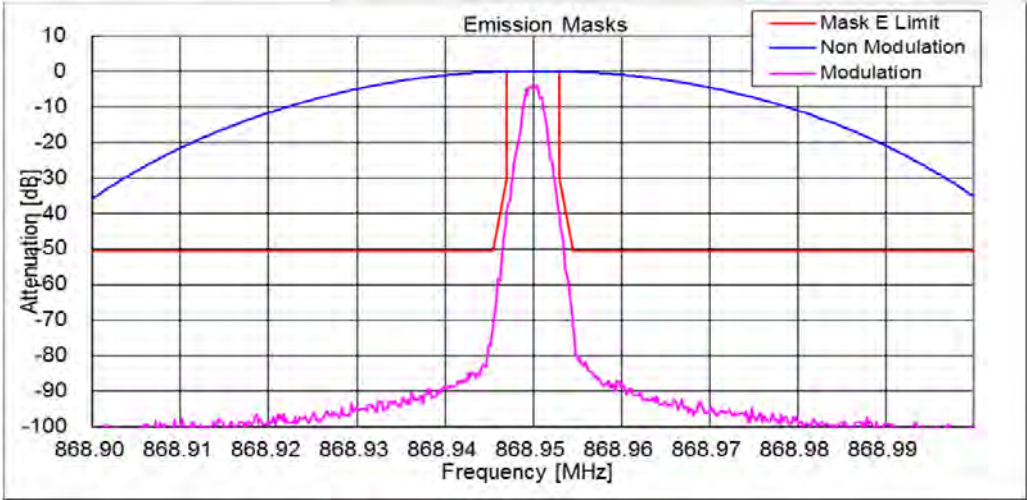


State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F1E / 860.05 MHz(RSS)  
Limit : Mask E

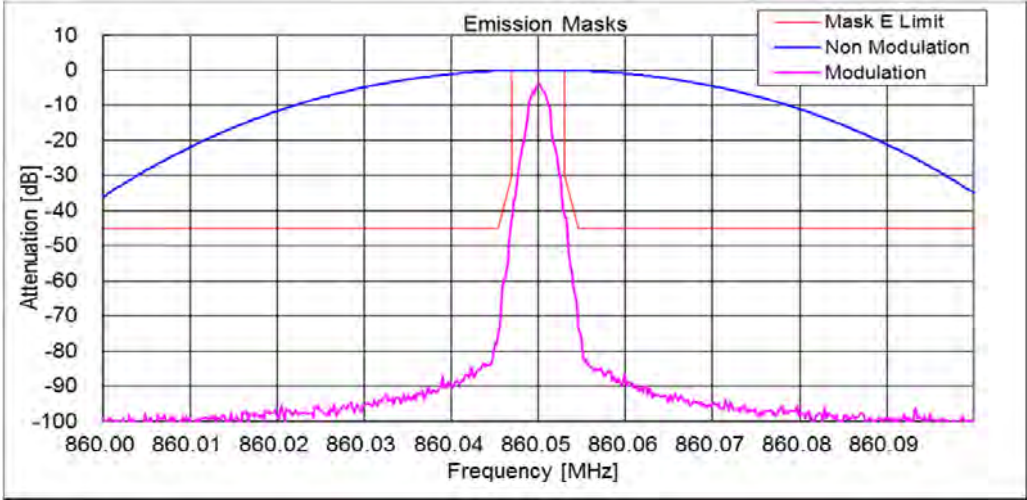





State : High Power / Authorized Bandwidth 6 kHz/ 4K00F1D / 868.95 MHz(RSS)  
Limit : Mask E

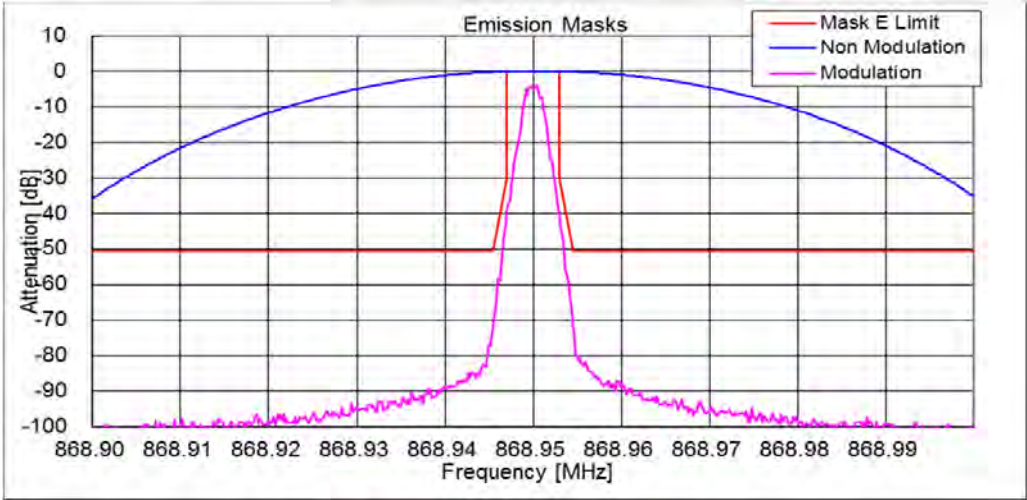


State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F1D / 860.05 MHz(RSS)  
Limit : Mask E

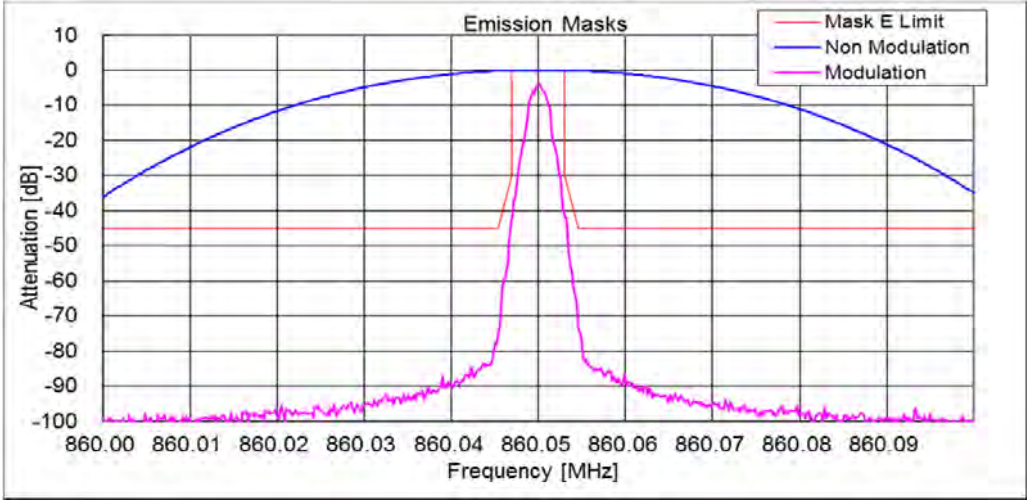


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F7W / 868.95 MHz(RSS)  
Limit : Mask E

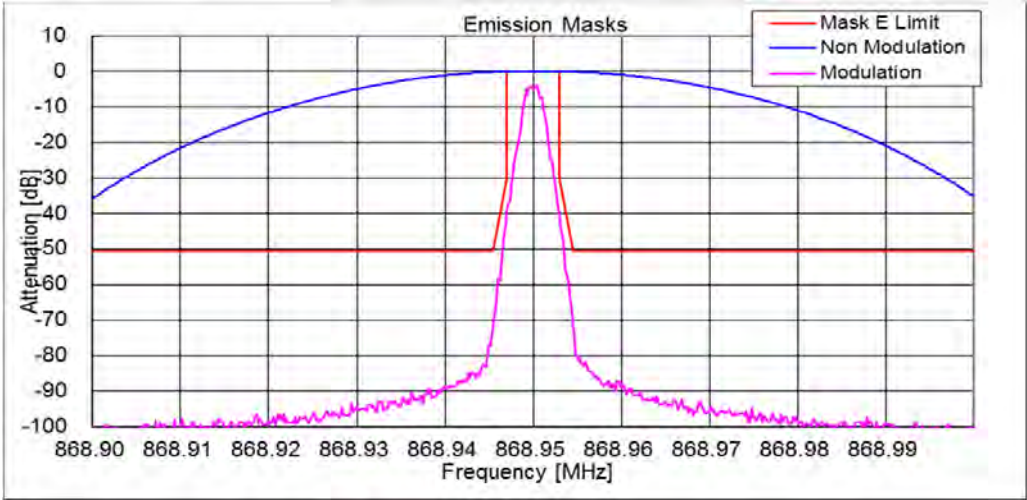


State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F7W / 860.05 MHz(RSS)  
Limit : Mask E

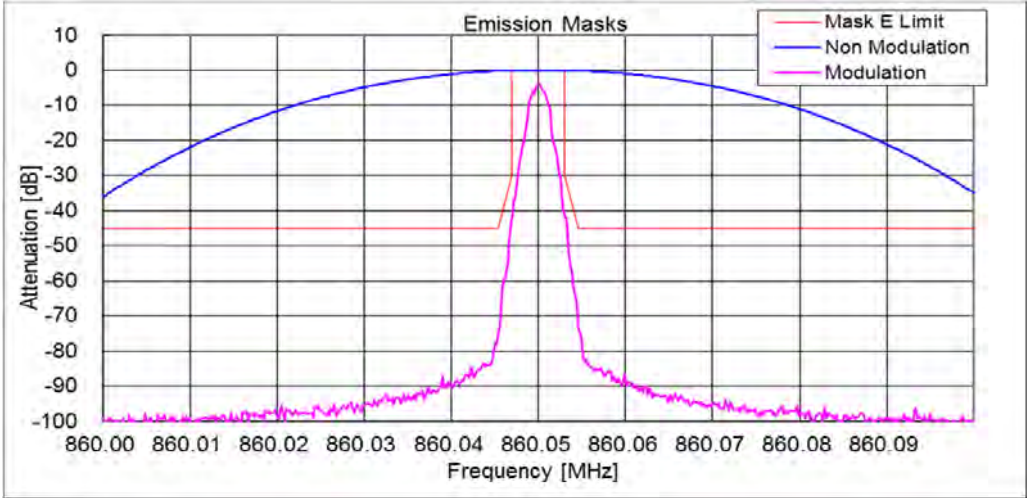


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F2D / 851.05 MHz(FCC)  
Limit : Mask H

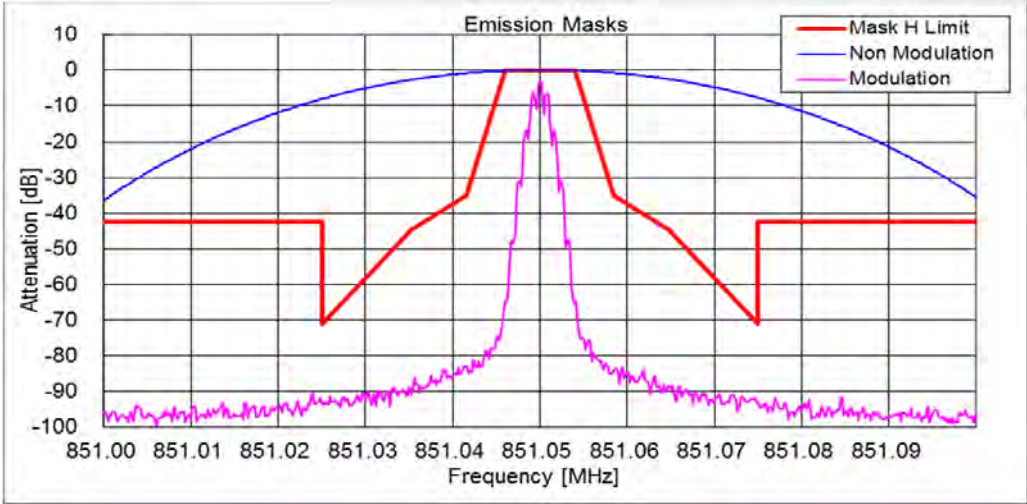


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F2D / 851.05 MHz(FCC)  
Limit : Mask H

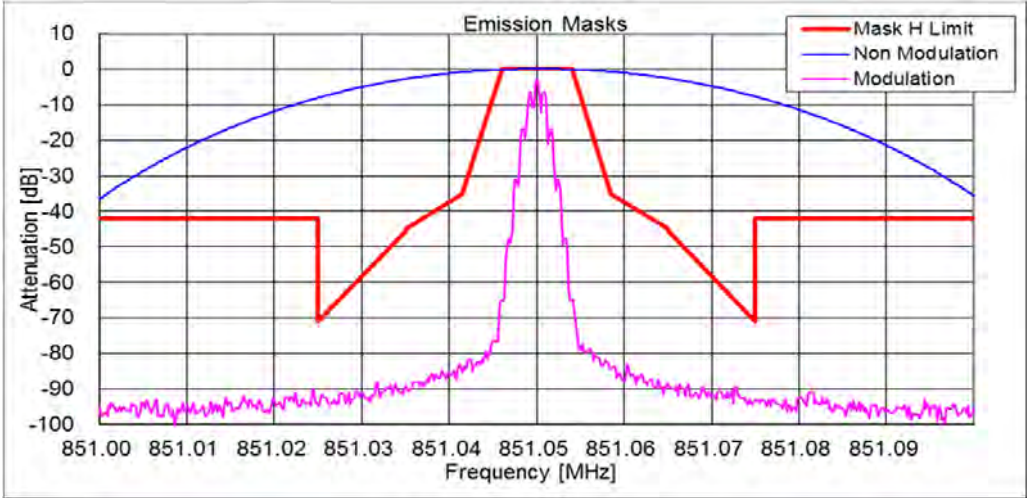

State : High Power / Authorized Bandwidth 20 kHz/ 4K00F2D / 860.05 MHz(FCC)  
Limit : Mask G / EA

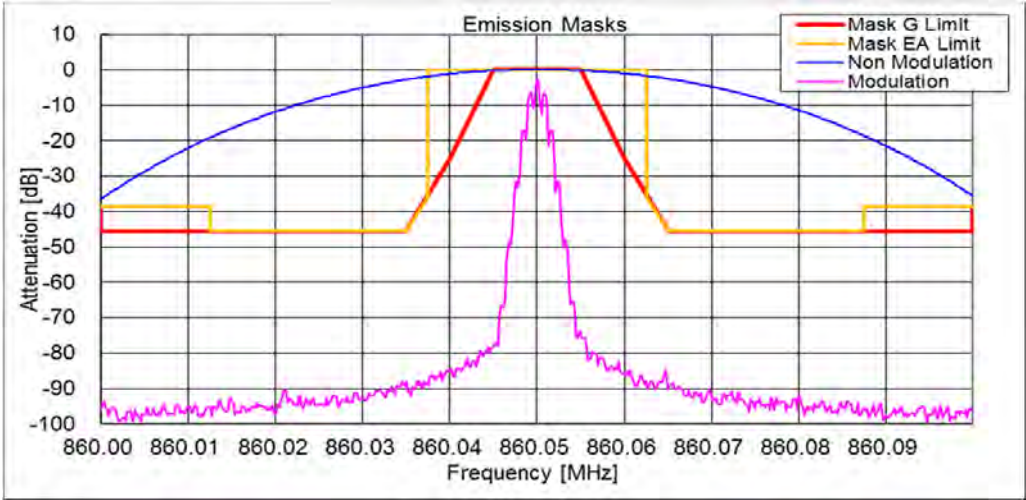


State : Low Power / Authorized Bandwidth 20 kHz/ 4K00F2D / 860.05 MHz(FCC)  
Limit : Mask G / EA

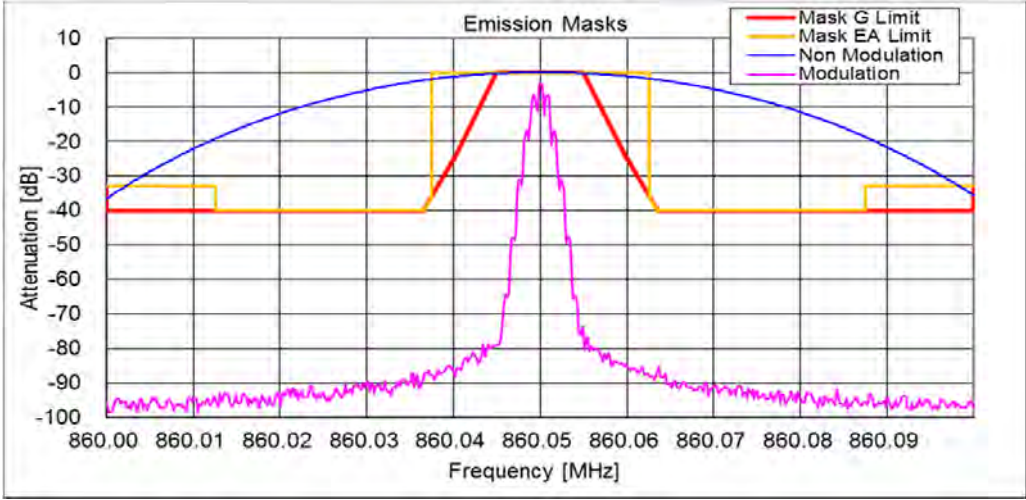




State : High Power / Authorized Bandwidth 6 kHz/ 4K00F2D / 860.05 MHz(RSS)  
Limit : Mask E

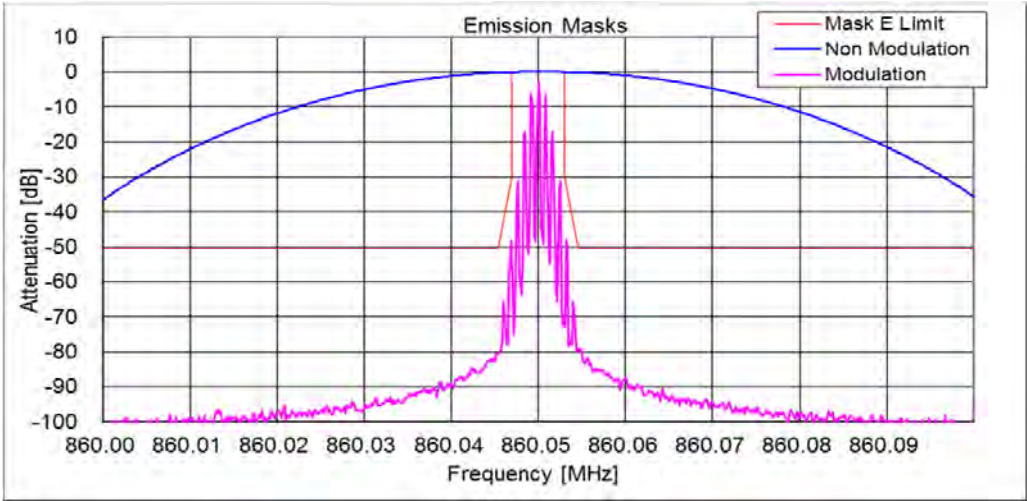

State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F2D / 860.05 MHz(RSS)  
Limit : Mask E

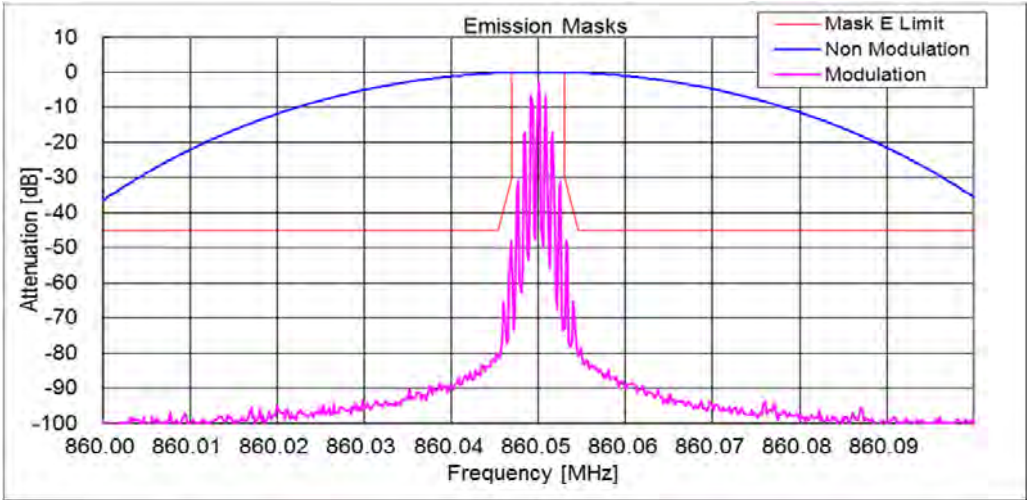

**10.5 Audio Frequency Response / Audio Low Pass Filter (Voice Input)**

REGULATIONS : FCC Part 2 Section 1047 (a)

TEST METHOD/GUIDE : ANSI/TIA-603-E Section 2.2.6.2.2, 3.2.6.2

**Test Procedure**

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter : 50 Hz
  - b) Low-pass filter : 15 kHz
  - c) Detector : positive peak
  - d) Function : FM
- 3 The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- 4 With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 5 kHz.
- 5 The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.


**Measuring Equipments**

| No. | Equipment           | Manufacture         | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|---------------------|-------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel           | WA-29-30-34 | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Modulation Analyzer | Hewlett Packard     | 8901B       | 3403A04852 | 1Y            | Dec. 31, 17      |
| 3   | Audio Generator     | Anritsu             | MG443B      | M70150     | 1Y            | Aug. 31, 18      |
| 4   | Audio Analyzer      | Hewlett Packard     | 8903B       | 2948A07326 | 1Y            | Sep. 30, 17      |
| 5   | DC Power Supply     | Daiichi denpa kogyo | GZV4000     | 90290931   | None          | None             |
| 6   | Digital Multi Meter | FLUKE               | 8846A       | 9642018    | 1Y            | Jul. 31, 18      |

**Measuring Cables**

| No. | Cable         | Manufacture    | Model No. | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-----------|------------|---------------|------------------|
| W2  | Balance Cable | Nicoon         | 3D-2V     | KSR00092   | 1Y            | Mar. 31, 18      |
| W4  | Coaxial Cable | Daiyu Densen   | 3D-2V     | KSR00101   | 1Y            | Feb. 28, 18      |
| W3  | Coaxial Cable | Pacific custom | RG-58 C/U | AM90C04    | 1Y            | Feb. 28, 18      |

Measuring Equipment Configuration

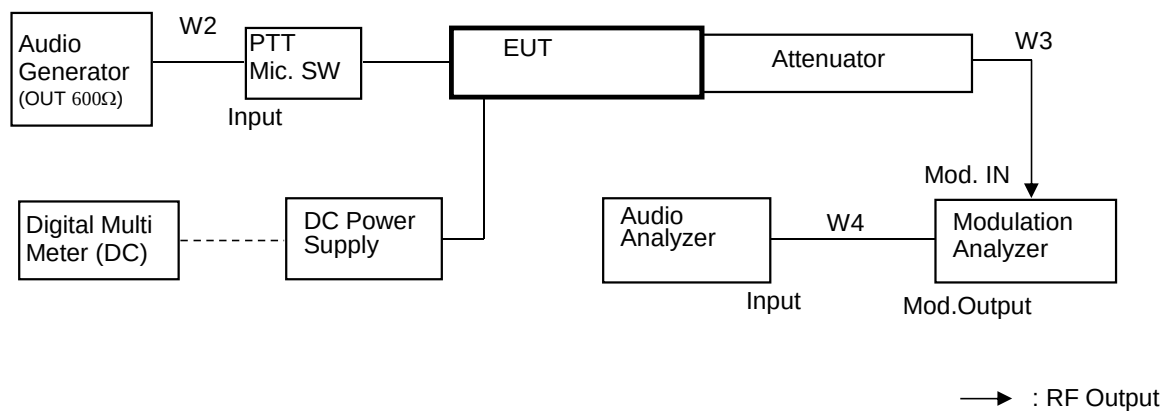


# Test Results

|                      |                         |            |
|----------------------|-------------------------|------------|
| Test date            | Aug 24, 2017            |            |
| Location             | Kashima No.12 Test Site |            |
| temperature          | 25                      | [degree C] |
| Humidity Variation   | 50                      | [%]        |
| Atmospheric Pressure | 100.1                   | [kPa]      |
| Test Engineer        | Koichi Wagatsuma        |            |

Test was carried out for all the frequency band of section 10.1

State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 860.05 MHz(FCC / RSS)

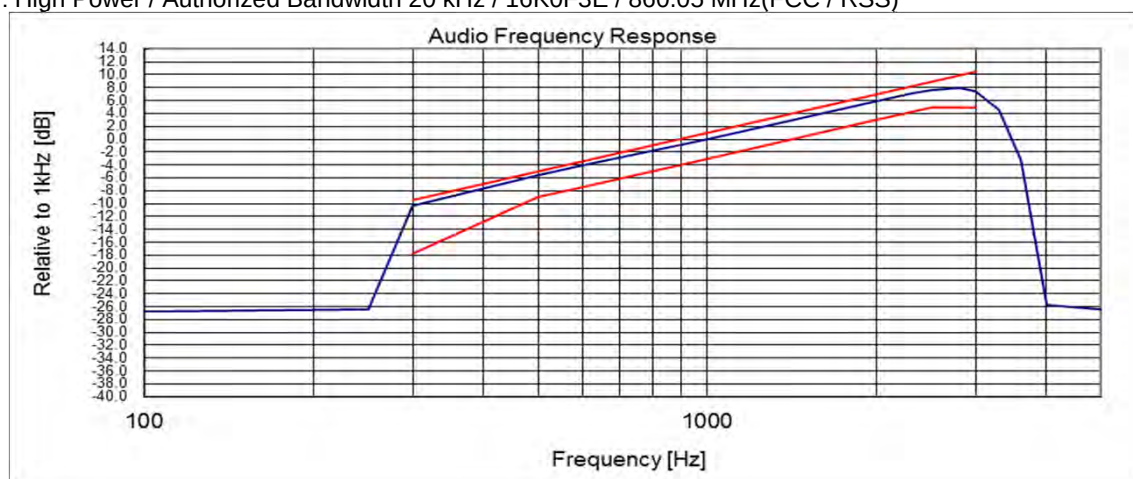

## Note:


Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.


On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

State : High Power / Authorized Bandwidth 20 kHz / 14K0F3E / 851.05 MHz(FCC / RSS)

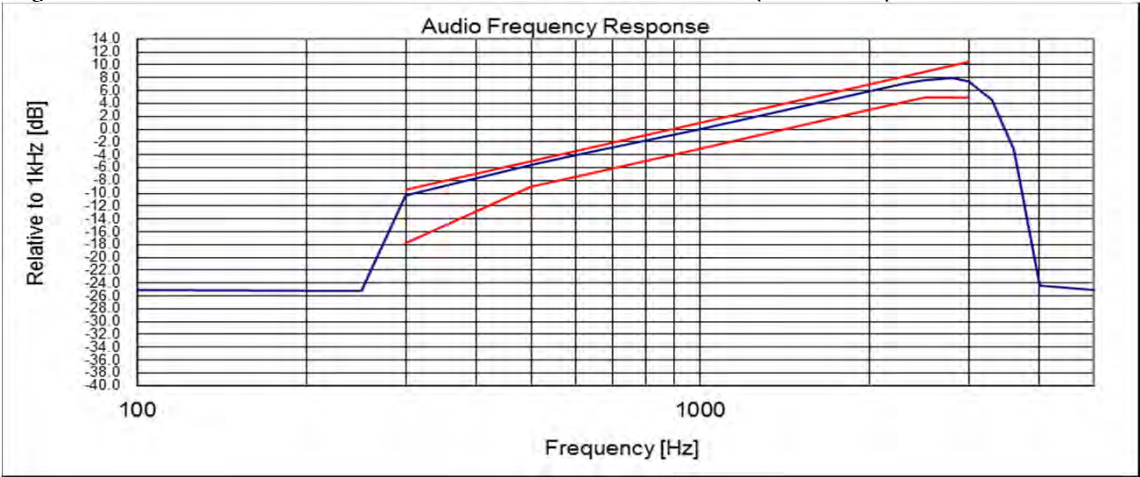

Note:  
Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.  
On the transmission condition below 3kHz,  
Transceiver shows pre-emphasis condition of transmission function.  
On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

State : High Power / Authorized Bandwidth FCC 20kHz, RSS 11.25 kHz / 11K0F3E / 860.05 MHz(FCC / RSS)

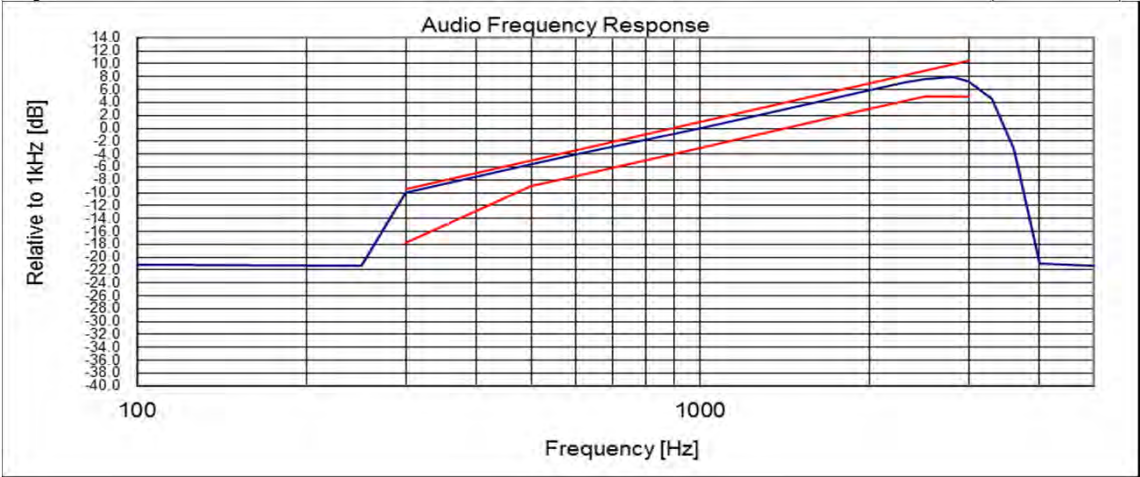

Note:  
Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.  
On the transmission condition below 3kHz,  
Transceiver shows pre-emphasis condition of transmission function.  
On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

## 10.6 Modulation Limiting

|                   |                                           |
|-------------------|-------------------------------------------|
| REGULATIONS       | : FCC Part 2 Section 1047 (b)             |
| TEST METHOD/GUIDE | : ANSI/TIA-603-E Section 2.2.3.2, 1.3.4.4 |

### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter : off
  - b) Low-pass filter : 15 kHz
  - c) Detector : positive peak
  - d) Function : FM
- 3 Apply a 1kHz modulation signal to the transmitter from the audio generator, and adjust the level to obtain 60% of full rated system deviation.
- 4 Measure the modulation frequency that was showed on the Modulation Analyzer when the output levels of the Audio Generator were changed from -20 dB to +50 dB by 10 dB.
- 5 Set the output frequencies of the Audio Generator 300 Hz and 3 kHz, and repeat test procedure 4.
- 6 Set the Detector of the Modulation Analyzer Negative Peak.
- 7 Repeat test procedure 4 and 5.


### Measuring Equipments

| No. | Equipment           | Manufacture        | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|--------------------|-------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel          | WA-29-30-34 | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Modulation Analyzer | Hewlett Packard    | 8901B       | 3403A04852 | 1Y            | Dec. 31, 17      |
| 3   | Audio Generator     | Anritsu            | MG443B      | M70150     | 1Y            | Aug. 31, 18      |
| 4   | DC Power Supply     | Daichi denpa kogyo | GZV4000     | 90290931   | None          | None             |
| 5   | Digital Multi Meter | FLUKE              | 8846A       | 9642018    | 1Y            | Jul. 31, 18      |

### Measuring Cables

| No. | Cable         | Manufacture    | Model No. | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-----------|------------|---------------|------------------|
| W2  | Balance Cable | Nicoon         | 3D-2V     | KSR00092   | 1Y            | Mar. 31, 18      |
| W3  | Coaxial Cable | Pacific custom | RG-58 C/U | AM90C04    | 1Y            | Feb. 28, 18      |

Measuring Equipment Configuration

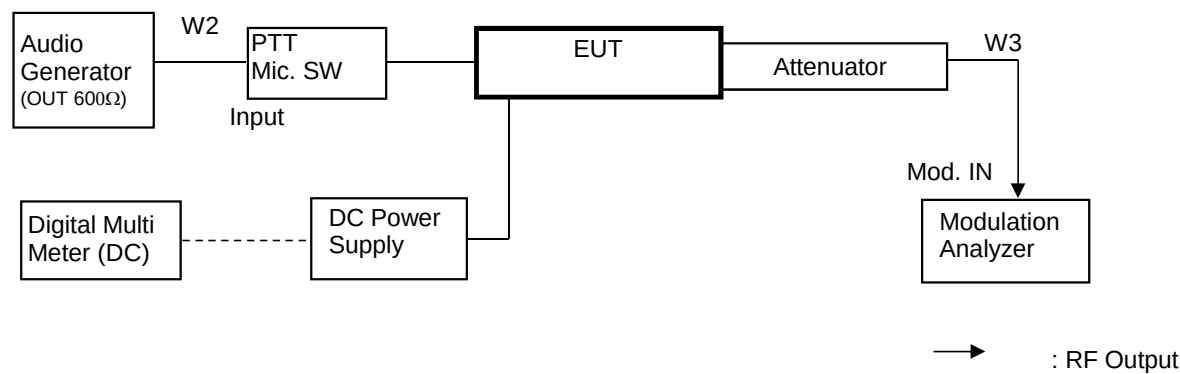




## Test Results


|                      |                                |
|----------------------|--------------------------------|
| Test date            | Aug. 24, 2017 to Aug. 25, 2017 |
| Location             | Kashima No.12 Test Site        |
| temperature          | 20.0 to 22.5 [degree C]        |
| Humidity Variation   | 50.0 to 55.0 [%]               |
| Atmospheric Pressure | 99.9 to 100.1 [kPa]            |
| Test Engineer        | Koichi Wagatsuma               |

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 851.05 MHz

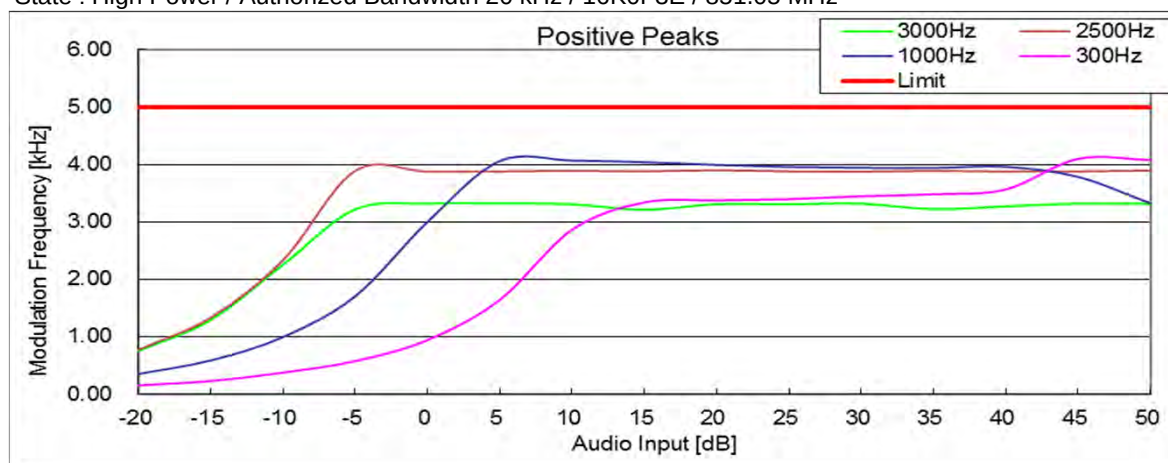


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 851.05 MHz

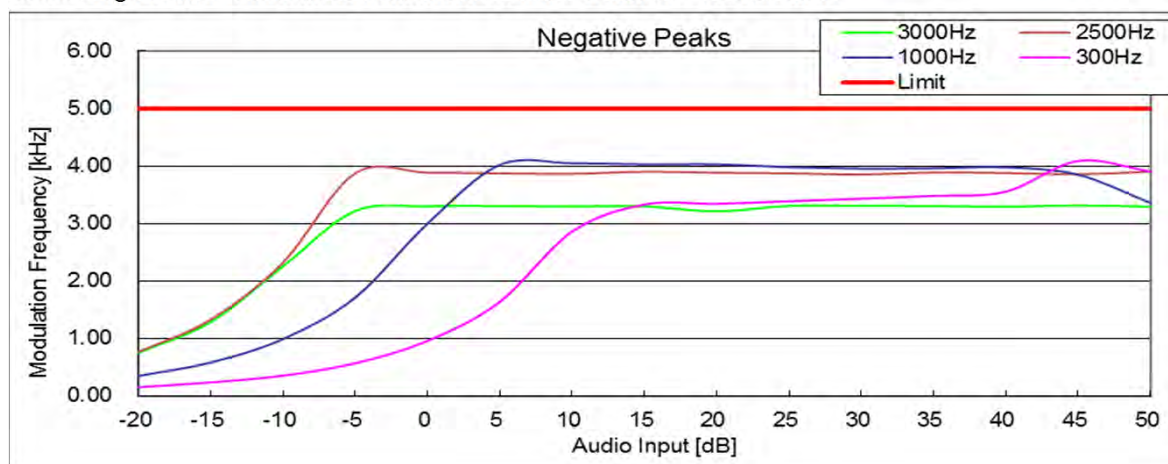


State : High Power / Authorized Bandwidth 20 kHz / 14K0F3E / 851.05 MHz

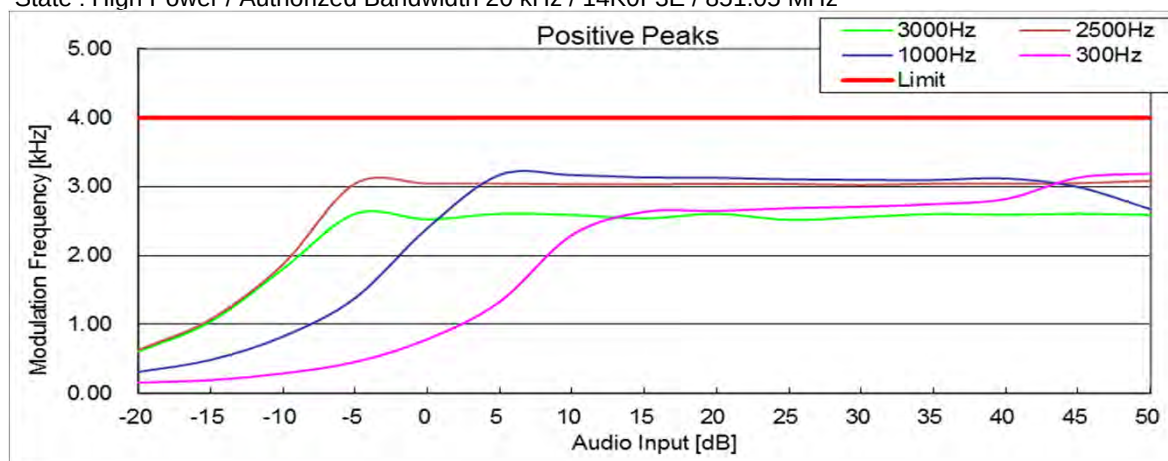


State : High Power / Authorized Bandwidth 20 kHz / 14K0F3E / 851.05 MHz

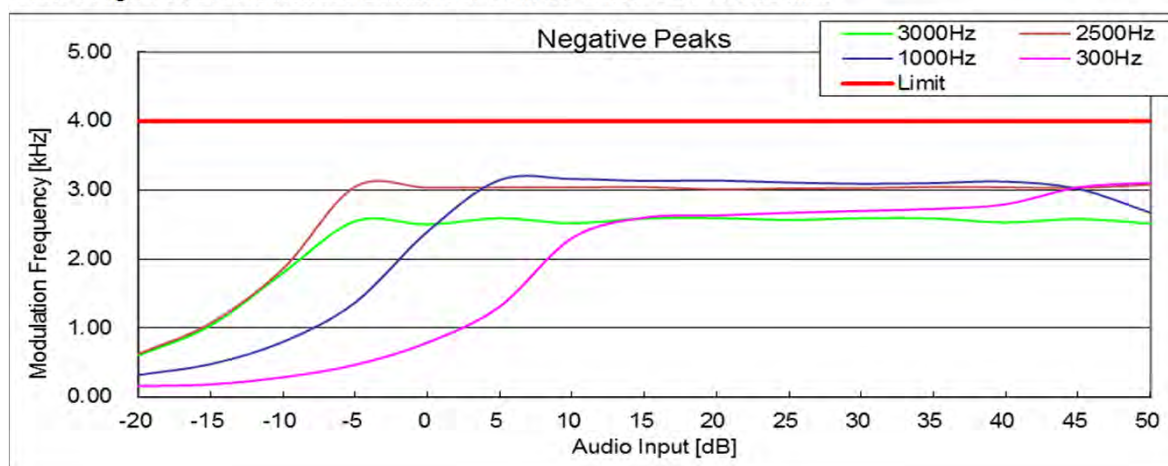

State : High Power / Authorized Bandwidth FCC:20 kHz, RSS:11.25 kHz / 11K0F3E / 851.05 MHz

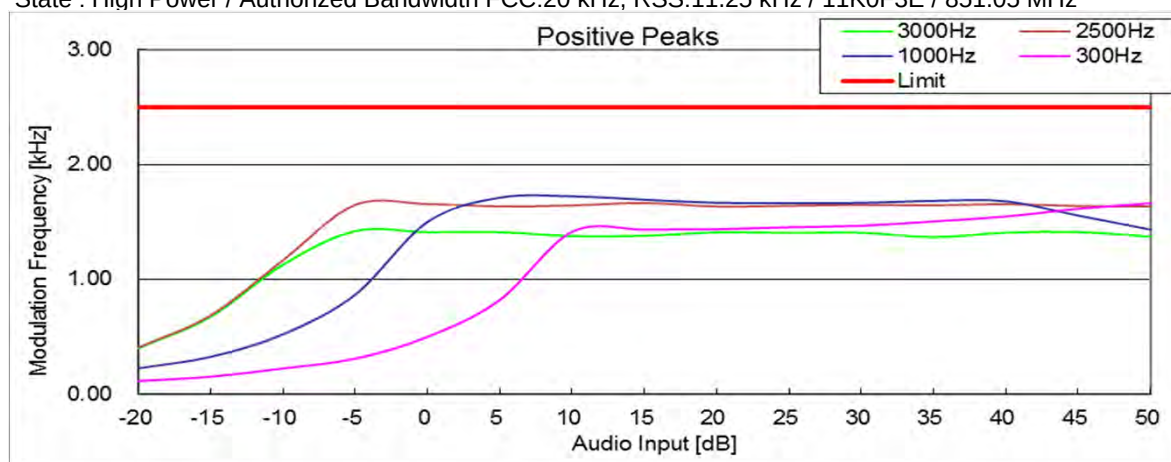

State : High Power / Authorized Bandwidth FCC:20 kHz, RSS:11.25 kHz / 11K0F3E / 851.05 MHz

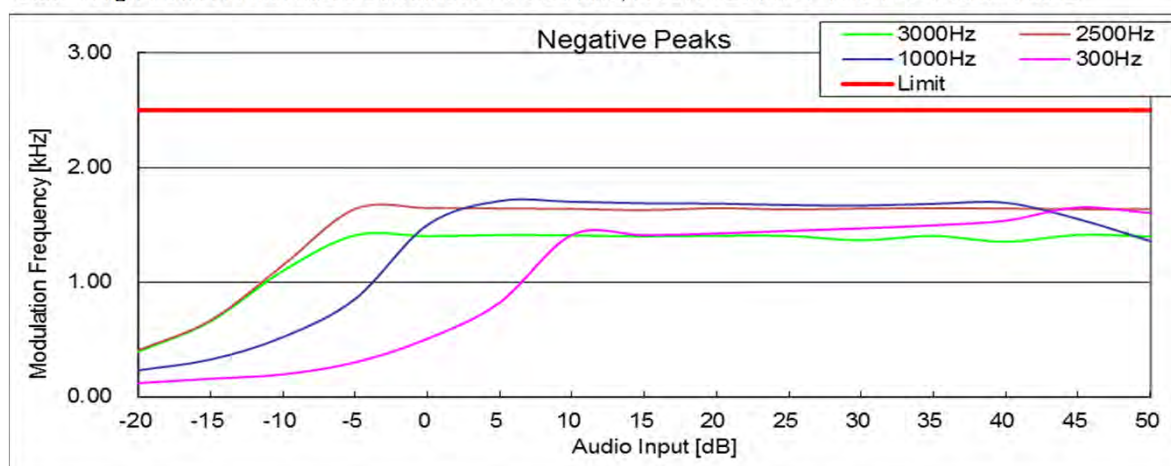

## 10.7 Frequency Stability (Temperature Variation)

|                   |                                                                                  |
|-------------------|----------------------------------------------------------------------------------|
| REGULATIONS       | : FCC Part 2 Section 1055 (a) (1), Part 90 Section 213(a)<br>RSS-119 Section 5.3 |
| TEST METHOD/GUIDE | : ANSI/TIA-603-E Section 2.2.2.2<br>RSS-Gen Section 4.7(a)                       |

### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Set the temperature -30 degrees C.
- 3 Leave the EUT for 1 hour after it became the temperature that was set up.
- 4 Make the EUT the transmitting state.  
measure the output frequency.
- 5 Make the EUT the receiving state.
- 6 Set the temperature 50 degrees C by 10 degrees C.  
And repeat test procedure 4 to 6.


### Measuring Equipments

| No. | Equipment           | Manufacture     | Model No.     | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|-----------------|---------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel       | WA-29-30-34   | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Modulation Analyzer | Hewlett Packard | 8901B         | 3403A04852 | 1Y            | Dec. 31, 17      |
| 3   | DC Power Supply     | Takasago        | GP035-20R     | 1014199060 | None          | None             |
| 4   | Digital Multi Meter | FLUKE           | 8846A         | 9642018    | 1Y            | Jul. 31, 18      |
| 5   | Temperature Chamber | Tabai           | PL-3F         | 5103661    | None          | None             |
| 6   | Temperature Meter   | Sato            | PC-5000TRH-II | A11999972  | 1Y            | Feb. 28, 18      |
| 7   | GPS Receiver        | Hewlett Packard | HP Z3801A     | 3542A02414 | None          | None             |

### Measuring Cables

| No. | Cable         | Manufacture    | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-------------|------------|---------------|------------------|
| W2  | Coaxial Cable | Pacific custom | RG-58 C/U   | KSR00041   | 1Y            | Feb. 28, 18      |
| W1  | Coaxial Cable | Suhner         | SUCOFLEX104 | KSR00042   | 1Y            | Aug. 31, 18      |

## Measuring Equipment Configuration

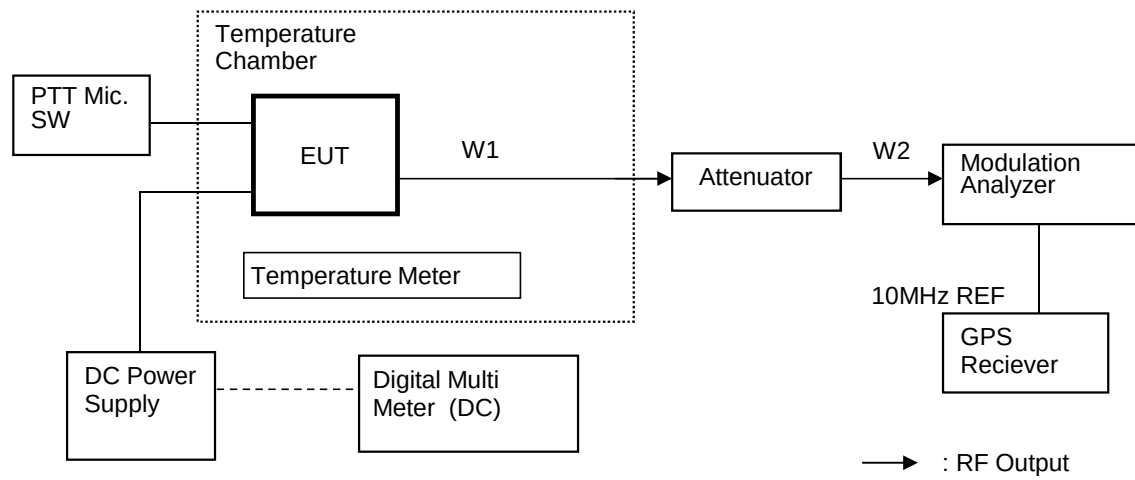

## Test Results

|               |                        |
|---------------|------------------------|
| Test date     | Sep. 04, 2017          |
| Location      | Kashima No.1 Test Site |
| Test Engineer | Koichi Wagatsuma       |


Test was carried out for all the frequency band of section 10.1  
State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz / 860.05 MHz (FCC / RSS)

Reference Frequency: 860.050000 MHz(FCC Stability)

860.050030 MHz(RSS Stability)

| No. | Temperature<br>(Degree C) | Frequency<br>(MHz) | FCC Stability<br>(ppm) | RSS Stability<br>(ppm) | Limit<br>(+/- ppm) | Min. Margin<br>(ppm) |
|-----|---------------------------|--------------------|------------------------|------------------------|--------------------|----------------------|
| 1   | -30                       | 860.050020         | 0.02                   | -0.01                  | 0.1                | 0.08                 |
| 2   | -20                       | 860.050030         | 0.03                   | 0.00                   | 0.1                | 0.07                 |
| 3   | -10                       | 860.050030         | 0.03                   | 0.00                   | 0.1                | 0.07                 |
| 4   | 0                         | 860.050040         | 0.05                   | 0.01                   | 0.1                | 0.05                 |
| 5   | 10                        | 860.050020         | 0.02                   | -0.01                  | 0.1                | 0.08                 |
| 6   | 20                        | 860.050030         | 0.03                   | 0.00                   | 0.1                | 0.07                 |
| 7   | 30                        | 860.050010         | 0.01                   | -0.02                  | 0.1                | 0.08                 |
| 8   | 40                        | 860.050020         | 0.02                   | -0.01                  | 0.1                | 0.08                 |
| 9   | 50                        | 860.050010         | 0.01                   | -0.02                  | 0.1                | 0.08                 |

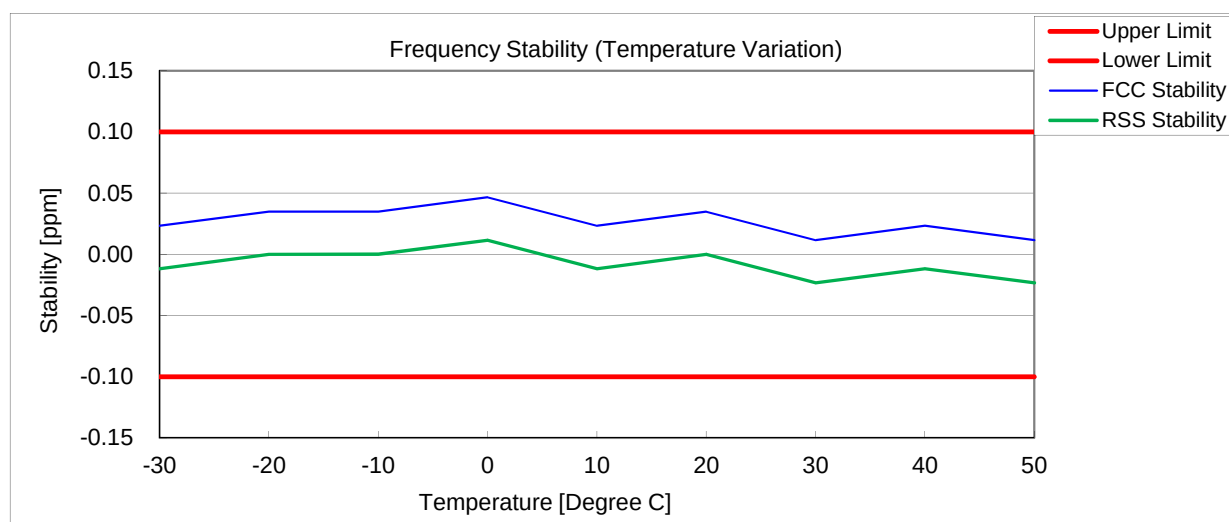

## 10.8 Frequency Stability (Voltage Variation)

|                   |                                                                                  |
|-------------------|----------------------------------------------------------------------------------|
| REGULATIONS       | : FCC Part 2 Section 1055 (a) (1), Part 90 Section 213(a)<br>RSS-119 Section 5.3 |
| TEST METHOD/GUIDE | : ANSI/TIA-603-E Section 2.2.2.2<br>RSS-Gen Section 4.7(a)                       |

### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The power supply voltage to the EUT was varied from 85 % to 115 % of the nominal value measured at the input to the EUT.


### Measuring Equipments

| No. | Equipment           | Manufacture     | Model No.     | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|-----------------|---------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel       | WA-29-30-34   | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Modulation Analyzer | Hewlett Packard | 8901B         | 3403A04852 | 1Y            | Dec. 31, 17      |
| 3   | DC Power Supply     | Takasago        | GP035-20R     | 1014199060 | None          | None             |
| 4   | Digital Multi Meter | FLUKE           | 8846A         | 9642018    | 1Y            | Jul. 31, 18      |
| 5   | Temperature Chamber | Tabai           | PL-3F         | 5103661    | None          | None             |
| 6   | Temperature Meter   | Sato            | PC-5000TRH-II | A11999972  | 1Y            | Feb. 28, 18      |
| 7   | GPS Receiver        | Hewlett Packard | HP Z3801A     | 3542A02414 | None          | None             |

### Measuring Cables

| No. | Cable         | Manufacture    | Model No.   | Serial No. | Cal. Interval | Effective period |
|-----|---------------|----------------|-------------|------------|---------------|------------------|
| W2  | Coaxial Cable | Pacific custom | RG-58 C/U   | KSR00041   | 1Y            | Feb. 28, 18      |
| W1  | Coaxial Cable | Suhner         | SUCOFLEX104 | KSR00042   | 1Y            | Aug. 31, 18      |

### Measuring Equipment Configuration

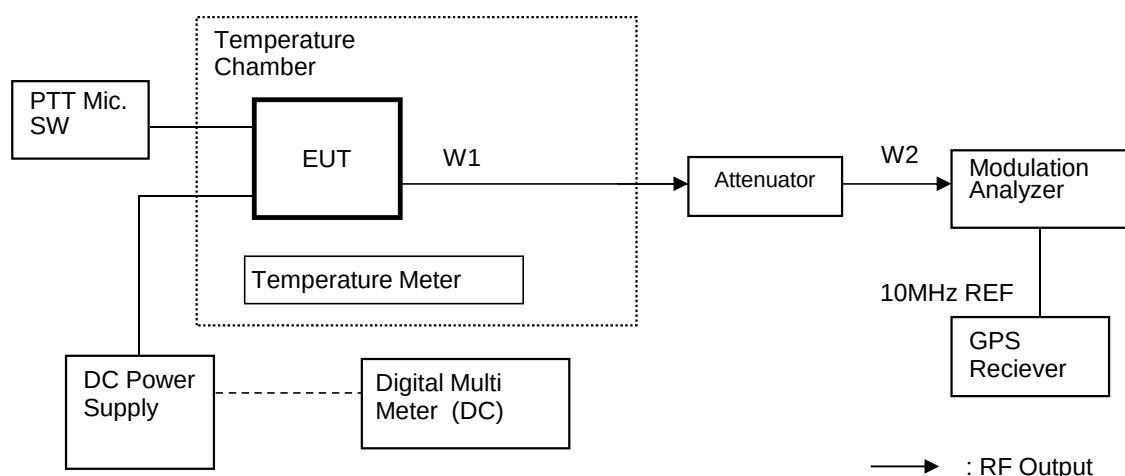



## Test Results

|               |                        |
|---------------|------------------------|
| Test date     | Sep 04, 2017           |
| Location      | Kashima No.1 Test Site |
| Test Engineer | Koichi Wagatsuma       |

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz / 868.95 MHz (FCC / RSS)

Reference Frequency: 868.950010 MHz

| No. | Temperature<br>(Degree C) | Diviation<br>(%) | Voltage<br>(V) | Frequency<br>(MHz) | Stability<br>(ppm) | Limit<br>+/- (ppm) | Margin<br>(ppm) |
|-----|---------------------------|------------------|----------------|--------------------|--------------------|--------------------|-----------------|
| 1   | 20+/-5                    | 85               | 11.73          | 868.950020         | 0.01               | 0.1                | 0.09            |
| 2   | 20+/-5                    | 100              | 13.80          | 868.950010         | 0.00               | 0.1                | 0.10            |
| 3   | 20+/-5                    | 115              | 15.87          | 868.950020         | 0.01               | 0.1                | 0.09            |

## 10.9 Receiver Spurious Emissions(Radiated)

|                   |   |                   |
|-------------------|---|-------------------|
| REGULATIONS       | : | RSS-Gen Section 7 |
| TEST METHOD/GUIDE | : | RSS-Gen Section 7 |

### TEST PROCEDURE

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Tabletop Equipment  
EUT is placed on the wooden table, the top of which is 0.8meter above the metal ground plane(turntable).
- 3 Interconnecting Cables  
Excess part of the interconnecting cables longer than 1 meter are bundled in the center.  
Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle to 40 cm long, hanging approx, in the middle between ground plane and table.
- 4 Measuring Instruments  
Measuring instruments list and their calibration schedule are shown on Measurement Equipment Configuration.  
The brief description are as follows;
- 5 Antennas  
The broadband Bi-cog antenna or Biconical and Log periodic antenna is used for measurement on the frequency range 30 – 1000 MHz.  
The Double ridged guide antenna is used for frequency higher than 1000 MHz.
- 6 Pre-amplifier  
The broadband pre-amplifier is used for radiated emission measurement.  
The signal to noise ratio is improved by using pre-amplifier.
- 7 Spectrum Analyzer  
The spectrum analyzer is used for preliminary measurement of frequency range 30 – 1000 MHz, and also used for final measurement of higher than 1000 MHz (RBW : 1 MHz).
- 8 EMI Test Receiver  
The Quasi-peak detector (IF bandwidth : 120 kHz) built in test receiver is used for final measurement of the frequency 30 – 1000 MHz.  
The test receiver is complied with the specification of the CISPR publication 16.
- 9 Turntable  
The turntable is capable for EUT weight and rotatable 0 to 360 degree horizontally by remote control in the test room.
- 10 Antenna Mast  
The antenna mast is attachable to all antennas described on antenna  
height is adjustable 1 to 4 meters continuously by remote control at the test room, and antenna polarization is also changed by the remote control.
- 11 Preliminary Measurement  
EUT is tested on all operating conditions.  
The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to find the worst emission conditions in configuration, operating mode, or ambient noise notation.

## 12 Final Measurement

The EUT operated in the condition where maximum emission is found in the preliminary test.

The turntable azimuth(EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.


**TEST EQUIPMENTS**

| No. | Equipment             | Manufacture            | Model No.  | Serial No. | Cal. Interval | Effective period |
|-----|-----------------------|------------------------|------------|------------|---------------|------------------|
| 1   | Broad Band antenna    | Schwarzbeck            | VULB9168WP | 126        | 1Y            | Dec. 31, 17      |
| 2   | 6 dB Attenuator       | TAMAGAWA               | UFA-01     | A00040805  | 1Y            | Feb. 28, 18      |
| 3   | Amplifier             | Intertek               | ZX60-3018G | 005        | 1Y            | Feb. 28, 18      |
| 4   | RF Switch             | Intertek               | ACX-150    | A12301501  | 1Y            | Feb. 28, 18      |
| 5   | EMI Test receiver     | Agilent                | N9038A     | MY51210201 | 1Y            | Oct. 31, 17      |
| 6   | Site Attenuation      |                        |            |            | 1Y            | Feb. 28, 18      |
| 7   | Double Ridged antenna | Schwarzbeck            | 3115       | 5045       | 1Y            | Mar. 31, 18      |
| 8   | 3 dB Attenuator       | SUHNER                 | 6803.17.B  | KSR00089   | 1Y            | Apr. 30, 18      |
| 9   | Amplifier (1-18 GHz)  | TOYO                   | TPA0118-30 | 0402       | 1Y            | Apr. 30, 18      |
| 10  | SVSWR                 |                        |            |            | 1Y            | Oct. 31, 17      |
| 11  | Testing Software      | emiT (Version 3,0,0,0) |            |            | -             | -                |

**USED CABLES**

| No. | Cable         | Manufacture | Model No.         | Serial No. | Cal. Interval | Effective period |
|-----|---------------|-------------|-------------------|------------|---------------|------------------|
| R11 | Coaxial cable | FUJIKURA    | 5D-2W             | R11        | 1Y            | Feb. 28, 18      |
| R1  | Coaxial cable | FUJIKURA    | 5D-2W             | R1         | 1Y            | Feb. 28, 18      |
| R3  | Coaxial cable | FUJIKURA    | 10D-2W            | R3         | 1Y            | Feb. 28, 18      |
| R5  | Coaxial cable | FUJIKURA    | RG-5A/U           | R5         | 1Y            | Feb. 28, 18      |
| R7  | Coaxial cable | FUJIKURA    | RG-5A/U           | R7         | 1Y            | Feb. 28, 18      |
| R10 | Coaxial cable | FUJIKURA    | 5D-2W             | R10        | 1Y            | Feb. 28, 18      |
| G1  | Coaxial cable | SUHNER      | SUCOFLEX 104      | 229603/4   | 1Y            | Apr. 30, 18      |
| G2  | Coaxial cable | Candox      | 5B-048-98-98-5000 | 111130     | 1Y            | Apr. 30, 18      |

MEASUREMENT EQUIPMENT CONFIGURATION

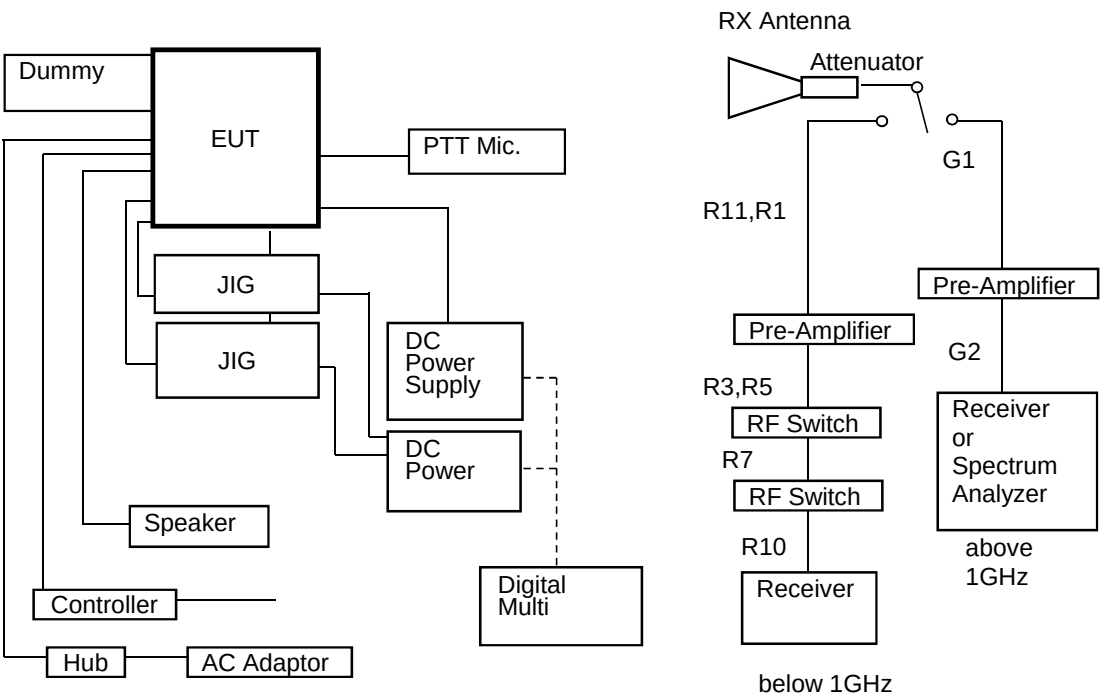

## TEST RESULTS

|                      |                         |
|----------------------|-------------------------|
| Test date            | Sep. 17, 2017           |
| Location             | Kashima No.12 Test Site |
| temperature          | 21.6 to 21.9 [degree C] |
| Humidity Variation   | 59 to 60 [%]            |
| Atmospheric Pressure | 100.1 to 101.2 [kPa]    |
| Test Engineer        | Koichi Wagatsuma        |

Test was carried out for the frequency band of section 10.1

State the worst case (below).

State : 815.05 MHz Receiver Condition (OCXO(Ex.))

| No. | Frequency (MHz) | Pol  | Mode | Reading Level (dBuv) | Factor* (dB) | Emission Level (dBuV/m) | Limit Level (dBuV/m) | Margin (dB) |
|-----|-----------------|------|------|----------------------|--------------|-------------------------|----------------------|-------------|
| 1   | 81.24           | Hor. |      | -                    | -5.2         | -                       | 40.0                 | -           |
|     |                 | Ver. |      | 41.5                 | -5.2         | 36.3                    | 40.0                 | 3.7         |
| 2   | 85.50           | Hor. |      | -                    | -5.8         | -                       | 40.0                 | -           |
|     |                 | Ver. |      | 42.0                 | -5.8         | 36.2                    | 40.0                 | 3.8         |
| 3   | 87.47           | Hor. |      | 39.9                 | -6.1         | 33.8                    | 40.0                 | 6.2         |
|     |                 | Ver. |      | 41.8                 | -6.1         | 35.7                    | 40.0                 | 4.3         |
| 4   | 94.38           | Hor. |      | 43.1                 | -6.0         | 37.1                    | 43.5                 | 6.4         |
|     |                 | Ver. |      | 45.3                 | -6.0         | 39.3                    | 43.5                 | 4.2         |
| 5   | 98.45           | Hor. |      | -                    | -5.6         | -                       | 43.5                 | -           |
|     |                 | Ver. |      | 43.7                 | -5.6         | 38.1                    | 43.5                 | 5.4         |
| 6   | 101.87          | Hor. |      | 38.9                 | -5.2         | 33.7                    | 43.5                 | 9.8         |
|     |                 | Ver. |      | 40.6                 | -5.2         | 35.4                    | 43.5                 | 8.1         |
| 7   | 250.03          | Hor. |      | 25.8                 | 0.2          | 26.0                    | 46.0                 | 20.0        |
|     |                 | Ver. |      | 28.9                 | 0.2          | 29.1                    | 46.0                 | 16.9        |
| 8   | 375.00          | Hor. |      | 24.2                 | 4.7          | 28.9                    | 46.0                 | 17.1        |
|     |                 | Ver. |      | -                    | 4.7          | -                       | 46.0                 | -           |
| 9   | 750.01          | Hor. |      | 17.4                 | 13.7         | 31.1                    | 46.0                 | 14.9        |
|     |                 | Ver. |      | 14.9                 | 13.7         | 28.6                    | 46.0                 | 17.4        |
| 10  | 1125.00         | Hor. | AVG  | 31.4                 | 1.8          | 33.2                    | 54.0                 | 20.8        |
|     |                 | Ver. | AVG  | 35.3                 | 1.8          | 37.1                    | 54.0                 | 16.9        |
| 11  | 2968.00         | Hor. | AVG  | 26.8                 | 8.4          | 35.2                    | 54.0                 | 18.8        |
|     |                 | Ver. | AVG  | 27.0                 | 8.4          | 35.4                    | 54.0                 | 18.6        |

There is the margin of 20dB over except for the above points.

\* Factor = Antenna,Antenna Pad,Cable,Preamp,(Dist. Conversion)

Emission Level = Reading Level + Factor

Note:

- 1 Measurement distance is 3 metres. (Above 1GHz is 6.3 metres)
- 2 Scanned frequency are 30 to 5000 MHz.
- 3 Highest frequency is 869 MHz.

### 10.1 Necessary Bandwidth and Emission Bandwidth

|             |                                                                          |
|-------------|--------------------------------------------------------------------------|
| REGULATIONS | : FCC Part 2 Section 202 (g) & Federal Register/ Vol.68, No236<br>TRC 43 |
|-------------|--------------------------------------------------------------------------|

#### Calculation Results

State : 16K0F3E (Authorized Bandwidth 20 kHz)

| Item                | Mark |    |     |
|---------------------|------|----|-----|
| Maximum Modulation  | (M)  | 3  | kHz |
| Maximum Deviation   | (D)  | 5  | kHz |
| Constant Factor     | (K)  | 1  |     |
| Necessary Bandwidth | (Bn) | 16 | kHz |

$$Bn = (2 \times M) + (2 \times D \times K)$$

- |                                                    |    |                                                |
|----------------------------------------------------|----|------------------------------------------------|
| 1.types of modulation of the main carrier :        | F= | Frequency modulation                           |
| 2.nature of signal(s) modulating the main carrier: | 3= | A single channel containing analog information |
| 3.type of information to be transmitted:           | E= | Telephony (including sound broadcasting)       |

State : 14K0F3E (Authorized Bandwidth 20 kHz)

| Item                | Mark |    |     |
|---------------------|------|----|-----|
| Maximum Modulation  | (M)  | 3  | kHz |
| Maximum Deviation   | (D)  | 4  | kHz |
| Constant Factor     | (K)  | 1  |     |
| Necessary Bandwidth | (Bn) | 14 | kHz |

$$Bn = (2 \times M) + (2 \times D \times K)$$

State : 11K0F3E (Authorized Bandwidth 11.25 kHz)

| Item                | Mark |     |     |
|---------------------|------|-----|-----|
| Maximum Modulation  | (M)  | 3   | kHz |
| Maximum Deviation   | (D)  | 2.5 | kHz |
| Constant Factor     | (K)  | 1   |     |
| Necessary Bandwidth | (Bn) | 11  | kHz |

$$Bn = (2 \times M) + (2 \times D \times K)$$

- |                                                    |    |                                                |
|----------------------------------------------------|----|------------------------------------------------|
| 1.types of modulation of the main carrier :        | F= | Frequency modulation                           |
| 2.nature of signal(s) modulating the main carrier: | 3= | A single channel containing analog information |
| 3.type of information to be transmitted:           | E= | Telephony (including sound broadcasting)       |

State : 8K30F1E / 8K30F1D / 8K30F7W (4Level FSK / 9600bps, Authorized Bandwidth 11.25 kHz)

| Item                     | Mark |       |     |
|--------------------------|------|-------|-----|
| Digital information rate | (R)  | 9600  | bps |
| Peak frequency deviation | (D)  | 3.391 | kHz |
| Signaling states         | (S)  | 4     |     |
| Numerical factor         | (K)  | 0.516 |     |
| Necessary Bandwidth      | (Bn) | 8.3   | kHz |

$$B_n = (R/\log_2 S) + 2 \times D \times K$$

- 1.types of modulation of the main carrier : F= Frequency modulation
- 2.nature of signal(s) modulating the main carrier: 1= A single channel containing quantized or digital information without the use of a modulating sub-carrier  
7= Two or more channels containing quantized or digital information
- 3.type of information to be transmitted: E= Telephony (including sound broadcasting)  
D= Data transmission, telemetry, telecommand  
W= Combination of the above

State : 4K00F1E / 4K00F1D / 4K00F7W (4Level FSK / 4800bps, Authorized Bandwidth 6 kHz)

| Item                     | Mark |       |     |
|--------------------------|------|-------|-----|
| Digital information rate | (R)  | 4800  | bps |
| Peak frequency deviation | (D)  | 1.55  | kHz |
| Signaling states         | (S)  | 4     |     |
| Numerical factor         | (K)  | 0.516 |     |
| Necessary Bandwidth      | (Bn) | 4     | kHz |

$$B_n = (R/\log_2 S) + 2 \times D \times K$$

- 1.types of modulation of the main carrier : F= Frequency modulation
- 2.nature of signal(s) modulating the main carrier: 1= A single channel containing quantized or digital information without the use of a modulating sub-carrier  
7= Two or more channels containing quantized or digital information
- 3.type of information to be transmitted: E= Telephony (including sound broadcasting)  
D= Data transmission, telemetry, telecommand  
W= Combination of the above

State : 4K00F2D (CWID, Authorized Bandwidth 6 kHz)

| Item                | Mark |     |     |
|---------------------|------|-----|-----|
| Maximum Modulation  | (M)  | 0.8 | kHz |
| Maximum Deviation   | (D)  | 1.2 | kHz |
| Numerical factor    | (K)  | 1   |     |
| Necessary Bandwidth | (Bn) | 4   | kHz |

$$B_n = (2 \times M) + (2 \times D \times K)$$

- 1.types of modulation of the main carrier : F= Frequency modulation
- 2.nature of signal(s) modulating the main carrier: 2= A single channel containing quantized or digital information with the
- 3.type of information to be transmitted: D= Data transmission, telemetry, telecommand



## 10.11 99% Occupied Bandwidth

|                   |   |                     |
|-------------------|---|---------------------|
| REGULATIONS       | : | RSS-119 Section 5.5 |
| TEST METHOD/GUIDE | : | RSS-Gen Section 6.6 |


### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the test instrument for the following setting:
  - RBW : 1 % to 5 % of the Necessary bandwidth
  - VBW : at least 3 times the RBW
  - Detector : Peak
  - Sweep Time : Auto
  - Trace mode : Max Hold
- 3 Allow trace to fully stabilize.
- 4 Use "Occupied Bandwidth Measurement" function to measure the 99% Occupied Bandwidth.
- 5 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only 16K0F3E, 11K0F3E)

### Measuring Equipments

| No. | Equipment           | Manufacture         | Model No.       | Serial No. | Cal. Interval | Effective period |
|-----|---------------------|---------------------|-----------------|------------|---------------|------------------|
| 1   | Attenuator (30dB)   | Weinschel           | WA-29-30-34     | 8923       | 1Y            | Aug. 31, 18      |
| 2   | Modulation Analyzer | Hewlett Packard     | 8901B           | 3403A04852 | 1Y            | Dec. 31, 17      |
| 3   | Audio Generator     | Anritsu             | MG443B          | M70150     | 1Y            | Aug. 31, 18      |
| 4   | Spectrum Analyzer   | Agilent             | N9030A          | US51350220 | 1Y            | Feb. 28, 18      |
| 5   | DC Power Supply     | Daiichi denpa kogyo | GZV4000         | 90290931   | None          | None             |
| 6   | Digital Multi Meter | FLUKE               | 8846A           | 9642018    | 1Y            | Jul. 31, 18      |
| 7   | JIG                 | HP                  | EliteBook 2561p | CNU2262D0Q | None          | None             |
| 8   | Balance Cable       | Nicoon              | 3D-2V           | KSR00092   | 1Y            | Mar. 31, 18      |
| 9   | Coaxial Cable       | Pacific custom      | RG-58 C/U       | AM90C04    | 1Y            | Feb. 28, 18      |
| 10  | Coaxial Cable       | Suhner              | SUCOFLEX104     | F0000018   | 1Y            | Jan. 31, 18      |


### Measuring Equipment Configuration

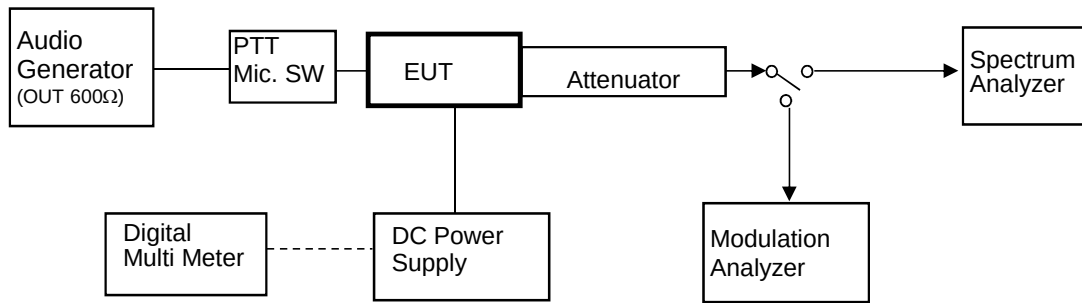

FM Modulation test is with the the Audio Generator.

Configuration of other Modulation test is composed without the Audio Generator.







### <CWID Modulation Case>






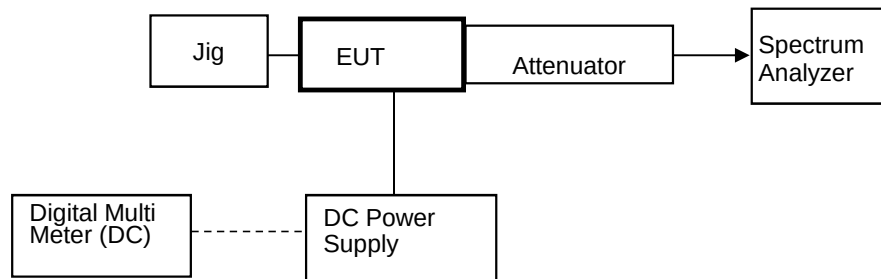








# Test Results

|                      |                         |            |  |
|----------------------|-------------------------|------------|--|
| Test date            | Aug 28, 2017            |            |  |
| Location             | Kashima No.12 Test Site |            |  |
| temperature          | 23.2                    | [degree C] |  |
| Humidity Variation   | 61.0                    | [%]        |  |
| Atmospheric Pressure | 101.0                   | [kPa]      |  |
| Test Engineer        | Koichi Wagatsuma        |            |  |

| Emission Designation | Frequency<br>(MHz) | 99% Occupied<br>Bandwidth<br>(kHz) | Authorized<br>bandwidth<br>(kHz) |
|----------------------|--------------------|------------------------------------|----------------------------------|
| 16K0F3E              | 851.05             | 10.675                             | 20                               |
|                      | 860.05             | 10.641                             |                                  |
|                      | 868.95             | 10.670                             |                                  |
| 14K0F3E              | 851.05             | 10.305                             | 20                               |
|                      | 860.05             | 10.298                             |                                  |
|                      | 868.95             | 10.304                             |                                  |
| 11K0F3E              | 851.05             | 5.180                              | 11.25                            |
|                      | 860.05             | 5.180                              |                                  |
|                      | 868.95             | 5.184                              |                                  |
| 8K30F1E/F1D/F7W      | 851.05             | 7.362                              | 11.25                            |
|                      | 860.05             | 7.388                              |                                  |
|                      | 868.95             | 7.338                              |                                  |
| 4K00F1E / F1D / F7W  | 851.05             | 3.481                              | 6                                |
|                      | 860.05             | 3.369                              |                                  |
|                      | 868.95             | 3.397                              |                                  |
| 4K00F2D              | 851.05             | 3.274                              | 6                                |
|                      | 860.05             | 3.273                              |                                  |
|                      | 868.95             | 3.275                              |                                  |
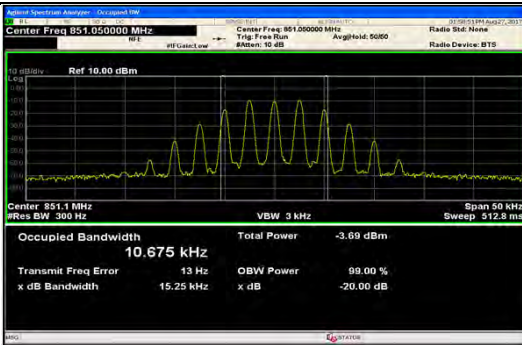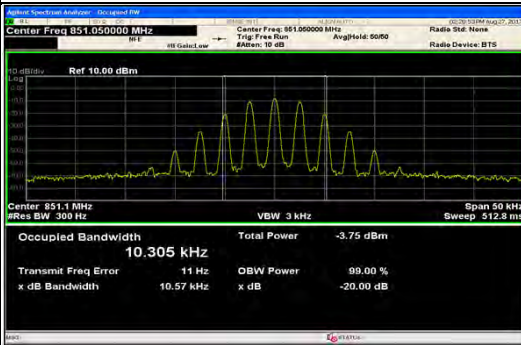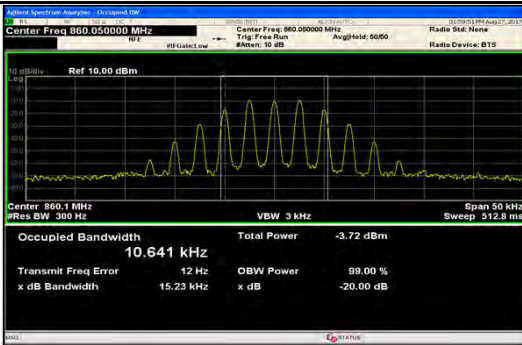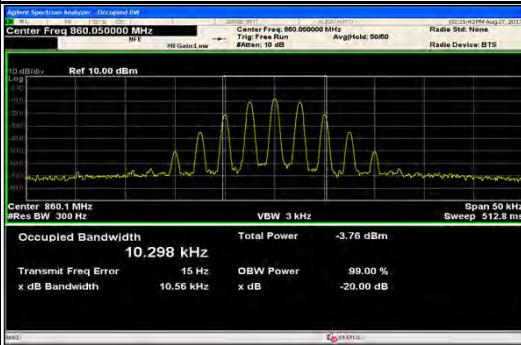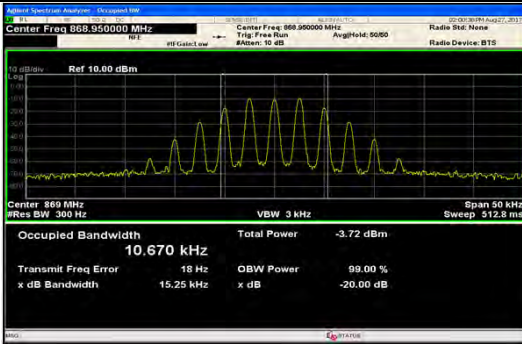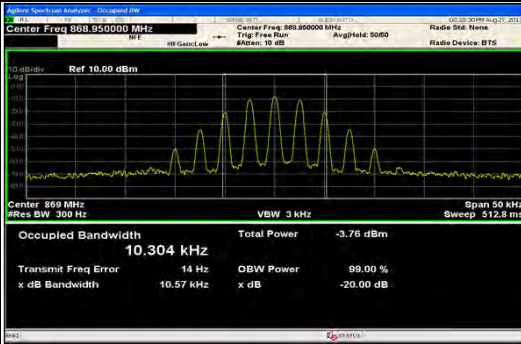
| Ferquency<br>(MHz) | Emission Designation                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                    | 16K0F3E                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 14K0F3E                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 851.05             |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 851.050000 MHz</p> <p>Ref 10.00 dBm</p> <p>Center 851.1 MHz</p> <p>Res BW 300 Hz</p> <p>VBW 3 kHz</p> <p>Span 50 kHz</p> <p>Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.675 kHz</p> <p>Total Power -3.69 dBm</p> <p>Transmit Freq Error 13 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.25 kHz</p> <p>x dB -20.00 dB</p>  |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 851.050000 MHz</p> <p>Ref 10.00 dBm</p> <p>Center 851.1 MHz</p> <p>Res BW 300 Hz</p> <p>VBW 3 kHz</p> <p>Span 50 kHz</p> <p>Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.305 kHz</p> <p>Total Power -3.75 dBm</p> <p>Transmit Freq Error 11 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.57 kHz</p> <p>x dB -20.00 dB</p>  |
| 860.05             |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 860.050000 MHz</p> <p>Ref 10.00 dBm</p> <p>Center 860.1 MHz</p> <p>Res BW 300 Hz</p> <p>VBW 3 kHz</p> <p>Span 50 kHz</p> <p>Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.641 kHz</p> <p>Total Power -3.72 dBm</p> <p>Transmit Freq Error 12 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.23 kHz</p> <p>x dB -20.00 dB</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 860.050000 MHz</p> <p>Ref 10.00 dBm</p> <p>Center 860.1 MHz</p> <p>Res BW 300 Hz</p> <p>VBW 3 kHz</p> <p>Span 50 kHz</p> <p>Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.298 kHz</p> <p>Total Power -3.76 dBm</p> <p>Transmit Freq Error 15 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.55 kHz</p> <p>x dB -20.00 dB</p> |
| 868.95             |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 868.950000 MHz</p> <p>Ref 10.00 dBm</p> <p>Center 869 MHz</p> <p>Res BW 300 Hz</p> <p>VBW 3 kHz</p> <p>Span 50 kHz</p> <p>Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.670 kHz</p> <p>Total Power -3.72 dBm</p> <p>Transmit Freq Error 18 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.25 kHz</p> <p>x dB -20.00 dB</p>  |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 868.950000 MHz</p> <p>Ref 10.00 dBm</p> <p>Center 869 MHz</p> <p>Res BW 300 Hz</p> <p>VBW 3 kHz</p> <p>Span 50 kHz</p> <p>Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.304 kHz</p> <p>Total Power -3.76 dBm</p> <p>Transmit Freq Error 14 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.57 kHz</p> <p>x dB -20.00 dB</p>  |
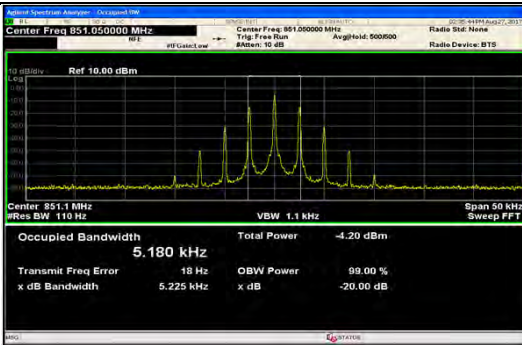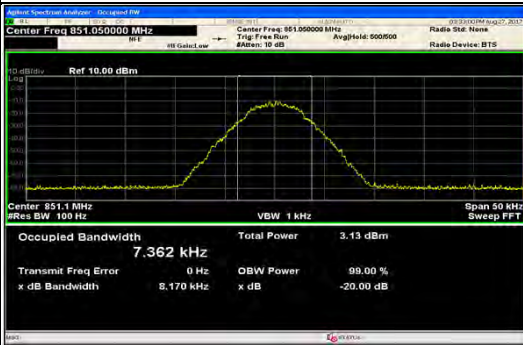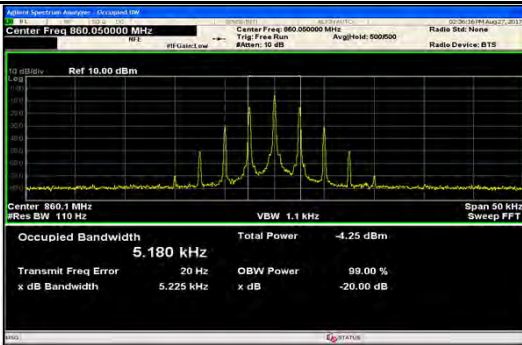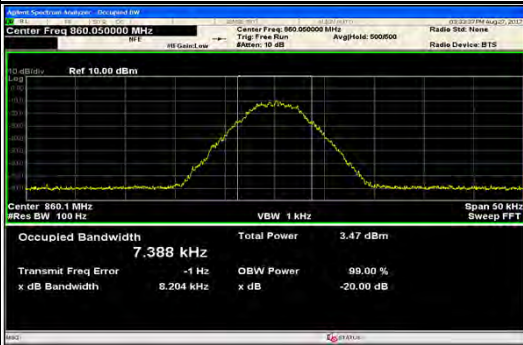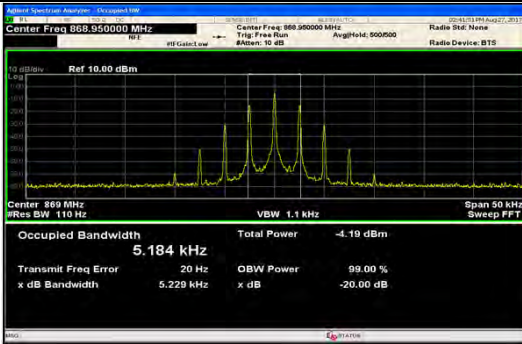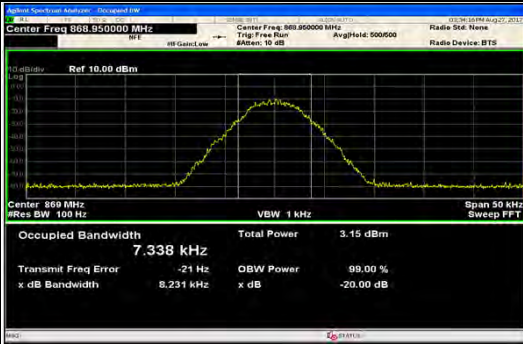
| Frequency (MHz) | Emission Designation                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | 11K0F3E                                                                                                                                                                                                                                                                                                                                                                                                    | 8K30F1E/F1D/F7W                                                                                                                                                                                                                                                                                                                                                                                             |
| 851.05          |  <p>Agilent Spectrum Analyzer - Occupied BW<br/> Center Freq 851.050000 MHz<br/> #Res BW 100 Hz<br/> #Span 50 kHz<br/> Sweep FFT<br/> Ref 10.00 dBm<br/> Occupied Bandwidth 5.180 kHz<br/> Total Power -4.20 dBm<br/> Transmit Freq Error 18 Hz<br/> OBW Power 99.00 %<br/> x dB Bandwidth 5.225 kHz x dB -20.00 dB</p>   |  <p>Agilent Spectrum Analyzer - Occupied BW<br/> Center Freq 851.050000 MHz<br/> #Res BW 100 Hz<br/> #Span 50 kHz<br/> Sweep FFT<br/> Ref 10.00 dBm<br/> Occupied Bandwidth 7.362 kHz<br/> Total Power 3.13 dBm<br/> Transmit Freq Error 0 Hz<br/> OBW Power 99.00 %<br/> x dB Bandwidth 8.170 kHz x dB -20.00 dB</p>     |
| 860.05          |  <p>Agilent Spectrum Analyzer - Occupied BW<br/> Center Freq 860.050000 MHz<br/> #Res BW 100 Hz<br/> #Span 50 kHz<br/> Sweep FFT<br/> Ref 10.00 dBm<br/> Occupied Bandwidth 5.180 kHz<br/> Total Power -4.25 dBm<br/> Transmit Freq Error 20 Hz<br/> OBW Power 99.00 %<br/> x dB Bandwidth 5.225 kHz x dB -20.00 dB</p>  |  <p>Agilent Spectrum Analyzer - Occupied BW<br/> Center Freq 860.050000 MHz<br/> #Res BW 100 Hz<br/> #Span 50 kHz<br/> Sweep FFT<br/> Ref 10.00 dBm<br/> Occupied Bandwidth 7.388 kHz<br/> Total Power 3.47 dBm<br/> Transmit Freq Error -1 Hz<br/> OBW Power 99.00 %<br/> x dB Bandwidth 8.204 kHz x dB -20.00 dB</p>   |
| 868.95          |  <p>Agilent Spectrum Analyzer - Occupied BW<br/> Center Freq 868.950000 MHz<br/> #Res BW 100 Hz<br/> #Span 50 kHz<br/> Sweep FFT<br/> Ref 10.00 dBm<br/> Occupied Bandwidth 5.184 kHz<br/> Total Power -4.19 dBm<br/> Transmit Freq Error 20 Hz<br/> OBW Power 99.00 %<br/> x dB Bandwidth 5.229 kHz x dB -20.00 dB</p> |  <p>Agilent Spectrum Analyzer - Occupied BW<br/> Center Freq 868.950000 MHz<br/> #Res BW 100 Hz<br/> #Span 50 kHz<br/> Sweep FFT<br/> Ref 10.00 dBm<br/> Occupied Bandwidth 7.338 kHz<br/> Total Power 3.15 dBm<br/> Transmit Freq Error -21 Hz<br/> OBW Power 99.00 %<br/> x dB Bandwidth 8.231 kHz x dB -20.00 dB</p> |
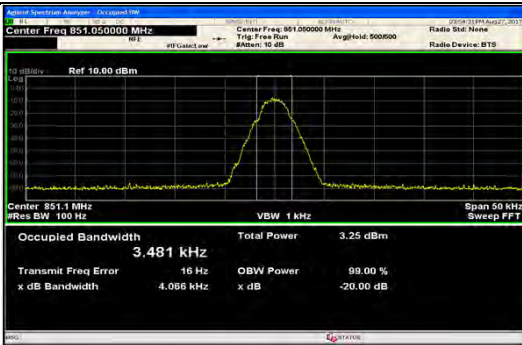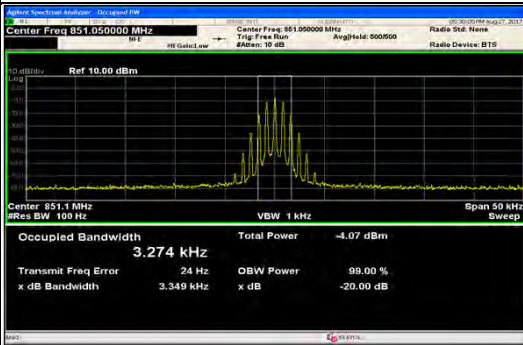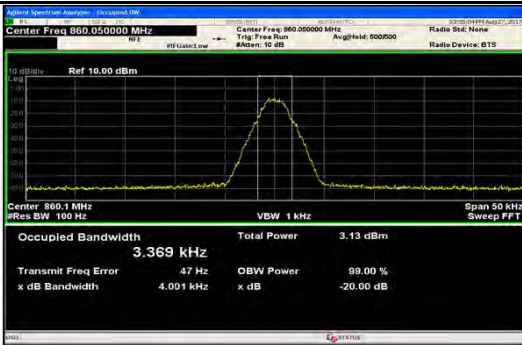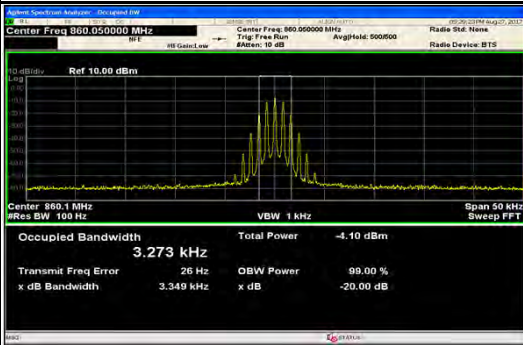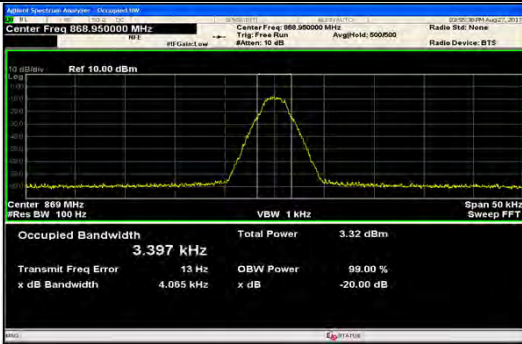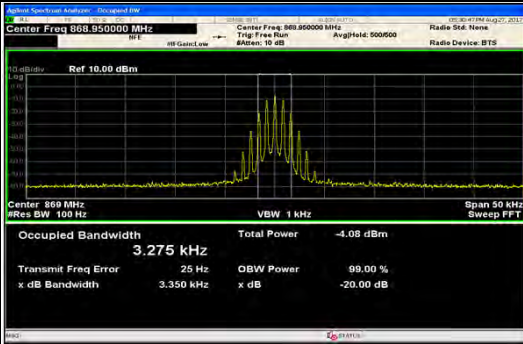
| Ferquency (MHz) | Emission Designation                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | 4K00F1E / F1D / F7W                                                                                                                                                                                                                                                                                                                                                                                   | 4K00F2D                                                                                                                                                                                                                                                                                                                                                                                                 |
| 851.05          |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 851.050000 MHz</p> <p>Center Freq 851.1 MHz</p> <p>Ref 10.00 dBm</p> <p>Occupied Bandwidth 3.481 kHz</p> <p>Total Power 3.25 dBm</p> <p>Transmit Freq Error 16 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.066 kHz</p> <p>x dB -20.00 dB</p>  |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 851.050000 MHz</p> <p>Center Freq 851.1 MHz</p> <p>Ref 10.00 dBm</p> <p>Occupied Bandwidth 3.274 kHz</p> <p>Total Power -4.07 dBm</p> <p>Transmit Freq Error 24 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 3.349 kHz</p> <p>x dB -20.00 dB</p>  |
| 860.05          |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 860.050000 MHz</p> <p>Center Freq 860.1 MHz</p> <p>Ref 10.00 dBm</p> <p>Occupied Bandwidth 3.369 kHz</p> <p>Total Power 3.13 dBm</p> <p>Transmit Freq Error 47 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.001 kHz</p> <p>x dB -20.00 dB</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 860.050000 MHz</p> <p>Center Freq 860.1 MHz</p> <p>Ref 10.00 dBm</p> <p>Occupied Bandwidth 3.273 kHz</p> <p>Total Power -4.10 dBm</p> <p>Transmit Freq Error 26 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 3.349 kHz</p> <p>x dB -20.00 dB</p> |
| 868.95          |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 868.950000 MHz</p> <p>Center Freq 869 MHz</p> <p>Ref 10.00 dBm</p> <p>Occupied Bandwidth 3.397 kHz</p> <p>Total Power 3.32 dBm</p> <p>Transmit Freq Error 13 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.095 kHz</p> <p>x dB -20.00 dB</p>  |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 868.950000 MHz</p> <p>Center Freq 869 MHz</p> <p>Ref 10.00 dBm</p> <p>Occupied Bandwidth 3.275 kHz</p> <p>Total Power -4.08 dBm</p> <p>Transmit Freq Error 25 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 3.350 kHz</p> <p>x dB -20.00 dB</p>  |