

## TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210U

### TEST REPORT:

|               |                                                               |
|---------------|---------------------------------------------------------------|
| PAGE 1.....   | COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.          |
| PAGE 2.....   | TECHNICAL DESCRIPTION CONTD. & RF POWER OUTPUT                |
| PAGE 3.....   | RF POWER OUTPUT AND MODULATION CHARACTERISTICS                |
| PAGE 4-5....  | OCCUPIED BANDWIDTH                                            |
| PAGE 6.....   | SPURIOUS EMISSIONS AT ANTENNA TERMINALS                       |
| PAGE 7.....   | FIELD STRENGTH OF SPURIOUS EMISSIONS                          |
| PAGE 8.....   | METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS               |
| PAGE 9.....   | FREQUENCY STABILITY                                           |
| PAGE 10-11... | TRANSIENT FREQUENCY STABILITY                                 |
| PAGE 12.....  | CERTIFICATION OF TECHNICAL DATA AND<br>LIST OF TEST EQUIPMENT |

### EXHIBITS CONTAINING:

|                    |                                                 |
|--------------------|-------------------------------------------------|
| EXHIBIT 1.....     | POWER OF ATTORNEY LETTER                        |
| EXHIBIT 2.....     | FCC ID LABEL SAMPLE AND SKETCH OF LOCATION      |
| EXHIBIT 3.....     | WARNING STATEMENT FOR EQUIPMENT                 |
| EXHIBIT 4.....     | LETTER REGARDING FREQUENCY CHANGES              |
| EXHIBIT 5A-5B....  | EXTERNAL FRONT VIEW PHOTOGRAPHS                 |
| EXHIBIT 5C.....    | EXTERNAL REAR VIEW PHOTOGRAPHS                  |
| EXHIBIT 5D.....    | EXTERNAL TOP VIEW PHOTOGRAPH                    |
| EXHIBIT 5E.....    | INTERNAL CHASSIS VIEW PHOTOGRAPH                |
| EXHIBIT 5F.....    | INTERNAL COMPONENT SIDE PHOTOGRAPH              |
| EXHIBIT 5G.....    | INTERNAL SOLDER SIDE PHOTOGRAPH                 |
| EXHIBIT 6.....     | BLOCK DIAGRAM                                   |
| EXHIBIT 7.....     | MAIN SCHEMATIC                                  |
| EXHIBIT 8.....     | SW SCHEMATIC                                    |
| EXHIBIT 9.....     | PARTS LIST                                      |
| EXHIBIT 10A-10B... | USER'S MANUAL                                   |
| EXHIBIT 11A-11C... | CIRCUIT DESCRIPTION                             |
| EXHIBIT 12A-12C... | TUNING PROCEDURE                                |
| EXHIBIT 13A.....   | AUDIO FREQUENCY RESPONSE GRAPH - 5 kHz CH       |
| EXHIBIT 13B.....   | AUDIO FREQUENCY RESPONSE GRAPH - 2.5 kHz CH     |
| EXHIBIT 14A.....   | MODULATION LIMITING - 5 kHz CH SPACING -300 Hz  |
| EXHIBIT 14B.....   | MODULATION LIMITING - 5 kHz CH SPACING -1000 Hz |
| EXHIBIT 14C.....   | MODULATION LIMITING - 5 kHz CH SPACING -3000 Hz |
| EXHIBIT 14D.....   | MODULATION LIMITING - 2.5kHz CH SPACING -300 Hz |
| EXHIBIT 14E.....   | MODULATION LIMITING - 2.5kHz CH SPACING-1000 Hz |
| EXHIBIT 14F.....   | MODULATION LIMITING - 2.5kHz CH SPACING-3000 Hz |
| EXHIBIT 15.....    | AUDIO LOW PASS FILTER GRAPH                     |
| EXHIBIT 16A.....   | OCCUPIED BANDWIDTH PLOTS- 25KHz CH              |
| EXHIBIT 16B.....   | OCCUPIED BANDWIDTH PLOTS- 12.5KHz CH            |
| EXHIBIT 17A-17D... | TRANSIENT FREQUENCY RESPONSE PLOTS              |

DATE: AUGUST 24, 1999  
REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT  
PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED  
FOR TYPE ACCEPTANCE

2.983 (a,b,c) YAESU MUSEN CO., LTD. will sell the FCCID: K66VX-210U UHF transciever in quantity, for use under FCC RULES PART 22, 74, 90, 95, & 90.210.

2.983 (d) TECHNICAL\_DESCRIPTION

(1) ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.  
90.209(b)(5)

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 2.5\text{KHz (Peak Deviation)} \\ K &= 1 \\ B_n &= 2(3.0K) + 2(2.5K)(1) = 6.0K + 5.0K = 11.0K \end{aligned}$$

Type of Emission: 11K0F3E

(2) ALLOWED AUTHORIZED BANDWIDTH = 20.0KHz.  
90.209(b)(5)

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 5.0\text{KHz (Peak Deviation)} \\ K &= 1 \\ B_n &= 2(3.0K) + 2(5.0K)(1) = 6.0K + 10.0K = 16.0K \end{aligned}$$

Type of Emission: 16K0F3E

(2) Frequency Range: 421-512 MHz

(3) Power Range and Controls: This UUT has two(2) power ranges, 1.0Watt & 5.0Watt.

(4) Maximum Output Power Rating: 5.0Watts  
into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

|             |                      |
|-------------|----------------------|
| POWER INPUT | FINAL AMPLIFIER ONLY |
| POWER OUT   | 5.4                  |
| Vce Volts   | 7.2                  |
| Ice Amps    | 1.5                  |
| Pin Watts   | 10.2                 |

(6) Function of each electron tube or semiconductor device or other active circuit device:  
See attached list in Exhibit 9

2.983 (d)(6)

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as PAGES 7-8. The block diagram is included as PAGE 6.

(8) Instruction book. The instruction manual is included as 10A-10B.

(9) Tune-up procedure. The tune-up procedure is given in the user's manual.

(10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in 11A-11C.

2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.

In addition to the interstage filtering the multi-section low pass filter is described in paragraph 6.3.5 of the instruction manual.

Limiting Modulation:

The transmitter audio limiting circuitry is contained in the loop filter U501, U502, & U503.

Limiting Power: The power is preset at the factory for either high or low. There is no provision for limiting power.

(12) Digital modulation. This unit does NOT use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF\_power\_output. The test procedure used was TIA/EIA-603 S2.2.1. RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2V, and the transmitter properly adjusted the RF output measures:

INPUT POWER: (7.2V)(1.5A) = 10.80Watts

OUTPUT POWER: 5.4 Watts Efficiency: 47%

INPUT POWER(L0): (7.2V)(0.9) = 6.48 Watts

OUTPUT POWER(L0): 1.3 Watts Efficiency: 20%

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210U

DATE: AUGUST 24, 1999

REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT


PAGE #: 2

```

graph LR
    DM["Dummy Microphone"] --- T["Transmitter under test"]
    T --- S["STANDARD TRANSMITTER LOAD"]
    S --- R["RF POWER METER"]
  
```

AUDIO\_FREQUENCY\_RESPONSE The audio frequency response was measured in accordance with TIA/EIA Specification TIA/EIA-603 S2.2.6.2.1. The audio frequency response curve is shown in Exhibits 13A-13B.

2.987(b) AUDIO\_INPUT\_VERSUS\_MODULATION The audio frequency input versus deviation was measured in accordance with TIA/EIA Specification 603 S2.2.6.2.1. with the following exceptions; starting with 1000Hz the input was increased well beyond the deviation changing. This measurement was repeated for the band limits and any frequency deemed appropriate. See Exhibit 14A-14F.

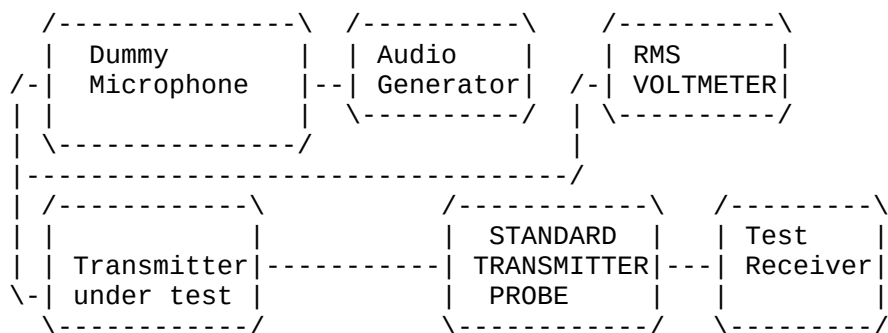

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210U  
DATE: AUGUST 24, 1999  
REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT  
PAGE #: 3

2.989(c)      Occupied bandwidth:

90.210 (b)

- (1) On any frequency removed from the assigned frequency by more than 50% of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100%, but not more than 250% of the authorized bandwidth: At least 35dB.
- (3) On any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB.

90.210 (d) 2

Requirement For 12.5KHz channel bandwidth equipment, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;

- (1) On any frequency from the center of the authorized bandwidth  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 5.625kHz but no more than 12.5kHz: At least  $7.27(f_d - 2.88\text{kHz})\text{dB}$
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 12.5kHz: At least  $50 + 10 \log(P)$  dB or 70dB, whichever is the lesser attenuation.

See Exhibit 16.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210U

DATE: AUGUST 24, 1999

REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT


PAGE #: 4



2.991

Spurious emissions at antenna terminals(conducted):

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

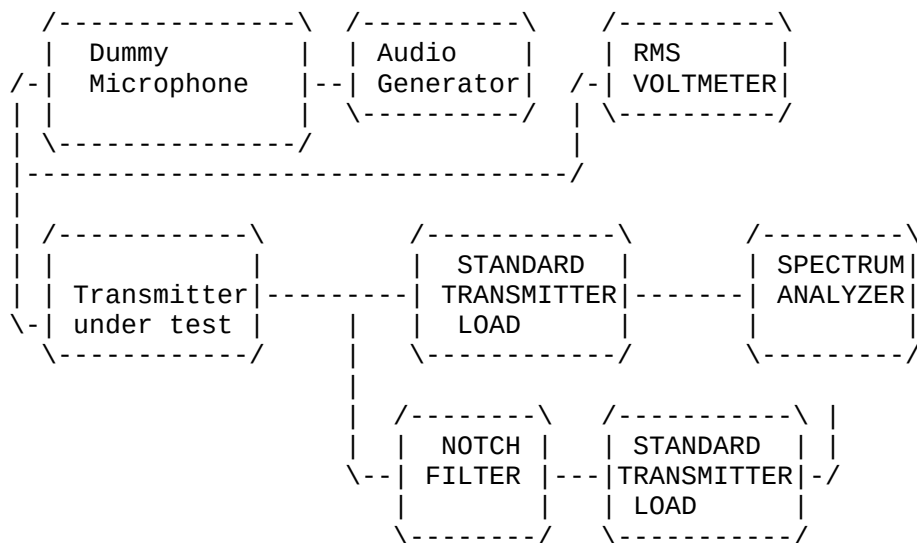

Method of Measuring Conducted Spurious Emissions

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

HIGH POWER  $43 + 10\log(5.4) = 50.3\text{dB}$

LOW POWER At least 70dBc

| EMISSION<br>FREQUENCY<br>MHz | dB BELOW<br>CARRIER |        |
|------------------------------|---------------------|--------|
| 450.025                      | 00.0                | 0.0    |
| 900.05                       | -76.1               | -78.2  |
| 1350.08                      | -74.5               | -88.4  |
| 1800.12                      | -90.3               | -84.0  |
| 2250.14                      | -80.1               | -90.3  |
| 2700.10                      | -78.6               | -78.7  |
| 3150.14                      | -81.2               | -94.5  |
| 3600.14                      | -100.2              | -93.0  |
| 4050.10                      | -99.5               | -101.3 |
| 4500.25                      | -97.9               | -105.2 |

2.993(a)(b) Field strength of spurious emissions:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to 4.7 GHz. This test was conducted per ANSI C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference.

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.  
HIGH POWER

$$50 + 10\log(5.4) = 57.30 \text{ dB or } 70\text{dBc, whichever is the lessor.}$$

NOTE: FOR THE MARGIN CALCULATION BELOW 70dB WAS USED.

TEST DATA: HIGH POWER

| EMISSION<br>FREQUENCY<br>MHz | METER<br>READING<br>@ 3m dBuV | COAX<br>LOSS<br>dB | ACF<br>dB | FIELD<br>STRENGTH<br>dBuV/m | ATT.<br>LEVEL<br>dB | MARGIN<br>dB | ANT. |
|------------------------------|-------------------------------|--------------------|-----------|-----------------------------|---------------------|--------------|------|
| 450.00                       | 115.20                        | 1.60               | 18.15     | 134.95                      | 0.00                | 0.00         | H    |
| 900.00                       | 17.20                         | 2.90               | 24.20     | 44.30                       | 85.45               | 15.45        | H    |
| 1350.10                      | 13.20                         | 1.00               | 25.40     | 39.60                       | 90.15               | 20.15        | V    |
| 1800.10                      | 14.10                         | 1.00               | 27.20     | 42.30                       | 87.45               | 17.45        | V    |
| 2250.10                      | 12.60                         | 1.07               | 28.63     | 42.29                       | 87.46               | 17.46        | H    |
| 2700.10                      | 11.90                         | 1.14               | 29.75     | 42.79                       | 86.96               | 16.96        | H    |
| 3150.10                      | 6.40                          | 1.20               | 30.88     | 38.48                       | 91.27               | 21.27        | H    |
| 3600.10                      | 6.50                          | 1.27               | 32.00     | 39.77                       | 89.98               | 19.98        | H    |
| 4050.10                      | 2.20                          | 1.34               | 33.06     | 36.59                       | 93.16               | 23.16        | H    |
| 4500.30                      | 1.50                          | 1.41               | 33.56     | 36.47                       | 93.28               | 23.28        | H    |


TEST DATA: LOW POWER

| EMISSION<br>FREQUENCY<br>MHz | METER<br>READING<br>@ 3m dBuV | COAX<br>LOSS<br>dB | ACF<br>dB | FIELD<br>STRENGTH<br>dBuV/m | ATT.<br>LEVEL<br>dB | MARGIN<br>dB | ANT. |
|------------------------------|-------------------------------|--------------------|-----------|-----------------------------|---------------------|--------------|------|
| 450.10                       | 108.20                        | 1.60               | 18.15     | 127.95                      | 0.00                | 0.00         | H    |
| 900.00                       | 17.30                         | 2.90               | 24.20     | 44.40                       | 87.45               | 17.45        | V    |
| 1350.00                      | 15.30                         | 1.00               | 25.40     | 41.70                       | 90.15               | 20.15        | V    |
| 1800.10                      | 14.20                         | 1.00               | 27.20     | 42.40                       | 89.45               | 19.45        | H    |
| 2250.10                      | 14.50                         | 1.07               | 28.63     | 44.19                       | 87.66               | 17.66        | H    |
| 2700.10                      | 0.00                          | 1.14               | 29.75     | 30.89                       | 100.97              | 30.97        | H    |
| 2700.10                      | 14.20                         | 1.14               | 29.75     | 45.09                       | 86.77               | 16.77        | H    |
| 3150.10                      | 12.70                         | 1.20               | 30.88     | 44.78                       | 87.07               | 17.07        | H    |
| 3600.10                      | 12.80                         | 1.27               | 32.00     | 46.07                       | 85.78               | 15.78        | H    |
| 4050.10                      | 12.10                         | 1.34               | 33.06     | 46.49                       | 85.36               | 15.36        | H    |
| 4500.30                      | 8.60                          | 1.41               | 33.56     | 43.57                       | 88.28               | 18.28        | H    |

2.993(a)(b) CONTINUED: Field strength of spurious emissions:

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 with the following exception: the unit was operated into a dipole antenna with the antenna at a height of 1.5 meters in order to establish a reference, then connected to a dummy load. The spectrum was scanned from 30MHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, a ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2, RGA-180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th LANE, GAINESVILLE, FL 32605.

Method of Measuring Radiated Spurious Emissions

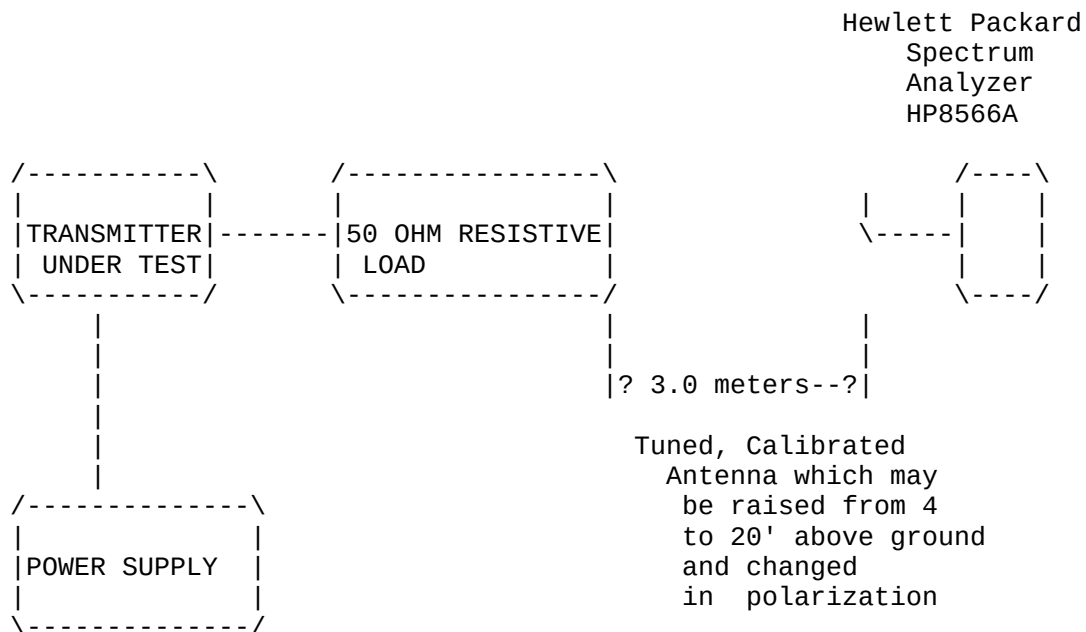

Equipment placed 4' above ground  
on a rotatable platform.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210U

DATE: AUGUST 24, 1999

REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT

PAGE #: 8

2.995(a)(b)(d) Frequency stability:  
90.213

Temperature and voltage tests were performed to verify that the frequency remains within the .00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus & minus 15% of the supply voltage of 13.6VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 450.025 000MHz

| TEMPERATURE_C                | FREQUENCY_MHz | PPM   |
|------------------------------|---------------|-------|
| REFERENCE_____               | 450.025 000   | 00.0  |
| -30_____                     | 450.024 720   | -0.62 |
| -20_____                     | 450.024 900   | -0.22 |
| -10_____                     | 450.025 530   | +1.18 |
| 0_____                       | 450.025 780   | +1.73 |
| +10_____                     | 450.025 730   | +1.62 |
| +20_____                     | 450.025 490   | 1.09  |
| +30_____                     | 450.025 060   | 0.13  |
| +40_____                     | 450.024 840   | -0.35 |
| +50_____                     | 450.024 970   | -0.07 |
| -15% Supply Voltage 11.56VDC | 450.025 150   | 0.33  |
| +15% Supply Voltage 15.64VDC | 450.025 050   | 0.11  |
| +Battery End-point 6.0VDC    | 450.025 310   | 0.68  |

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was +1.73 to -0.62ppm. The maximum frequency variation over the voltage range was +0.68 ppm.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210U  
DATE: AUGUST 24, 1999  
REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT  
PAGE #: 9

2.995(a)(b)(d) Frequency stability:

90.214                      Transient Frequency Behavior

REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 25kHz Channels:

| Time Interval | Maximum Frequency | Portable Radios 450-500Mhz |
|---------------|-------------------|----------------------------|
| t1            | +25kHz            | 10.0ms                     |
| t2            | +12.5kHz          | 25.0ms                     |
| t3            | +25.0kHz          | 10.0ms                     |


TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210U  
DATE: AUGUST 24, 1999  
REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT  
PAGE #: 10

2.995(a)(b)(d) Frequency stability:

90.214 Transient Frequency Behavior  
(Continued)

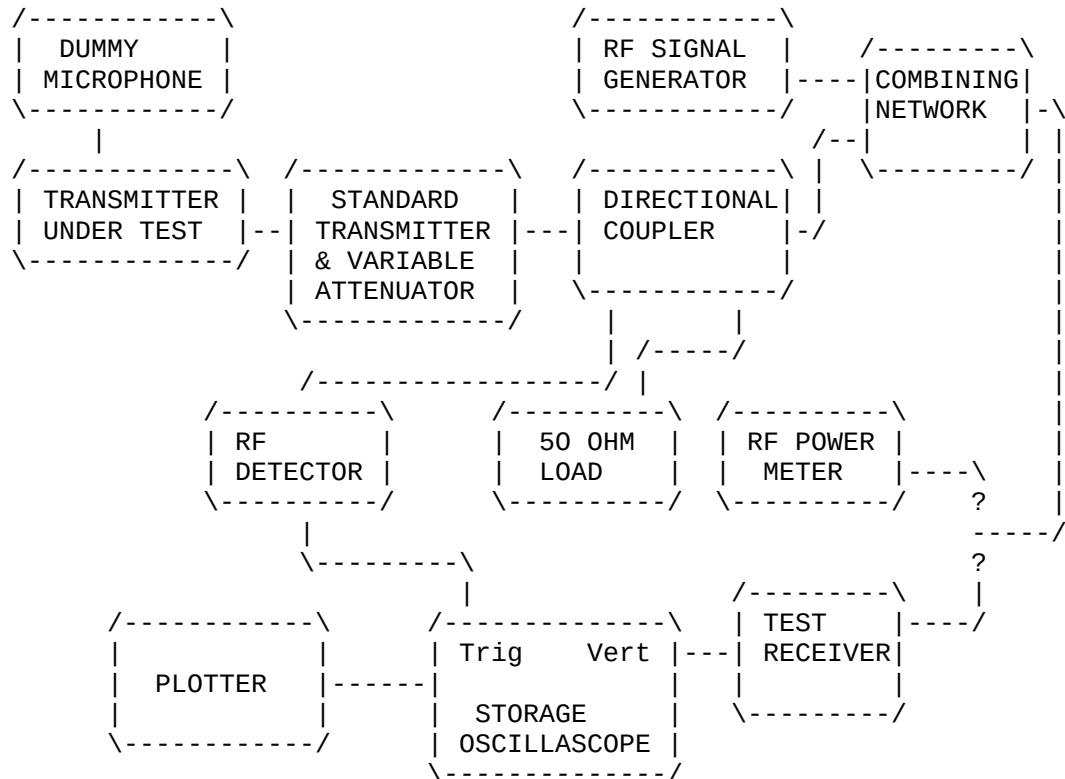

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210U  
DATE: AUGUST 24, 1999  
REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT  
PAGE #: 11

2.983(f) Photo or Drawing of Label:  
See Exhibit 2.

2.983(g) Photos of Equipment:  
See Exhibits 5A-5G.

2.999 Measurement Procedures for Type Acceptance:

Measurement techniques have been in accordance  
with TIA/EIA specifications and the FCC requirements.

2.909 Certification of Technical Data by Engineers

We, the undersigned, certify that the enclosed  
measurements and enclosed data are true and correct.

---

S.S. Sanders  
Engineer

#### TEST EQUIPMENT LIST

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/  
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP  
8449B - OPT H02 Cal. 7/6/99
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
3. Eaton Biconnical Antenna Model 94455-1  
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 10/30/98
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210U

DATE: AUGUST 24, 1999

REPORT #: F:\CUS\Y\YAE\YAE347A9\YAE347A9.RPT

PAGE #: 12