



Engineering and Testing for EMC and Safety Compliance

TYPE CERTIFICATION REPORT

Vertex Standard Co., LTD.
4-8-8, Nakameguro, Meguro-ku, Tokyo 153-8644, Japan
81-(0) 3-5725-6122

MODEL: VX_900V/600V

FCC ID: K66VX-900V

December 11, 2000

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	§15.109: RADIATED EMISSIONS LIMITS
PART 22: 1998	PUBLIC MOBILE SERVICES
PART 74: 1998	LOW POWER AUXILIARY STATION
PART 90: 1998	PRIVATE LAND MOBILE RADIO SERVICES
PART 95 (A): 1998	GENERAL MOBILE RADIO SERVICES
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA603- 1992	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA 603-1-1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
RSS-119, Issue 5: 1996	LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS.27.41 TO 960.0 MHz

FCC Rules Parts	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
90.210	146.10-173.90	5	2.5 ppm	11K0F3E
90, 22, 74, 95	146.10-173.90	5	2.5 ppm	16K0F3E
90.210	146.10-173.90	2.5	2.5 ppm	11K0F3E
90, 22, 74, 95	146.10-173.90	2.5	2.5 ppm	16K0F3E
90.210	146.10-173.90	1.0	2.5 ppm	11K0F3E
90, 22, 74, 95	146.10-173.90	1.0	2.5 ppm	16K0F3E
90.210	146.10-173.90	0.25	2.5 ppm	11K0F3E
90, 22, 74, 95	146.10-173.90	0.25	2.5 ppm	16K0F3E
Canadian	Frequency Range	Output Power (W)	Freq. Tolerance	
RSS-119	146.10-173.90	5	2.5 ppm	16K0F3E
RSS-119	146.10-173.90	5	2.5 ppm	11K0F3E

REPORT PREPARED BY:

EMC Engineer: Desmond Fraser
Technical Writer: Melissa Fleming

Document Number: 2000480

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.

360 Herndon Parkway, Suite 1400
Herndon, VA 20170
Phone: 703-689-0368; Fax: 703-689-2056; Metro: 703-471-6441



TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	TEST FACILITY	4
1.2	1.2 RELATED SUBMITTAL(S)/GRANT(S)	4
2	CONFORMANCE STATEMENT	5
3	TESTED SYSTEM DETAILS	6
3.1	CONFIGURATION OF TESTED SYSTEM	6
4	FIELD STRENGTH CALCULATION	7
5	CONDUCTED MEASUREMENT	8
5.1	CONDUCTED MEASUREMENT TEST RESULTS	9
6	RADIATED MEASUREMENT.....	10
7	FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED.....	11
7.1	TEST PROCEDURE	11
7.2	TEST DATA.....	11
7.3	TEST EQUIPMENT	11
8	FCC RULES AND REGULATIONS PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS	12
8.1	TEST PROCEDURE	12
8.2	TEST DATA.....	12
8.2.1	CFR Part 90 Requirements.....	12
9	FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION	15
9.1	TEST PROCEDURE	15
9.2	TEST DATA.....	15
9.3	TEST EQUIPMENT	15
10	FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH.....	16
10.1	TEST PROCEDURE	16
10.2	TEST DATA.....	16
10.2.1	Channel 2: 5W for 25 kHz Channel Bandwidth: Mask B (Audio Modulation: 2,500 Hz).....	16
10.2.2	Channel 5: 5 W for 12.5 kHz Channel Bandwidth: Mask D (Audio Modulation: 2,500 Hz).....	17
10.2.3	Channel 8: 2.5 W for 25 kHz Channel Bandwidth: Mask B (Audio Modulation: 2,500 Hz).....	18
10.2.4	Channel 11: 2.5 W for 12.5 kHz Channel Bandwidth: Mask D (Audio Modulation: 2,500 Hz).....	19
10.3	TEST EQUIPMENT	19
11	FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY	20
11.1	TEST PROCEDURE	20
11.2	TEST DATA.....	20
11.2.1	Frequency stability/Temperature variation	20
11.2.2	Frequency Stability/Voltage Variation.....	22
11.3	7.3 TEST EQUIPMENT	22
12	FCC RULES AND REGULATIONS PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE	23
12.1	TEST PROCEDURE	23



COMPANY NAME: VERTEX STANDARD Co., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

12.2	TEST DATA.....	23
12.2.1	Channel 2 – 25 kHz Audio Frequency Response.....	23
12.2.2	Channel 5 – 12.5 kHz Audio Frequency Response.....	24
12.3	TEST EQUIPMENT	24
13	FCC RULES AND REGULATIONS PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO LOW PASS FILTER RESPONSE.....	25
13.1	TEST PROCEDURE	25
13.2	TEST DATA.....	25
13.2.1	Channel 2 – 25 kHz Audio Low Pass Filter Response (Wide Band).....	25
13.2.2	Channel 5 – 12.5 kHz Audio Low Pass Filter Response (Narrow Band).....	26
13.3	TEST EQUIPMENT	26
14	FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING	27
14.1	TEST PROCEDURE	27
14.2	TEST DATA.....	27
14.3	TEST EQUIPMENT	30
15	FCC RULES AND REGULATIONS PART 90 §90.214 : TRANSIENT FREQUENCY BEHAVIOR.....	31
15.1	TEST PROCEDURE	31
15.2	TEST DATA WIDE BAND.....	31
15.3	TEST EQUIPMENT	36
16	FCC RULES AND REGULATIONS PART 2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH	37
17	RECEIVER DATA	38
18	PART 2.1046 (A) RF POWER OUTPUT: RADIATED - ERP	2
18.1	TEST PROCEDURE	2
18.2	TEST DATA.....	2
18.3	TEST EQUIPMENT	2
19	TEST CONFIGURATION PHOTOGRAPHS.....	2
20	BLOCK DIAGRAM	2
21	LABEL INFORMATION.....	2
22	PRODUCT DESCRIPTION.....	2
23	SCHEMATICS	2
24	INTERNAL PHOTOGRAPHS.....	2
25	EXTERNAL PHOTOGRAPHS.....	2
26	OPERATOR’S MANUAL	2



COMPANY NAME: VERTEX STANDARD Co., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

1 GENERAL INFORMATION

The following Report of a Type Certification is prepared on behalf of **Vertex Standard Co., LTD** in accordance with the Federal Communications Commissions and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **VX_900V/600V**. The test results reported in this document relate only to the item that was tested. **The VX-900V and the VX-600V are identical both electrically and mechanically. The only difference between both units is an LCD display that is removed from the VX-900V to form the VX-600V. The VX-900V/600V supports 5 watt, 2.5 watt, 1 watt, and 0.25 watt. It was determined during testing that the VX-900V 5 watt and 2.5 watt were the worst-case. Hence through out this report the VX-900V was used for testing. The manufacturer intends to remove the LCD display measured at 1 inch by 0.5 inch leaving all other electronic and mechanical supporting components.**

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, Industry Canada RSS-119, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application report.




COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

2 CONFORMANCE STATEMENT

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards.


Furthermore, there was no deviation from, additions to or exclusions from the FCC Part 2, FCC Part 22, FCC Part 74, FCC Part 90, FCC Part 95 and Industry Canada RSS-119 Certification methodology.

Signature: 

Date: December 8, 2000

Typed/Printed Name: Desmond A. Fraser

Position: President
(NVLAP Signatory)



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 200061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.




3 TESTED SYSTEM DETAILS

Listed below is the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID
RADIO	VERTEX	VX-900V/600V	N/A	K66VX-900V
ANTENNA WHIP	VERTEX	N/A	N/A	N/A
AUDIO TEST CABLE	VERTEX	N/A	N/A	N/A
AUDIO TEST BOX	VERTEX	TUNING I/F	N/A	N/A
BATTERY	VERTEX	FNB-V68L1	N/A	N/A
MICROPHONE / SPEAKER	VERTEX	MH-50E7A	N/A	N/A

3.1 CONFIGURATION OF TESTED SYSTEM

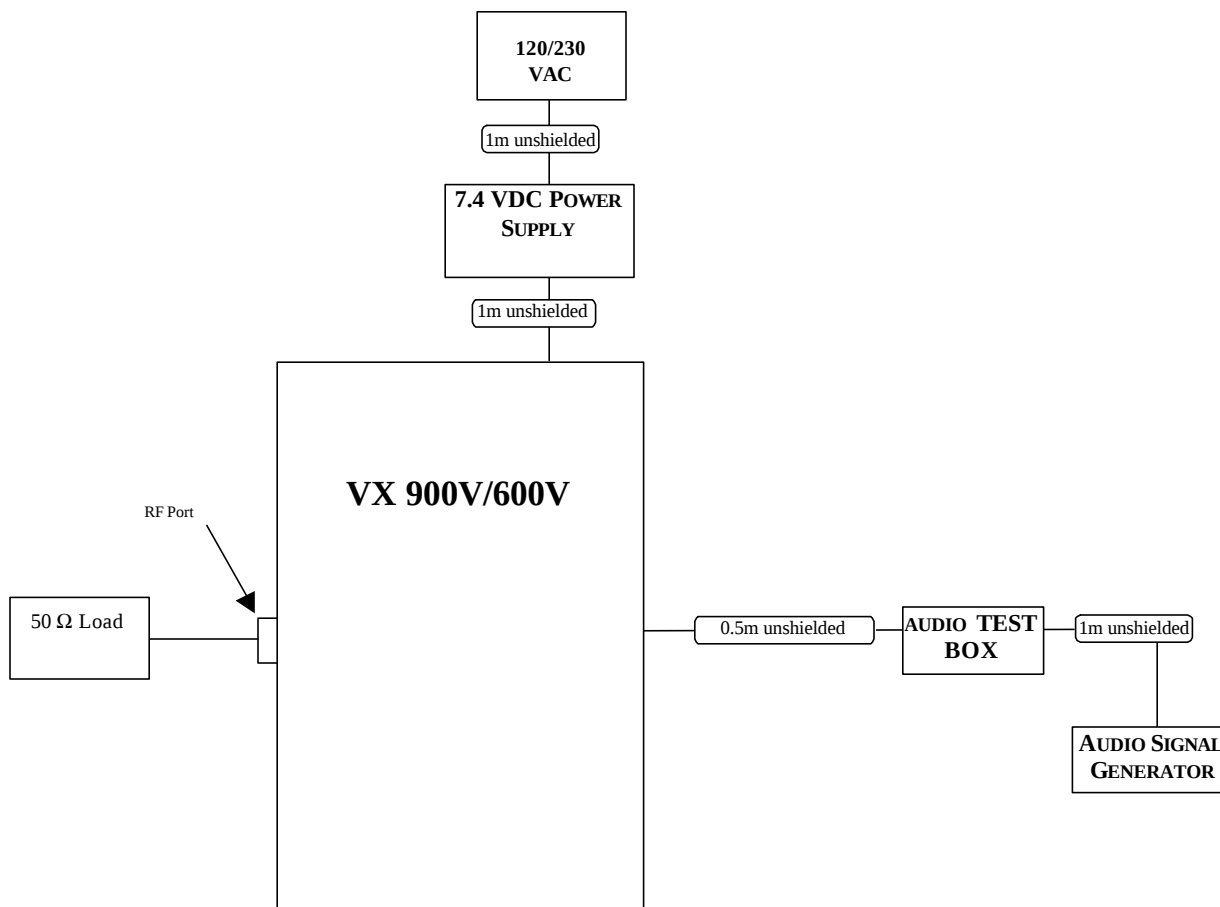



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

4 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FI(\text{dBuV/m}) = SAR(\text{dBuV}) + SCF(\text{dB/m})$$

FI = Field Intensity

SAR = Spectrum Analyzer Reading

SCF = Site Correction Factor

The Site Correction Factor (SCF) used in the above equation is determined empirically, and is expressed in the following equation:

$$SCF(\text{dB/m}) = -PG(\text{dB}) + AF(\text{dB/m}) + CL(\text{dB})$$

SCF = Site Correction Factor

PG = Pre-amplifier Gain

AF = Antenna Factor

CL = Cable Loss

The field intensity in microvolts per meter can then be determined according to the following equation:

$$FI(\text{uV/m}) = 10^{FI(\text{dBuV/m})/20}$$

For example, assume a signal at a frequency of 125 MHz has a received level measured as 49.3 dBuV. The total Site Correction Factor (antenna factor plus cable loss minus preamplifier gain) for 125 MHz is -11.5 dB/m. The actual radiated field strength is calculated as follows:

$$49.3 \text{ dBuV} - 11.5 \text{ dB/m} = 37.8 \text{ dBuV/m}$$

$$10^{37.8/20} = 10^{1.89} = 77.6 \text{ uV/m}$$



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

5 CONDUCTED MEASUREMENT

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 400 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 400 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from (150/450) kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

5.1 CONDUCTED MEASUREMENT TEST RESULTS

Mode: 160.10 MHz High Wide band
NEUTRAL SIDE (Line 1)

Temperature: 74°F				Humidity: 34%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B Limit (dBuV)	FCC B Margin (dB)
0.464	Pk	23.3	0.8	24.1	48.0	-23.9
0.596	Pk	23.1	0.9	24.0	48.0	-24.0
0.798	Pk	21.0	0.9	21.9	48.0	-26.1
2.698	Pk	19.3	1.5	20.8	48.0	-27.2
8.490	Pk	16.2	2.3	18.5	48.0	-29.5
15.700	Pk	18.6	3.0	21.6	48.0	-26.4
27.810	Pk	16.4	3.4	19.8	48.0	-28.2

Hot Side (L2)

Mode: 160.10 MHz high power wide band

HOT SIDE (Line 2)

Temperature: 74°F				Humidity: 34%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B Limit (dBuV)	FCC B Margin (dB)
0.613	Pk	21.1	0.8	21.9	48.0	-26.1
0.795	Pk	19.4	0.9	20.3	48.0	-27.7
0.984	Pk	20.1	0.9	21.0	48.0	-27.0
2.130	Pk	20.2	1.3	21.5	48.0	-26.5
11.440	Pk	18.9	2.6	21.5	48.0	-26.5
22.050	Pk	17.8	3.4	21.2	48.0	-26.8

Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature: 

Date: November 29, 2000

Typed/Printed Name: Daniel Baltzell



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

6 RADIATED MEASUREMENT

Before final measurements of radiated emissions were made on the open-field three meter range, the EUT was scanned indoors at a three meter distance in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

7 FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED

7.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

7.2 TEST DATA

The following channel (in MHz) were tested: 146.10, 160.10, 173.90

The worst-case Output Power (highest) levels are shown.

CARRIER OUTPUT POWER (UNMODULATED)

Power Setting	RF Power measured (Watt)*
Low	2.5
High	5

*Measurement accuracy: +/- 3%

Rated Power:

Power Setting	Rated Power (W)
Low	2.5
High	5

7.3 TEST EQUIPMENT

Power Meter	HP437B	s/n 2949A02966
	HP 8901A	s/n 2545A04102 (power mode)
Power Sensor	HP8481B	s/n 2702A05059
Frequency Counter	HP8901A	s/n 2545A04102 (Frequency mode)



8 FCC RULES AND REGULATIONS PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, Section 2.2.13

The transmitter is terminated with a 50Ω load and interfaced with a spectrum analyzer.

The transmitter is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1000 Hz.

8.2 TEST DATA

8.2.1 CFR PART 90 REQUIREMENTS

Frequency range of measurement per Part 2.1057: 9kHz to $10 \times F_c$

Limits: Mask B (dBm): $P(\text{dBm}) - (43 + 10 \times \log P(\text{W}))$
Mask D (dBm): $P(\text{dBm}) - (50 + 10 \times \log P(\text{W}))$

The following channel (in MHz) was investigated: 146.10, 160.10, and 173.90 in 5W, 2.5W, 1W and 0.25W mode for both 25KHz and 12.5 KHz channel spacing.

The worst case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

Channel 4 (146.10 MHz) – 5 Watt and 12.5 kHz Channel Bandwidth: Mask D

Frequency (MHz)	Level Measured (dBm)	Limit (dBm)	Margin (dB)
135.7	-36.22	-20	-16.22
241.1	-36.48	-20	-16.48
362.6	-36.03	-20	-16.03
292.2	NF		
430.3	NF		
479.6	-37.01	-20	-17.01
584.4	NF		
690.0	-36.38	-20	-16.38
730.5	NF		
823.8	-35.94	-20	-15.94
918.8	-35.38	-20	-15.38
1220.0	-39.2	-20	-19.2
1314.9	NF		
1461.0	NF		



COMPANY NAME: VERTEX STANDARD Co., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Channel 5 (160.10 MHz) – 5 Watt and 12.5 kHz Channel Bandwidth: Mask D

Frequency (MHz)	Level Measured (dBm)	Limit (dBm)	Margin (dB)
62.19	-32.19	-20	-12.19
109.1	-32.64	-20	-12.64
169.3	-32.52	-20	-12.52
224.7	-32.26	-20	-12.26
248.8	-32.5	-20	-12.5
262.4	-31.98	-20	-11.98
320.2	-32.67	-20	-12.67
425.6	-32.67	-20	-12.67
438.8	-32.87	-20	-12.87
480.3	-32.85	-20	-12.85
598.8	-30.9	-20	-10.9
640.4	-31.41	-20	-11.41
738.8	-31.64	-20	-11.64
792.5	-31.11	-20	-11.11
960.6	-31.66	-20	-11.66
1320.0	-33.08	-20	-13.08
1341.3	-33.58	-20	-13.58
1357.5	-33.53	-20	-13.53
1440.9	NF		
1601.0	NF		



COMPANY NAME: VERTEX STANDARD CO., LTD.
 EUT: VX_900V/600V
 WORK ORDER NUMBER: 2000480
 FCC ID: K66VX-900V

Channel 1 (173.9 MHz) – 5 Watt and 12.5 kHz Channel Bandwidth: Mask D

Frequency (MHz)	Level Measured (dBm)	Limit (dBm)	Margin (dB)
91.4	-36.99	-20	-16.99
159.8	-36.99	-20	-16.99
225.6	-37.01	-20	-17.01
241.1	-34.64	-20	-14.64
245.0	-37.29	-20	-17.29
252.7	-36.87	-20	-16.87
372.2	-36.64	-20	-16.64
387.2	-37.01	-20	-17.01
392.0	-35.84	-20	-15.84
430.4	-36.94	-20	-16.94
441.8	-36.85	-20	-16.85
480.2	-36.34	-20	-16.34
583.8	-35.89	-20	-15.89
795.0	-36.64	-20	-16.64
810.0	-36.03	-20	-16.03
832.5	-36.59	-20	-16.59
861.3	-36.45	-20	-16.45
870.0	-36.66	-20	-16.66
976.3	-36.08	-20	-16.08
1036.3	-39.02	-20	-19.02
1044.0	-39.09	-20	-19.09
1218.0	-39.13	-20	-19.13
1392.0	-39.3	-20	-19.30
1566.0	NF		
1739.9	NF		

8.2.2 TEST EQUIPMENT

Audio Generator:

Synthesized Level Generator HP3336B s/n 2127A00559
 Selective Level Meter HP3585 s/n B032374

Spectrum Analyzer:

HP8564E s/n 3943A01719
 HP8546A s/n 3525A00159



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

9 FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION

9.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.12

The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1000 Hz.

Refer to section "Radiated Measurement" in this report for further information.

9.2 TEST DATA

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

5Watt at 12.5 kHz channel spacing						
Radiated Emissions (Channel 5 at 160.1 MHz) Substitution Method						
Frequency (MHz)	Signal Generator Emission Level (dBm)	Cable Loss (dB)	Antenna Gain (corrected to 1/2 wave) (dBi)	Corrected Emission Level (dBm)	Limit (dBm)	Margin (dB)
320.200	-34.4	2.3	0.4	-32.5	-20.0	-12.54
480.300	-28.4	2.8	0.5	-26.1	-20.0	-6.14
640.400	-40.4	3.3	0.4	-37.5	-20.0	-17.54
800.500	-48.5	3.7	1.1	-45.9	-20.0	-25.94
960.600	-49.9	4.2	1.0	-46.7	-20.0	-26.74
1120.700	-75.5	5.1	-1.1	-69.3	-20.0	-49.34
1280.800	-67.8	6.1	-2.6	-59.1	-20.0	-39.14
1440.900	-101.2	6.7	-4.1	-90.4	-20.0	-70.44
1601.000	-88.1	6.8	-4.7	-76.6	-20.0	-56.64

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the $\frac{1}{2}$ wave dipole antenna.

9.3 TEST EQUIPMENT

Antenna: CHASE CBL6112 s/n 2099
Amplifier: HP8449B s/n 3008A00505
Spectrum analyzer: HP8564E s/n 3943A01719

RF Signal Generator HP8648C s/n 3537A01741
Synthesized Sweeper HP83752A s/n 3610A00846



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

10 FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH

OCCUPIED BANDWIDTH - COMPLIANCE WITH THE EMISSION MASKS

10.1 TEST PROCEDURE


ANSI/TIA/EIA-603-1992, section 2.2.11

Device with audio modulation: Transmitter is modulated with a 2500 Hz sine wave at an input level of 16 dB greater than that required to produce 50% of rated system deviation at 1000 Hz.

Device with digital modulation: N/A

10.2 TEST DATA


10.2.1 CHANNEL 2: 5W FOR 25 kHz CHANNEL BANDWIDTH: MASK B (AUDIO MODULATION: 2,500 Hz)

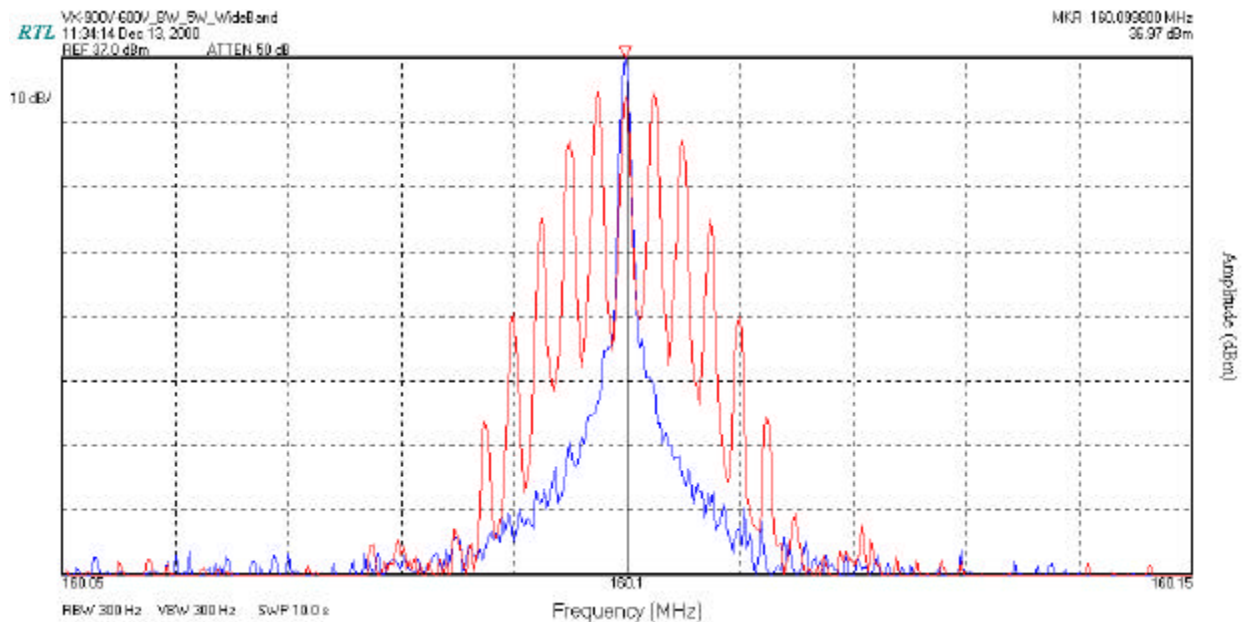



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V


10.2.2 CHANNEL 5: 5 W FOR 12.5 kHz CHANNEL BANDWIDTH: MASK D (AUDIO MODULATION: 2,500 Hz)

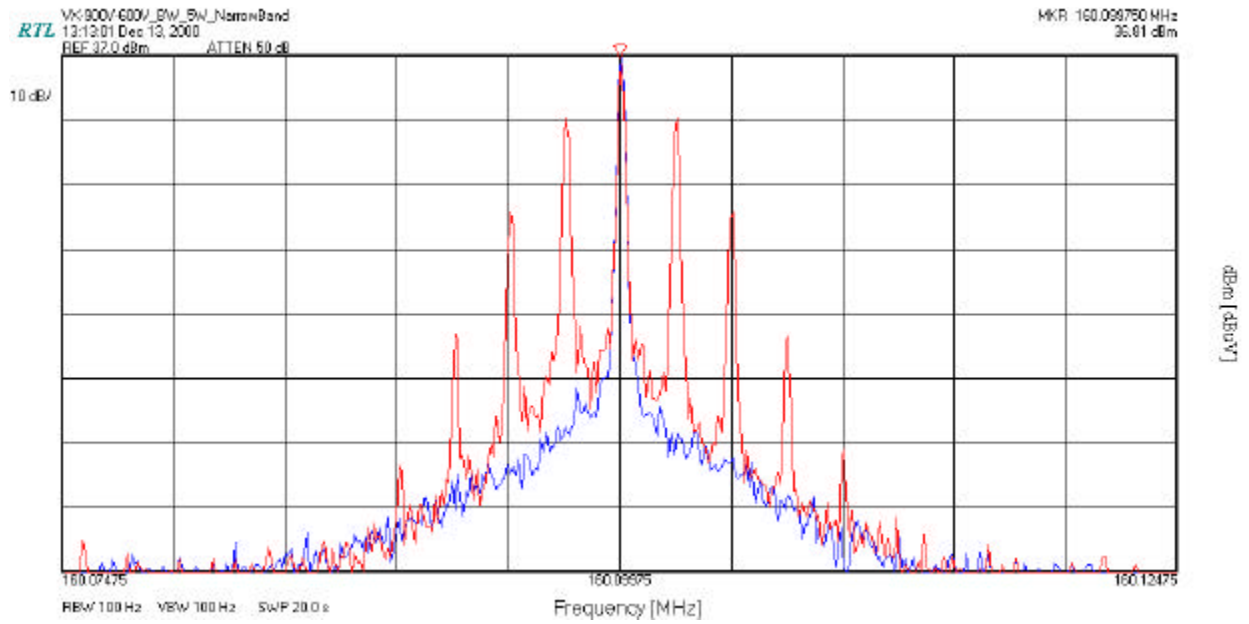



COMPANY NAME: VERTEX STANDARD Co., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V


10.2.3 CHANNEL 8: 2.5 W FOR 25 kHz CHANNEL BANDWIDTH: MASK B (AUDIO MODULATION: 2,500 Hz)

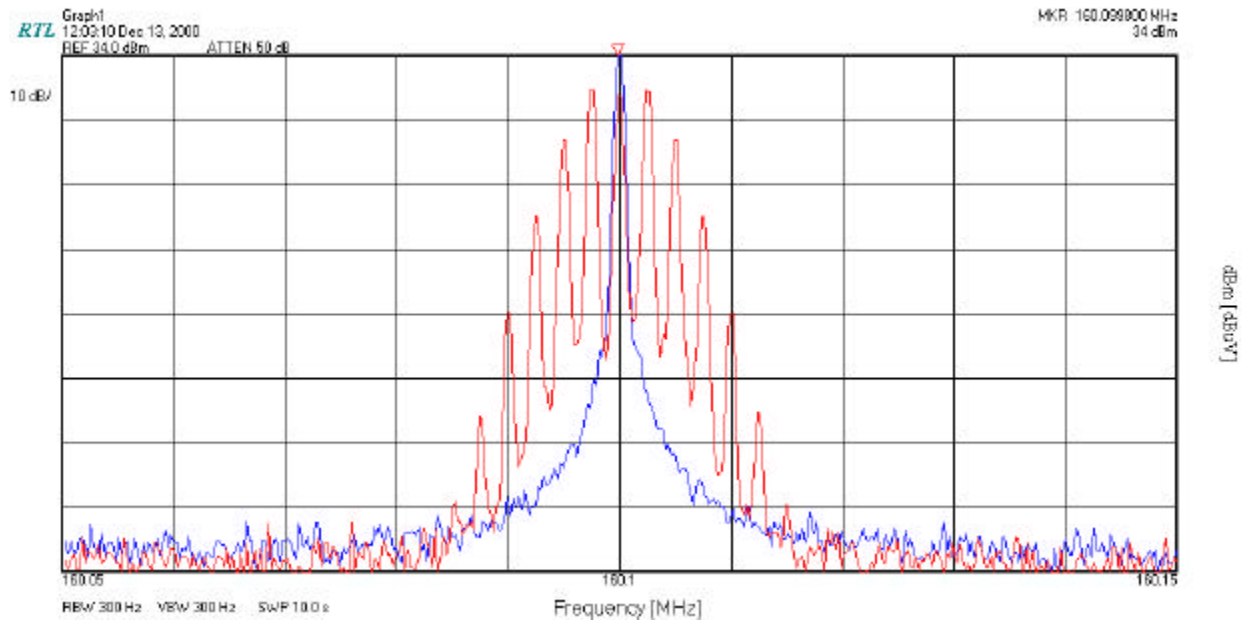



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

10.2.4 CHANNEL 11: 2.5 W FOR 12.5 kHz CHANNEL BANDWIDTH: MASK D (AUDIO MODULATION: 2,500 Hz)

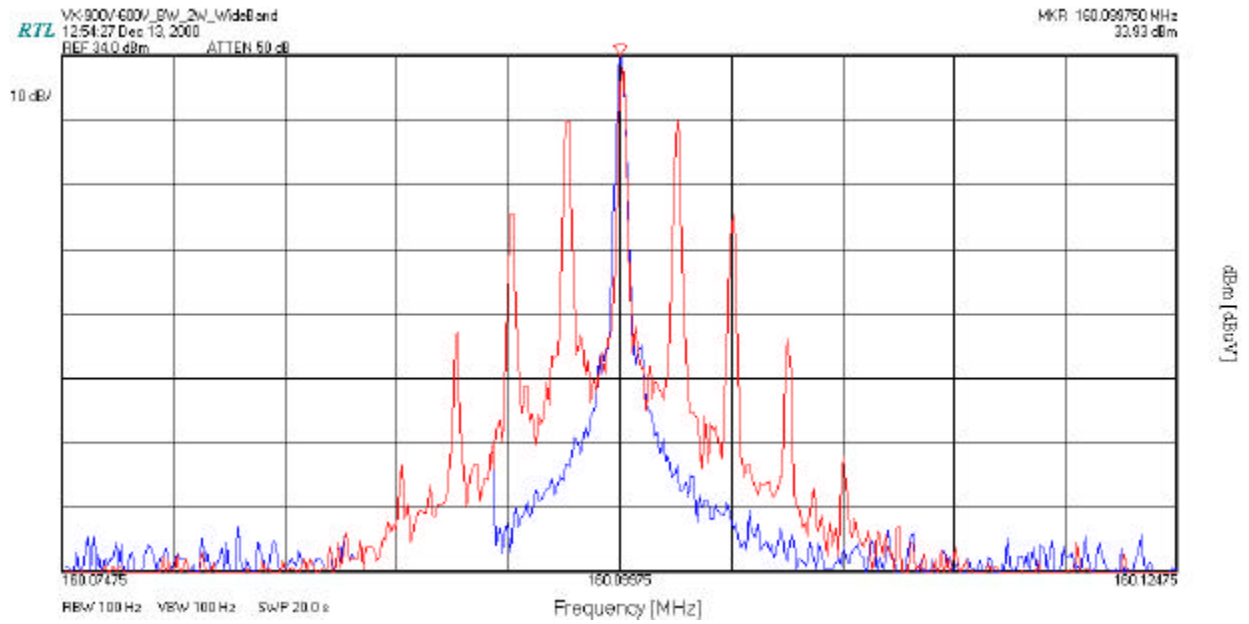

10.3 TEST EQUIPMENT

Spectrum Analyzer HP8564E s/n 3943A01719



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

11 FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY

11.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +50°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT.

The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ an hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter.

Additionally, the power supply voltage of the EUT was varied from 85% to 115% of the nominal voltage.

The worst-case test data are shown.


11.2 TEST DATA

11.2.1 FREQUENCY STABILITY/TEMPERATURE VARIATION

Limit is 2.5 ppm for device with a 12.5 kHz channel bandwidth

Limit is 5 ppm for device with a 25 kHz channel bandwidth

The VX-900V/600V 5Watt radios was tested with 25 kHz and 12.5 kHz channel bandwidth. The worst-case temperature deviation on the following plot is for the narrow band channel 2 high power.

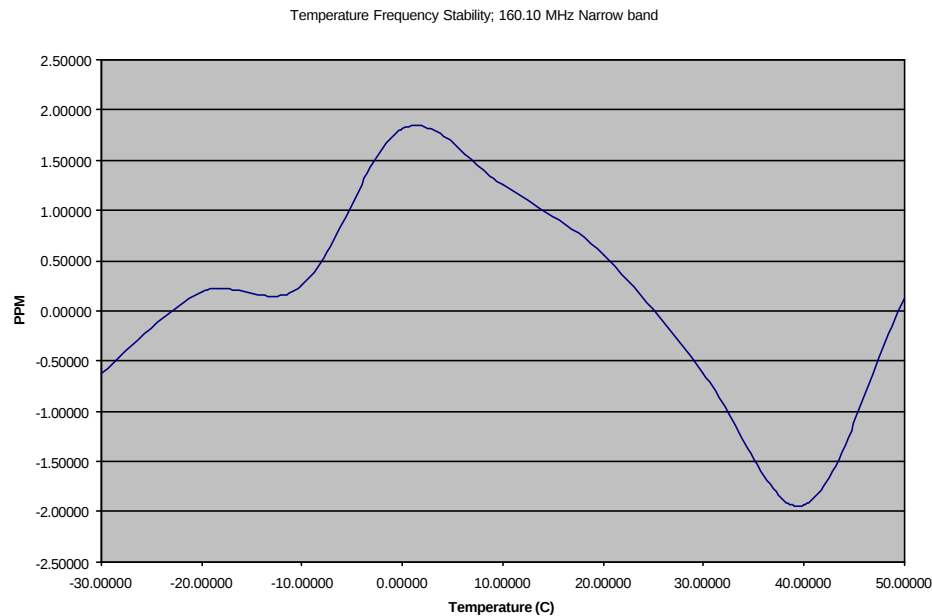



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Narrow Band Frequency Stability vs Temperature Channel 2 = 160.1 MHz

Temperature (C)	Frequency (MHz)	ppm
-30.00000	160.09990	-0.62461
-20.00000	160.10003	0.18738
-10.00000	160.10004	0.24984
0.00000	160.10029	1.81137
10.00000	160.10020	1.24922
20.00000	160.10009	0.56215
30.00000	160.09990	-0.62461
40.00000	160.09969	-1.93629
50.00000	160.10002	0.12492




COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

11.2.2 FREQUENCY STABILITY/VOLTAGE VARIATION

Assigned Frequency 160.1 MHz

Battery end point = 5.36V

Voltage Frequency Stability (160.10MHz Narrowband)

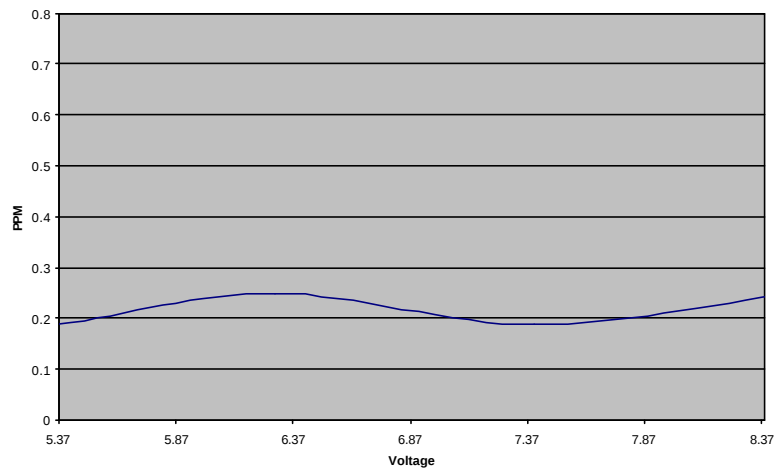

Voltage (7.4V +/- 85-115%)	Frequency (MHz)	ppm
5.36	160.10003	0.18738
6.29	160.10004	0.24984
7.4	160.10003	0.18738
8.51	160.10004	0.24984

Battery end point = 5.36V

11.3 7.3 TEST EQUIPMENT

Temperature Chamber Tenney TH65 s/n 11380

Frequency Counter HP8901A (Frequency Mode) s/n 2545A04102



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

12 FCC RULES AND REGULATIONS PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE

12.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz is set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref.

The audio signal generator was varied from 100Hz to 5kHz with the input level held constant.


The deviation in kHz was recorded using a modulation analyzer as DEVfreq.

The response in dB relative to 1 kHz was calculated as follows:

$$\text{Audio Frequency Response} = 20 \text{ LOG } (\text{DEVfreq}/\text{DEVref})$$

12.2 TEST DATA


12.2.1 CHANNEL 2 – 25 KHz AUDIO FREQUENCY RESPONSE

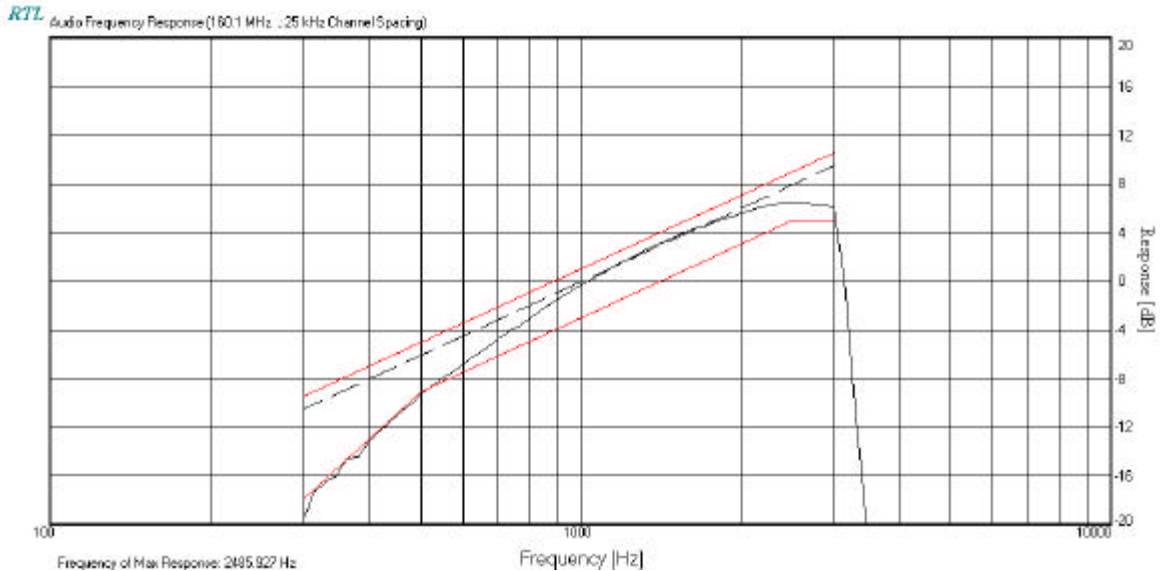



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

12.2.2 CHANNEL 5 – 12.5 kHz AUDIO FREQUENCY RESPONSE

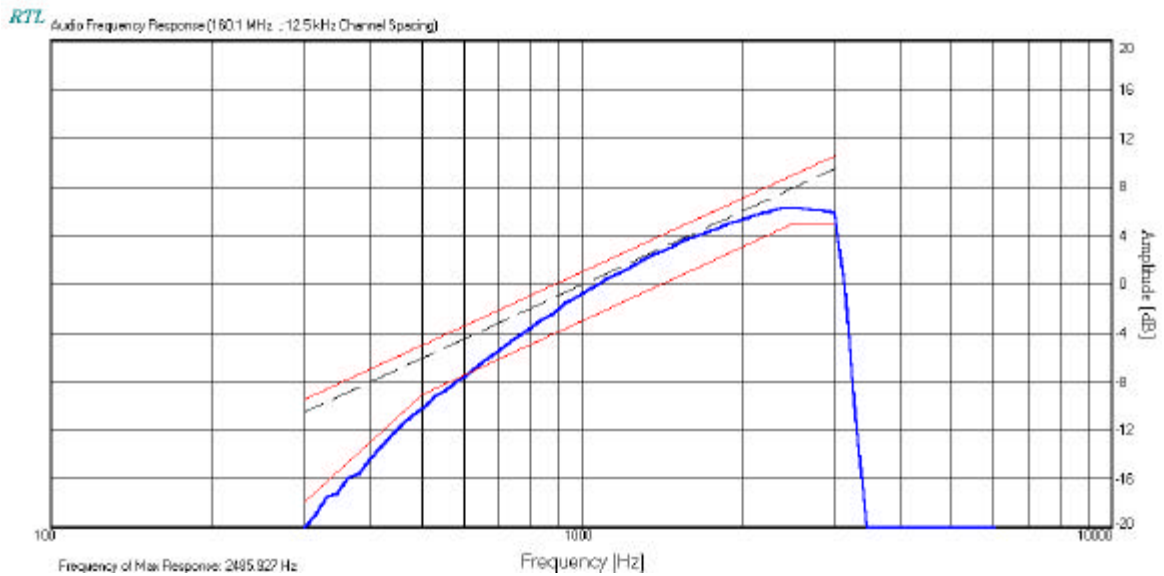

12.3 TEST EQUIPMENT

Audio generator	HP3336B	s/n 2127A00559
Modulation analyzer	HP8901A	s/n 2545A04102



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

13 FCC RULES AND REGULATIONS PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO LOW PASS FILTER RESPONSE


13.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

13.2 TEST DATA

13.2.1 CHANNEL 2 – 25 kHz AUDIO LOW PASS FILTER RESPONSE (WIDE BAND)

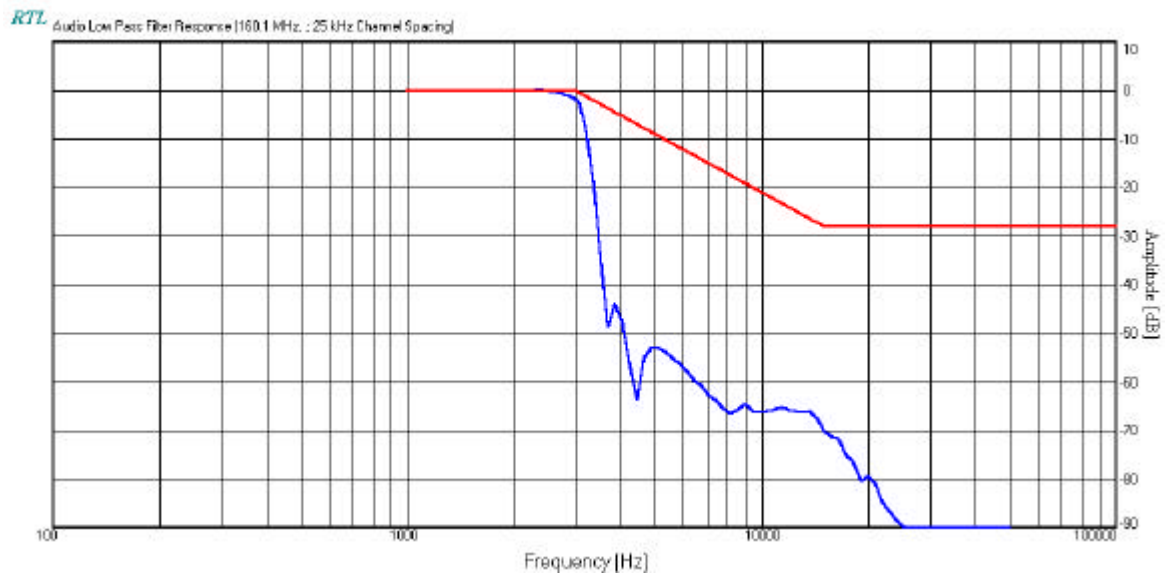




COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

13.2.2 CHANNEL 5 – 12.5 kHz AUDIO LOW PASS FILTER RESPONSE (NARROW BAND)

RTL Audio Low Pass Filter Response (160.1 MHz. ; 12.5 kHz Channel Spacing)

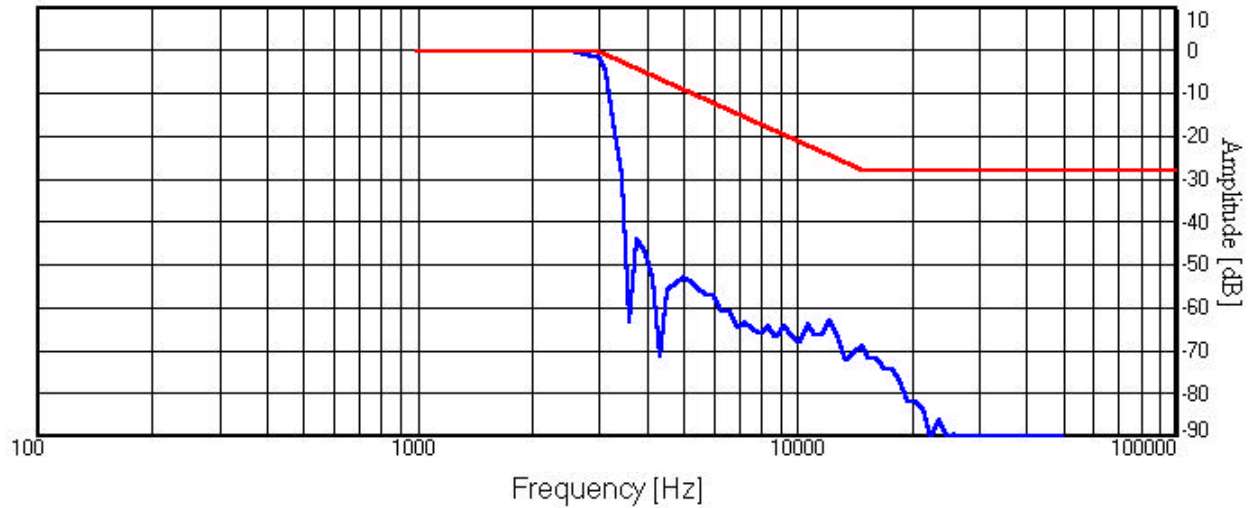

13.3 TEST EQUIPMENT

Audio generator	HP3336B	s/n 2127A00559
Modulation analyzer	HP8901A	s/n 2545A04102
Selective level meter	HP3586B	s/n 1928A01892
Synthesizer/Level generator	HP3336B	s/n 2514A02585



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

14 FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING


14.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.3

The transmitter is adjusted for full rated system deviation. The audio input level is adjusted for 60% of rated system deviation at 1000Hz. Using this level as a reference (0dB) the audio input level is varied from the reference to a level +20 dB above it and -20 dB under it, for modulation frequencies of 300Hz, 1,000Hz, and 2,500Hz. The system deviation obtained as a function of the input level is recorded. Both Positive and Negative Peak deviations were recorded.

14.2 TEST DATA


Channel 2 Wide Band Positive Peak

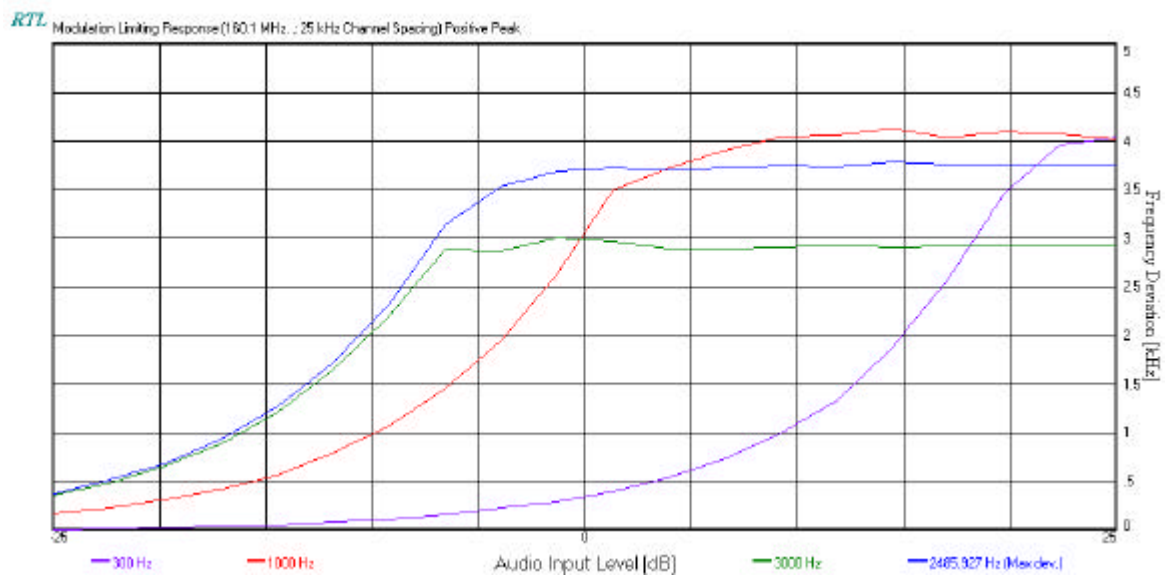



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V


Channel 2 Wide Band Negative Peak

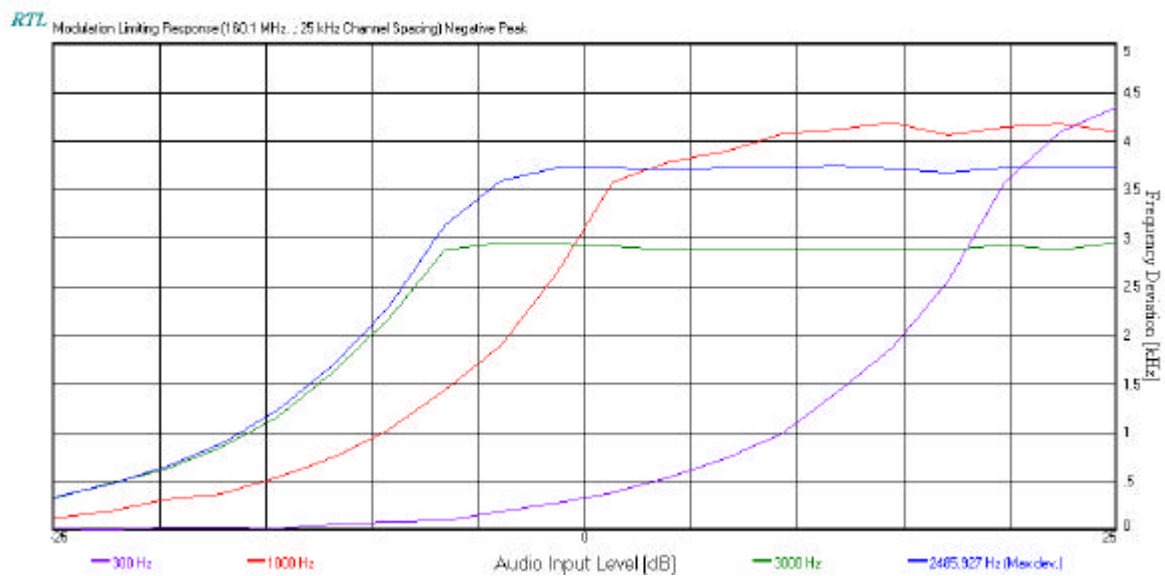



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V


Channel 2 Narrow Wide Band Positive Peak

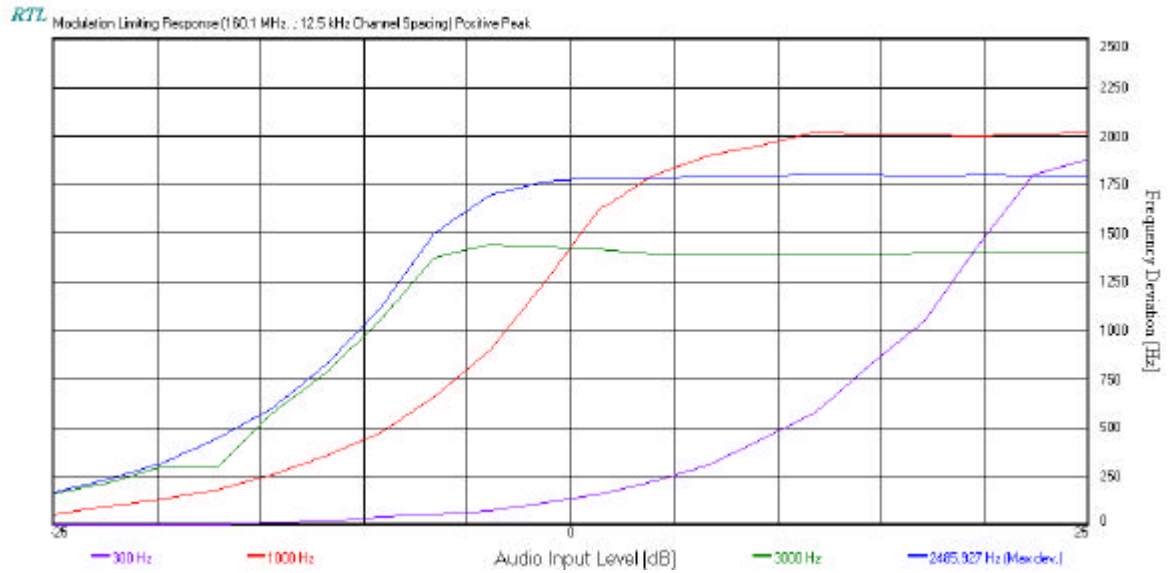



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Channel 2 Narrow Wide Band Negative Peak

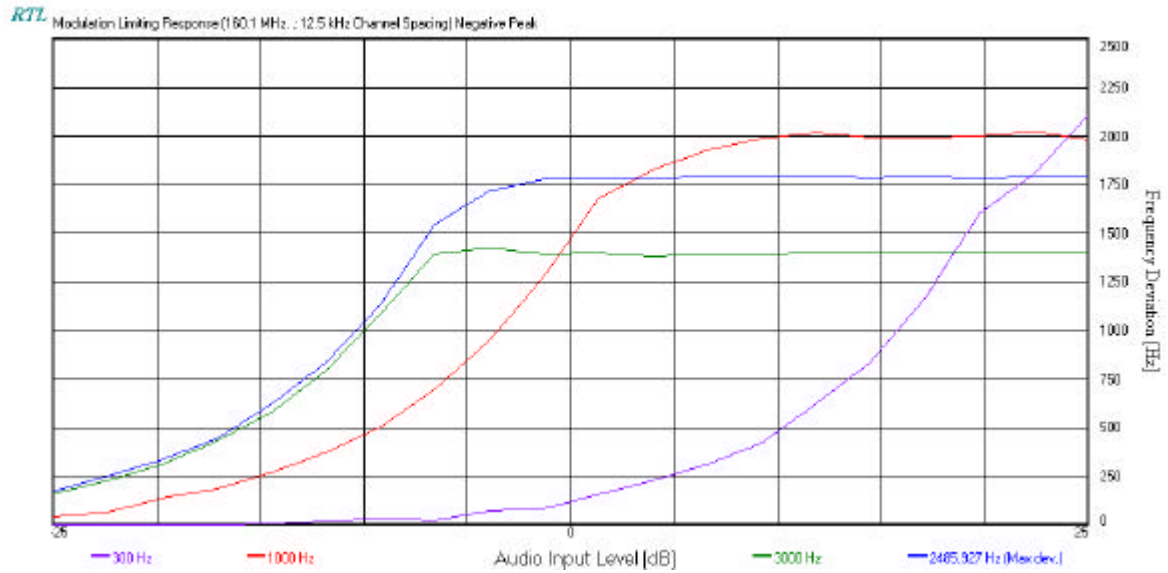

14.3 TEST EQUIPMENT

Audio generator	HP3336B	s/n 2127A00559
Modulation analyzer	HP8901A	s/n 2545A04102
Selective level meter	HP3586B	s/n 1928A01892
Synthesizer/Level generator	HP3336B	s/n 2514A02585



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V


15 FCC RULES AND REGULATIONS PART 90 §90.214 : TRANSIENT FREQUENCY BEHAVIOR

15.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.19

15.2 TEST DATA WIDE BAND


Channel 4 Narrow Band On High Power

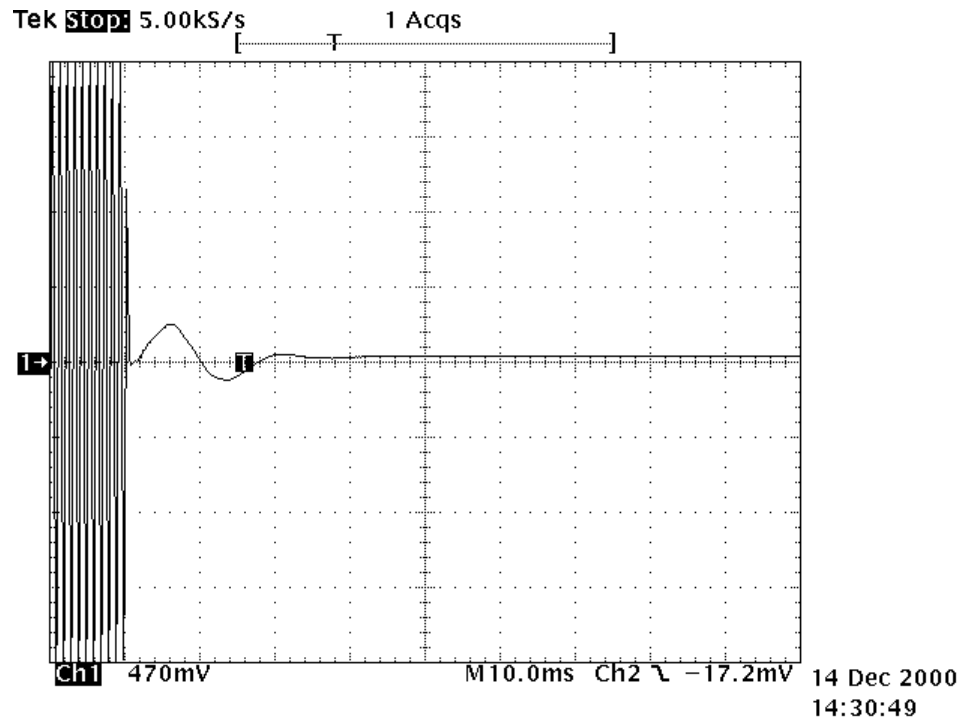



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V


Channel 4 Narrow Band Off High Power

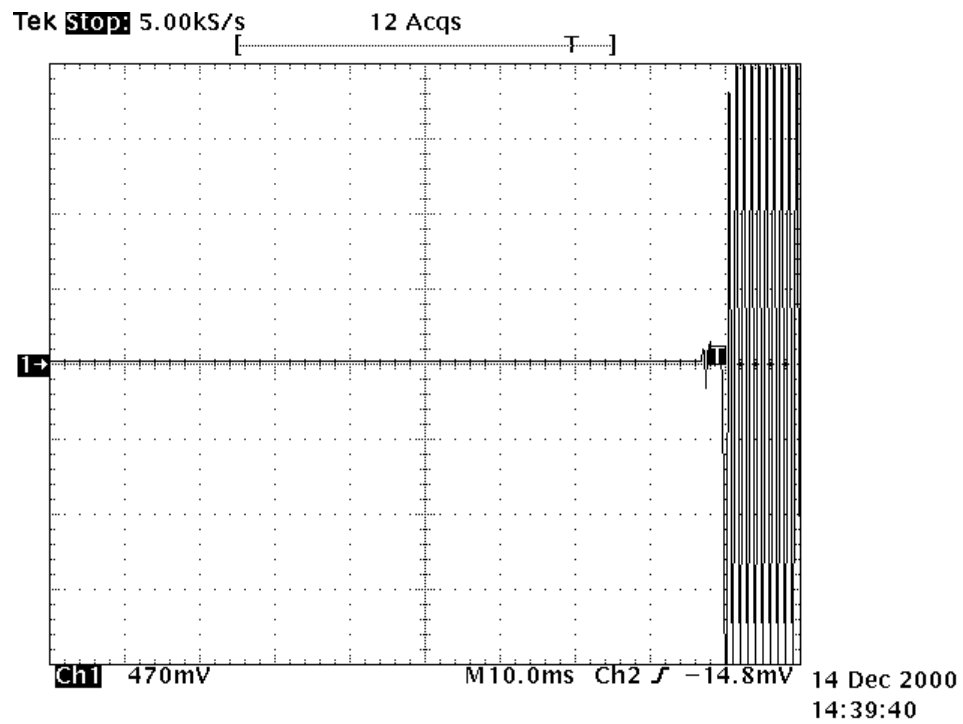




COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Channel 5 Narrow Band On High Power

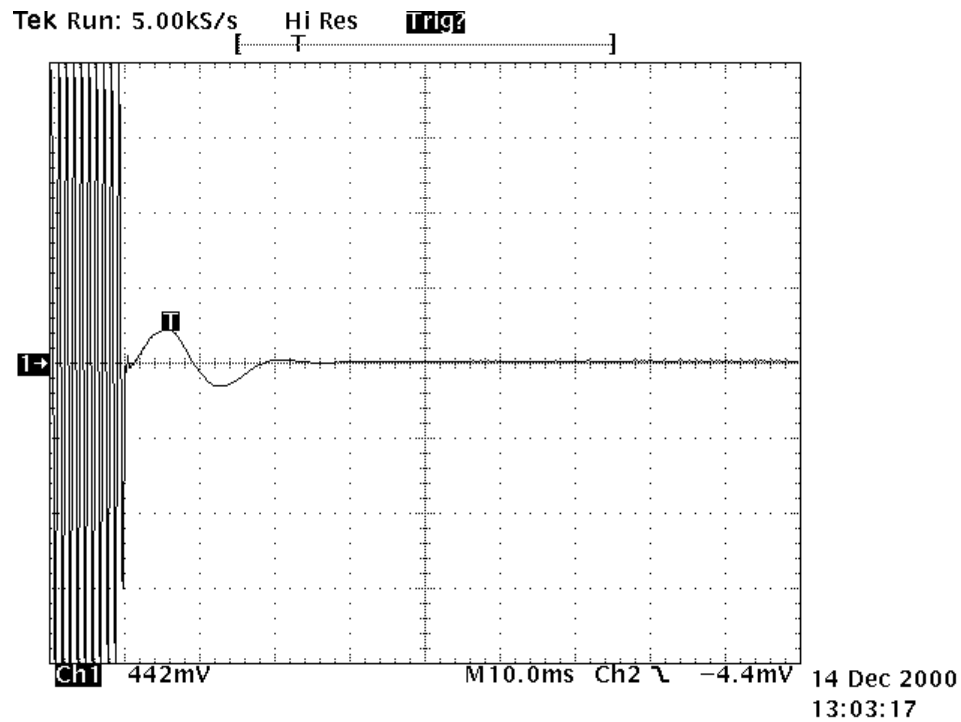


Channel 5 Narrow Band Off High Power

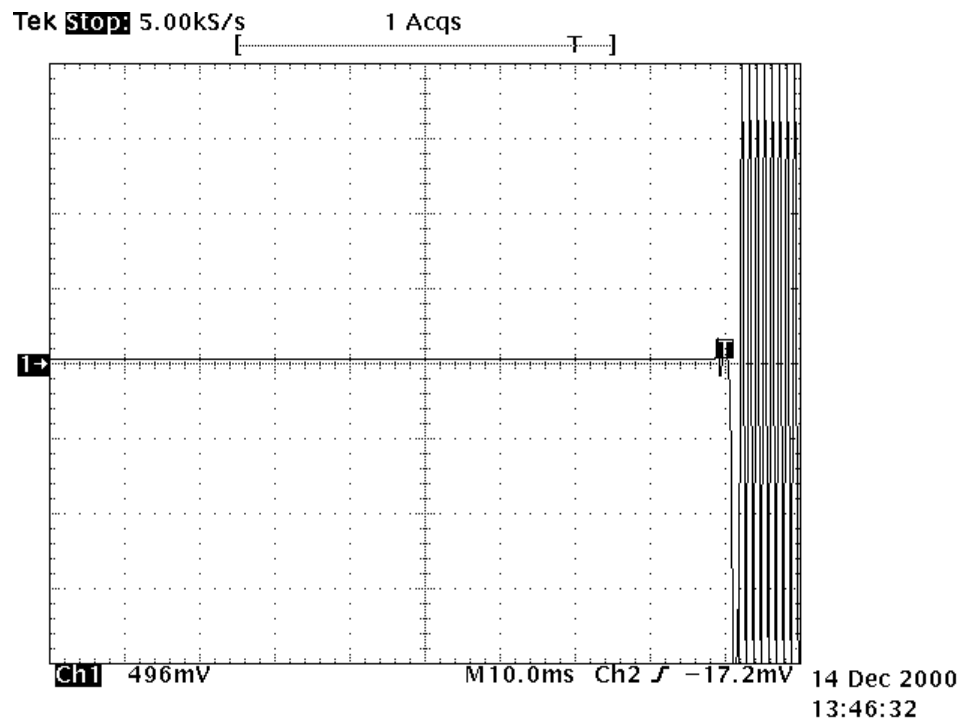




COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Channel 6 Narrow Band On High Power

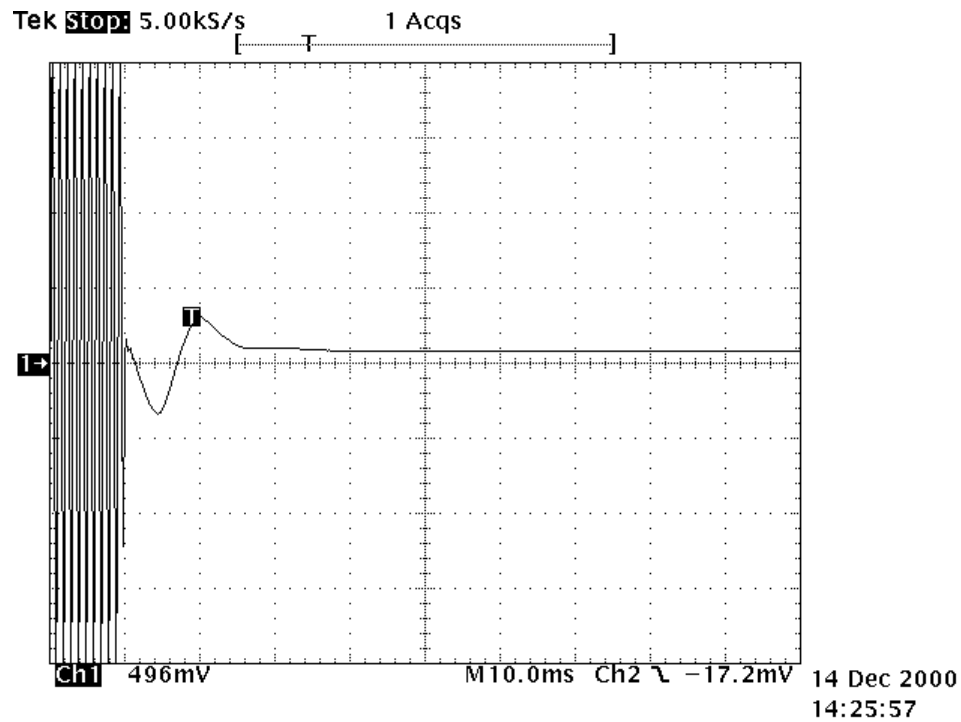


Channel 6 Narrow Band Off High Power

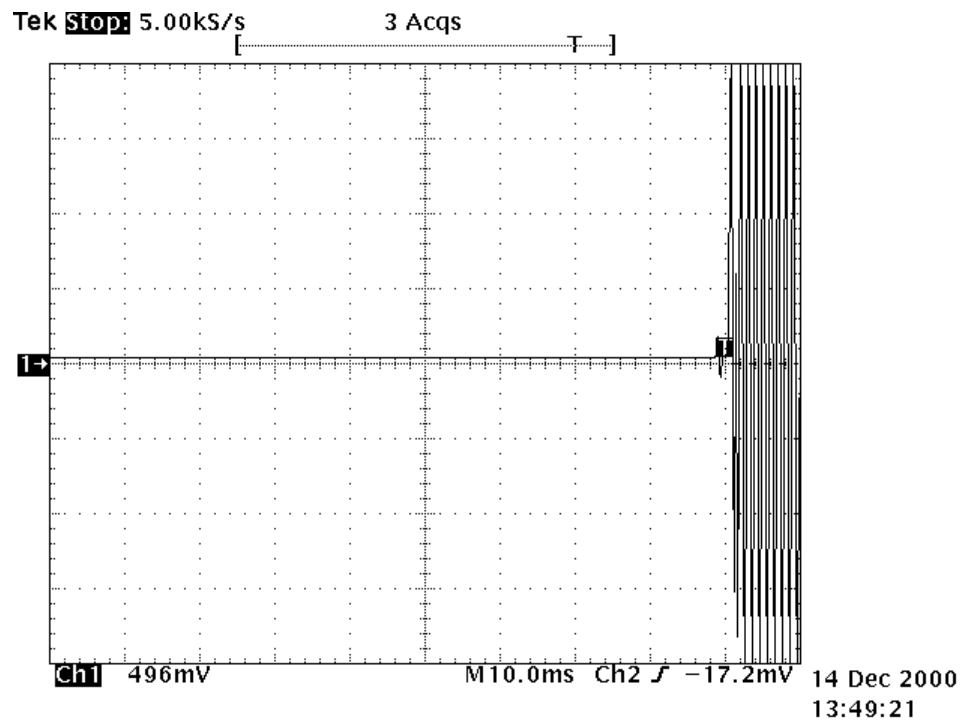




COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Channel 2 Wide Band On High Power

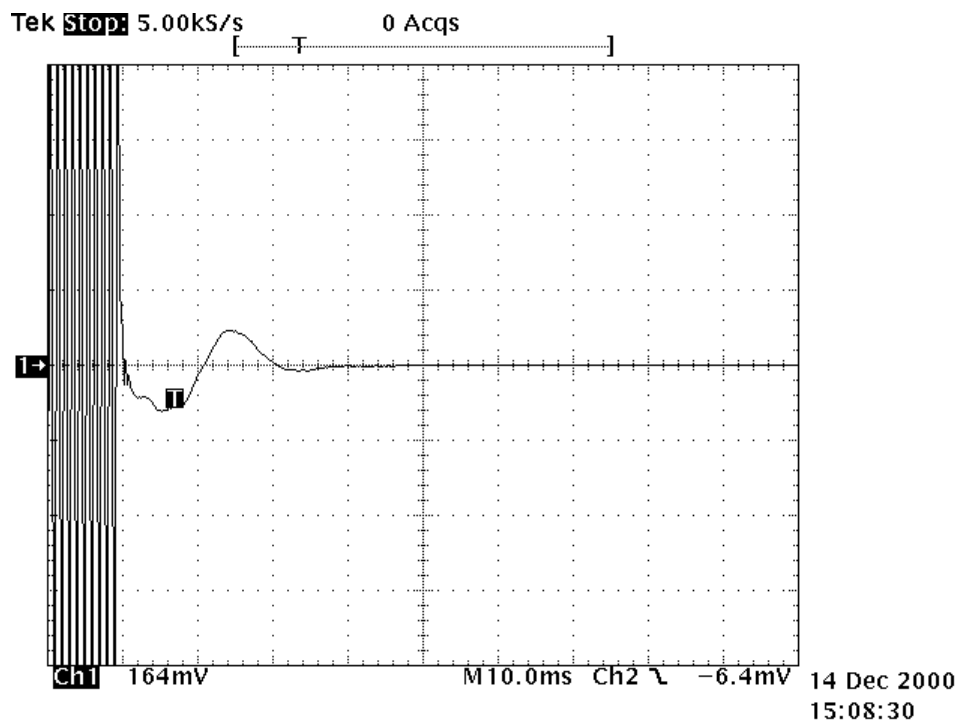

Channel 2 Wide Band Off High Power

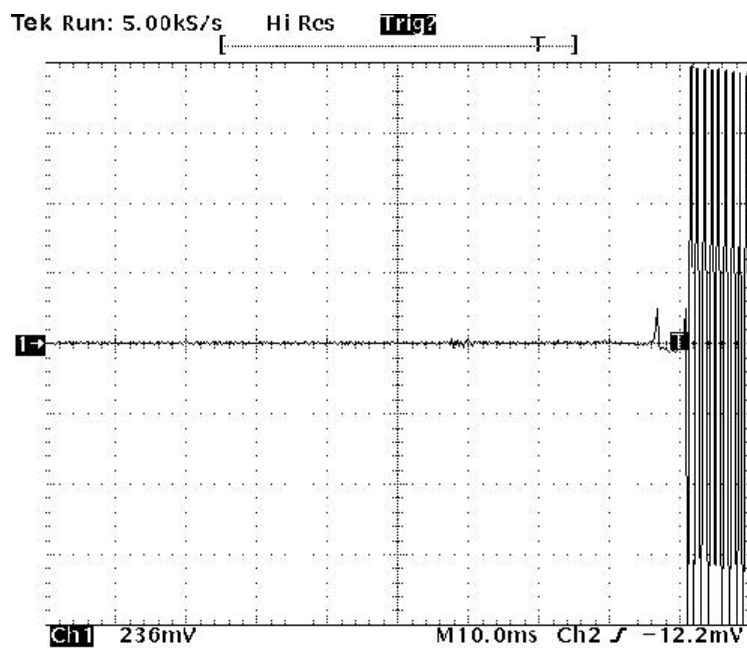



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

Limits:

Requirements for EUT with 25 kHz channel spacing:

Time Intervals (*)(**)	Maximum Frequency Difference(***)	150-174 MHz	421-512 MHz
t1(****)	± 25 kHz	5.0 mSec	10.0 mSec
t2	± 12.5 kHz	20.0 mSec	25.0 mSec
t3(****)	± 25 kHz	5.0 mSec	10.0 mSec

Requirements for EUT with 12.5 kHz channel spacing:

Time Intervals (*)(**)	Maximum Frequency Difference(***)	150-174 MHz	421-512 MHz
t1(****)	± 12.5 kHz	5.0 mSec	10.0 mSec
t2	± 6.25 kHz	20.0 mSec	25.0 mSec
t3(****)	± 12.5 kHz	5.0 mSec	10.0 mSec

(*) t on is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t 1 is the time period immediately following ton.

t2 is the time period immediately following t1.

t3 is the time period from the instant when the transmitter is turned off until toff.

toff is the instant when the 1 kHz test signal starts to rise.

(**) During the time from the end of t2 to the beginning of t3, the frequency difference must not exceed the limits specified in § 90.213.

(***) Difference between the actual transmitter frequency and the assigned transmitter frequency.

(****) If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

Maximum frequency difference between time T2 and T3: Calculation for Channel 6:

The frequency stability is required to be 2.5ppm.

Calculation for Channel 6:

4 div. on scope represent 12.5kHz for narrow band channel.

Therefore, 487.975M times 2.5 ppm times +/- 4 Divisions divided by 12.5kHz equals about +/- 0.4 division. 0.4 Div. correspond to 1.219 kHz

15.3 TEST EQUIPMENT

Detector: HP8471D s/n 2952A
RF signal generator: HP8648C s/n 3537A01741
Modulation Analyzer: HP8901A s/n 2545A04102
Oscilloscope: Tektronix TDS540B s/n B020129
Receiver: HP 8546A s/n 3525A00159



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

16 FCC RULES AND REGULATIONS PART 2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH

Type of Emission: F3E

Necessary Bandwidth and Emission Bandwidth:

12.5kHz (NB channel) : $B_n = 11K0F3E$

25kHz (WB channel): $B_n = 16K0F3E$

Calculation:

Max modulation(M) in kHz : 3

Max deviation (D) in kHz: 2.5 (NB) and 5 (BB)

Constant factor (K) : 1

$B_n = 2xM + 2xDK$



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

17 RECEIVER DATA

Radiated Test Data - OATS 1

Test Date: December 01, 2000 - 4:28:14 PM

Work Order: 1

Customer Reference: 1

Model: 900U

Mode: 900U


Name: DB

Limit/Distance: FCC B/3M

Notes: IF 423.275

Temperature: 1°F Humidity: 1%									
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
160.600	Qp	H	0	1.0	11.5	-17.5	-6.0	43.5	-49.5
233.600	Qp	H	0	1.0	14.5	-16.2	-1.7	46.0	-47.7
306.600	Qp	H	0	1.0	13.7	-13.1	0.6	46.0	-45.4
379.600	Qp	H	0	1.0	9.6	-10.6	-1.0	46.0	-47.0
423.275	Qp	H	30	1.0	42.2	-8.6	33.6	46.0	-12.4
423.275	Qp	V	30	1.0	36.7	-8.9	27.8	46.0	-18.2
846.550	Qp	H	30	1.8	42.9	-3.0	39.9	46.0	-6.1
846.550	Qp	V	90	1.0	41.6	-3.6	38.0	46.0	-8.0

TEST PERSONNEL:

Signature: 

Date: November 29, 2000

Typed/Printed Name: Daniel Baltzell



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

18 PART 2.1046 (A) RF POWER OUTPUT: RADIATED - ERP

18.1 TEST PROCEDURE

Substitution Method:

The EUT was setup at an antenna to EUT distance of 3 meters on an open area test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane.

The physical arrangement of the EUT and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations.

The worst-case, maximum radiated emission was recorded and used as reference for the ERP measurement.

The EUT was then replaced by an $\frac{1}{2}$ wave dipole antenna and polarized in accordance with the EUT's antenna polarization. The $\frac{1}{2}$ wave dipole antenna was connected to a RF signal generator with a coaxial cable.

The search antenna height, and search antenna polarity was set to levels that produced the maximum reading obtained in step 3. The signal generator was adjusted to a level that produced the radiated emission level obtained in step 3.

The signal generator level was recorded and corrected by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal $\frac{1}{2}$ wave dipole antenna. The signal generator corrected level is the ERP level

Calculation Method:

$$P_{Watt} = \frac{E_{v/m}^2 \times d_m^2}{30 \times 1.64}$$

18.2 TEST DATA

Settings:

- High Power: 5 Watt delivered to antenna
- 5W VX-900V/600V radiated power measurements (3 meter)

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Corrected Antenna Gain (dBi)	Corrected level (dBm)	(Watt)
146.1	37.7	1.7	-0.54	36.5	4.5
160.1	39.5	1.4	1.26	36.8	4.8
173.9	40.4	1.5	2.16	36.7	4.7

*Antenna as specified by manufacturer

**Measurement accuracy is +/- 1.5 dB

18.3 TEST EQUIPMENT

Spectrum Analyzer HP8566B
Antenna Roberts $\frac{1}{2}$ wave dipoles



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

19 TEST CONFIGURATION PHOTOGRAPHS

Radiated Back View

Radiated Front View



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

20 BLOCK DIAGRAM



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

21 LABEL INFORMATION

Please see the following page



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

22 PRODUCT DESCRIPTION

Please see the following page



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

23 SCHEMATICS

Please see the following page.



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

24 INTERNAL PHOTOGRAPHS



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

25 EXTERNAL PHOTOGRAPHS



COMPANY NAME: VERTEX STANDARD CO., LTD.
EUT: VX_900V/600V
WORK ORDER NUMBER: 2000480
FCC ID: K66VX-900V

26 OPERATOR'S MANUAL

Please see the following page