

Appendix A. Measured Test Result

Test Result are shown below.

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P01_Front Face_with iphone 11_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -830.00 μm, y: 2.25 mm, z: 67.31 mm

Dimensions:
x: 257.0 mm, y: 257.0 mm, z: 36.2 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/13

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 9.24 A/m
x: 2.00 A/m, y: 2.08 A/m, z: 8.78 A/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 28.85 V/m
x: 1.07 V/m, y: 959.57 mV/m, z: 28.82 V/m

Maximum E-field location relative to DUT:
x: 14.67 mm, y: 7.33 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
42.76 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

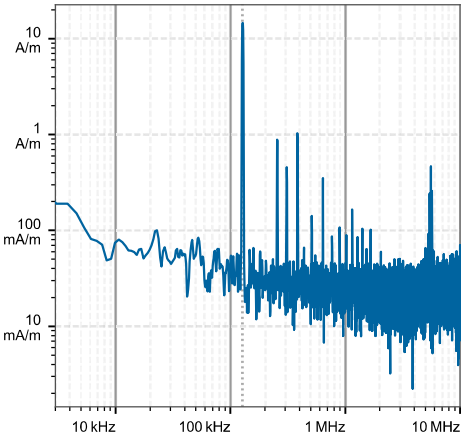

H-field magnitude [RMS] at lowest plane

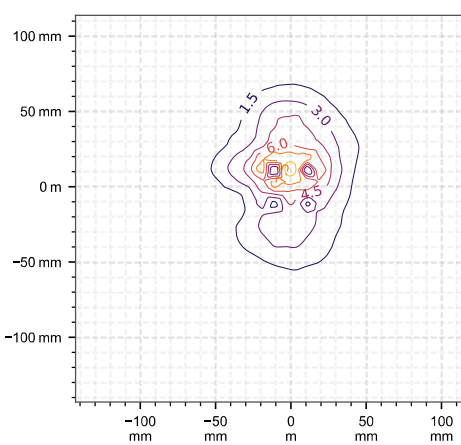

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 127.72 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	20.0	28.9	0.109	0.113	0.112	0.0651	3.93e-3	2.19e-3	53.5	82%	43%	14%

Compliance evaluation (Field values at the peak frequency) (f=127.72 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	20.0	28.9	0.611	2.19e-3	20.0	28.9	0.0659	2.19e-3	20.0	28.9	0.343	2.19e-3	20.0	28.9	N/A	3.93e-3	20.0	28.9	0.894	3.93e-3

Coverage factors: $w_{E_{ind, cube avg.}} = [5.60]$, $w_{E_{ind, local}} = [7.91]$, $w_{E_{ind, line avg.}} = [3.04]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR
0.00	0.95	0.52	0.35	0.01	0.04	<0.01	4.01	0.33	0.26	<0.01	10.12	0.07	0.05	0.02	0.01	<0.01	12.3	0.05	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.60]$, $w_{E_{ind, local}} = [7.91]$, $w_{E_{ind, line avg.}} = [3.04]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P02_Raer Face_with iphone 11_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -1.29 mm, y: 2.19 mm, z: 68.02 mm

Dimensions:
x: 256.0 mm, y: 257.0 mm, z: 36.5 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/13

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 2.88 A/m
x: 1.27 A/m, y: 287.12 mA/m, z: 2.57 A/m

Maximum H-field location relative to DUT:
x: 33.00 mm, y: 3.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 50.30 V/m
x: 2.10 V/m, y: 376.41 mV/m, z: 50.26 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 14.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
30.24 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

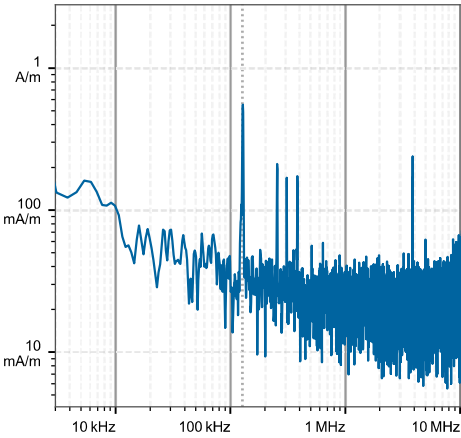

H-field magnitude [RMS] at lowest plane

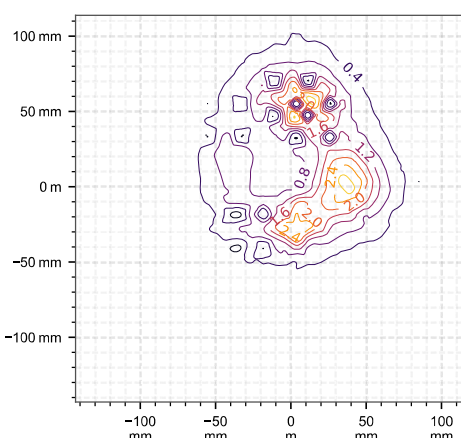

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 127.99 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	6.37	50.3	0.0356	0.0364	0.0364	0.0234	5.4e-4	2.82e-4	64.3	48%	41%	44%

Compliance evaluation (Field values at the peak frequency) (f=127.99 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	6.37	50.3	0.207	2.84e-4	6.37	50.3	0.0247	2.84e-4	6.37	50.3	0.115	2.84e-4	6.37	50.3	N/A	5.42e-4	6.37	50.3	0.298	5.42e-4

Coverage factors: $w_{E_{ind, cube avg.}} = [5.76]$, $w_{E_{ind, local}} = [8.14]$, $w_{E_{ind, line avg.}} = [3.11]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR
0.00	0.30	0.17	0.61	0.02	0.01	<0.01	1.27	0.58	0.10	<0.01	0.04	0.02	0.08	0.04	<0.01	<0.01	13.91	0.08	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.76]$, $w_{E_{ind, local}} = [8.14]$, $w_{E_{ind, line avg.}} = [3.11]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P03_Left Side_with iphone 11_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -190.00 μm, y: 840.00 μm, z: 125.02 mm

Dimensions:
x: 256.0 mm, y: 257.0 mm, z: 36.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/13

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 1.15 A/m
x: 473.26 mA/m, y: 270.35 mA/m, z: 1.02 A/m

Maximum H-field location relative to DUT:
x: 3.67 mm, y: 11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 10.93 V/m
x: 1.05 V/m, y: 358.94 mV/m, z: 10.87 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: -36.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
53.39 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

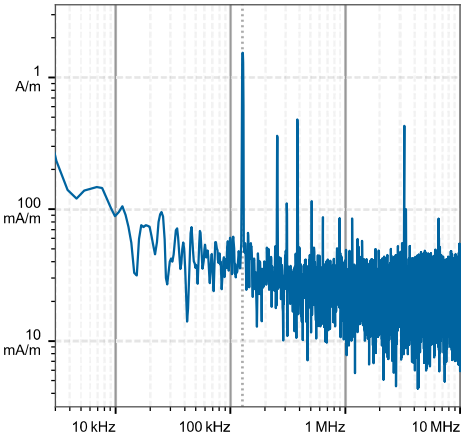

H-field magnitude [RMS] at lowest plane

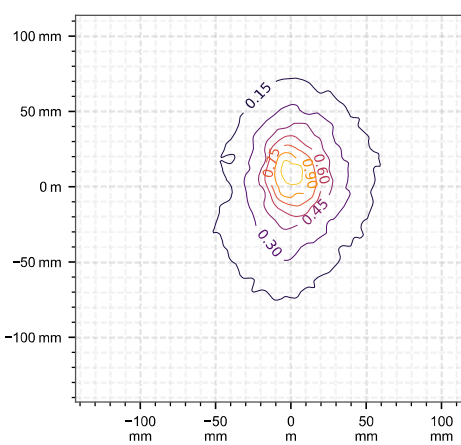

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 127.77 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	2.43	10.9	0.0146	0.015	0.0149	9.67e-3	9.89e-5	5.91e-5	52.0	70%	29%	32%

Compliance evaluation (Field values at the peak frequency) (f=127.77 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	2.43	10.9	0.0821	5.92e-5	2.43	10.9	9.97e-3	5.92e-5	2.43	10.9	0.0456	5.92e-5	2.43	10.9	N/A	9.90e-5	2.43	10.9	0.118	9.90e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [5.58]$, $w_{E_{ind, local}} = [7.88]$, $w_{E_{ind, line avg.}} = [3.03]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR
0.00	0.12	0.06	0.13	<0.01	<0.01	<0.01	0.49	0.13	0.04	<0.01	0.01	<0.01	0.02	<0.01	<0.01	<0.01	1.49	0.02	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.58]$, $w_{E_{ind, local}} = [7.88]$, $w_{E_{ind, line avg.}} = [3.03]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P04_Right Side_with iphone 11_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -3.65 mm, y: 4.09 mm, z: 125.98 mm

Dimensions:
x: 257.0 mm, y: 257.0 mm, z: 37.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/13

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 1.07 A/m
x: 431.49 mA/m, y: 225.44 mA/m, z: 957.82 mA/m

Maximum H-field location relative to DUT:
x: 3.67 mm, y: -18.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 26.84 V/m
x: 667.40 mV/m, y: 1.01 V/m, z: 26.81 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 44.00 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
7.33 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

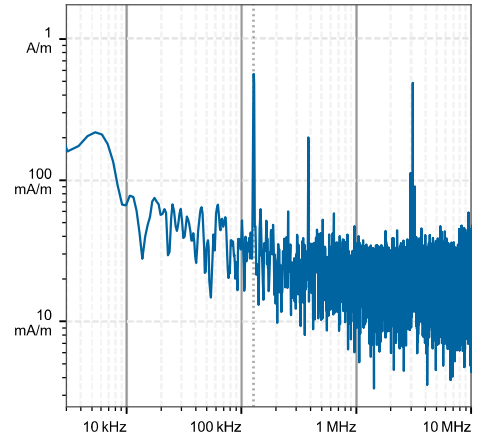

H-field magnitude [RMS] at lowest plane

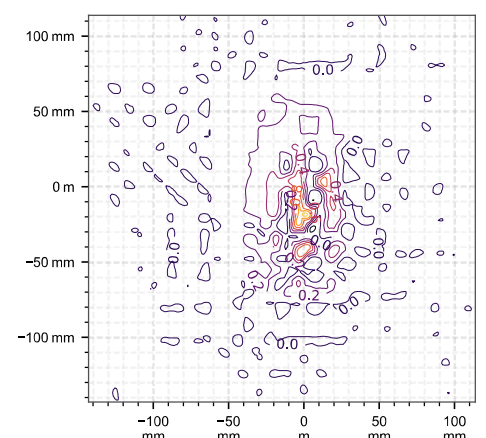

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 131.31 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	1.52	26.8	8.72e-3	9.03e-3	9.06e-3	5.35e-3	2.87e-5	1.61e-5	57.1	44%	166%	41%

Compliance evaluation (Field values at the peak frequency) (f=131.31 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	1.52	26.8	0.0503	1.68e-5	1.52	26.8	6.09e-3	1.68e-5	1.52	26.8	0.0288	1.68e-5	1.52	26.8	N/A	2.94e-5	1.52	26.8	0.0732	2.94e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [5.66]$, $w_{E_{ind, local}} = [7.99]$, $w_{E_{ind, line avg.}} = [3.07]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR
0.00	0.07	0.04	0.32	<0.01	<0.01	<0.01	0.30	0.31	0.02	<0.01	<0.01	<0.01	0.04	0.02	<0.01	<0.01	0.93	0.04	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.66]$, $w_{E_{ind, local}} = [7.99]$, $w_{E_{ind, line avg.}} = [3.07]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P05_Top Side_with iphone 11_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -51.37 mm, y: 48.27 mm, z: 199.41 mm

Dimensions:
x: 256.3 mm, y: 256.7 mm, z: 37.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/13

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 272.38 mA/m
x: 39.45 mA/m, y: 20.50 mA/m, z: 268.72 mA/m

Maximum H-field location relative to DUT:
x: -11.00 mm, y: 3.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 24.29 V/m
x: 490.28 mV/m, y: 313.50 mV/m, z: 24.29 V/m

Maximum E-field location relative to DUT:
x: 0.00 m, y: 7.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
16.40 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

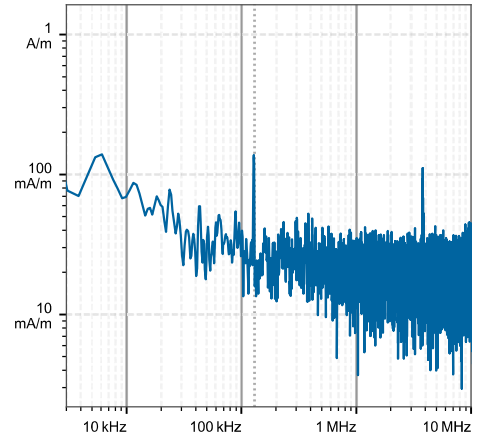

H-field magnitude [RMS] at lowest plane

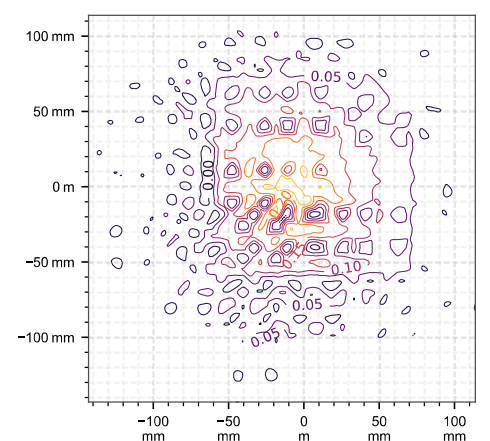

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 126.18 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	0.453	24.3	4.34e-3	4.44e-3	4.43e-3	2.94e-3	1.01e-5	7.1e-6	90.5	49%	86%	65%

Compliance evaluation (Field values at the peak frequency) (f=126.18 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	0.453	24.3	0.0276	7.65e-6	0.453	24.3	3.58e-3	7.65e-6	0.453	24.3	0.0154	7.65e-6	0.453	24.3	N/A	1.06e-5	0.453	24.3	0.0395	1.06e-5

Coverage factors: w_{E_{ind}, cube avg.} = [6.16], w_{E_{ind}, local} = [8.70], w_{E_{ind}, line avg.} = [3.28]

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR
0.00	0.02	0.01	0.29	<0.01	<0.01	<0.01	0.09	0.28	0.01	<0.01	<0.01	<0.01	0.04	0.02	<0.01	<0.01	0.10	0.28	0.04	N/A

Coverage factors: w_{E_{ind}, cube avg.} = [6.16], w_{E_{ind}, local} = [8.70], w_{E_{ind}, line avg.} = [3.28]

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P06_Bottom Side_with iphone 11_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -21.71 mm, y: 20.85 mm, z: 150.85 mm

Dimensions:
x: 257.0 mm, y: 257.0 mm, z: 37.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/13

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 906.33 mA/m
x: 61.20 mA/m, y: 26.80 mA/m, z: 903.87 mA/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 11.61 V/m
x: 1.53 V/m, y: 365.55 mV/m, z: 11.51 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 0.00 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
7.33 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

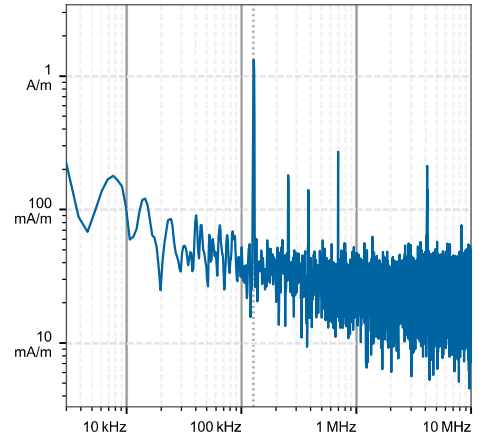

H-field magnitude [RMS] at lowest plane

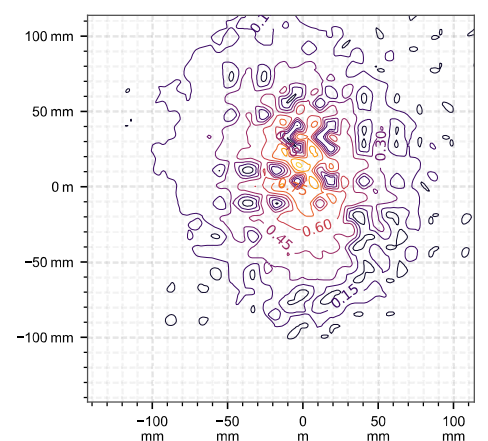

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 128.87 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	1.48	11.6	0.0131	0.0134	0.0134	8.68e-3	8.62e-5	7.27e-5	92.0	41%	124%	87%

Compliance evaluation (Field values at the peak frequency) (f=128.87 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	1.48	11.6	0.0815	7.28e-5	1.48	11.6	9.e-3	7.28e-5	1.48	11.6	0.0444	7.28e-5	1.48	11.6	N/A	8.63e-5	1.48	11.6	0.118	8.63e-5

Coverage factors: $w_{E_{ind}, cube avg.} = [6.18]$, $w_{E_{ind}, local} = [8.73]$, $w_{E_{ind}, line avg.} = [3.29]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR	RL	BR
0.00	0.07	0.04	0.14	<0.01	<0.01	<0.01	0.30	0.13	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	<0.01	0.91	0.02	N/A	<0.01

Coverage factors: $w_{E_{ind}, cube avg.} = [6.18]$, $w_{E_{ind}, local} = [8.73]$, $w_{E_{ind}, line avg.} = [3.29]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P07_Front Face_with iphone 16 pro_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -6.40 mm, y: 7.40 mm, z: 68.88 mm

Dimensions:
x: 256.0 mm, y: 257.0 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/14

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 202.72 mA/m
x: 28.61 mA/m, y: 30.03 mA/m, z: 198.44 mA/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 84.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 54.56 V/m
x: 1.13 V/m, y: 2.86 V/m, z: 54.48 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 58.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
52.88 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

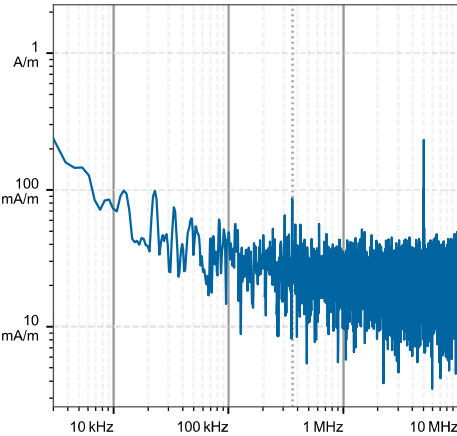

H-field magnitude [RMS] at lowest plane

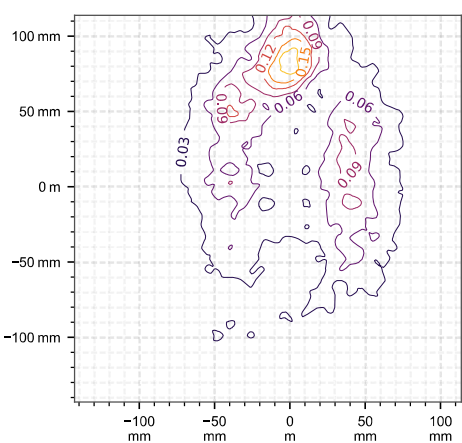

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 359.98 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	0.395	54.6	8.40e-3	8.57e-3	8.51e-3	5.82e-3	3.83e-5	2.31e-5	80.3	97%	110%	100%

Compliance evaluation (Field values at the peak frequency) (f=359.98 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	0.395	54.6	0.056	4.59e-5	0.395	54.6	9.96e-3	4.59e-5	0.395	54.6	0.0329	4.59e-5	0.395	54.6	N/A	6.11e-5	0.395	54.6	0.0782	6.11e-5

Coverage factors: w_{E_{ind}, cube avg.} = [6.00], w_{E_{ind}, local} = [8.48], w_{E_{ind}, line avg.} = [3.22]

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998								IEEE 2019								FCC								HC Code 6							
	RL				BR				RL				BR				ERL				DRL				MPE				BR				RL				BR			
	P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _J ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR	
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH		
0.00	0.02	0.03	0.66	0.04	<0.01	<0.01	0.19	0.63	0.01	<0.01	<0.01	<0.01	0.09	0.04	<0.01	<0.01	0.10	0.19	0.66	N/A	<0.01	<0.01	0.10	0.19	0.66	N/A	<0.01	<0.01	0.10	0.19	0.66	N/A	<0.01	<0.01	0.10	0.19	0.66	N/A	<0.01	<0.01

Coverage factors: w_{E_{ind}, cube avg.} = [6.00], w_{E_{ind}, local} = [8.48], w_{E_{ind}, line avg.} = [3.22]

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P08_Raer Face_with iphone 16 pro_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -11.94 mm, y: 12.60 mm, z: 68.95 mm

Dimensions:
x: 257.0 mm, y: 256.0 mm, z: 36.5 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/14

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 489.66 mA/m
x: 171.70 mA/m, y: 309.26 mA/m, z: 338.59 mA/m

Maximum H-field location relative to DUT:
x: -11.00 mm, y: 55.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 65.92 V/m
x: 3.95 V/m, y: 1.71 V/m, z: 65.78 V/m

Maximum E-field location relative to DUT:
x: 14.67 mm, y: 7.33 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
36.67 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

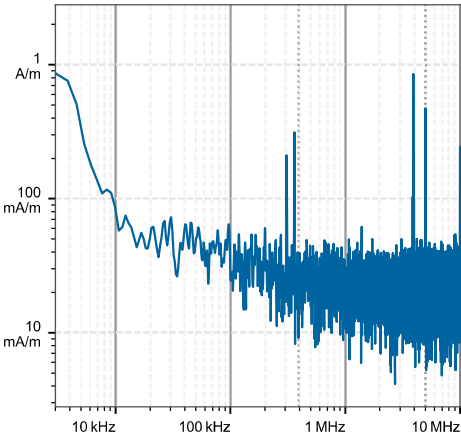

H-field magnitude [RMS] at lowest plane

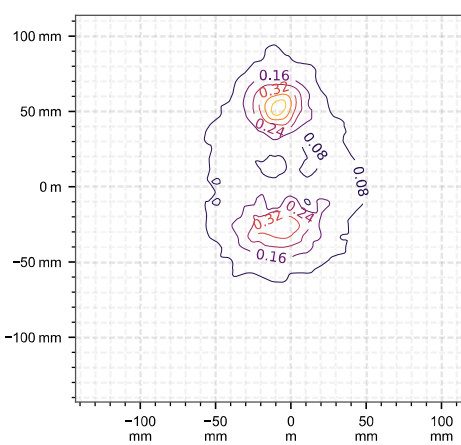

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 359.99 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	1.16	65.9	0.016	0.017	0.0166	9.48e-3	9.06e-5	4.62e-5	56.2	42%	148%	31%

Compliance evaluation (Field values at the peak frequency) (f=359.99 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	1.16	65.9	0.0968	7.96e-5	1.16	65.9	0.0145	7.96e-5	1.16	65.9	0.0575	7.96e-5	1.16	65.9	N/A	1.24e-4	1.16	65.9	0.142	1.24e-4

Coverage factors: $w_{E_{ind, cube avg.}} = [5.64]$, $w_{E_{ind, local}} = [7.97]$, $w_{E_{ind, line avg.}} = [3.06]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998				IEEE 2019				FCC				HC Code 6											
	RL				BR				RL		BR		ERL		DRL		MPE		BR		RL		BR									
	P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _J ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR	
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH		
0.00	0.06	0.09	0.79	0.05	<0.01	<0.01	0.57	0.76	0.02	<0.01	<0.01	0.01	0.11	0.05	<0.01	<0.01	0.10	0.71	0.11	N/A	<0.01	0.01	0.57	0.79	N/A	<0.01	<0.01					

Coverage factors: $w_{E_{ind, cube avg.}} = [5.64]$, $w_{E_{ind, local}} = [7.97]$, $w_{E_{ind, line avg.}} = [3.06]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P09_Left Side_with iphone 16 pro_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -12.00 mm, y: 12.52 mm, z: 120.78 mm

Dimensions:
x: 257.0 mm, y: 256.0 mm, z: 37.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/14

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 306.52 mA/m
x: 33.85 mA/m, y: 18.18 mA/m, z: 304.11 mA/m

Maximum H-field location relative to DUT:
x: 3.67 mm, y: -11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 14.81 V/m
x: 1.15 V/m, y: 986.94 mV/m, z: 14.74 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 58.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
30.24 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

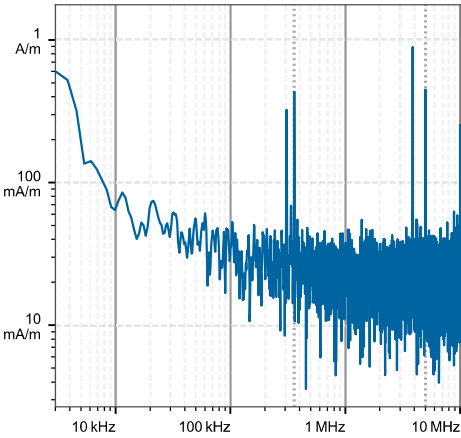

H-field magnitude [RMS] at lowest plane

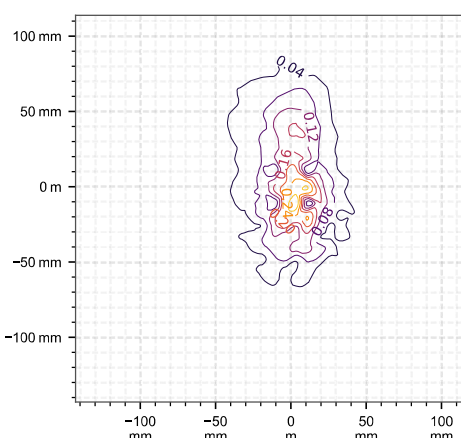

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 359.99 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	0.569	14.8	0.0101	0.0103	0.0103	6.86e-3	4.89e-5	2.82e-5	51.4	135%	89%	30%

Compliance evaluation (Field values at the peak frequency) (f=359.99 kHz, total field evaluation, coverage evaluation)

	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]		BR [RMS]		RL [RMS]		BR [RMS]		ERL [RMS]		DRL [RMS]		MPE [RMS]		BR [RMS]		RL [RMS]		BR [RMS]	
Distance [mm]	pH _{inc} [A/m]	pE _{inc} [V/m]	pE _{ind} [V/m]	psSAR [mW/kg]	pH _{inc} [A/m]	pE _{inc} [V/m]	pJ _{ind} [A/m ²]	psSAR [mW/kg]	pH _{inc} [A/m]	pE _{inc} [V/m]	pE _{ind} [V/m]	psSAR [mW/kg]	pH _{inc} [A/m]	pE _{inc} [V/m]	pE _{ind} [V/m]	psSAR [mW/kg]	pH _{inc} [A/m]	pE _{inc} [V/m]	pE _{ind} [V/m]	psSAR [mW/kg]
0.00	0.569	14.8	0.0580	2.99e-5	0.569	14.8	7.99e-3	2.99e-5	0.569	14.8	0.0327	2.99e-5	0.569	14.8	N/A	5.06e-5	0.569	14.8	0.0826	5.06e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [5.57]$, $w_{E_{ind, local}} = [7.87]$, $w_{E_{ind, line avg.}} = [3.03]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998								IEEE 2019								FCC								HC Code 6							
	RL				BR				RL				BR				ERL				DRL				MPE				BR				RL				BR			
	P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _J ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR	
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH		
0.00	0.03	0.04	0.18	0.01	<0.01	<0.01	0.28	0.17	0.01	<0.01	<0.01	<0.01	0.02	0.01	<0.01	<0.01	0.35	0.02	N/A	<0.01	<0.01	0.28	0.18	N/A	<0.01	<0.01	0.28	0.18	N/A	<0.01	<0.01	0.28	0.18	N/A	<0.01	<0.01	0.28	0.18		

Coverage factors: $w_{E_{ind, cube avg.}} = [5.57]$, $w_{E_{ind, local}} = [7.87]$, $w_{E_{ind, line avg.}} = [3.03]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P10_Right Side_with iphone 16 pro_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -25.05 mm, y: 24.67 mm, z: 121.19 mm

Dimensions:
x: 256.6 mm, y: 256.0 mm, z: 36.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/14

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 263.17 mA/m
x: 216.45 mA/m, y: 3.68 mA/m, z: 149.64 mA/m

Maximum H-field location relative to DUT:
x: -113.67 mm, y: 33.00 mm, z: 30.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 19.72 V/m
x: 2.18 V/m, y: 472.31 mV/m, z: 19.59 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 14.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
16.40 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

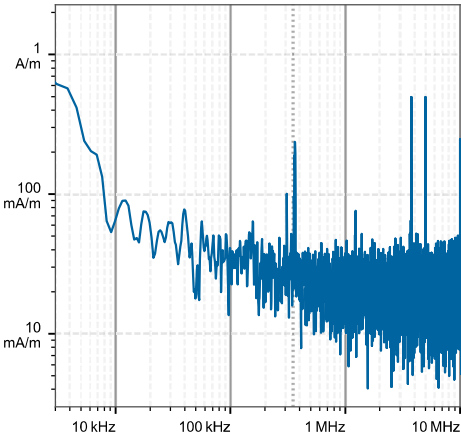

H-field magnitude [RMS] at lowest plane

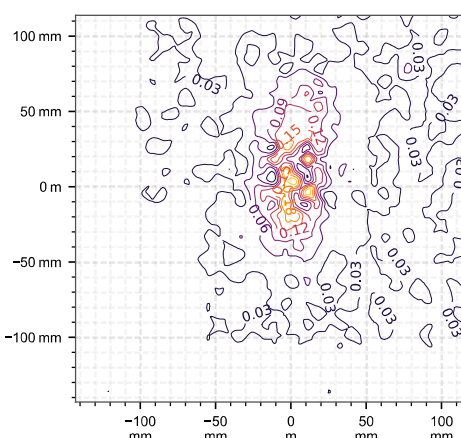

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 359.56 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	0.480	19.7	7.44e-3	7.71e-3	7.47e-3	5.04e-3	2.71e-5	1.48e-5	74.9	34%	239%	66%

Compliance evaluation (Field values at the peak frequency) (f=359.56 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	0.480	19.7	0.0460	1.78e-5	0.480	19.7	6.54e-3	1.78e-5	0.480	19.7	0.0258	1.78e-5	0.480	19.7	N/A	3.01e-5	0.480	19.7	0.0665	3.01e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [5.92]$, $w_{E_{ind, local}} = [8.37]$, $w_{E_{ind, line avg.}} = [3.18]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998								IEEE 2019								FCC								HC Code 6							
	RL				BR				RL				BR				ERL				DRL				MPE				BR				RL				BR			
	P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _J ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR	
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH		
0.00	0.02	0.04	0.24	0.01	<0.01	<0.01	0.24	0.23	<0.01	<0.01	<0.01	<0.01	0.03	0.01	<0.01	<0.01	0.29	0.03	N/A	<0.01	<0.01	0.24	0.24	N/A	<0.01	<0.01	0.24	0.24	N/A	<0.01	<0.01	0.24	0.24	N/A	<0.01	<0.01				

Coverage factors: $w_{E_{ind, cube avg.}} = [5.92]$, $w_{E_{ind, local}} = [8.37]$, $w_{E_{ind, line avg.}} = [3.18]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P11_Top Side_with iphone 16 pro_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -36.50 mm, y: 34.42 mm, z: 198.32 mm

Dimensions:
x: 257.2 mm, y: 257.0 mm, z: 36.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/14

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 75.01 mA/m
x: 44.31 mA/m, y: 30.58 mA/m, z: 52.23 mA/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 25.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 30.07 V/m
x: 429.67 mV/m, y: 387.30 mV/m, z: 30.07 V/m

Maximum E-field location relative to DUT:
x: 0.00 m, y: 7.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
7.33 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

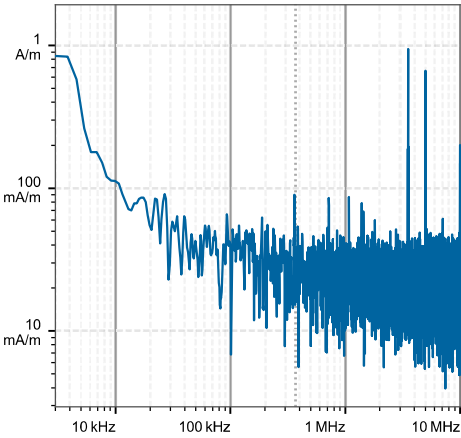

H-field magnitude [RMS] at lowest plane

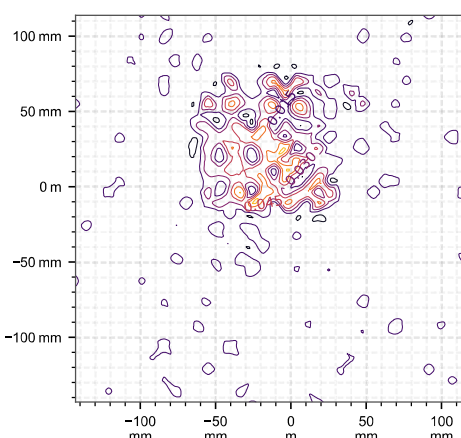

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 359.57 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	0.124	30.1	2.38e-3	2.42e-3	2.42e-3	1.58e-3	2.66e-6	1.43e-6	90.3	57%	176%	70%

Compliance evaluation (Field values at the peak frequency) (f=359.57 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	0.124	30.1	0.0177	8.35e-6	0.124	30.1	3.86e-3	8.35e-6	0.124	30.1	0.011	8.35e-6	0.124	30.1	N/A	9.58e-6	0.124	30.1	0.0241	9.58e-6

Coverage factors: $w_{E_{ind, cube avg.}} = [6.16]$, $w_{E_{ind, local}} = [8.69]$, $w_{E_{ind, line avg.}} = [3.28]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998								IEEE 2019								FCC								HC Code 6							
	RL				BR				RL				BR				ERL				DRL				MPE				BR				RL				BR			
	P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR	
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH		
0.00	<0.01	<0.01	0.36	0.02	<0.01	<0.01	0.06	0.35	<0.01	<0.01	<0.01	<0.01	0.05	0.02	<0.01	<0.01	0.08	0.05	N/A	<0.01	<0.01	0.06	0.36	N/A	<0.01	<0.01	0.06	0.36	N/A	<0.01	<0.01	0.06	0.36	N/A	<0.01	<0.01	0.06	0.36		

Coverage factors: $w_{E_{ind, cube avg.}} = [6.16]$, $w_{E_{ind, local}} = [8.69]$, $w_{E_{ind, line avg.}} = [3.28]$

DASY8 Module WPT Measurement Report

Device under test

Info:
P25100034

Serial number:
P12_Bottom Side_with iphone 16 pro_0mm

Scenario:
not set

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000225, 2025/08/06

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: -25.46 mm, y: 24.12 mm, z: 198.11 mm

Dimensions:
x: 256.2 mm, y: 257.0 mm, z: 36.0 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2025/10/14

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 221.39 mA/m
x: 95.13 mA/m, y: 23.77 mA/m, z: 198.49 mA/m

Maximum H-field location relative to DUT:
x: -11.00 mm, y: 3.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 23.27 V/m
x: 15.58 mV/m, y: 276.45 mV/m, z: 23.27 V/m

Maximum E-field location relative to DUT:
x: 7.33 mm, y: 7.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
37.39 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

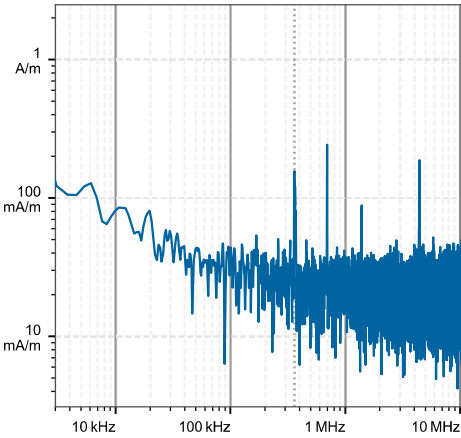

H-field magnitude [RMS] at lowest plane

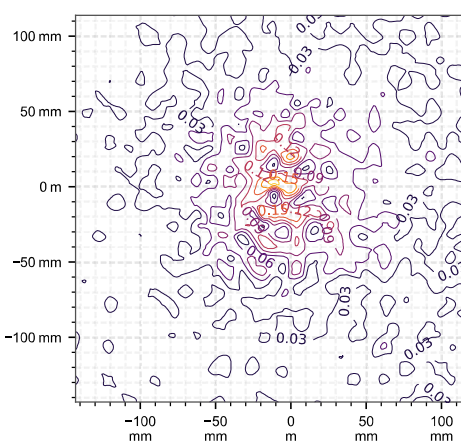

Incident fields and induced fields in the homogeneous phantom at the peak frequency (f = 360.16 kHz, σ = 0.750 S/m, tissue density = 1,000 kg/m³)

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m², RMS]	psSAR [mW/kg]		H-field extent	Warnings		
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]	Sign	Vector potential	Boundary effect
0.00	0.352	23.3	8.71e-3	8.92e-3	8.92e-3	5.71e-3	3.44e-5	2.36e-5	113	77%	82%	73%

Compliance evaluation (Field values at the peak frequency) (f=360.16 kHz, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	0.352	23.3	0.0589	2.78e-5	0.352	23.3	7.48e-3	2.78e-5	0.352	23.3	0.0329	2.78e-5	0.352	23.3	N/A	3.86e-5	0.352	23.3	0.0841	3.86e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [6.49]$, $w_{E_{ind, local}} = [9.17]$, $w_{E_{ind, line avg.}} = [3.43]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998								IEEE 2019								FCC								HC Code 6							
	RL				BR				RL				BR				ERL				DRL				MPE				BR				RL				BR			
	P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _J ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR		P _H inc		P _E inc		P _E ind		psSAR	
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH		
0.00	0.02	0.03	0.28	0.02	<0.01	<0.01	0.17	0.27	0.01	<0.01	<0.01	<0.01	0.04	0.02	<0.01	<0.01	0.22	0.04	N/A	<0.01	<0.01	0.17	0.28	N/A	<0.01	<0.01														

Coverage factors: $w_{E_{ind, cube avg.}} = [6.49]$, $w_{E_{ind, local}} = [9.17]$, $w_{E_{ind, line avg.}} = [3.43]$