


Intertek Testing Services
RF VOLTAGE

EUT: Bluetooth USB Adapter F8T001
Manuf: Belkin Components
Op Cond: AMN-L
Operator: Elton
Test Spec: FCC 15.207
Comment: SN:825788/015
120V 60Hz 24C 65%RH tx mode at low channel
Date: 13. Dec 01 14:26

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	5k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

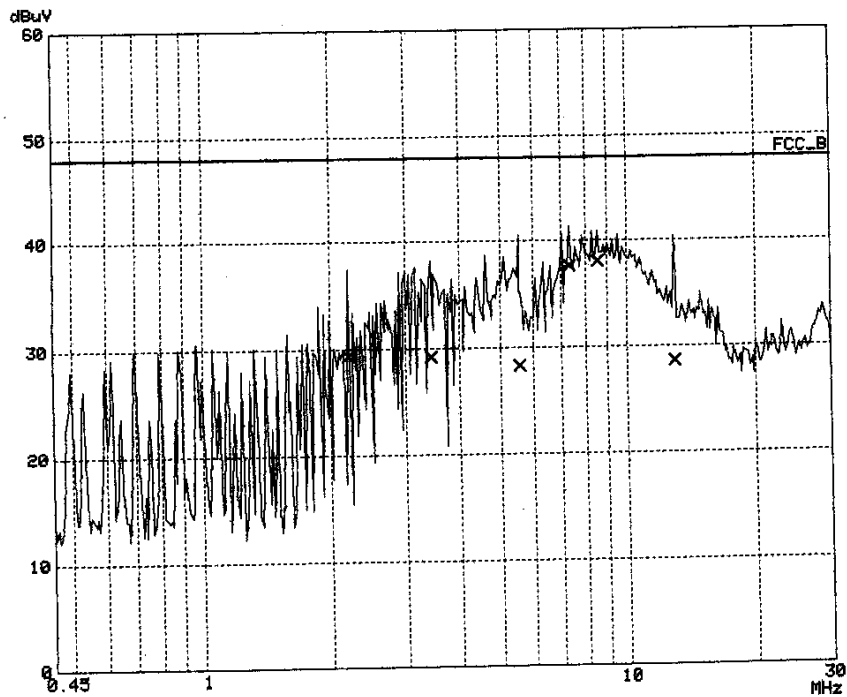


Intertek Testing Services
RF VOLTAGE

EUT: Bluetooth USB Adapter F8T001
Manuf: Belkin Components
Op Cond: AMN-N
Operator: Elton
Test Spec: FCC 15.207
Comment: SN:825788/015
120V 60Hz 24C 65%RH tx mode at low channel
Date: 13. Dec 01 14:34

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

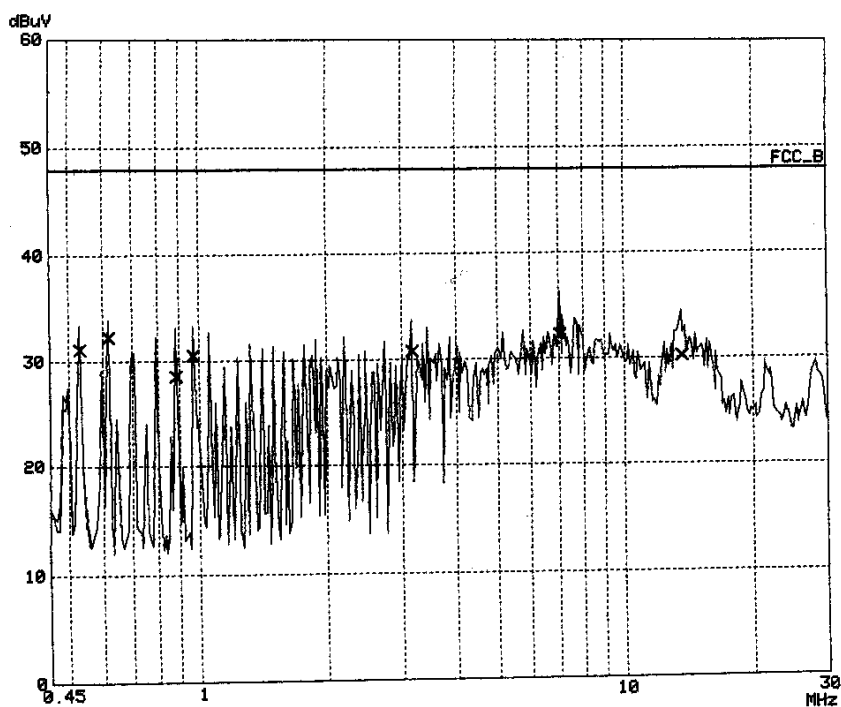


Intertek Testing Services
RF VOLTAGE

EUT: Bluetooth USB Adapter F8T001
Manuf: Belkin Components
Op Cond: AMN-L
Operator: Elton
Test Spec: FCC 15.207
Comment: SN:825788/015
120V 60Hz 24C 65%RH tx mode at mid channel
Date: 13. Dec 01 14:48

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

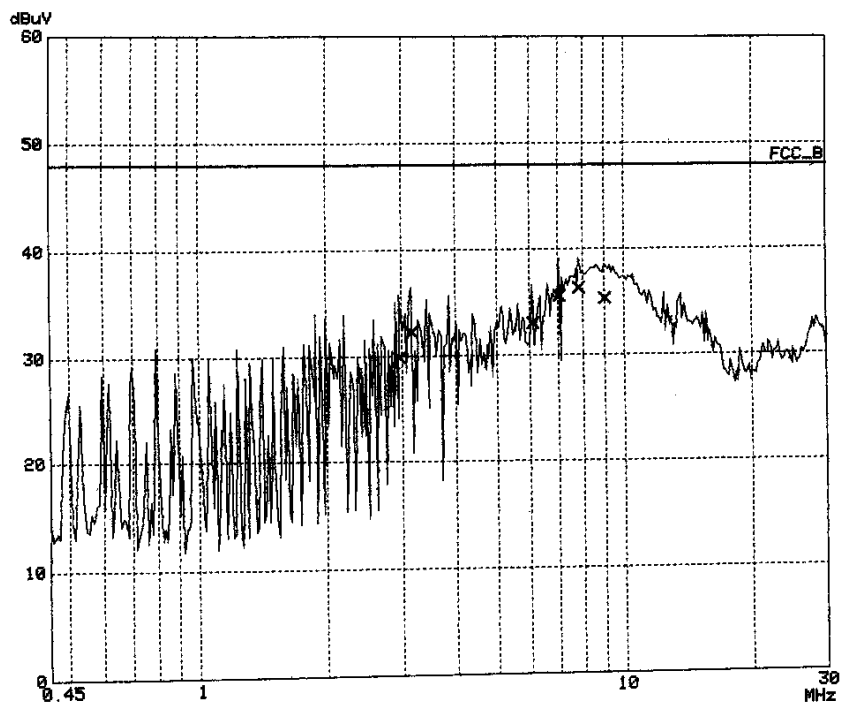

Intertek Testing Services
RF VOLTAGE


EUT: Bluetooth USB Adapter F8T001
Manuf: Belkin Components
Op Cond: AMN-N
Operator: Elton
Test Spec: FCC 15.207
Comment: SN:825788/015
120V 60Hz 24C 65%RH tx mode at mid channel
Date: 13. Dec 01 14:41

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP

Meas Time: 1 s

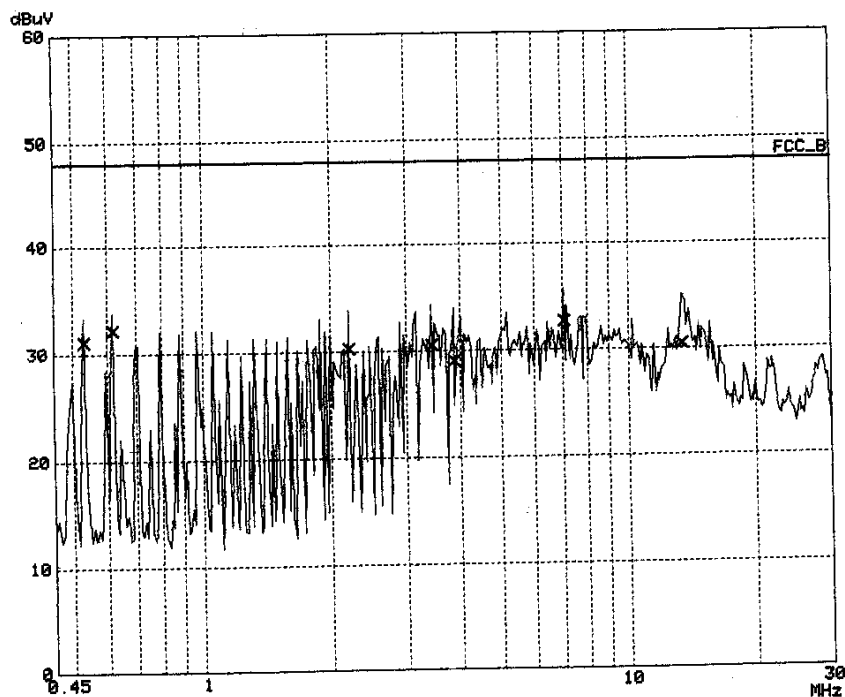


Intertek Testing Services
RF VOLTAGE

EUT: Bluetooth USB Adapter F8T001
Manuf: Belkin Components
Op Cond: AMN-L
Operator: Elton
Test Spec: FCC 15.207
Comment: SN:825788/015
120V 60Hz 24C 65%RH tx mode at high channel
Date: 13. Dec 01 14:55

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

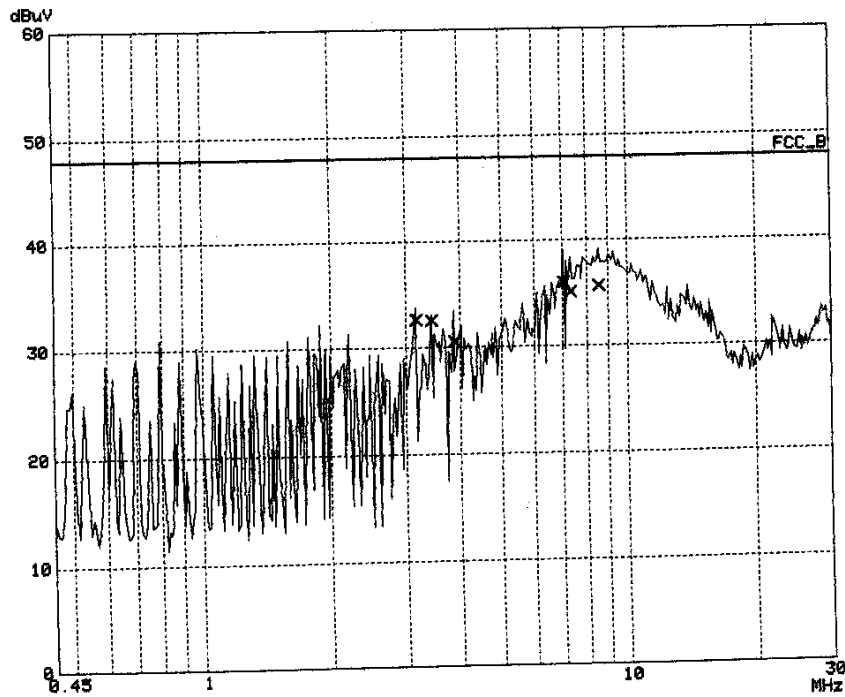

Intertek Testing Services
RF VOLTAGE

EUT: Bluetooth USB Adapter F8T001
Manuf: Belkin Components
Op Cond: AMN-N
Operator: Elton
Test Spec: FCC 15.207
Comment: SN:825788/015
120V 60Hz 24C 65%RH tx mode at high channel
Date: 13. Dec 01 15:02

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP
Meas Time: 1 s

