



Test Report

For

Applicant : D-Link Corporation

Equipment Type : Cable Modem

Model : DCM-100

Report No.: 021H040FI



Test Report Certification

QuieTek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859

E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : D-Link Corporation
Address : No. 8, Li-Hsin VII Road, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.
Equipment Type : Cable Modem
Model : DCM-100
FCC ID. : KA2-018H044F
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
Operation Voltage : 120VAC/60Hz
Classification : Class B
Test Result : Complied
Test Date : January 9, 2001
Report No. : 021H040FI



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Ellie Cheng

Handwritten signature of Ellie Cheng in blue ink.

Test Engineer: Arthur Liu

Handwritten signature of Arthur Liu in blue ink.

Approved: Kevin Wang

Handwritten signature of Kevin Wang in blue ink.



TABLE OF CONTENTS

Description	Page
2. GENERAL INFORMATION	4
2.1 EUT Description.....	4
2.2 Tested System Details.....	5
2.3 EUT Configuration	7
2.4 EUT Exercise Software	8
2.5 Test performed	8
2.6 Test Facility	9
3. CONDUCTED EMISSION.....	10
3.1 Test Equipment List.....	10
3.2 Test Setup.....	10
3.3 Limits.....	10
3.4 Test Procedure	11
3.5 Test Results	11
4. RADIATED EMISSION	12
4.1 Test Equipment	12
4.2 Test Setup.....	12
4.3 Limits.....	13
4.4 Test Procedure	13
4.5 Test Results	13
5. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....	14
6. ATTACHMENT.....	15
ATTACHMENT 1: SUMMARY OF TEST RESULTS	
ATTACHMENT 2: EUT TEST PHOTOGRAPHS	
ATTACHMENT 3: EUT DETAILED PHOTOGRAPHS	



1. General Information

1.1 EUT Description

Applicant : D-Link Corporation

Address : No. 8, Li-Hsin VII Road, Science-Based Industrial
Park, Hsin-Chu, Taiwan, R.O.C.

Equipment Type : Cable Modem

Model : DCM-100

FCC ID : Doc

Operation Voltage : 120VAC/60Hz

Power Adapter : Highpower, HPW-1512A
Non-Shielded, 1.8m

Remark :

- 1.This device a Cable Modem.
- 2.QuieTek had verified the construction and function of the above model in typical operation, then shown in the test report.



1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Cable Modem (EUT)

Model Number	: DCM-100
Serial Number	: N/A
FCC ID	: DoC
Manufacturer	: PowerCom
LAN Cable	: Shielded, 3.0m
USB Cable	: Shielded, 3.0m
Power Adapter	: Highpower, HPW-1512A Non-Shielded,1.8m, a ferrite core bonded

1.2.2 Notebook

Model Number	:Think Pad 570
Manufacturer	:IBM
Serial Number	:27L8835
FCC ID	:DoC
Power Adapter	:IBM, 02K6543 Cable In : Non-shielded, 1.5m Cable Output : Non-shielded, 1.8m

1.2.3 Monitor

Model Number	: G585
Serial Number	: FK8B39883
FCC ID	: DoC
Manufacturer	: GENUINE
Data Cable	: Shielded, 1.5m
Power Cord	: Non-shielded, 1.8m

1.2.4 Mouse

Model Number	: M-S34
Serial Number	: LZB75078465
FCC ID	: DZL211029
Manufacturer	: HP
Data Cable	: Shielded, 1.8m

1.2.5 Modem

Model Number	: 1414
Serial Number	: 980033033
FCC ID	: IFAXDM1414
Manufacturer	: ACEEX
Data Cable	: Shielded, 1.5m
Power Adapter	: ACCEX, SCP41-91000A Cable Output : Shielded, 1.5m



1.2.6 Printer
 Model Number : C2642A
 Serial Number : MY75J1D1D0
 FCC ID : B94C2642X
 Manufacturer : HP
 Data Cable : Shielded, 1.2m
 Power Adapter : NMB, C2175A
 Cable for AC IN: Non-shielded, 0.7m
 Cable for AC Out: Non-shielded, 1.5m

1.2.7 Microphone
 Model Number : CD-8000
 Serial Number : N/A
 FCC ID : DoC
 Manufacturer : AIWA
 Data Cable : Non-shielded, 1m

1.2.8 Speaker
 Model Number : J-008
 Serial Number : 99-D-235399-C
 FCC ID : DoC
 Manufacturer : JS
 Data Cable : Non-shielded, 1.2m

Partner PC System

1.2.9 Host Personal Computer
 Model Number : P2L97
 Serial Number : 92M4Y00777
 FCC ID : DoC
 Manufacturer : ASUS
 Power Cord : Non-shielded, 1.8m

1.2.10 Mouse
 Model Number : M-S34
 Serial Number : LZA81451691
 FCC ID : DZL211029
 Manufacturer : ACER
 Data Cable : Shielded, 1.8m


1.2.11 Keyboard
 Model Number : 6311-TW2C
 Serial Number : 916590702C7D803142
 FCC ID : DoC
 Manufacturer : ACER
 Data Cable : Shielded, 1.8m



1.2.12 LAN Card

Model Number : DFE-500TX
Serial Number : 0080C8 958320
FCC ID : KA2APC500X3
Manufacturer : D-LINK

1.3 EUT Configuration

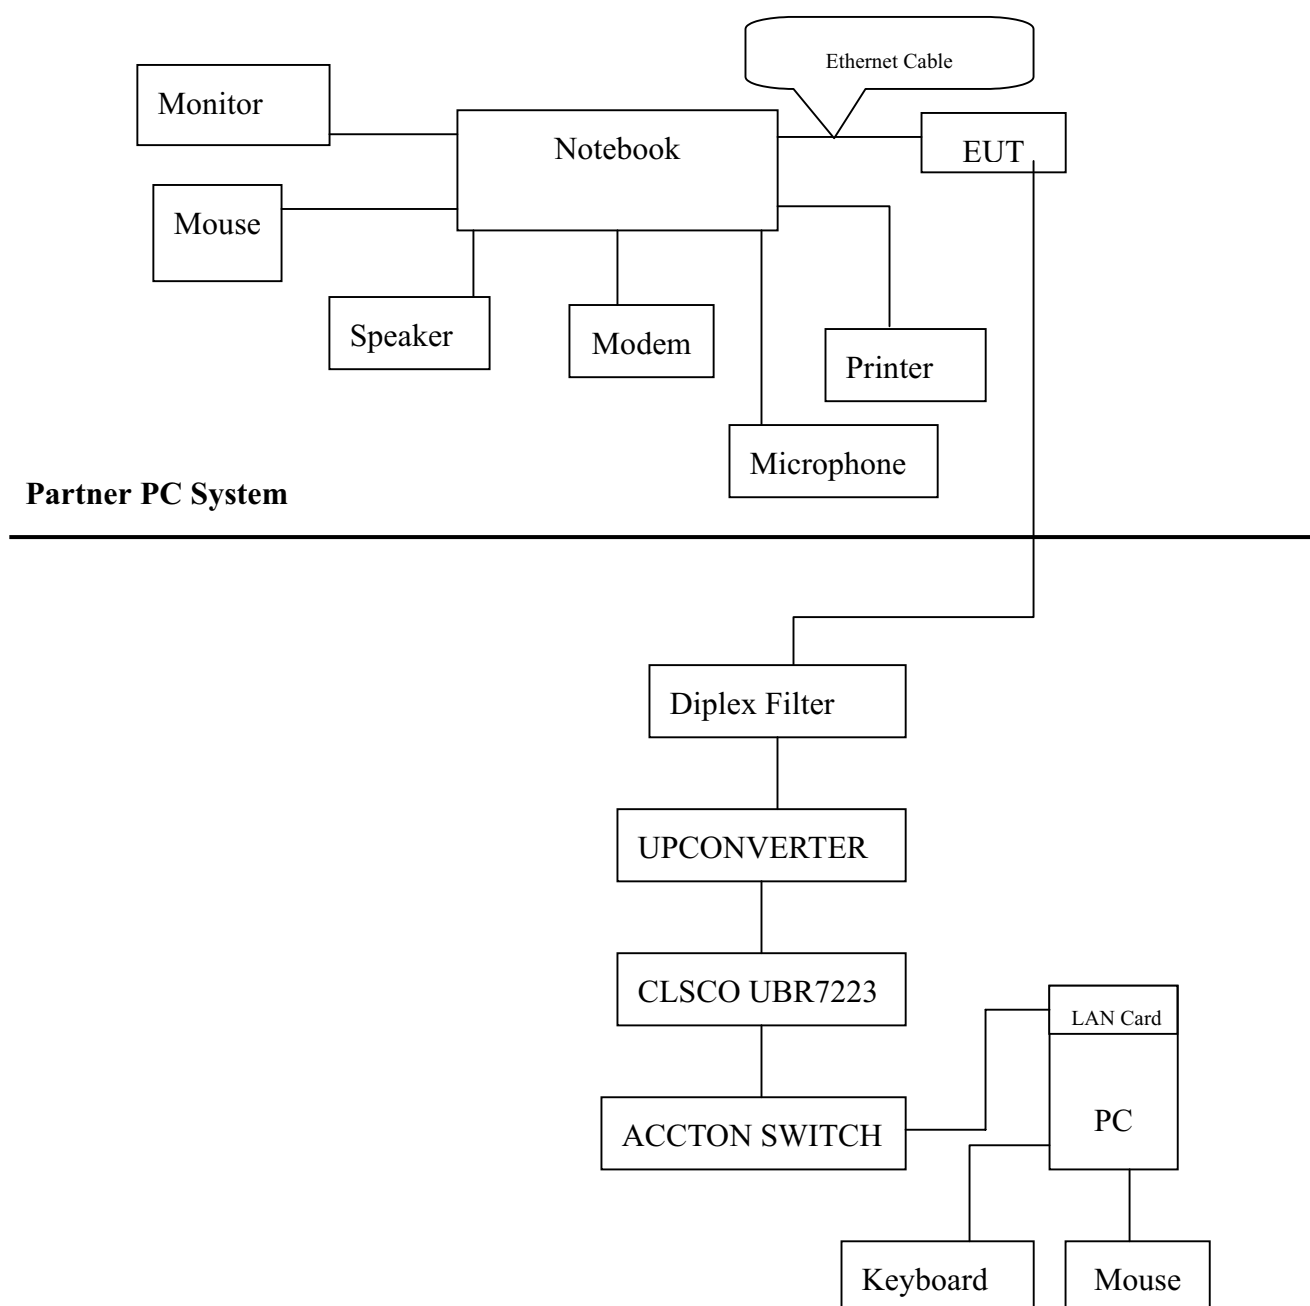

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Boot the PC from Hard Disk .
- 1.4.4 Data will communicate between personal computer and partner personal notebook through EUT.
- 1.4.5 The personal computer's and partner personal computer's monitor will show the transmitting and receiving characteristics when the communication is success.
- 1.4.6 Repeat the above procedure 1.4.4 to 1.4.6

1.5 Test performed

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

Radiated emissions were invested over the frequency range from 30MHz to 1000MHz using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters.



1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
Statement No.: 413-99-LAB11



December 8, 1998 Registration on VCCI
Registration No. for No.2 Shielded Room C-858
Registration No. for No.1 Open Area Test Site R-823
Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2000	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2000	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2000	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
6	No.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

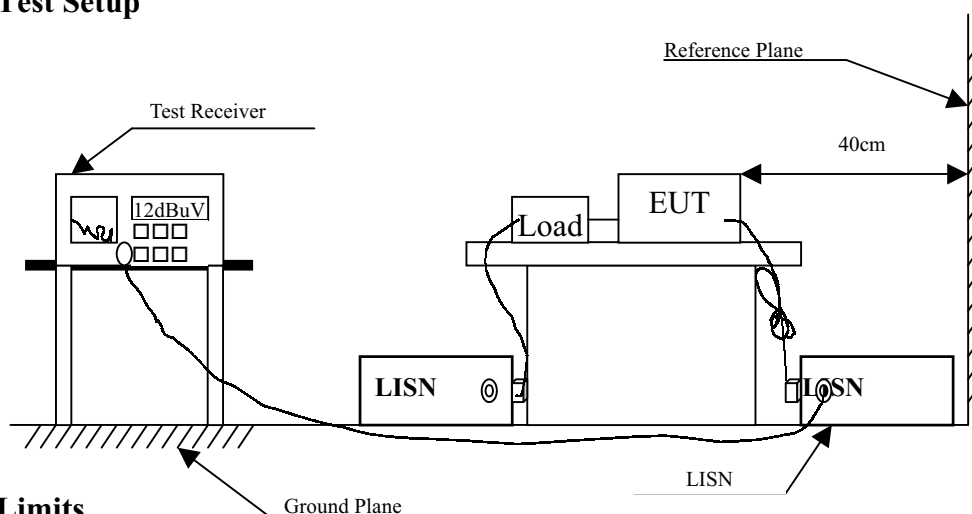

2.3 Limits

Frequency	Limits dB(uV)			
	Class A		Class B	
MHz	QP	AV	QP	AV
0.15 – 0.50	79	66	66-56	56-46
0.50-5.0	73	60	56	46
5.0 – 30	73	60	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.



3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2000
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2000
		Pre-Amplifier	HP	8447D/3307A01812	May, 2000
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2000
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2000
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2000
		Pre-Amplifier	HP	8447D/3307A01814	May, 2000
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2000

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
 - 2.. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

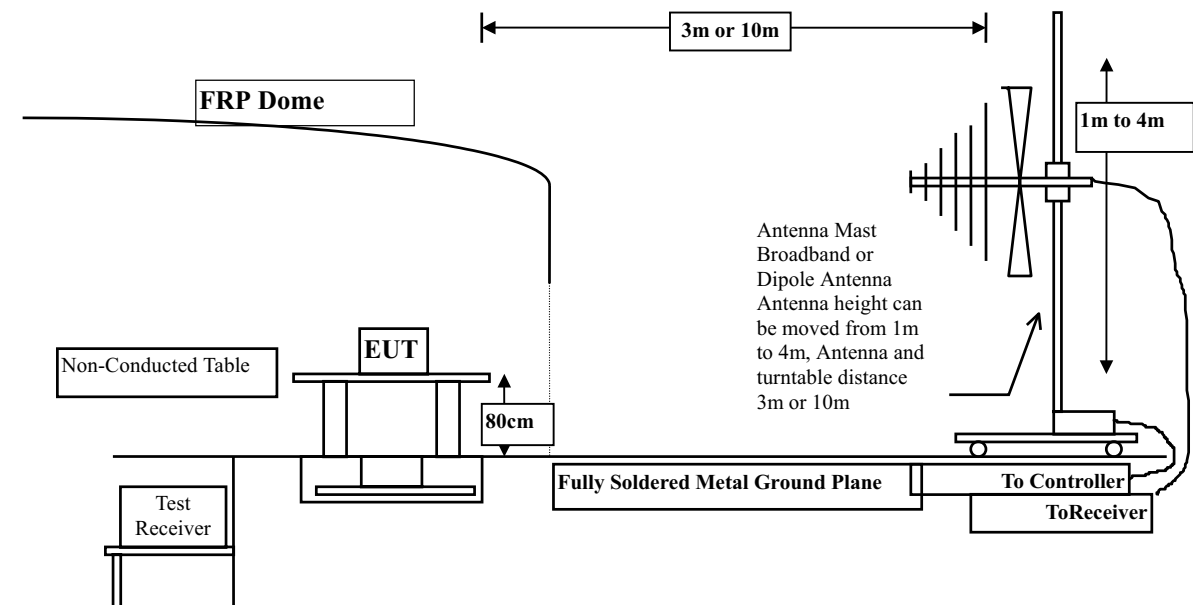

3.3 Limits

CISPR 22					FCC Part 15 Subpart B				
Frequency	Class A		Class B		Frequency	Class A		Class B	
MHz	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV/m	dBuV/m	uV/m	dBuV/m
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters . The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.



5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 5
Attachment 2: EUT Test Photographs	Number of Pages: 2
Attachment 3: EUT Detailed Photographs	Number of Pages: 1



Attachment 1 : Summary of Test Results

The test results in the emission and immunity were performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission and immunity are listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

Mode 1: Data Transmit

The EUT passed all the tests.



CONDUCTED EMISSION DATA

Date of Test	:	January 5, 2001	EUT	:	Cable Modem
Test Mode	:	Mode 1	Detect Mode	:	Quasi-Peak & Average
Frequency	Cable	LISN	Reading Level	Emission Level	Limits
	Loss	Factor	Line1	Line1	
MHz	dB	dB	dBuV	dBuV	dBuV

Quasi Peak:

0.201	0.02	0.10	52.51	52.63	63.58
0.405	0.05	0.10	42.70	42.85	57.75
*0.504	0.06	0.10	45.89	46.05	56.00
0.610	0.07	0.10	43.74	43.91	56.00
0.917	0.10	0.10	44.12	44.32	56.00
1.317	0.12	0.11	43.21	43.44	56.00

Average:

0.201	0.02	0.10	48.50	48.62	53.57
0.405	0.05	0.10	39.40	39.55	47.75
0.504	0.06	0.10	41.80	41.96	46.00
0.616	0.07	0.10	38.10	38.27	46.00
0.917	0.10	0.10	36.20	36.40	46.00
1.317	0.12	0.11	35.50	35.73	46.00

Remarks :

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss



CONDUCTED EMISSION DATA

Date of Test	:	January 5, 2001		EUT	Cable Modem	
Test Mode	:	Mode 1		Detect Mode:	Quasi-Peak & Average	
Frequency	Cable	LISN	Reading Level	Emission Level	Limits	
	Loss	Factor	Line2	Line2		
MHz	dB	dB	dBuV	dBuV	dBuV	
*0.202	0.02	0.10	57.40	57.52	63.52	
0.400	0.05	0.10	42.08	42.23	57.86	
0.503	0.06	0.10	45.35	45.51	56.00	
0.608	0.07	0.10	43.11	43.28	56.00	
0.908	0.09	0.10	42.60	42.79	56.00	
1.318	0.12	0.11	41.12	41.35	56.00	

Average:

0.202	0.02	0.10	50.30	50.42	53.53
0.400	0.05	0.10	38.40	38.55	47.85
0.503	0.06	0.10	40.90	41.06	46.00
0.608	0.07	0.10	37.10	37.27	46.00
0.908	0.09	0.10	36.10	36.29	46.00
1.318	0.12	0.11	33.90	34.13	46.00

Remarks :

1. All Reading Levels are Quasi-Peak and average value.
- 2.“ * ”, means this data is the worst emission level.
- 3.Emission Level = Reading Level + LISN Factor + Cable Loss



RADIATED EMISSION DATA

Date of Test		January 5, 2001			EUT		Cable Modem	
Test Mode		Mode 1			Test Site		No.1 Open Test Site	
Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit	
	Loss	Factor		Level	Horizontal			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	
200.000	2.78	9.30	0.00	8.93	21.01	8.99	30.00	
300.690	3.76	13.36	0.00	7.97	25.08	11.92	37.00	
400.000	4.28	15.85	0.00	1.23	21.36	15.64	37.00	
500.000	4.79	17.34	0.00	4.54	26.67	10.33	37.00	
600.000	5.31	18.85	0.00	1.88	26.04	10.96	37.00	
700.000	5.83	19.19	0.00	0.88	25.90	11.10	37.00	
800.000	6.35	20.19	0.00	0.75	27.29	9.71	37.00	
*900.000	6.88	20.89	0.00	1.54	29.32	7.68	37.00	

Remarks:

- 1.All Readings below 1GHz are Quasi-Peak, above are average value.
- 2.“ * ”, means this data is the worst emission level.
- 3.Emission Level = Reading Level + Probe Factor + Cable loss



RADIATED EMISSION DATA

Date of Test		January 5, 2001			EUT		Cable Modem	
Test Mode		Mode 1			Test Site		No.1 Open Test Site	
Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit	
	Loss	Factor		Level	Horizontal			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	
61.380	1.45	6.15	0.00	9.03	16.62	13.38	30.00	
61.380	1.45	6.15	0.00	9.35	16.94	13.06	30.00	
*200.000	2.78	9.07	0.00	13.60	25.46	4.54	30.00	
300.689	3.76	13.56	0.00	8.23	25.54	11.46	37.00	
500.000	4.79	17.14	0.00	2.36	24.29	12.71	37.00	
600.000	5.31	18.42	0.00	1.88	25.62	11.38	37.00	
700.000	5.83	18.69	0.00	0.64	25.16	11.84	37.00	
800.000	6.35	19.25	0.00	0.87	26.47	10.53	37.00	
900.000	6.88	19.90	0.00	1.34	28.13	8.87	37.00	


Remarks:

- 1.All Readings below 1GHz are Quasi-Peak, above are average value.
- 2.“ * ”, means this data is the worst emission level.
- 3.Emission Level = Reading Level + Probe Factor + Cable loss




Attachment 2: EUT Test Setup Photos

Front View of Conducted Test (Mode 1)

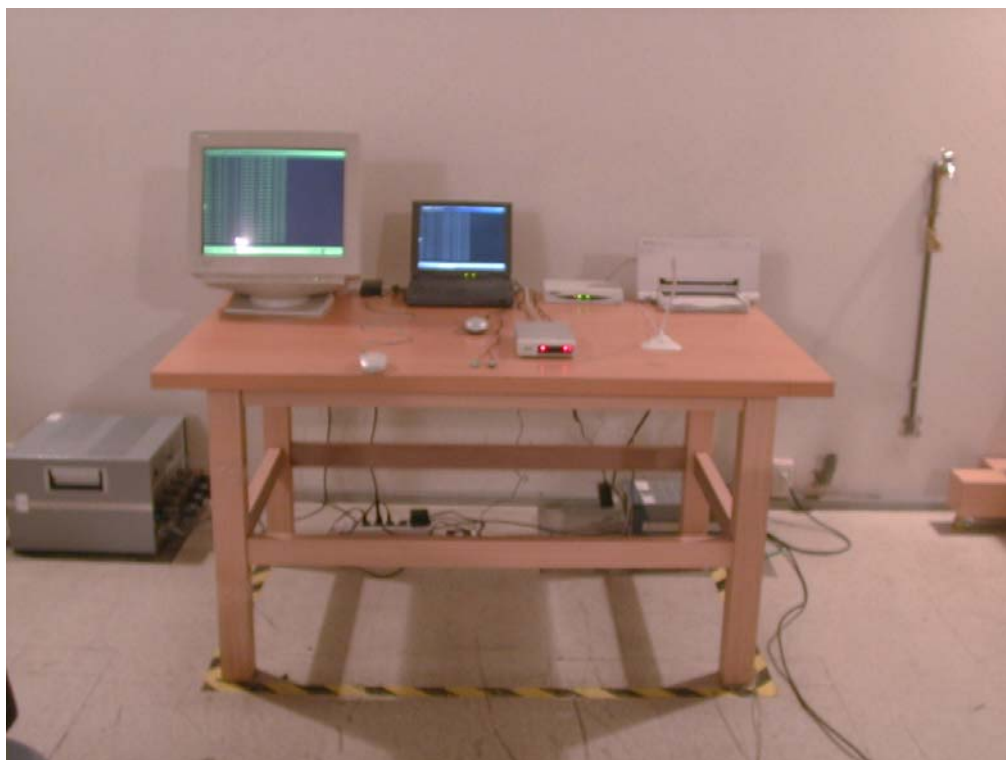

Back View of Conducted Test (Mode 1)

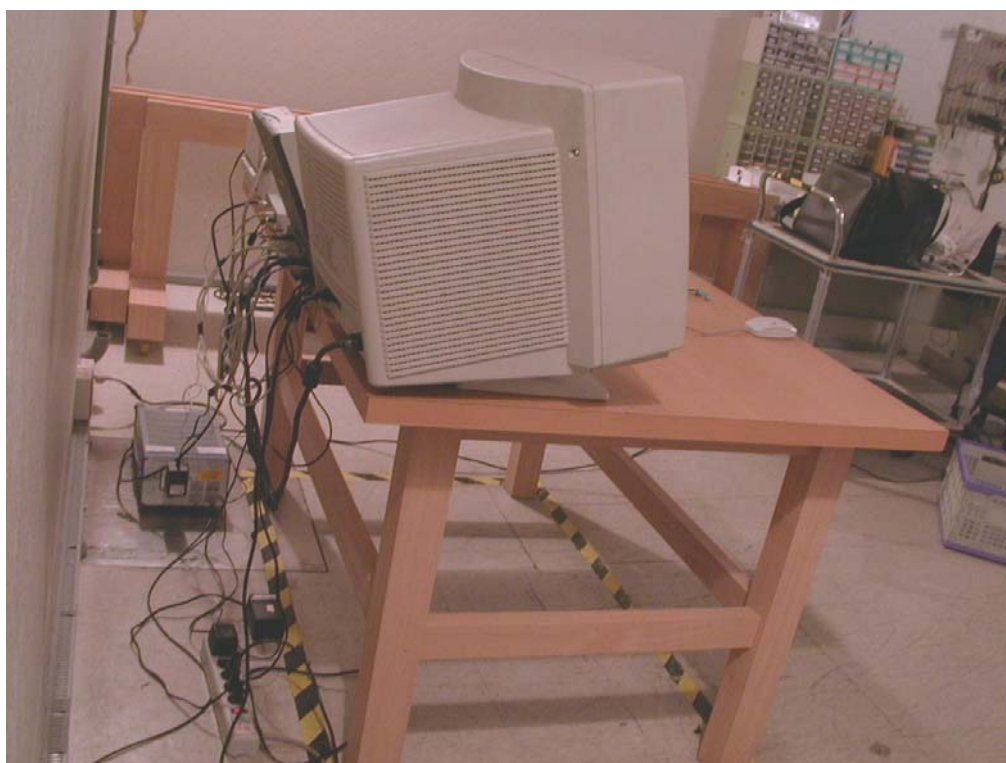

Front View of Radiated Test (Mode 1)



Back View of Radiated Test (Mode 1)

