





CHANNEL 1



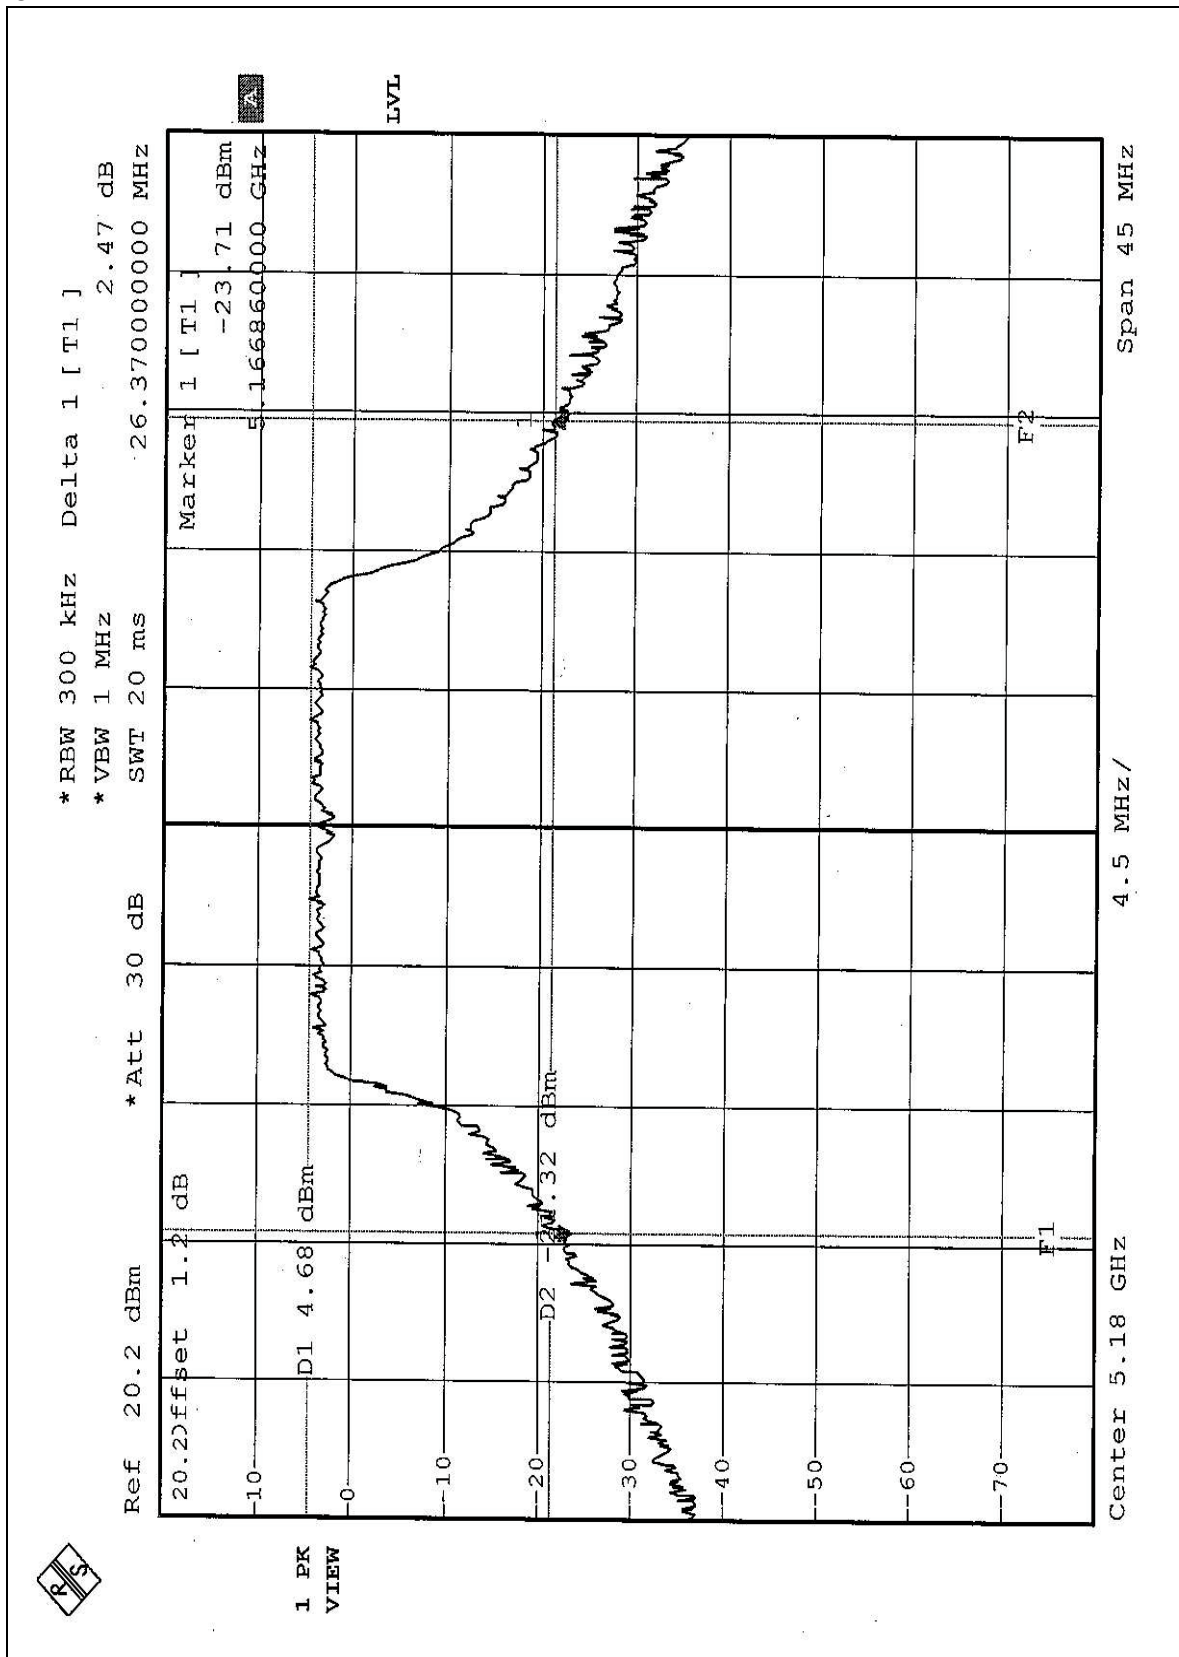


CHANNEL 4

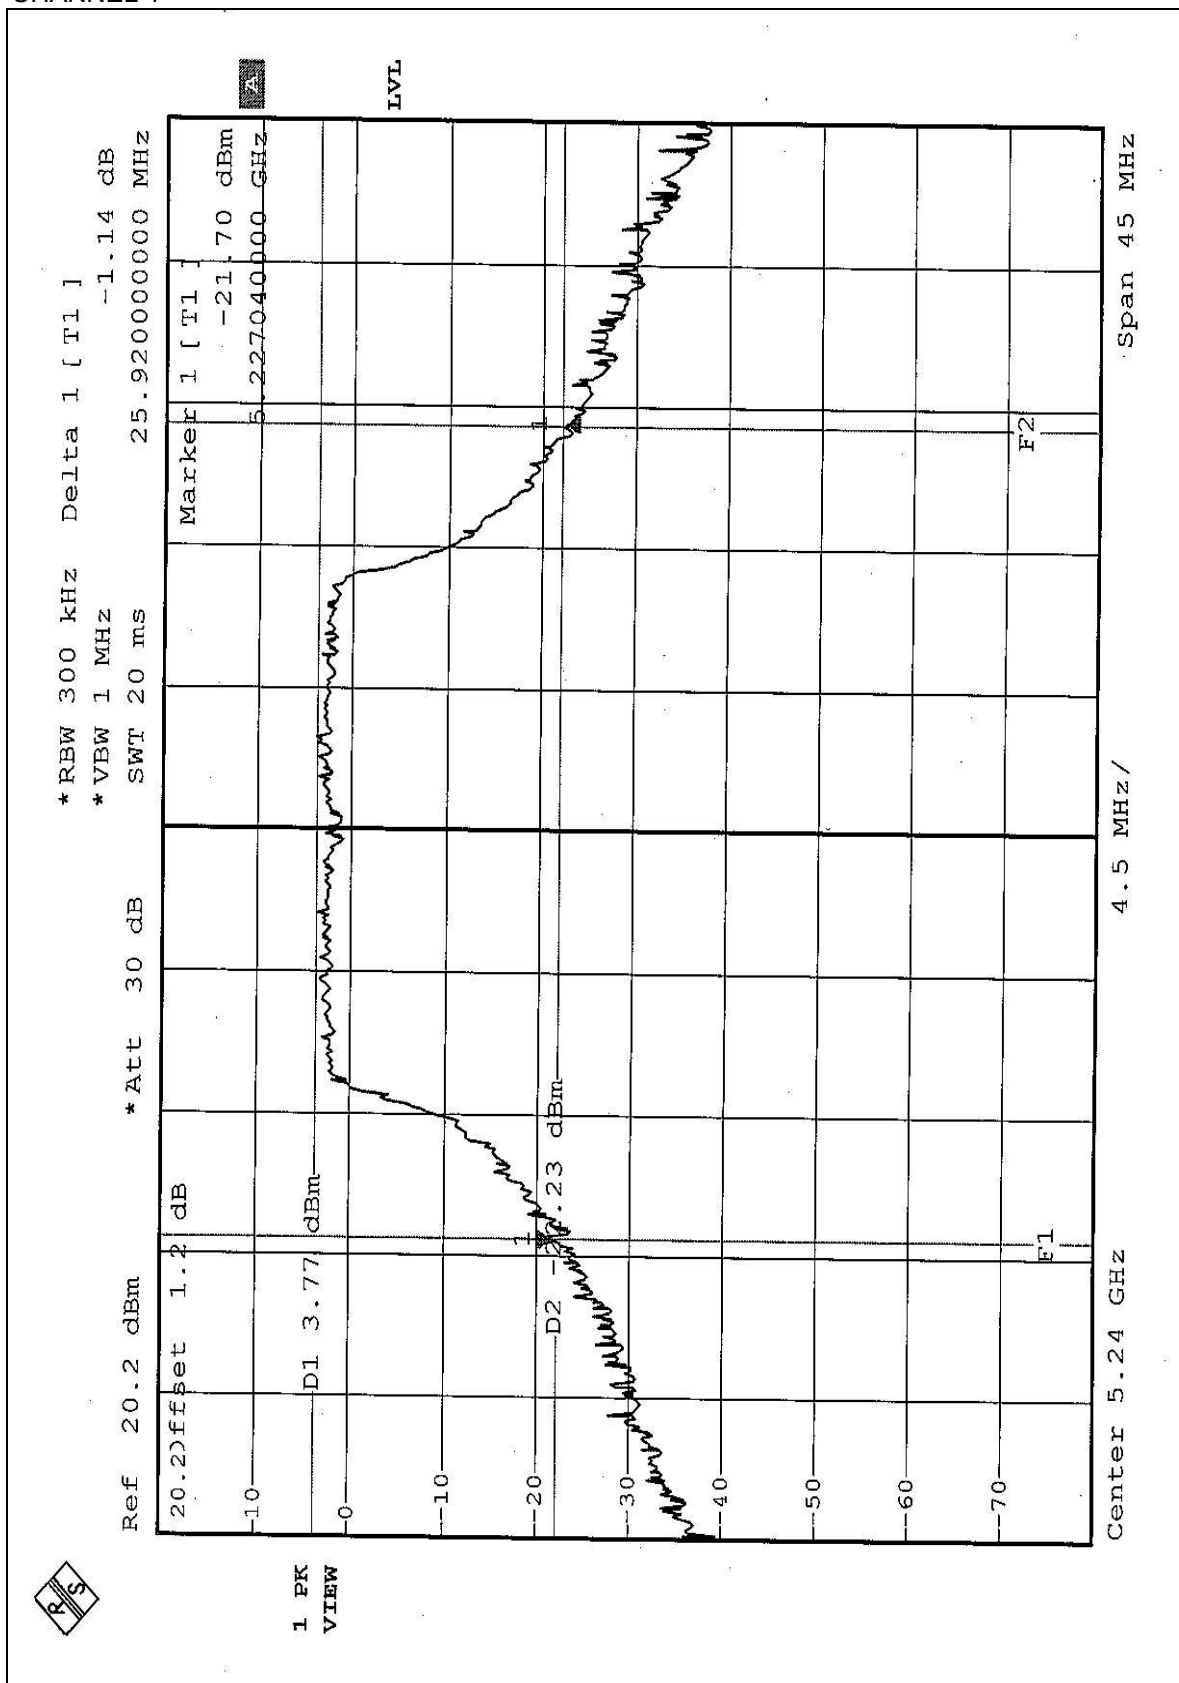




CHANNEL 5

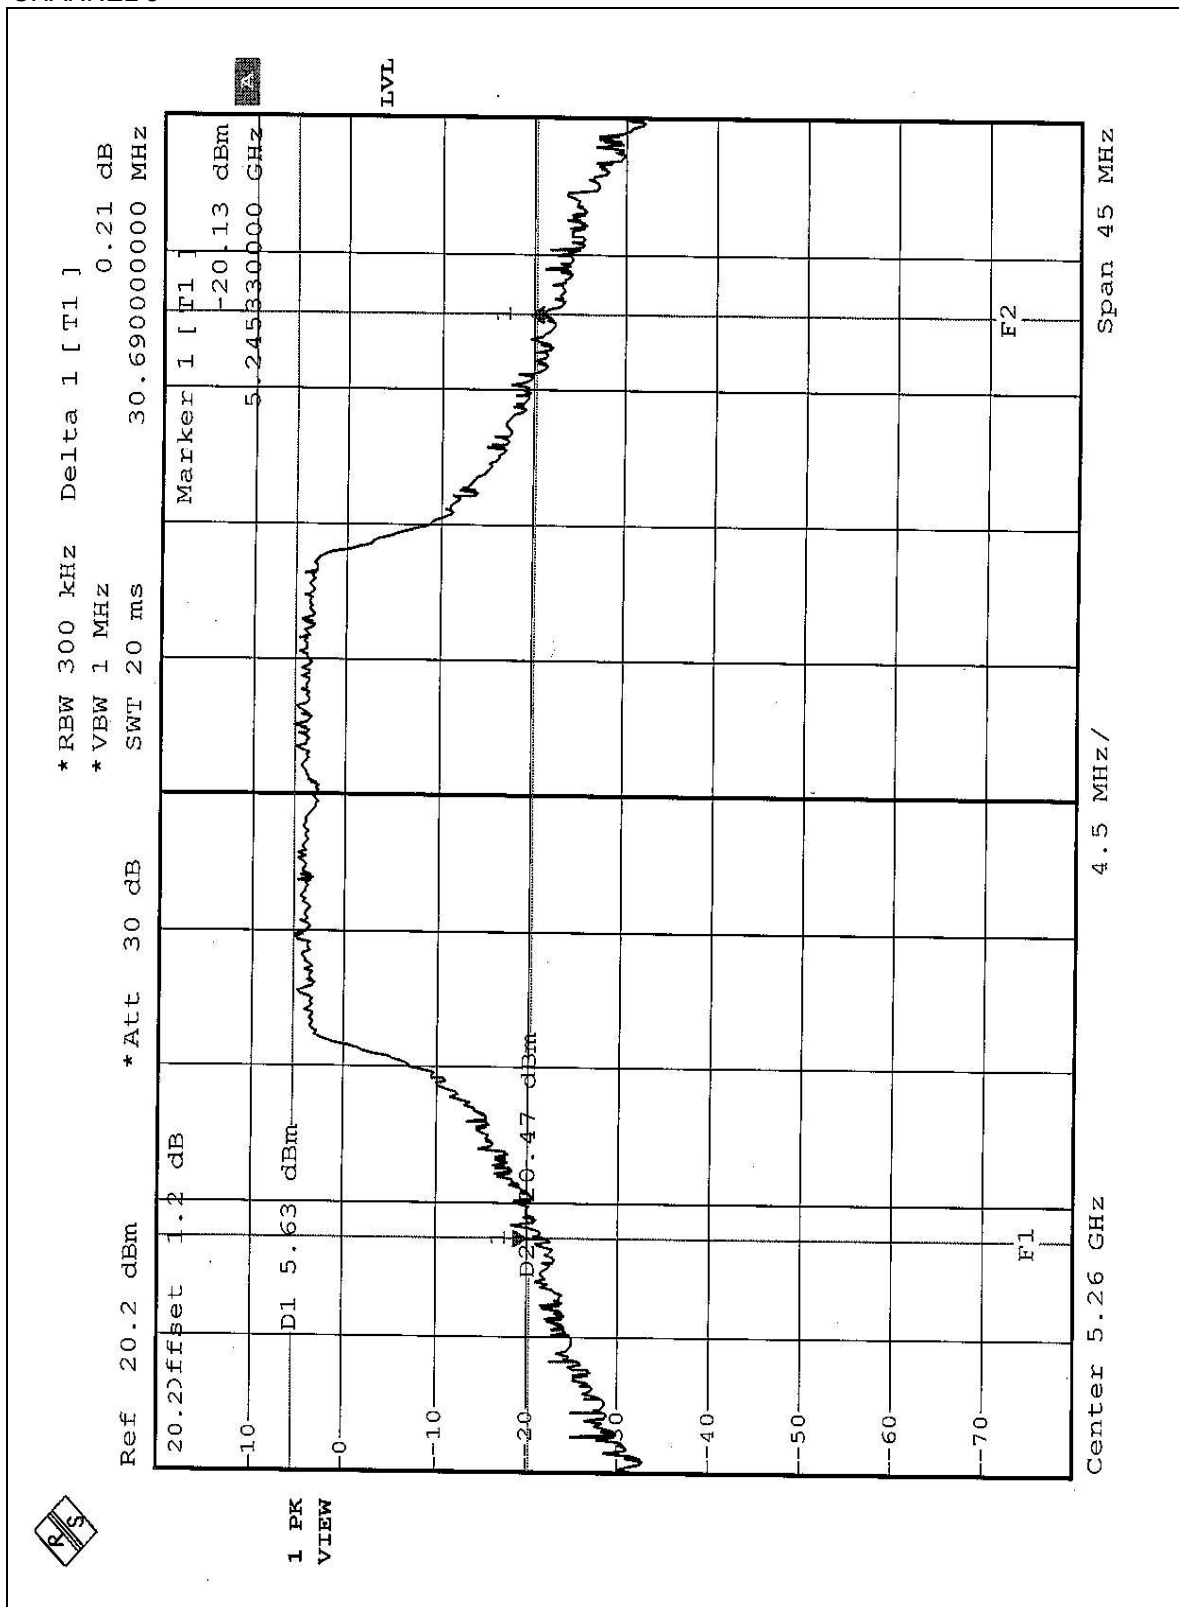




CHANNEL 8

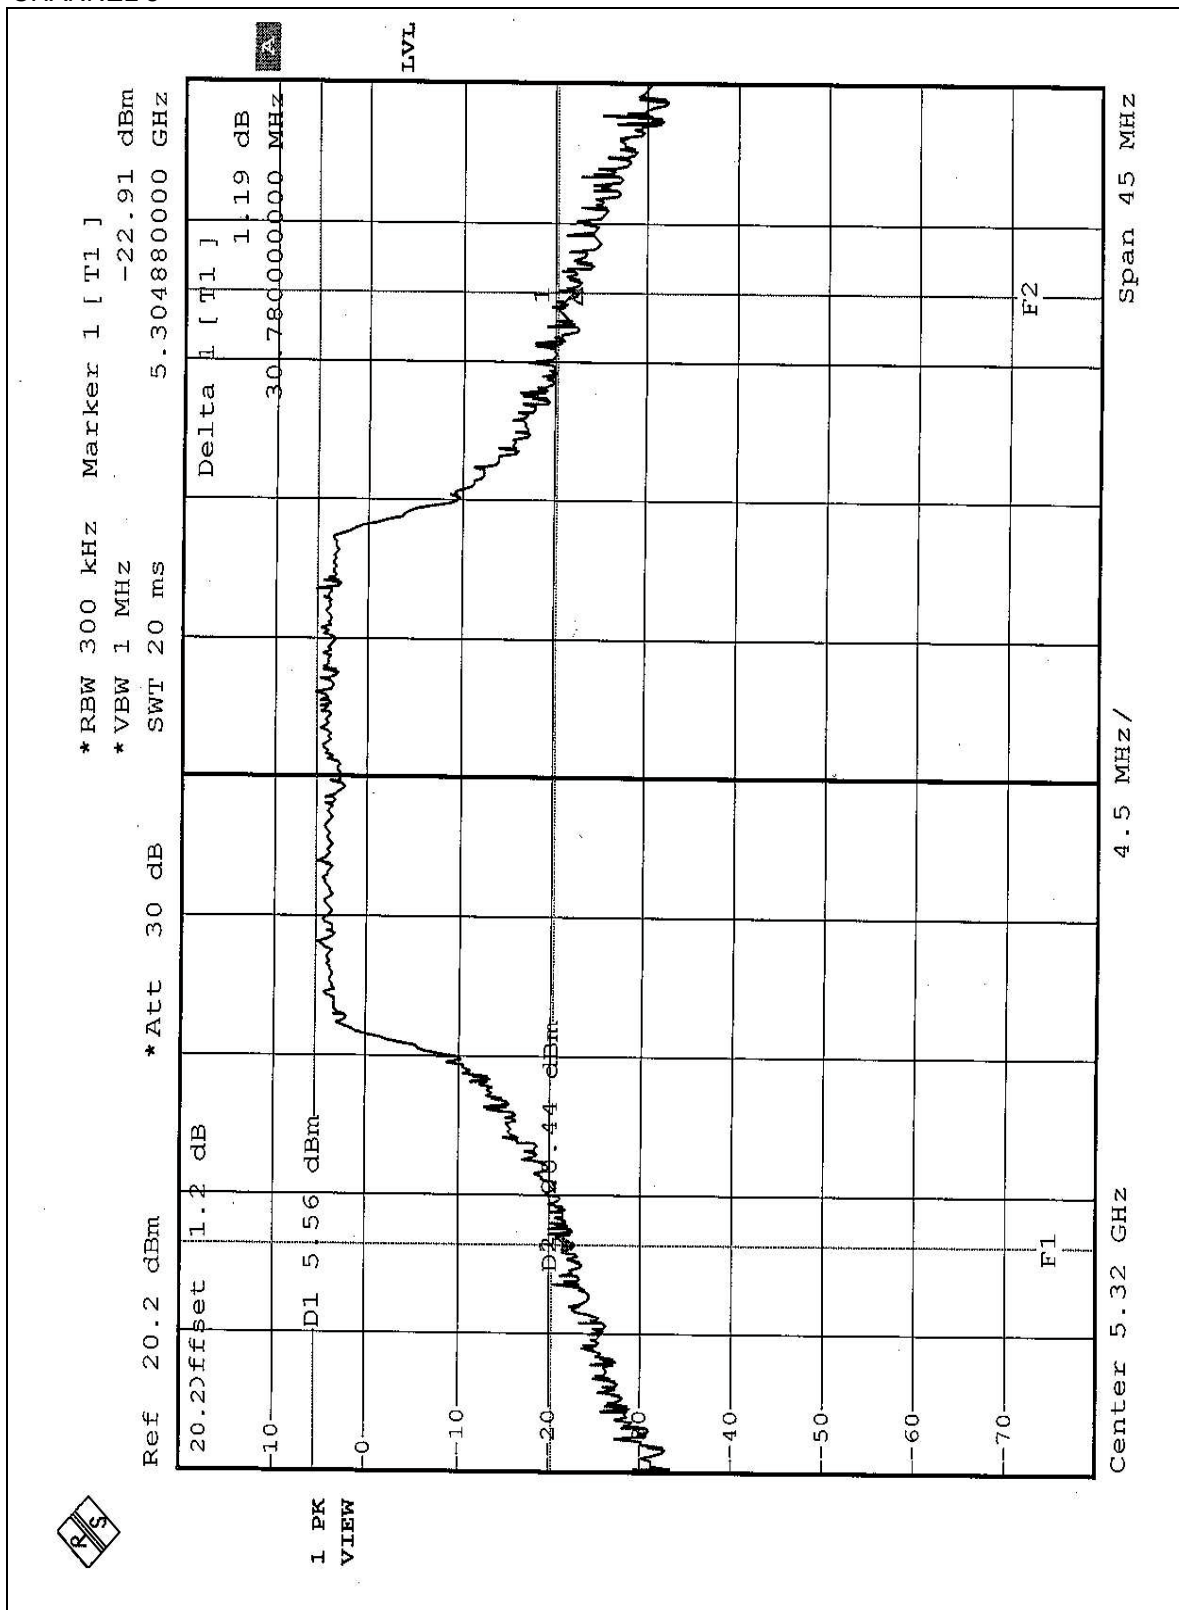


CHANNEL 9

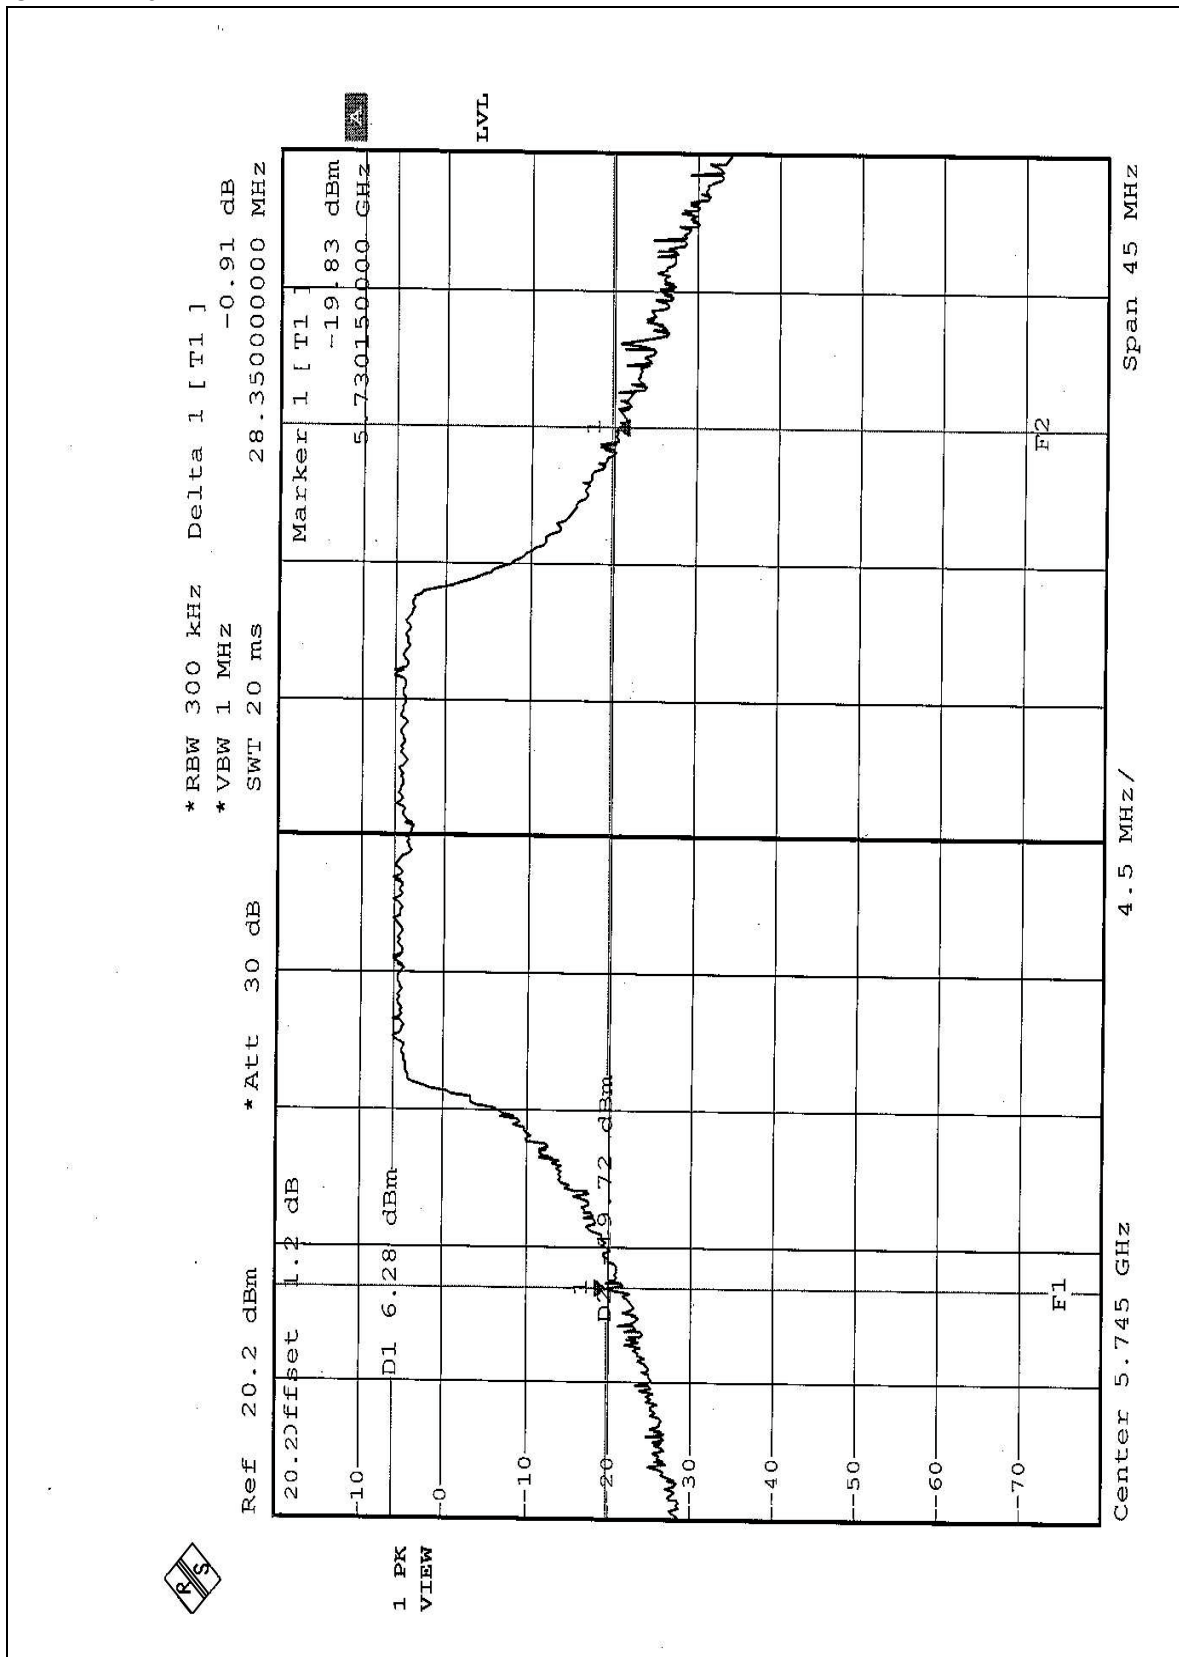



CHANNEL 12

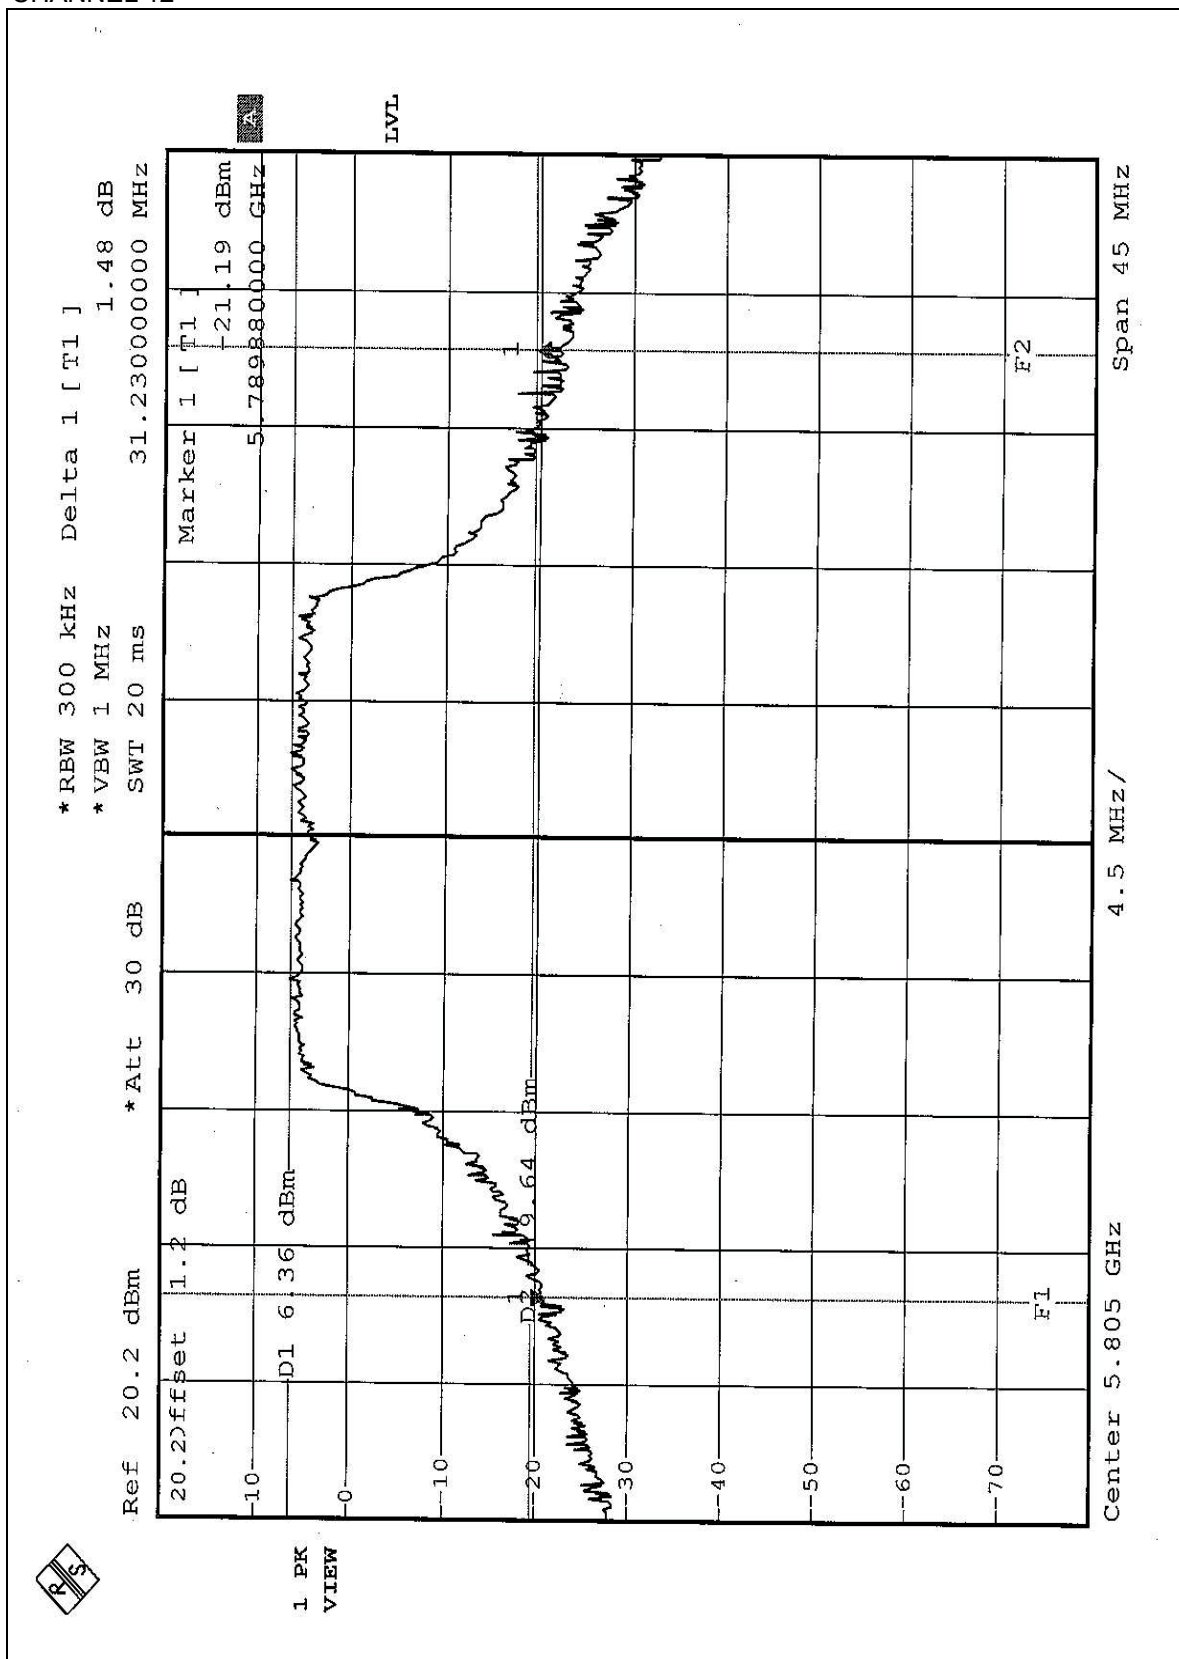




EUT	802.11a/b/g Wireless PCI Adapter	MODEL	DWL-AG520
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 64%RH, 991hPa	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5210	16.00	17.00	50.96	PASS
2	5250	15.93	17.00	57.96	PASS
3	5290	17.03	24.00	61.18	PASS
4	5760	18.13	30.00	54.60	PASS
5	5800	18.12	30.00	59.50	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.




CHANNEL 1

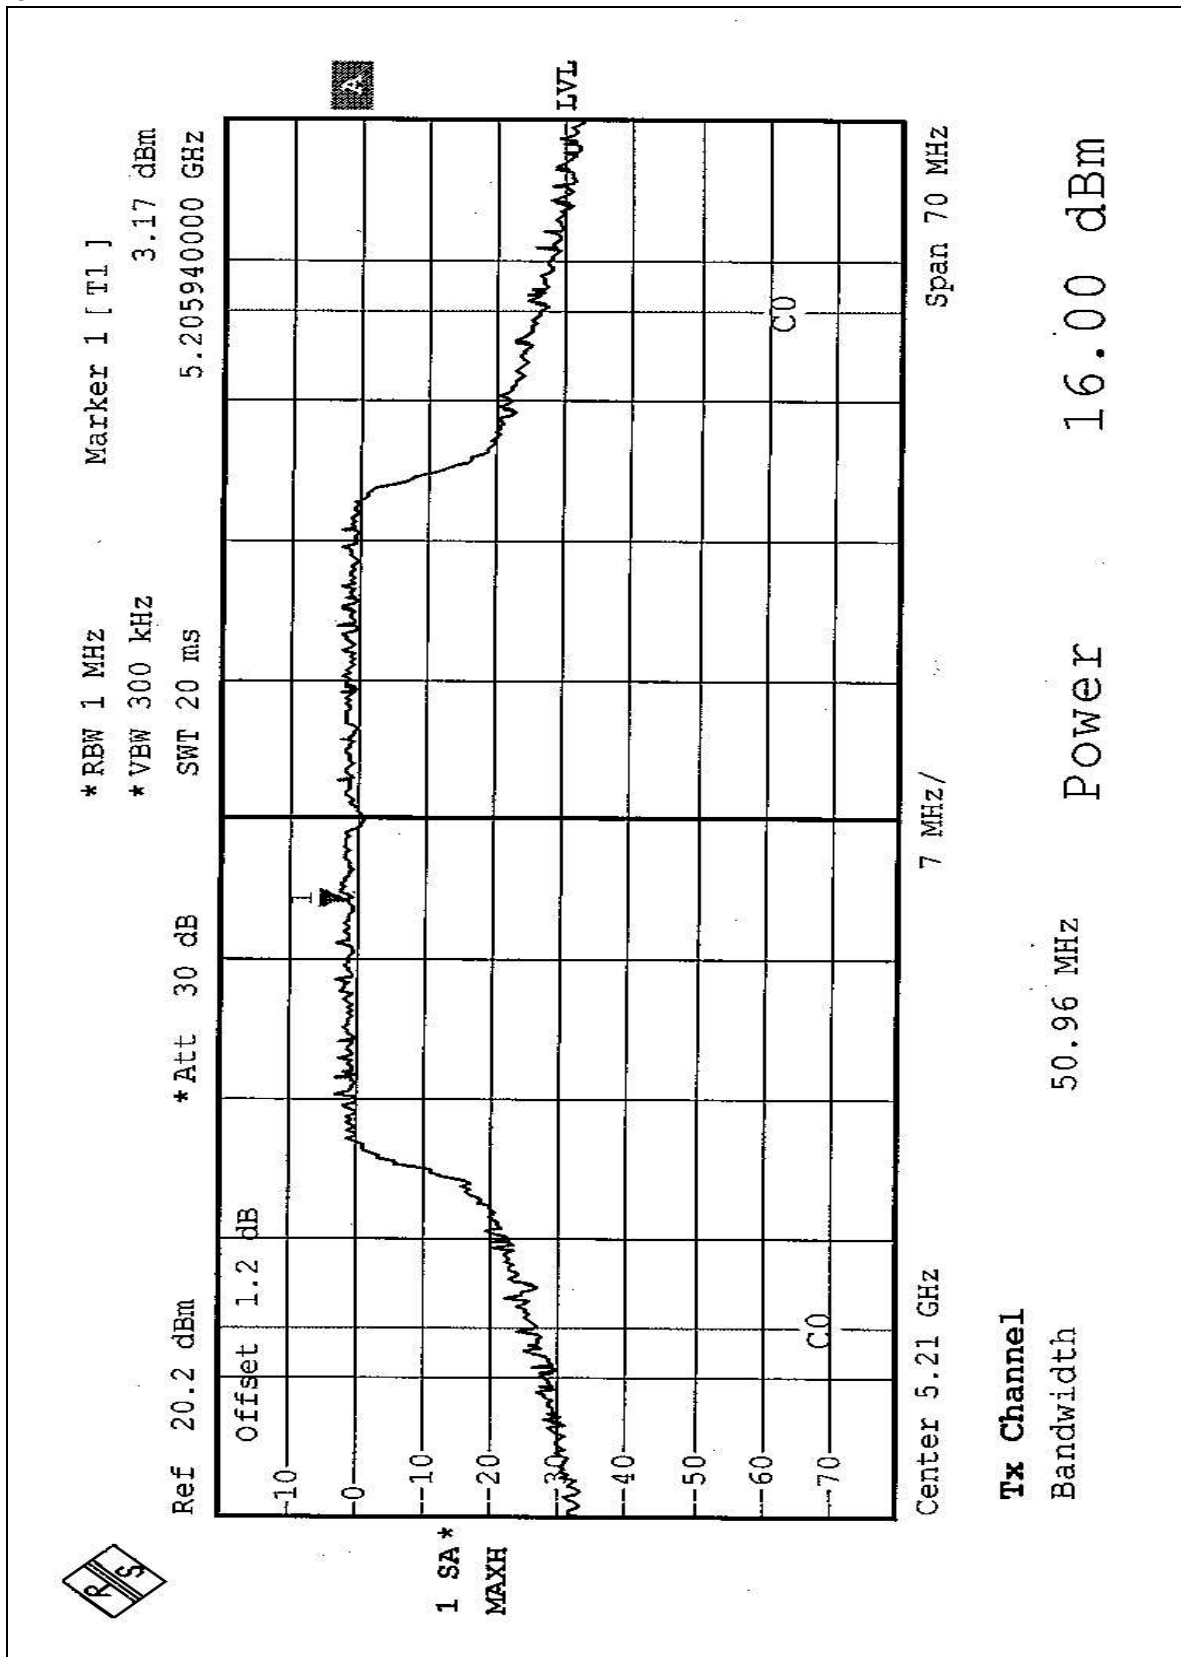




CHANNEL 2

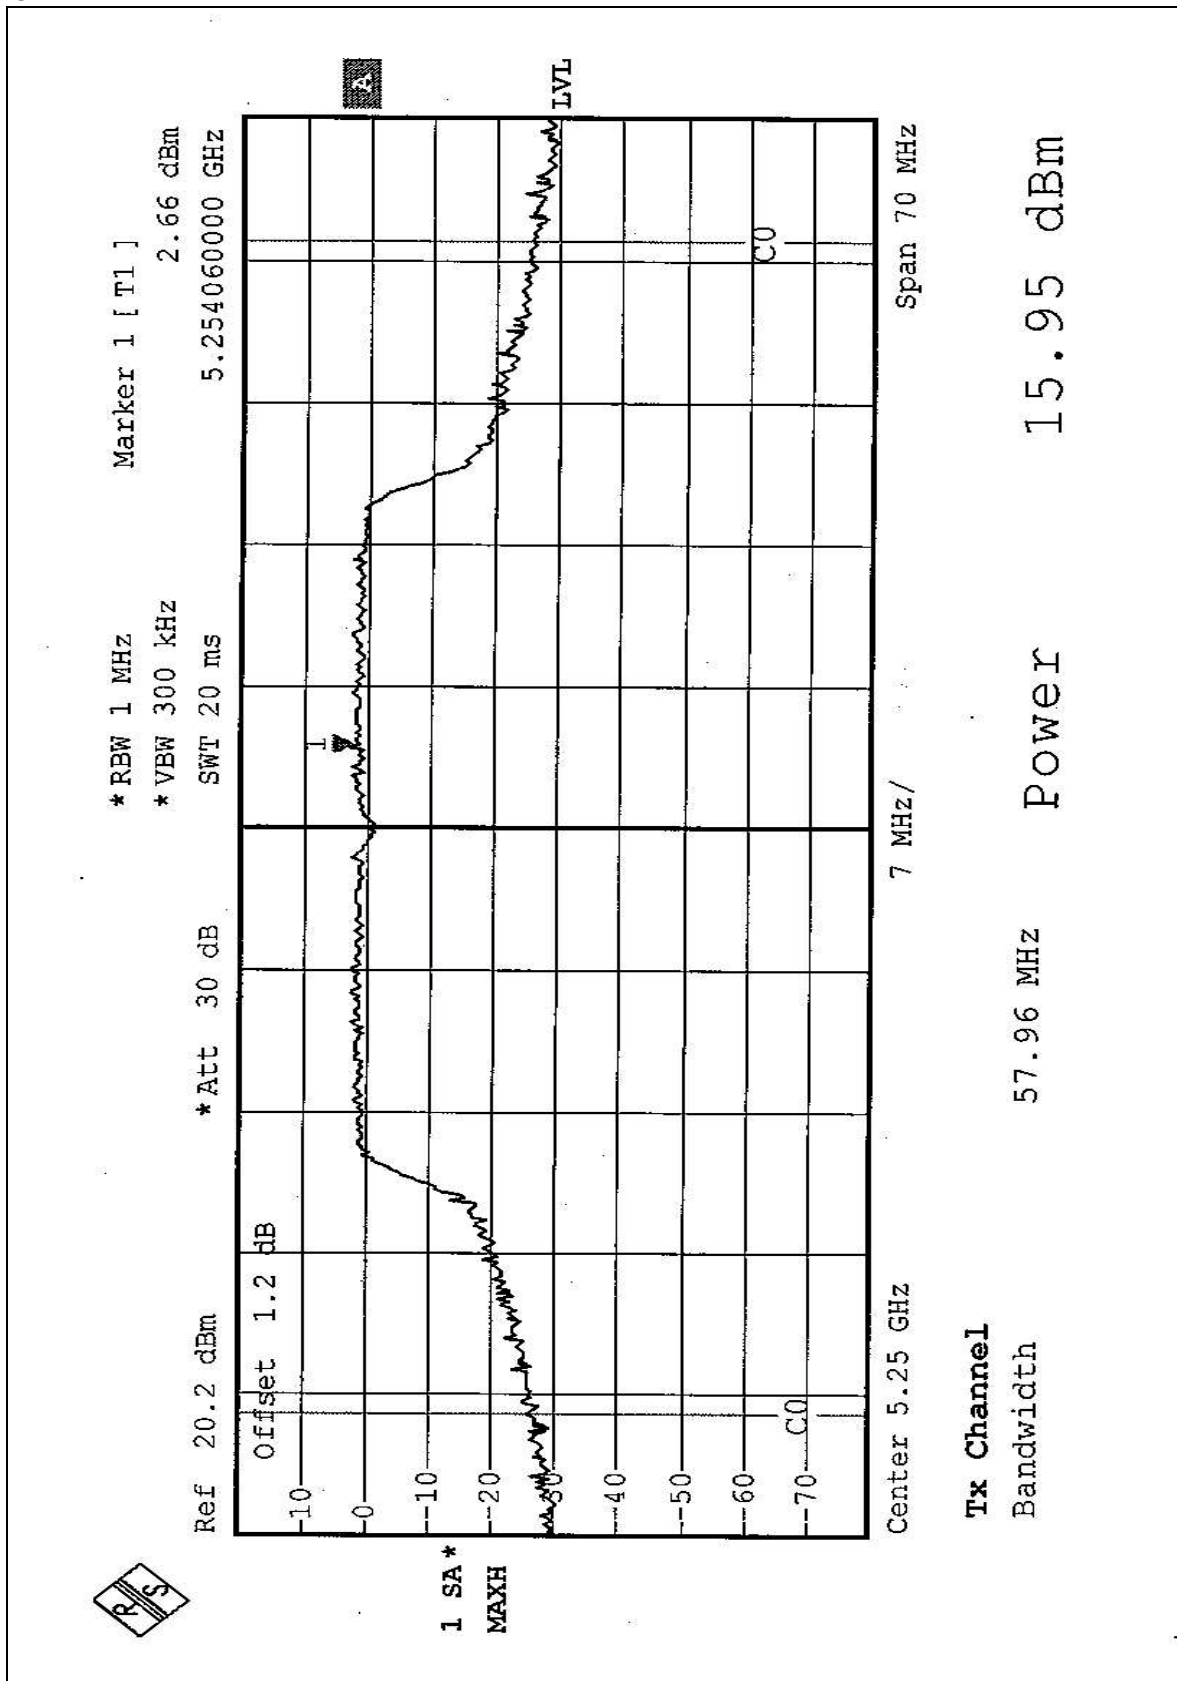


CHANNEL 3

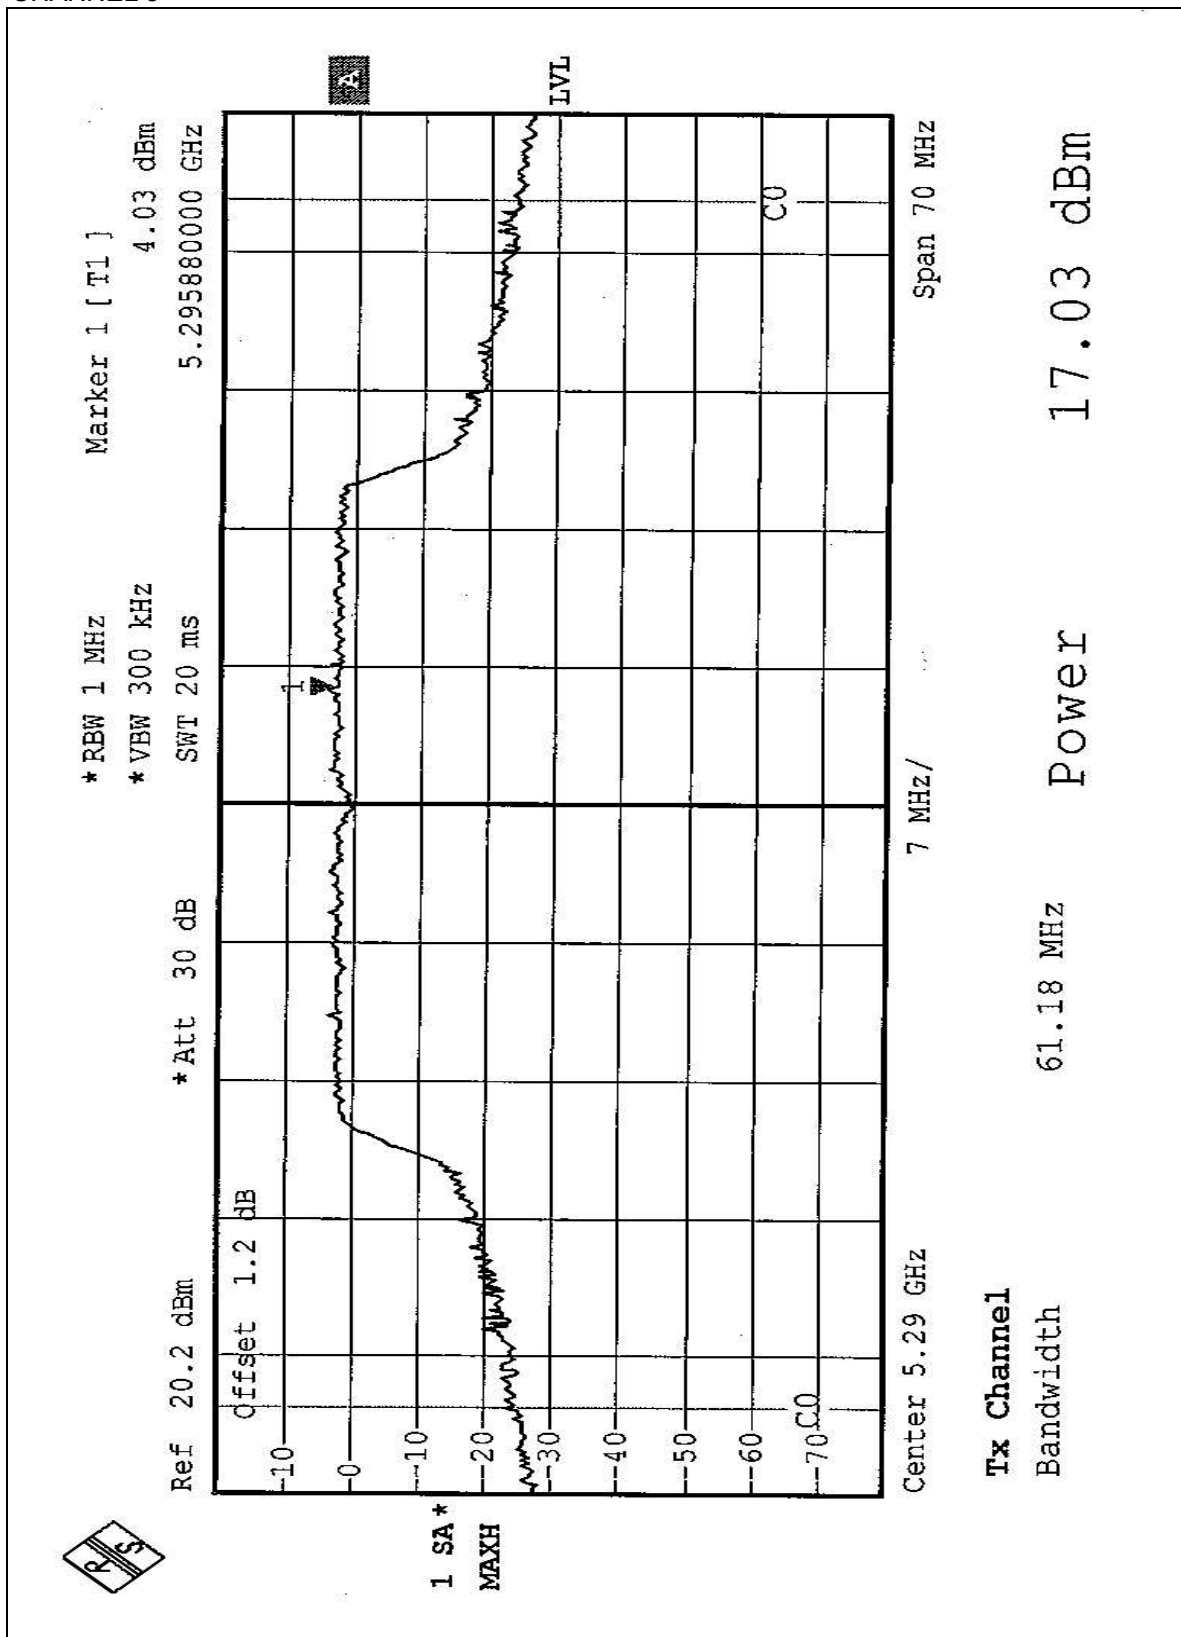




CHANNEL 4

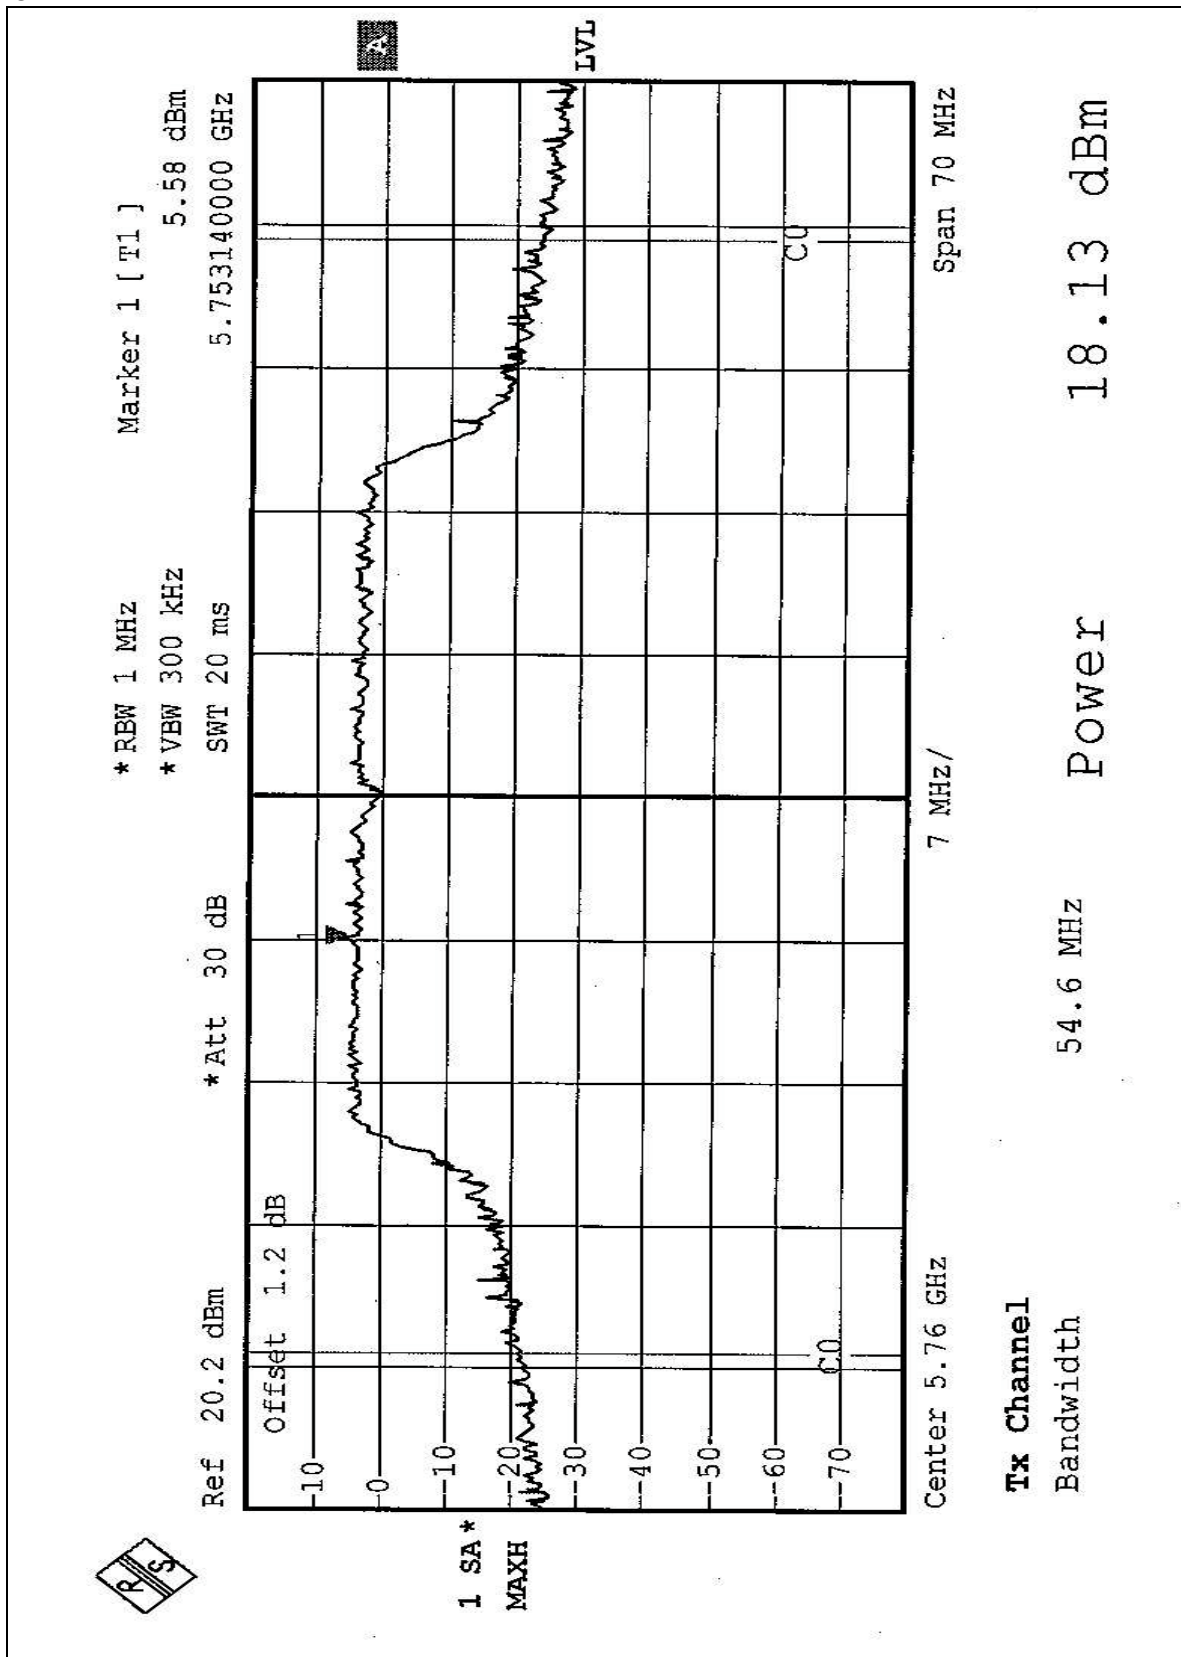





CHANNEL 5

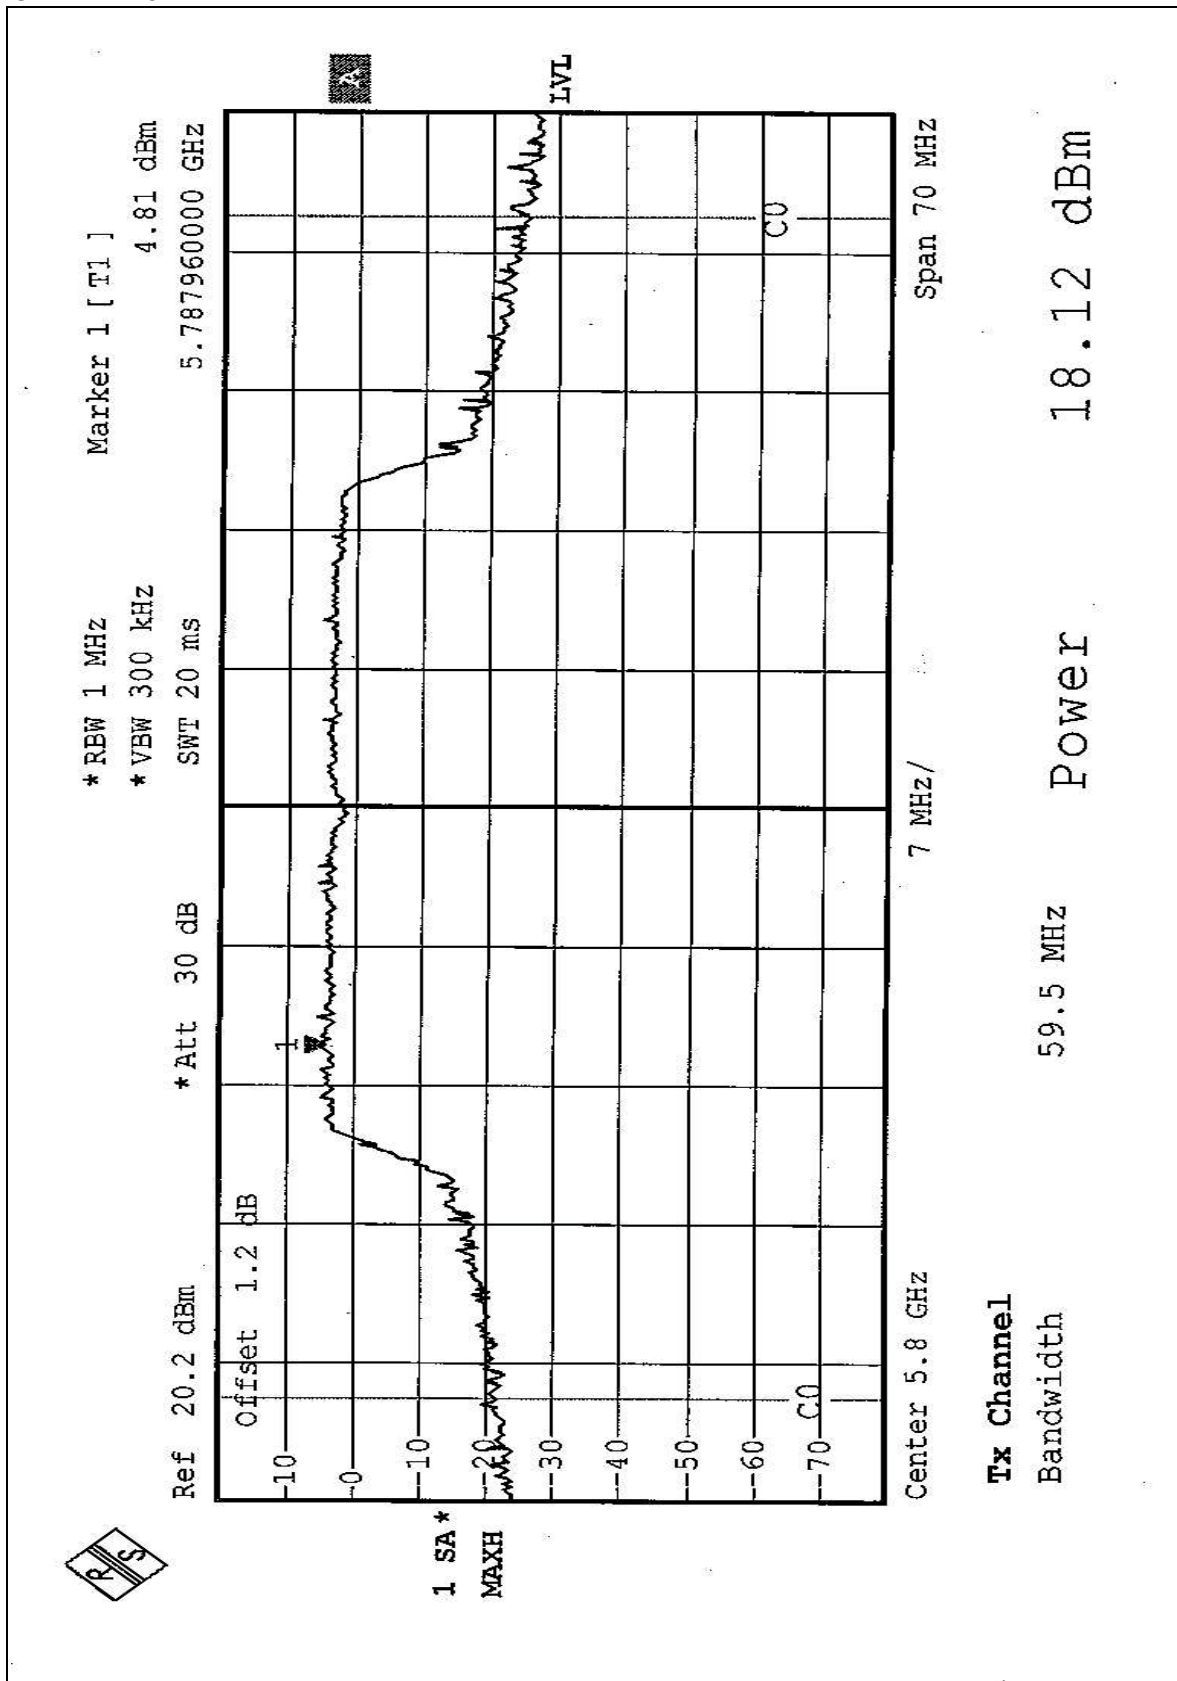


CHANNEL 1

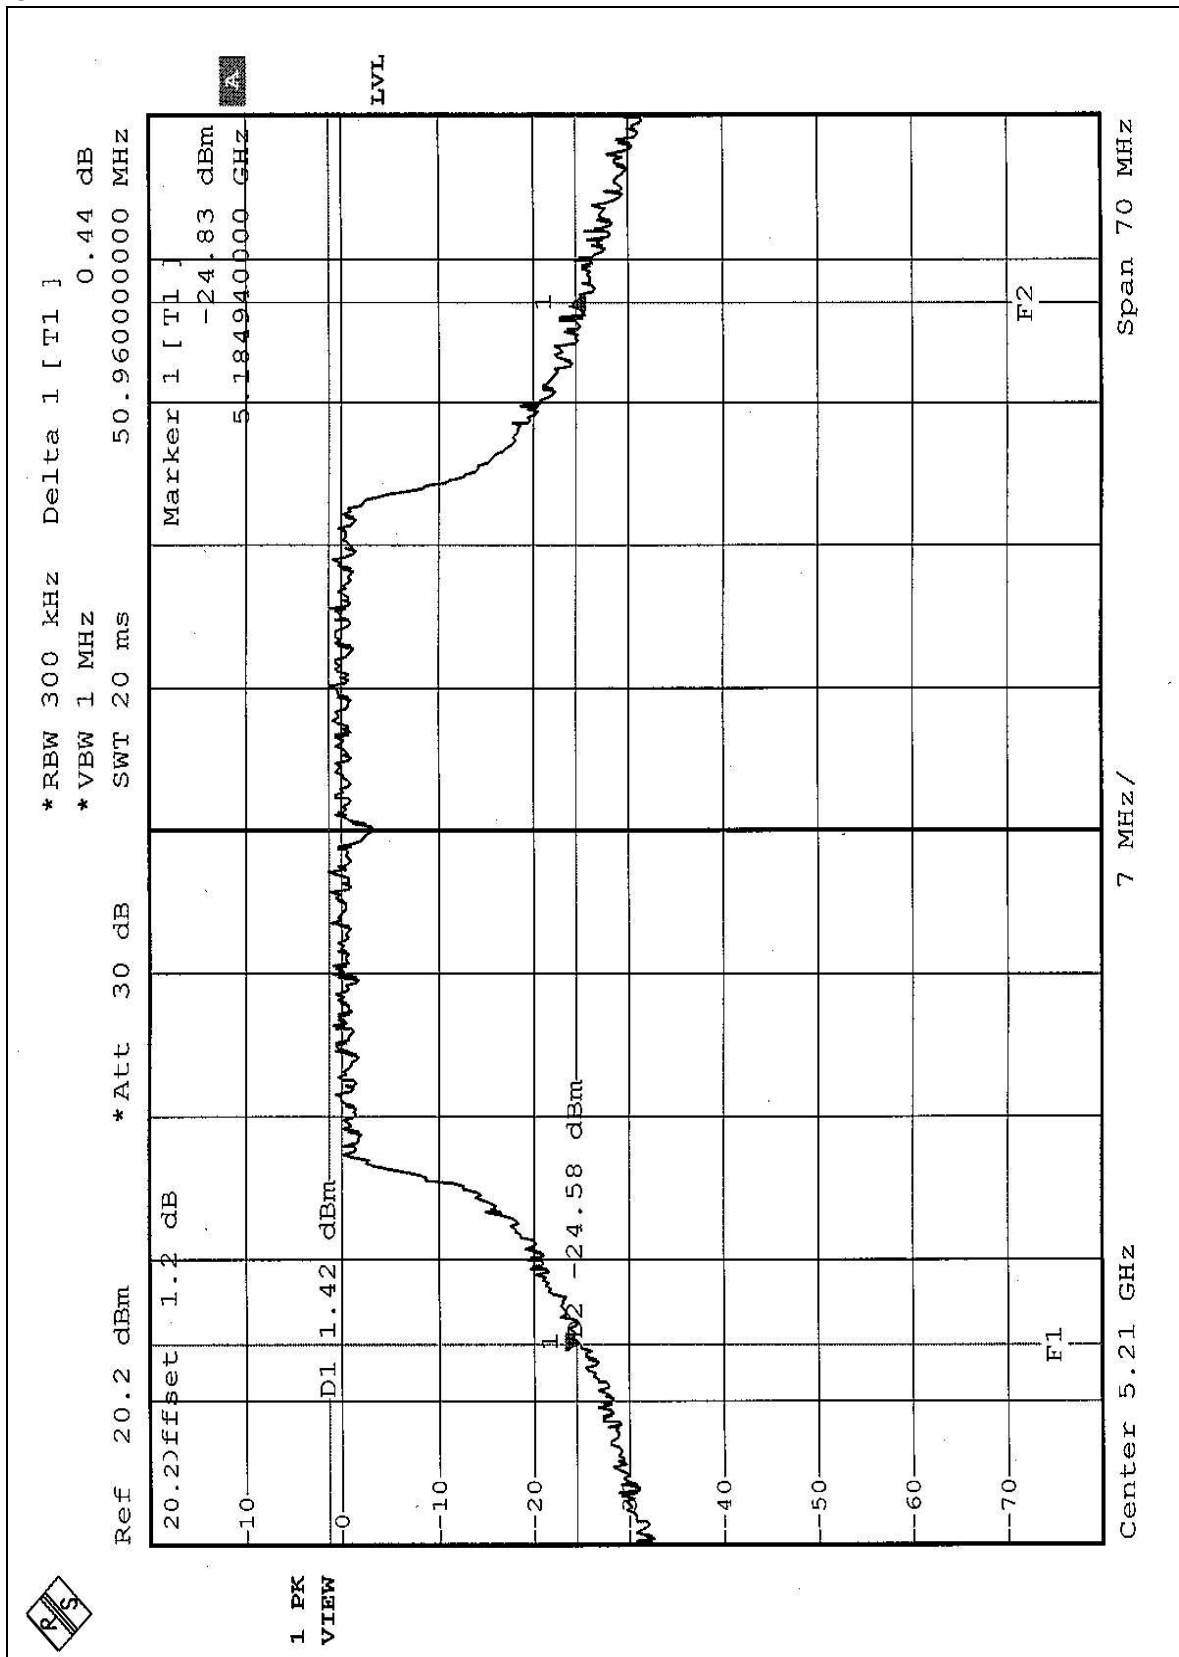

CHANNEL 2

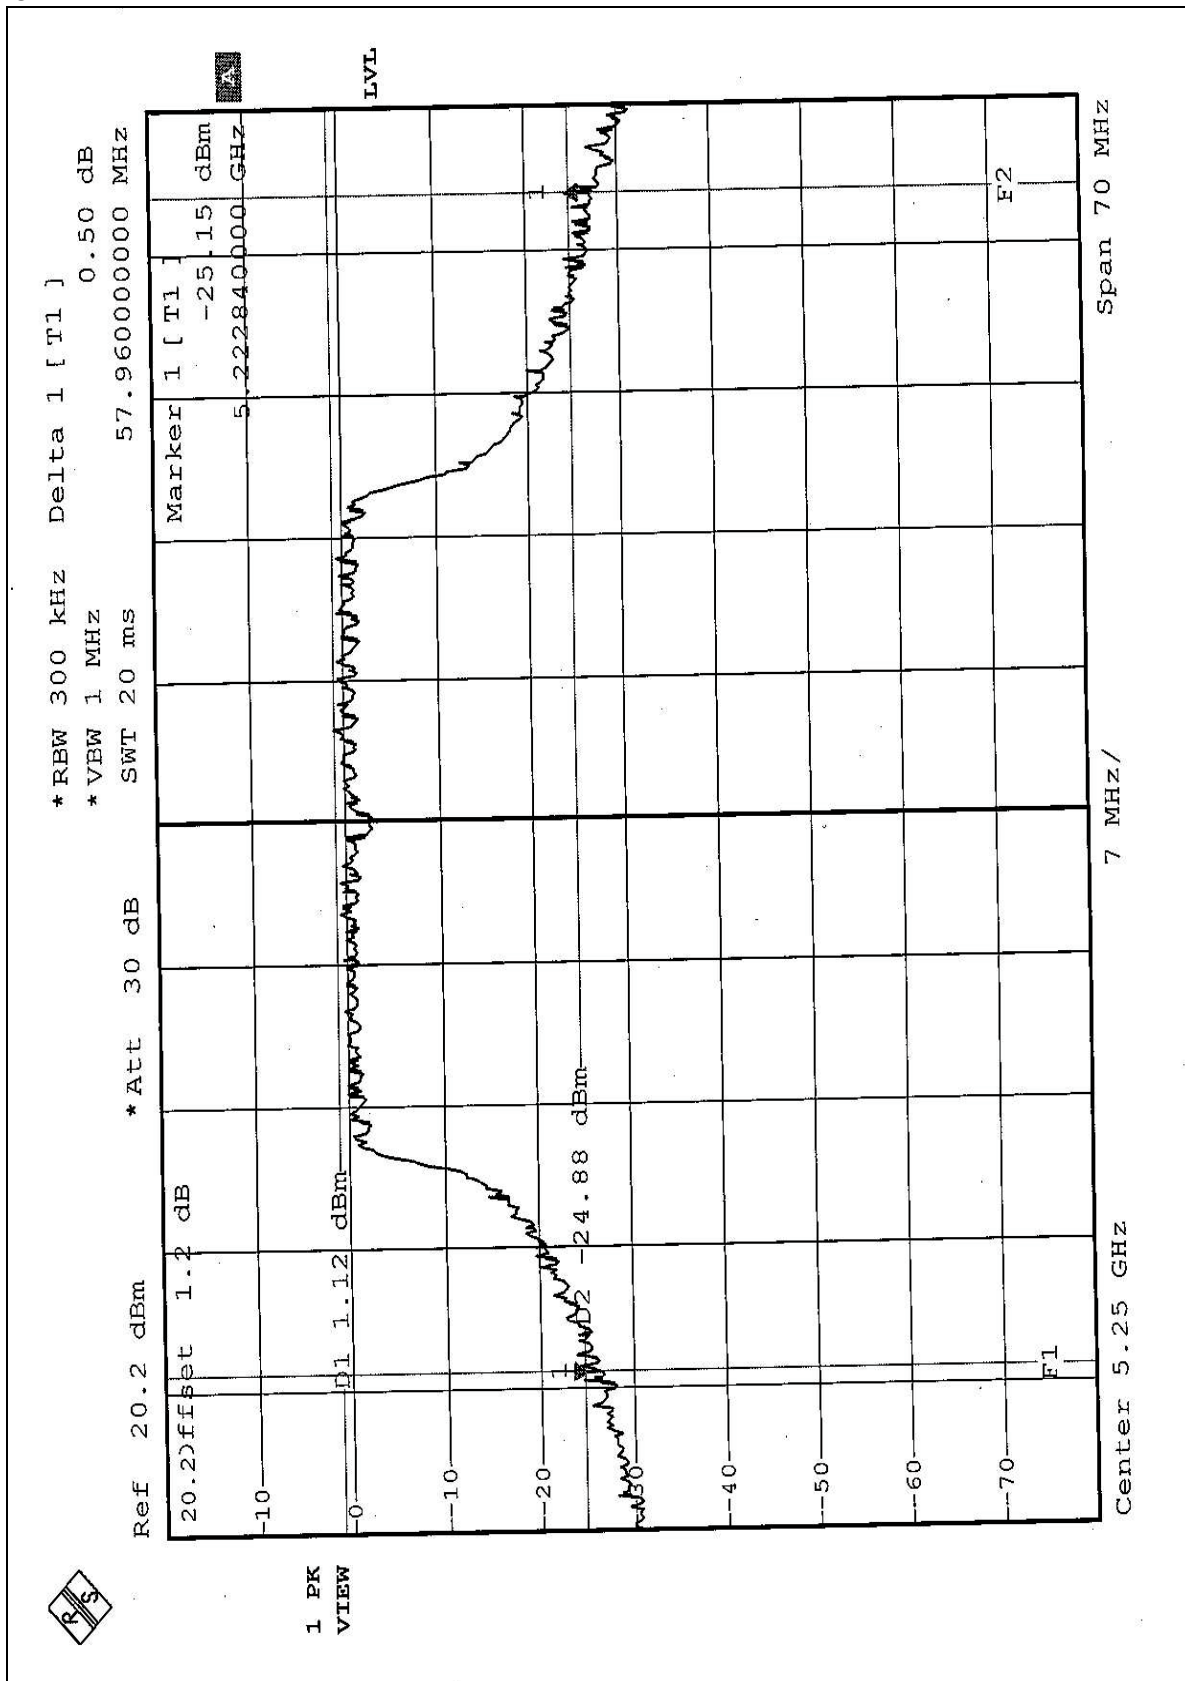


CHANNEL 3

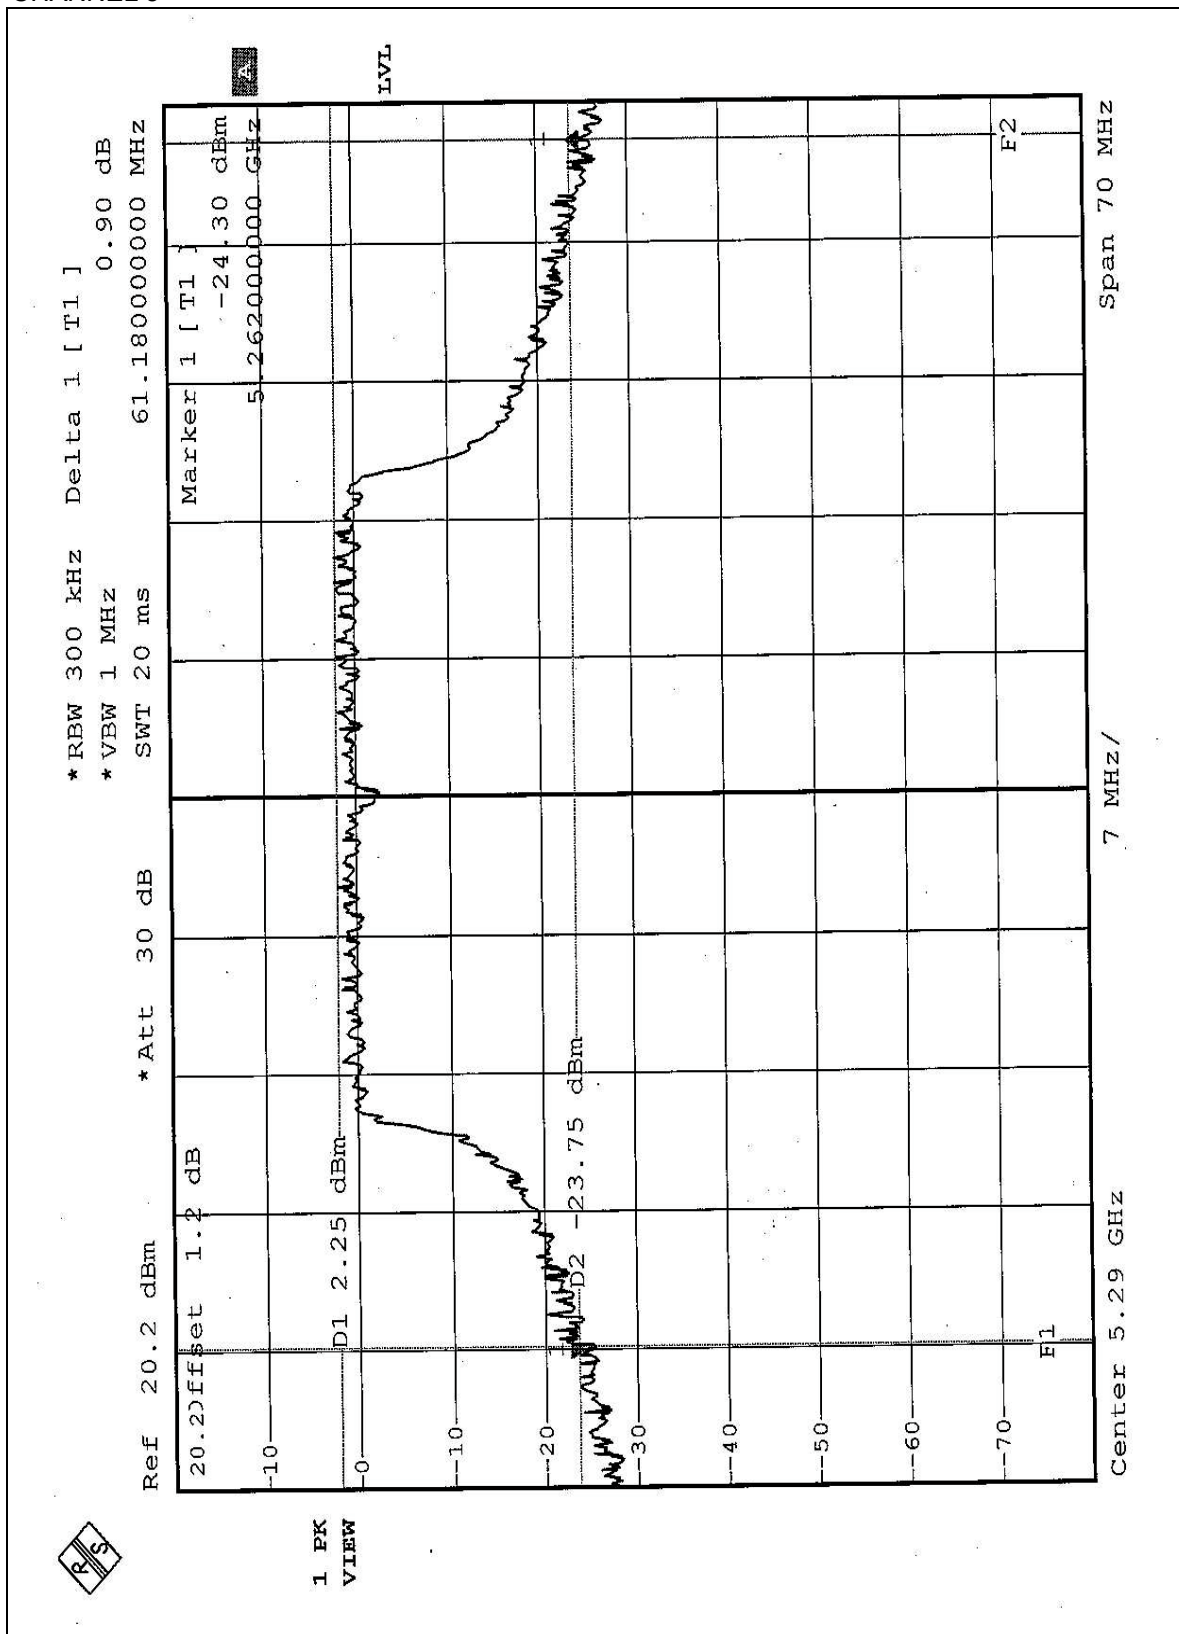




CHANNEL 4

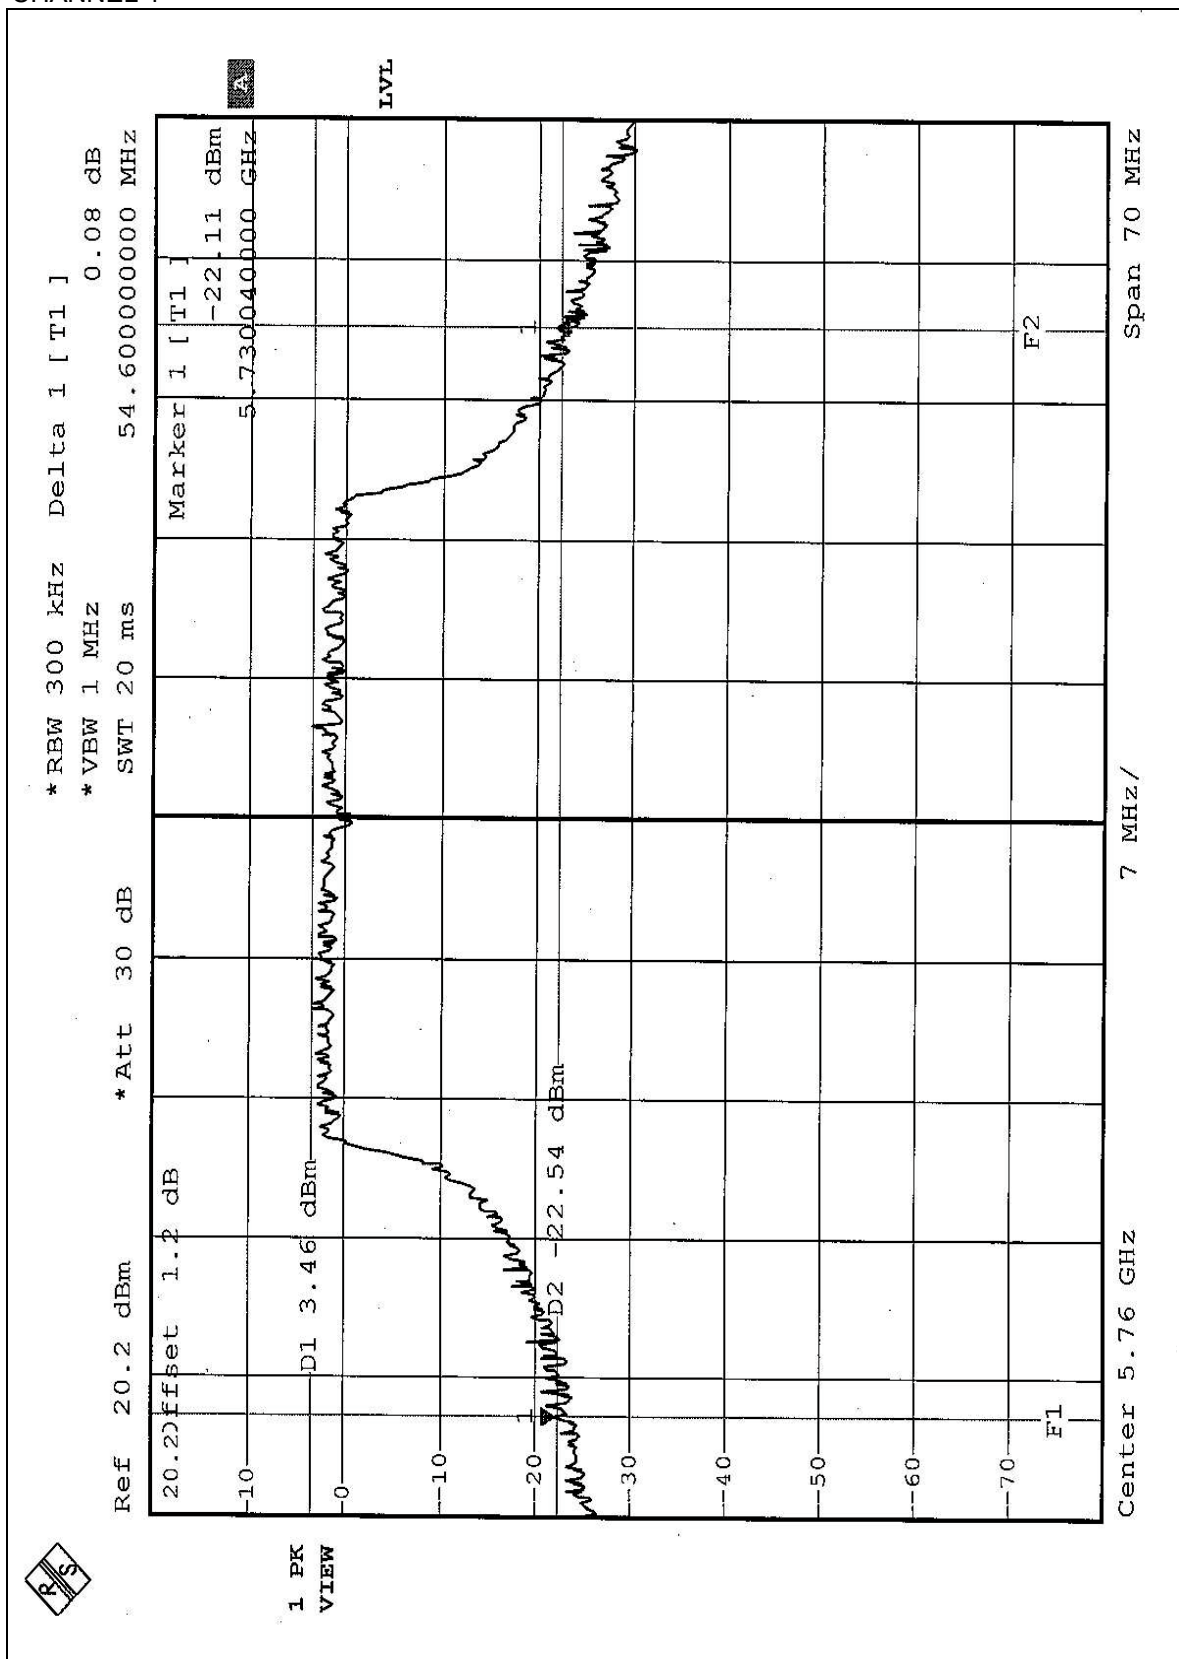

CHANNEL 5

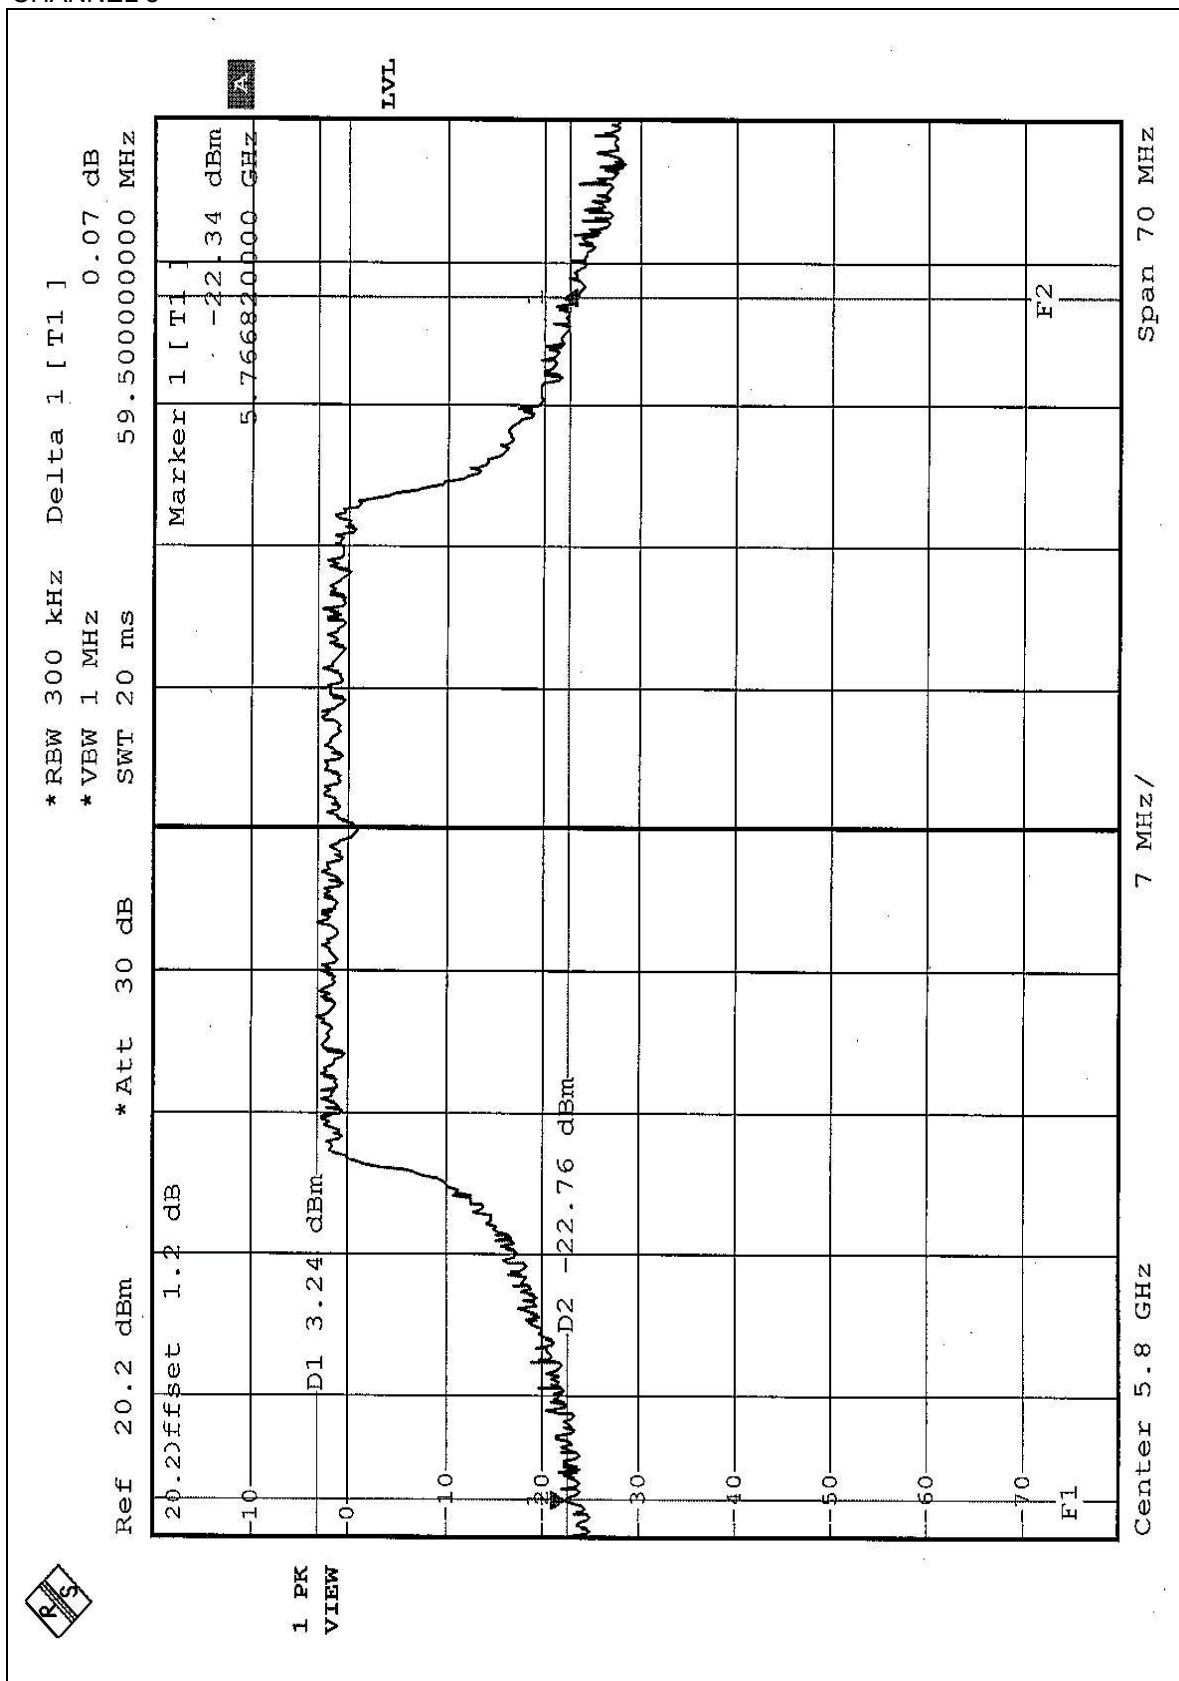

5.4 PEAK POWER EXCURSION MEASUREMENT

5.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

5.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	August 12, 2004
SPECTRUM ANALYZER	8564EC	4208A00660	Nov. 20, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

5.4.7 TEST RESULTS

EUT	802.11a/b/g Wireless PCI Adapter	MODEL	DWL-AG520
MODE	Normal	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 64%RH, 991hPa	TESTED BY	Hank Chung


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	8.05	13	PASS
4	5240	7.41	13	PASS
5	5260	7.28	13	PASS
8	5320	6.87	13	PASS
9	5745	4.77	13	PASS
12	5805	7.52	13	PASS

CHANNEL 1

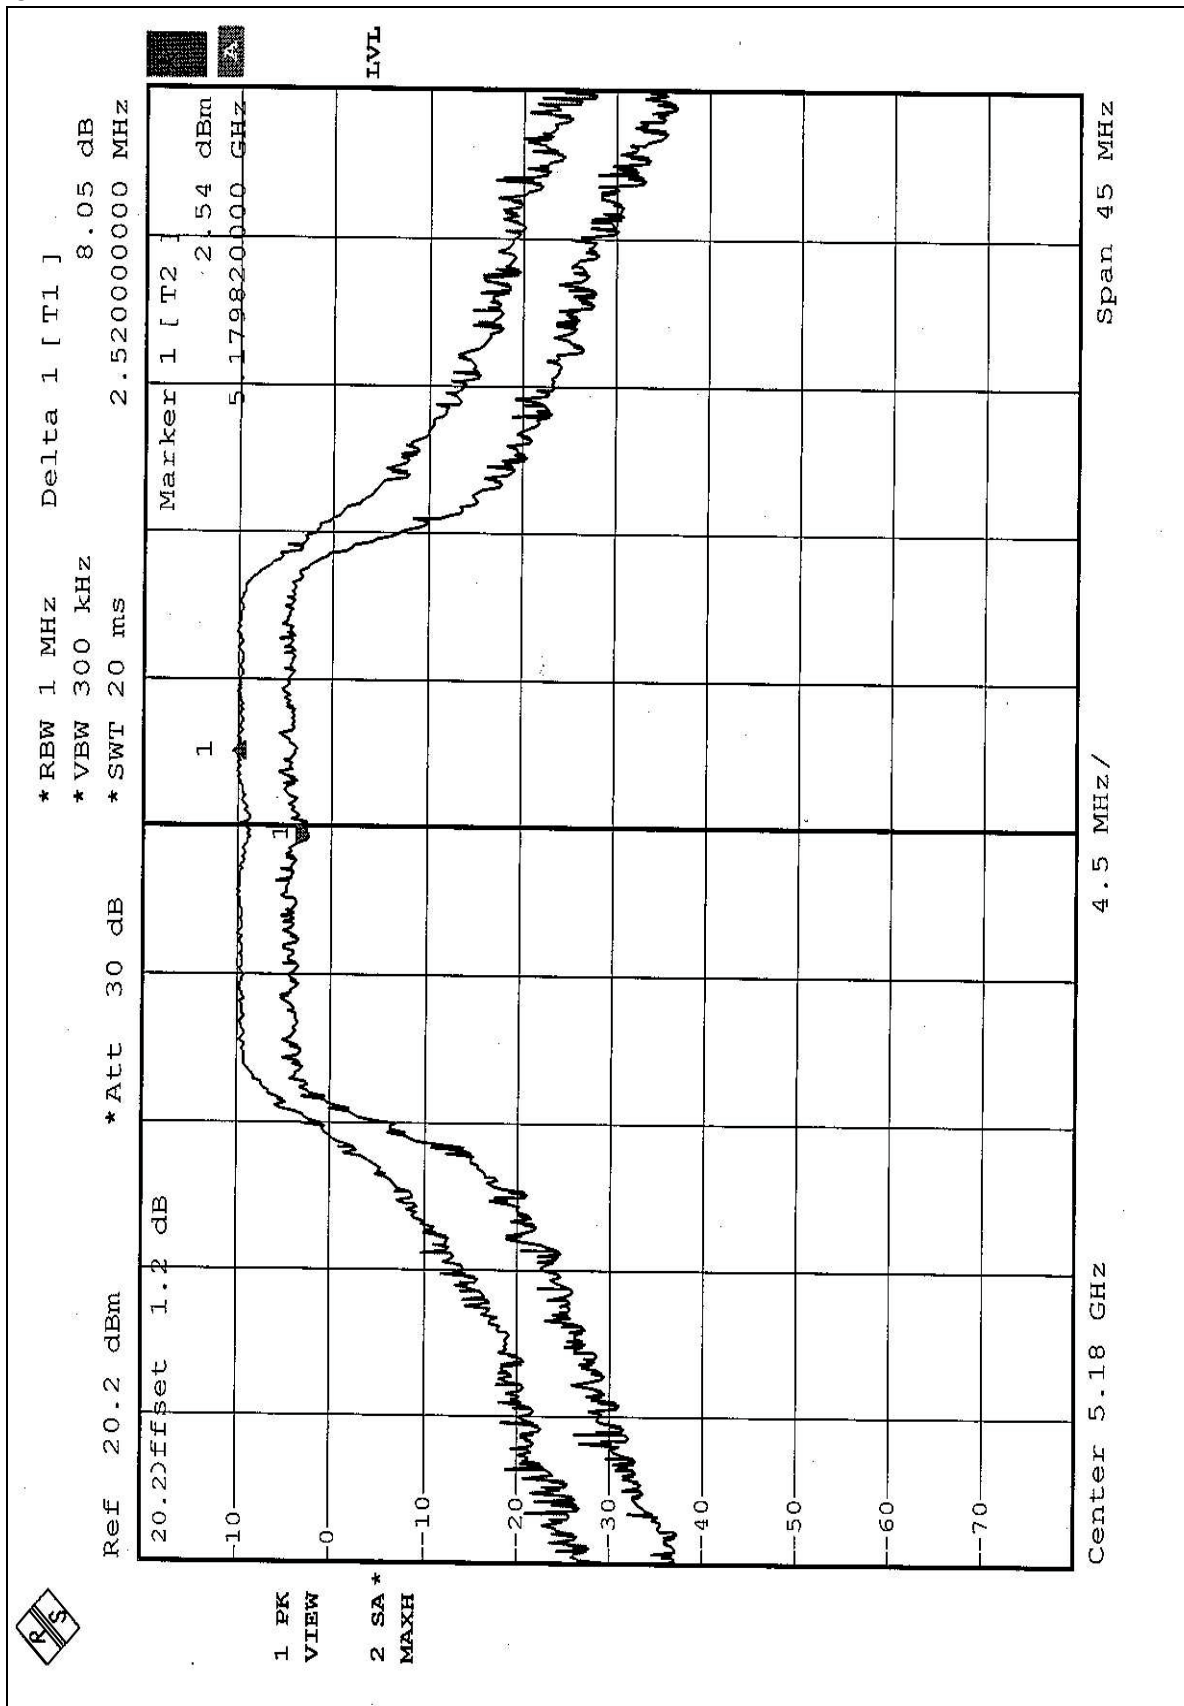




CHANNEL 4

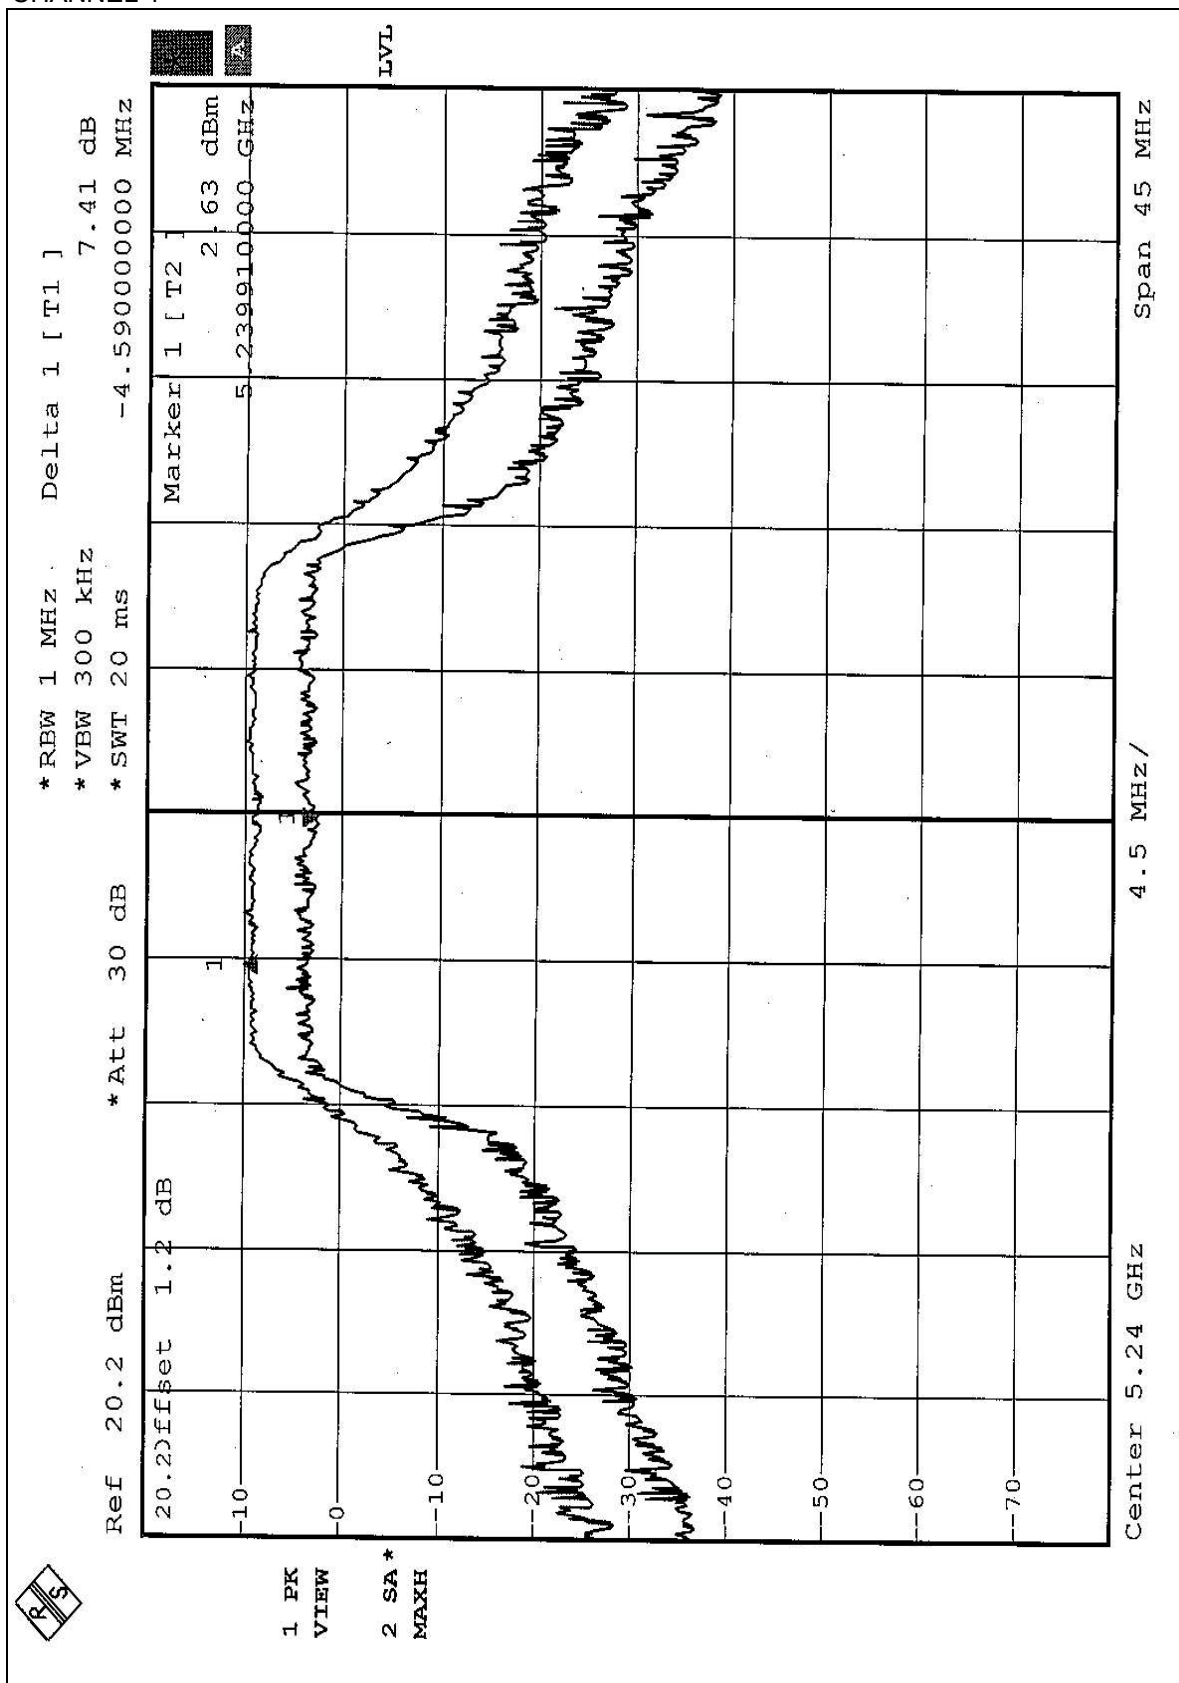


* RBW 1 MHz
 * VBW 300 kHz
 * Att 30 dB
 * SWT 20 ms
 Delta 1 [T1]
 7.28 dB
 -5.760000000 MHz
 Marker 1 [T2]
 3.10 dBm
 5.259640000 GHz
 Center 5.26 GHz
 Span 45 MHz
 4.5 MHz/div

CHANNEL 8

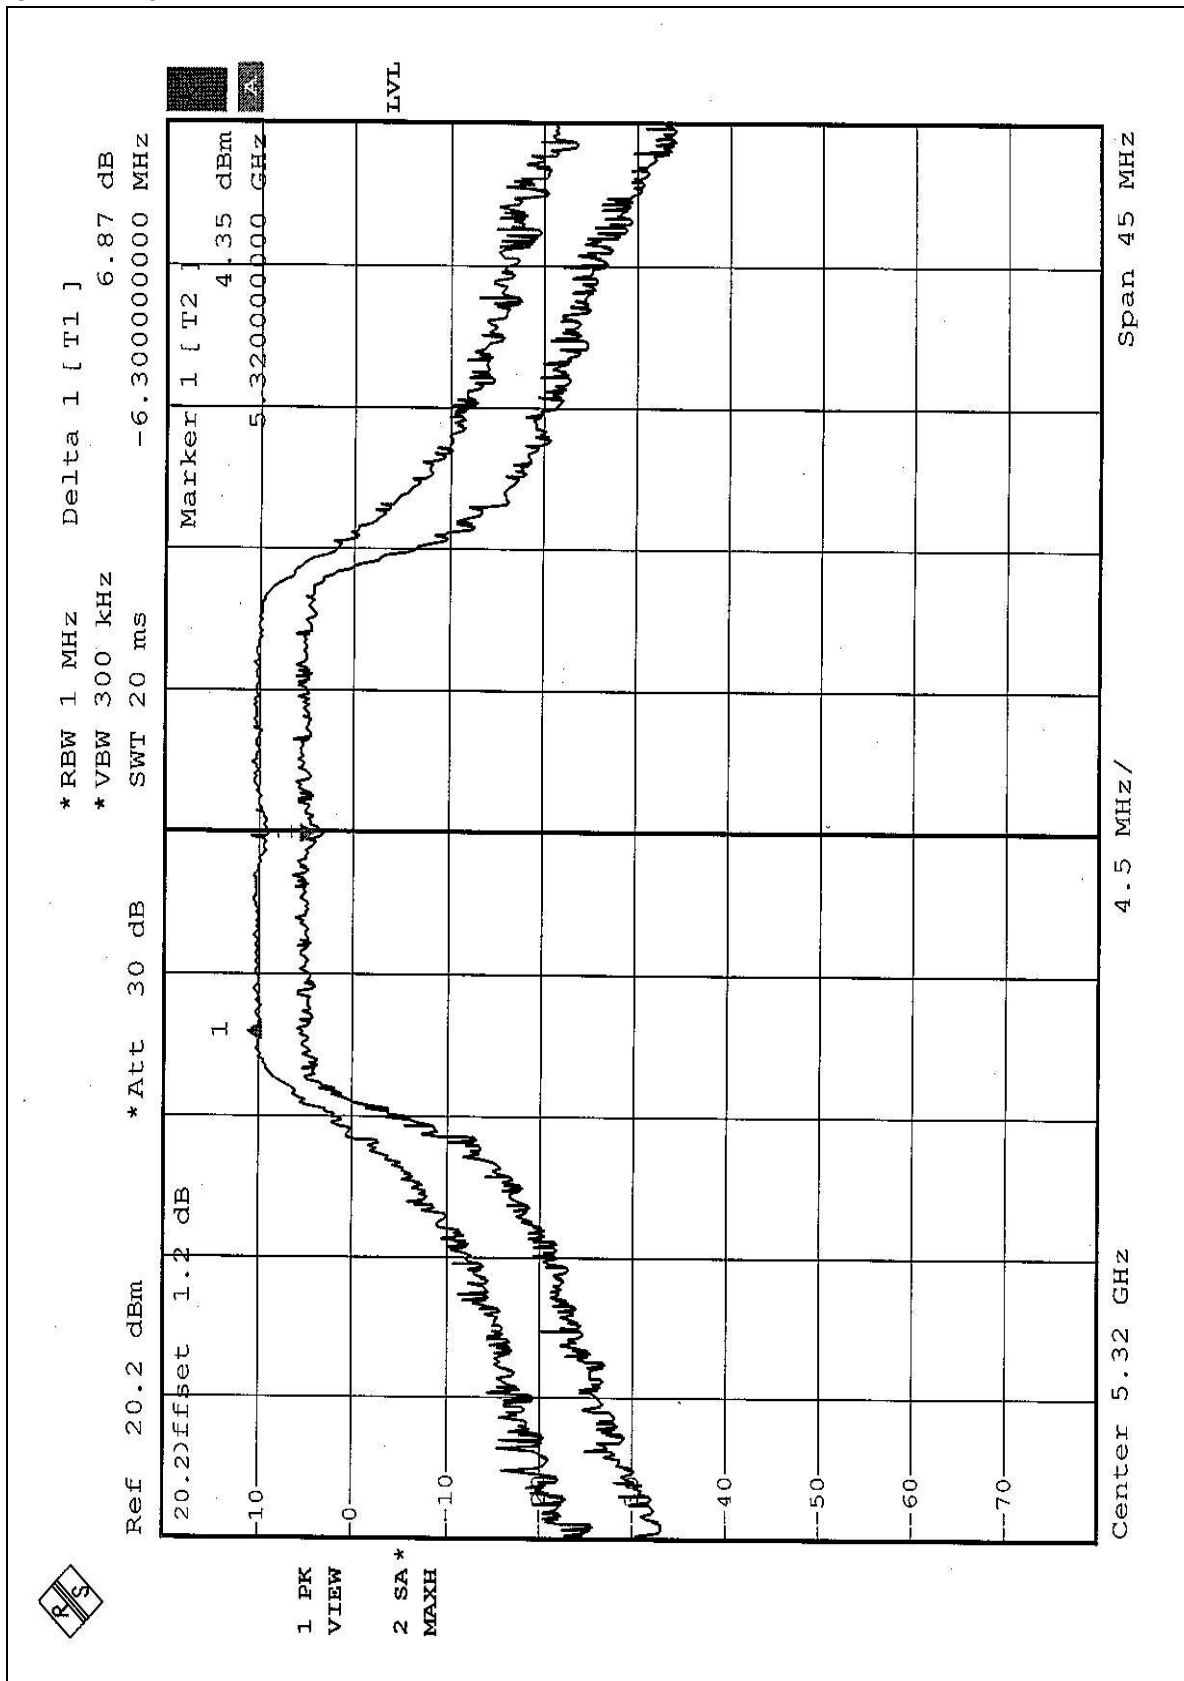




CHANNEL 9

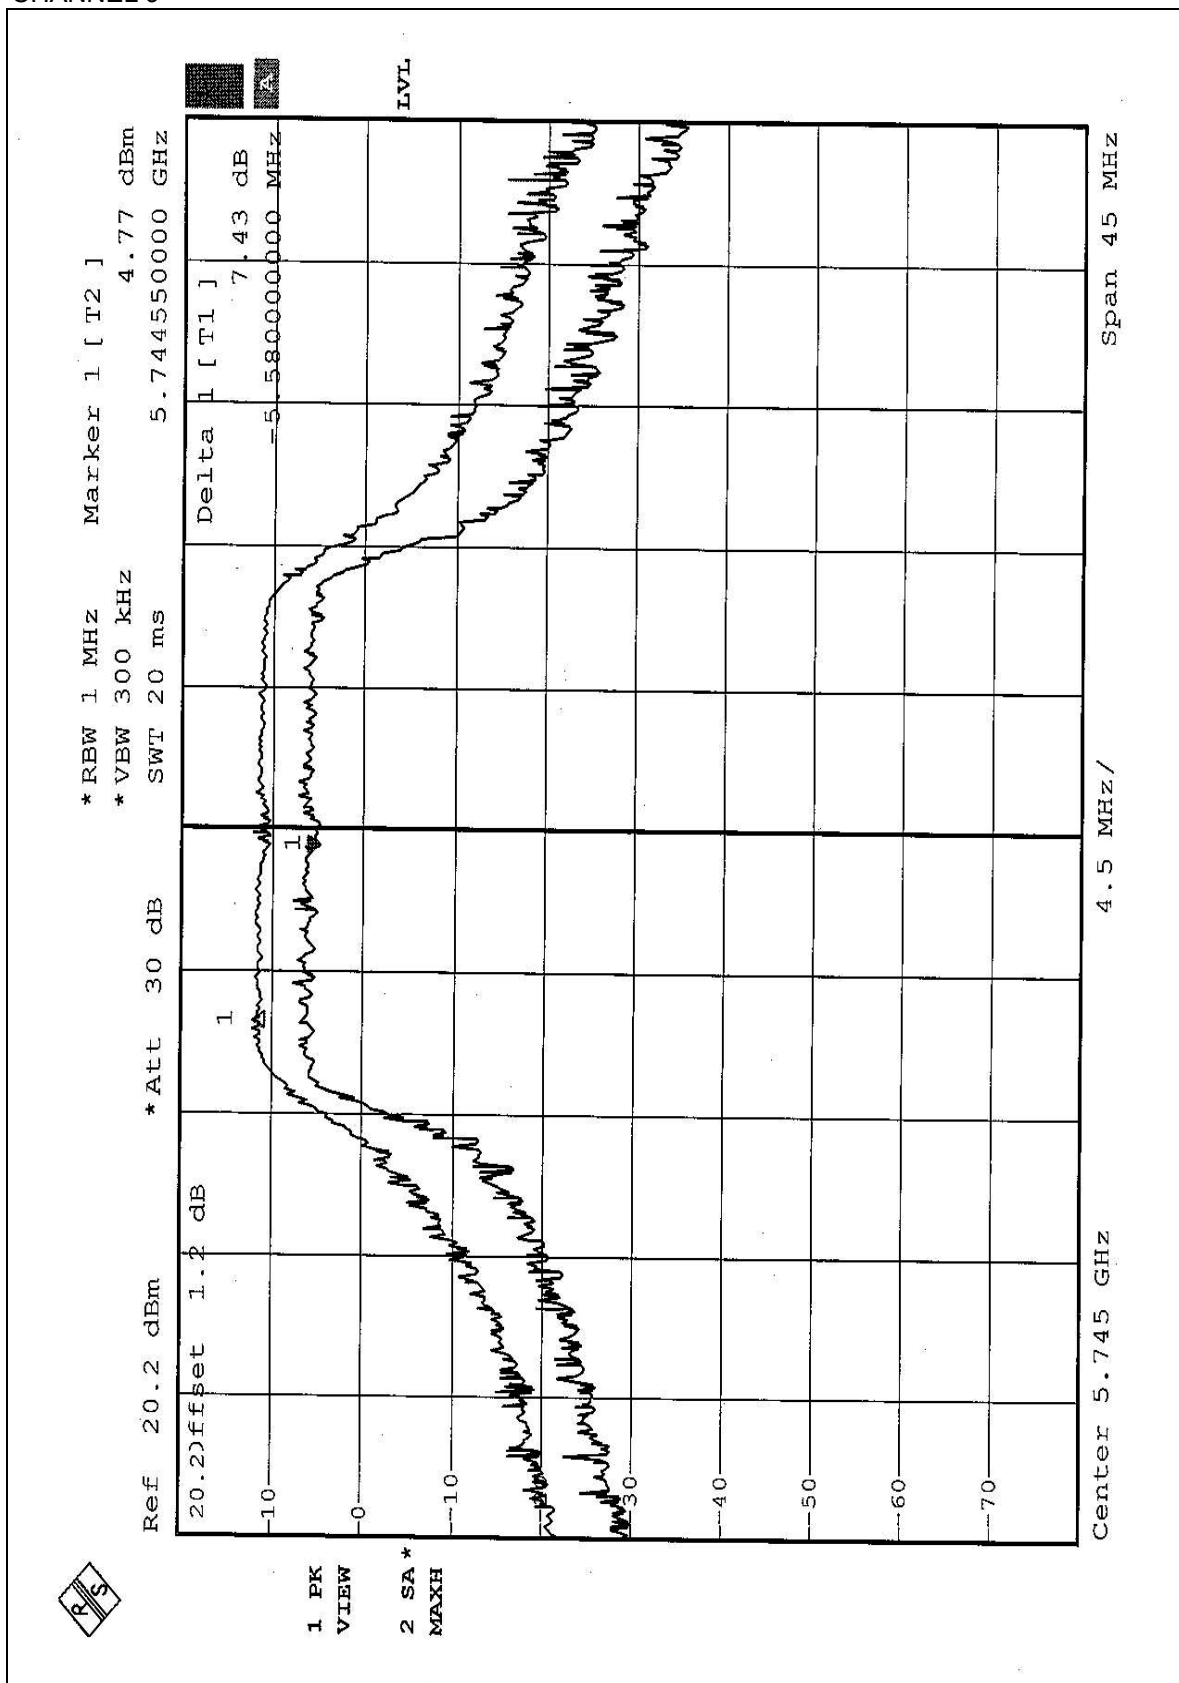

CHANNEL 12

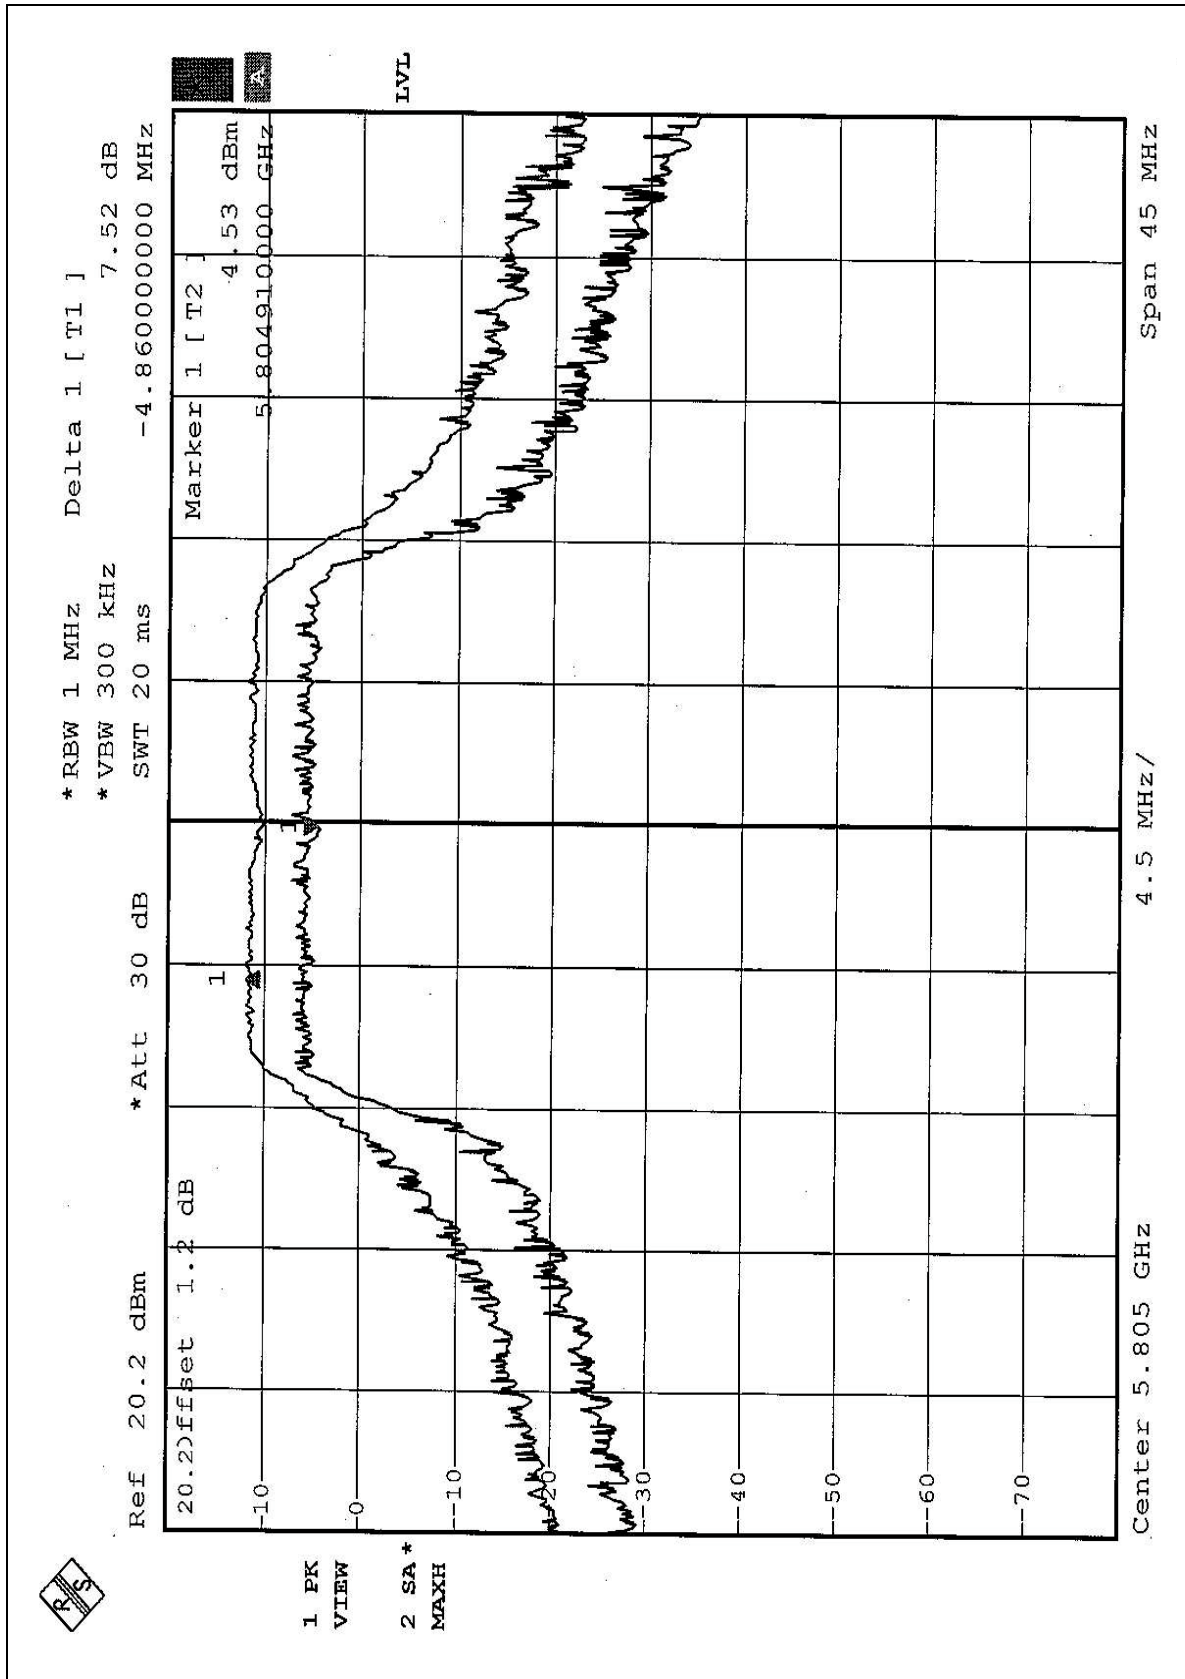





EUT	802.11a/b/g Wireless PCI Adapter	MODEL	DWL-AG520
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 64%RH, 991hPa	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5210	7.73	13	PASS
2	5250	8.39	13	PASS
3	5290	8.58	13	PASS
4	5760	8.04	13	PASS
5	5800	8.47	13	PASS

CHANNEL 1

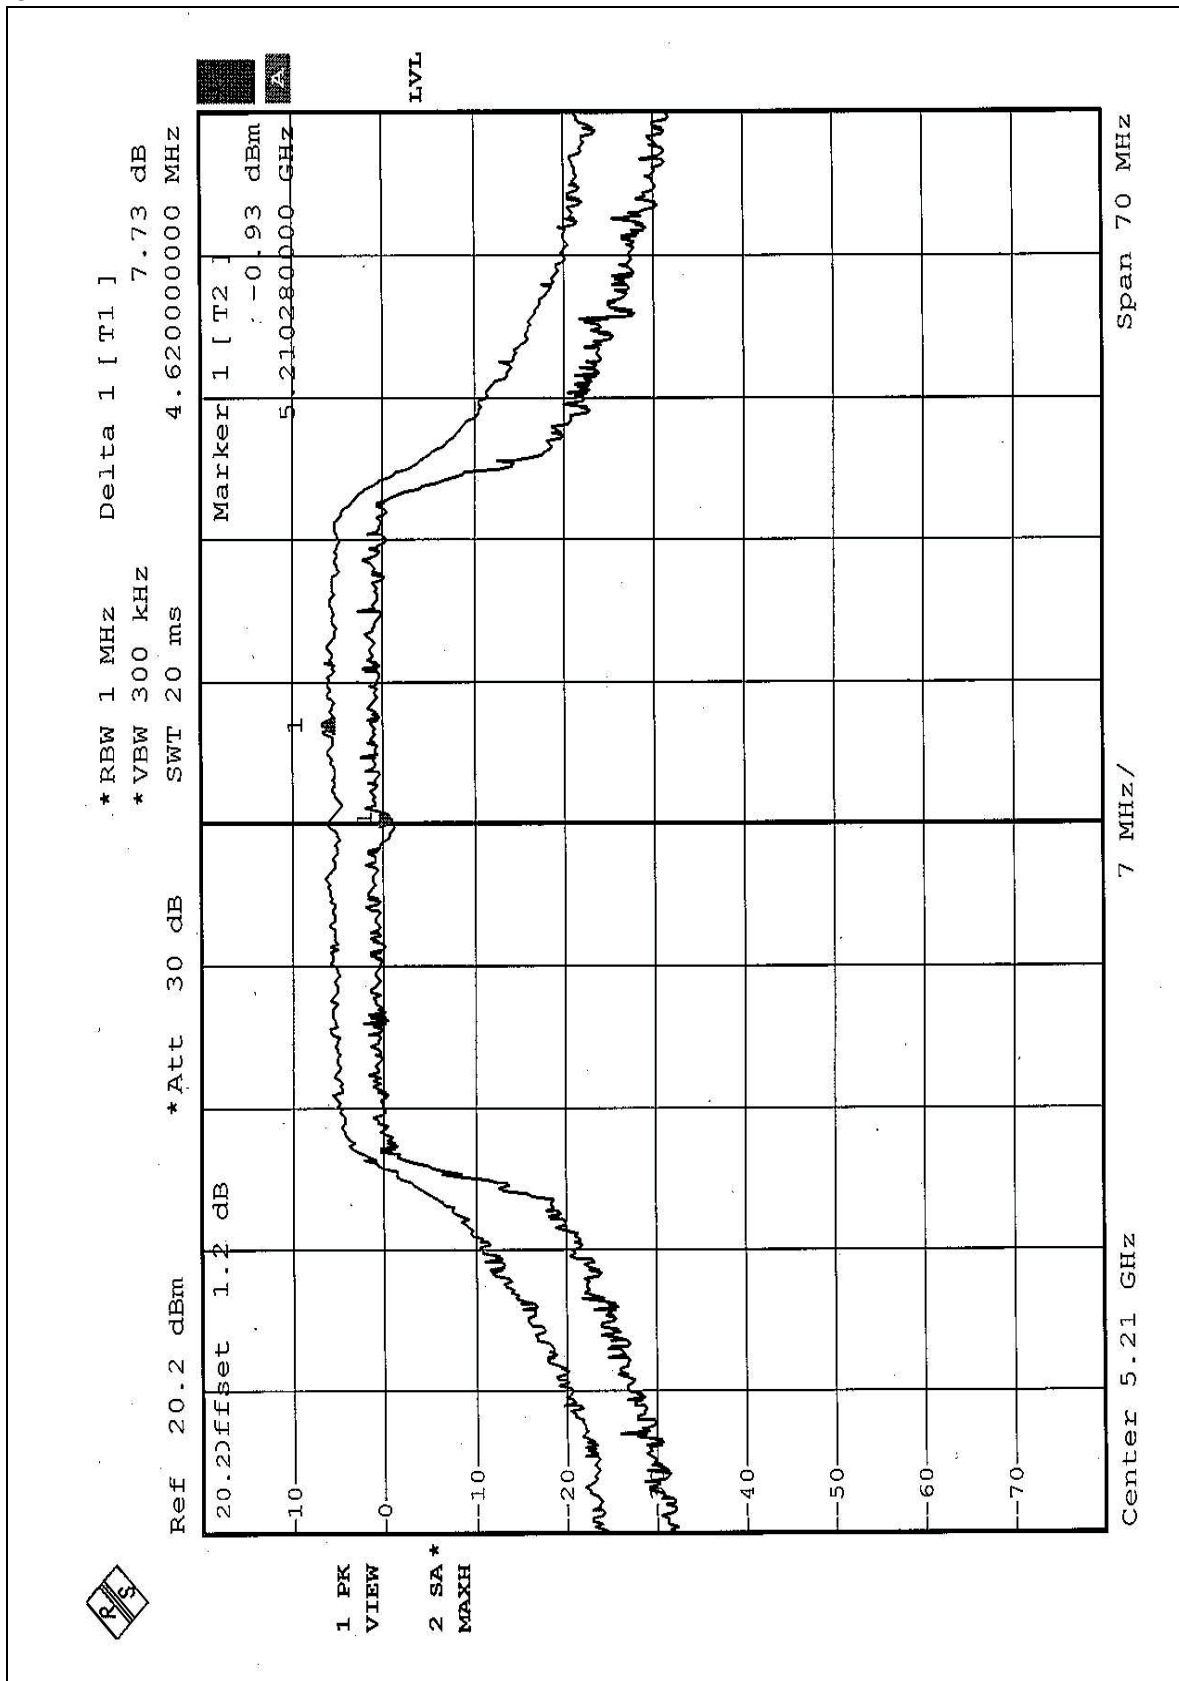

CHANNEL 2

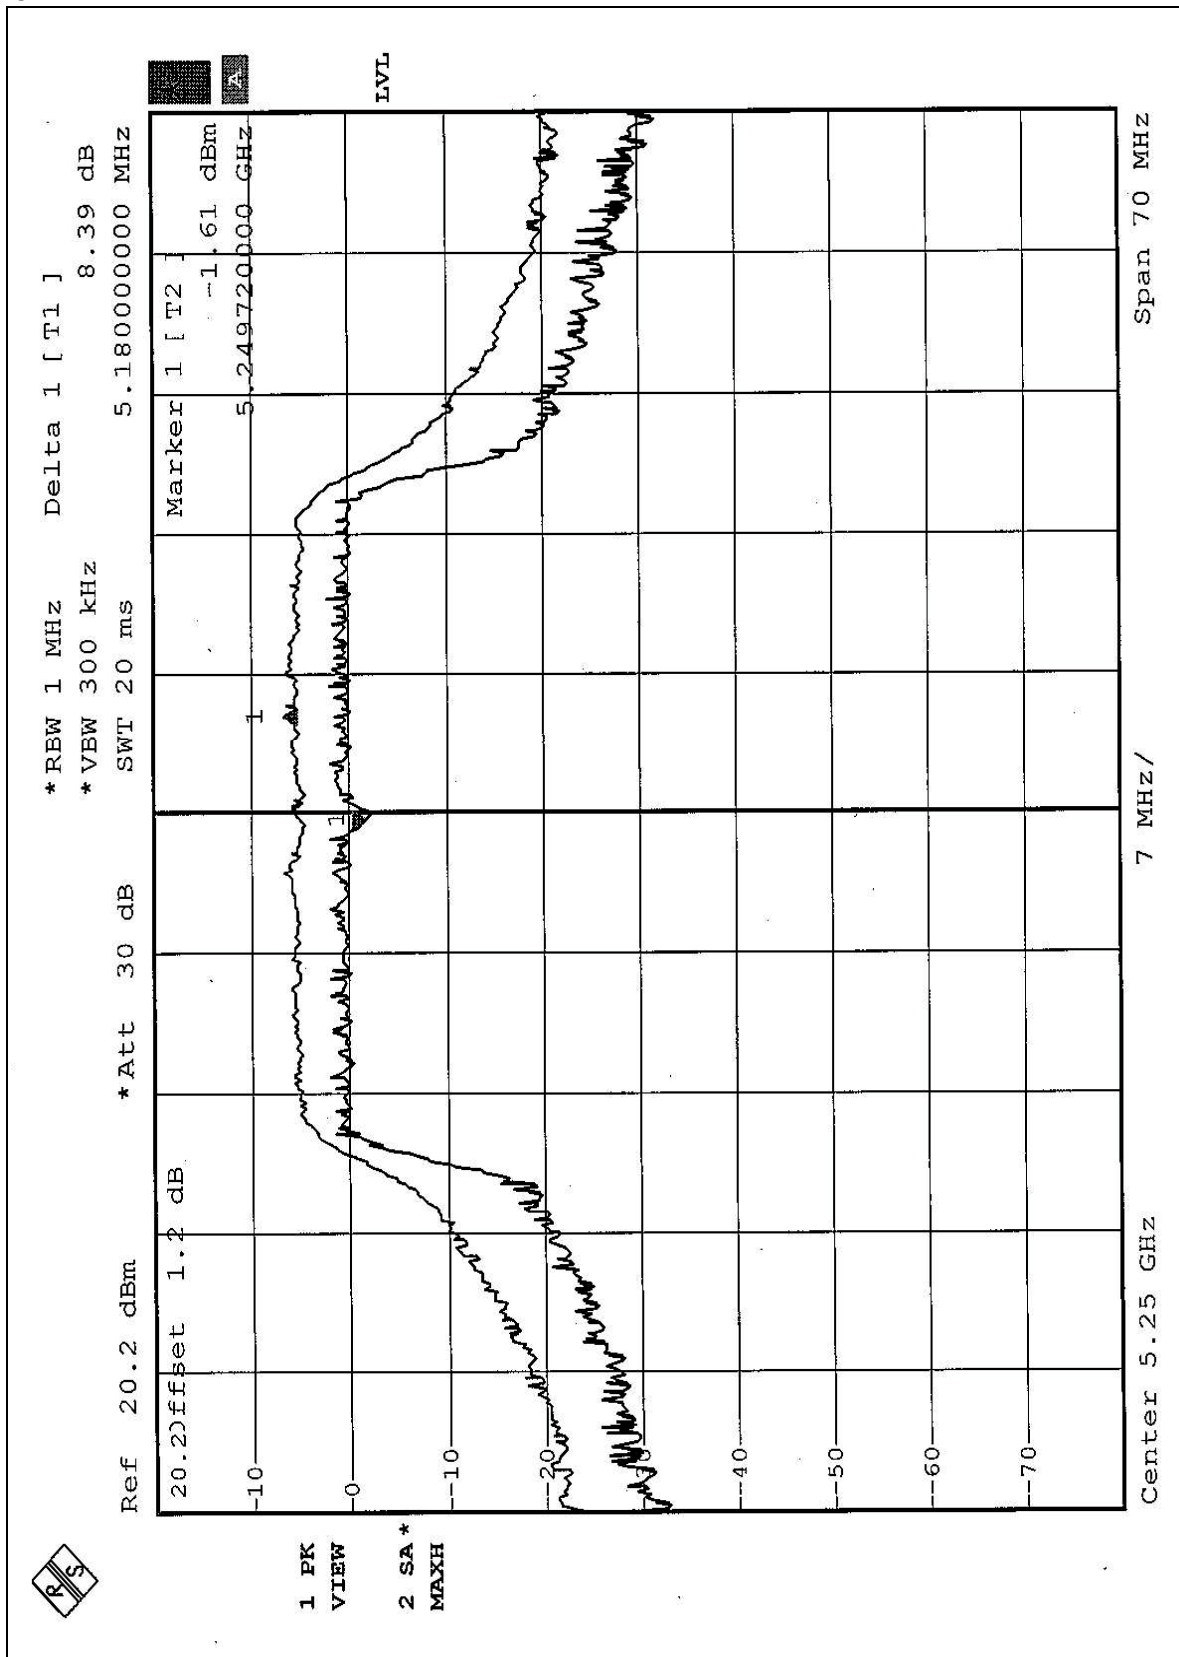

CHANNEL 3

