



Test report No.: 24A0832R-SAUSV01S-A

SAR Test Report

Product Name	Wi-Fi 7 BE6500 USB 3.0 Dongle
Trademark	D-Link
Model and /or type reference	AE65U
Applicant's name / address	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606
Manufacturer's name	D-Link Corporation
FCC ID	KA2AE65UA1
Applicable Standard	IEEE 1528-2013 KDB 447498 D01 v06 KDB 865664 D01 v01r04
Test Result	Max. SAR Measurement (1g) 2.4 GHz: 1.026 W/kg 5 GHz: 1.172 W/kg 6 GHz: 0.812 W/kg Max. psPD Measurement (4cm ²) 6 GHz: 7.031 W/m ²
Verdict Summary	IN COMPLIANCE
Documented By (Senior Project Specialist / April Chen)	<i>April Chen</i>
Tested By (Senior Engineer / Luke Cheng)	<i>Luke Cheng</i>
Approved By (Assistant Manager / San Lin)	<i>San Lin</i>
Date of Receipt	2024/10/29
Date of Issue	2025/09/11
Report Version	V1.0

INDEX

	Page
1. General Information	5
1.1 EUT Description	5
1.2 Antenna List	6
1.3 Test Environment.....	7
1.4 Measurement procedures.....	8
2. SAR Measurement System	9
2.1 DASY System Description	9
2.2 Area Scans	11
2.3 DASY E-Field Probe.....	12
2.4 DATA Acquisition Electronics (DAE) and Measurement Server	13
2.5 Robot.....	14
2.6 Device Holder.....	14
2.7 Phantom	15
3. Tissue Simulating Liquid	16
3.1 The composition of the tissue simulating liquid	16
3.2 Tissue Calibration Result.....	16
3.3 Tissue Dielectric Parameters for Phantoms	17
4. Measurement Procedure.....	18
4.1 System Check	18
4.2 SAR Measurement Procedure.....	21
4.3 Absorbed Power Density (APD)	22
4.4 Power Density Measurement Procedure	22
5. RF Exposure Limits.....	23
6. Test Equipment List	24
7. Measurement Uncertainty.....	26
8. Conducted Power Measurement (Including tolerance allowed for production unit)	30
9. Test Results	38
9.1 Test Results Summary	38
9.2 Simultaneous Transmission.....	44
10. SAR measurement variability	45
Appendix A. System Check Data	
Appendix B. Highest measurement Data	
Appendix C. Test Setup Photographs	
Appendix D. Probe Calibration Data	
Appendix E. Dipole & Source Calibration	
Appendix F. Product Photos-Please refer to the file: 24A0832R-Product Photos	

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
24A0832R-SAUSV01S-A	V1.0	Initial issue of report.	2025/09/11

1. General Information

1.1 EUT Description

Product Name	Wi-Fi 7 BE6500 USB 3.0 Dongle
Trademark	D-Link
Model and /or type reference	AE65U
FCC ID	KA2AE65UA1
Frequency Range	WLAN 2.4GHz: 2412-2472MHz WLAN 5GHz: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz WLAN 6GHz: 5955-7115MHz
Type of Modulation	802.11b: DSSS 802.11a/g/n/ac/ax/be: OFDM, OFDMA
Antenna Type	PCB
Device Category	Portable
RF Exposure Environment	Uncontrolled

Summary of test result – Reported 1g SAR (W/kg)			
Test configuration	DTS	NII	6XD
Standalone	1.026	1.172	0.812
Simultaneous	0.999	1.036	1.460
Summary of test result – Power Density			
Test configuration	6XD		
APD (W/m ²)	4.320		
Reported PD (W/m ²)	7.031		

1.2 Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Amigo	Ant 1	PCB	1.50dBi for 2400MHz 1.80dBi for 5150~5250MHz 1.80dBi for 5250~5350MHz 1.70dBi for 5470~5725MHz 1.50dBi for 5725~5850MHz 1.50dBi for 5850~5895MHz 1.70dBi for 5925~6425MHz 1.90dBi for 6425~6525MHz 1.90dBi for 6525~6875MHz 1.70dBi for 6875~7125MHz
		Ant 2		1.60dBi for 2400MHz 1.80dBi for 5150~5250MHz 1.80dBi for 5250~5350MHz 1.70dBi for 5470~5725MHz 1.70dBi for 5725~5850MHz 1.70dBi for 5850~5895MHz 1.90dBi for 5925~6425MHz 1.80dBi for 6425~6525MHz 1.80dBi for 6525~6875MHz 1.50dBi for 6875~7125MHz

Note: The above EUT information by manufacturer.

1.3 Test Environment

Ambient conditions in the laboratory:

Test Date: 2025/02/17 - 2025/02/21

Items	Required	Actual
Temperature (°C)	18-25	23 ± 2
Humidity (%RH)	30-70	50 ± 20

USA	FCC Designation Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.4 Measurement procedures

IEEE 1528-2013

47CFR § 2.1093

KDB 248227 D01 v02r02

KDB 447498 D01 v06

KDB 447498 D02 v02r01

KDB 865664 D01 v01r04


IEC TR 63170:2018

IEC/IEEE 62209-1528:2020


2. SAR Measurement System

2.1 DASY System Description

SAR Configurations is shown below:

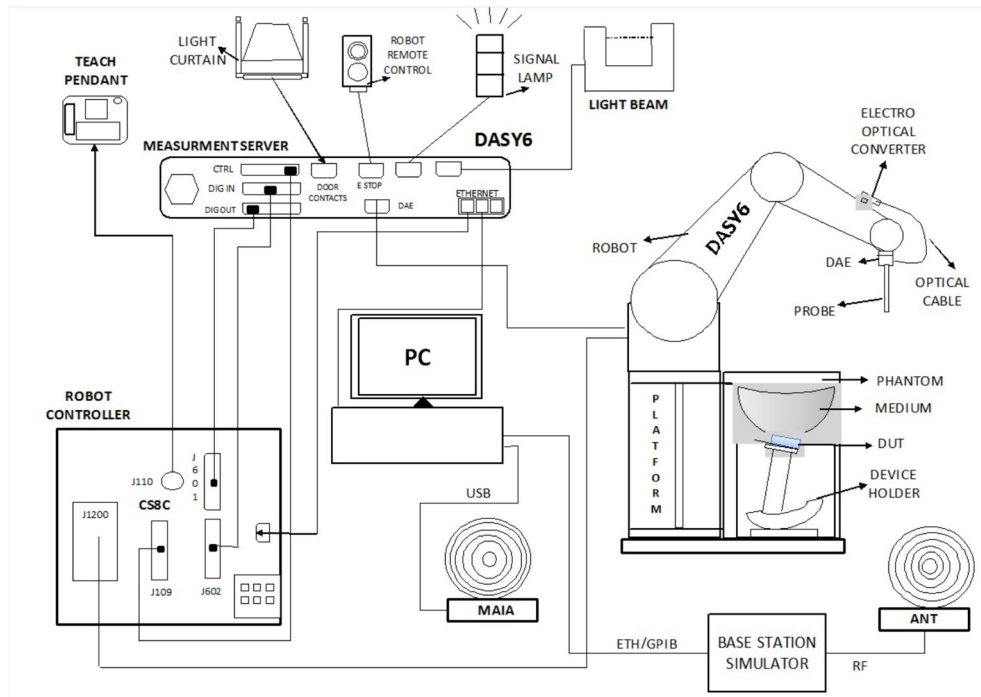

Power Density Configurations is shown below:

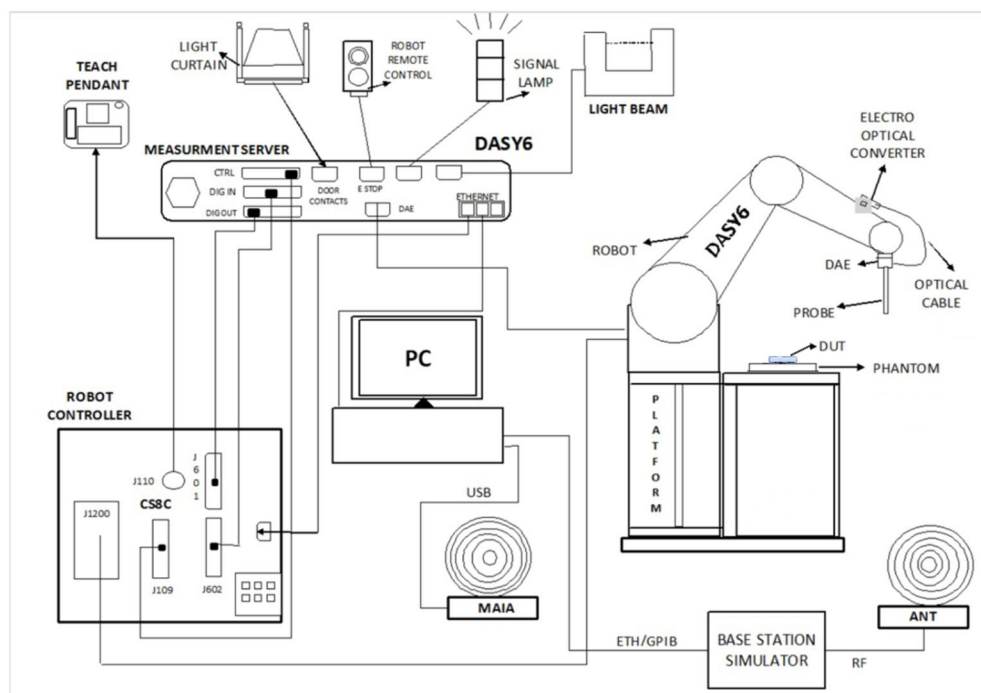

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7/8/10 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing.

2.2.1 Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

2.2.2 SAR measurement drifts

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations. If a device is known to drift randomly, additional single point drift reference measurements should be performed at regular intervals throughout the area and zoom scan test durations. The SAR drift shall be kept within $\pm 5\%$, whether there are substantial drifts or not. The field difference will be calculated in dB units in the DASY software.

2.2.3 Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions.

2.3 DASY E-Field Probe


The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards under ISO 17025. The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	Ex3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)	
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

E-Field mm-Wave Probe Specification

Model	EUmmWVx	
Construction	Two dipoles optimally arranged to obtain pseudo-vector information Minimum three measurements/point, 120° rotated around probe axis Sensors (0.8 mm length) printed on glass substrate protected by high density foam	
Frequency	750 MHz to 110 GHz	
Dynamic Range	< 20 V/m to 10000 V/m with PRE-10 (min < 20 V/m to 2000 V/m)	
Position Precision	< 0.2 mm	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1mm) Distance from probe tip to dipole centers: < 2 mm Sensor displacement to probe's calibration point: < 0.3 mm	
Application	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field, and far-field analysis using total field reconstruction	

2.4 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



2.5 Robot

The DASY system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY system, the CS8C robot controller version from Stäubli is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller




2.6 Device Holder

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

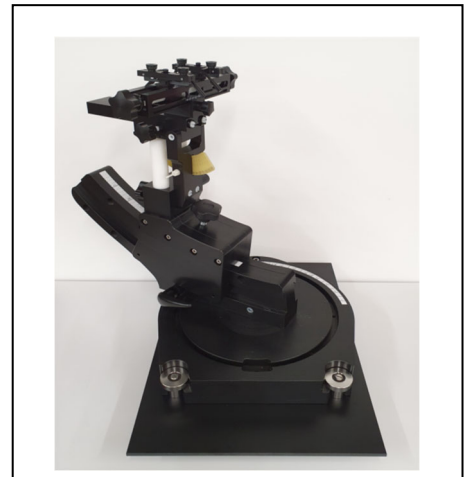


2.7 Phantom

2.7.1 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

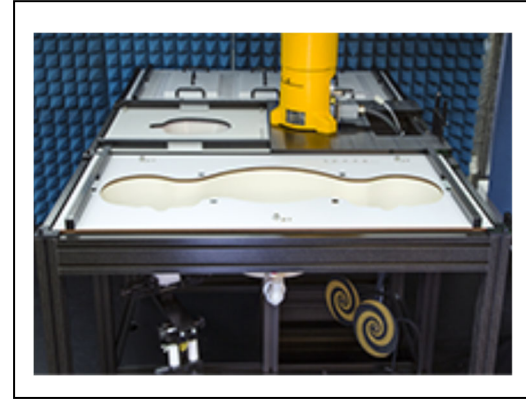

The device holder positions are adjusted to the standard measurement positions in the three sections. A cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

2.7.2 mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing to evaluate not only the antenna side of the device but also the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40 mm thick Rohacell plate used as a test bed, which has a loss tangent ($\tan \delta$) ≤ 0.05 and a relative permittivity (ϵ_r) ≤ 1.2 . High-performance RF absorbers are placed below the foam.



3. Tissue Simulating Liquid

3.1 The composition of the tissue simulating liquid

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethanediol STOT RE 2, H373; Acute Tox. 4, H302	< 5.2%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Dielectric Probe Kit and Vector Network Analyzer.

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (er)			Conductivity (σ)			Tissue Temp. (°C)
			Measured	Target	Delta (%)	Measured	Target	Delta (%)	
2025/2/17	Head	2450	40.00	39.20	2.04	1.79	1.80	-0.56	22.3
	Head	2412	40.10	39.28	2.09	1.74	1.77	-1.69	
	Head	2437	40.00	39.23	1.96	1.77	1.79	-1.12	
	Head	2462	39.90	39.18	1.84	1.81	1.81	0.00	
2025/2/18	Head	5250	35.80	35.95	-0.42	4.67	4.71	-0.85	21.9
	Head	5290	35.70	35.91	-0.58	4.73	4.75	-0.42	
2025/2/19	Head	5600	34.80	35.50	-1.97	5.15	5.07	1.58	22.1
	Head	5530	35.00	35.61	-1.71	5.06	5.00	1.20	
	Head	5570	34.90	35.55	-1.83	5.11	5.04	1.39	
	Head	5610	34.80	35.49	-1.94	5.16	5.08	1.57	
	Head	5690	34.60	35.41	-2.29	5.26	5.16	1.94	
	Head	5800	34.30	35.30	-2.83	5.41	5.27	2.66	
	Head	5775	34.30	35.33	-2.92	5.38	5.25	2.48	
2025/2/21	Head	6500	34.40	34.50	-0.29	6.25	6.07	2.97	22.2
	Head	6025	36.10	35.07	2.94	5.69	5.51	3.27	
	Head	6185	35.50	34.88	1.78	5.88	5.70	3.16	
	Head	6345	35.00	34.69	0.91	6.07	5.89	3.06	
	Head	6505	34.40	34.49	-0.27	6.26	6.08	2.96	
	Head	6665	33.90	34.30	-1.17	6.45	6.26	3.04	
	Head	6825	33.30	34.11	-2.37	6.64	6.45	2.95	
	Head	6985	32.80	33.92	-3.30	6.84	6.63	3.17	

3.3 Tissue Dielectric Parameters for Phantoms

The head tissue dielectric parameters recommended by the IEC/IEEE 62209-1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head tissue parameters that have not been specified are interpolated according to the head parameters specified in IEC/IEEE 62209-1528.

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1640	40.2	1.31
1750	40.1	1.37
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48
6500	34.5	6.07
7000	33.9	6.65
7500	33.3	7.24

4. Measurement Procedure


4.1 System Check

4.1.1 Dipoles



The SAR dipoles are optimized symmetrical dipole with $\lambda/4$ balun matched to a Flat phantom section filled with tissue simulating liquids. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. They are available for the variety of frequencies between 300MHz and 10 GHz. The provided tripod is used to hold the dipole below the phantom. As the distance between the dipole center and the TSL is critical, a spacer is placed between the dipole and the phantom. The spacing distance is frequency dependent.

4.1.2 Verification Source

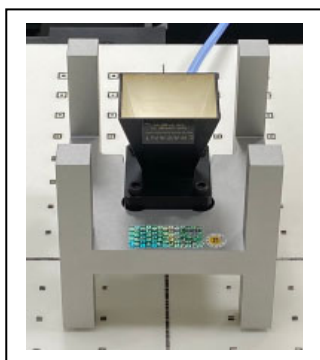

The verification sources apply to system check or verification at specific mmWave frequencies. The sources comprise horn-antennas and very stable signal generators.

4.1.3 SAR System Check Result

1. Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %.
2. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Delta 1g ±10 (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Delta 10g ±10 (%)	Tissue Temp. (°C)
2025/2/17	2450	250	12.80	52.50	51.2	-2.48	6.14	24.70	24.56	-0.57	22.3
2025/2/18	5250	100	7.42	78.10	74.2	-4.99	2.14	22.40	21.4	-4.46	21.9
2025/2/19	5600	100	8.16	82.30	81.6	-0.85	2.34	23.50	23.4	-0.43	22.1
2025/2/19	5800	100	7.71	80.20	77.1	-3.87	2.18	22.80	21.8	-4.39	22.1
2025/2/21	6500	100	29.70	294.00	297	1.02	5.49	53.90	54.9	1.86	22.2

4.1.4 Power Density System Check Result

The system performance check verifies that the system operates within its specifications.

The system check is successful if the difference between the normalized measured local power density and the numerically validated target value is within the reported expanded uncertainty of the measurement system.

The recommended settings for measurement of verification sources are listed in the following:

Frequency (GHz)	Grid step	Grid extent X/Y (mm)	Measurement points
10	0.125 ($\lambda/8$)	60 / 60	18 x 18

According to the DASY specification in the user's manual and SPEAG's recommendation, the deviation threshold of ± 0.66 dB represents the expanded standard uncertainty for system performance check. The system check is successful if the measured results are within ± 0.66 dB tolerances to the target value shown in the calibration certificate of the verification source.

Date	Frequency (GHz)	Distance (mm)	Input Power (mW)	Measured Avg 4 cm ² (W/m ²)	Targeted Avg 4 cm ² (W/m ²)	Deviation (dB)
2025/2/20	10	10	138	188.7	187.00	0.04

Note: The Measured Avg PD was the average of psPDn+, psPDtot+ and psPDmod+, which refers to the demonstration from calibration certificate.

4.2 SAR Measurement Procedure

The Dasy calculates SAR using the following equation,

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where :

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

E :RMS electric field strength (V/m)

The SAR / APD measurements for the EUT should be performed on the channel that produces the highest rated output power of each transmitting antenna.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR / APD distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR / APD location (interpolated resolution set at 1mm^2) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm^3).

4.3 Absorbed Power Density (APD)

Absorbed Power Density (APD) is defined as the energy flow per unit area directly under the body surface that based on Poynting vector. The equation description is as below:

$$S_{ab} = \iint_A \text{Re}[S] \cdot \frac{ds}{A} = \iint_A \text{Re}[E \times H^*] \cdot \frac{ds}{A}$$

Where:

E = electric field strength (V/m)

H = magnetic field strength (A/m)

S = power density (W/m² or mW/cm²)

APD is expressed in units of Watts per square meter or units of milliwatt per square centimeter.

4.4 Power Density Measurement Procedure

The power density for an electromagnetic field represents the rate of energy transfer per unit area. The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$S = \frac{1}{2} \text{Re}[E \times H^*] \cdot \vec{n}$$

Where: E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor.

The spatial-average power density distribution on the evaluation surface is determined per the IEC TR 63170. The spatial area, A is specified by the applicable exposure limit or regulatory requirements. The circular shape was used.

$$S_{av} = \frac{1}{2A} \Re(\int E \times H \cdot \hat{n} dA)$$

5. RF Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, RSS-102 Issue 6, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg
Power density ¹	1 mW/cm²

Note: 1 mW/cm² = 10 W/m²

6. Test Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Last Calibration	Next Calibration
Reference Dipole 2450MHz	Speag	D2450V2	1053	2024/02/19	2027/02/18
Reference Dipole 5GHz	Speag	D5GHzV2	1321	2024/03/12	2027/03/11
Reference Dipole 6.5GHz	Speag	D6.5GHzV2	1021	2024/02/12	2027/02/11
Verification Source Antenna 10GHz	Speag	5G Verification Source 10GHz	2006	2024/04/18	2025/04/17
Device Holder	Speag	N/A	N/A	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1791	2024/04/22	2025/04/21
Data Acquisition Electronic	Speag	DAE4	916	2024/12/04	2025/12/03
E-Field Probe	Speag	EX3DV4	7784	2024/04/22	2025/04/21
mmWave E-field Probe	Speag	EUmmWV4	9546	2024/04/18	2025/04/17
SAR Software	Speag	DASY8	V16.4.0.5005	N/A	N/A
Power Amplifier	Mini-Circuit	ZVE-8G+	447202211	N/A	N/A
Power Amplifier	Mini-Circuit	ZVA-02303HP+	20211217-1	N/A	N/A
Directional Coupler	Agilent	87300C	MY44300353	N/A	N/A ¹
Attenuator	Woken	WATT-218FS-10	N/A	N/A	N/A ¹
Attenuator	Mini-Circuit	BW-S20W2+	N/A	N/A	N/A ¹
Vector Network Analyzer	Agilent	E5071C	MY46108013	2024/03/19	2025/03/18
Signal Generator	Anritsu	MG3694A	041902	2024/08/20	2025/08/19
Power Meter	Anritsu	ML2487A	6K00001447	2024/10/19	2025/10/18
Power Sensor	Anritsu	MA2411B	1339194	2024/10/19	2025/10/18

Note: 1. System Check, the path loss measured by the network analyzer, includes the signal generator, amplifier, cable, attenuator and directional coupler.

Note:

Per KDB 865664 D01 requirements for dipole calibration, the following are recommended FCC procedures for SAR dipole calibration.

1. After a dipole is damaged and properly repaired to meet required specifications.
2. When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions.
3. When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification.

D2450V2-1053

	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	2450 MHz	Head	-24.3	Within 20%	2024/2/19
Measurement	2450 MHz	Head	-24.57		2025/2/18

4. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement.

D6.5GHzV2-1021

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	6500 MHz	Head	53.5	Within 5 Ω	2024/2/12
Measurement	6500 MHz	Head	53.26		2025/2/10

7. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz							
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors							
Probe Calibration	±12.0%	N	2	1	1	±6.0%	±6.0%
Probe Calibration Drift	±1.7%	R	1.732	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	1.732	1	1	±2.7%	±2.7%
Broadband Signal	±2.8%	R	1.732	1	1	±1.6%	±1.6%
Probe Isotropy	±7.6%	R	1.732	1	1	±4.4%	±4.4%
Other Probe+Electronic	±0.8%	N	1	1	1	±0.8%	±0.8%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.006 mm	N	1	0.14	0.14	±0.1%	±0.1%
Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
Phantom and Device Errors							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±3.3%	R	1.732	0.78	0.71	±1.5%	±1.4%
Phantom Permittivity	±14.0%	R	1.732	0	0	±0.0%	±0.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	1.732	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	1.732	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0.0%	±0.0%
Unc. Input Power	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0.0%	R	1.732	1	1	±0.0%	±0.0%
Combined Uncertainty						±11.0%	±10.9%
Expanded Uncertainty						±21.9%	±21.7%

Measurement uncertainty for 3 GHz to 6 GHz

Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors							
Probe Calibration	±14.0%	N	2	1	1	±7.0%	±7.0%
Probe Calibration Drift	±1.7%	R	1.732	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	1.732	1	1	±2.7%	±2.7%
Broadband Signal	±2.6%	R	1.732	1	1	±1.5%	±1.5%
Probe Isotropy	±7.6%	R	1.732	1	1	±4.4%	±4.4%
Other Probe+Electronic	±1.2%	N	1	1	1	±1.2%	±1.2%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.005 mm	N	1	0.29	0.29	±0.2%	±0.2%
Data Processing	±2.3%	N	1	1	1	±2.3%	±2.3%
Phantom and Device Errors							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±3.4%	R	1.732	0.78	0.71	±1.5%	±1.4%
Phantom Permittivity	±14.0%	R	1.732	0.25	0.25	±2.0%	±2.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	1.732	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	1.732	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0.0%	±0.0%
Unc. Input Power	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0.0%	R	1.732	1	1	±0.0%	±0.0%
Combined Uncertainty						±11.9%	±11.8%
Expanded Uncertainty						±23.8%	±23.6%

Measurement uncertainty for 6 GHz to 10 GHz

Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors							
Probe Calibration	±18.6%	N	2	1	1	±9.3%	±9.3%
Probe Calibration Drift	±1.7%	R	1.732	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	1.732	1	1	±2.7%	±2.7%
Broadband Signal	±2.6%	R	1.732	1	1	±1.5%	±1.5%
Probe Isotropy	±7.6%	R	1.732	1	1	±4.4%	±4.4%
Other Probe+Electronic	±2.4%	N	1	1	1	±2.4%	±2.4%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.005 mm	N	1	0.5	0.5	±0.3%	±0.3%
Data Processing	±3.5%	N	1	1	1	±3.5%	±3.5%
Phantom and Device Errors							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±2.4%	R	1.732	0.78	0.71	±1.1%	±1.0%
Phantom Permittivity	±14.0%	R	1.732	0.5	0.5	±4.0%	±4.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	1.732	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	1.732	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0.0%	±0.0%
Unc. Input Power	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0.0%	R	1.732	1	1	±0.0%	±0.0%
Combined Uncertainty						±14.2%	±14.1%
Expanded Uncertainty						±28.4%	±28.3%

Measurement uncertainty for Power Density						
Error Description	Uncert. Value ($\pm$ dB)	Prob. Dist.	Div.	(ci)	Std. Unc. ($\pm$ dB)	(vi) veff
Uncertainty terms dependent on the measurement system						
Calibration	0.49	N	1	1	0.49	∞
Probe correction	0	R	1.732	1	0	∞
Frequency response (BW $\leq$ 1 GHz)	0.2	R	1.732	1	0.12	∞
Sensor cross coupling	0	R	1.732	1	0	∞
Isotropy	0.5	R	1.732	1	0.29	∞
Linearity	0.2	R	1.732	1	0.12	∞
Probe scattering	0	R	1.732	1	0	∞
Probe positioning offset	0.3	R	1.732	1	0.17	∞
Probe positioning repeatability	0.04	R	1.732	1	0.02	∞
Sensor mechanical offset	0	R	1.732	1	0	∞
Probe spatial resolution	0	R	1.732	1	0	∞
Field impedance dependance	0	R	1.732	1	0	∞
Amplitude and phase drift	0	R	1.732	1	0	∞
Amplitude and phase noise	0.04	R	1.732	1	0.02	∞
Measurement area truncation	0	R	1.732	1	0	∞
Data acquisition	0.03	N	1	1	0.03	∞
Sampling	0	R	1.732	1	0	∞
Field reconstruction	2	R	1.732	1	1.15	∞
FTE/MEO	0	R	1.732	1	0	∞
Power density scaling	0	R	1.732	1	0	∞
Spatial averaging	0.1	R	1.732	1	0.06	∞
System detection limit	0.04	R	1.732	1	0.02	∞
Uncertainty terms dependent on the DUT and environmental factors						
Probe coupling with DUT	0	R	1.732	1	0	∞
Modulation response	0.4	R	1.732	1	0.23	∞
Integration time	0	R	1.732	1	0	∞
Response time	0	R	1.732	1	0	∞
Device holder influence	0.1	R	1.732	1	0.06	∞
DUT alignment	0	R	1.732	1	0	∞
RF ambient conditions	0.04	R	1.732	1	0.02	∞
Ambient reflections	0.04	R	1.732	1	0.02	∞
Immunity / secondary reception	0	R	1.732	1	0	∞
Drift of the DUT	0.21	R	1.732	1	0.12	∞
Combined Standard Uncertainty					1.33	∞
Expanded Standard Uncertainty (95%)					2.67	

8. Conducted Power Measurement (Including tolerance allowed for production unit)

WLAN 2.4G 2TX SISO									
	Frequency	Mode	BW	SISO-Ant 1			SISO-Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
DSSS/OFDM mode specified maximum output power at an antenna port	WLAN 2.4GHz	b	20	1	11.85	12	1	11.91	12
				6	11.94	12	6	11.92	12
				11	11.88	12	11	11.89	12
				12	11.63	12	12	11.84	12
				13	11.65	12	13	11.77	12
		g	20	1	11.54	12	1	11.42	12
				6	11.59	12	6	11.47	12
				11	11.48	12	11	11.44	12
				12	11.51	12	12	11.51	12
				13	11.46	12	13	11.41	12
		n (HT)	20	1	11.27	12	1	11.36	12
				6	11.33	12	6	11.41	12
				11	11.21	12	11	11.31	12
				12	11.26	12	12	11.27	12
				13	11.29	12	13	11.35	12
			40	3	11.28	12	3	11.07	12
				6	11.37	12	6	11.18	12
				9	11.17	12	9	11.22	12
				10	11.21	12	10	11.05	12
				11	11.09	12	11	11.09	12
		ax (HE)	20	1	11.34	12	1	11.09	12
				6	11.39	12	6	11.15	12
				11	11.11	12	11	11.02	12
				12	11.07	12	12	11.07	12
				13	11.09	12	13	11.11	12
			40	3	11.04	12	3	11.16	12
				6	11.11	12	6	11.19	12
				9	11.09	12	9	11.35	12
				10	11.21	12	10	11.29	12
				11	11.12	12	11	11.31	12
		be (EHT)	20	1	11.25	12	1	11.09	12
				6	11.31	12	6	11.12	12
				11	11.28	12	11	11.16	12
				12	11.09	12	12	11.14	12
				13	11.12	12	13	11.28	12
			40	3	11.04	12	3	11.03	12
				6	11.15	12	6	11.06	12
				9	11.21	12	9	11.09	12
				10	11.13	12	10	11.15	12
				11	11.08	12	11	11.22	12

WLAN 2.4G 2TX MIMO

DSSS/OFDM mode	Frequency	Mode	BW	MIMO-Ant 1			MIMO-Ant 2			MIMO Ant 1 + Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	WLAN 2.4GHz	b	20	1	11.87	12	1	11.39	12	1	14.65	15
				6	11.99	12	6	11.12	12	6	14.59	15
11				11.78	12	11	11.21	12	11	14.51	15	

WLAN 5G 2TX SISO									
	Frequency	Mode	BW	SISO-Ant 1			SISO-Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	U-NII-1 (5150~5250MHz)	a	20	36	15.33	16	36	14.42	15
				40	15.26	16	40	14.33	15
				44	15.18	16	44	14.29	15
				48	15.24	16	48	14.37	15
		n (HT)	20	36	15.21	16	36	14.22	15
				40	15.07	16	40	14.15	15
				44	15.23	16	44	14.25	15
				48	15.38	16	48	14.35	15
		40		38	15.07	16	38	14.41	15
				46	15.14	16	46	14.39	15
		ac(VHT)	80	42	15.84	16	42	14.81	15
		ax (HE)	20	36	15.23	16	36	14.46	15
				40	15.11	16	40	14.33	15
				44	15.16	16	44	14.38	15
				48	15.27	16	48	14.27	15
			40	38	15.09	16	38	14.37	15
				46	15.14	16	46	14.28	15
		be (EHT)	80	42	15.44	16	42	14.51	15
			20	36	15.12	16	36	14.22	15
				40	15.14	16	40	14.06	15
				44	15.09	16	44	14.17	15
				48	15.27	16	48	14.11	15
			40	38	15.16	16	38	14.32	15
				46	15.04	16	46	14.24	15
			80	42	15.19	16	42	14.13	15
	U-NII-2A (5250~5350MHz)	a	20	52	15.22	16	52	14.12	15
				56	15.14	16	56	14.08	15
				60	15.25	16	60	14.05	15
				64	15.41	16	64	14.33	15
		n (HT)	20	52	15.23	16	52	14.28	15
				56	15.44	16	56	14.24	15
				60	15.11	16	60	14.07	15
				64	15.02	16	64	14.21	15
			40	54	15.21	16	54	14.35	15
				62	15.26	16	62	14.19	15
		ac (VHT)	80	58	15.97	16	58	14.93	15
			160	50	14.88	15	50	14.75	15
		ax (HE)	20	52	15.06	16	52	14.11	15
				56	15.21	16	56	14.08	15
				60	15.04	16	60	14.32	15
				64	15.15	16	64	14.44	15
			40	54	15.21	16	54	14.45	15
				62	15.23	16	62	14.11	15
			80	58	15.51	16	58	14.47	15
			160	50	14.72	15	50	14.61	15
		be (EHT)	20	52	15.13	16	52	14.14	15
				56	15.22	16	56	14.03	15
				60	15.09	16	60	14.33	15
				64	15.04	16	64	14.17	15
			40	54	15.25	16	54	14.26	15
				62	15.28	16	62	14.19	15
			80	58	15.32	16	58	14.11	15
			160	50	15.07	16	50	14.08	15

	Frequency	Mode	BW	SISO-Ant 1			SISO-Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
OFDM mode specified maximum output power at an antenna port	U-NII-2C (5470~5725MHz)	a	20	100	13.99	14.5	100	13.23	14
				116	13.84	14.5	116	13.11	14
				124	13.76	14.5	124	13.09	14
				132	13.97	14.5	132	13.12	14
				140	13.88	14.5	140	13.26	14
				144	13.02	13.5	144	13.04	13.5
		n (HT)	20	100	13.66	14.5	100	13.09	14
				116	13.51	14.5	116	13.14	14
				124	13.75	14.5	124	13.17	14
				132	13.79	14.5	132	13.19	14
				140	13.68	14.5	140	13.22	14
				144	13.24	13.5	144	13.28	13.5
			40	102	13.89	14.5	102	13.31	14
				110	13.64	14.5	110	13.16	14
				126	13.77	14.5	126	13.27	14
				134	13.81	14.5	134	13.24	14
				142	13.25	13.5	142	13.19	13.5
		ac (VHT)	80	106	14.41	14.5	106	13.92	14
				122	14.39	14.5	122	13.85	14
				138	13.42	13.5	138	13.33	13.5
			160	114	14.25	14.5	114	13.71	14
		ax (HE)	20	100	13.95	14.5	100	13.32	14
				116	13.81	14.5	116	13.28	14
				124	13.88	14.5	124	13.49	14
				132	13.71	14.5	132	13.18	14
				140	13.54	14.5	140	13.27	14
				144	13.26	13.5	144	13.22	13.5
			40	102	13.61	14.5	102	13.41	14
				110	13.54	14.5	110	13.35	14
				126	13.72	14.5	126	13.39	14
				134	13.63	14.5	134	13.26	14
				142	13.24	13.5	142	13.25	13.5
			80	106	13.99	14.5	106	13.18	14
				122	13.84	14.5	122	13.07	14
				138	13.06	13.5	138	13.09	13.5
			160	114	14.02	14.5	114	13.55	14
		be (EHT)	20	100	13.75	14.5	100	13.16	14
				116	13.86	14.5	116	13.27	14
				124	13.77	14.5	124	13.34	14
				132	13.62	14.5	132	13.11	14
				140	13.55	14.5	140	13.22	14
				144	13.71	14.5	144	13.38	14
			40	102	13.62	14.5	102	13.35	14
				110	13.44	14.5	110	13.23	14
				126	13.65	14.5	126	13.09	14
				134	13.47	14.5	134	13.16	14
				142	13.55	14.5	142	13.24	14
			80	106	13.66	14.5	106	13.05	14
				122	13.73	14.5	122	13.07	14
				138	13.64	14.5	138	13.13	14
			160	114	13.59	14.5	114	13.29	14

OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Ant 1			SISO-Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
OFDM mode specified maximum output power at an antenna port	U-NII-3 (5725~5850MHz)	a	20	149	13.09	13.5	149	12.81	13.5
				157	13.02	13.5	157	12.92	13.5
				165	12.97	13.5	165	12.95	13.5
		n (HT)	20	149	13.18	13.5	149	13.08	13.5
				157	13.27	13.5	157	13.25	13.5
				165	13.16	13.5	165	13.12	13.5
			40	151	12.76	13.5	151	12.55	13.5
				159	12.89	13.5	159	12.67	13.5
				155	13.47	13.5	155	13.46	13.5
		ac(VHT)	80	155	13.47	13.5	155	13.46	13.5
		ax (HE)	20	149	12.65	13.5	149	12.55	13.5
				157	12.74	13.5	157	12.59	13.5
				165	12.92	13.5	165	12.67	13.5
			40	151	12.91	13.5	151	12.68	13.5
				159	12.84	13.5	159	12.56	13.5
			80	155	13.02	13.5	155	12.91	13.5
		be (EHT)	20	149	12.98	13.5	149	13.01	13.5
				157	12.77	13.5	157	12.74	13.5
				165	12.65	13.5	165	12.65	13.5
			40	151	12.74	13.5	151	12.57	13.5
				159	12.88	13.5	159	12.81	13.5
			80	155	12.99	13.5	155	12.76	13.5

WLAN 5G 2TX MIMO												
OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	MIMO-Ant 1			MIMO-Ant 2			MIMO Ant 1 + Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	U-NII-1 (5150~5250MHz)	ac (VHT)	80	42	14.98	16	42	14.95	15	42	17.98	18.5
	U-NII-2A (5250~5350MHz)	ac (VHT)	80	58	15.12	16	58	14.84	15	58	17.99	18.5
	U-NII-2C (5470~5725MHz)	ac (VHT)	80	106	13.88	14.5	106	13.71	14	106	16.81	17.25
				122	13.79	14.5	122	13.69	14	122	16.75	17.25
				138	13.44	13.5	138	13.35	13.5	138	16.41	16.5
	U-NII-3 (5725~5850MHz)	ac (VHT)	80	155	13.49	13.5	155	13.36	13.5	155	16.44	16.5

WLAN 6G 2TX SISO									
OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Ant 1			SISO-Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	U-NII-5 (5925~6425MHz)	ax (HE)	20	1	10.37	11.0	1	10.15	11
				45	10.29	11.0	45	10.24	11
				93	10.41	11.0	93	10.19	11
			40	3	10.28	11.0	3	10.16	11
				43	10.31	11.0	43	10.42	11
				91	10.12	11.0	91	10.23	11
			80	7	10.27	11.0	7	10.31	11
				39	10.23	11.0	39	10.42	11
				87	10.12	11.0	87	10.29	11
			160	15	10.71	11.0	15	10.77	11
				47	10.72	11.0	47	10.71	11
				79	10.70	11.0	79	10.69	11
		be (EHT)	20	1	10.22	11.0	1	10.21	11
				45	10.31	11.0	45	10.13	11
				93	10.15	11.0	93	10.25	11
			40	3	10.29	11.0	3	10.49	11
				43	10.21	11.0	43	10.37	11
				91	10.27	11.0	91	10.26	11
			80	7	10.09	11.0	7	10.17	11
				39	10.18	11.0	39	10.11	11
				87	10.27	11.0	87	10.32	11
			160	15	10.33	11.0	15	10.28	11
				47	10.41	11.0	47	10.31	11
				79	10.35	11.0	79	10.19	11
	U-NII-6 (6425~6525MHz)	ax (HE)	20	97	10.21	11.0	97	10.23	11
				105	10.27	11.0	105	10.21	11
				113	10.46	11.0	113	10.26	11
			40	99	10.07	11.0	99	10.34	11
				107	10.32	11.0	107	10.39	11
				80	10.26	11.0	103	10.17	11
		be (EHT)	160	111	10.97	11.0	111	10.98	11
			20	97	10.08	11.0	97	10.25	11
				105	10.22	11.0	105	10.22	11
				113	10.31	11.0	113	10.16	11
			40	99	10.04	11.0	99	10.21	11
				107	10.26	11.0	107	10.18	11
			80	103	10.09	11.0	103	10.15	11
				111	10.33	11.0	111	10.32	11

	Frequency	Mode	BW	SISO-Ant 1			SISO-Ant 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
OFDM mode specified maximum output power at an antenna port	U-NII-7 (6525~6875MHz)	ax (HE)	20	117	10.22	11.0	117	10.33	11
				149	10.17	11.0	149	10.39	11
				181	10.06	11.0	181	10.34	11
			40	115	10.36	11.0	115	10.36	11
				147	10.34	11.0	147	10.29	11
				179	10.41	11.0	179	10.21	11
			80	119	10.35	11.0	119	10.46	11
				135	10.34	11.0	135	10.37	11
				151	10.11	11.0	151	10.39	11
				167	10.22	11.0	167	10.43	11
				183	10.24	11.0	183	10.11	11
			160	143	10.81	11.0	143	10.71	11
				175	10.91	11.0	175	10.86	11
		be (EHT)	20	117	10.32	11.0	117	10.21	11
				149	10.27	11.0	149	10.18	11
				181	10.19	11.0	181	10.37	11
			40	115	10.24	11.0	115	10.14	11
				147	10.31	11.0	147	10.29	11
				179	10.22	11.0	179	10.31	11
			80	119	10.04	11.0	119	10.16	11
				135	10.16	11.0	135	10.14	11
				151	10.33	11.0	151	10.09	11
				167	10.29	11.0	167	10.18	11
				183	10.41	11.0	183	10.12	11
			160	143	10.35	11.0	143	10.07	11
				175	10.26	11.0	175	10.25	11
	U-NII-8 (6875~7125MHz)	ax (HE)	20	185	10.12	11.0	185	10.18	11
				209	10.16	11.0	209	10.26	11
				233	10.27	11.0	233	10.38	11
			40	187	10.36	11.0	187	10.05	11
				227	10.11	11.0	227	10.34	11
			80	199	10.08	11.0	199	10.06	11
				215	10.44	11.0	215	10.04	11
			160	207	10.82	11.0	207	10.74	11
		be (EHT)	20	185	10.13	11.0	185	10.16	11
				209	10.15	11.0	209	10.21	11
				233	10.20	11.0	233	10.14	11
			40	187	10.10	11.0	187	10.36	11
				227	10.07	11.0	227	10.23	11
			80	199	10.15	11.0	199	10.17	11
				215	10.18	11.0	215	10.08	11
			160	207	10.29	11.0	207	10.05	11

9. Test Results

9.1 Test Results Summary

SAR MEASUREMENT								
Ambient Temperature (°C): 23.1±2					Relative Humidity (%): 51%			
Liquid Temperature (°C): 22.3±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN2.4GHz_802.11b-1M_Ant 1								
Front_180 Degree	5	1	2412	11.85	12	0.940	0.992	
Front_180 Degree	5	6	2437	11.94	12	0.806	0.834	
Front_180 Degree	5	11	2462	11.88	12	0.768	0.805	
Back_180 Degree	5	6	2437	11.94	12	0.493	0.510	
Left-side_180 Degree	5	6	2437	11.94	12	0.391	0.404	
Right-side_180 Degree	5	6	2437	11.94	12	0.043	0.044	
Tip_180 Degree	5	6	2437	11.94	12	0.022	0.023	
Bottom_90 Degree	5	6	2437	11.94	12	0.026	0.027	
Front_0 Degree	5	6	2437	11.94	12	0.692	0.716	
Back_0 Degree	5	6	2437	11.94	12	0.074	0.077	
Left-side_0 Degree	5	6	2437	11.94	12	0.411	0.425	
Right-side_0 Degree	5	6	2437	11.94	12	0.026	0.027	
Tip_0 Degree	5	6	2437	11.94	12	0.032	0.033	
Test Mode: WLAN2.4GHz_802.11b-1M_Ant 2								
Front_180 Degree	5	1	2412	11.91	12	0.722	0.752	
Front_180 Degree	5	6	2437	11.92	12	0.834	0.866	
Front_180 Degree	5	11	2462	11.89	12	0.720	0.753	
Back_180 Degree	5	6	2437	11.92	12	0.429	0.446	
Left-side_180 Degree	5	6	2437	11.92	12	0.012	0.012	
Right-side_180 Degree	5	6	2437	11.92	12	0.322	0.335	
Tip_180 Degree	5	6	2437	11.92	12	0.023	0.024	
Bottom_90 Degree	5	6	2437	11.92	12	0.017	0.018	
Front_0 Degree	5	1	2412	11.91	12	0.841	0.876	
Front_0 Degree	5	6	2437	11.92	12	0.988	1.026	16
Front_0 Degree	5	11	2462	11.89	12	0.936	0.979	
Back_0 Degree	5	6	2437	11.92	12	0.024	0.025	
Left-side_0 Degree	5	6	2437	11.92	12	0.029	0.030	
Right-side_0 Degree	5	6	2437	11.92	12	0.387	0.402	
Tip_0 Degree	5	6	2437	11.92	12	0.022	0.023	
Test Mode: WLAN2.4GHz_802.11b-1M_MIMO								
Front_180 Degree	5	1	2412	14.65	15	0.664	0.734	
Front_0 Degree	5	1	2412	14.65	15	0.577	0.638	
Front_0 Degree	5	6	2437	14.59	15	0.748	0.838	
Front_0 Degree	5	11	2462	14.51	15	0.875	0.999	

Note:

- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required.
- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.

SAR MEASUREMENT								
Ambient Temperature (°C): 23.2±2					Relative Humidity (%): 53%			
Liquid Temperature (°C): 21.9±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Ant 1								
Front_180 Degree	5	58	5290	15.97	16	0.684	0.740	
Back_180 Degree	5	58	5290	15.97	16	0.282	0.305	
Left-side_180 Degree	5	58	5290	15.97	16	0.179	0.194	
Right-side_180 Degree	5	58	5290	15.97	16	0.055	0.060	
Tip_180 Degree	5	58	5290	15.97	16	0.079	0.086	
Bottom_90 Degree	5	58	5290	15.97	16	0.043	0.047	
Front_0 Degree	5	58	5290	15.97	16	0.700	0.758	
Back_0 Degree	5	58	5290	15.97	16	0.022	0.024	
Left-side_0 Degree	5	58	5290	15.97	16	0.265	0.287	
Right-side_0 Degree	5	58	5290	15.97	16	0.021	0.023	
Tip_0 Degree	5	58	5290	15.97	16	0.017	0.018	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Ant 2								
Front_180 Degree	5	58	5290	14.93	15	0.682	0.745	
Back_180 Degree	5	58	5290	14.93	15	0.248	0.271	
Left-side_180 Degree	5	58	5290	14.93	15	0.046	0.050	
Right-side_180 Degree	5	58	5290	14.93	15	0.232	0.253	
Tip_180 Degree	5	58	5290	14.93	15	0.045	0.049	
Bottom_90 Degree	5	58	5290	14.93	15	0.114	0.125	
Front_0 Degree	5	58	5290	14.93	15	0.925	1.011	4
Back_0 Degree	5	58	5290	14.93	15	0.021	0.023	
Left-side_0 Degree	5	58	5290	14.93	15	0.032	0.035	
Right-side_0 Degree	5	58	5290	14.93	15	0.258	0.282	
Tip_0 Degree	5	58	5290	14.93	15	0.048	0.052	
Test Mode: WLAN5GHz_802.11ac80-VHT0_MIMO								
Front_180 Degree	5	58	5290	17.99	18.5	0.449	0.543	
Front_0 Degree	5	58	5290	17.99	18.5	0.754	0.912	

Note:

1. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
2. When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.
3. When the reported SAR of the highest measured maximum U-NII-2A for the exposure configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.

SAR MEASUREMENT								
Ambient Temperature (°C): 23.3±2					Relative Humidity (%): 52%			
Liquid Temperature (°C): 22.1±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Ant 1								
Front_180 Degree	5	106	5530	14.41	14.5	0.777	0.853	
Front_180 Degree	5	122	5610	14.39	14.5	0.888	0.979	
Front_180 Degree	5	138	5690	13.42	13.5	0.827	0.906	
Back_180 Degree	5	106	5530	14.41	14.5	0.278	0.305	
Left-side_180 Degree	5	106	5530	14.41	14.5	0.173	0.190	
Right-side_180 Degree	5	106	5530	14.41	14.5	0.103	0.113	
Tip_180 Degree	5	106	5530	14.41	14.5	0.105	0.115	
Bottom_90 Degree	5	106	5530	14.41	14.5	0.030	0.033	
Front_0 Degree	5	106	5530	14.41	14.5	0.555	0.609	
Back_0 Degree	5	106	5530	14.41	14.5	0.069	0.076	
Left-side_0 Degree	5	106	5530	14.41	14.5	0.360	0.395	
Right-side_0 Degree	5	106	5530	14.41	14.5	0.017	0.019	
Tip_0 Degree	5	106	5530	14.41	14.5	0.018	0.020	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Ant 2								
Front_180 Degree	5	106	5530	13.92	14	0.667	0.730	
Back_180 Degree	5	106	5530	13.92	14	0.262	0.287	
Left-side_180 Degree	5	106	5530	13.92	14	0.070	0.077	
Right-side_180 Degree	5	106	5530	13.92	14	0.264	0.289	
Tip_180 Degree	5	106	5530	13.92	14	0.028	0.031	
Bottom_90 Degree	5	106	5530	13.92	14	0.087	0.095	
Front_0 Degree	5	106	5530	13.92	14	0.847	0.927	
Front_0 Degree	5	122	5610	13.85	14	0.978	1.088	
Front_0 Degree	5	138	5690	13.33	13.5	0.985	1.101	46
Back_0 Degree	5	106	5530	13.92	14	0.068	0.074	
Left-side_0 Degree	5	106	5530	13.92	14	0.059	0.065	
Right-side_0 Degree	5	106	5530	13.92	14	0.472	0.517	
Tip_0 Degree	5	106	5530	13.92	14	0.066	0.072	
Test Mode: WLAN5GHz_802.11ac80-VHT0_MIMO								
Front_180 Degree	5	106	5530	16.81	17.25	0.533	0.634	
Front_0 Degree	5	106	5530	16.81	17.25	0.681	0.810	
Front_0 Degree	5	122	5610	16.75	17.25	0.758	0.914	
Front_0 Degree	5	138	5690	16.41	16.5	0.944	1.036	

Note:

- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

SAR MEASUREMENT								
Ambient Temperature (°C): 23.3±2					Relative Humidity (%): 52%			
Liquid Temperature (°C): 22.1±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Ant 1								
Front_180 Degree	5	155	5775	13.47	13.5	0.814	0.881	
Back_180 Degree	5	155	5775	13.47	13.5	0.298	0.323	
Left-side_180 Degree	5	155	5775	13.47	13.5	0.188	0.204	
Right-side_180 Degree	5	155	5775	13.47	13.5	0.154	0.167	
Tip_180 Degree	5	155	5775	13.47	13.5	0.153	0.166	
Bottom_90 Degree	5	155	5775	13.47	13.5	0.156	0.169	
Front_0 Degree	5	155	5775	13.47	13.5	0.595	0.644	
Back_0 Degree	5	155	5775	13.47	13.5	0.083	0.090	
Left-side_0 Degree	5	155	5775	13.47	13.5	0.564	0.611	
Right-side_0 Degree	5	155	5775	13.47	13.5	0.158	0.171	
Tip_0 Degree	5	155	5775	13.47	13.5	0.096	0.104	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Ant 2								
Front_180 Degree	5	155	5775	13.46	13.5	0.727	0.789	
Back_180 Degree	5	155	5775	13.46	13.5	0.208	0.226	
Left-side_180 Degree	5	155	5775	13.46	13.5	0.077	0.084	
Right-side_180 Degree	5	155	5775	13.46	13.5	0.219	0.238	
Tip_180 Degree	5	155	5775	13.46	13.5	0.036	0.039	
Bottom_90 Degree	5	155	5775	13.46	13.5	0.098	0.106	
Front_0 Degree	5	155	5775	13.46	13.5	1.080	1.172	20
Back_0 Degree	5	155	5775	13.46	13.5	0.048	0.052	
Left-side_0 Degree	5	155	5775	13.46	13.5	0.075	0.081	
Right-side_0 Degree	5	155	5775	13.46	13.5	0.660	0.716	
Tip_0 Degree	5	155	5775	13.46	13.5	0.035	0.038	
Test Mode: WLAN5GHz_802.11ac80-VHT0_MIMO								
Front_180 Degree	5	155	5775	16.44	16.5	0.592	0.645	
Front_0 Degree	5	155	5775	16.44	16.5	0.762	0.831	

Note:

1. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
2. When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

SAR MEASUREMENT									
Ambient Temperature (°C): 23.2 ±2					Relative Humidity (%): 51%				
Liquid Temperature (°C): 22.2 ±2					Depth of Liquid (cm): >15				
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		APD (W/m²)	Plot No
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	Meas-4cm²	
Test Mode: WLAN6GHz_802.11ax160-HE0_Ant 1									
Front_180 Degree	5	111	6505	10.97	11	0.233	0.239	1.610	
Back_180 Degree	5	111	6505	10.97	11	0.143	0.147	0.959	
Left-side_180 Degree	5	111	6505	10.97	11	0.139	0.143	1.010	
Right-side_180 Degree	5	111	6505	10.97	11	0.052	0.053	0.433	
Tip_180 Degree	5	111	6505	10.97	11	0.061	0.063	0.516	
Bottom_90 Degree	5	111	6505	10.97	11	0.048	0.049	0.195	
Front_0 Degree	5	15	6025	10.71	11	0.212	0.231	1.060	
Front_0 Degree	5	47	6185	10.72	11	0.596	0.648	3.300	
Front_0 Degree	5	111	6505	10.97	11	0.321	0.330	1.470	
Front_0 Degree	5	175	6825	10.91	11	0.244	0.254	1.130	
Front_0 Degree	5	207	6985	10.82	11	0.155	0.165	0.635	
Back_0 Degree	5	111	6505	10.97	11	0.038	0.039	0.140	
Left-side_0 Degree	5	111	6505	10.97	11	0.122	0.125	0.730	
Right-side_0 Degree	5	111	6505	10.97	11	0.008	0.008	0.052	
Tip_0 Degree	5	111	6505	10.97	11	0.026	0.027	0.178	
Test Mode: WLAN6GHz_802.11ax160-HE0_Ant 2									
Front_180 Degree	5	111	6505	10.98	11	0.228	0.234	1.630	
Back_180 Degree	5	111	6505	10.98	11	0.185	0.190	1.240	
Left-side_180 Degree	5	111	6505	10.98	11	0.128	0.131	0.969	
Right-side_180 Degree	5	111	6505	10.98	11	0.140	0.143	0.977	
Tip_180 Degree	5	111	6505	10.98	11	0.048	0.049	0.394	
Bottom_90 Degree	5	111	6505	10.98	11	0.090	0.092	0.521	
Front_0 Degree	5	15	6025	10.77	11	0.422	0.454	2.430	
Front_0 Degree	5	47	6185	10.71	11	0.745	0.812	4.320	45
Front_0 Degree	5	111	6505	10.98	11	0.486	0.498	2.510	
Front_0 Degree	5	175	6825	10.86	11	0.273	0.288	1.310	
Front_0 Degree	5	207	6985	10.74	11	0.162	0.175	0.710	
Back_0 Degree	5	111	6505	10.98	11	0.074	0.076	0.214	
Left-side_0 Degree	5	111	6505	10.98	11	0.042	0.043	0.259	
Right-side_0 Degree	5	111	6505	10.98	11	0.183	0.188	1.300	
Tip_0 Degree	5	111	6505	10.98	11	0.036	0.037	0.017	

Note:

- When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

PD MEASUREMENT											
Ambient Temperature (°C): 23.1±2						Relative Humidity (%): 50%					
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		psPDn+ (W/m²)		psPDtot+ (W/m²)		Uncertainty	Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-4cm²	Scaled-4cm²	Meas-4cm²	Scaled-4cm²	Uncertainty Scaling Factor	
Test Mode: WLAN6GHz_802.11ax160-HE0_Ant 2											
Front_0 Degree	5	15	6025	10.77	11	3.790	6.318	3.940	6.568	1.550	
Front_0 Degree	5	47	6185	10.71	11	3.920	6.625	4.160	7.031	1.550	1
Front_0 Degree	5	111	6505	10.98	11	2.540	4.034	2.700	4.288	1.550	
Front_0 Degree	5	175	6825	10.86	11	3.570	5.829	3.720	6.074	1.550	
Front_0 Degree	5	207	6985	10.74	11	2.410	4.045	2.550	4.280	1.550	

Note:

- Per WLAN 6 GHz interim test procedure in Oct. 2020 TCBs Workshop notes. At least 5 channels for BW 160MHz should be tested.

9.2 Simultaneous Transmission

Simultaneous Transmission Configurations	
1	WLAN 2.4 GHz ANT 1 + WLAN 2.4 GHz ANT 2
2	WLAN 5 GHz ANT 1 + WLAN 5 GHz ANT 2
3	WLAN 6 GHz ANT 1 + WLAN 6 GHz ANT 2

9.2.1 Simultaneous transmission test exclusion considerations

Test Position	1	2	3	4	5	6	1 + 2	3 + 4	5 + 6
	WLAN2.4GHz ANT 1 (W/kg)	WLAN2.4GHz ANT 2 (W/kg)	WLAN5GHz ANT 1 (W/kg)	WLAN5GHz ANT 2 (W/kg)	WLAN6GHz ANT 1 (W/kg)	WLAN6GHz ANT 2 (W/kg)	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR
Front_180 Degree at 5 mm	0.992	0.866	0.979	0.789	0.239	0.234	1.858	1.768	0.473
Back_180 Degree at 5 mm	0.510	0.446	0.323	0.287	0.147	0.190	0.956	0.610	0.337
Left-side_180 Degree at 5 mm	0.404	0.012	0.204	0.084	0.143	0.131	0.416	0.288	0.274
Right-side_180 Degree at 5 mm	0.044	0.335	0.167	0.289	0.053	0.143	0.379	0.456	0.196
Tip_180 Degree at 5 mm	0.023	0.024	0.166	0.049	0.063	0.049	0.047	0.215	0.112
Bottom_90 Degree at 5 mm	0.027	0.018	0.169	0.125	0.049	0.092	0.045	0.294	0.141
Front_0 Degree at 5 mm	0.716	1.026	0.758	1.172	0.648	0.812	1.742	1.930	1.460
Back_0 Degree at 5 mm	0.077	0.025	0.090	0.074	0.039	0.076	0.102	0.164	0.115
Left-side_0 Degree at 5 mm	0.425	0.030	0.611	0.081	0.125	0.043	0.455	0.692	0.168
Right-side_0 Degree at 5 mm	0.027	0.402	0.171	0.716	0.008	0.188	0.429	0.887	0.196
Tip_0 Degree at 5 mm	0.033	0.023	0.104	0.072	0.027	0.037	0.056	0.176	0.064

Test Position	1 + 2	3 + 4
	WLAN2.4GHz MIMO ANT 1 + ANT 2 (W/kg)	WLAN5GHz ANT MIMO ANT 1 + ANT 2 (W/kg)
Front_180 Degree at 5 mm	0.734	0.645
Front_0 Degree at 5 mm	0.999	1.036

Note: The MIMO SAR values are less than 1.6 W/kg.

10. SAR measurement variability

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency		SAR 1g (W/kg)		
Channel	MHz	Original	First Repeated	
			Value	Ratio
6	2437	0.988	0.916	1.079
155	5775	1.080	1.070	1.009

Appendix

Appendix A. System Check Data

Appendix B. Highest measurement Data

Appendix C. Test Setup Photographs

Appendix D. Probe Calibration Data

Appendix E. Dipole Calibration Data

Appendix F. Product Photos-Please refer to the file: 24A0832R-Product Photos