




Test Mode : 2TX 11be EHT40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

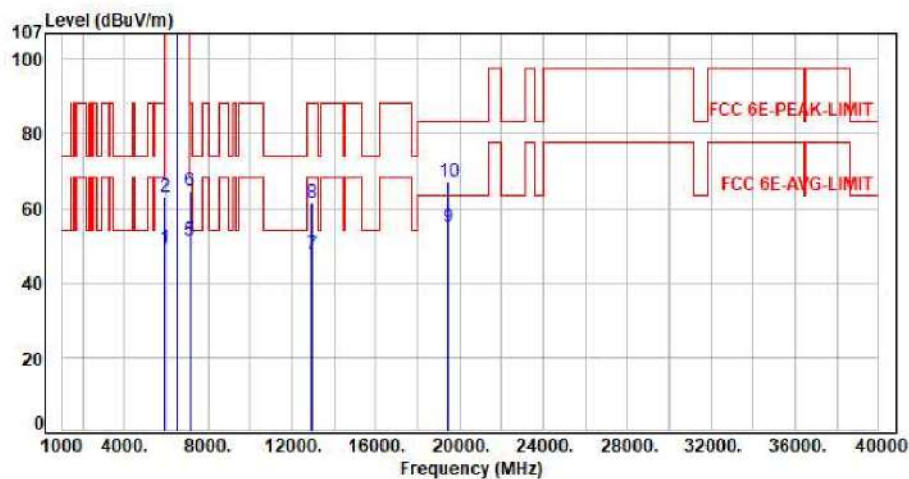

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.59	49.32	68.20	-18.88	Average	100	62	P
2	5925.00	7.73	55.36	63.09	88.20	-25.11	Peak	100	62	P
3	6485.00	8.35	98.86	107.21	200.00	-92.79	Average	100	62	P
4	6485.00	8.35	111.44	119.79	200.00	-80.21	Peak	100	62	P
5	7125.00	9.92	41.44	51.36	68.20	-16.84	Average	100	62	P
6	7125.00	9.92	54.92	64.84	88.20	-23.36	Peak	100	62	P
7	12970.00	18.48	29.20	47.68	68.20	-20.52	Average	100	34	P
8	12970.00	18.48	43.15	61.63	88.20	-26.57	Peak	100	34	P
9	19455.00	10.20	44.76	54.96	63.54	-8.58	Average	150	360	P
10	19455.00	10.20	56.89	67.09	83.54	-16.45	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

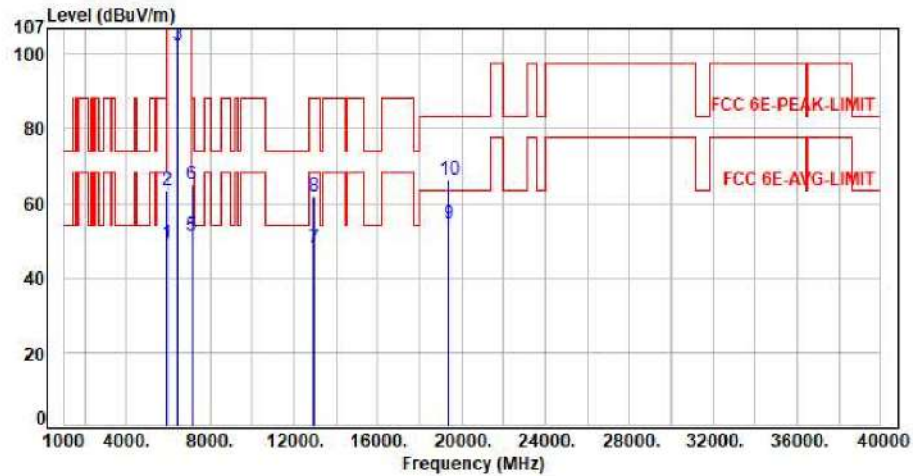

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.59	49.32	68.20	-18.88	Average	100	358	P
2	5925.00	7.73	55.60	63.33	88.20	-24.87	Peak	100	358	P
3	6465.00	8.33	94.29	102.62	200.00	-97.38	Average	100	358	P
4	6465.00	8.33	106.74	115.07	200.00	-84.93	Peak	100	358	P
5	7125.00	9.92	41.32	51.24	68.20	-16.96	Average	100	358	P
6	7125.00	9.92	55.02	64.94	88.20	-23.26	Peak	100	358	P
7	12930.00	18.27	29.78	48.05	68.20	-20.15	Average	100	270	P
8	12930.00	18.27	43.65	61.92	88.20	-26.28	Peak	100	270	P
9	19395.00	10.14	44.51	54.65	63.54	-8.89	Average	150	360	P
10	19395.00	10.14	56.22	66.36	83.54	-17.18	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

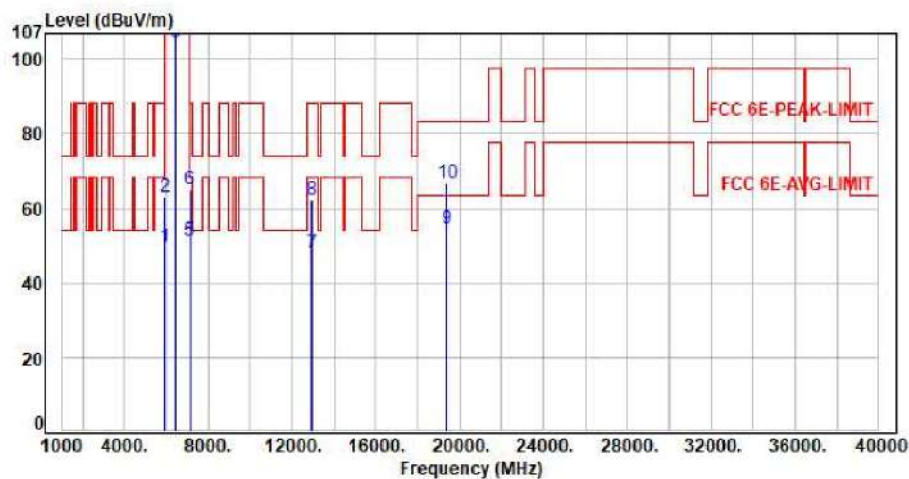

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.71	49.44	68.20	-18.76	Average	112	63	P
2	5925.00	7.73	55.24	62.97	88.20	-25.23	Peak	112	63	P
3	6465.00	8.33	96.09	104.42	200.00	-95.58	Average	112	63	P
4	6465.00	8.33	108.48	116.81	200.00	-83.19	Peak	112	63	P
5	7125.00	9.92	41.42	51.34	68.20	-16.86	Average	112	63	P
6	7125.00	9.92	55.22	65.14	88.20	-23.06	Peak	112	63	P
7	12930.00	18.27	29.86	48.13	68.20	-20.07	Average	100	31	P
8	12930.00	18.27	43.85	62.12	88.20	-26.08	Peak	100	31	P
9	19395.00	10.14	44.25	54.39	63.54	-9.15	Average	150	360	P
10	19395.00	10.14	56.48	66.62	83.54	-16.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



U-NII-7

Test Mode : 2TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

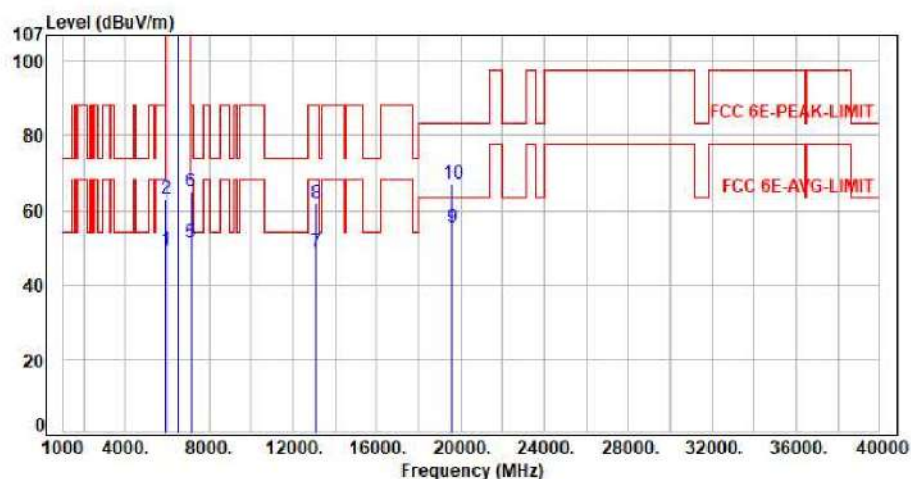

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.46	49.19	68.20	-19.01	Average	100	357	P
2	5925.00	7.73	55.34	63.07	88.20	-25.13	Peak	100	357	P
3	6535.00	8.57	101.33	109.90	200.00	-90.10	Average	100	357	P
4	6535.00	8.57	112.55	121.12	200.00	-78.88	Peak	100	357	P
5	7125.00	9.92	41.20	51.12	68.20	-17.08	Average	100	357	P
6	7125.00	9.92	55.31	65.23	88.20	-22.97	Peak	100	357	P
7	13070.00	18.92	29.81	48.73	68.20	-19.47	Average	100	278	P
8	13070.00	18.92	42.74	61.66	88.20	-26.54	Peak	100	278	P
9	19605.00	10.37	44.84	55.21	63.54	-8.33	Average	150	360	P
10	19605.00	10.37	56.91	67.28	83.54	-16.26	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

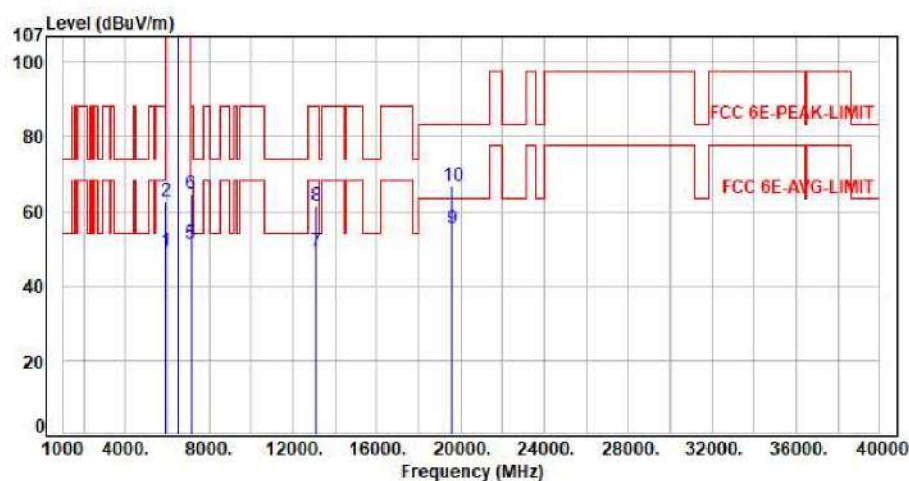

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.56	49.29	68.20	-18.91	Average	100	68	P
2	5925.00	7.73	55.05	62.78	88.20	-25.42	Peak	100	68	P
3	6535.00	8.57	101.26	109.83	200.00	-90.17	Average	100	68	P
4	6535.00	8.57	112.20	120.77	200.00	-79.23	Peak	100	68	P
5	7125.00	9.92	41.32	51.24	68.20	-16.96	Average	100	68	P
6	7125.00	9.92	54.68	64.60	88.20	-23.60	Peak	100	68	P
7	13070.00	18.92	30.23	49.15	68.20	-19.05	Average	100	28	P
8	13070.00	18.92	42.42	61.34	88.20	-26.86	Peak	100	28	P
9	19605.00	10.37	44.88	55.25	63.54	-8.29	Average	150	360	P
10	19605.00	10.37	56.30	66.67	83.54	-16.87	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

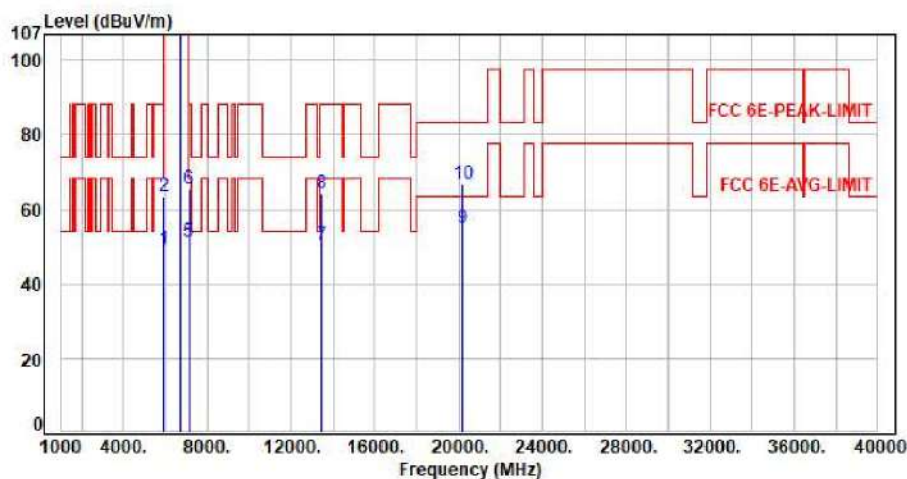

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.42	49.15	68.20	-19.05	Average	259	359	P
2	5925.00	7.73	55.93	63.66	88.20	-24.54	Peak	259	359	P
3	6715.00	9.20	101.61	110.81	200.00	-89.19	Average	259	359	P
4	6715.00	9.20	112.44	121.64	200.00	-78.36	Peak	259	359	P
5	7125.00	9.92	41.30	51.22	68.20	-16.98	Average	259	359	P
6	7125.00	9.92	55.61	65.53	88.20	-22.67	Peak	259	359	P
7	13430.00	20.57	29.71	50.28	68.20	-17.92	Average	100	271	P
8	13430.00	20.57	43.54	64.11	88.20	-24.09	Peak	100	271	P
9	20145.00	10.24	44.74	54.98	63.54	-8.56	Average	150	360	P
10	20145.00	10.24	56.55	66.79	83.54	-16.75	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

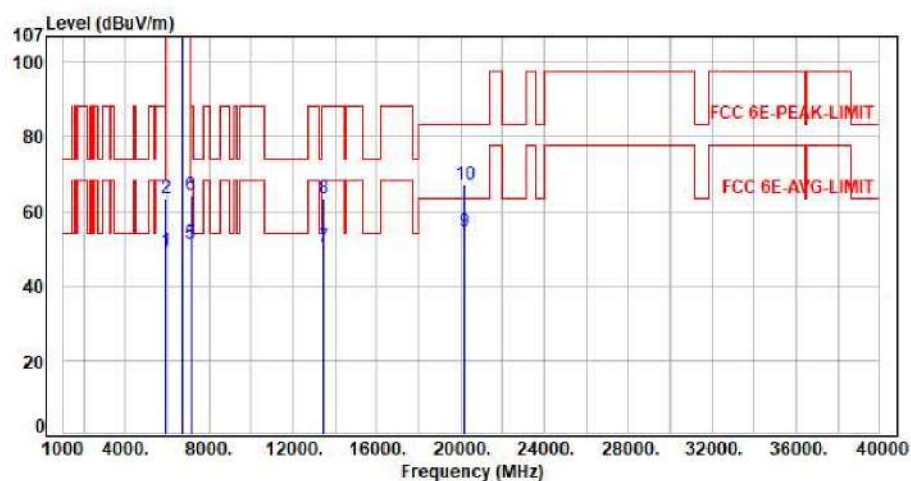

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.43	49.16	68.20	-19.04	Average	100	60	P
2	5925.00	7.73	55.77	63.50	88.20	-24.70	Peak	100	60	P
3	6715.00	9.20	100.33	109.53	200.00	-90.47	Average	100	60	P
4	6715.00	9.20	111.23	120.43	200.00	-79.57	Peak	100	60	P
5	7125.00	9.92	41.29	51.21	68.20	-16.99	Average	100	60	P
6	7125.00	9.92	54.55	64.47	88.20	-23.73	Peak	100	60	P
7	13430.00	20.57	29.95	50.52	68.20	-17.68	Average	100	29	P
8	13430.00	20.57	42.74	63.31	88.20	-24.89	Peak	100	29	P
9	20145.00	10.24	44.36	54.60	63.54	-8.94	Average	150	360	P
10	20145.00	10.24	56.69	66.93	83.54	-16.61	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

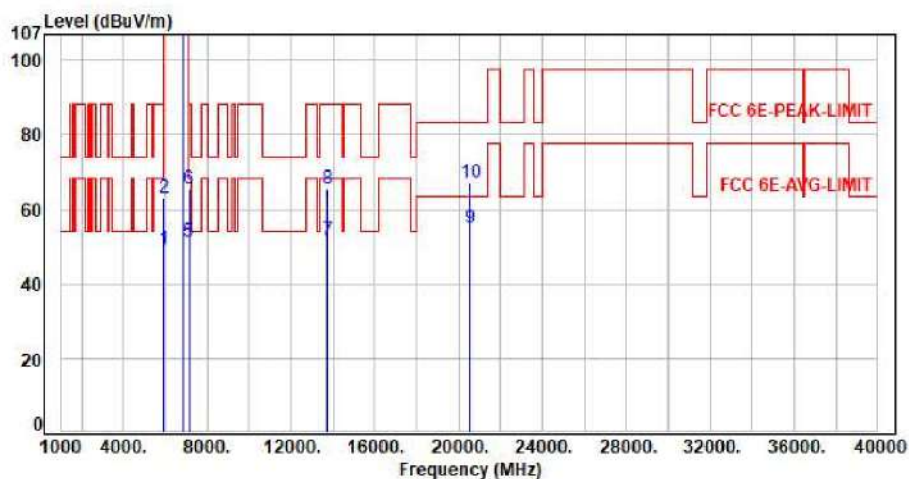

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.43	49.16	68.20	-19.04	Average	100	360	P
2	5925.00	7.73	55.38	63.11	88.20	-25.09	Peak	100	360	P
3	6855.00	9.48	96.89	106.37	200.00	-93.63	Average	100	360	P
4	6855.00	9.48	108.00	117.48	200.00	-82.52	Peak	100	360	P
5	7125.00	9.92	41.24	51.16	68.20	-17.04	Average	100	360	P
6	7125.00	9.92	55.65	65.57	88.20	-22.63	Peak	100	360	P
7	13710.00	21.36	30.39	51.75	68.20	-16.45	Average	100	273	P
8	13710.00	21.36	44.22	65.58	88.20	-22.62	Peak	100	273	P
9	20565.00	9.93	45.05	54.98	63.54	-8.56	Average	150	360	P
10	20565.00	9.93	57.11	67.04	83.54	-16.50	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

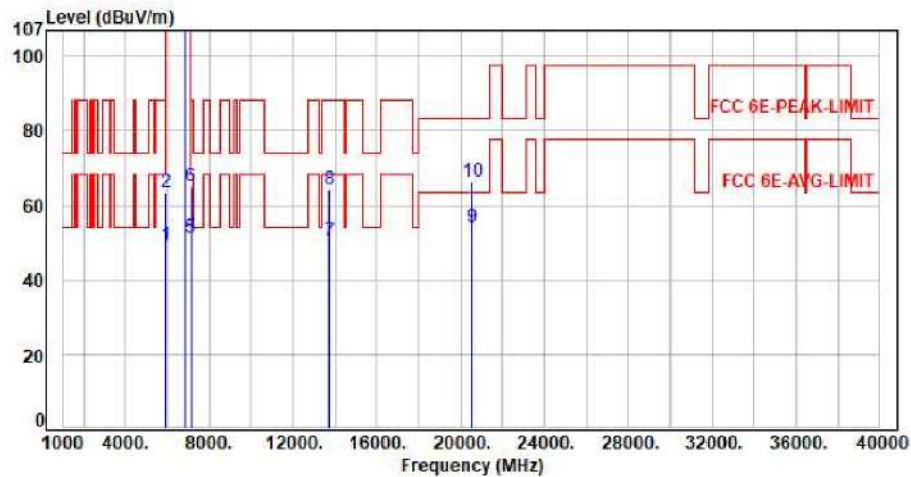

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.46	49.19	68.20	-19.01	Average	100	314	P
2	5925.00	7.73	55.83	63.56	88.20	-24.64	Peak	100	314	P
3	6855.00	9.48	98.76	108.24	200.00	-91.76	Average	100	314	P
4	6855.00	9.48	109.76	119.24	200.00	-80.76	Peak	100	314	P
5	7125.00	9.92	41.34	51.26	68.20	-16.94	Average	100	314	P
6	7125.00	9.92	54.99	64.91	88.20	-23.29	Peak	100	314	P
7	13710.00	21.36	29.16	50.52	68.20	-17.68	Average	100	26	P
8	13710.00	21.36	42.87	64.23	88.20	-23.97	Peak	100	26	P
9	20565.00	9.93	44.31	54.24	63.54	-9.30	Average	150	360	P
10	20565.00	9.93	56.45	66.38	83.54	-17.16	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

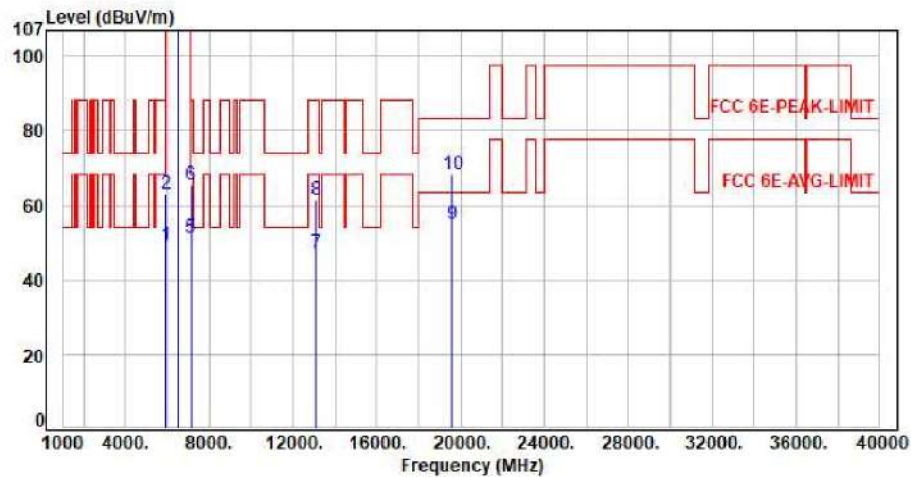

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.57	49.30	68.20	-18.90	Average	100	358	P
2	5925.00	7.73	55.31	63.04	88.20	-25.16	Peak	100	358	P
3	6535.00	8.57	101.22	109.79	200.00	-90.21	Average	100	358	P
4	6535.00	8.57	114.66	123.23	200.00	-76.77	Peak	100	358	P
5	7125.00	9.92	41.42	51.34	68.20	-16.86	Average	100	358	P
6	7125.00	9.92	55.46	65.38	88.20	-22.82	Peak	100	358	P
7	13070.00	18.92	28.47	47.39	68.20	-20.81	Average	100	271	P
8	13070.00	18.92	42.58	61.50	88.20	-26.70	Peak	100	271	P
9	19605.00	10.37	44.68	55.05	63.54	-8.49	Average	150	360	P
10	19605.00	10.37	57.79	68.16	83.54	-15.38	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

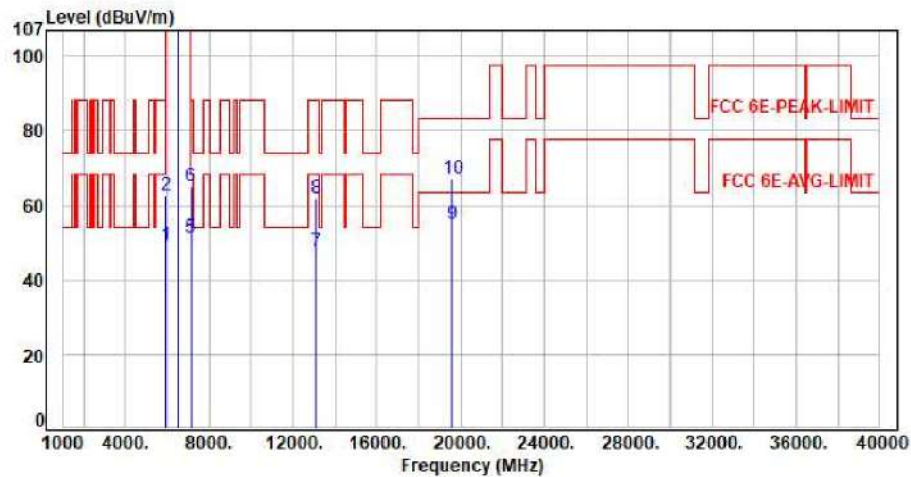

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.62	49.35	68.20	-18.85	Average	103	64	P
2	5925.00	7.73	55.03	62.76	88.20	-25.44	Peak	103	64	P
3	6535.00	8.57	101.32	109.89	200.00	-90.11	Average	103	64	P
4	6535.00	8.57	114.15	122.72	200.00	-77.28	Peak	103	64	P
5	7125.00	9.92	41.48	51.40	68.20	-16.80	Average	103	64	P
6	7125.00	9.92	55.12	65.04	88.20	-23.16	Peak	103	64	P
7	13070.00	18.92	28.87	47.79	68.20	-20.41	Average	100	31	P
8	13070.00	18.92	42.87	61.79	88.20	-26.41	Peak	100	31	P
9	19605.00	10.37	44.39	54.76	63.54	-8.78	Average	150	360	P
10	19605.00	10.37	56.69	67.06	83.54	-16.48	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

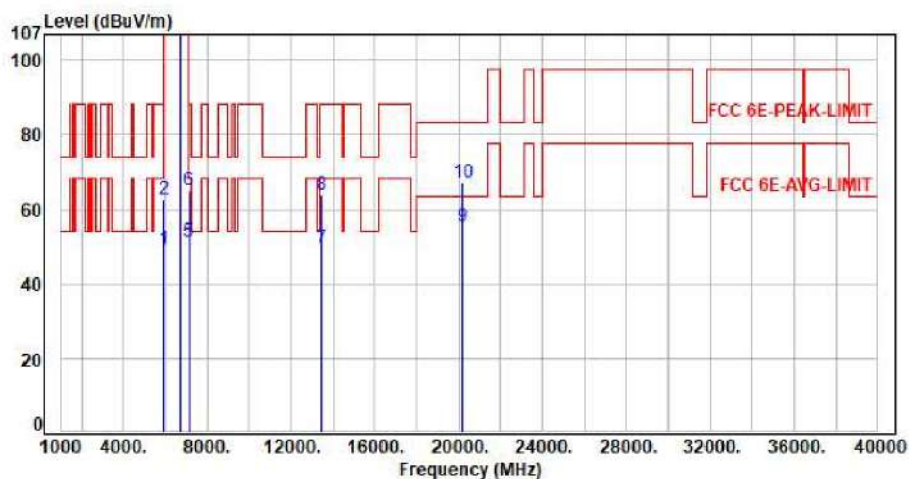

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.55	49.28	68.20	-18.92	Average	262	360	P
2	5925.00	7.73	55.01	62.74	88.20	-25.46	Peak	262	360	P
3	6715.00	9.20	100.89	110.09	200.00	-89.91	Average	262	360	P
4	6715.00	9.20	113.83	123.03	200.00	-76.97	Peak	262	360	P
5	7125.00	9.92	41.42	51.34	68.20	-16.86	Average	262	360	P
6	7125.00	9.92	55.22	65.14	88.20	-23.06	Peak	262	360	P
7	13430.00	20.57	28.93	49.50	68.20	-18.70	Average	100	275	P
8	13430.00	20.57	43.17	63.74	88.20	-24.46	Peak	100	275	P
9	20145.00	10.24	44.97	55.21	63.54	-8.33	Average	150	360	P
10	20145.00	10.24	56.85	67.09	83.54	-16.45	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

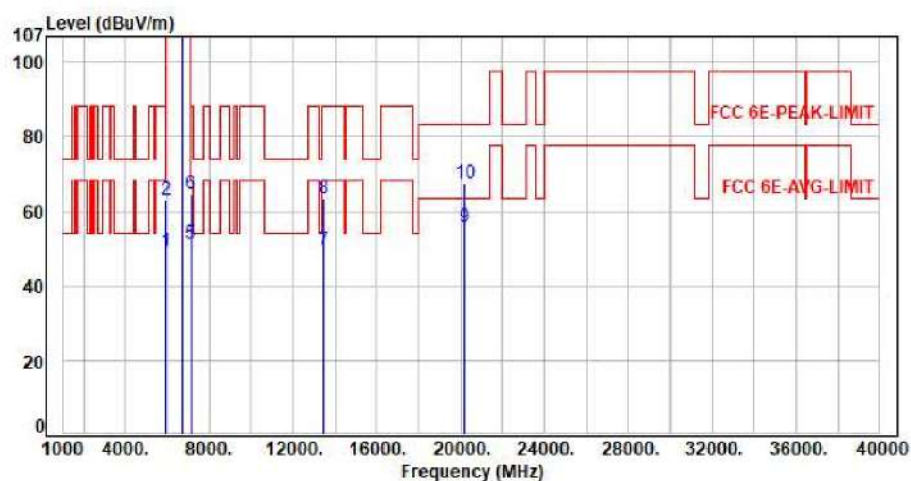

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.51	49.24	68.20	-18.96	Average	100	57	P
2	5925.00	7.73	55.24	62.97	88.20	-25.23	Peak	100	57	P
3	6715.00	9.20	100.05	109.25	200.00	-90.75	Average	100	57	P
4	6715.00	9.20	112.63	121.83	200.00	-78.17	Peak	100	57	P
5	7125.00	9.92	41.46	51.38	68.20	-16.82	Average	100	57	P
6	7125.00	9.92	54.86	64.78	88.20	-23.42	Peak	100	57	P
7	13430.00	20.57	29.21	49.78	68.20	-18.42	Average	100	31	P
8	13430.00	20.57	42.76	63.33	88.20	-24.87	Peak	100	31	P
9	20145.00	10.24	45.32	55.56	63.54	-7.98	Average	150	360	P
10	20145.00	10.24	57.48	67.72	83.54	-15.82	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

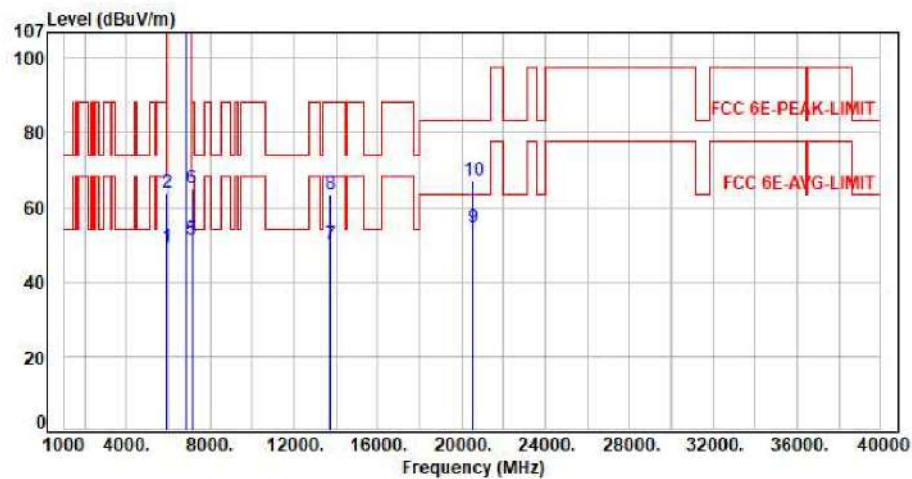

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.58	49.31	68.20	-18.89	Average	244	360	P
2	5925.00	7.73	56.06	63.79	88.20	-24.41	Peak	244	360	P
3	6855.00	9.48	99.89	109.37	200.00	-90.63	Average	244	360	P
4	6855.00	9.48	112.36	121.84	200.00	-78.16	Peak	244	360	P
5	7125.00	9.92	41.43	51.35	68.20	-16.85	Average	244	360	P
6	7125.00	9.92	55.05	64.97	88.20	-23.23	Peak	244	360	P
7	13710.00	21.36	28.69	50.05	68.20	-18.15	Average	100	270	P
8	13710.00	21.36	42.14	63.50	88.20	-24.70	Peak	100	270	P
9	20565.00	9.93	44.58	54.51	63.54	-9.03	Average	150	360	P
10	20565.00	9.93	57.24	67.17	83.54	-16.37	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

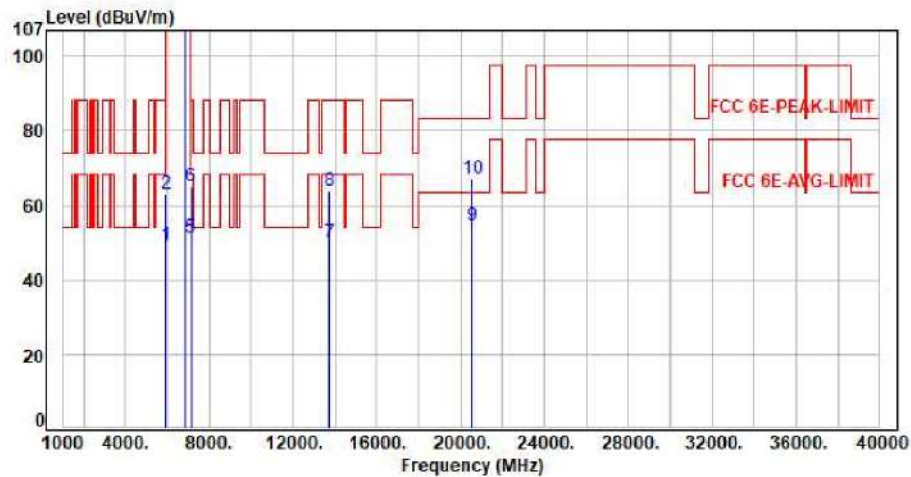

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.54	49.27	68.20	-18.93	Average	282	63	P
2	5925.00	7.73	55.18	62.91	88.20	-25.29	Peak	282	63	P
3	6855.00	9.48	98.56	108.04	200.00	-91.96	Average	282	63	P
4	6855.00	9.48	110.97	120.45	200.00	-79.55	Peak	282	63	P
5	7125.00	9.92	41.43	51.35	68.20	-16.85	Average	282	63	P
6	7125.00	9.92	55.25	65.17	88.20	-23.03	Peak	282	63	P
7	13710.00	21.36	28.85	50.21	68.20	-17.99	Average	100	35	P
8	13710.00	21.36	42.49	63.85	88.20	-24.35	Peak	100	35	P
9	20565.00	9.93	44.74	54.67	63.54	-8.87	Average	150	360	P
10	20565.00	9.93	57.14	67.07	83.54	-16.47	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be EHT40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

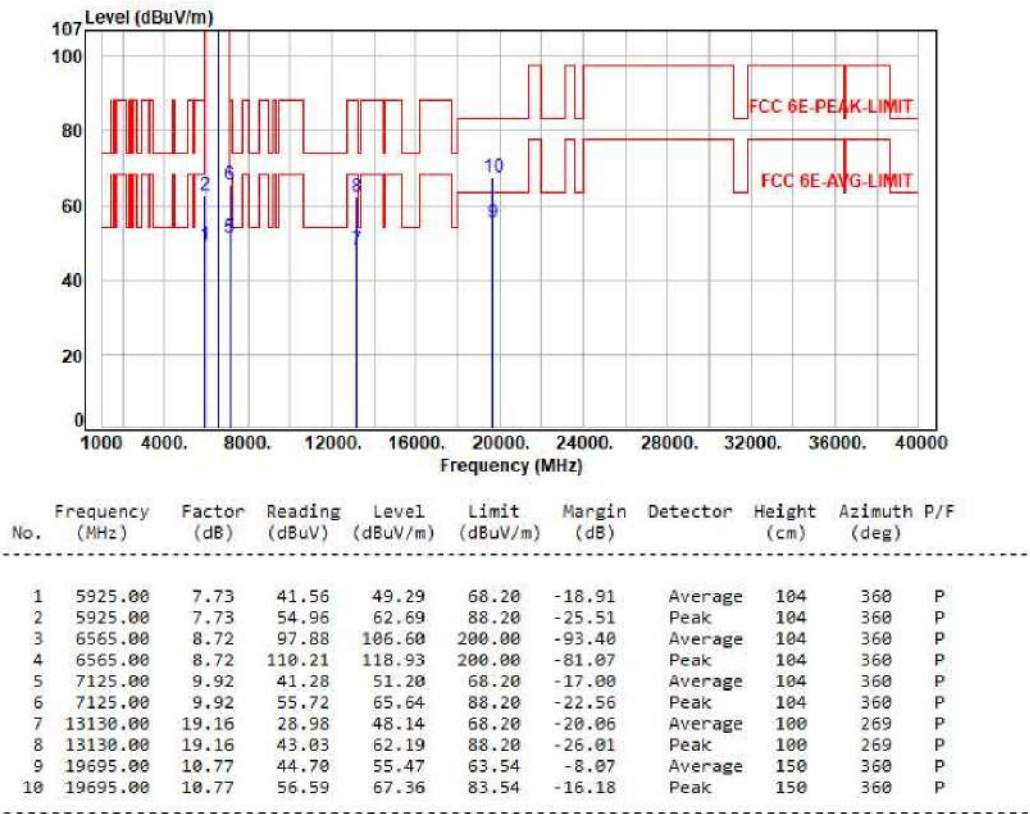

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

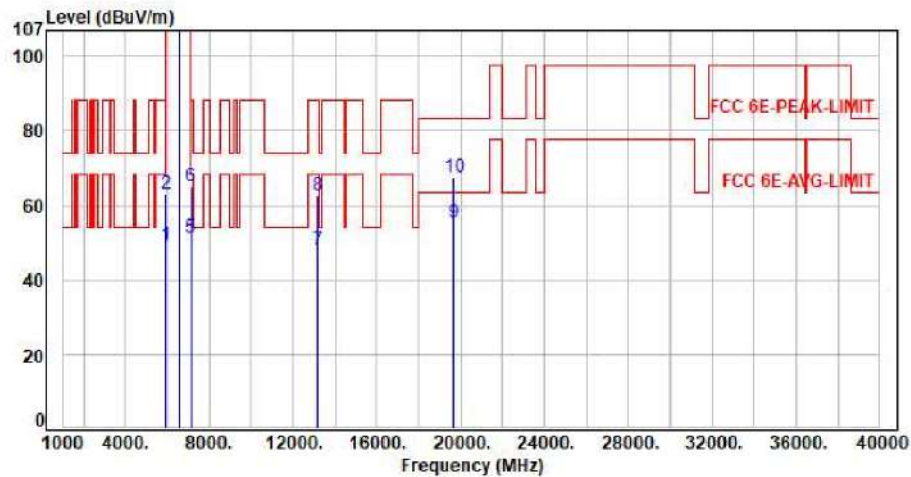

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.68	49.41	68.20	-18.79	Average	141	59	P
2	5925.00	7.73	55.39	63.12	88.20	-25.08	Peak	141	59	P
3	6565.00	8.72	98.22	106.94	200.00	-93.06	Average	141	59	P
4	6565.00	8.72	111.12	119.84	200.00	-80.16	Peak	141	59	P
5	7125.00	9.92	41.30	51.22	68.20	-16.98	Average	141	59	P
6	7125.00	9.92	55.09	65.01	88.20	-23.19	Peak	141	59	P
7	13130.00	19.16	29.02	48.18	68.20	-20.02	Average	100	32	P
8	13130.00	19.16	43.31	62.47	88.20	-25.73	Peak	100	32	P
9	19695.00	10.77	44.52	55.29	63.54	-8.25	Average	150	360	P
10	19695.00	10.77	56.64	67.41	83.54	-16.13	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

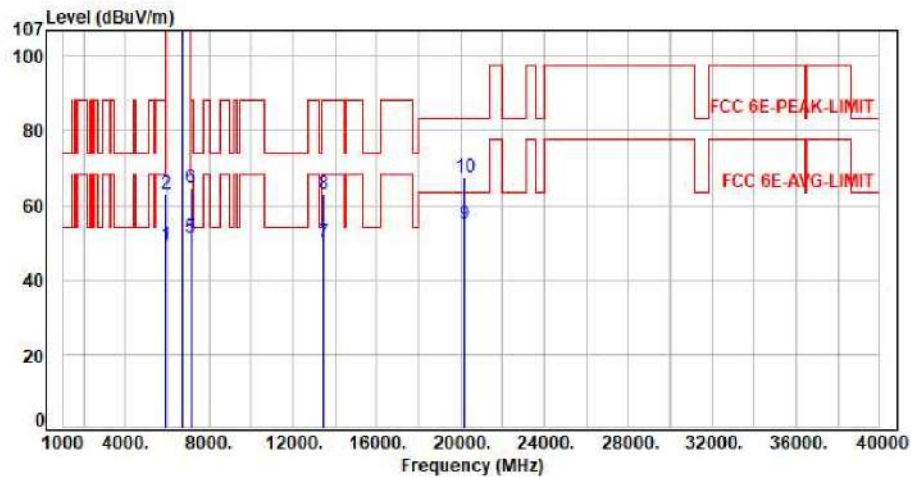

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.63	49.36	68.20	-18.84	Average	256	360	P
2	5925.00	7.73	55.20	62.93	88.20	-25.27	Peak	256	360	P
3	6725.00	9.22	98.06	107.28	200.00	-92.72	Average	256	360	P
4	6725.00	9.22	111.01	120.23	200.00	-79.77	Peak	256	360	P
5	7125.00	9.92	41.31	51.23	68.20	-16.97	Average	256	360	P
6	7125.00	9.92	54.97	64.89	88.20	-23.31	Peak	256	360	P
7	13450.00	20.62	29.62	50.24	68.20	-17.96	Average	100	271	P
8	13450.00	20.62	42.48	63.10	88.20	-25.10	Peak	100	271	P
9	20175.00	10.37	44.58	54.95	63.54	-8.59	Average	150	360	P
10	20175.00	10.37	57.27	67.64	83.54	-15.90	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

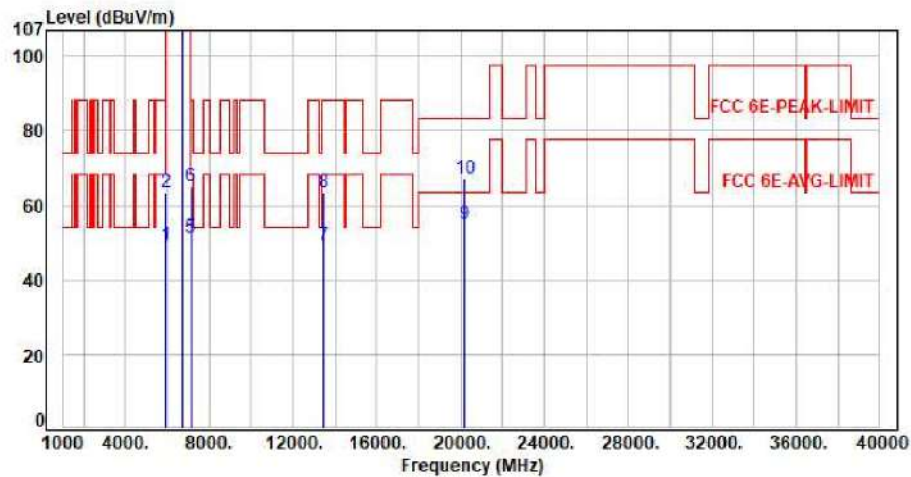

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.64	49.37	68.20	-18.83	Average	100	60	P
2	5925.00	7.73	55.70	63.43	88.20	-24.77	Peak	100	60	P
3	6725.00	9.22	96.47	105.69	200.00	-94.31	Average	100	60	P
4	6725.00	9.22	108.76	117.98	200.00	-82.02	Peak	100	60	P
5	7125.00	9.92	41.38	51.30	68.20	-16.90	Average	100	60	P
6	7125.00	9.92	55.34	65.26	88.20	-22.94	Peak	100	60	P
7	13450.00	20.62	28.59	49.21	68.20	-18.99	Average	100	34	P
8	13450.00	20.62	42.76	63.38	88.20	-24.82	Peak	100	34	P
9	20175.00	10.37	44.50	54.87	63.54	-8.67	Average	150	360	P
10	20175.00	10.37	56.85	67.22	83.54	-16.32	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

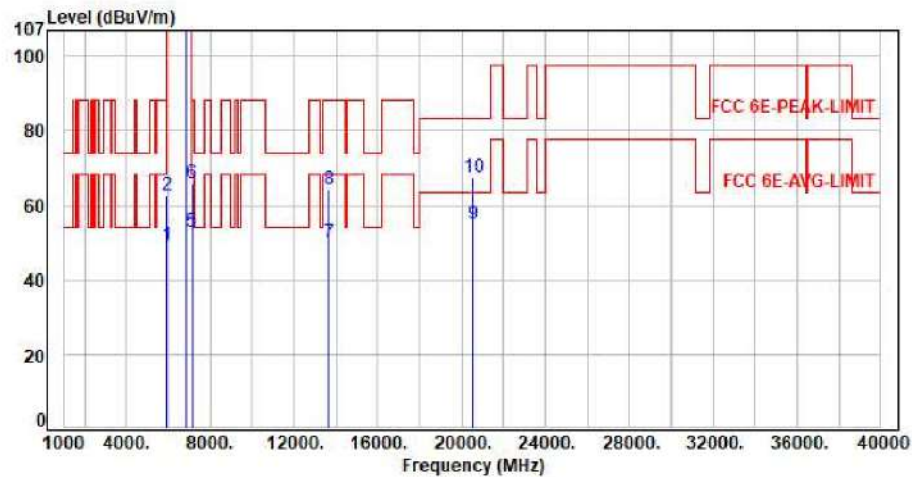

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.57	49.30	68.20	-18.90	Average	254	360	P
2	5925.00	7.73	55.09	62.82	88.20	-25.38	Peak	254	360	P
3	6845.00	9.48	96.96	106.44	200.00	-93.56	Average	254	360	P
4	6845.00	9.48	110.02	119.50	200.00	-80.50	Peak	254	360	P
5	7125.00	9.92	42.79	52.71	68.20	-15.49	Average	254	360	P
6	7125.00	9.92	56.05	65.97	88.20	-22.23	Peak	254	360	P
7	13690.00	21.28	28.70	49.98	68.20	-18.22	Average	100	274	P
8	13690.00	21.28	43.13	64.41	88.20	-23.79	Peak	100	274	P
9	20535.00	9.99	45.02	55.01	63.54	-8.53	Average	150	360	P
10	20535.00	9.99	57.59	67.58	83.54	-15.96	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

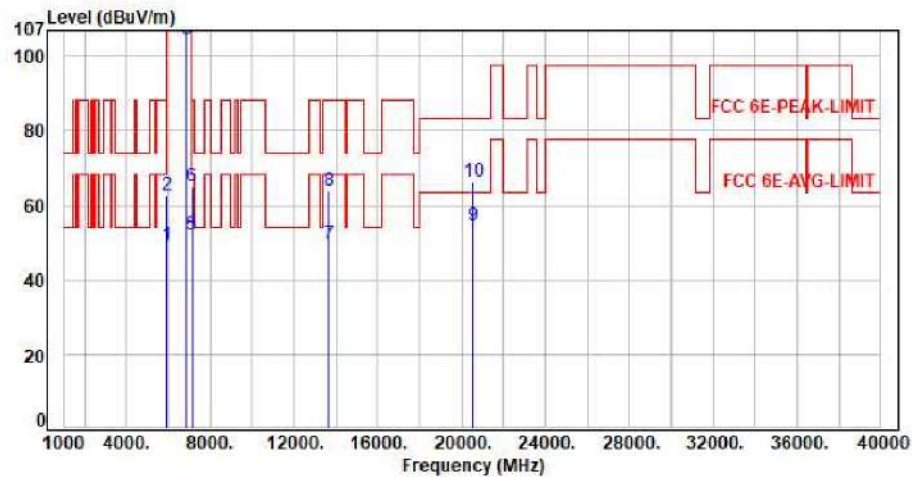

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.63	49.36	68.20	-18.84	Average	300	316	P
2	5925.00	7.73	55.01	62.74	88.20	-25.46	Peak	300	316	P
3	6845.00	9.48	95.18	104.66	200.00	-95.34	Average	300	316	P
4	6845.00	9.48	108.54	118.02	200.00	-81.98	Peak	300	316	P
5	7125.00	9.92	42.22	52.14	68.20	-16.06	Average	300	316	P
6	7125.00	9.92	55.16	65.08	88.20	-23.12	Peak	300	316	P
7	13690.00	21.28	28.54	49.82	68.20	-18.38	Average	100	35	P
8	13690.00	21.28	42.45	63.73	88.20	-24.47	Peak	100	35	P
9	20535.00	9.99	44.42	54.41	63.54	-9.13	Average	150	360	P
10	20535.00	9.99	56.48	66.47	83.54	-17.07	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

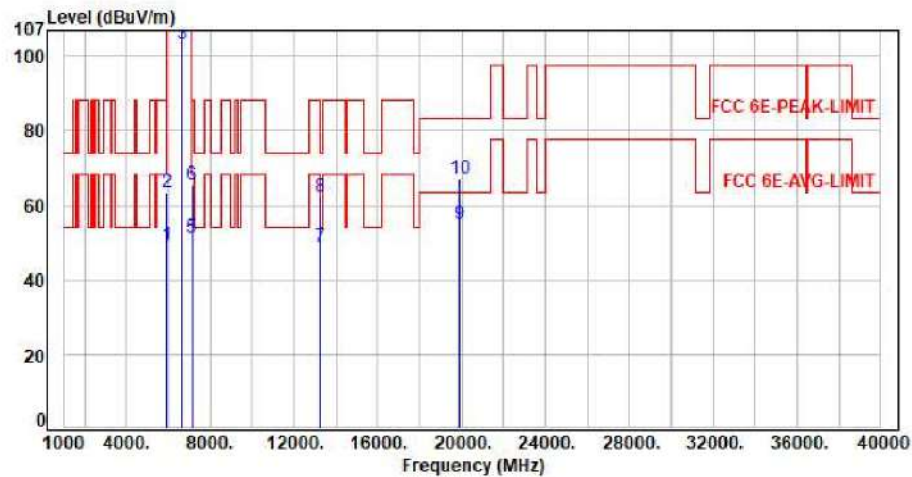

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.53	49.26	68.20	-18.94	Average	100	360	P
2	5925.00	7.73	55.61	63.34	88.20	-24.86	Peak	100	360	P
3	6625.00	8.97	94.24	103.21	200.00	-96.79	Average	100	360	P
4	6625.00	8.97	107.55	116.52	200.00	-83.48	Peak	100	360	P
5	7125.00	9.92	41.33	51.25	68.20	-16.95	Average	100	360	P
6	7125.00	9.92	55.39	65.31	88.20	-22.89	Peak	100	360	P
7	13250.00	19.81	28.83	48.64	54.00	-5.36	Average	100	270	P
8	13250.00	19.81	42.54	62.35	74.00	-11.65	Peak	100	270	P
9	19875.00	10.51	44.58	55.09	63.54	-8.45	Average	150	360	P
10	19875.00	10.51	56.68	67.19	83.54	-16.35	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

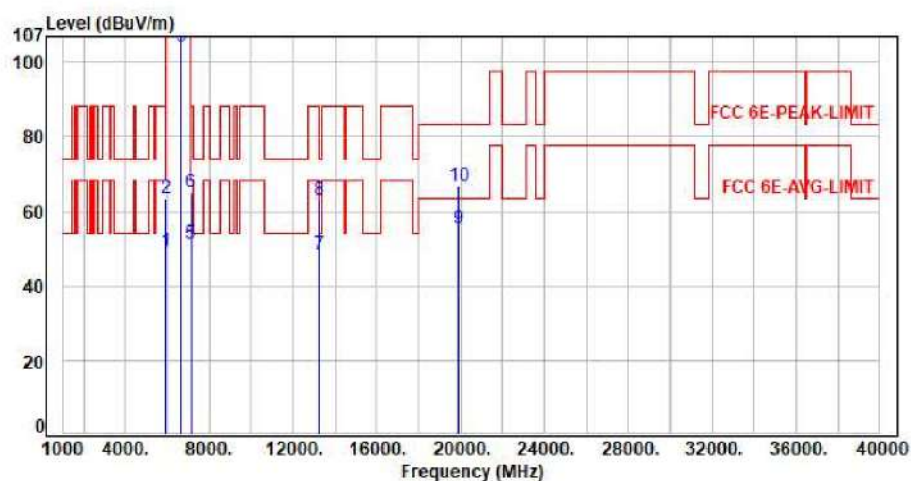

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.68	49.41	68.20	-18.79	Average	136	59	P
2	5925.00	7.73	55.57	63.30	88.20	-24.90	Peak	136	59	P
3	6625.00	8.97	95.16	104.13	200.00	-95.87	Average	136	59	P
4	6625.00	8.97	107.71	116.68	200.00	-83.32	Peak	136	59	P
5	7125.00	9.92	41.48	51.40	68.20	-16.80	Average	136	59	P
6	7125.00	9.92	55.09	65.01	88.20	-23.19	Peak	136	59	P
7	13250.00	19.81	28.55	48.36	54.00	-5.64	Average	100	29	P
8	13250.00	19.81	43.34	63.15	74.00	-10.85	Peak	100	29	P
9	19875.00	10.51	44.98	55.49	63.54	-8.05	Average	150	360	P
10	19875.00	10.51	56.29	66.80	83.54	-16.74	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

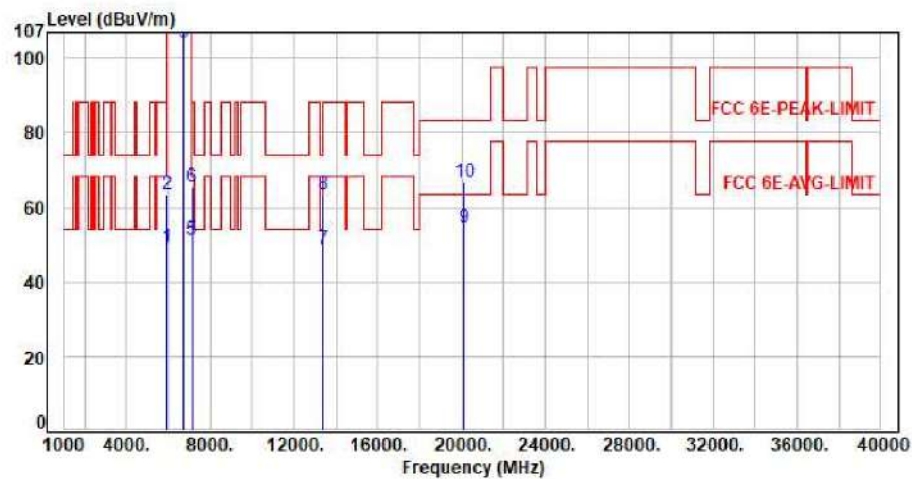


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.59	49.32	68.20	-18.88	Average	258	360	P
2	5925.00	7.73	55.54	63.27	88.20	-24.93	Peak	258	360	P
3	6705.00	9.18	94.78	103.96	200.00	-96.04	Average	258	360	P
4	6705.00	9.18	108.26	117.44	200.00	-82.56	Peak	258	360	P
5	7125.00	9.92	41.50	51.42	68.20	-16.78	Average	258	360	P
6	7125.00	9.92	55.62	65.54	88.20	-22.66	Peak	258	360	P
7	13410.00	20.53	28.13	48.66	68.20	-19.54	Average	100	272	P
8	13410.00	20.53	42.97	63.50	88.20	-24.70	Peak	100	272	P
9	20115.00	10.21	44.39	54.60	63.54	-8.94	Average	150	360	P
10	20115.00	10.21	56.68	66.89	83.54	-16.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

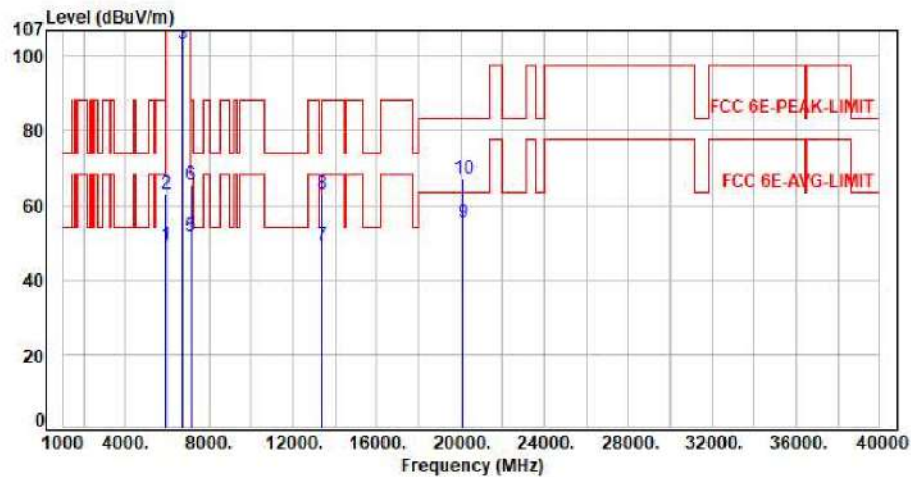

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.60	49.33	68.20	-18.87	Average	101	59	P
2	5925.00	7.73	55.23	62.96	88.20	-25.24	Peak	101	59	P
3	6705.00	9.18	94.16	103.34	200.00	-96.66	Average	101	59	P
4	6705.00	9.18	107.28	116.46	200.00	-83.54	Peak	101	59	P
5	7125.00	9.92	41.77	51.69	68.20	-16.51	Average	101	59	P
6	7125.00	9.92	55.63	65.55	88.20	-22.65	Peak	101	59	P
7	13410.00	20.53	28.59	49.12	68.20	-19.08	Average	100	35	P
8	13410.00	20.53	42.36	62.89	88.20	-25.31	Peak	100	35	P
9	20115.00	10.21	44.95	55.16	63.54	-8.38	Average	150	360	P
10	20115.00	10.21	56.77	66.98	83.54	-16.56	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

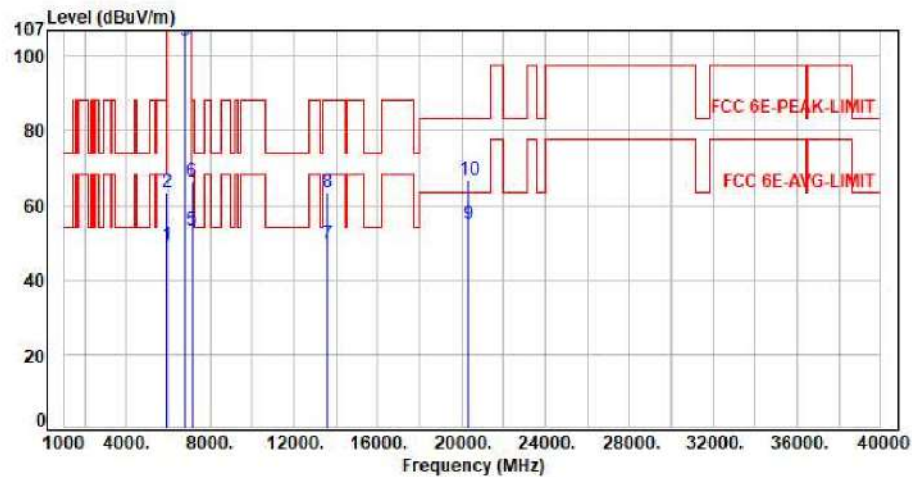

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.57	49.30	68.20	-18.90	Average	265	360	P
2	5925.00	7.73	55.62	63.35	88.20	-24.85	Peak	265	360	P
3	6785.00	9.41	94.66	104.07	200.00	-95.93	Average	265	360	P
4	6785.00	9.41	107.09	116.50	200.00	-83.50	Peak	265	360	P
5	7125.00	9.92	43.36	53.28	68.20	-14.92	Average	265	360	P
6	7125.00	9.92	56.51	66.43	88.20	-21.77	Peak	265	360	P
7	13570.00	20.80	28.86	49.66	68.20	-18.54	Average	100	276	P
8	13570.00	20.80	42.54	63.34	88.20	-24.86	Peak	100	276	P
9	20355.00	10.07	44.86	54.93	63.54	-8.61	Average	150	360	P
10	20355.00	10.07	56.58	66.65	83.54	-16.89	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

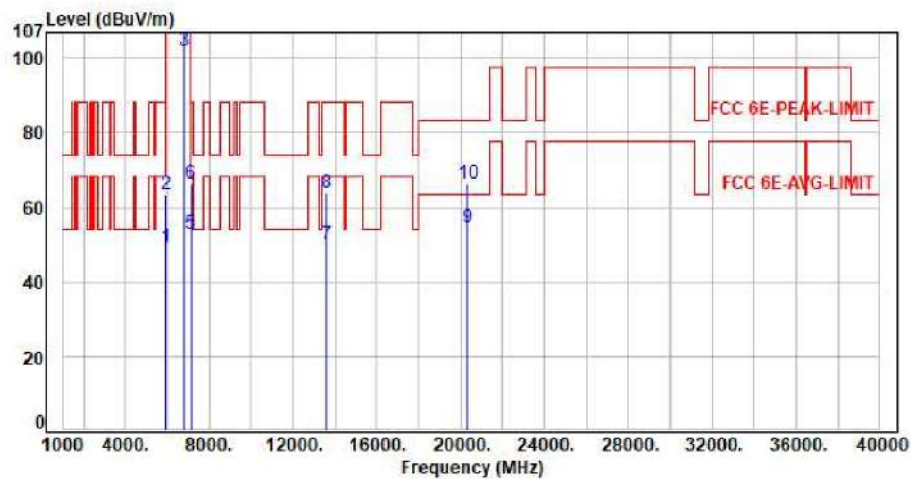

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.53	49.26	68.20	-18.94	Average	100	313	P
2	5925.00	7.73	55.56	63.29	88.20	-24.91	Peak	100	313	P
3	6785.00	9.41	92.64	102.05	200.00	-97.95	Average	100	313	P
4	6785.00	9.41	105.91	115.32	200.00	-84.68	Peak	100	313	P
5	7125.00	9.92	42.82	52.74	68.20	-15.46	Average	100	313	P
6	7125.00	9.92	56.50	66.42	88.20	-21.78	Peak	100	313	P
7	13570.00	20.80	29.14	49.94	68.20	-18.26	Average	100	29	P
8	13570.00	20.80	43.01	63.81	88.20	-24.39	Peak	100	29	P
9	20355.00	10.07	44.51	54.58	63.54	-8.96	Average	150	360	P
10	20355.00	10.07	56.35	66.42	83.54	-17.12	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

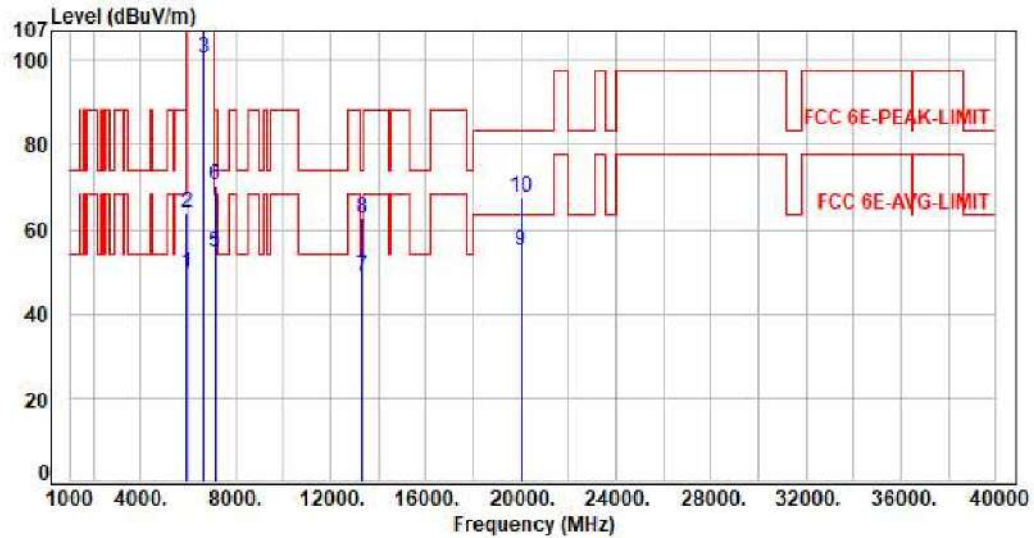

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.75	49.48	68.20	-18.72	Average	258	360	P
2	5925.00	7.73	56.10	63.83	88.20	-24.37	Peak	258	360	P
3	6665.00	9.10	91.55	100.65	200.00	-99.35	Average	258	360	P
4	6665.00	9.10	104.79	113.89	200.00	-86.11	Peak	258	360	P
5	7125.00	9.92	44.59	54.51	68.20	-13.69	Average	258	360	P
6	7125.00	9.92	60.37	70.29	88.20	-17.91	Peak	258	360	P
7	13330.00	20.17	28.68	48.85	54.00	-5.15	Average	100	273	P
8	13330.00	20.17	42.43	62.60	74.00	-11.40	Peak	100	273	P
9	19995.00	10.65	44.43	55.08	63.54	-8.46	Average	150	360	P
10	19995.00	10.65	56.80	67.45	83.54	-16.09	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

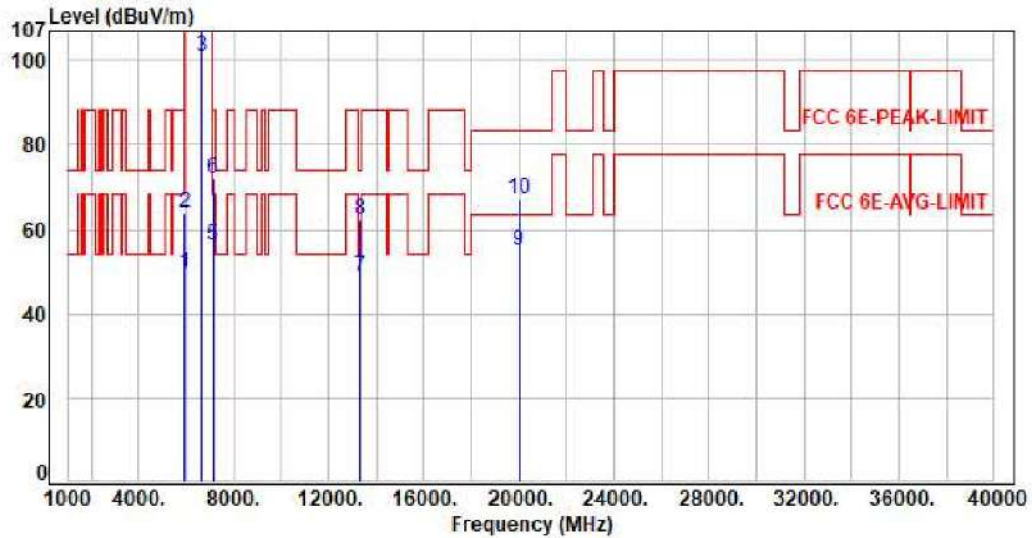

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.91	49.64	68.20	-18.56	Average	139	59	P
2	5925.00	7.73	56.10	63.83	88.20	-24.37	Peak	139	59	P
3	6665.00	9.10	91.91	101.01	200.00	-98.99	Average	139	59	P
4	6665.00	9.10	104.68	113.78	200.00	-86.22	Peak	139	59	P
5	7125.00	9.92	46.41	56.33	68.20	-11.87	Average	139	59	P
6	7125.00	9.92	62.20	72.12	88.20	-16.08	Peak	139	59	P
7	13330.00	20.17	28.55	48.72	54.00	-5.28	Average	100	32	P
8	13330.00	20.17	41.99	62.16	74.00	-11.84	Peak	100	32	P
9	19995.00	10.65	44.38	55.03	63.54	-8.51	Average	150	360	P
10	19995.00	10.65	56.48	67.13	83.54	-16.41	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



U-NII-8

Test Mode : 2TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

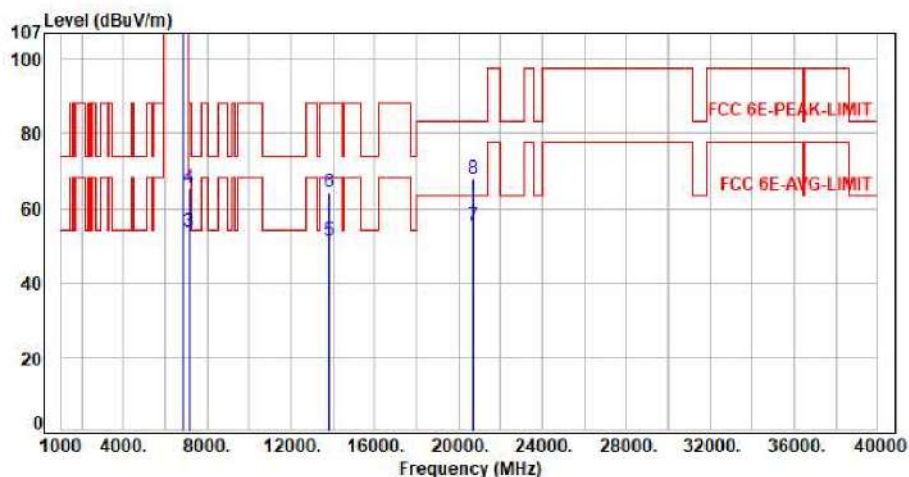

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	101.99	111.47	200.00	-88.53	Average	127	360	P
2	6895.00	9.48	112.25	121.73	200.00	-78.27	Peak	127	360	P
3	7125.00	9.92	43.90	53.82	68.20	-14.38	Average	127	360	P
4	7125.00	9.92	55.71	65.63	88.20	-22.57	Peak	127	360	P
5	13790.00	21.66	29.62	51.28	68.20	-16.92	Average	100	26	P
6	13790.00	21.66	42.42	64.08	88.20	-24.12	Peak	100	26	P
7	20685.00	9.93	45.31	55.24	63.54	-8.30	Average	150	360	P
8	20685.00	9.93	57.85	67.78	83.54	-15.76	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

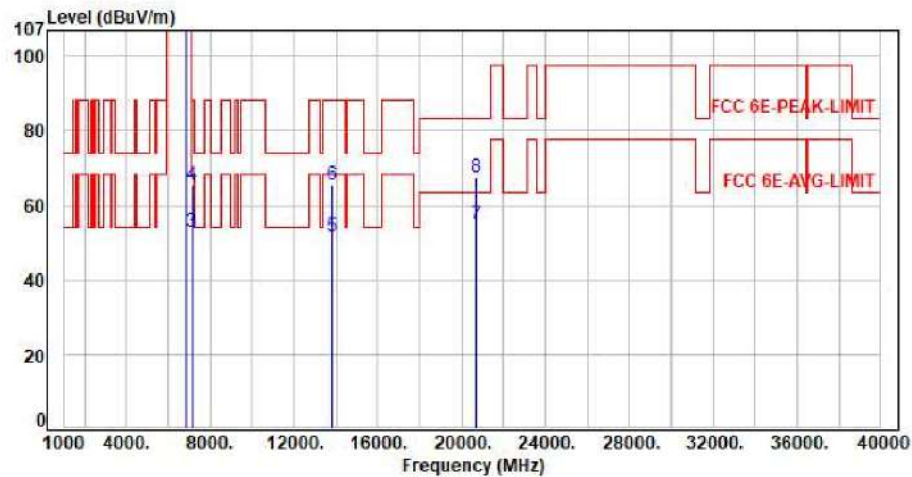

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	101.65	111.13	200.00	-88.87	Average	100	44	P
2	6895.00	9.48	111.69	121.17	200.00	-78.83	Peak	100	44	P
3	7125.00	9.92	43.08	53.00	68.20	-15.20	Average	100	44	P
4	7125.00	9.92	55.53	65.45	88.20	-22.75	Peak	100	44	P
5	13790.00	21.66	29.87	51.53	68.20	-16.67	Average	100	275	P
6	13790.00	21.66	43.87	65.53	88.20	-22.67	Peak	100	275	P
7	20685.00	9.93	44.93	54.86	63.54	-8.68	Average	150	360	P
8	20685.00	9.93	57.59	67.52	83.54	-16.02	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

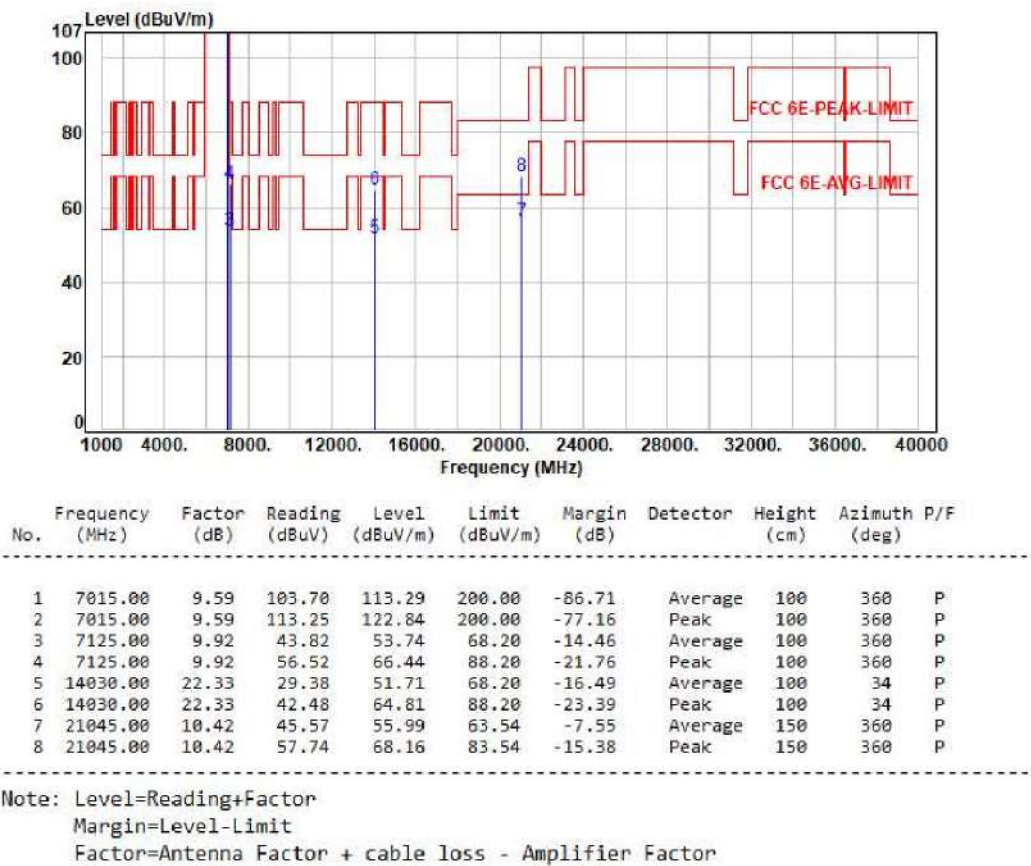



Test Mode : 2TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

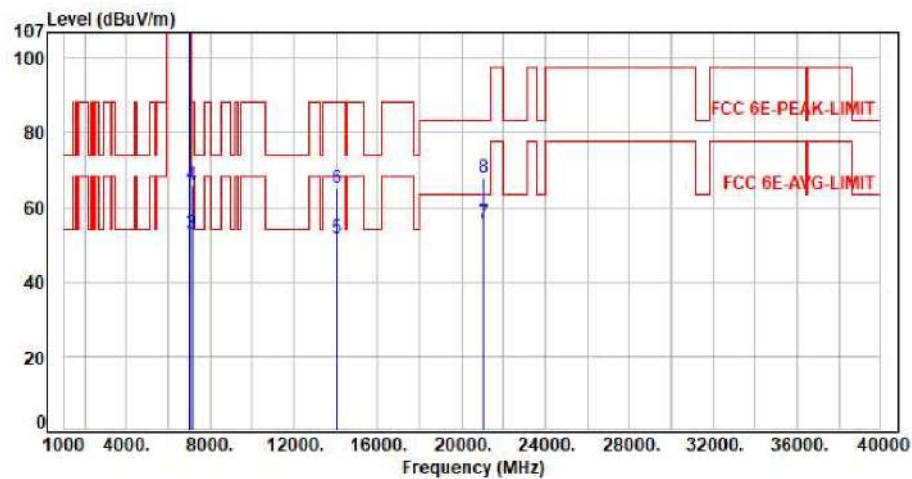

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	102.14	111.73	200.00	-88.27	Average	100	43	P
2	7015.00	9.59	111.80	121.39	200.00	-78.61	Peak	100	43	P
3	7125.00	9.92	43.14	53.06	68.20	-15.14	Average	100	43	P
4	7125.00	9.92	56.05	65.97	88.20	-22.23	Peak	100	43	P
5	14030.00	22.33	29.26	51.59	68.20	-16.61	Average	100	272	P
6	14030.00	22.33	42.94	65.27	88.20	-22.93	Peak	100	272	P
7	21045.00	10.42	45.20	55.62	63.54	-7.92	Average	150	360	P
8	21045.00	10.42	57.36	67.78	83.54	-15.76	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

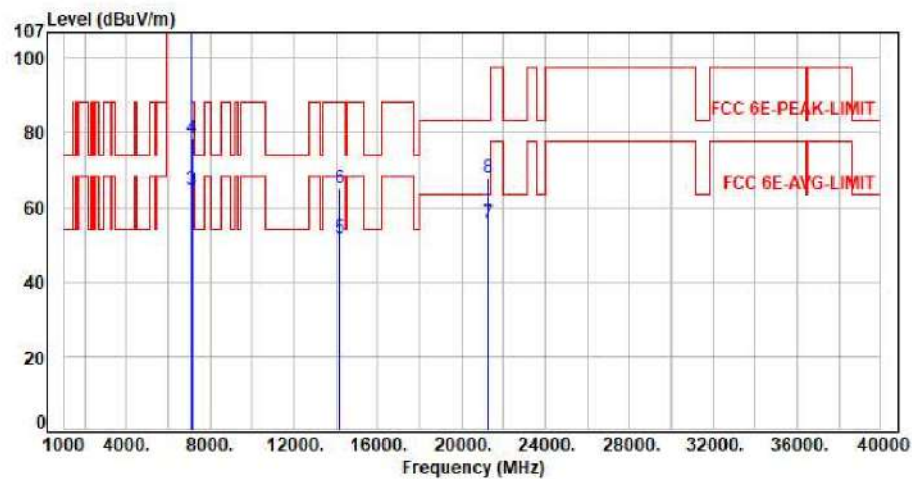

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	97.87	107.66	200.00	-92.34	Average	100	45	P
2	7095.00	9.79	108.06	117.85	200.00	-82.15	Peak	100	45	P
3	7125.00	9.92	54.95	64.87	68.20	-3.33	Average	100	45	P
4	7125.00	9.92	68.46	78.38	88.20	-9.82	Peak	100	45	P
5	14190.00	22.77	28.81	51.58	68.20	-16.62	Average	100	24	P
6	14190.00	22.77	42.20	64.97	88.20	-23.23	Peak	100	24	P
7	21285.00	11.04	44.83	55.87	63.54	-7.67	Average	150	360	P
8	21285.00	11.04	56.98	68.02	83.54	-15.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

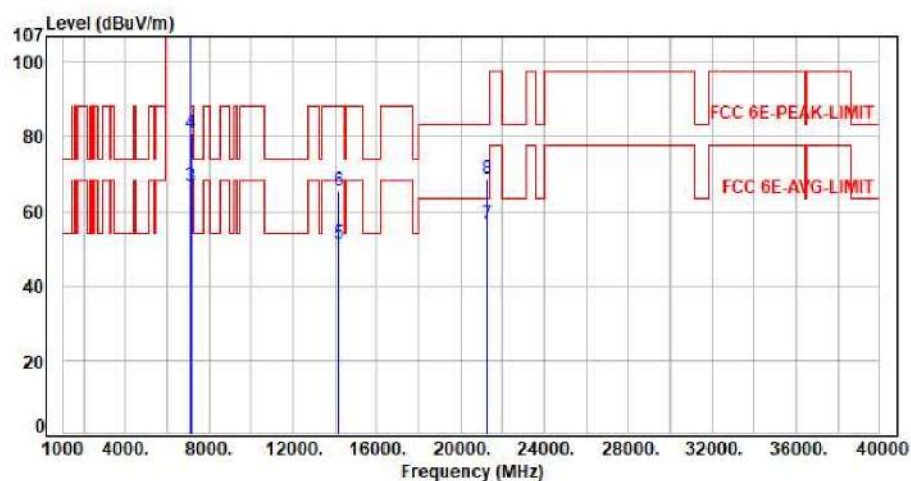

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	98.43	108.22	200.00	-91.78	Average	100	339	P
2	7095.00	9.79	108.28	118.07	200.00	-81.93	Peak	100	339	P
3	7125.00	9.92	56.62	66.54	68.20	-1.66	Average	100	339	P
4	7125.00	9.92	71.18	81.10	88.20	-7.10	Peak	100	339	P
5	14190.00	22.77	28.39	51.16	68.20	-17.04	Average	100	270	P
6	14190.00	22.77	42.58	65.35	88.20	-22.85	Peak	100	270	P
7	21285.00	11.04	45.48	56.52	63.54	-7.02	Average	150	360	P
8	21285.00	11.04	57.89	68.93	83.54	-14.61	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

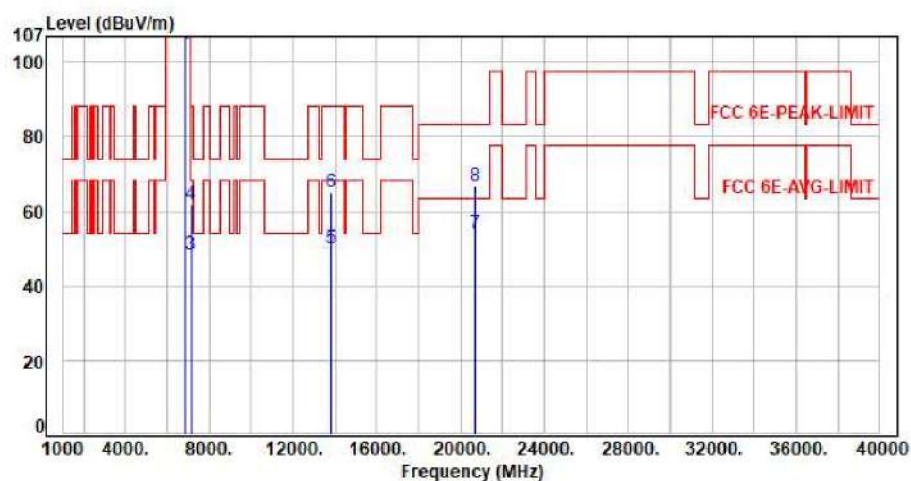

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	95.49	104.97	200.00	-95.03	Average	100	44	P
2	6895.00	9.48	107.30	116.78	200.00	-83.22	Peak	100	44	P
3	7125.00	9.92	38.68	48.60	68.20	-19.60	Average	100	44	P
4	7125.00	9.92	51.97	61.89	88.20	-26.31	Peak	100	44	P
5	13790.00	21.66	28.45	50.11	68.20	-18.09	Average	100	31	P
6	13790.00	21.66	43.24	64.90	88.20	-23.30	Peak	100	31	P
7	20685.00	9.93	44.27	54.20	63.54	-9.34	Average	150	360	P
8	20685.00	9.93	56.77	66.70	83.54	-16.84	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

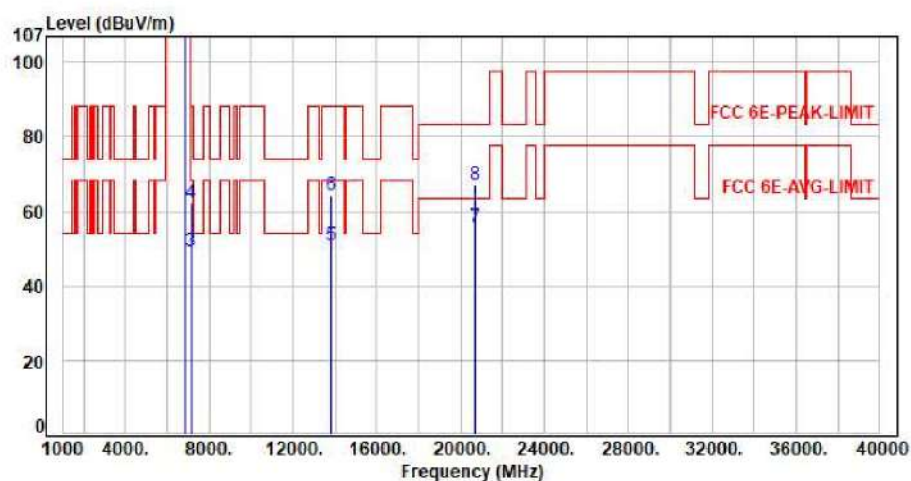

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	99.99	109.47	200.00	-90.53	Average	100	337	P
2	6895.00	9.48	111.43	120.91	200.00	-79.09	Peak	100	337	P
3	7125.00	9.92	39.28	49.20	68.20	-19.00	Average	100	337	P
4	7125.00	9.92	52.15	62.07	88.20	-26.13	Peak	100	337	P
5	13790.00	21.66	29.30	50.96	68.20	-17.24	Average	100	278	P
6	13790.00	21.66	42.48	64.14	88.20	-24.06	Peak	100	278	P
7	20685.00	9.93	45.72	55.65	63.54	-7.89	Average	150	360	P
8	20685.00	9.93	57.23	67.16	83.54	-16.38	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

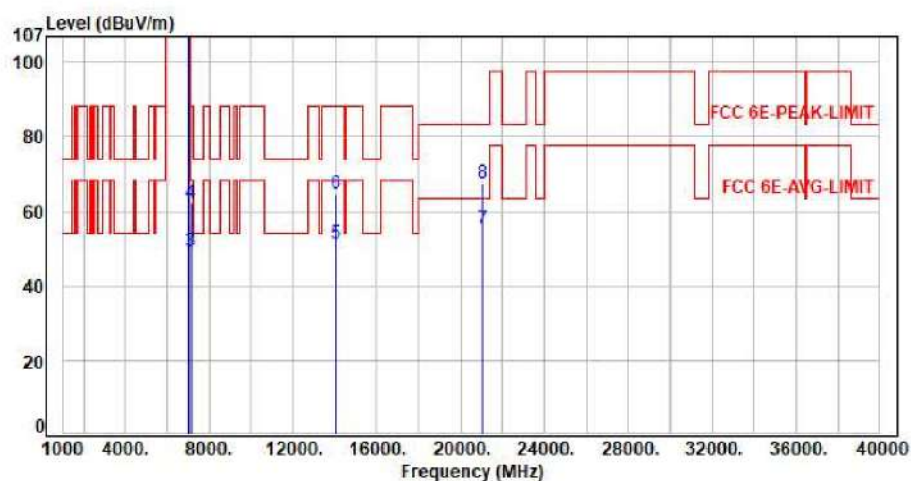

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	95.93	105.52	200.00	-94.48	Average	100	45	P
2	7015.00	9.59	107.69	117.28	200.00	-82.72	Peak	100	45	P
3	7125.00	9.92	39.29	49.21	68.20	-18.99	Average	100	45	P
4	7125.00	9.92	52.30	62.22	88.20	-25.98	Peak	100	45	P
5	14030.00	22.33	28.07	51.20	68.20	-17.00	Average	100	31	P
6	14030.00	22.33	42.45	64.78	88.20	-23.42	Peak	100	31	P
7	21045.00	10.42	44.87	55.29	63.54	-8.25	Average	150	360	P
8	21045.00	10.42	57.11	67.53	83.54	-16.01	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

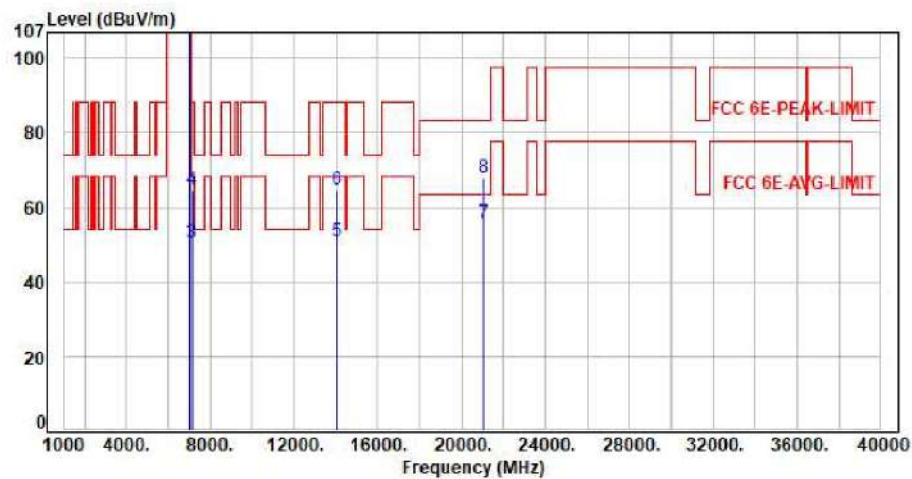

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	99.42	109.01	200.00	-90.99	Average	100	340	P
2	7015.00	9.59	111.66	121.25	200.00	-78.75	Peak	100	340	P
3	7125.00	9.92	40.56	50.48	68.20	-17.72	Average	100	340	P
4	7125.00	9.92	54.59	64.51	88.20	-23.69	Peak	100	340	P
5	14030.00	22.33	28.57	50.90	68.20	-17.30	Average	100	272	P
6	14030.00	22.33	42.37	64.70	88.20	-23.50	Peak	100	272	P
7	21045.00	10.42	45.29	55.71	63.54	-7.83	Average	150	360	P
8	21045.00	10.42	57.54	67.96	83.54	-15.58	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

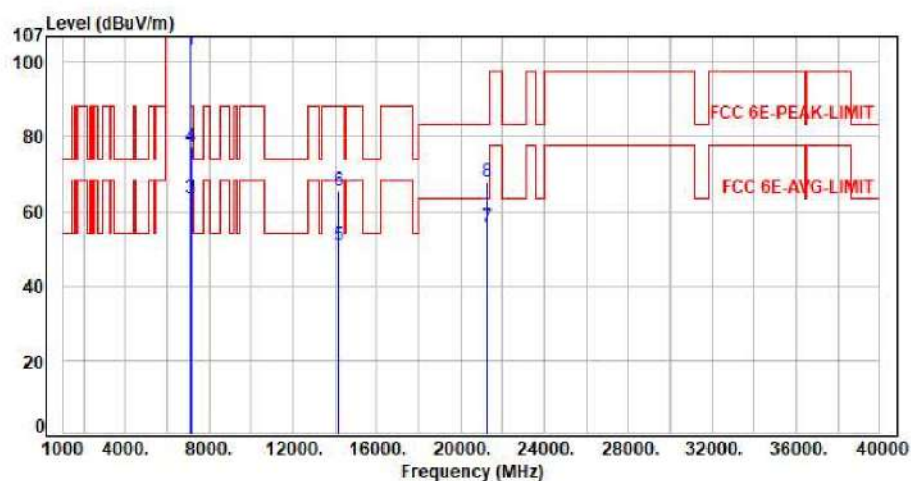

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	93.36	103.15	200.00	-96.85	Average	100	45	P
2	7095.00	9.79	105.01	114.80	200.00	-85.20	Peak	100	45	P
3	7125.00	9.92	53.73	63.65	68.20	-4.55	Average	100	45	P
4	7125.00	9.92	67.44	77.36	88.20	-10.84	Peak	100	45	P
5	14190.00	22.77	28.14	50.91	68.20	-17.29	Average	100	28	P
6	14190.00	22.77	42.66	65.43	88.20	-22.77	Peak	100	28	P
7	21285.00	11.04	44.70	55.74	63.54	-7.80	Average	150	360	P
8	21285.00	11.04	56.88	67.92	83.54	-15.62	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

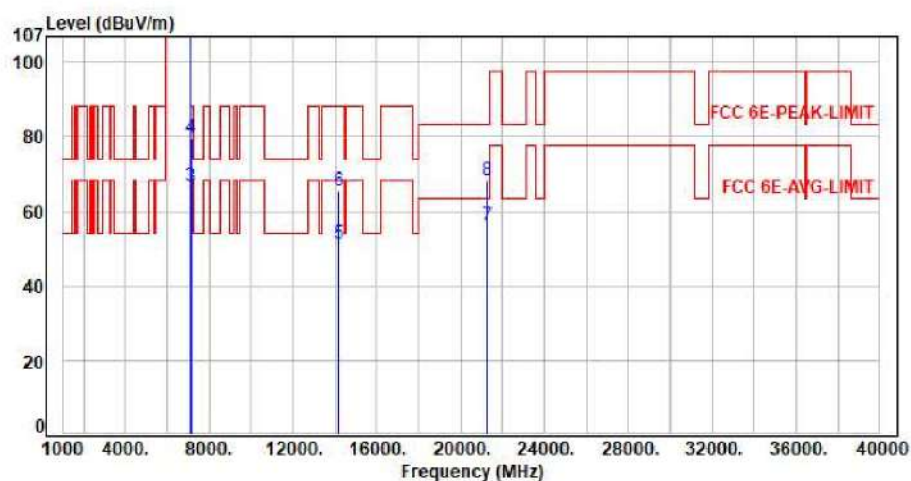

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	96.63	106.42	200.00	-93.58	Average	100	339	P
2	7095.00	9.79	107.32	117.11	200.00	-82.89	Peak	100	339	P
3	7125.00	9.92	56.70	66.62	68.20	-1.58	Average	100	339	P
4	7125.00	9.92	70.01	79.93	88.20	-8.27	Peak	100	339	P
5	14190.00	22.77	28.40	51.17	68.20	-17.03	Average	100	274	P
6	14190.00	22.77	42.57	65.34	88.20	-22.86	Peak	100	274	P
7	21285.00	11.04	45.16	56.20	63.54	-7.34	Average	150	360	P
8	21285.00	11.04	57.38	68.42	83.54	-15.12	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

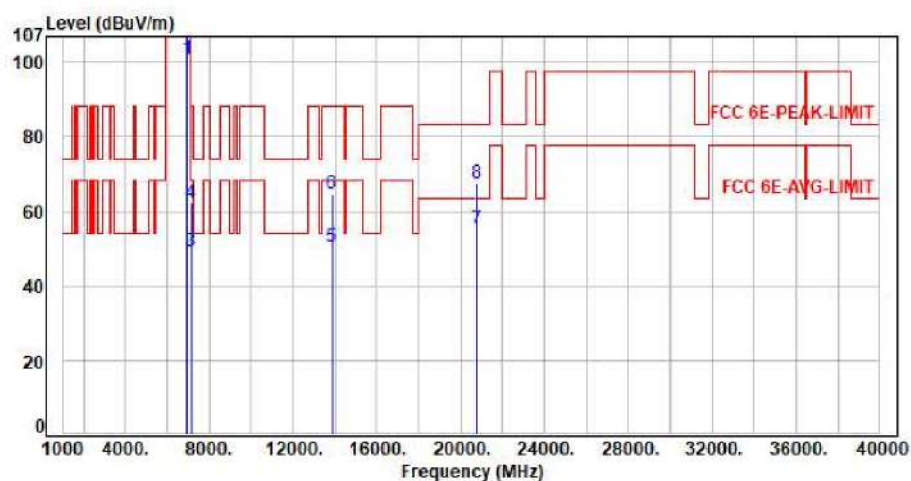

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	91.55	101.07	200.00	-98.93	Average	100	43	P
2	6925.00	9.52	104.95	114.47	200.00	-85.53	Peak	100	43	P
3	7125.00	9.92	39.48	49.40	68.20	-18.80	Average	100	43	P
4	7125.00	9.92	52.47	62.39	88.20	-25.81	Peak	100	43	P
5	13850.00	21.83	28.61	50.44	68.20	-17.76	Average	100	28	P
6	13850.00	21.83	42.75	64.58	88.20	-23.62	Peak	100	28	P
7	20775.00	9.87	45.26	55.13	63.54	-8.41	Average	150	360	P
8	20775.00	9.87	57.49	67.36	83.54	-16.18	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

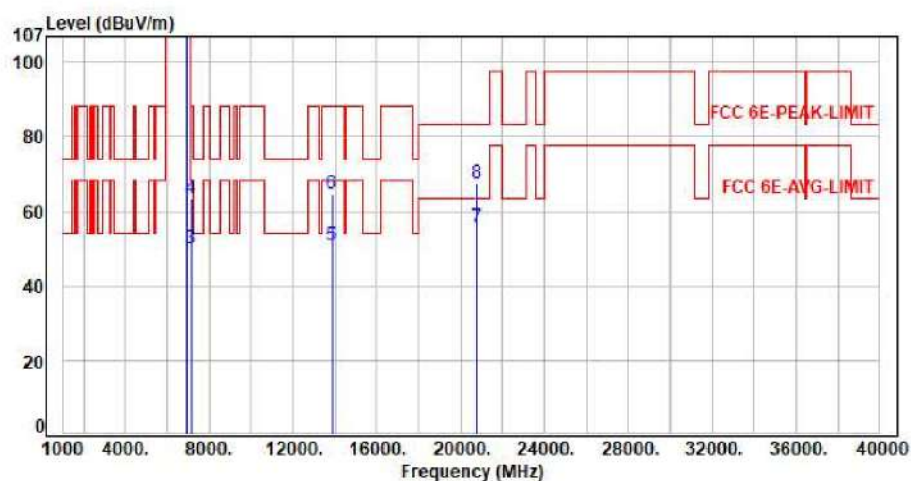

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	96.50	106.02	200.00	-93.98	Average	100	336	P
2	6925.00	9.52	108.85	118.37	200.00	-81.63	Peak	100	336	P
3	7125.00	9.92	40.22	50.14	68.20	-18.06	Average	100	336	P
4	7125.00	9.92	53.56	63.48	88.20	-24.72	Peak	100	336	P
5	13850.00	21.83	28.93	50.76	68.20	-17.44	Average	100	275	P
6	13850.00	21.83	42.74	64.57	88.20	-23.63	Peak	100	275	P
7	20775.00	9.87	45.75	55.62	63.54	-7.92	Average	150	360	P
8	20775.00	9.87	57.68	67.55	83.54	-15.99	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be EHT40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

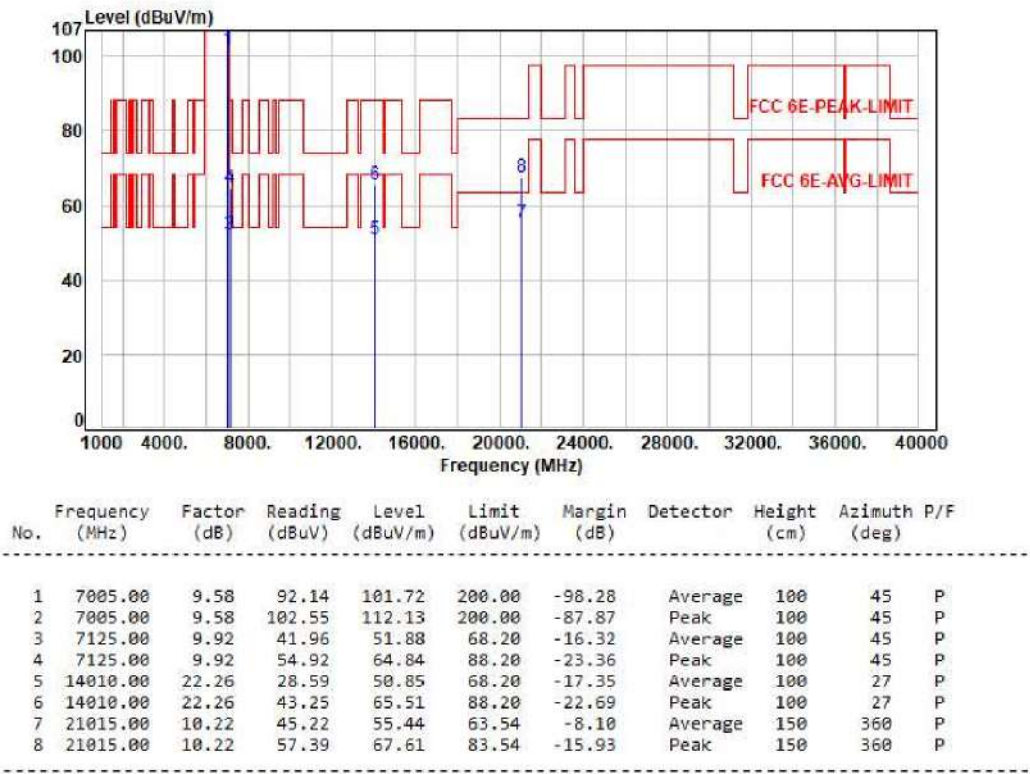

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

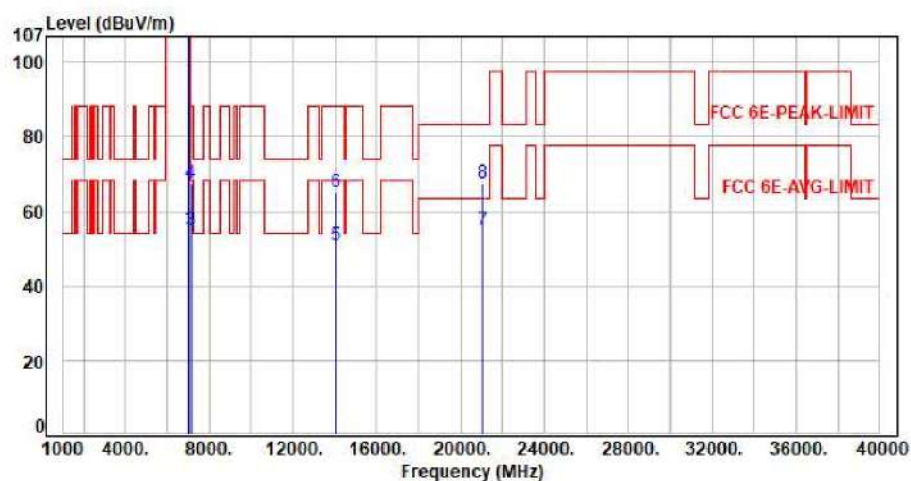

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	95.71	105.29	200.00	-94.71	Average	100	340	P
2	7005.00	9.58	107.86	117.44	200.00	-82.56	Peak	100	340	P
3	7125.00	9.92	45.09	55.01	68.20	-13.19	Average	100	340	P
4	7125.00	9.92	57.67	67.59	88.20	-20.61	Peak	100	340	P
5	14010.00	22.26	28.58	50.84	68.20	-17.36	Average	100	270	P
6	14010.00	22.26	42.83	65.09	88.20	-23.11	Peak	100	270	P
7	21015.00	10.22	44.55	54.77	63.54	-8.77	Average	150	360	P
8	21015.00	10.22	57.14	67.36	83.54	-16.18	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

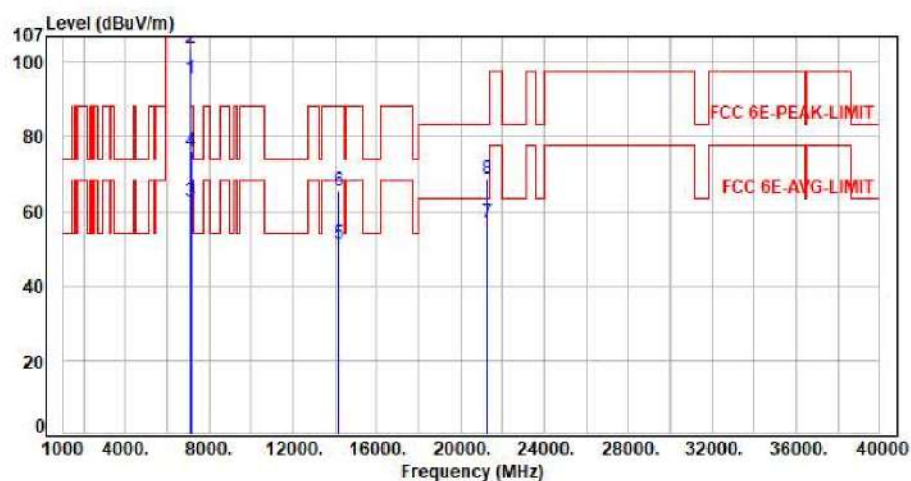

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	85.88	95.63	200.00	-104.37	Average	100	44	P
2	7085.00	9.75	94.13	103.88	200.00	-96.12	Peak	100	44	P
3	7125.00	9.92	52.81	62.73	68.20	-5.47	Average	100	44	P
4	7125.00	9.92	66.32	76.24	88.20	-11.96	Peak	100	44	P
5	14170.00	22.70	28.46	51.16	68.20	-17.04	Average	100	31	P
6	14170.00	22.70	42.86	65.56	88.20	-22.64	Peak	100	31	P
7	21255.00	11.14	45.96	57.10	63.54	-6.44	Average	150	360	P
8	21255.00	11.14	57.80	68.94	83.54	-14.60	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

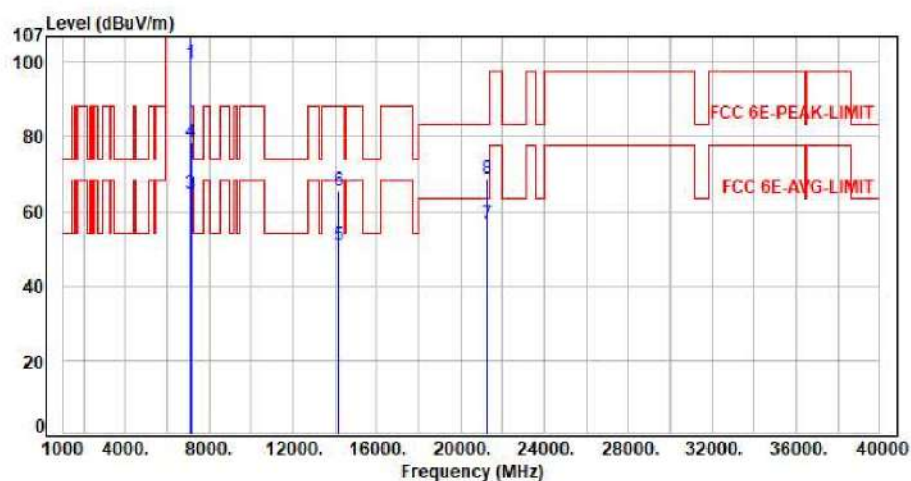

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	90.08	99.83	200.00	-100.17	Average	100	338	P
2	7085.00	9.75	98.67	108.42	200.00	-91.58	Peak	100	338	P
3	7125.00	9.92	54.77	64.69	68.20	-3.51	Average	100	338	P
4	7125.00	9.92	68.74	78.66	88.20	-9.54	Peak	100	338	P
5	14170.00	22.70	28.29	50.99	68.20	-17.21	Average	100	271	P
6	14170.00	22.70	42.74	65.44	88.20	-22.76	Peak	100	271	P
7	21255.00	11.14	45.59	56.73	63.54	-6.81	Average	150	360	P
8	21255.00	11.14	57.65	68.79	83.54	-14.75	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

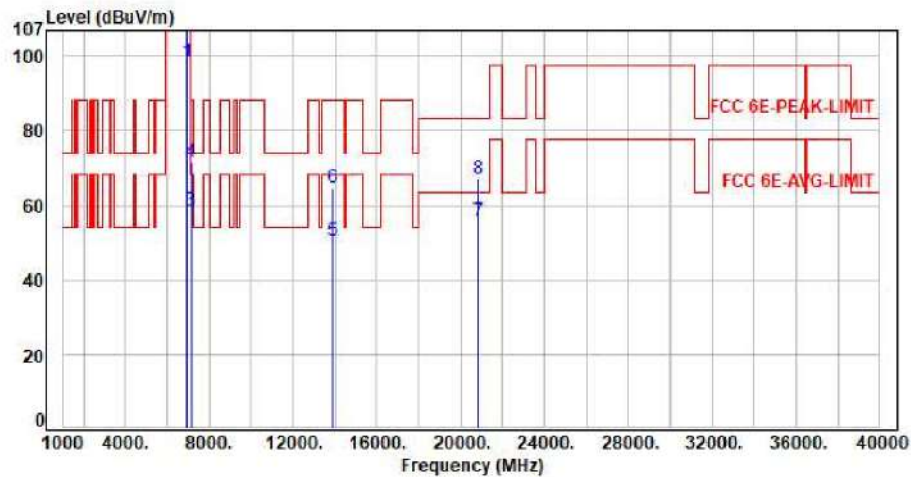

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	88.88	98.45	200.00	-101.55	Average	100	43	P
2	6945.00	9.57	101.33	110.90	200.00	-89.10	Peak	100	43	P
3	7125.00	9.92	48.51	58.43	68.20	-9.77	Average	100	43	P
4	7125.00	9.92	61.66	71.58	88.20	-16.62	Peak	100	43	P
5	13890.00	21.85	28.61	50.46	68.20	-17.74	Average	100	29	P
6	13890.00	21.85	42.73	64.58	88.20	-23.62	Peak	100	29	P
7	20835.00	10.07	45.77	55.84	63.54	-7.70	Average	150	360	P
8	20835.00	10.07	57.20	67.27	83.54	-16.27	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

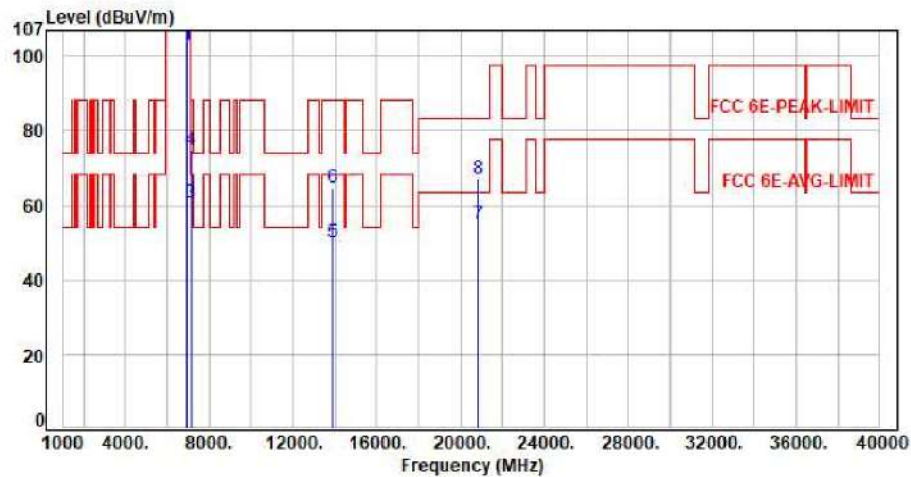

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	93.43	103.00	200.00	-97.00	Average	100	336	P
2	6945.00	9.57	106.13	115.70	200.00	-84.30	Peak	100	336	P
3	7125.00	9.92	50.77	60.69	68.20	-7.51	Average	100	336	P
4	7125.00	9.92	64.88	74.80	88.20	-13.40	Peak	100	336	P
5	13890.00	21.85	28.25	50.10	68.20	-18.10	Average	100	273	P
6	13890.00	21.85	42.75	64.60	88.20	-23.60	Peak	100	273	P
7	20835.00	10.07	44.88	54.95	63.54	-8.59	Average	150	360	P
8	20835.00	10.07	57.05	67.12	83.54	-16.42	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

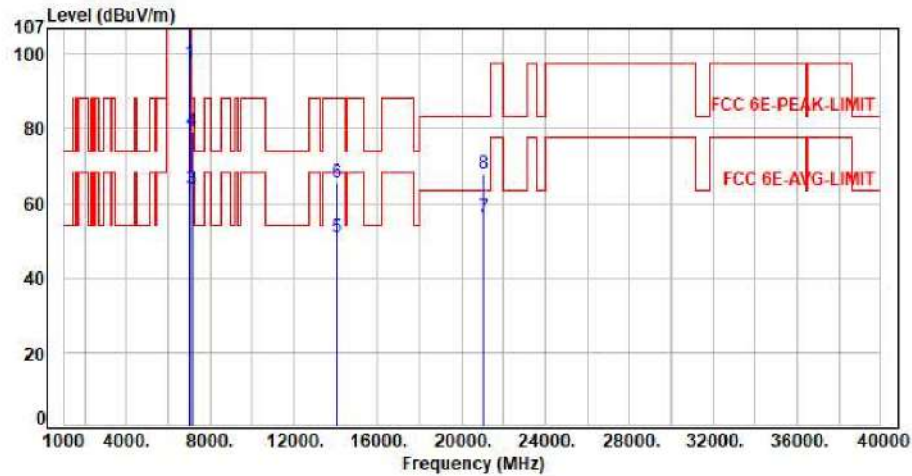

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	88.18	97.76	200.00	-102.24	Average	100	45	P
2	7025.00	9.58	98.70	108.28	200.00	-91.72	Peak	100	45	P
3	7125.00	9.92	54.05	63.97	68.20	-4.23	Average	100	45	P
4	7125.00	9.92	69.38	79.30	88.20	-8.90	Peak	100	45	P
5	14050.00	22.39	28.39	50.78	68.20	-17.42	Average	100	32	P
6	14050.00	22.39	43.16	65.55	88.20	-22.65	Peak	100	32	P
7	21075.00	10.41	45.59	56.00	63.54	-7.54	Average	150	360	P
8	21075.00	10.41	57.48	67.89	83.54	-15.65	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

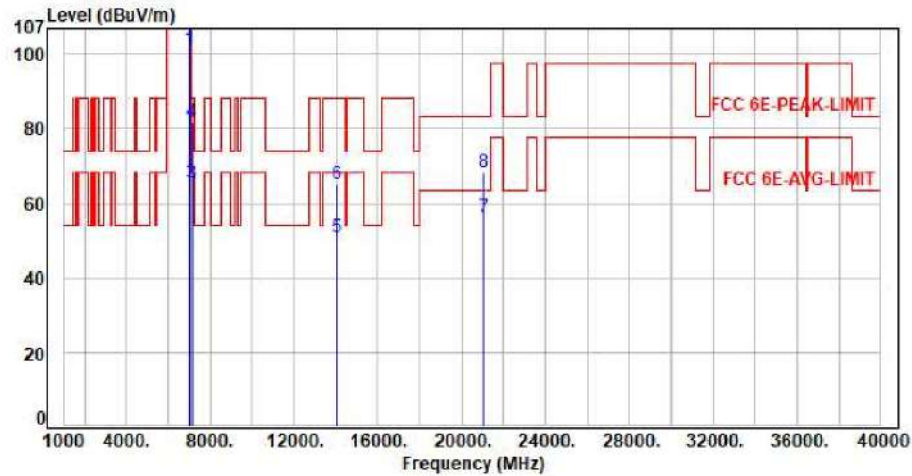

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	91.73	101.31	200.00	-98.69	Average	101	339	P
2	7025.00	9.58	104.16	113.74	200.00	-86.26	Peak	101	339	P
3	7125.00	9.92	55.65	65.57	68.20	-2.63	Average	101	339	P
4	7125.00	9.92	71.79	81.71	88.20	-6.49	Peak	101	339	P
5	14050.00	22.39	28.47	50.86	68.20	-17.34	Average	100	274	P
6	14050.00	22.39	42.76	65.15	88.20	-23.05	Peak	100	274	P
7	21075.00	10.41	45.86	56.27	63.54	-7.27	Average	150	360	P
8	21075.00	10.41	57.79	68.20	83.54	-15.34	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

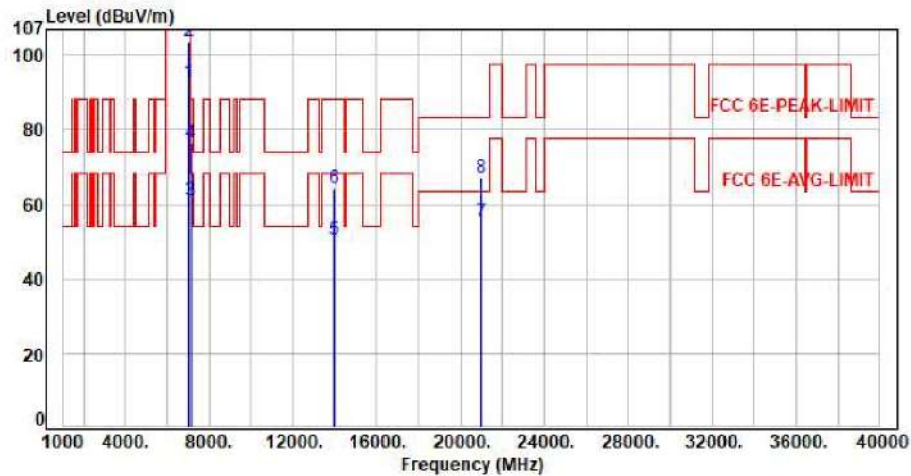

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	83.17	92.75	200.00	-107.25	Average	106	45	P
2	6985.00	9.58	94.26	103.84	200.00	-96.16	Peak	106	45	P
3	7125.00	9.92	50.94	60.86	68.20	-7.34	Average	106	45	P
4	7125.00	9.92	66.51	76.43	88.20	-11.77	Peak	106	45	P
5	13970.00	22.09	28.50	50.59	68.20	-17.61	Average	100	28	P
6	13970.00	22.09	42.19	64.28	88.20	-23.92	Peak	100	28	P
7	20955.00	10.13	45.27	55.40	63.54	-8.14	Average	150	360	P
8	20955.00	10.13	57.10	67.23	83.54	-16.31	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

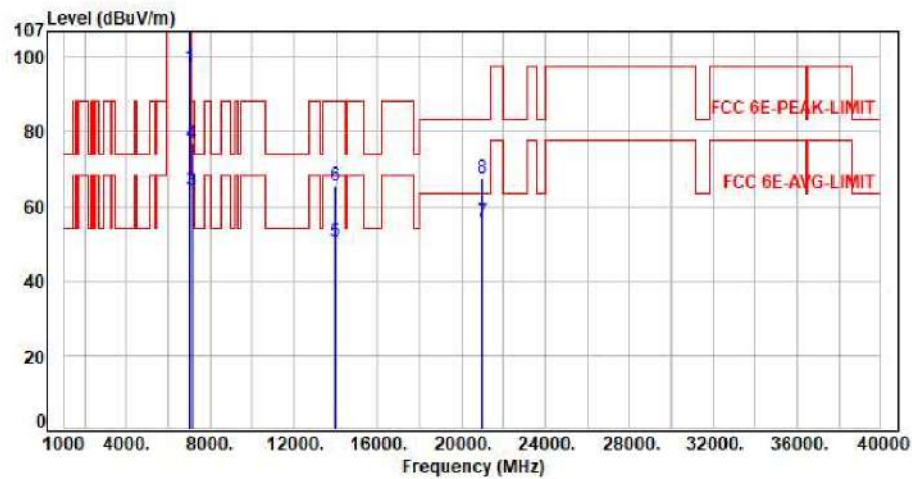

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	87.75	97.33	200.00	-102.67	Average	100	338	P
2	6985.00	9.58	99.66	109.24	200.00	-90.76	Peak	100	338	P
3	7125.00	9.92	54.34	64.26	68.20	-3.94	Average	100	338	P
4	7125.00	9.92	67.13	77.05	88.20	-11.15	Peak	100	338	P
5	13970.00	22.09	28.19	50.28	68.20	-17.92	Average	100	271	P
6	13970.00	22.09	43.26	65.35	88.20	-22.85	Peak	100	271	P
7	20955.00	10.13	45.76	55.89	63.54	-7.65	Average	150	360	P
8	20955.00	10.13	57.40	67.53	83.54	-16.01	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Straddle Channel Band 5

Test Mode : 2TX 11be EHT320 CH95 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

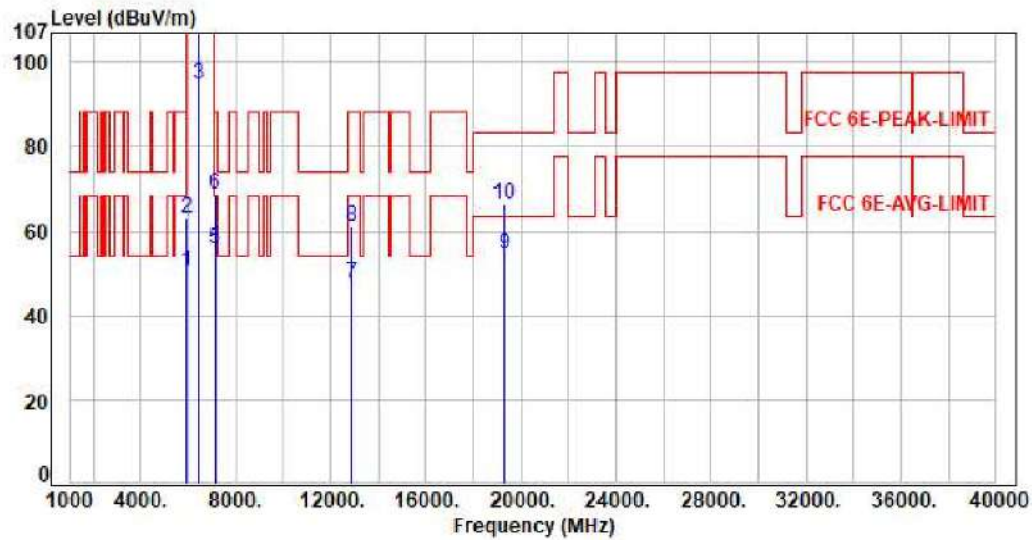

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.70	50.43	68.20	-17.77	Average	346	352	P
2	5925.00	7.73	55.23	62.96	88.20	-25.24	Peak	346	352	P
3	6425.00	8.39	86.59	94.98	200.00	-105.02	Average	346	352	P
4	6425.00	8.39	99.65	108.04	200.00	-91.96	Peak	346	352	P
5	7125.00	9.92	45.62	55.54	68.20	-12.66	Average	346	352	P
6	7125.00	9.92	58.99	68.91	88.20	-19.29	Peak	346	352	P
7	12850.00	17.90	29.68	47.58	68.20	-20.62	Average	100	33	P
8	12850.00	17.90	43.02	60.92	88.20	-27.28	Peak	100	33	P
9	19275.00	9.63	44.89	54.52	63.54	-9.02	Average	150	360	P
10	19275.00	9.63	56.59	66.22	83.54	-17.32	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT320 CH95 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

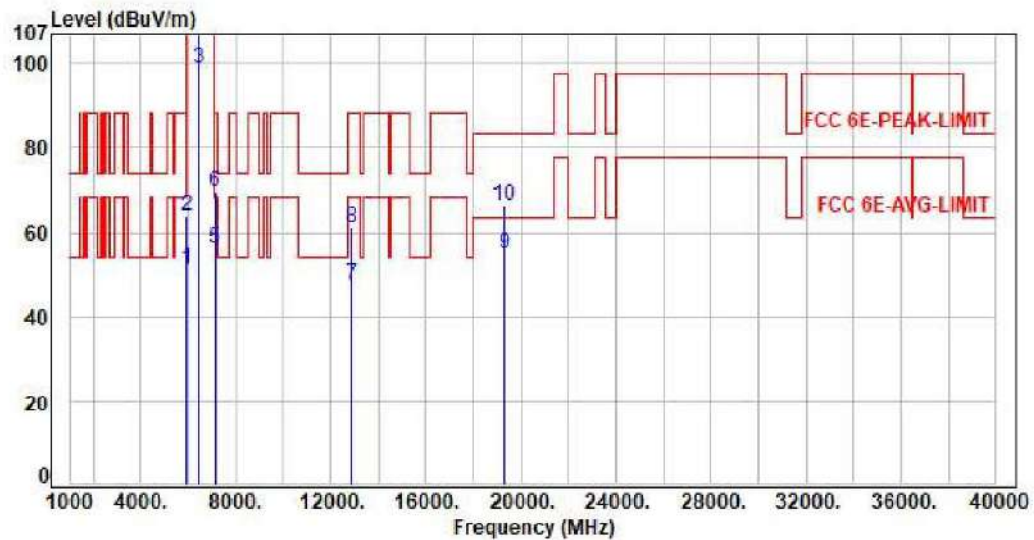

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.47	51.20	68.20	-17.00	Average	108	23	P
2	5925.00	7.73	56.13	63.86	88.20	-24.34	Peak	108	23	P
3	6425.00	8.39	90.32	98.71	200.00	-101.29	Average	108	23	P
4	6425.00	8.39	102.01	110.40	200.00	-89.60	Peak	108	23	P
5	7125.00	9.92	46.25	56.17	68.20	-12.03	Average	108	23	P
6	7125.00	9.92	59.79	69.71	88.20	-18.49	Peak	108	23	P
7	12850.00	17.90	29.62	47.52	68.20	-20.68	Average	100	78	P
8	12850.00	17.90	43.26	61.16	88.20	-27.04	Peak	100	78	P
9	19275.00	9.63	45.16	54.79	63.54	-8.75	Average	150	360	P
10	19275.00	9.63	56.53	66.16	83.54	-17.38	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Straddle Channel Band 6

Test Mode : 2TX 11be EHT40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

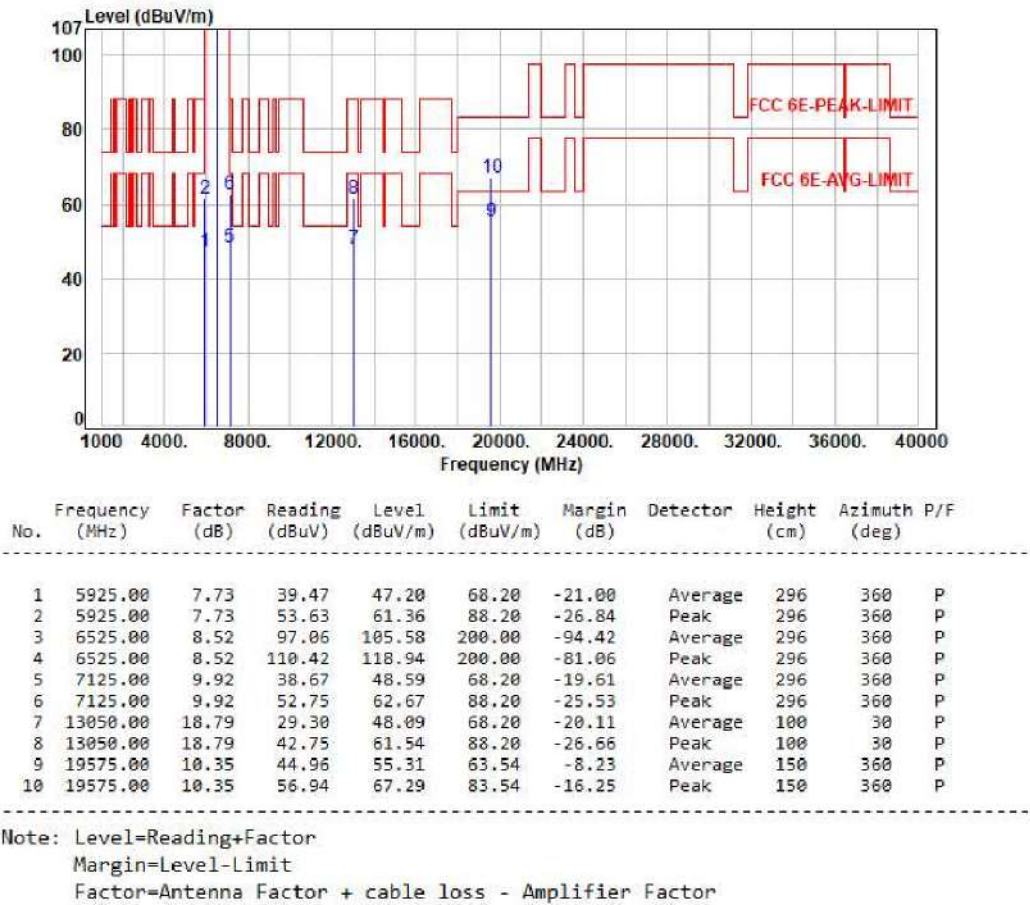



Test Mode : 2TX 11be EHT40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

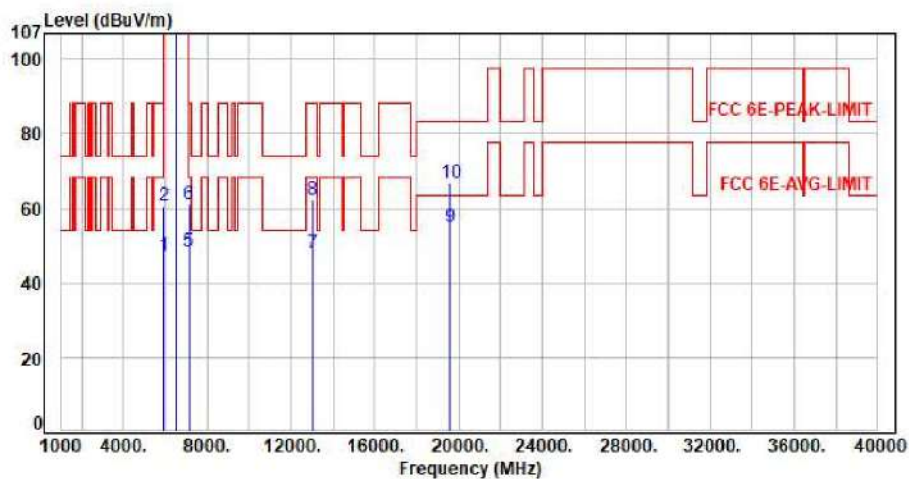

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.38	47.11	68.20	-21.09	Average	149	337	P
2	5925.00	7.73	52.88	60.61	88.20	-27.59	Peak	149	337	P
3	6525.00	8.52	99.42	107.94	200.00	-92.06	Average	149	337	P
4	6525.00	8.52	112.44	120.96	200.00	-79.04	Peak	149	337	P
5	7125.00	9.92	38.54	48.46	68.20	-19.74	Average	149	337	P
6	7125.00	9.92	51.03	60.95	88.20	-27.25	Peak	149	337	P
7	13050.00	18.79	29.14	47.93	68.20	-20.27	Average	100	271	P
8	13050.00	18.79	43.58	62.37	88.20	-25.83	Peak	100	271	P
9	19575.00	10.35	44.47	54.82	63.54	-8.72	Average	150	360	P
10	19575.00	10.35	56.25	66.60	83.54	-16.94	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

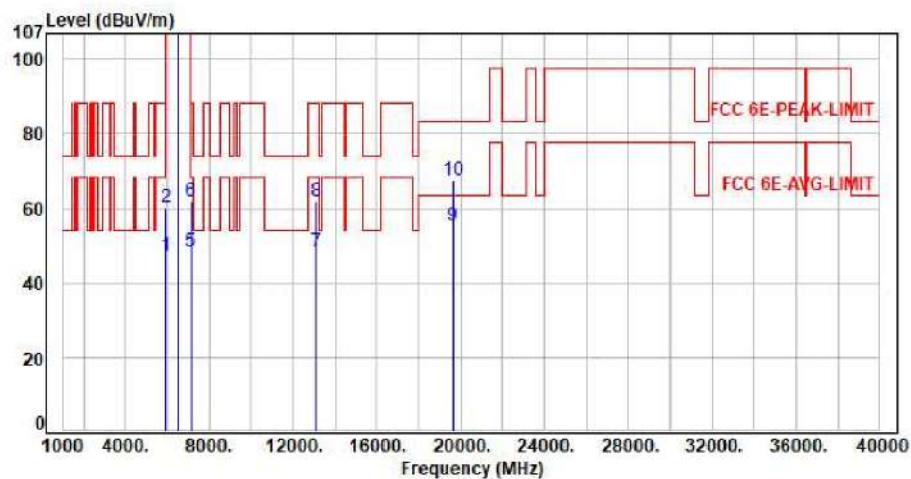

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.40	47.13	68.20	-21.07	Average	290	360	P
2	5925.00	7.73	52.57	60.30	88.20	-27.90	Peak	290	360	P
3	6545.00	8.63	97.03	105.66	200.00	-94.34	Average	290	360	P
4	6545.00	8.63	109.64	118.27	200.00	-81.73	Peak	290	360	P
5	7125.00	9.92	38.61	48.53	68.20	-19.67	Average	290	360	P
6	7125.00	9.92	51.85	61.77	88.20	-26.43	Peak	290	360	P
7	13090.00	19.04	29.21	48.25	68.20	-19.95	Average	100	34	P
8	13090.00	19.04	42.74	61.78	88.20	-26.42	Peak	100	34	P
9	19635.00	10.59	44.78	55.37	63.54	-8.17	Average	150	360	P
10	19635.00	10.59	56.75	67.34	83.54	-16.20	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

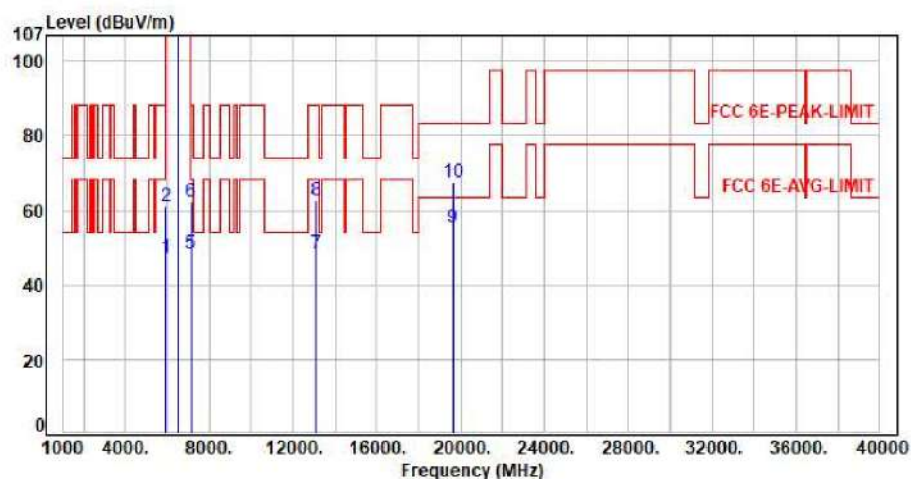

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.43	47.16	68.20	-21.04	Average	121	331	P
2	5925.00	7.73	53.28	61.01	88.20	-27.19	Peak	121	331	P
3	6545.00	8.63	97.97	106.60	200.00	-93.40	Average	121	331	P
4	6545.00	8.63	110.69	119.32	200.00	-80.68	Peak	121	331	P
5	7125.00	9.92	38.60	48.52	68.20	-19.68	Average	121	331	P
6	7125.00	9.92	52.52	62.44	88.20	-25.76	Peak	121	331	P
7	13090.00	19.04	29.32	48.36	68.20	-19.84	Average	100	274	P
8	13090.00	19.04	43.43	62.47	88.20	-25.73	Peak	100	274	P
9	19635.00	10.59	44.59	55.18	63.54	-8.36	Average	150	360	P
10	19635.00	10.59	56.83	67.42	83.54	-16.12	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

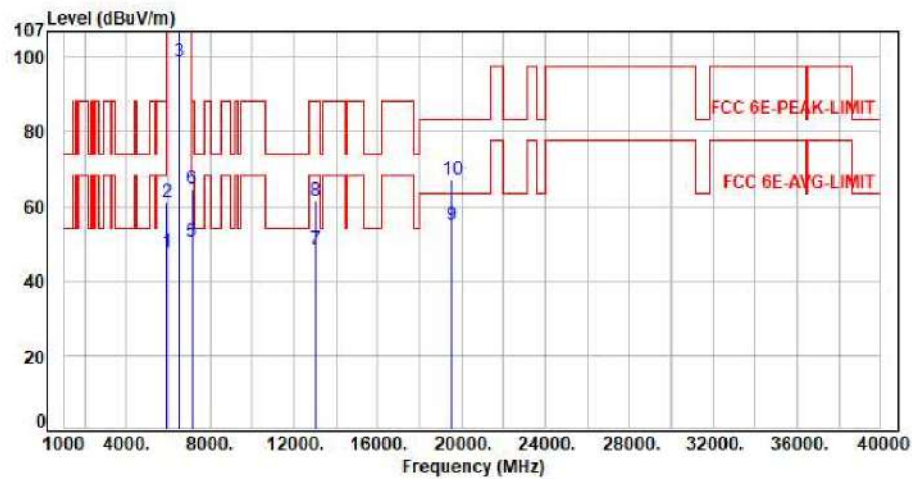

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.81	47.54	68.20	-20.66	Average	318	360	P
2	5925.00	7.73	53.35	61.08	88.20	-27.12	Peak	318	360	P
3	6505.00	8.39	90.63	99.02	200.00	-100.98	Average	318	360	P
4	6505.00	8.39	103.41	111.80	200.00	-88.20	Peak	318	360	P
5	7125.00	9.92	40.42	50.34	68.20	-17.86	Average	318	360	P
6	7125.00	9.92	54.69	64.61	88.20	-23.59	Peak	318	360	P
7	13010.00	18.63	29.68	48.31	68.20	-19.89	Average	100	26	P
8	13010.00	18.63	42.95	61.58	88.20	-26.62	Peak	100	26	P
9	19515.00	10.32	44.48	54.80	63.54	-8.74	Average	150	360	P
10	19515.00	10.32	56.61	66.93	83.54	-16.61	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

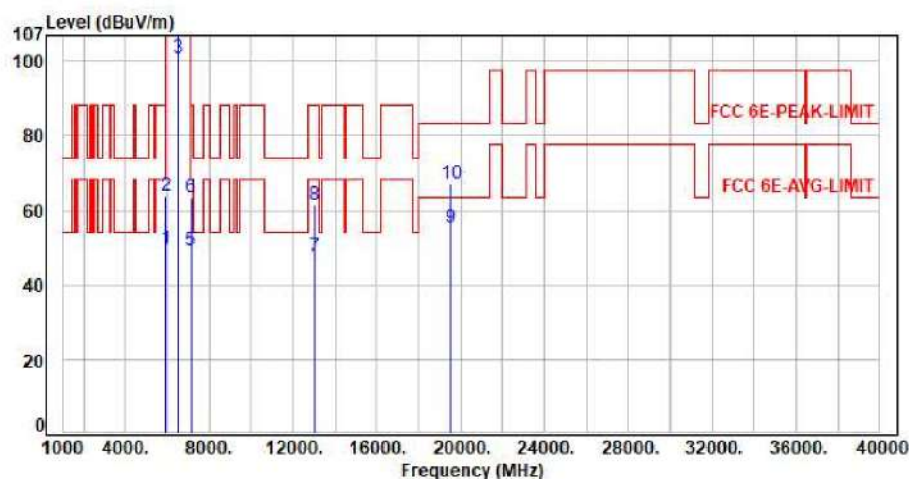

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.98	49.71	68.20	-18.49	Average	145	333	P
2	5925.00	7.73	55.96	63.69	88.20	-24.51	Peak	145	333	P
3	6505.00	8.39	92.55	100.94	200.00	-99.06	Average	145	333	P
4	6505.00	8.39	104.20	112.59	200.00	-87.41	Peak	145	333	P
5	7125.00	9.92	39.43	49.35	68.20	-18.85	Average	145	333	P
6	7125.00	9.92	53.47	63.39	88.20	-24.81	Peak	145	333	P
7	13010.00	18.63	28.99	47.62	68.20	-20.58	Average	100	273	P
8	13010.00	18.63	42.76	61.39	88.20	-26.81	Peak	100	273	P
9	19515.00	10.32	44.88	55.20	63.54	-8.34	Average	150	360	P
10	19515.00	10.32	56.95	67.27	83.54	-16.27	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH127 NSS1 MCS0
Voltage : From Adapter(AC 120/60Hz)
Pol : Vertical

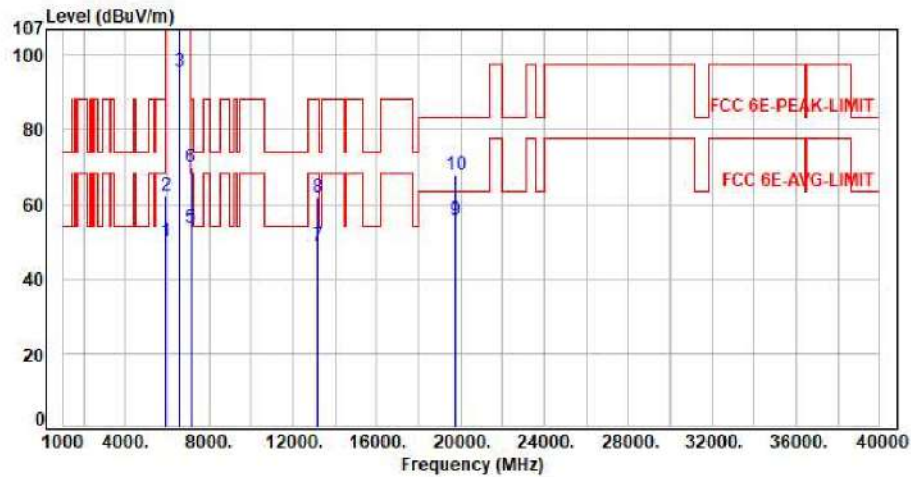

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.25	49.98	68.20	-18.22	Average	345	351	P
2	5925.00	7.73	54.37	62.10	88.20	-26.10	Peak	345	351	P
3	6585.00	8.80	86.89	95.69	200.00	-104.31	Average	345	351	P
4	6585.00	8.80	99.68	108.48	200.00	-91.52	Peak	345	351	P
5	7125.00	9.92	43.98	53.90	68.20	-14.30	Average	345	351	P
6	7125.00	9.92	60.07	69.99	88.20	-18.21	Peak	345	351	P
7	13170.00	19.32	29.46	48.78	68.20	-19.42	Average	100	32	P
8	13170.00	19.32	42.56	61.88	88.20	-26.32	Peak	100	32	P
9	19755.00	10.70	45.10	55.80	63.54	-7.74	Average	150	360	P
10	19755.00	10.70	57.28	67.98	83.54	-15.56	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH127 NSS1 MCS0
Voltage : From Adapter(AC 120/60Hz)
Pol : Horizontal

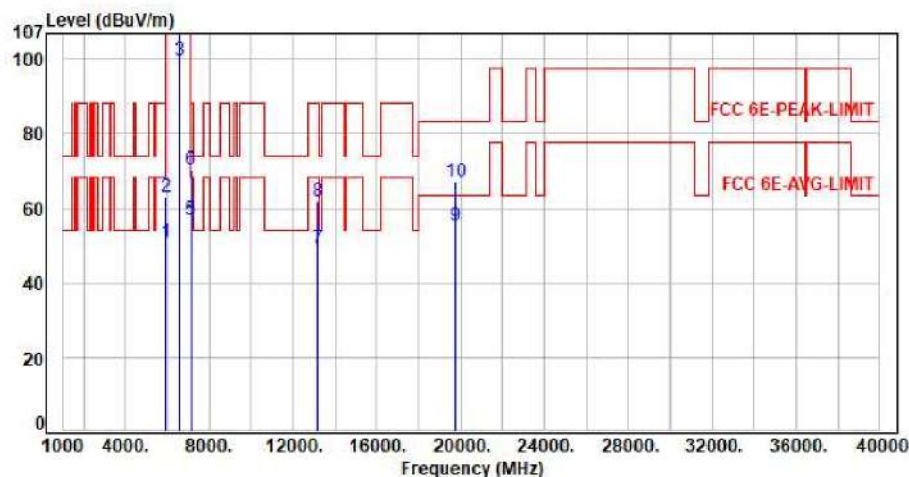

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.12	50.85	68.20	-17.35	Average	100	21	P
2	5925.00	7.73	55.40	63.13	88.20	-25.07	Peak	100	21	P
3	6585.00	8.80	90.85	99.65	200.00	-100.35	Average	100	21	P
4	6585.00	8.80	102.51	111.31	200.00	-88.69	Peak	100	21	P
5	7125.00	9.92	47.00	56.92	68.20	-11.28	Average	100	21	P
6	7125.00	9.92	60.64	70.56	88.20	-17.64	Peak	100	21	P
7	13170.00	19.32	29.90	49.22	68.20	-18.98	Average	100	79	P
8	13170.00	19.32	42.53	61.85	88.20	-26.35	Peak	100	79	P
9	19755.00	10.70	44.47	55.17	63.54	-8.37	Average	150	360	P
10	19755.00	10.70	56.58	67.28	83.54	-16.26	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

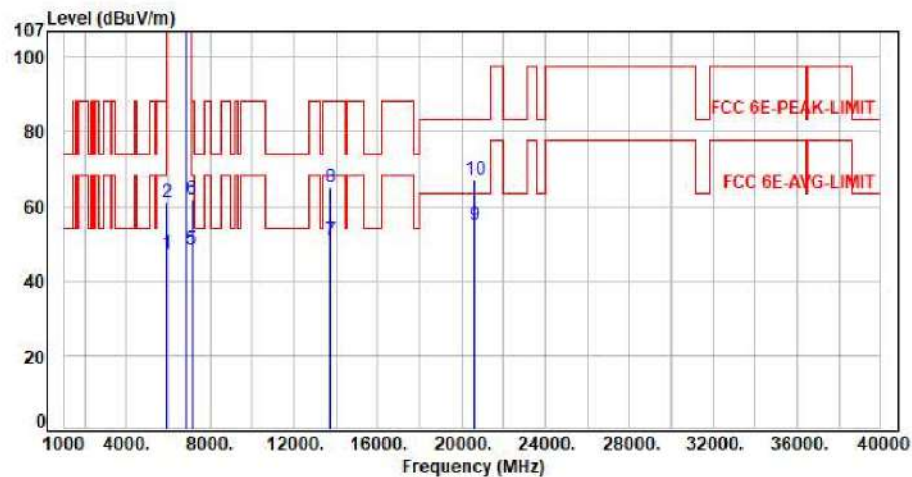

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.40	47.13	68.20	-21.07	Average	100	42	P
2	5925.00	7.73	53.38	61.11	88.20	-27.09	Peak	100	42	P
3	6875.00	9.47	95.86	105.33	200.00	-94.67	Average	100	42	P
4	6875.00	9.47	106.21	115.68	200.00	-84.32	Peak	100	42	P
5	7125.00	9.92	38.67	48.59	68.20	-19.61	Average	100	42	P
6	7125.00	9.92	51.90	61.82	88.20	-26.38	Peak	100	42	P
7	13750.00	21.47	29.38	50.85	68.20	-17.35	Average	100	29	P
8	13750.00	21.47	43.56	65.03	88.20	-23.17	Peak	100	29	P
9	20625.00	9.75	45.14	54.89	63.54	-8.65	Average	150	360	P
10	20625.00	9.75	57.22	66.97	83.54	-16.57	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

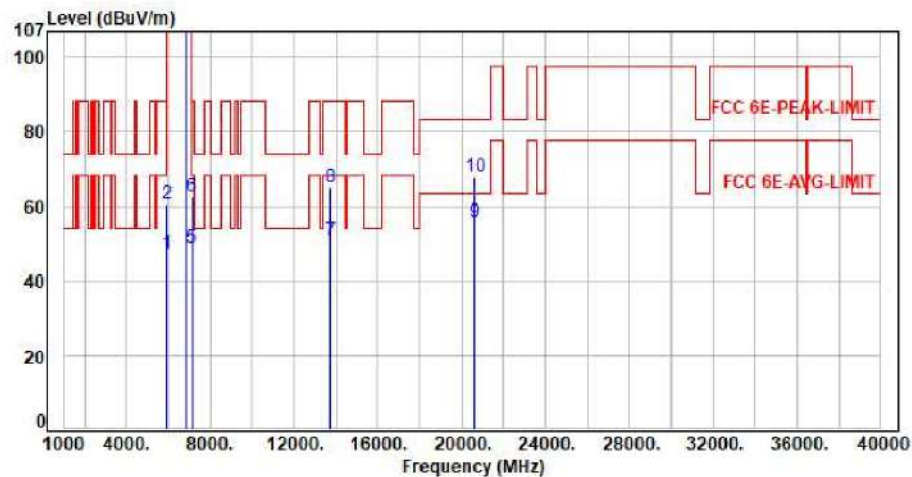

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.39	47.12	68.20	-21.08	Average	100	337	P
2	5925.00	7.73	53.01	60.74	88.20	-27.46	Peak	100	337	P
3	6875.00	9.47	100.29	109.76	200.00	-90.24	Average	100	337	P
4	6875.00	9.47	111.44	120.91	200.00	-79.09	Peak	100	337	P
5	7125.00	9.92	38.76	48.68	68.20	-19.52	Average	100	337	P
6	7125.00	9.92	52.69	62.61	88.20	-25.59	Peak	100	337	P
7	13750.00	21.47	29.52	50.99	68.20	-17.21	Average	100	270	P
8	13750.00	21.47	43.82	65.29	88.20	-22.91	Peak	100	270	P
9	20625.00	9.75	45.85	55.60	63.54	-7.94	Average	150	360	P
10	20625.00	9.75	58.11	67.86	83.54	-15.68	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

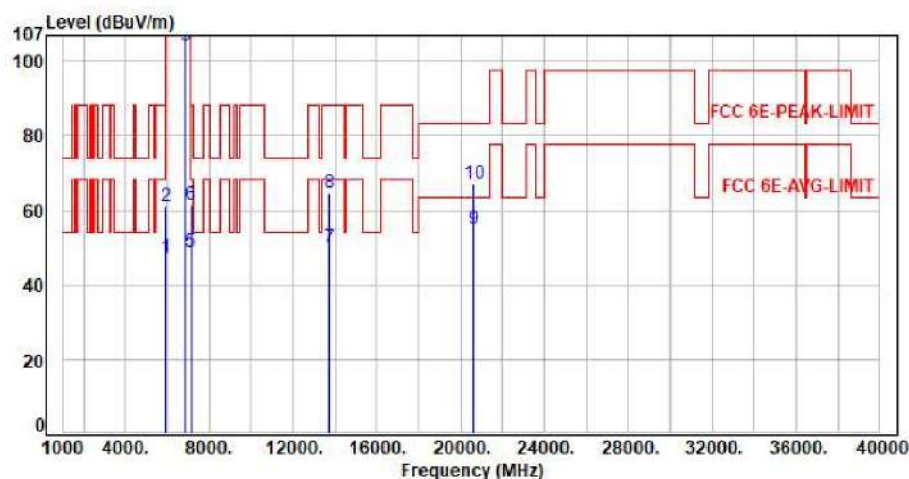

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.51	47.24	68.20	-20.96	Average	100	43	P
2	5925.00	7.73	53.44	61.17	88.20	-27.03	Peak	100	43	P
3	6875.00	9.47	94.77	104.24	200.00	-95.76	Average	100	43	P
4	6875.00	9.47	107.18	116.65	200.00	-83.35	Peak	100	43	P
5	7125.00	9.92	38.71	48.63	68.20	-19.57	Average	100	43	P
6	7125.00	9.92	51.67	61.59	88.20	-26.61	Peak	100	43	P
7	13750.00	21.47	28.74	50.21	68.20	-17.99	Average	100	24	P
8	13750.00	21.47	43.19	64.66	88.20	-23.54	Peak	100	24	P
9	20625.00	9.75	45.26	55.01	63.54	-8.53	Average	150	360	P
10	20625.00	9.75	57.54	67.29	83.54	-16.25	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

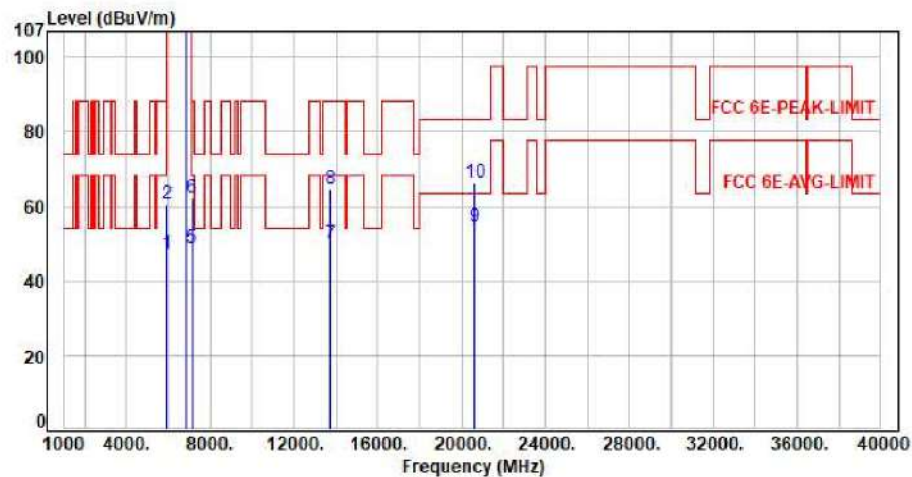

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.40	47.13	68.20	-21.07	Average	100	334	P
2	5925.00	7.73	53.06	60.79	88.20	-27.41	Peak	100	334	P
3	6875.00	9.47	99.41	108.88	200.00	-91.12	Average	100	334	P
4	6875.00	9.47	112.49	121.96	200.00	-78.04	Peak	100	334	P
5	7125.00	9.92	38.75	48.67	68.20	-19.53	Average	100	334	P
6	7125.00	9.92	52.43	62.35	88.20	-25.85	Peak	100	334	P
7	13750.00	21.47	28.73	50.20	68.20	-18.00	Average	100	271	P
8	13750.00	21.47	43.22	64.69	88.20	-23.51	Peak	100	271	P
9	20625.00	9.75	44.89	54.64	63.54	-8.90	Average	150	360	P
10	20625.00	9.75	56.58	66.33	83.54	-17.21	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

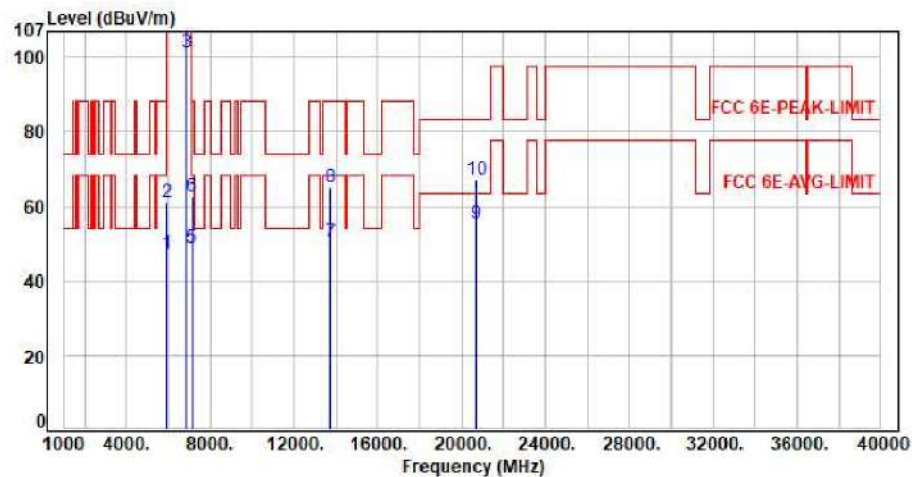

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.47	47.20	68.20	-21.00	Average	100	44	P
2	5925.00	7.73	53.24	60.97	88.20	-27.23	Peak	100	44	P
3	6885.00	9.47	91.79	101.26	200.00	-98.74	Average	100	44	P
4	6885.00	9.47	104.23	113.70	200.00	-86.30	Peak	100	44	P
5	7125.00	9.92	39.04	48.96	68.20	-19.24	Average	100	44	P
6	7125.00	9.92	52.54	62.46	88.20	-25.74	Peak	100	44	P
7	13770.00	21.56	28.73	50.29	68.20	-17.91	Average	100	25	P
8	13770.00	21.56	43.55	65.11	88.20	-23.09	Peak	100	25	P
9	20655.00	9.82	45.57	55.39	63.54	-8.15	Average	150	360	P
10	20655.00	9.82	57.34	67.16	83.54	-16.38	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

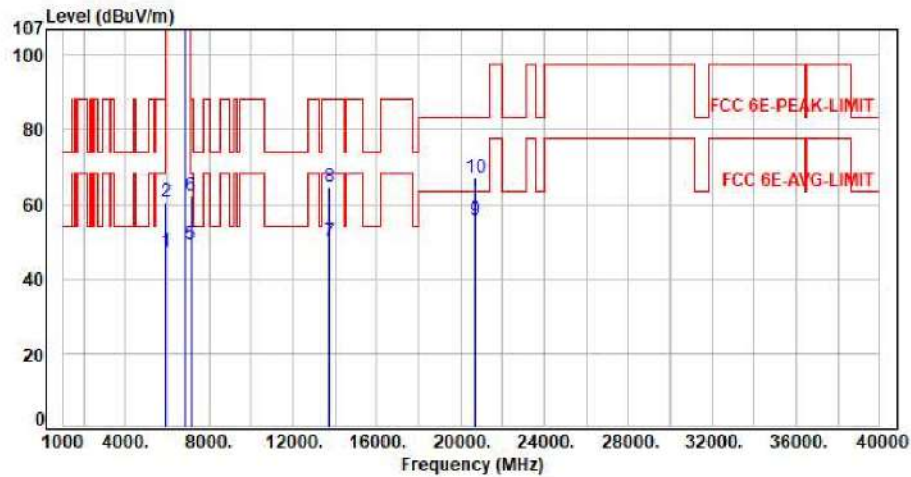

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.47	47.20	68.20	-21.00	Average	100	335	P
2	5925.00	7.73	52.85	60.58	88.20	-27.62	Peak	100	335	P
3	6885.00	9.47	96.51	105.98	200.00	-94.02	Average	100	335	P
4	6885.00	9.47	109.14	118.61	200.00	-81.39	Peak	100	335	P
5	7125.00	9.92	39.28	49.20	68.20	-19.00	Average	100	335	P
6	7125.00	9.92	52.44	62.36	88.20	-25.84	Peak	100	335	P
7	13770.00	21.56	28.60	50.16	68.20	-18.04	Average	100	273	P
8	13770.00	21.56	43.22	64.78	88.20	-23.42	Peak	100	273	P
9	20655.00	9.82	45.79	55.61	63.54	-7.93	Average	150	360	P
10	20655.00	9.82	57.19	67.01	83.54	-16.53	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

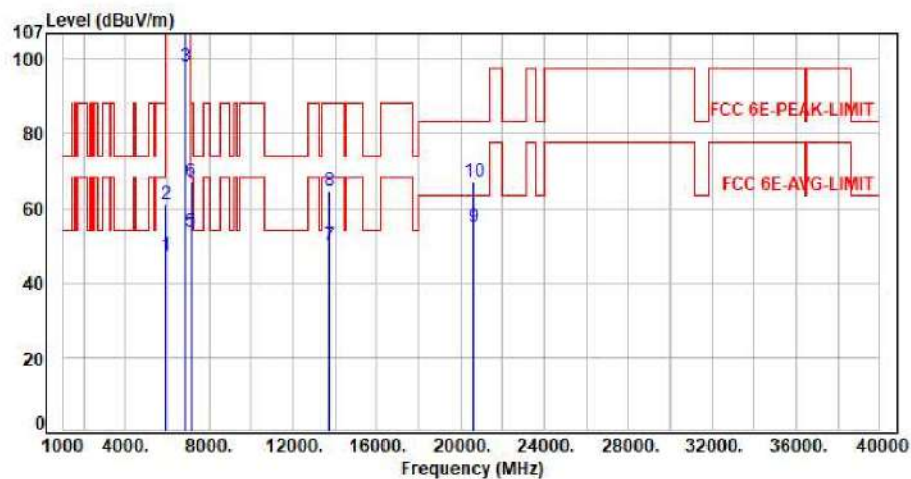

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	39.53	47.26	68.20	-20.94	Average	100	44	P
2	5925.00	7.73	53.13	60.86	88.20	-27.34	Peak	100	44	P
3	6865.00	9.47	88.69	98.16	200.00	-101.84	Average	100	44	P
4	6865.00	9.47	102.21	111.68	200.00	-88.32	Peak	100	44	P
5	7125.00	9.92	43.94	53.86	68.20	-14.34	Average	100	44	P
6	7125.00	9.92	57.21	67.13	88.20	-21.07	Peak	100	44	P
7	13730.00	21.42	28.55	49.97	68.20	-18.23	Average	100	30	P
8	13730.00	21.42	43.29	64.71	88.20	-23.49	Peak	100	30	P
9	20595.00	9.74	45.30	55.04	63.54	-8.50	Average	150	360	P
10	20595.00	9.74	57.47	67.21	83.54	-16.33	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor