


7.7.3. Test Setup

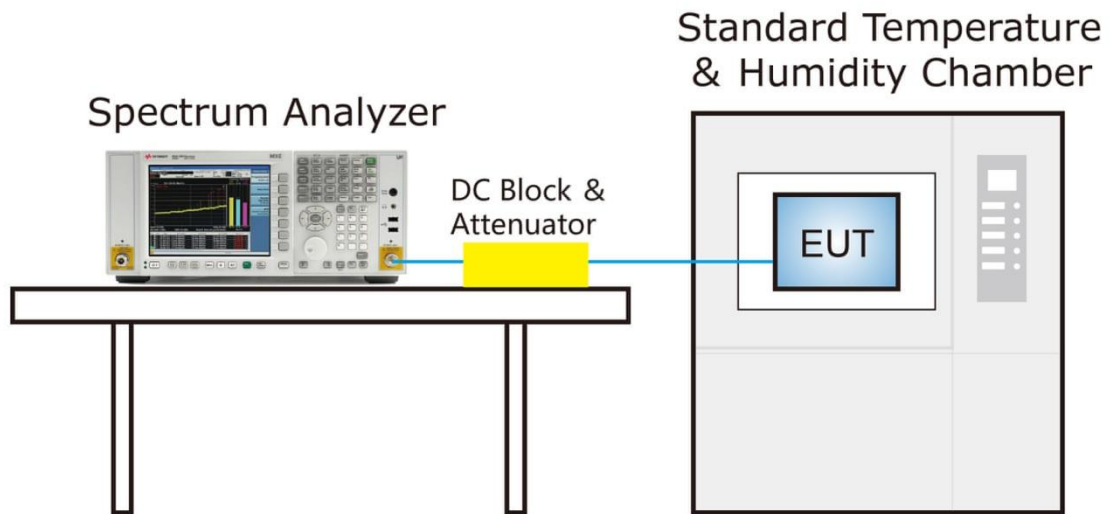

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

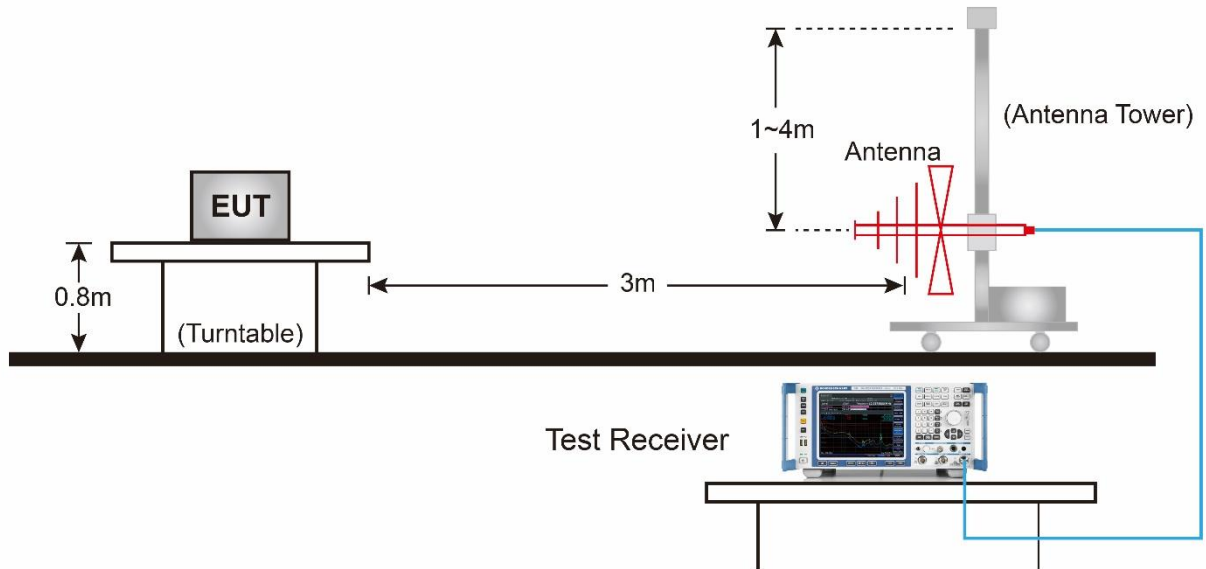


Above 1GHz Test Setup:

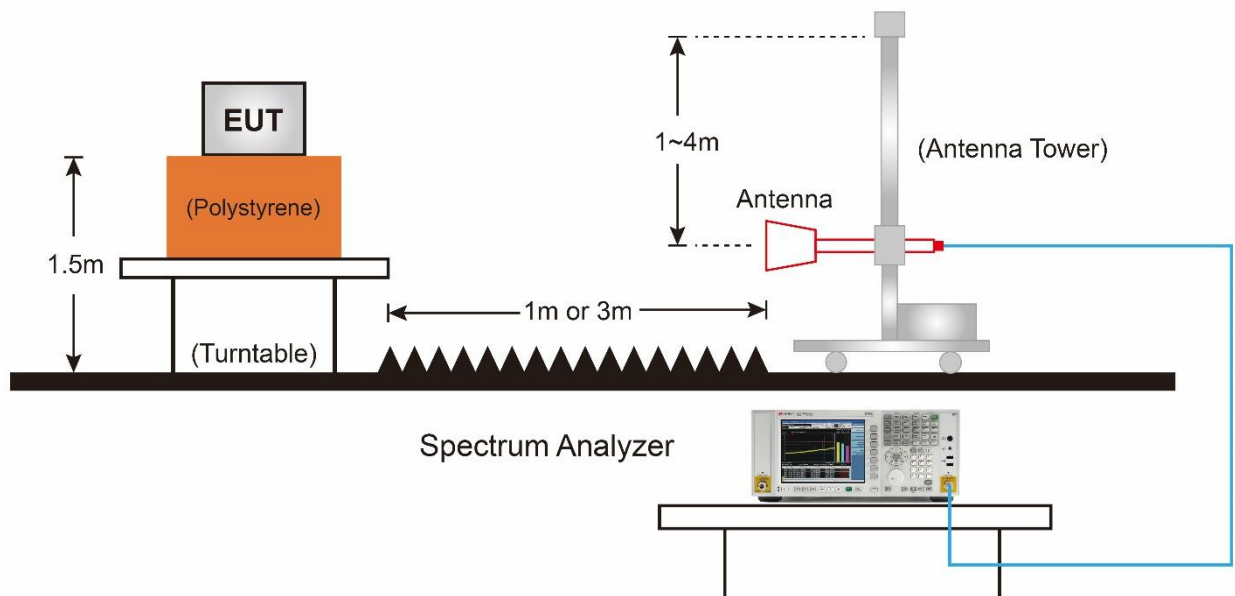

7.8.5.Test Result

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-25
Factor	VULB 9162	Temp. / Humidity	22°C /50%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

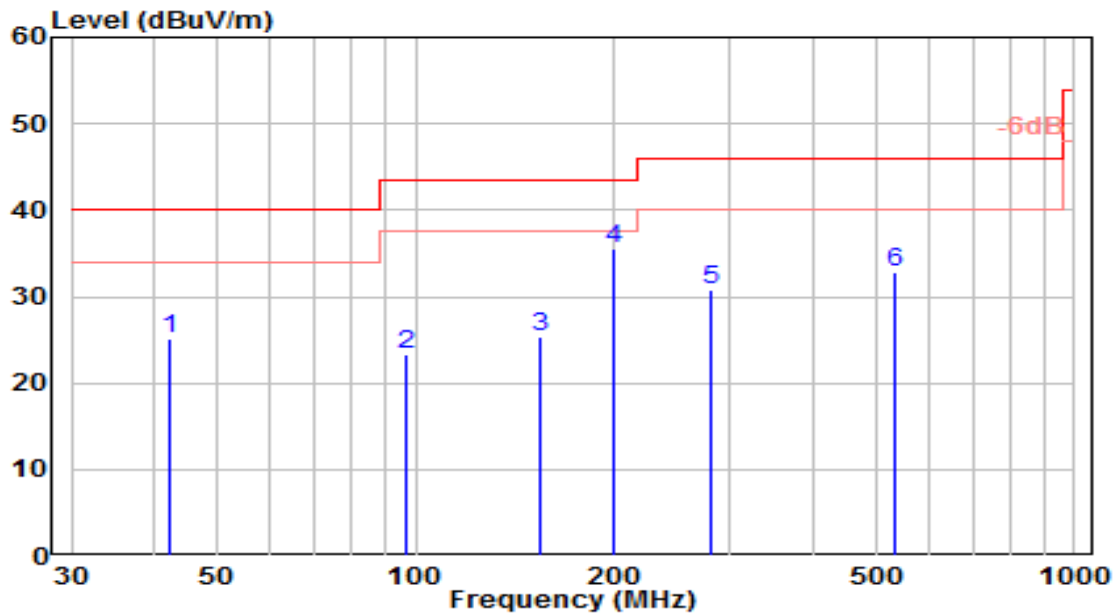


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	42.464	4.61	20.55	25.15	-14.85	40.00	100	130	QP
2	96.598	5.03	18.30	23.33	-20.17	43.50	100	20	QP
3	154.286	9.54	15.78	25.32	-18.18	43.50	150	65	QP
4	* 199.901	16.95	18.56	35.50	-8.00	43.50	150	40	QP
5	279.995	10.14	20.70	30.84	-15.16	46.00	100	280	QP
6	533.729	6.91	25.90	32.81	-13.19	46.00	150	350	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-25
Factor	VULB 9162	Temp. / Humidity	22°C /50%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

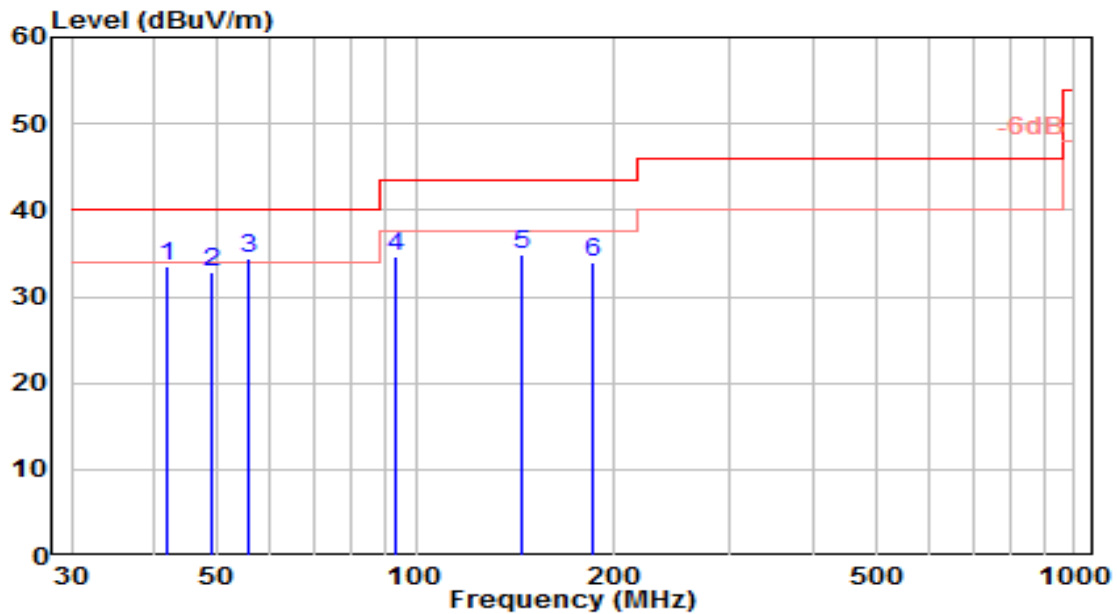


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	41.988	13.06	20.46	33.52	-6.48	40.00	100	75	QP
2	49.188	11.51	21.20	32.72	-7.28	40.00	100	40	QP
3	* 55.705	13.92	20.48	34.40	-5.60	40.00	100	355	QP
4	93.359	16.99	17.73	34.73	-8.77	43.50	100	180	QP
5	144.610	19.38	15.41	34.78	-8.72	43.50	100	340	QP
6	185.540	16.45	17.53	33.98	-9.52	43.50	100	100	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

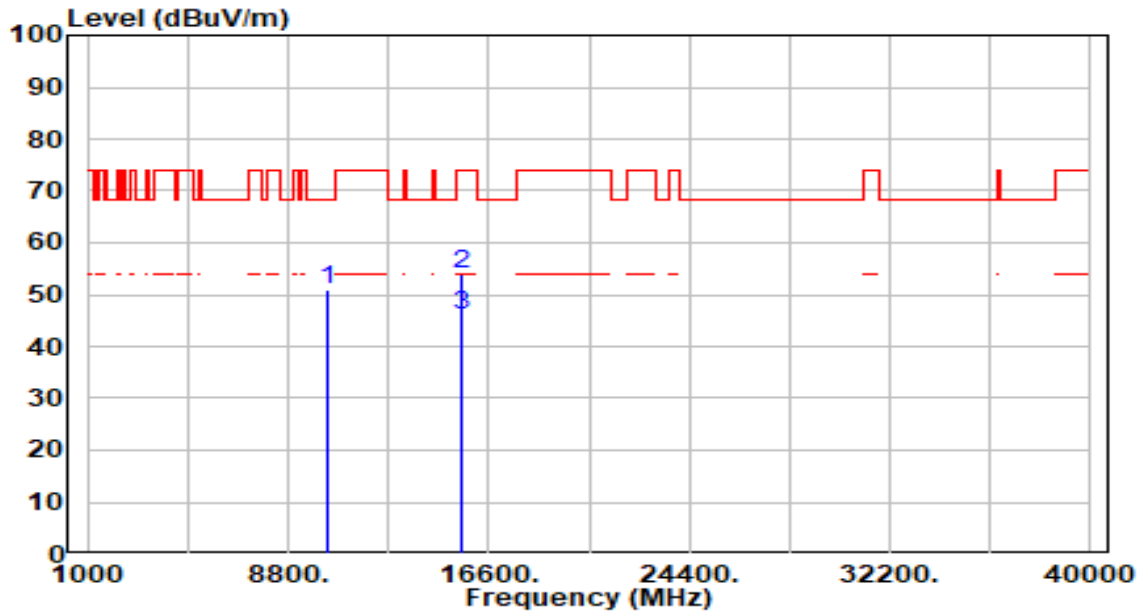


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	46.23	4.81	51.04	-17.16	68.20	100	288	Peak
2		15540.000	47.75	6.28	54.04	-19.96	74.00	100	39	Peak
3	*	15540.000	39.75	6.28	46.04	-7.96	54.00	100	39	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

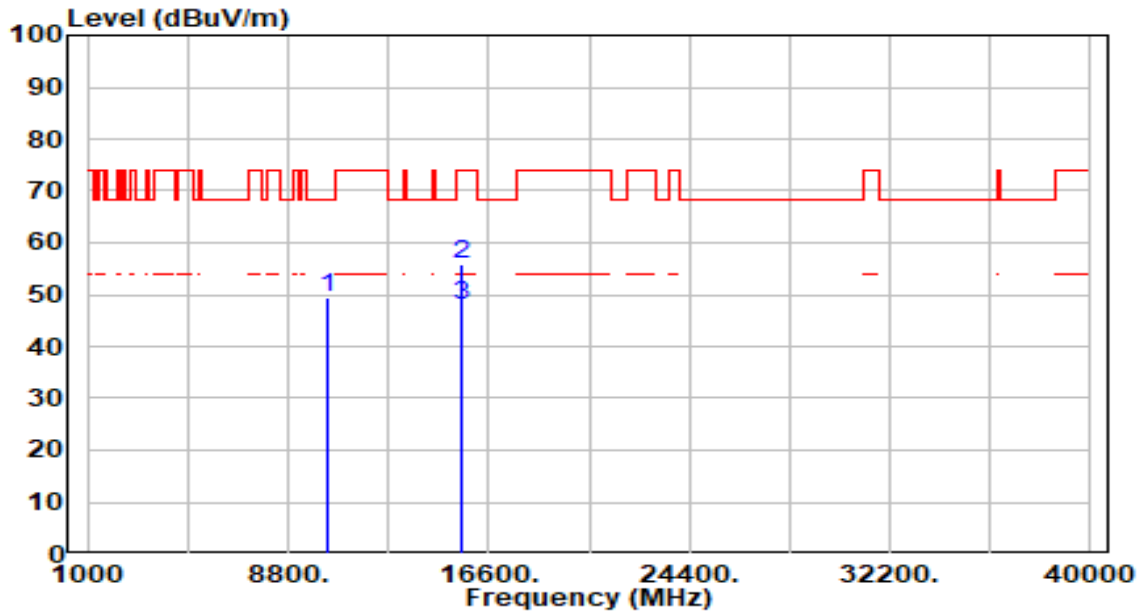


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10360.000	44.61	4.81	49.43	-18.77	68.20	300	0	Peak
2	*	15540.000	49.62	6.28	55.91	-18.09	74.00	300	340	Peak
3	*	15540.000	41.62	6.28	47.91	-6.09	54.00	300	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

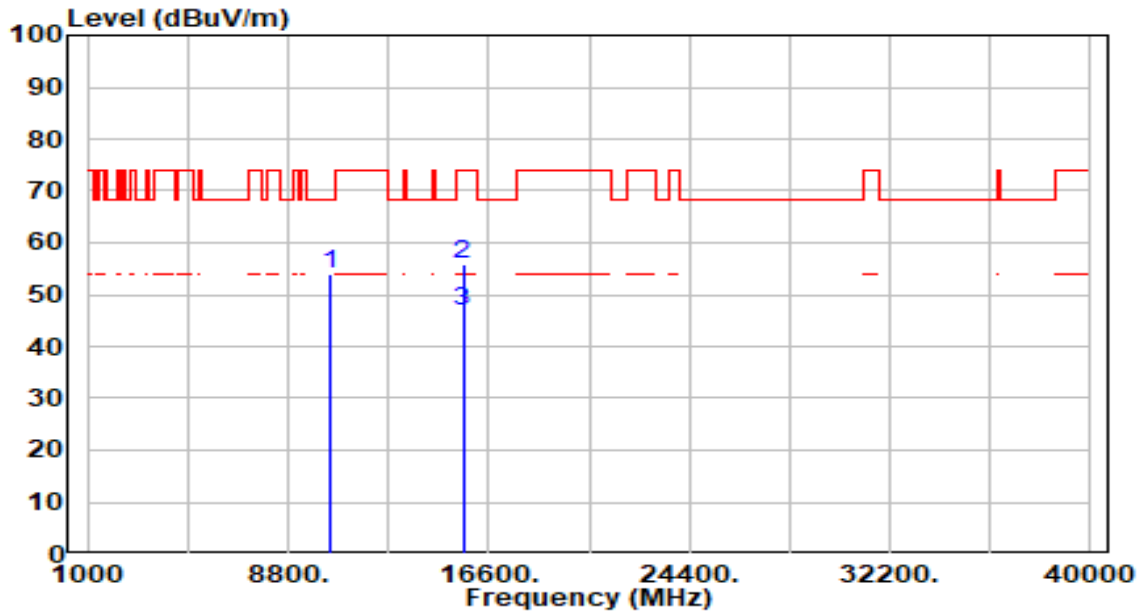


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	49.12	4.77	53.89	-14.31	68.20	100	68	Peak
2		15600.000	49.60	6.19	55.79	-18.21	74.00	100	295	Peak
3	*	15600.000	40.60	6.19	46.79	-7.21	54.00	100	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

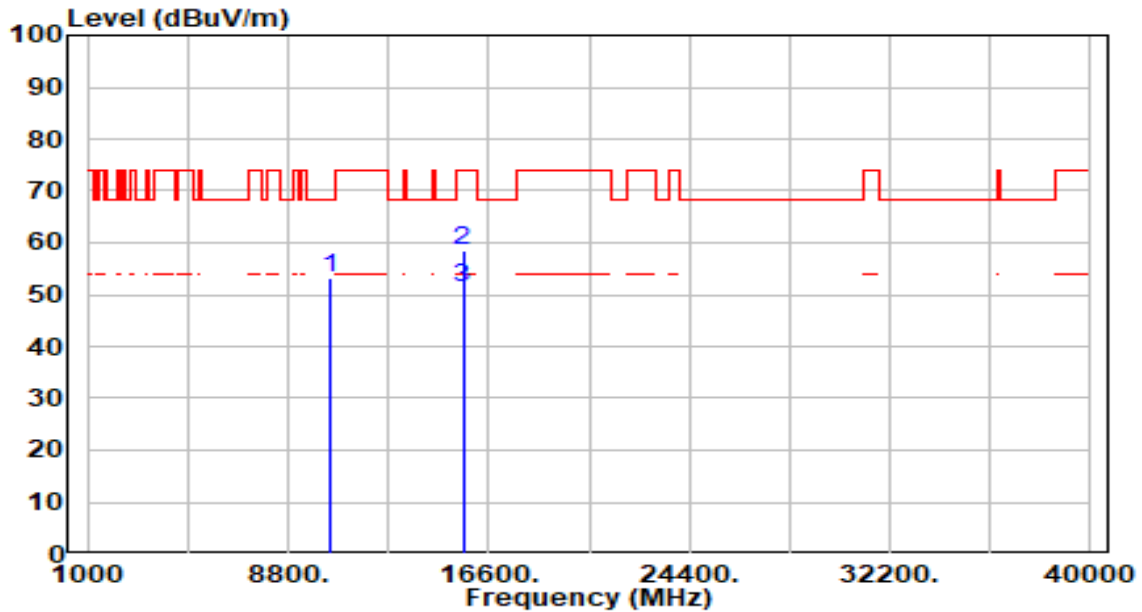


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	48.55	4.77	53.32	-14.88	68.20	300	348	Peak
2		15600.000	52.29	6.19	58.48	-15.52	74.00	300	336	Peak
3	*	15600.000	45.29	6.19	51.48	-2.52	54.00	300	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

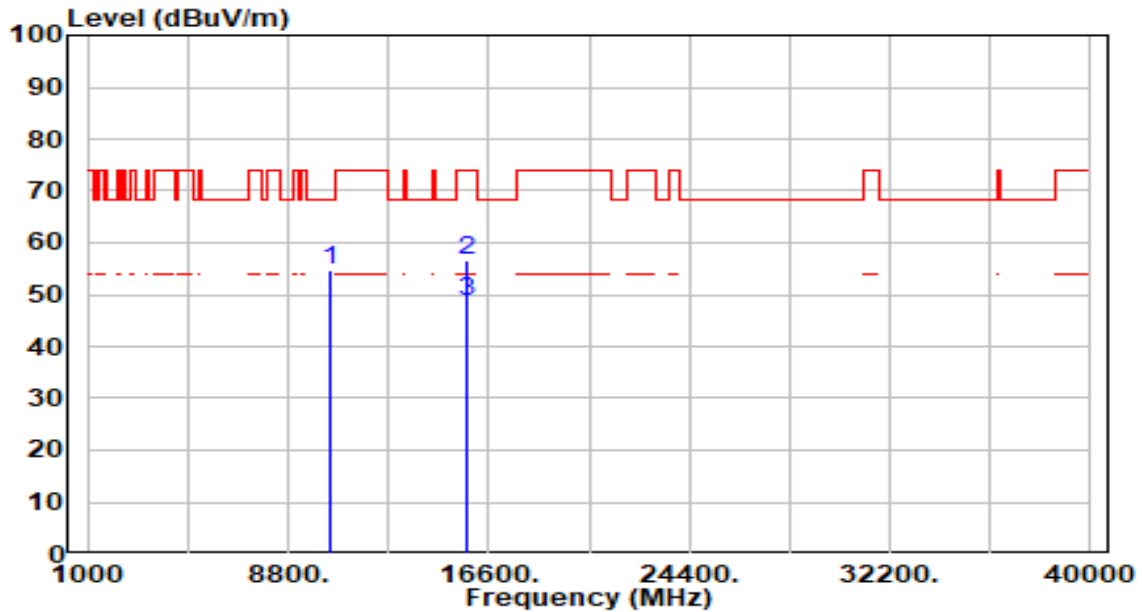


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	50.04	4.65	54.70	-13.50	68.20	100	99	Peak
2		15720.000	50.27	6.43	56.70	-17.30	74.00	100	32	Peak
3	*	15720.000	42.27	6.43	48.70	-5.30	54.00	100	32	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

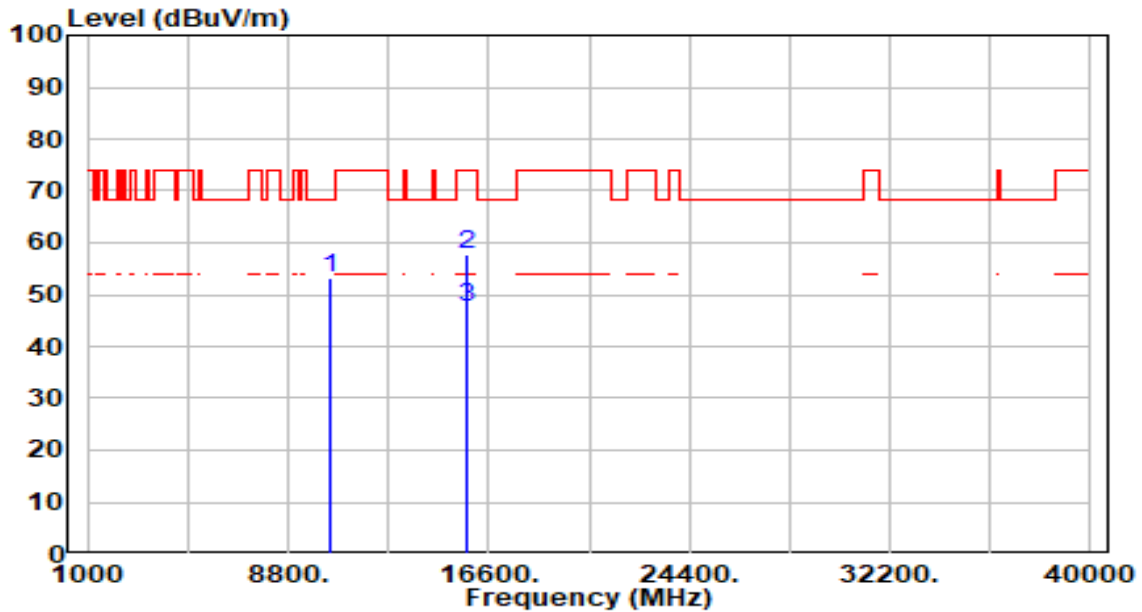


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	48.43	4.65	53.09	-15.11	68.20	300	7	Peak
2		15720.000	51.13	6.43	57.56	-16.44	74.00	300	228	Peak
3	*	15720.000	41.13	6.43	47.56	-6.44	54.00	300	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

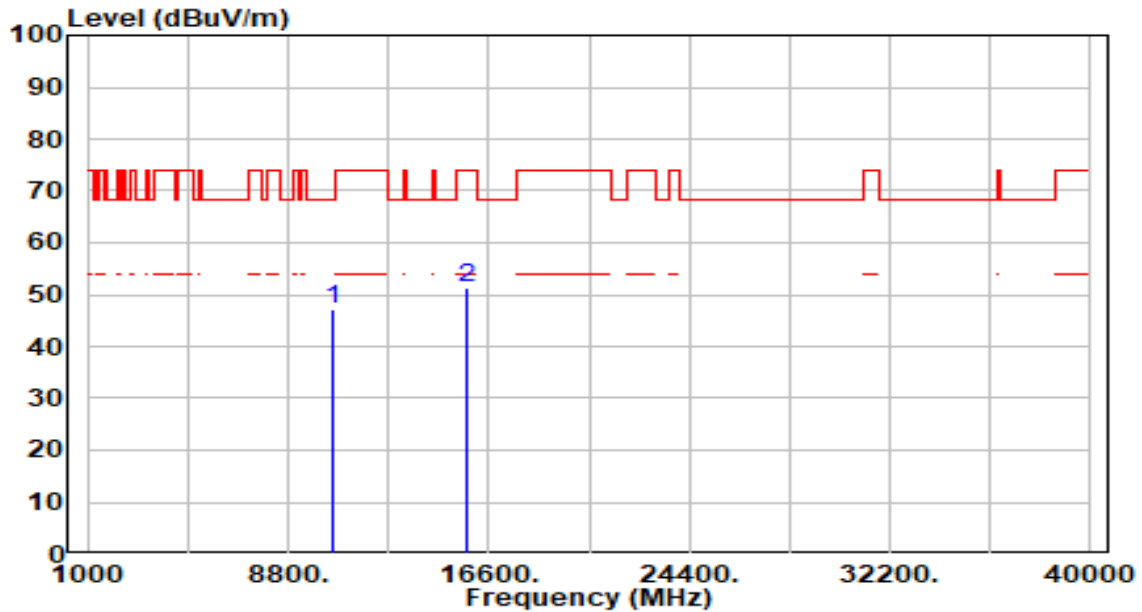


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.45	4.61	47.06	-21.14	68.20	100	93	Peak
2		15780.000	44.86	6.55	51.41	-22.59	74.00	100	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

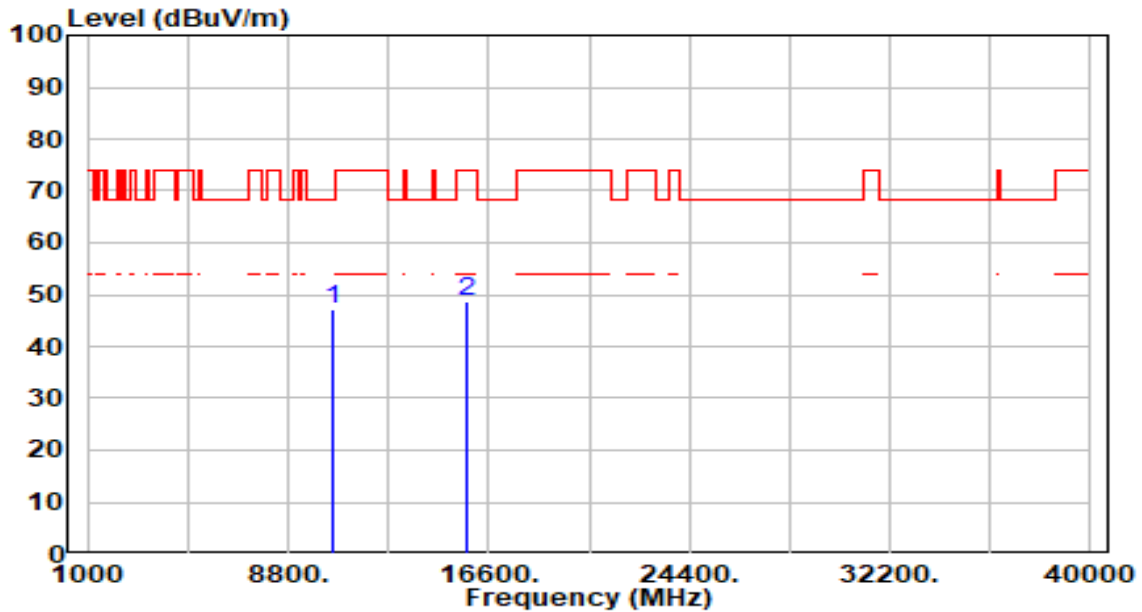


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.74	4.61	47.35	-20.85	68.20	300	6	Peak
2		15780.000	42.23	6.55	48.78	-25.22	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

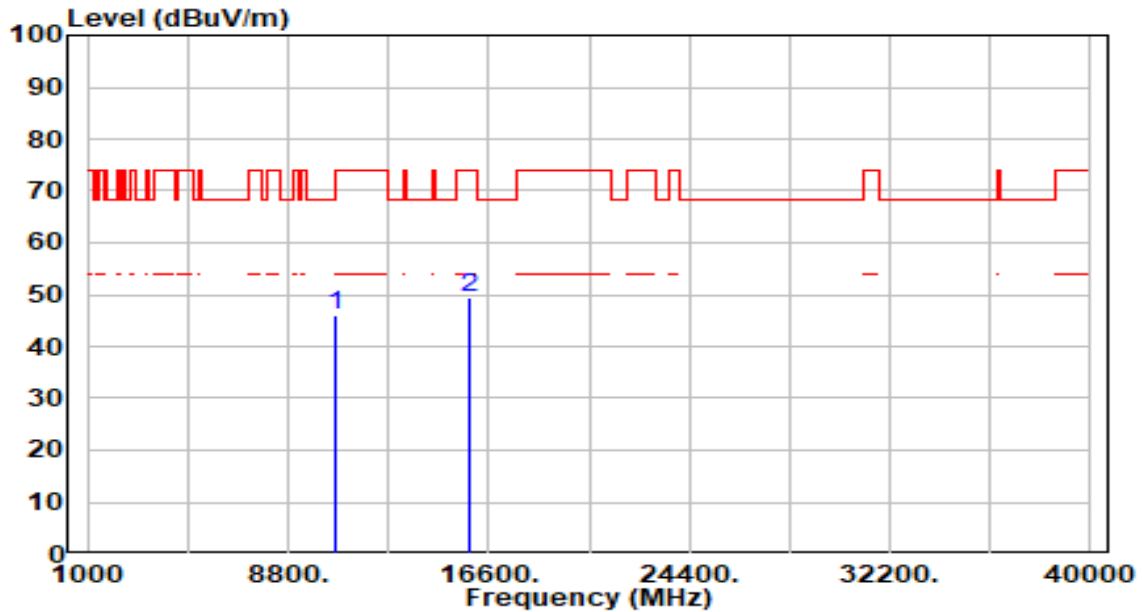


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.59	4.55	46.14	-22.06	68.20	100	92	Peak
2		15900.000	42.75	6.64	49.39	-24.61	74.00	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

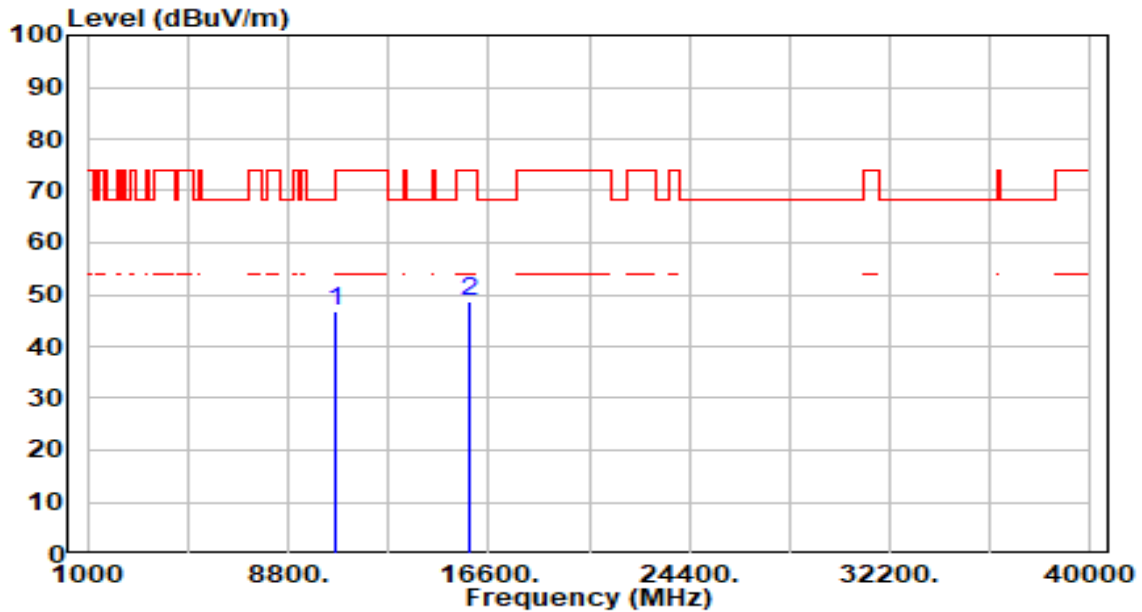


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.26	4.55	46.81	-21.39	68.20	300	344	Peak
2		15900.000	41.94	6.64	48.58	-25.42	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

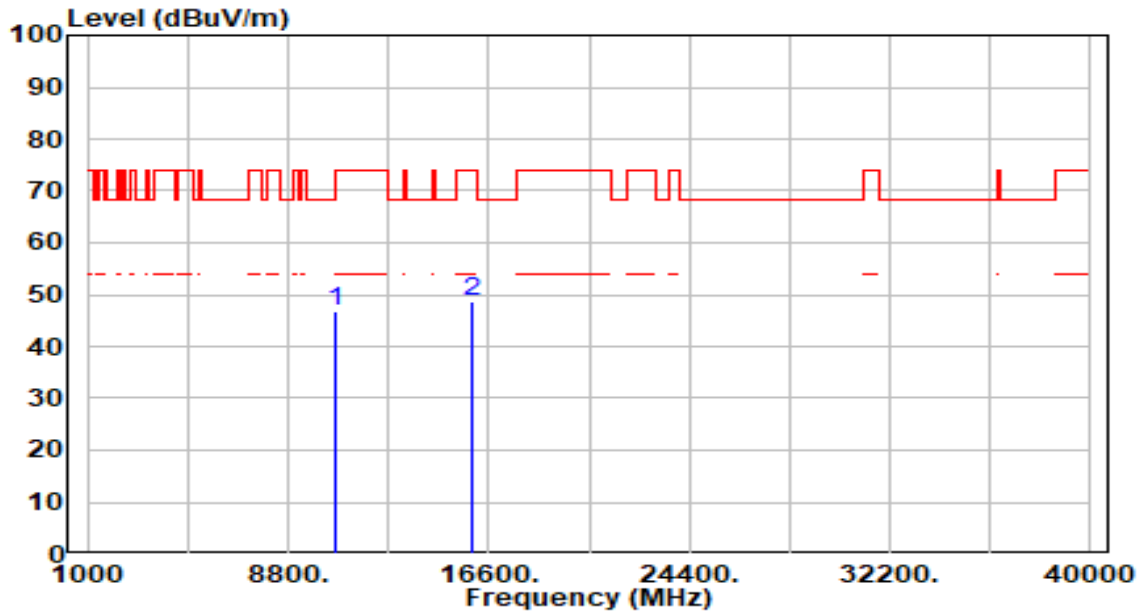


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	42.08	4.58	46.66	-27.34	74.00	100	110	Peak
2	*	15960.000	41.84	6.67	48.51	-25.49	74.00	100	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

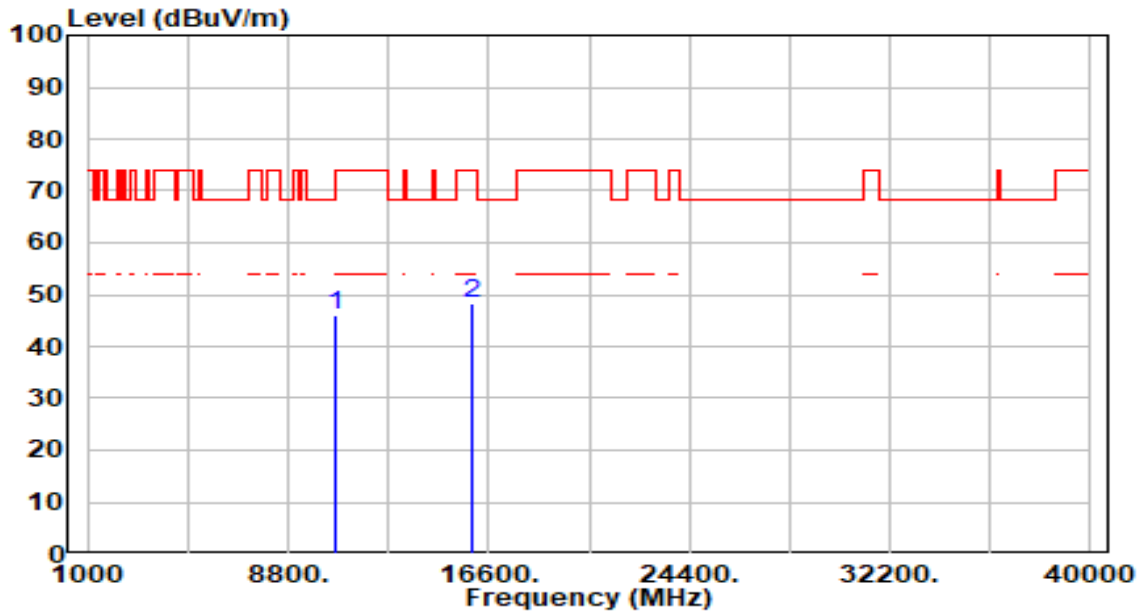


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.56	4.58	46.14	-27.86	74.00	300	0	Peak
2	*	15960.000	41.62	6.67	48.29	-25.71	74.00	300	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

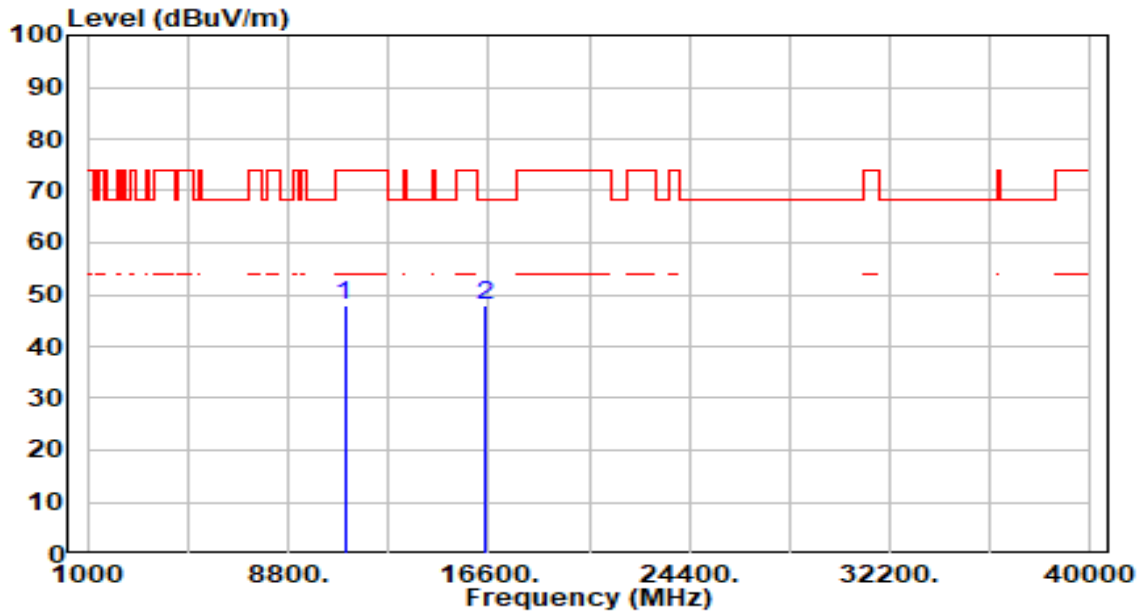


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.59	4.44	48.03	-25.97	74.00	100	212	Peak
2	*	16500.000	41.72	6.07	47.79	-20.41	68.20	100	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

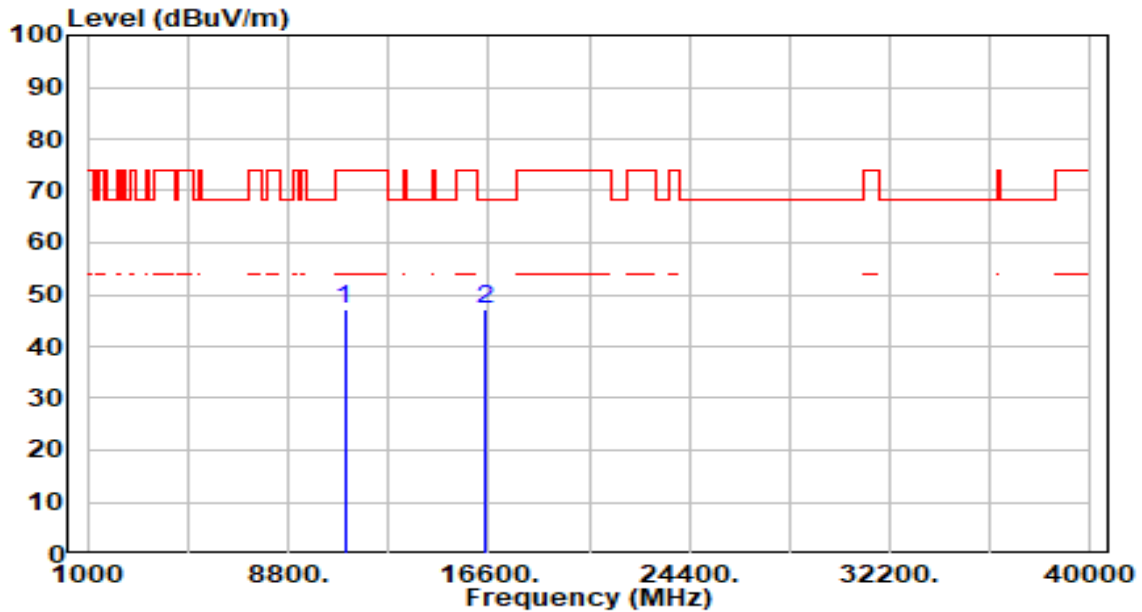


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.66	4.44	47.10	-26.90	74.00	300	13	Peak
2	*	16500.000	41.10	6.07	47.17	-21.03	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

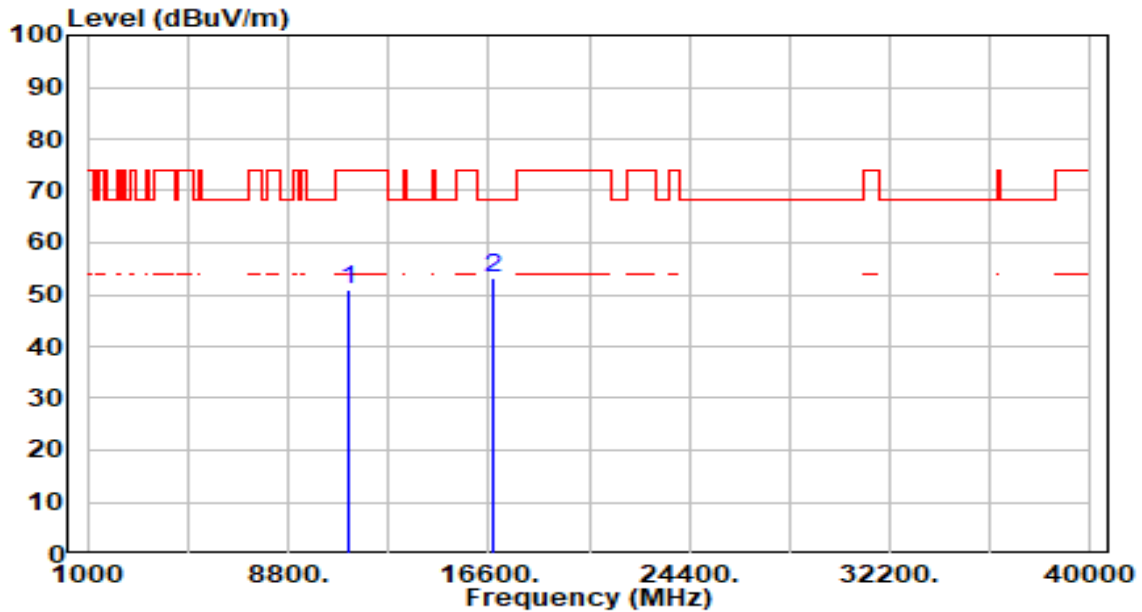


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	46.22	4.87	51.09	-22.91	74.00	100	203	Peak
2	*	16740.000	47.10	6.01	53.11	-15.09	68.20	100	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

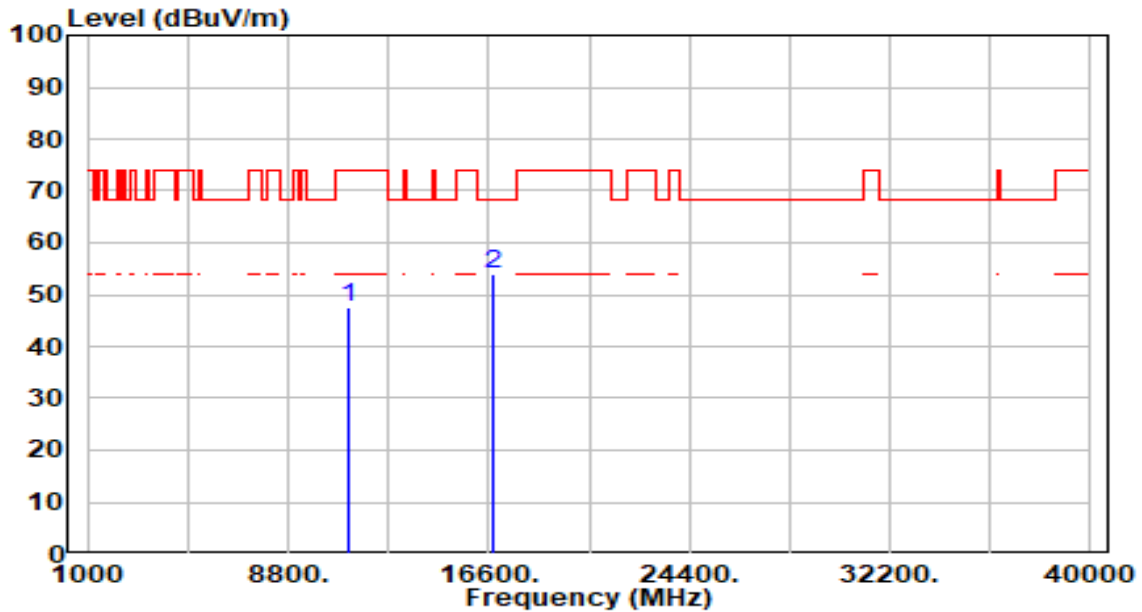


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.58	4.87	47.45	-26.55	74.00	300	0	Peak
2	* 16740.000	48.01	6.01	54.03	-14.17	68.20	300	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

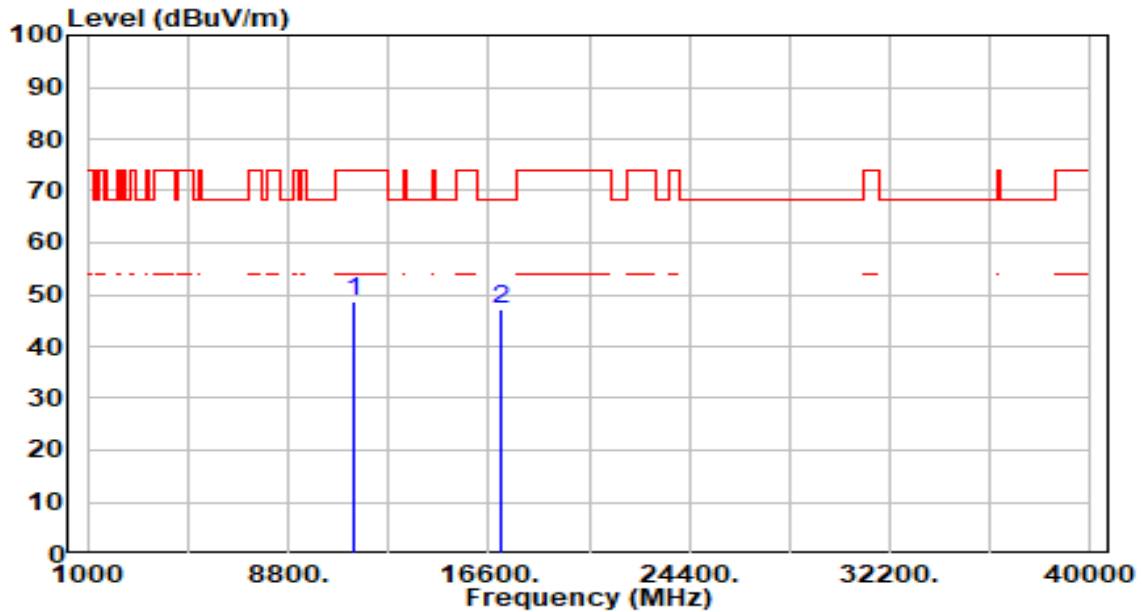


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	43.31	5.22	48.53	-25.47	74.00	100	21	Peak
2	*	17100.000	41.66	5.54	47.20	-21.00	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

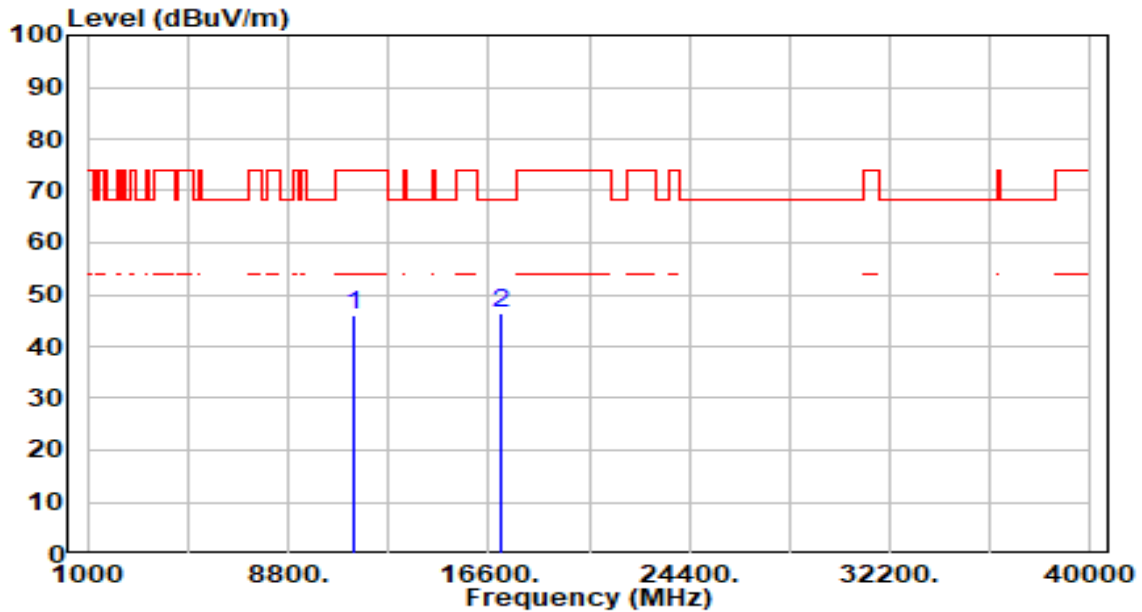


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	40.70	5.22	45.91	-28.09	74.00	300	4	Peak
2	*	17100.000	40.99	5.54	46.54	-21.66	68.20	300	39	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

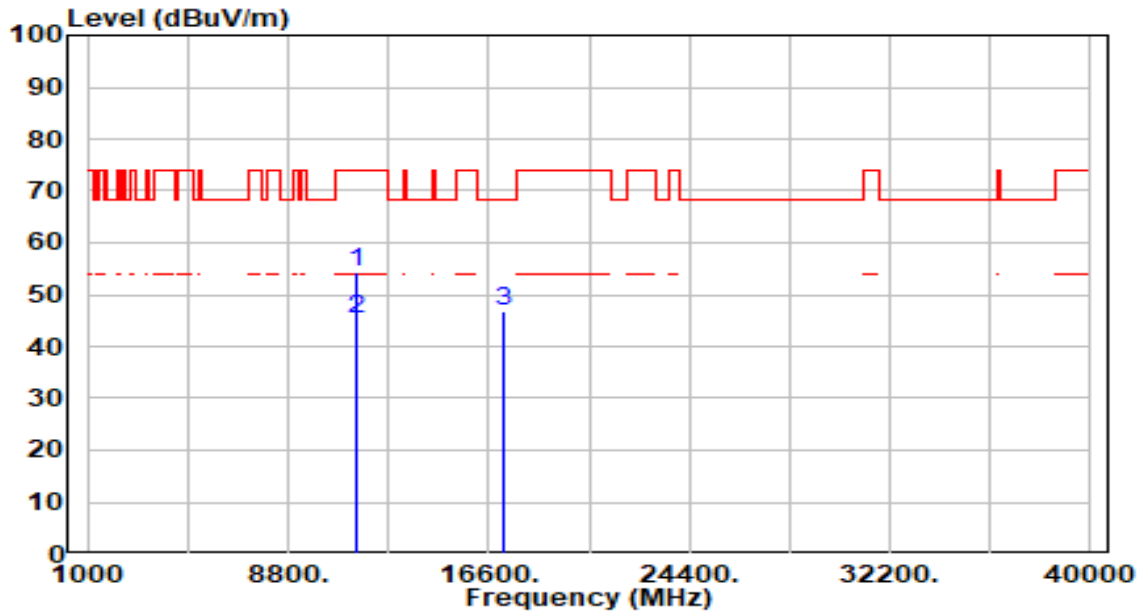


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11440.000	49.19	5.24	54.43	-19.57	74.00	100	20	Peak
2	*	11440.000	40.19	5.24	45.43	-8.57	54.00	100	20	Average
3		17160.000	41.33	5.41	46.74	-21.46	68.20	100	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

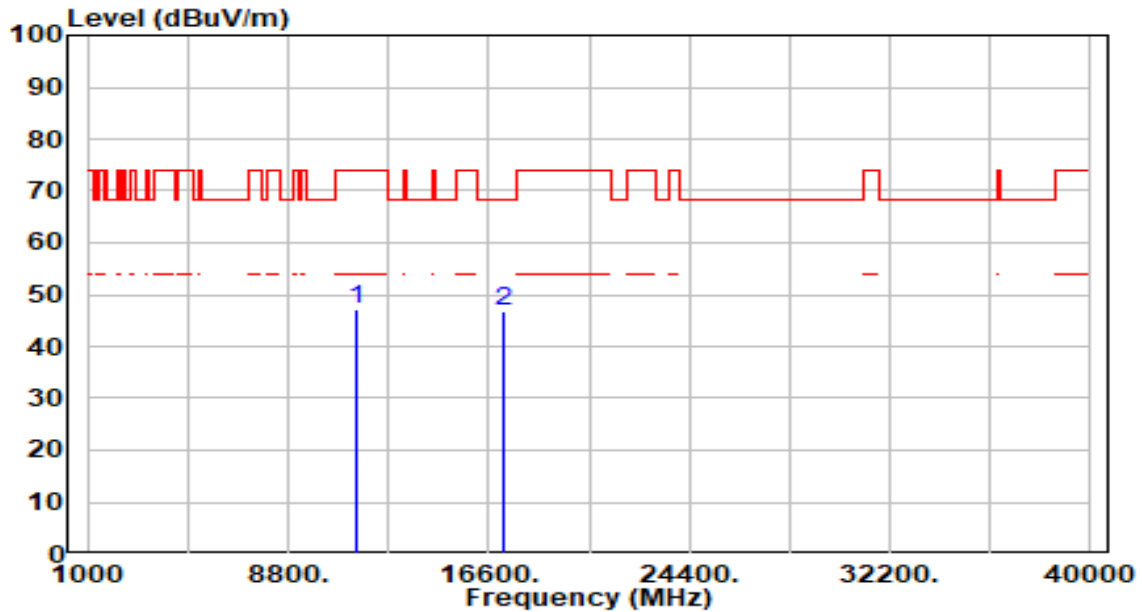


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.94	5.24	47.18	-26.82	74.00	300	347	Peak
2	*	17160.000	41.36	5.41	46.78	-21.42	68.20	300	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

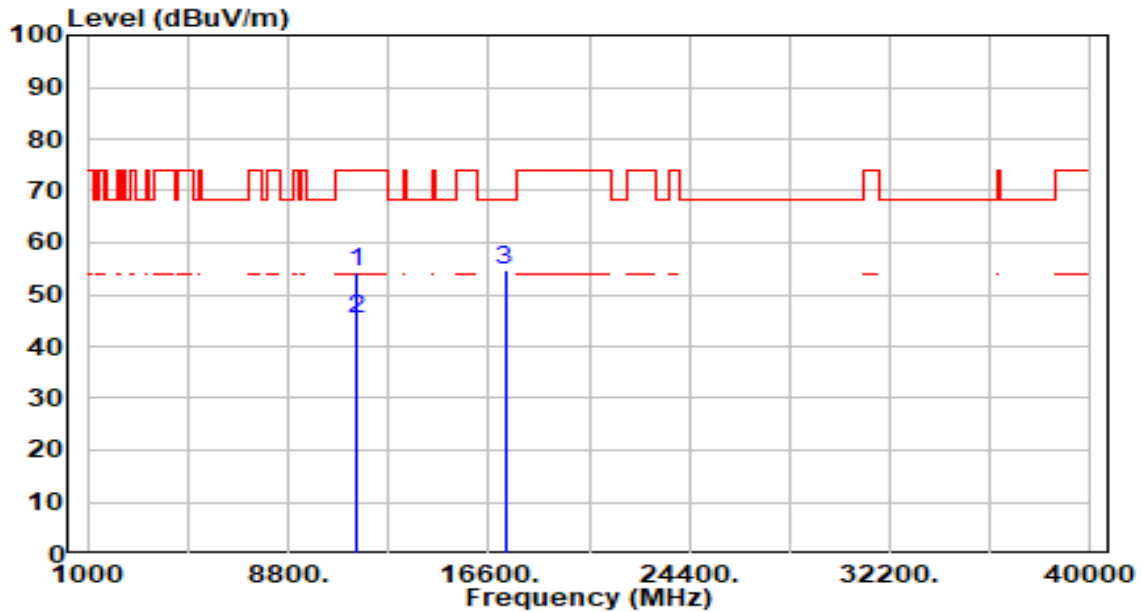


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	49.16	5.28	54.44	-19.56	74.00	100	316	Peak
2	*	11490.000	40.16	5.28	45.44	-8.56	54.00	100	316	Average
3	*	17235.000	49.42	5.25	54.67	-13.53	68.20	100	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

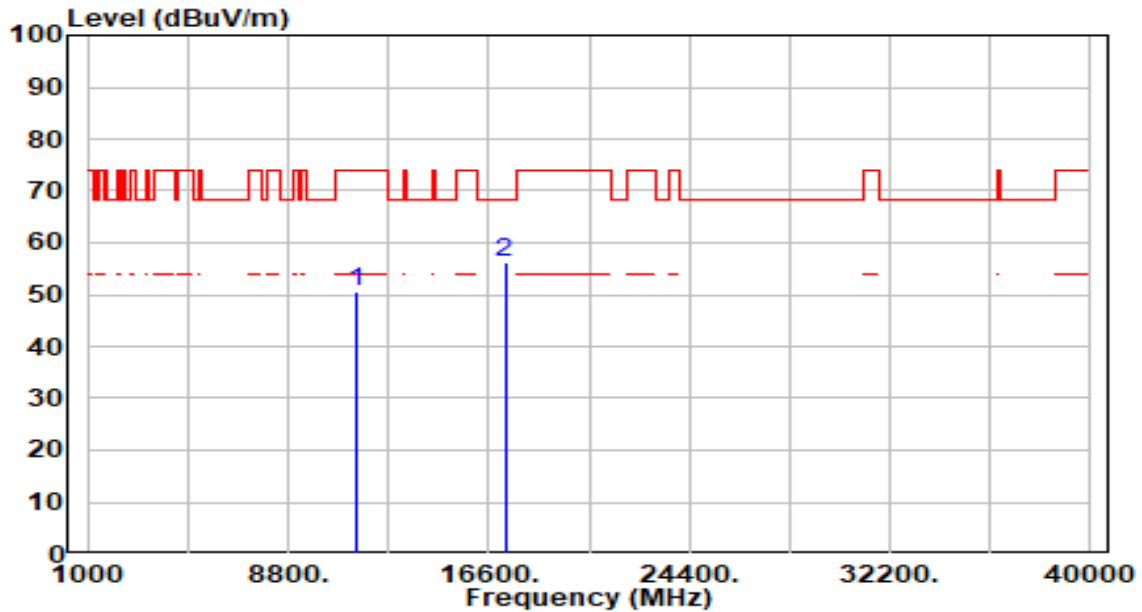


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	45.25	5.28	50.53	-23.47	74.00	300	14	Peak
2	*	17235.000	51.11	5.25	56.36	-11.84	68.20	300	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

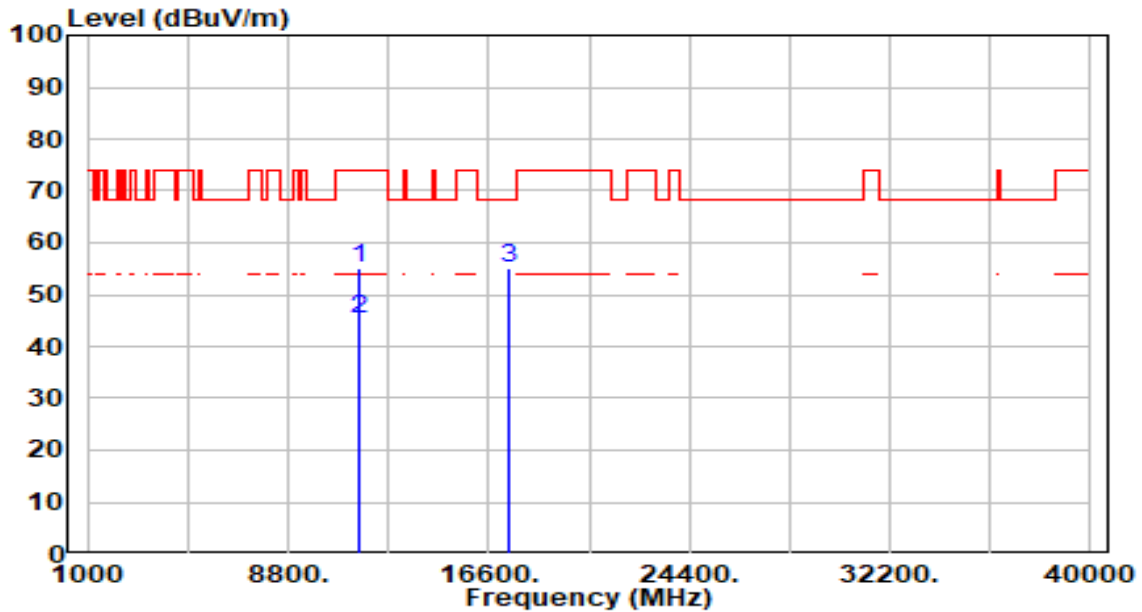


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	49.93	5.35	55.28	-18.72	74.00	100	16	Peak
2	*	11570.000	39.93	5.35	45.28	-8.72	54.00	100	16	Average
3	*	17355.000	50.04	4.99	55.03	-13.17	68.20	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

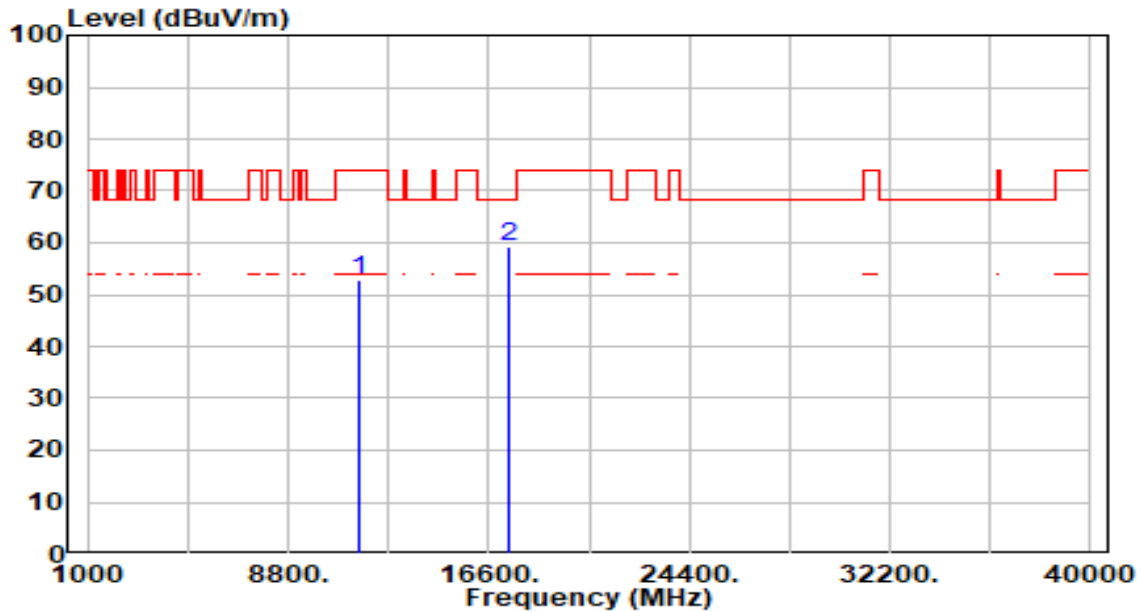


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	47.56	5.35	52.90	-21.10	74.00	300	4	Peak
2	*	17355.000	54.42	4.99	59.41	-8.79	68.20	300	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

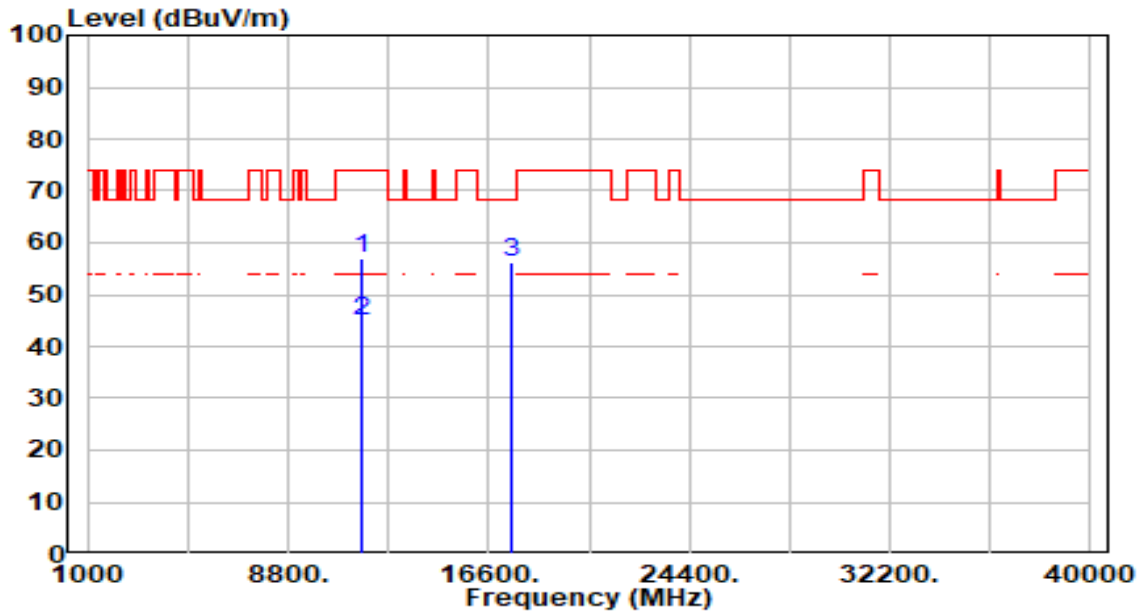


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	51.71	5.37	57.08	-16.92	74.00	100	316	Peak
2	*	11650.000	39.48	5.37	44.85	-9.15	54.00	100	316	Average
3	*	17475.000	51.28	5.02	56.31	-11.89	68.20	300	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

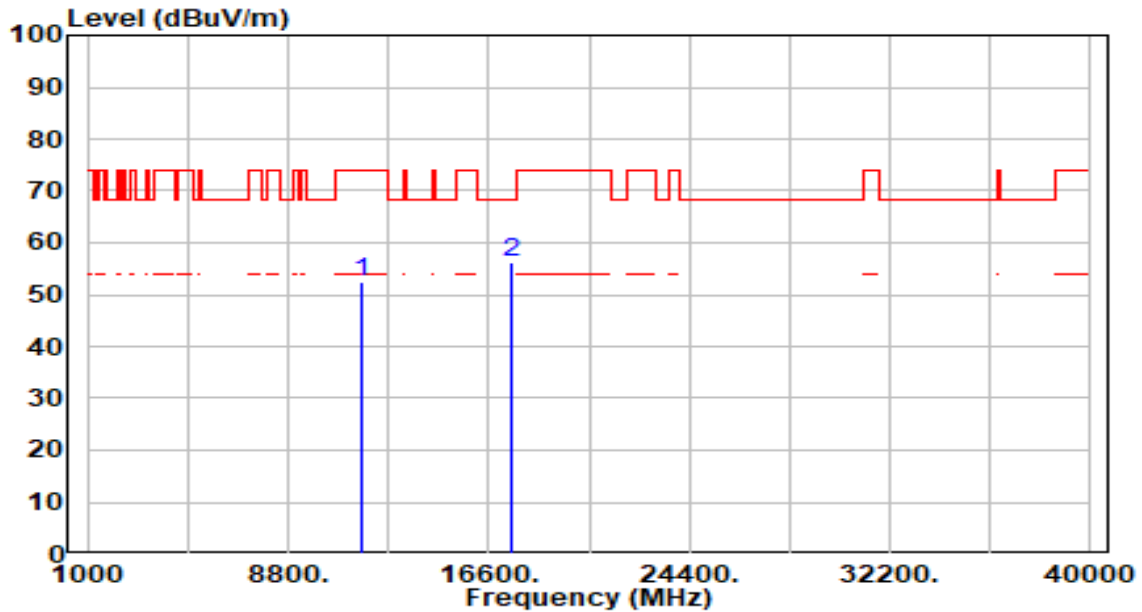


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	47.19	5.37	52.57	-21.43	74.00	300	360	Peak
2	* 17475.000	51.29	5.02	56.31	-11.89	68.20	300	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

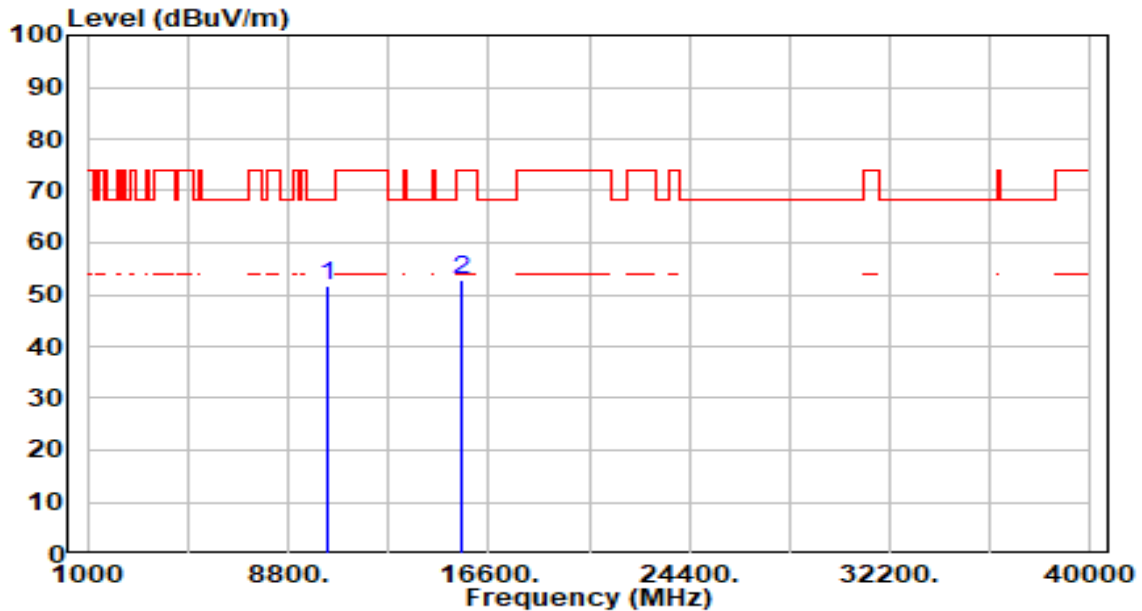


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	46.78	4.81	51.60	-16.60	68.20	100	296	Peak
2		15540.000	46.66	6.28	52.94	-21.06	74.00	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

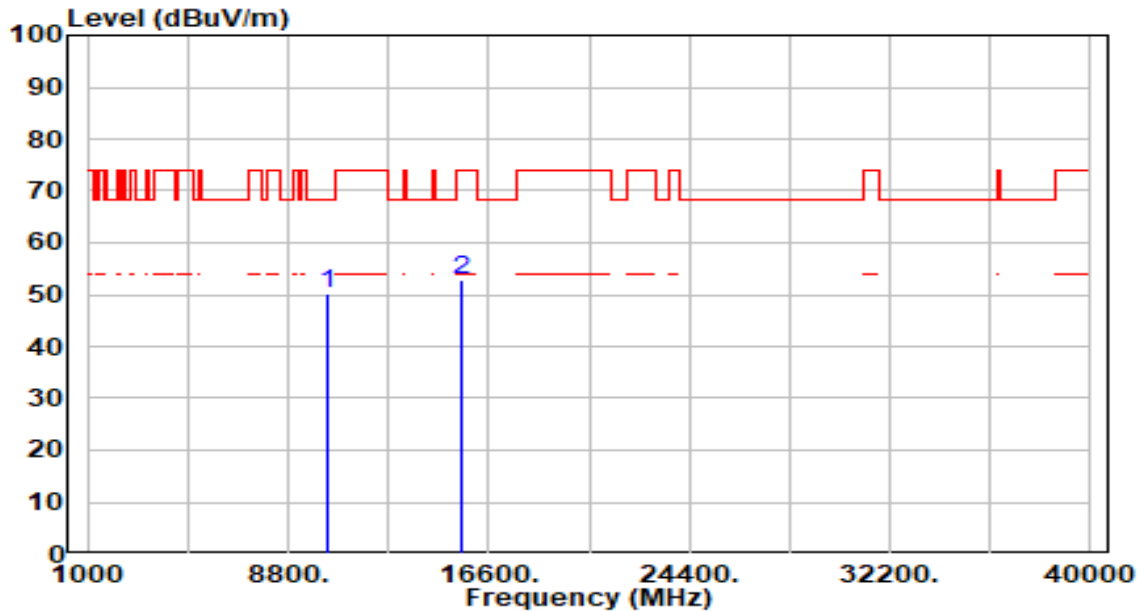


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	45.35	4.81	50.16	-18.04	68.20	300	361	Peak
2		15540.000	46.50	6.28	52.78	-21.22	74.00	300	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

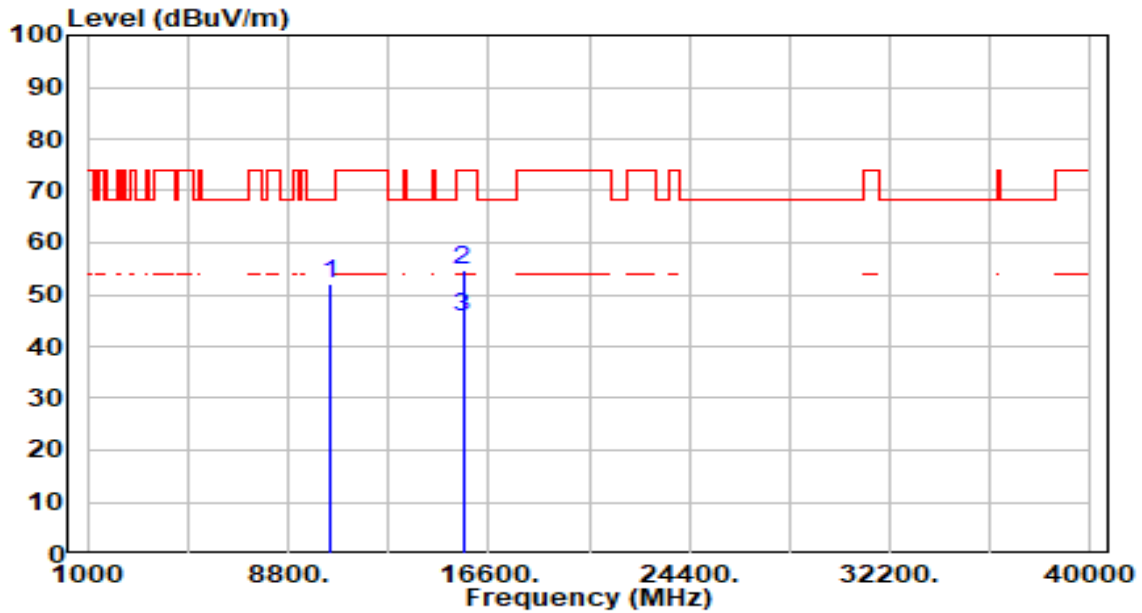


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	47.43	4.77	52.20	-16.00	68.20	100	297	Peak
2		15600.000	48.50	6.19	54.70	-19.30	74.00	100	134	Peak
3	*	15600.000	39.50	6.19	45.70	-8.30	54.00	100	134	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

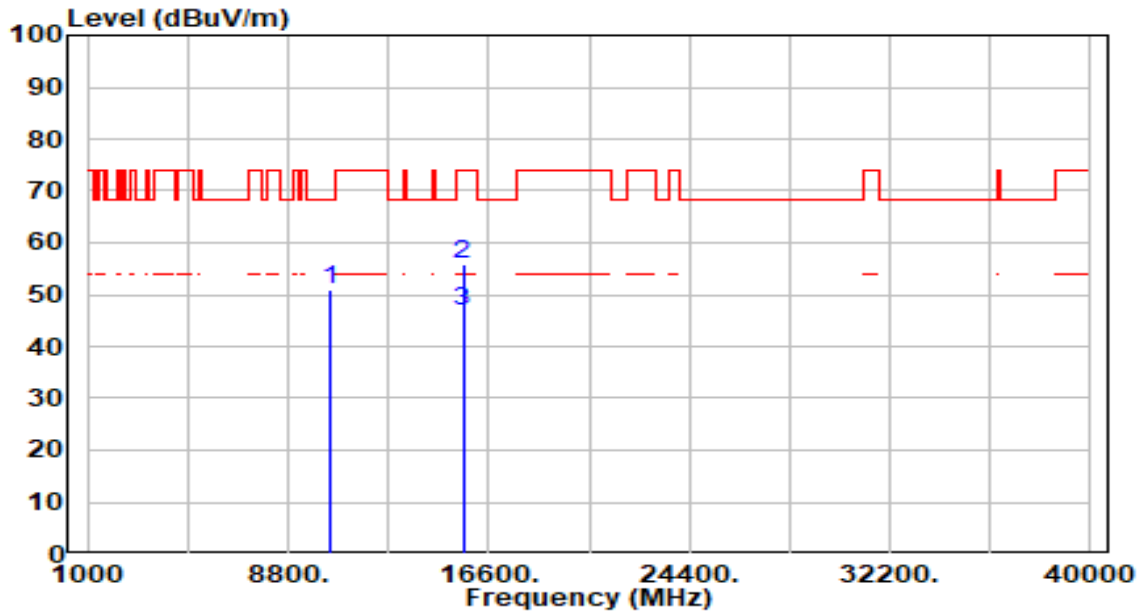


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	46.22	4.77	51.00	-17.20	68.20	300	343	Peak
2		15600.000	49.77	6.19	55.96	-18.04	74.00	300	322	Peak
3	*	15600.000	40.77	6.19	46.96	-7.04	54.00	300	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

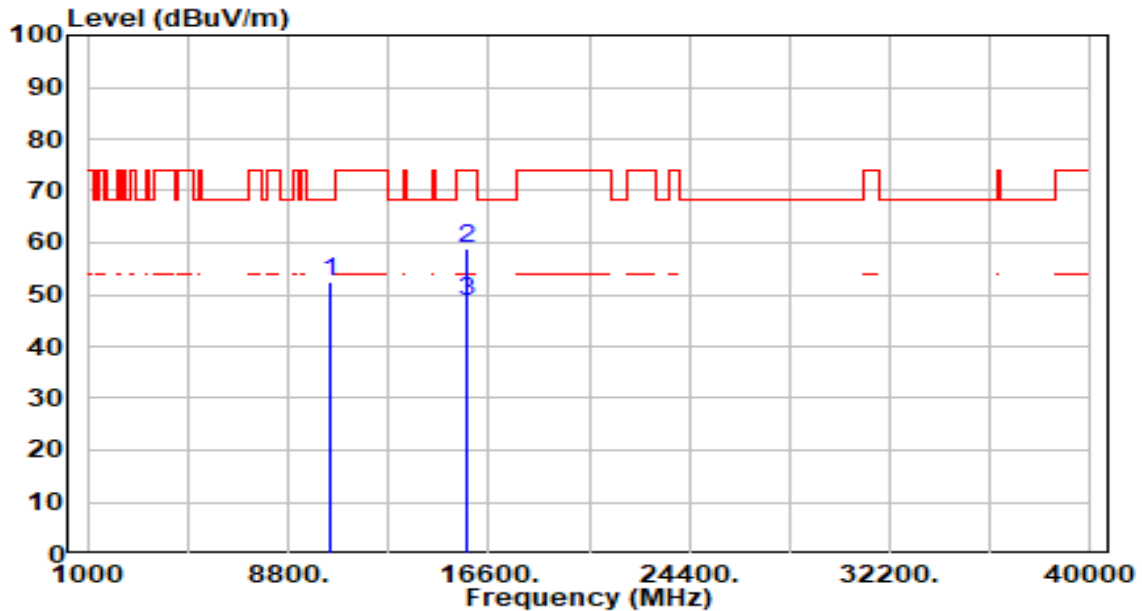


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10480.000	47.86	4.65	52.52	-15.68	68.20	100	68	Peak
2	*	15720.000	52.33	6.43	58.76	-15.24	74.00	100	68	Peak
3	*	15720.000	42.33	6.43	48.76	-5.24	54.00	100	68	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

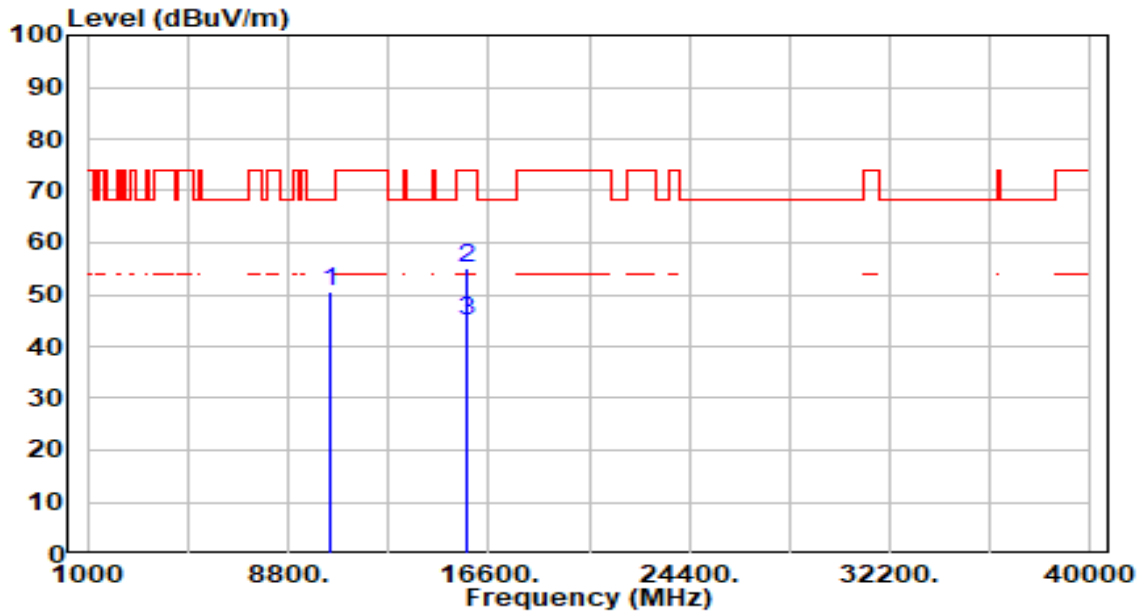


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	45.74	4.65	50.39	-17.81	68.20	300	0	Peak
2		15720.000	48.52	6.43	54.96	-19.04	74.00	300	312	Peak
3	*	15720.000	38.52	6.43	44.96	-9.04	54.00	300	312	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

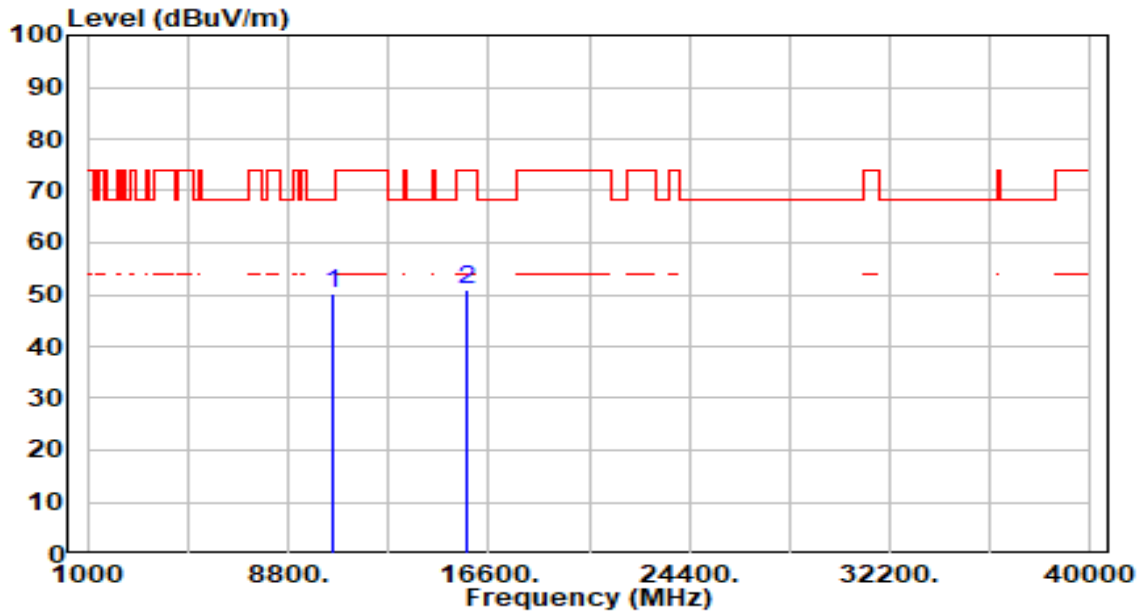


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	45.63	4.61	50.24	-17.96	68.20	100	96	Peak
2		15780.000	44.40	6.55	50.96	-23.04	74.00	100	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

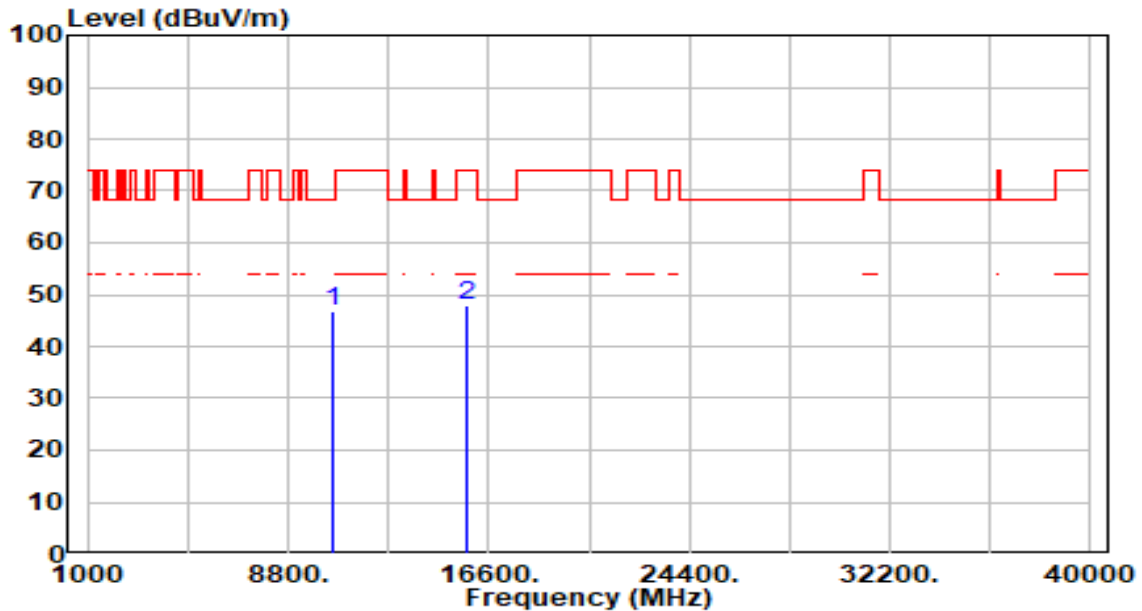


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.12	4.61	46.73	-21.47	68.20	300	355	Peak
2		15780.000	41.34	6.55	47.89	-26.11	74.00	300	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

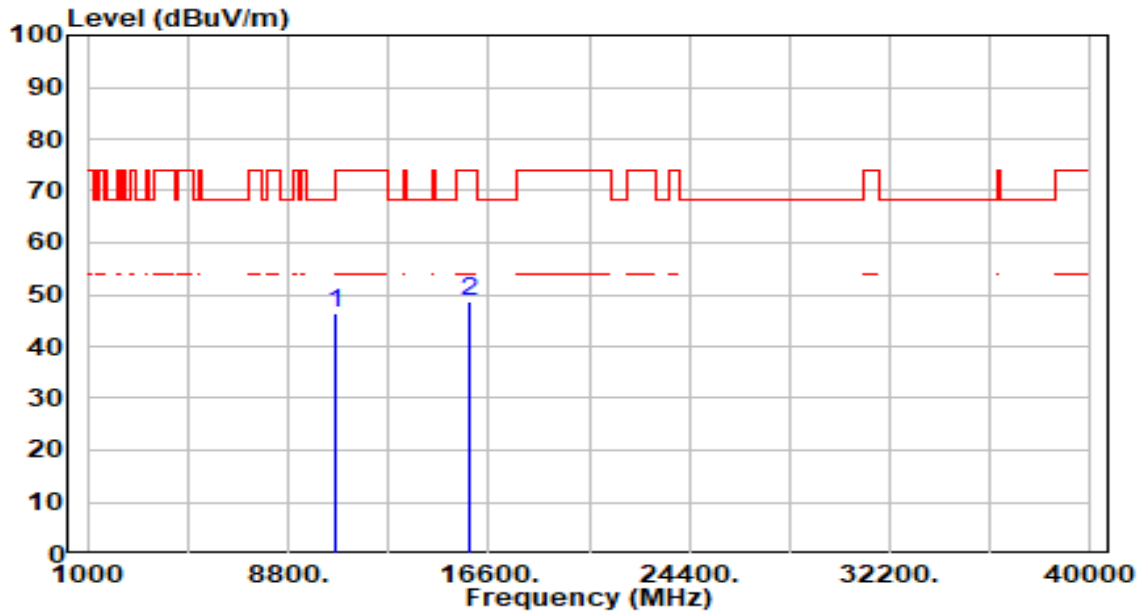


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.89	4.55	46.44	-21.76	68.20	100	79	Peak
2		15900.000	41.90	6.64	48.54	-25.46	74.00	100	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

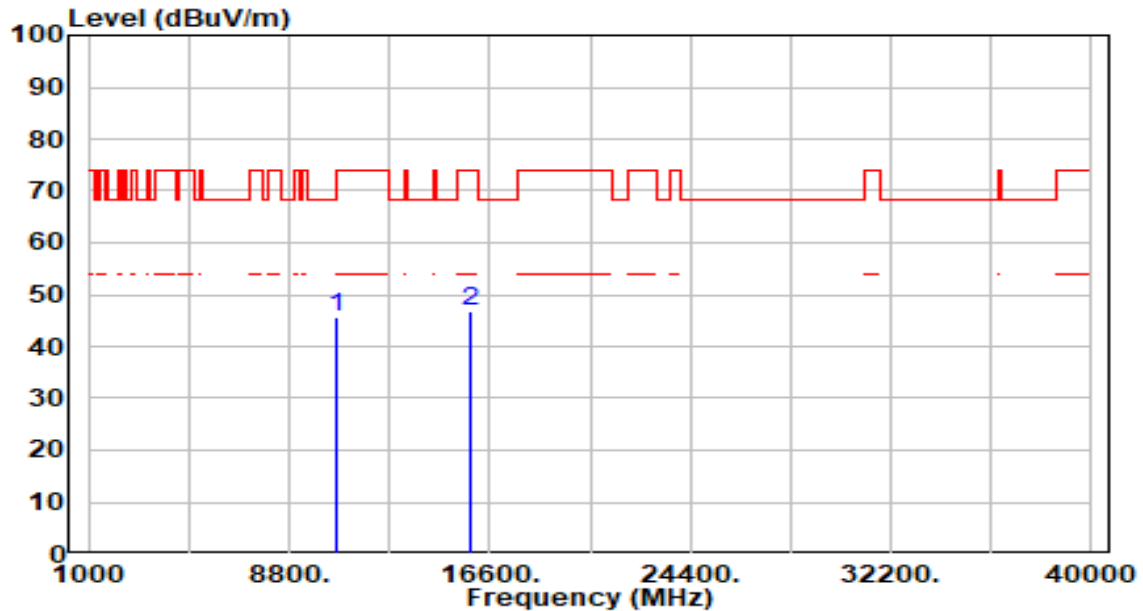


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.27	4.55	45.82	-22.38	68.20	300	12	Peak
2		15900.000	40.07	6.64	46.71	-27.29	74.00	300	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

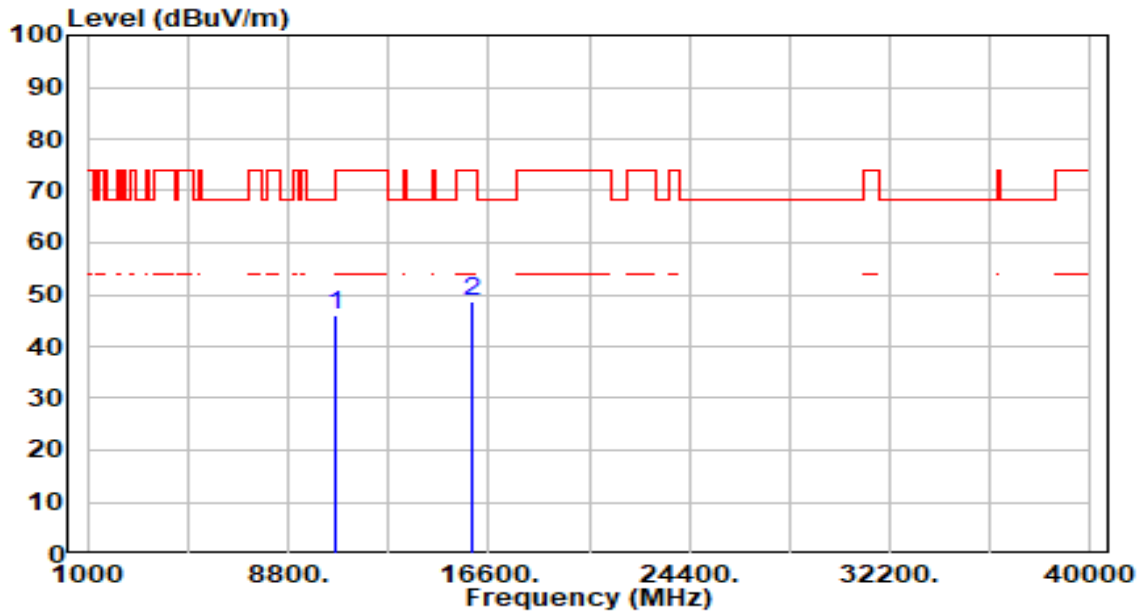


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.57	4.58	46.15	-27.85	74.00	100	103	Peak
2	*	15960.000	42.07	6.67	48.74	-25.26	74.00	100	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

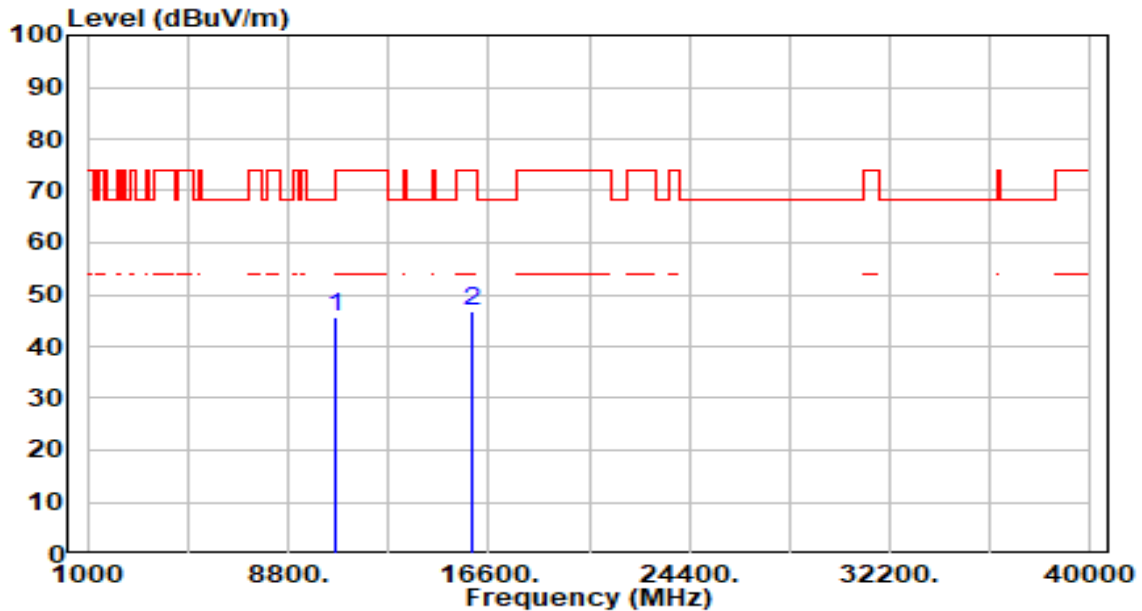


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.18	4.58	45.76	-28.24	74.00	300	0	Peak
2	* 15960.000	40.05	6.67	46.72	-27.28	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

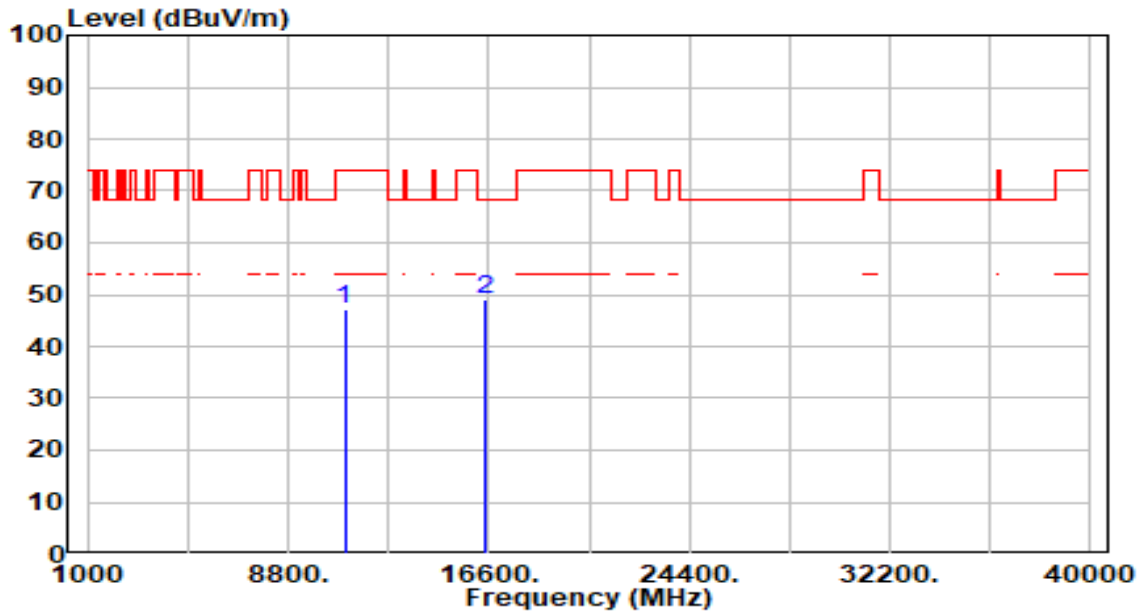


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.74	4.44	47.18	-26.82	74.00	100	150	Peak
2	*	16500.000	42.86	6.07	48.93	-19.27	68.20	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

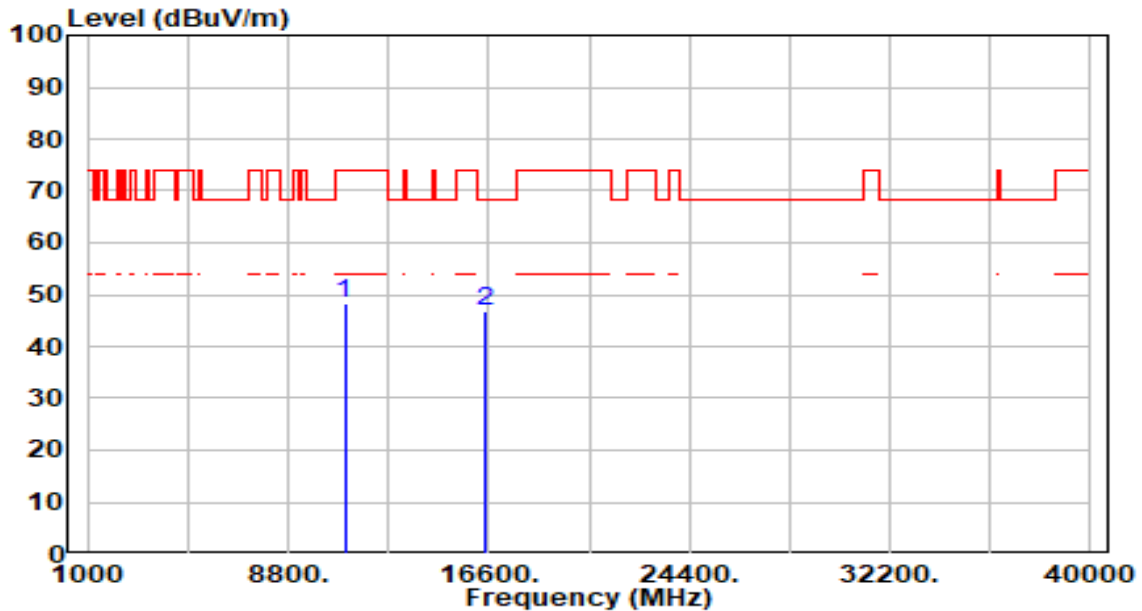


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	44.01	4.44	48.45	-25.55	74.00	300	360	Peak
2	*	16500.000	40.62	6.07	46.69	-21.51	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

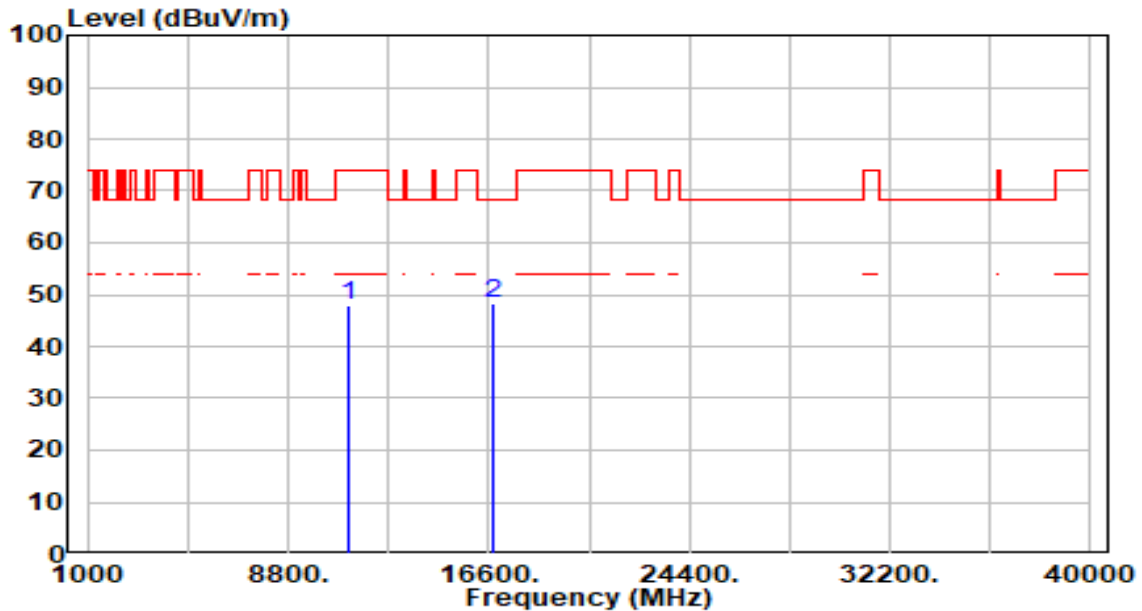


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.92	4.87	47.79	-26.21	74.00	100	256	Peak
2	* 16740.000	42.47	6.01	48.48	-19.72	68.20	100	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

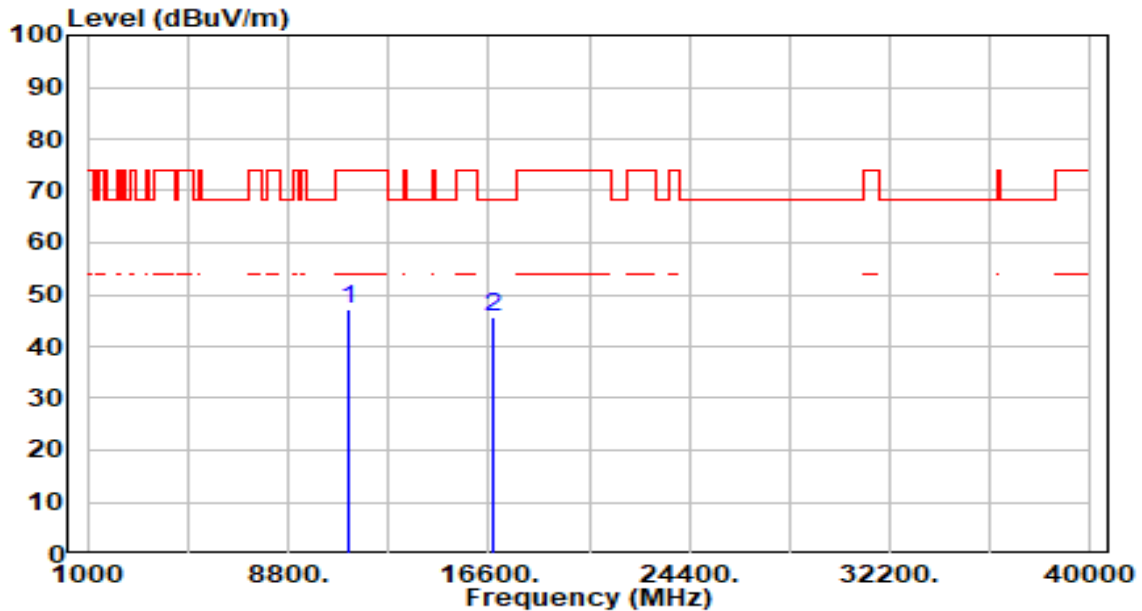


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.14	4.87	47.01	-26.99	74.00	300	0	Peak
2	*	16740.000	39.48	6.01	45.49	-22.71	68.20	300	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

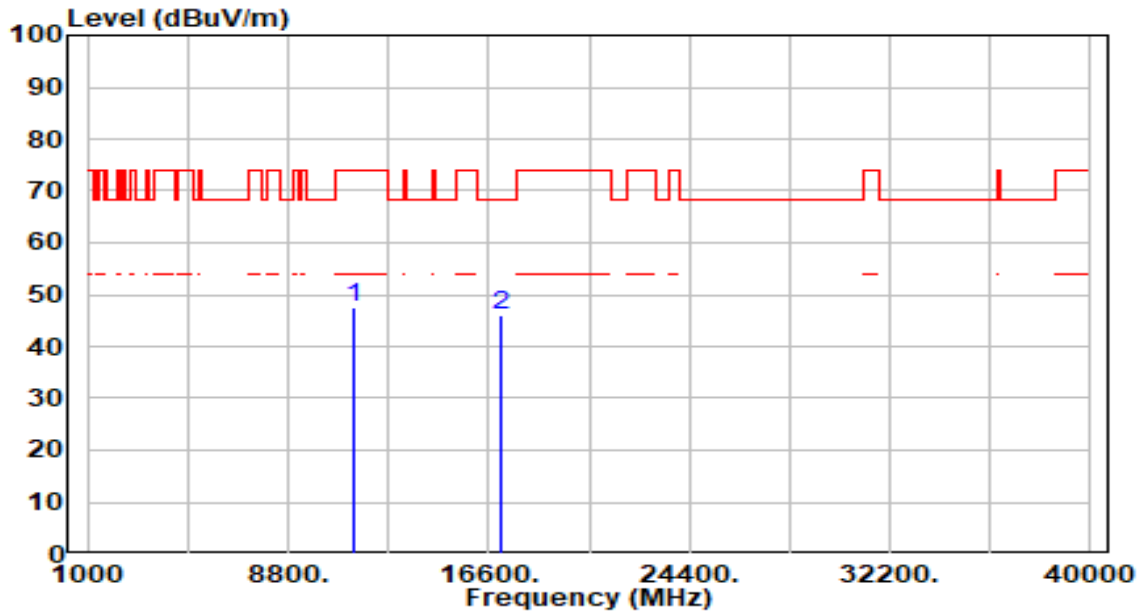


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.36	5.22	47.58	-26.42	74.00	100	135	Peak
2	*	17100.000	40.47	5.54	46.01	-22.19	68.20	100	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

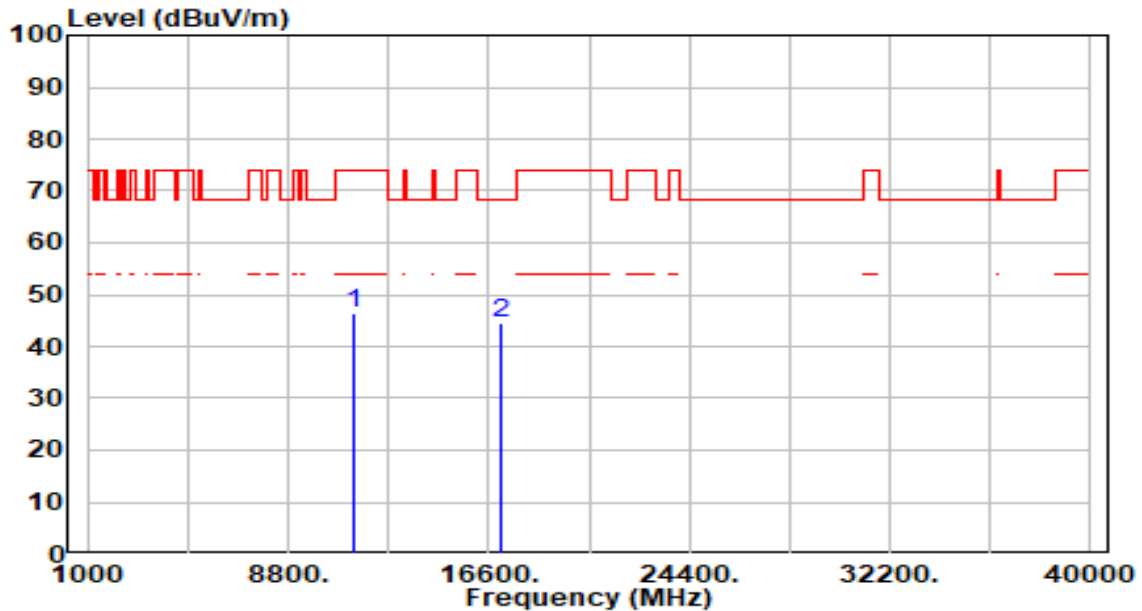


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.17	5.22	46.38	-27.62	74.00	300	202	Peak
2	*	17100.000	38.89	5.54	44.43	-23.77	68.20	300	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

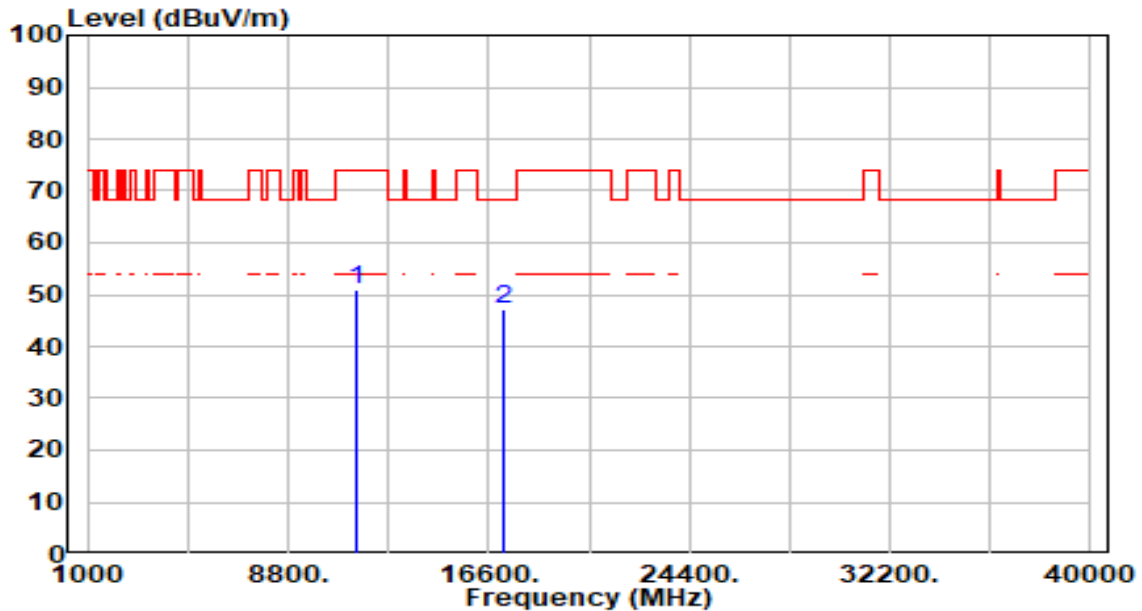


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	45.52	5.24	50.76	-23.24	74.00	100	22	Peak
2	*	17160.000	41.58	5.41	46.99	-21.21	68.20	100	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

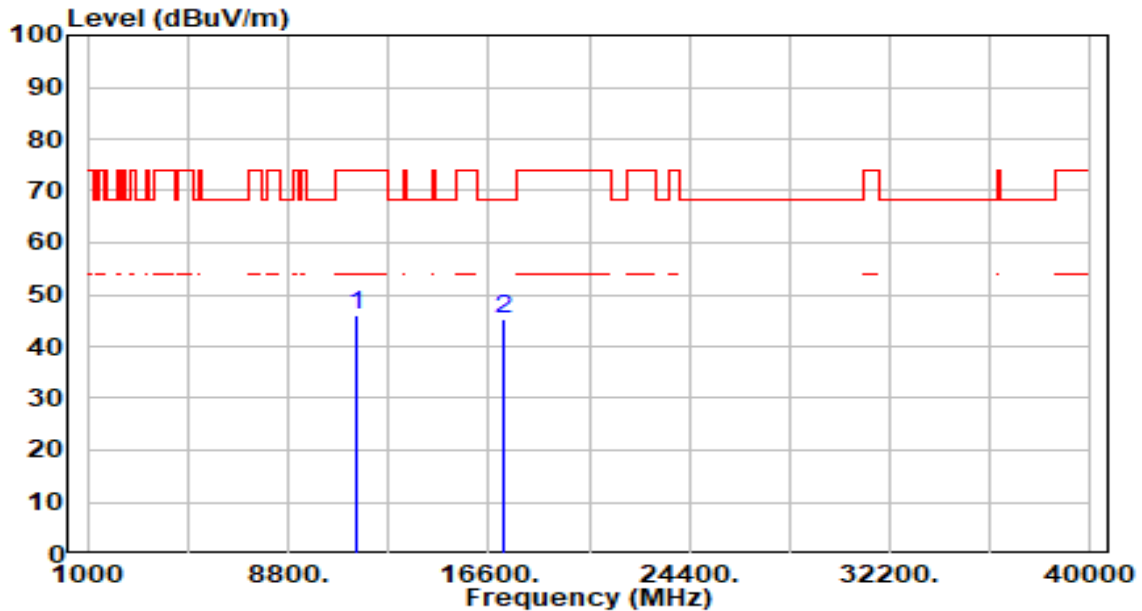


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	40.77	5.24	46.01	-27.99	74.00	300	0	Peak
2	*	17160.000	39.72	5.41	45.13	-23.07	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

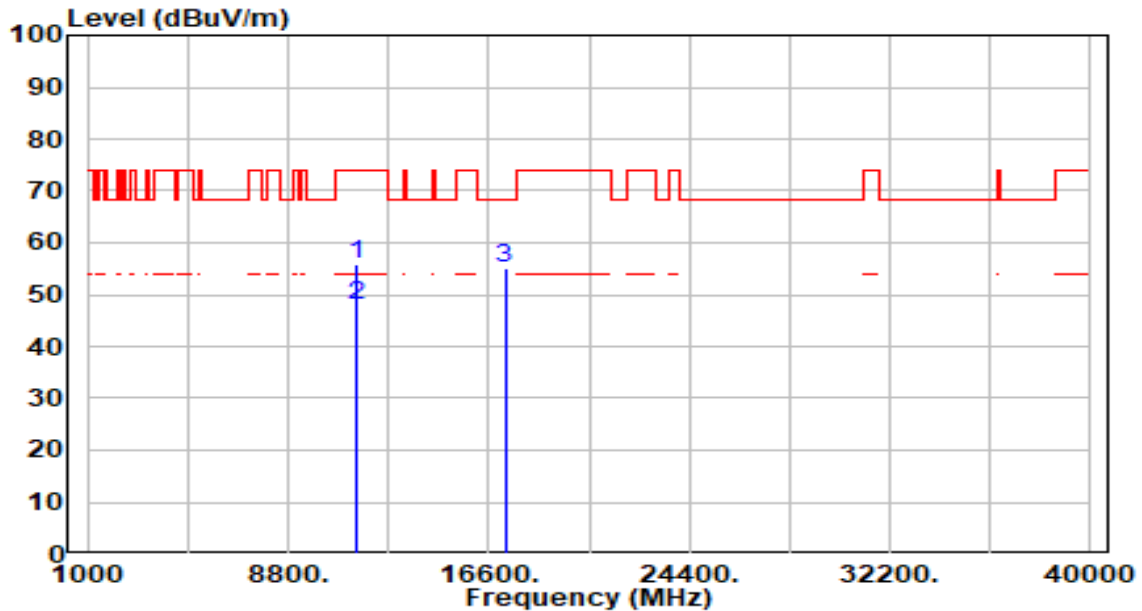


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	50.56	5.28	55.84	-18.16	74.00	100	312	Peak
2	*	11490.000	42.56	5.28	47.84	-6.16	54.00	100	312	Average
3	*	17235.000	49.97	5.25	55.21	-12.99	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

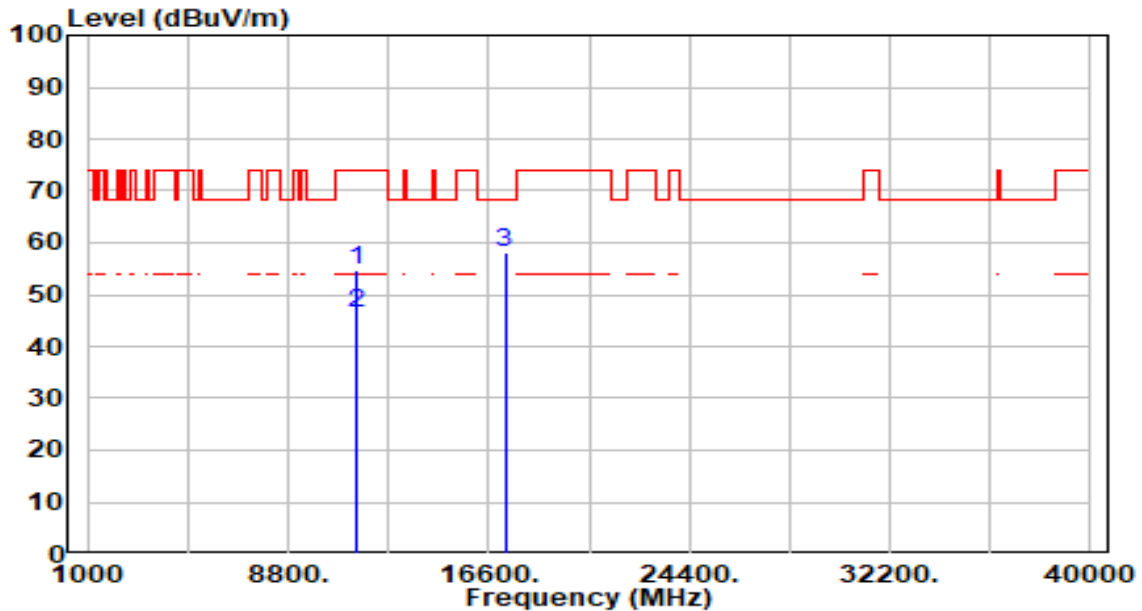


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	49.27	5.28	54.54	-19.46	74.00	300	304	Peak
2	*	11490.000	41.27	5.28	46.54	-7.46	54.00	300	304	Average
3	*	17235.000	52.86	5.25	58.10	-10.10	68.20	300	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

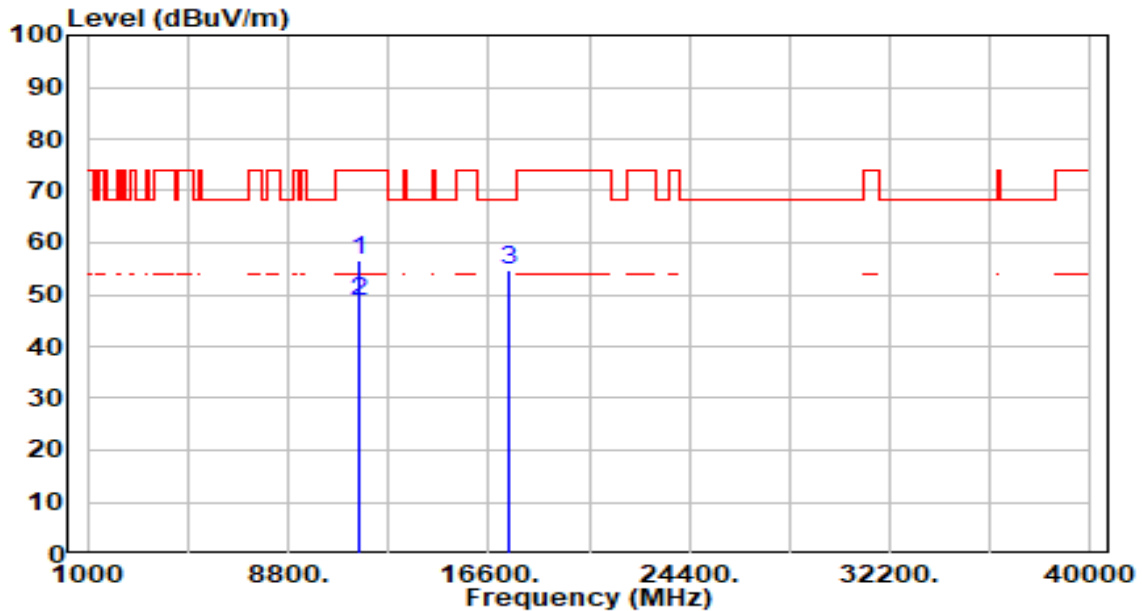


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	51.41	5.35	56.76	-17.24	74.00	100	314	Peak
2	*	11570.000	43.41	5.35	48.76	-5.24	54.00	100	314	Average
3	*	17355.000	49.60	4.99	54.58	-13.62	68.20	100	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

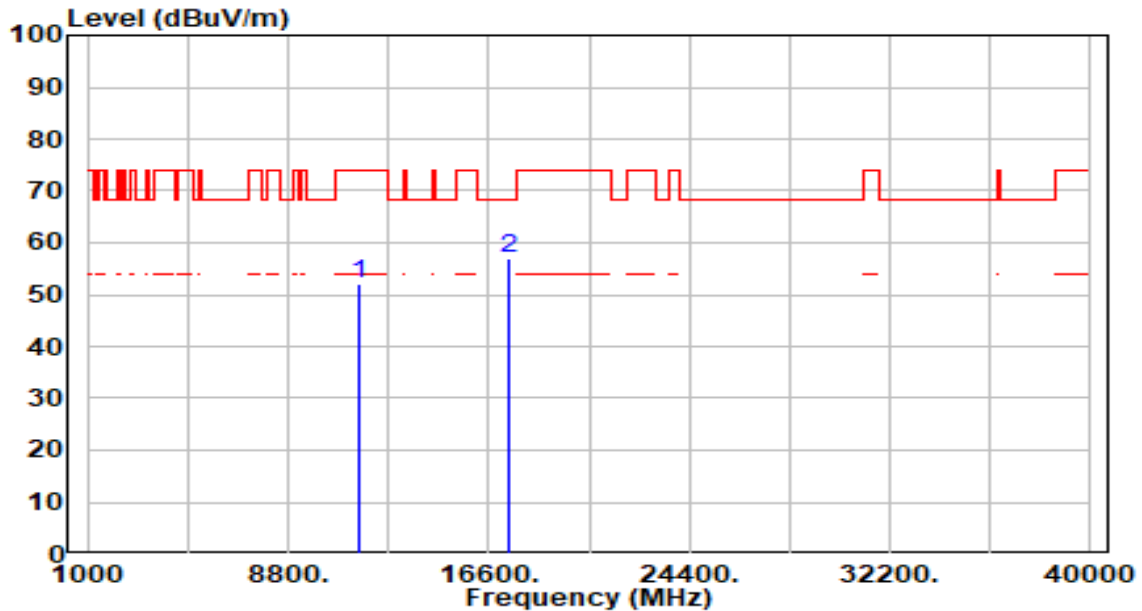


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	46.54	5.35	51.89	-22.11	74.00	300	1	Peak
2	*	17355.000	52.02	4.99	57.01	-11.19	68.20	300	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

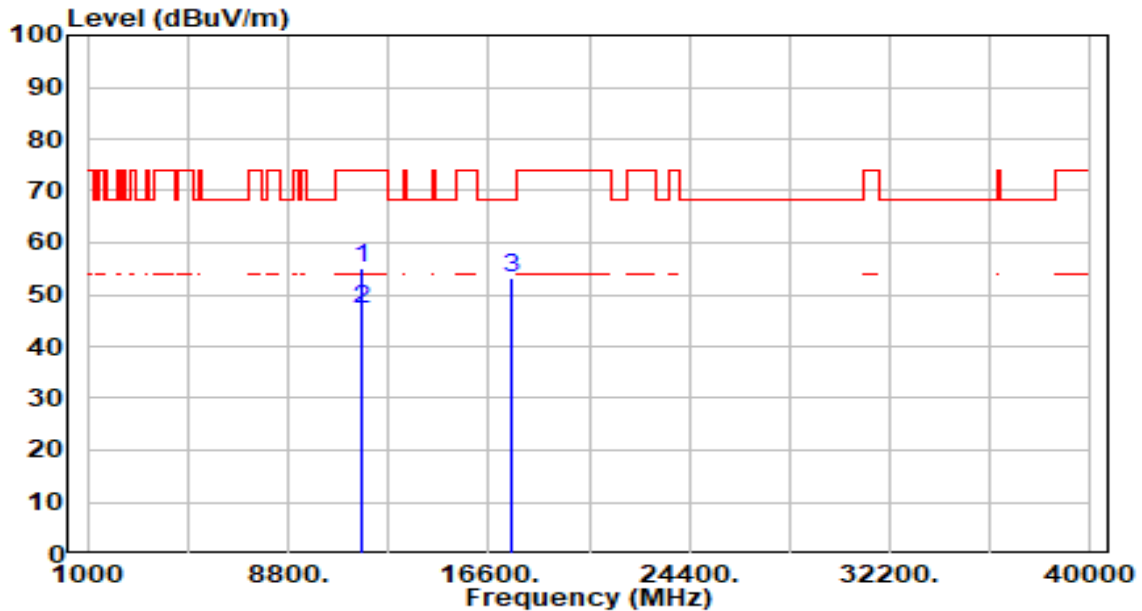


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	49.78	5.37	55.15	-18.85	74.00	100	316	Peak
2	*	11650.000	41.78	5.37	47.15	-6.85	54.00	100	316	Average
3	*	17475.000	48.09	5.02	53.11	-15.09	68.20	100	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

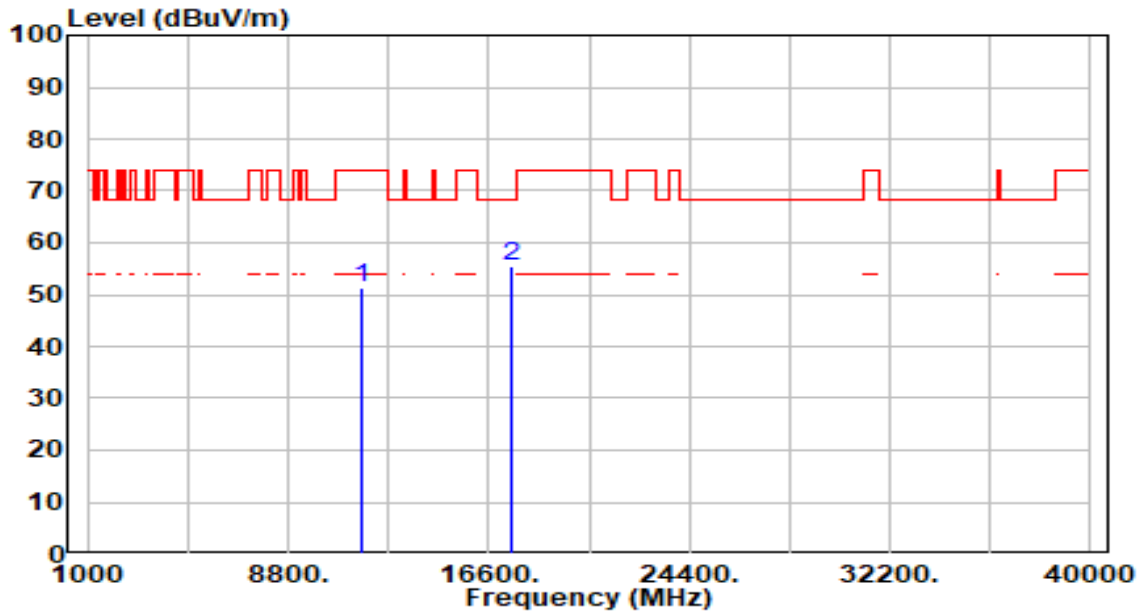


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.79	5.37	51.16	-22.84	74.00	300	0	Peak
2	* 17475.000	50.30	5.02	55.32	-12.88	68.20	300	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

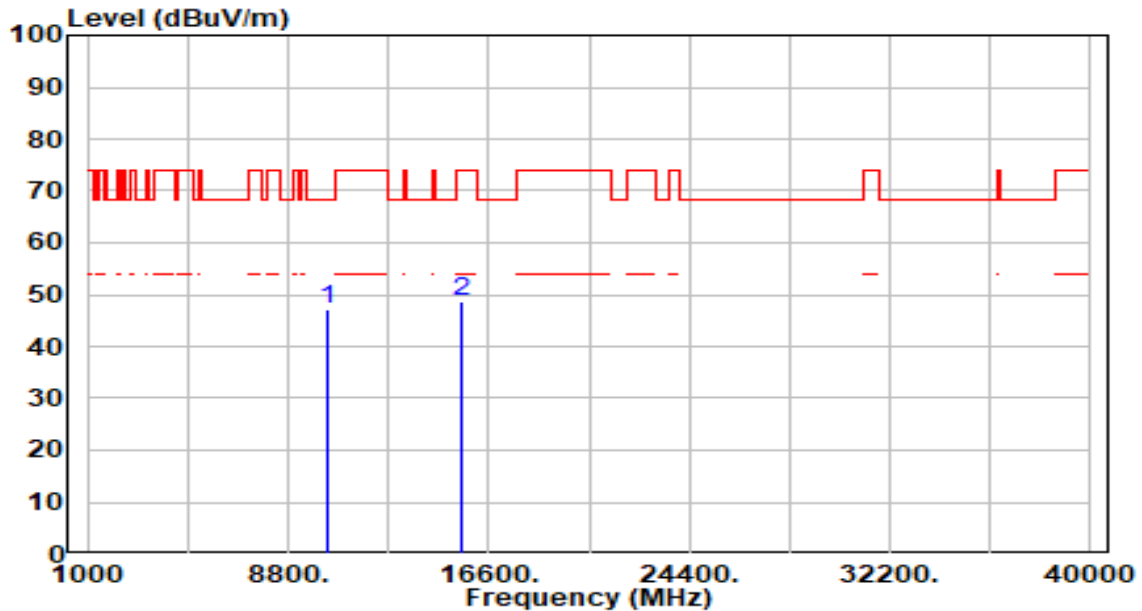


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	42.50	4.79	47.29	-20.91	68.20	100	82	Peak
2		15570.000	42.59	6.24	48.83	-25.17	74.00	100	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

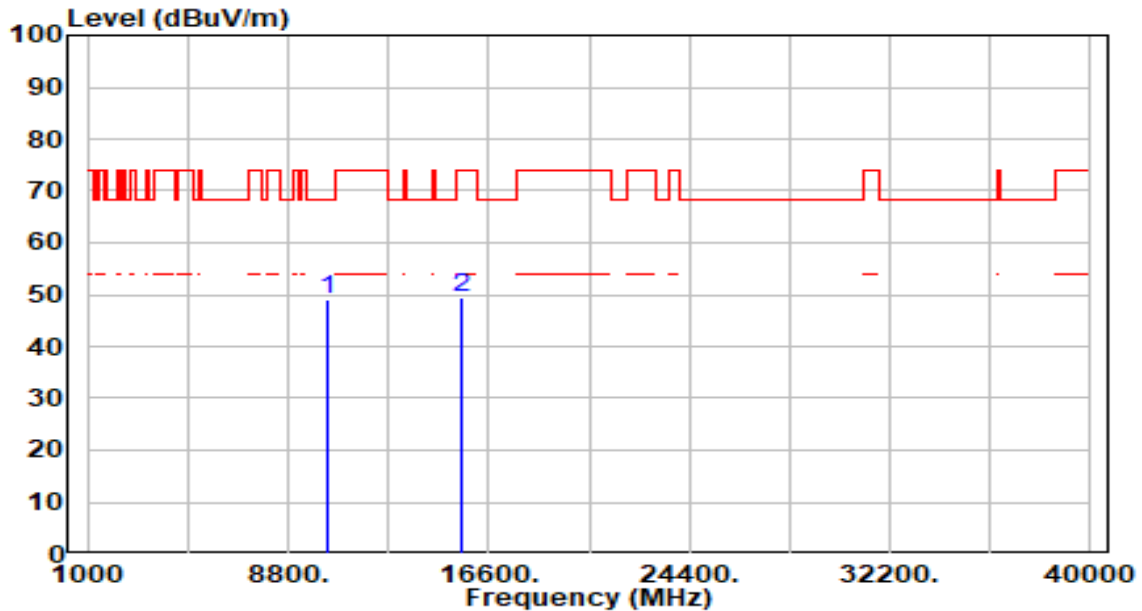


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	44.09	4.79	48.88	-19.32	68.20	300	343	Peak
2		15570.000	43.14	6.24	49.38	-24.62	74.00	300	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

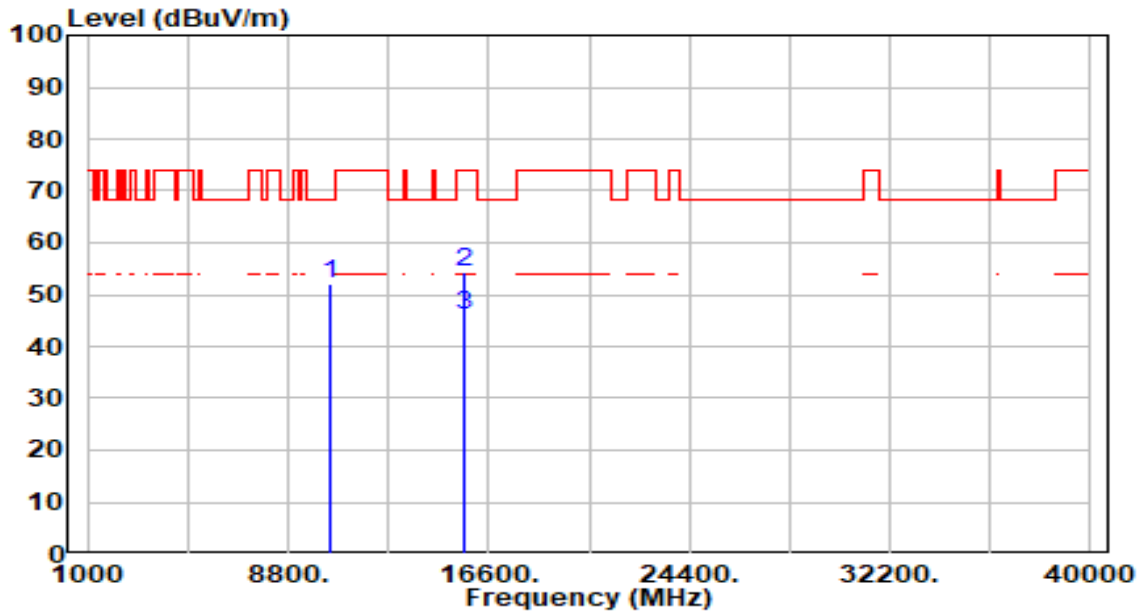


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	47.31	4.68	52.00	-16.20	68.20	100	69	Peak
2		15690.000	47.84	6.37	54.22	-19.78	74.00	100	345	Peak
3	*	15690.000	39.84	6.37	46.22	-7.78	54.00	100	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

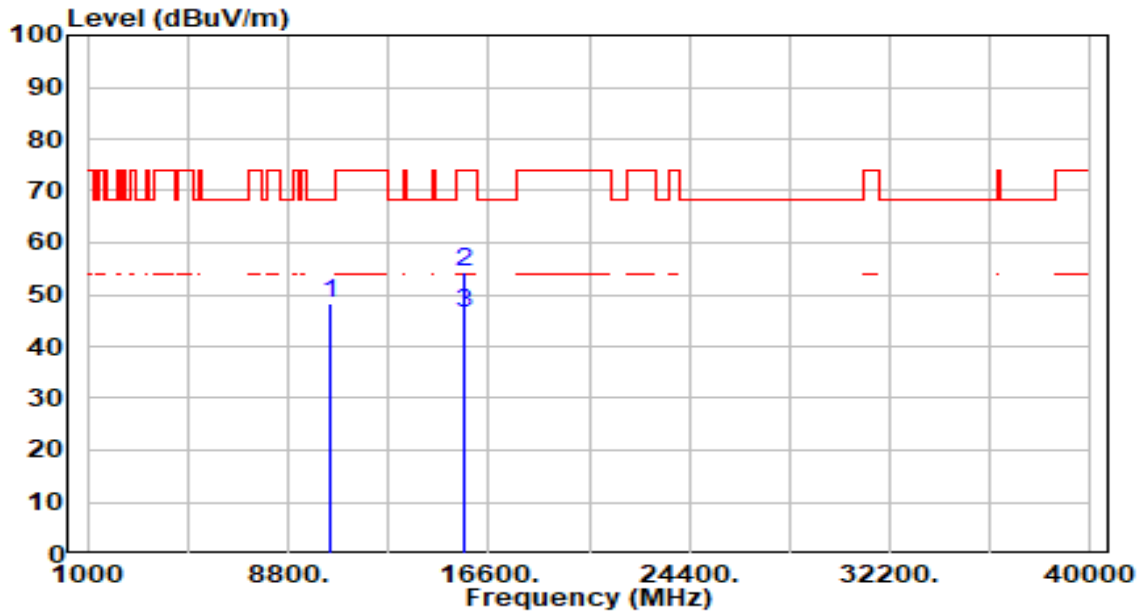


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10460.000	43.77	4.68	48.46	-19.74	68.20	300	54	Peak
2	*	15690.000	47.97	6.37	54.34	-19.66	74.00	300	10	Peak
3	*	15690.000	39.97	6.37	46.34	-7.66	54.00	300	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

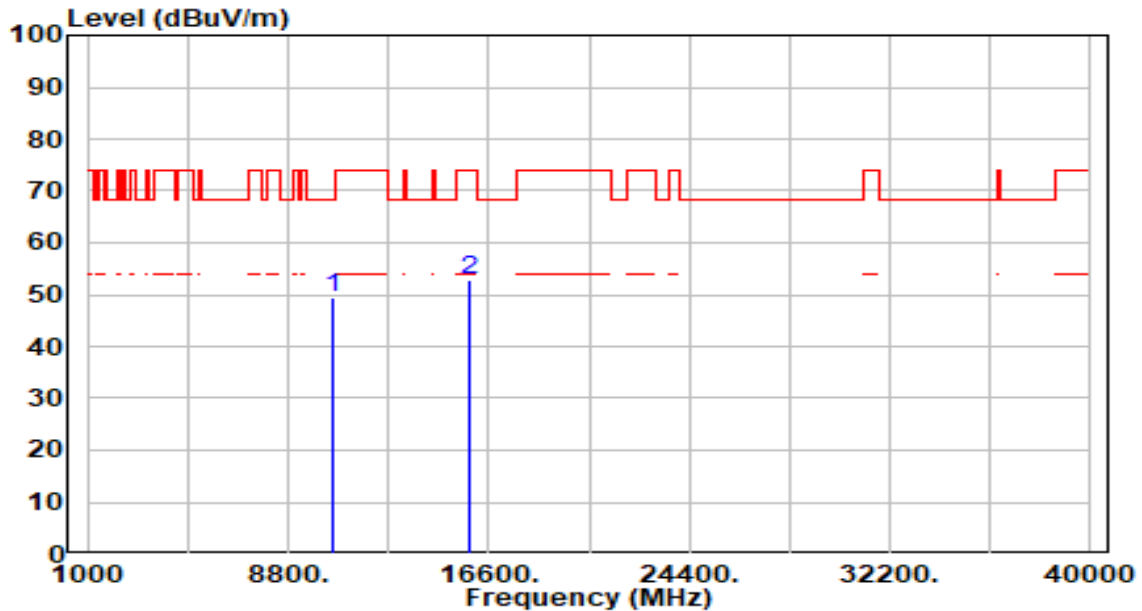


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	44.85	4.59	49.45	-18.75	68.20	100	25	Peak
2		15810.000	46.07	6.60	52.67	-21.33	74.00	100	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

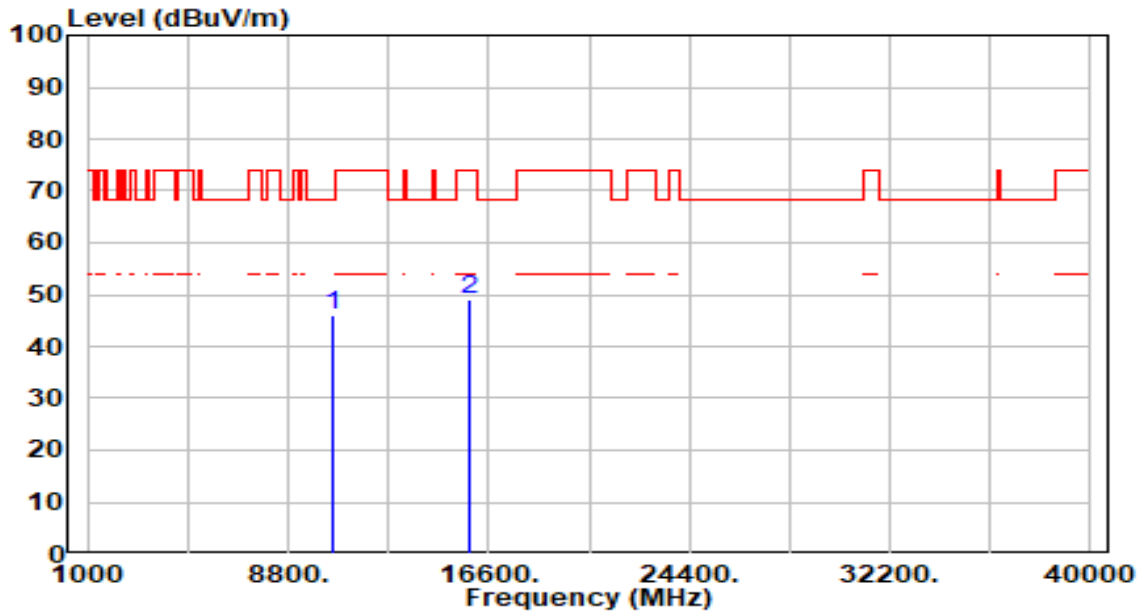


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.46	4.59	46.05	-22.15	68.20	300	359	Peak
2		15810.000	42.44	6.60	49.04	-24.96	74.00	300	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

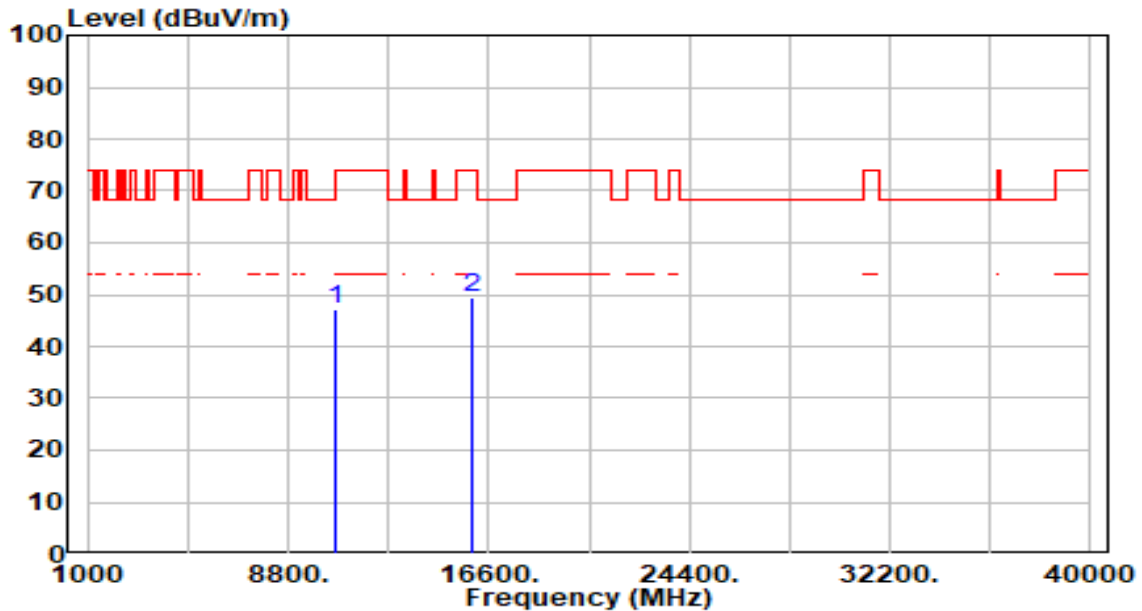


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.51	4.56	47.07	-26.93	74.00	100	291	Peak
2	* 15930.000	42.67	6.66	49.33	-24.67	74.00	100	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

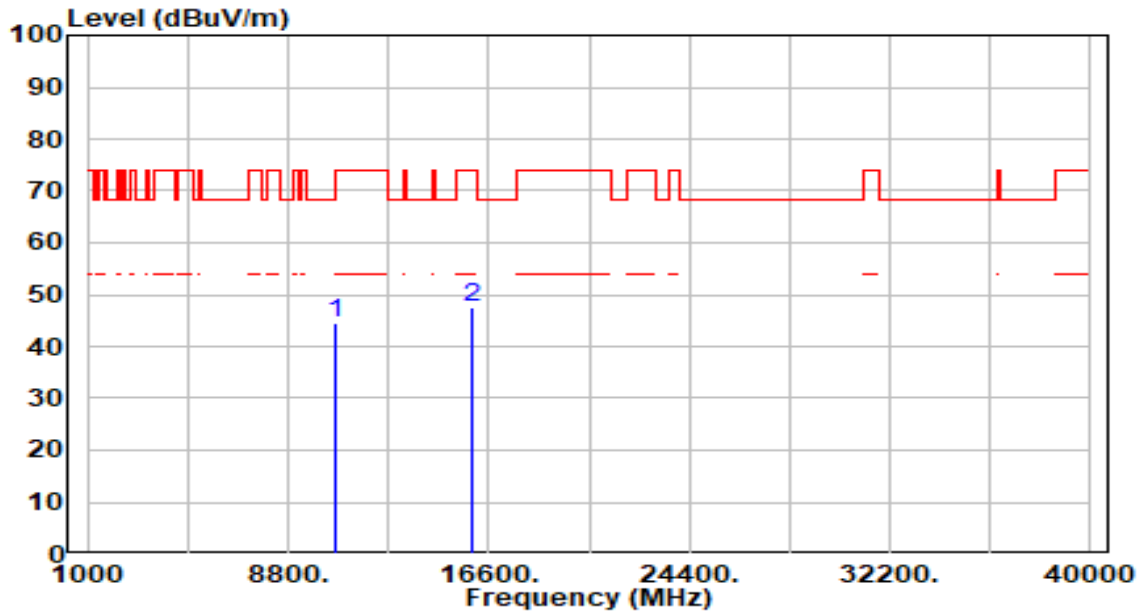


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	39.96	4.56	44.52	-29.48	74.00	300	136	Peak
2	* 15930.000	41.06	6.66	47.71	-26.29	74.00	300	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

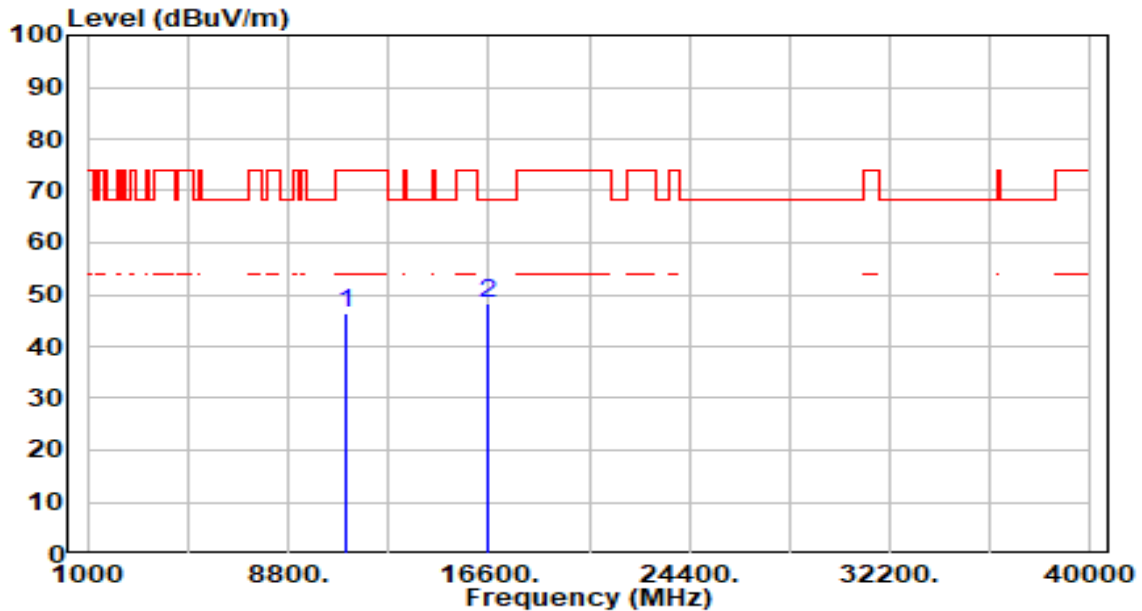


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	42.02	4.49	46.52	-27.48	74.00	100	62	Peak
2	*	16530.000	42.37	6.05	48.41	-19.79	68.20	100	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

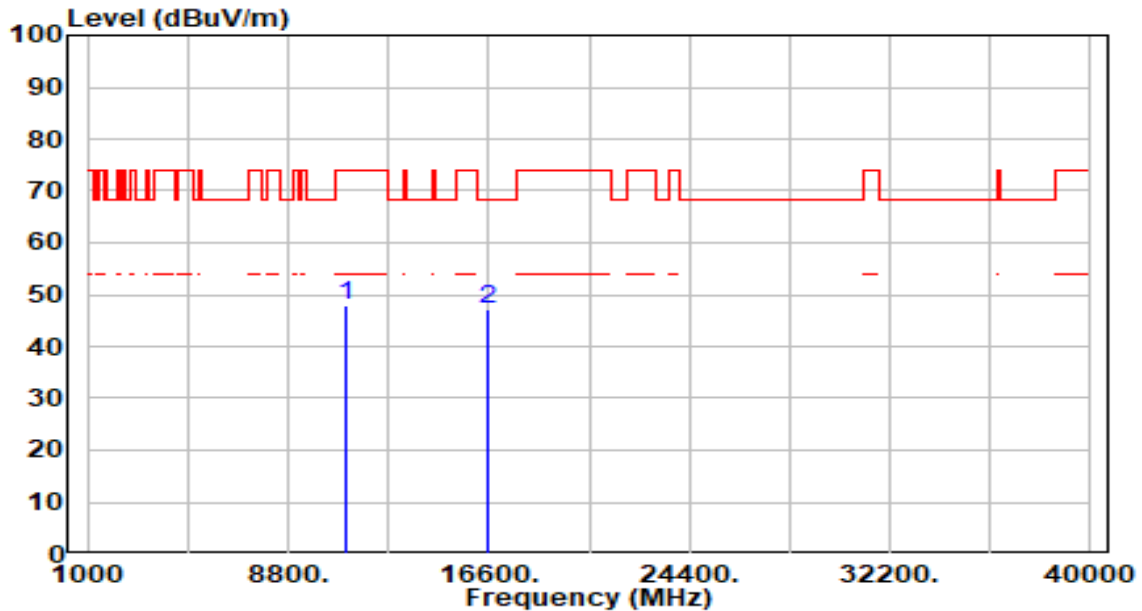


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	43.40	4.49	47.90	-26.10	74.00	300	0	Peak
2	* 16530.000	41.05	6.05	47.09	-21.11	68.20	300	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

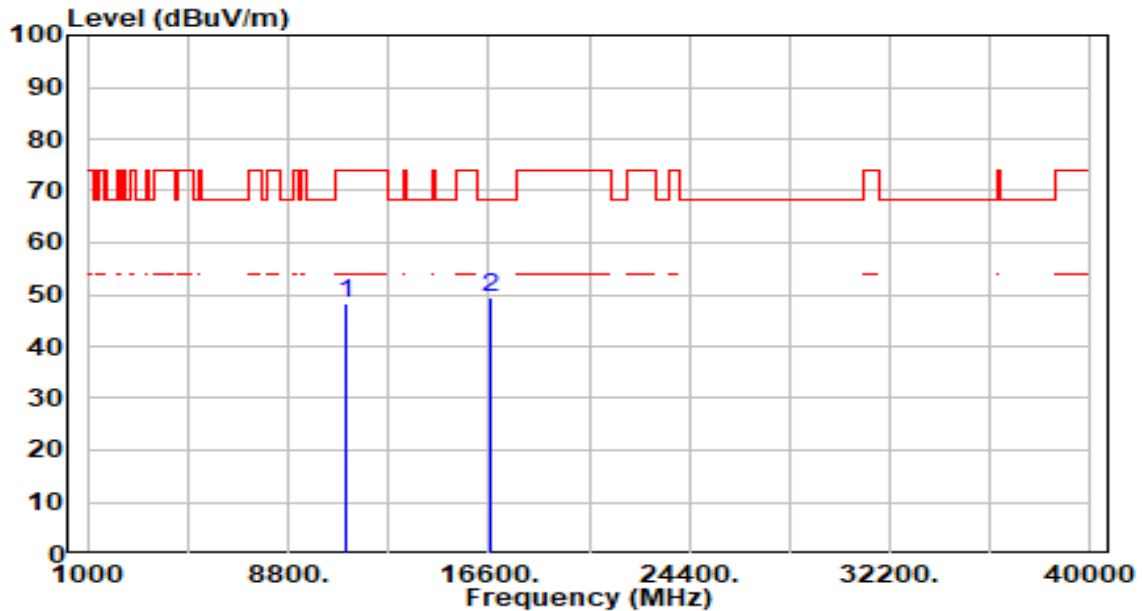


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	43.54	4.71	48.25	-25.75	74.00	100	200	Peak
2	*	16650.000	43.41	6.00	49.41	-18.79	68.20	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

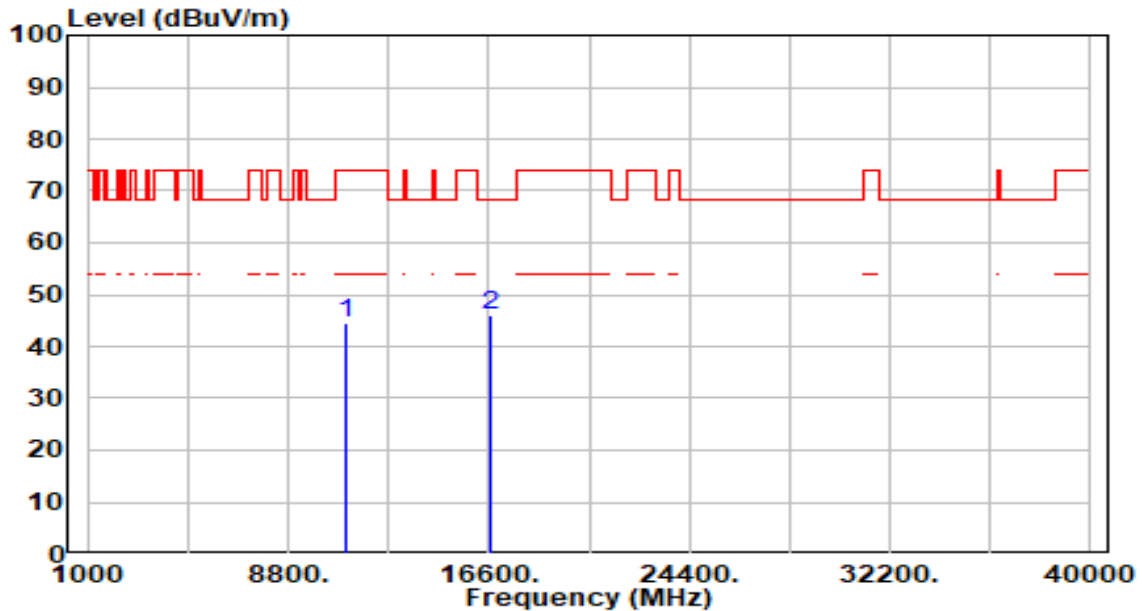


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	39.66	4.71	44.37	-29.63	74.00	300	273	Peak
2	* 16650.000	39.86	6.00	45.85	-22.35	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

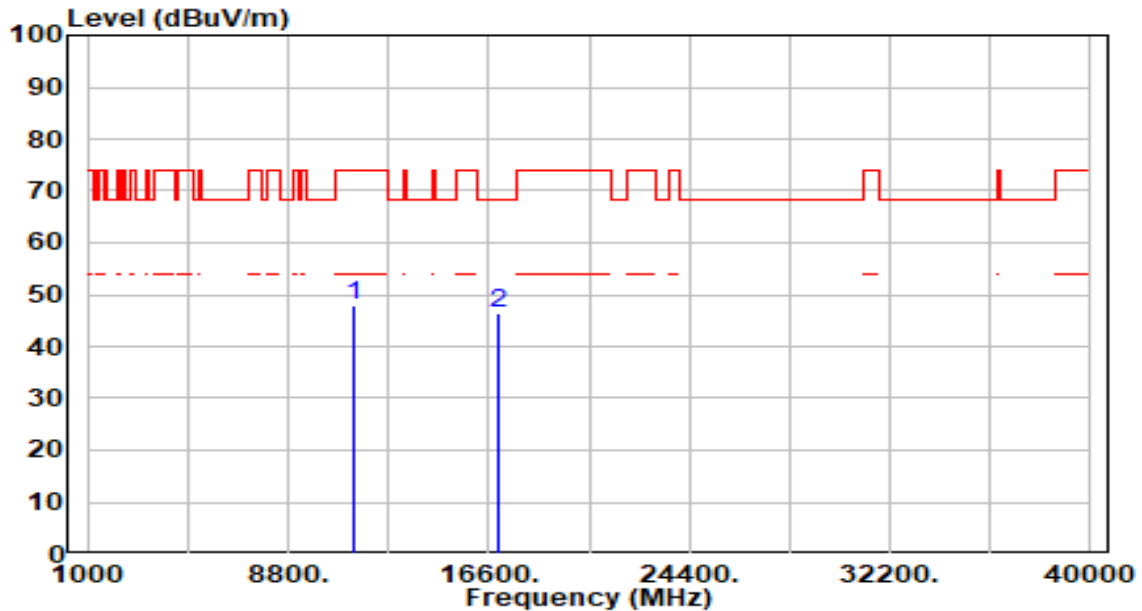


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.92	5.14	48.06	-25.94	74.00	100	21	Peak
2	* 17010.000	40.77	5.74	46.51	-21.69	68.20	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

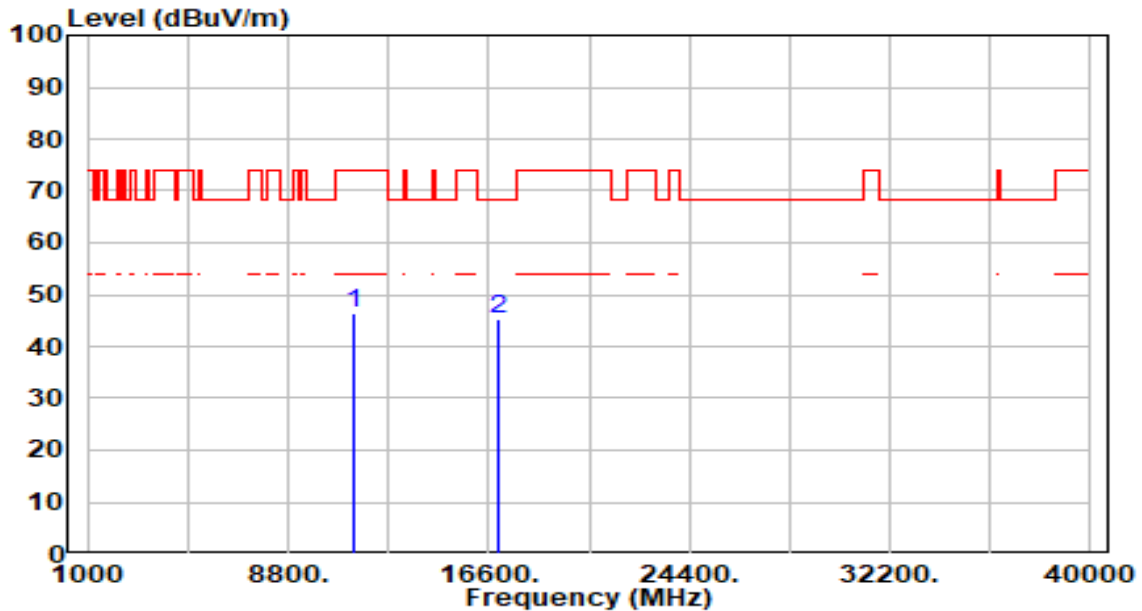


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.13	5.14	46.28	-27.72	74.00	300	22	Peak
2	*	17010.000	39.40	5.74	45.14	-23.06	68.20	300	108	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

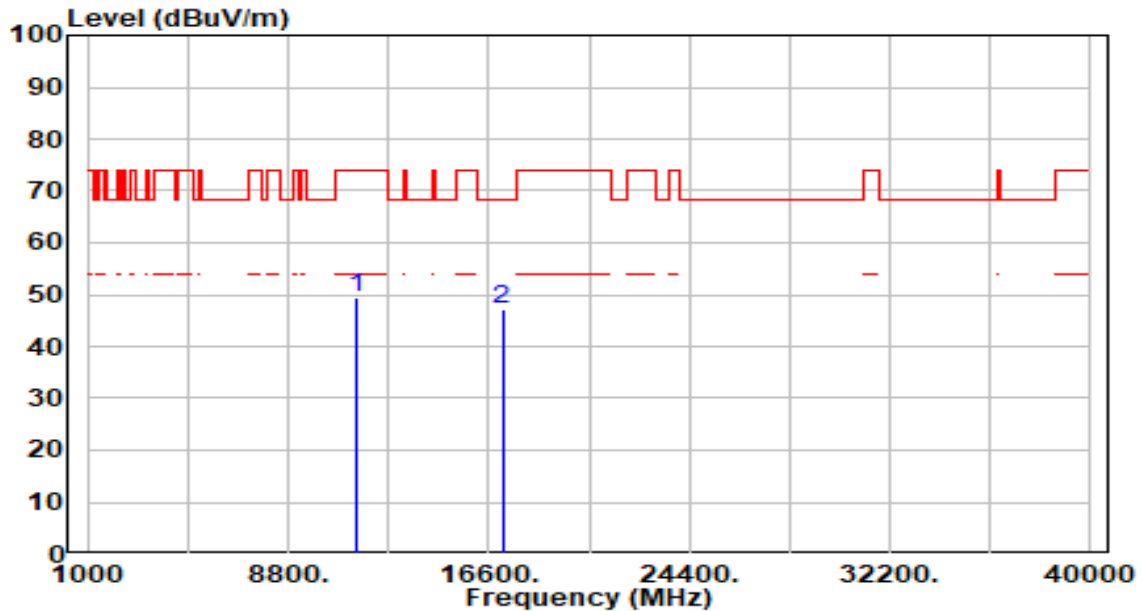


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	44.35	5.23	49.58	-24.42	74.00	100	244	Peak
2	*	17130.000	41.77	5.48	47.25	-20.95	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

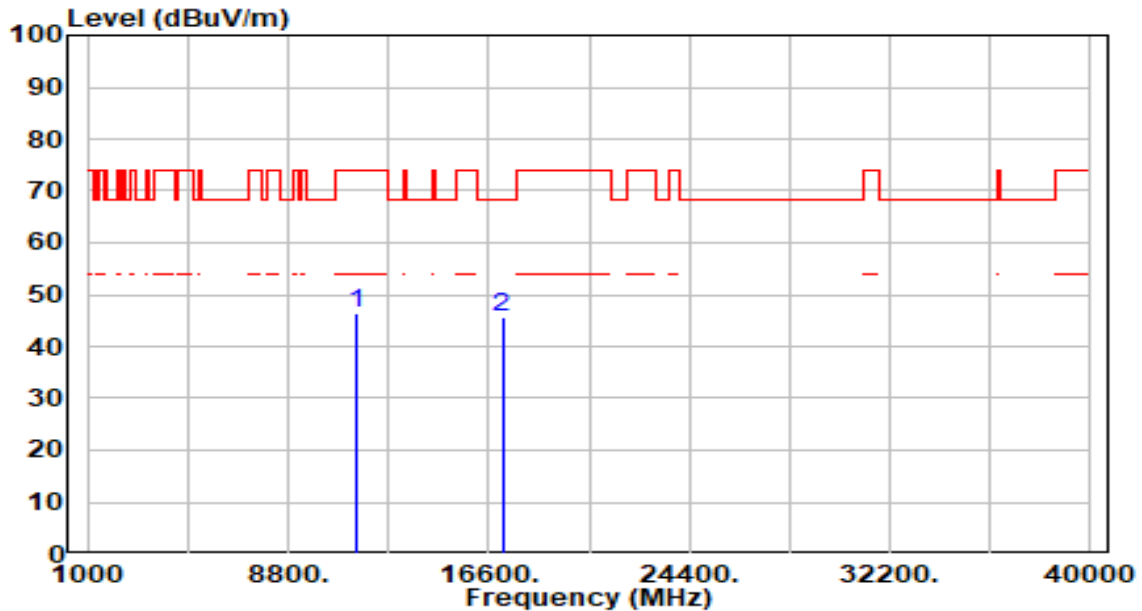


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.37	5.23	46.59	-27.41	74.00	300	150	Peak
2	*	17130.000	40.28	5.48	45.76	-22.44	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

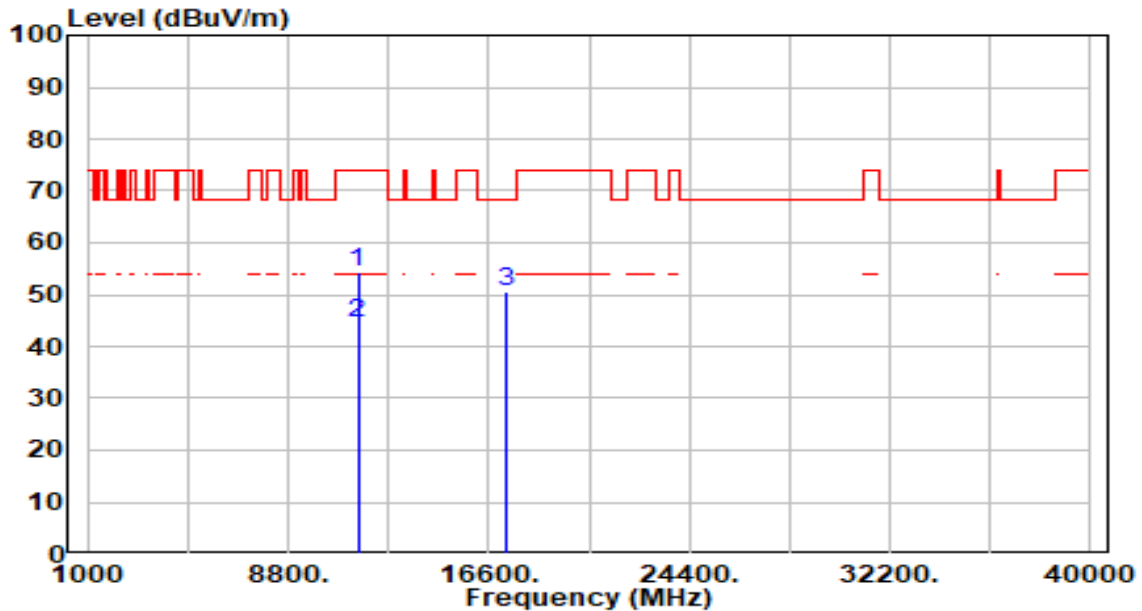


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	49.21	5.29	54.50	-19.50	74.00	100	22	Peak
2	*	11510.000	39.21	5.29	44.50	-9.50	54.00	100	22	Average
3	*	17265.000	45.30	5.18	50.48	-17.72	68.20	100	72	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

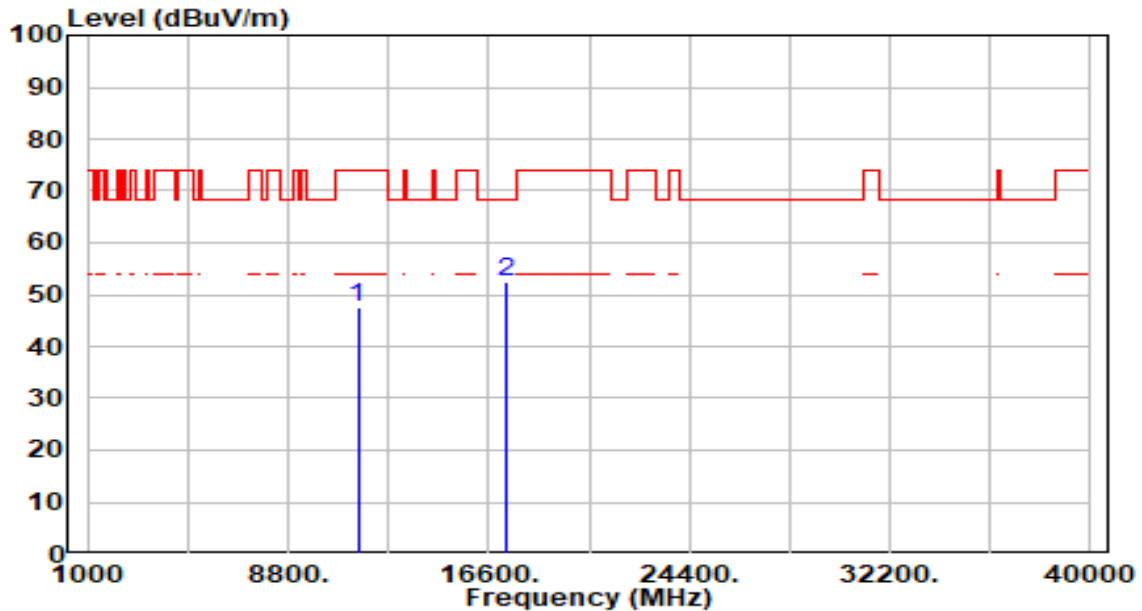


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	42.41	5.29	47.70	-26.30	74.00	300	0	Peak
2	*	17265.000	47.34	5.18	52.52	-15.68	68.20	300	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

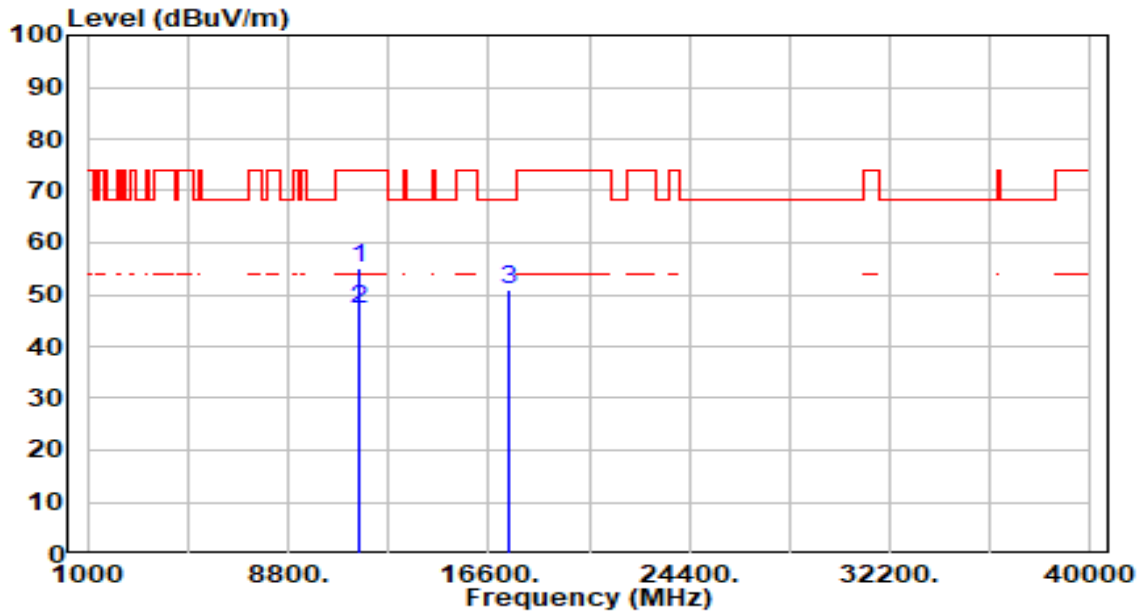


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	49.87	5.37	55.24	-18.76	74.00	100	312	Peak
2	*	11590.000	41.87	5.37	47.24	-6.76	54.00	100	312	Average
3	*	17385.000	46.16	4.92	51.08	-17.12	68.20	100	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

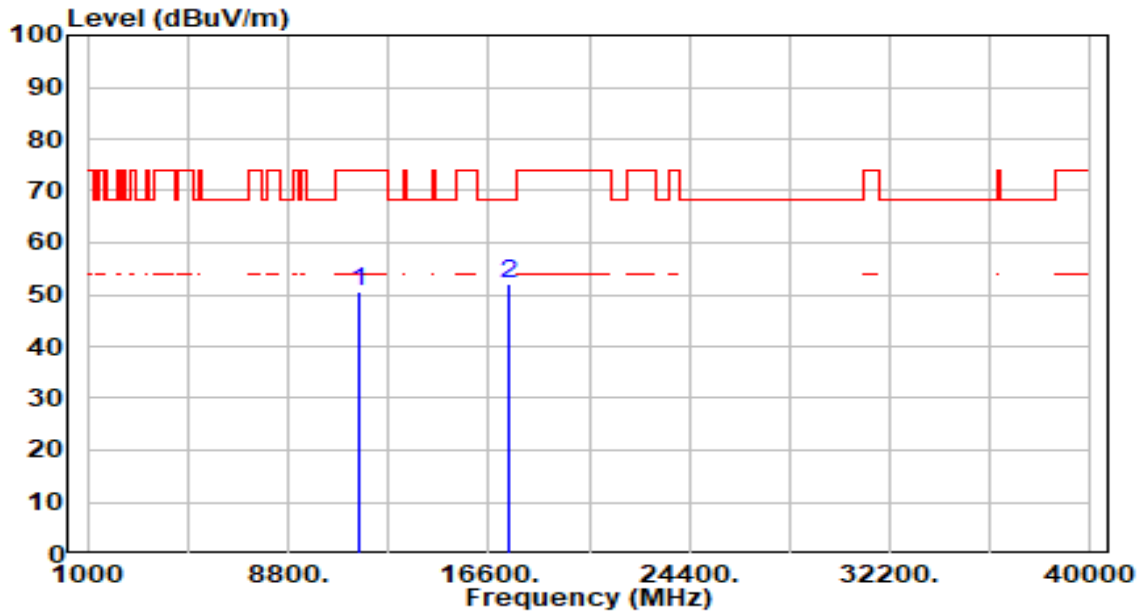


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	45.06	5.37	50.43	-23.57	74.00	300	0	Peak
2	*	17385.000	47.12	4.92	52.04	-16.16	68.20	300	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

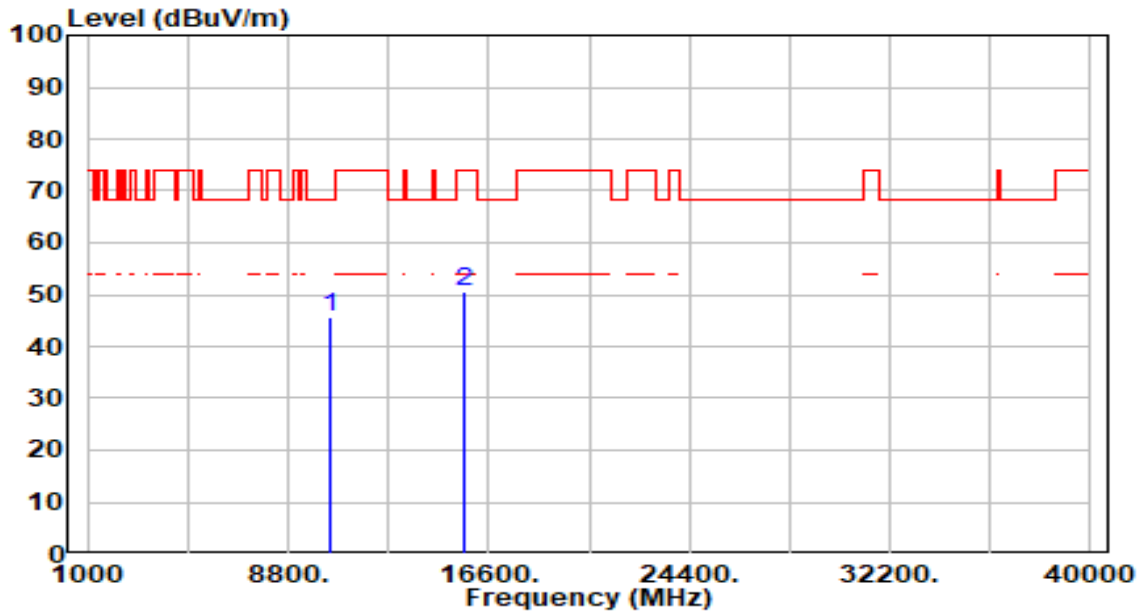


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.84	4.74	45.58	-22.62	68.20	100	293	Peak
2		15630.000	44.44	6.25	50.70	-23.30	74.00	100	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

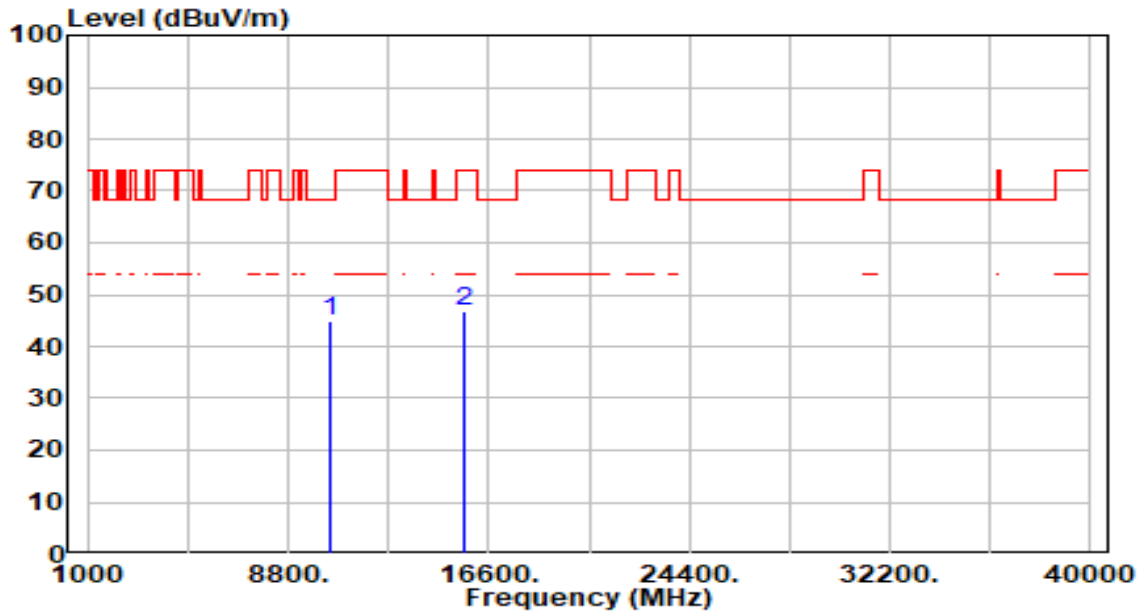


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.13	4.74	44.87	-23.33	68.20	300	312	Peak
2		15630.000	40.50	6.25	46.75	-27.25	74.00	300	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

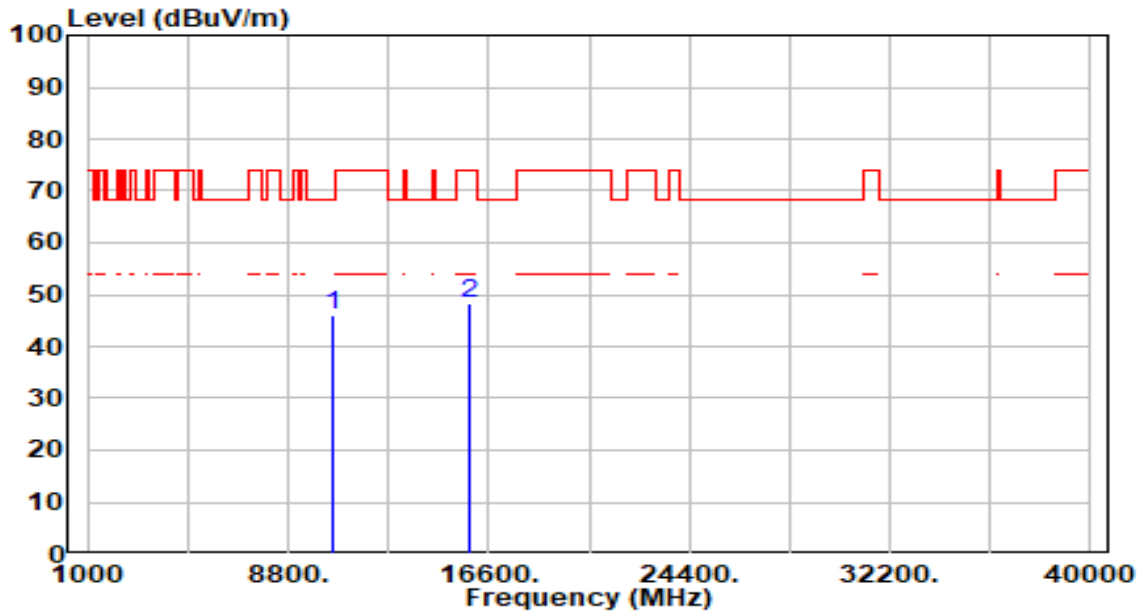


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.43	4.56	46.00	-22.20	68.20	100	70	Peak
2		15870.000	41.77	6.63	48.39	-25.61	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

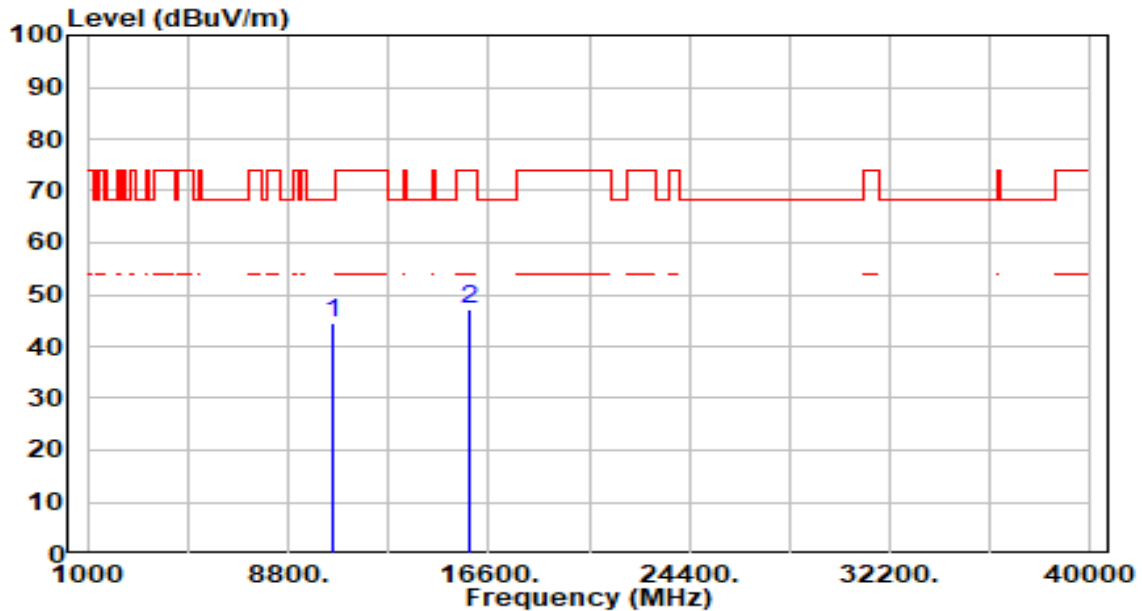


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	39.87	4.56	44.44	-23.76	68.20	300	178	Peak
2		15870.000	40.36	6.63	46.99	-27.01	74.00	300	262	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

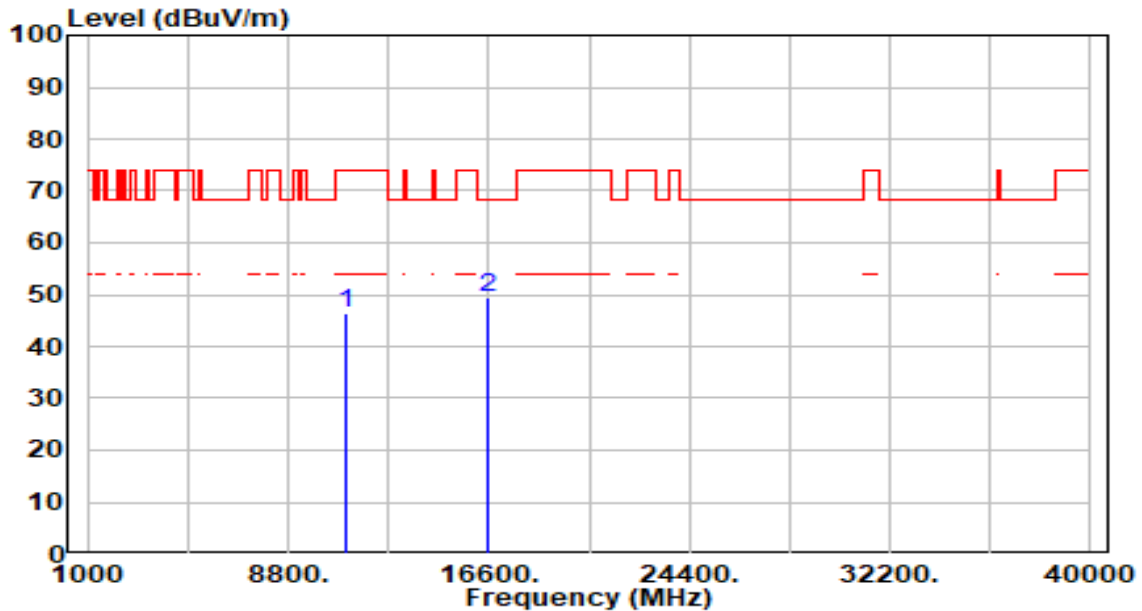


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.79	4.60	46.39	-27.61	74.00	100	161	Peak
2	* 16590.000	43.52	6.00	49.51	-18.69	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

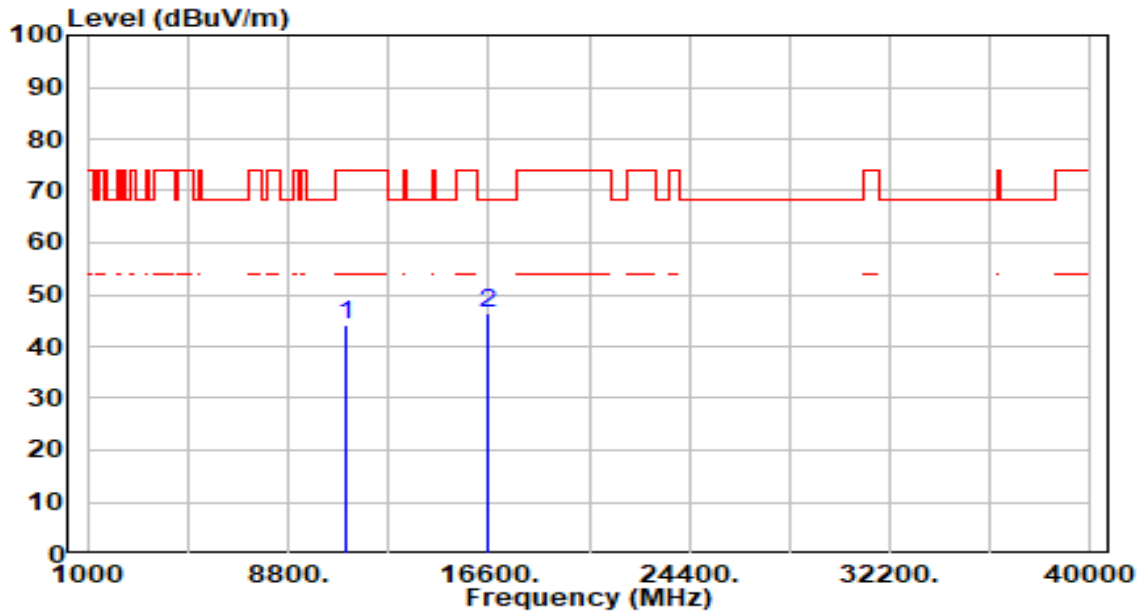


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	39.49	4.60	44.09	-29.91	74.00	300	120	Peak
2	*	16590.000	40.28	6.00	46.28	-21.92	68.20	300	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

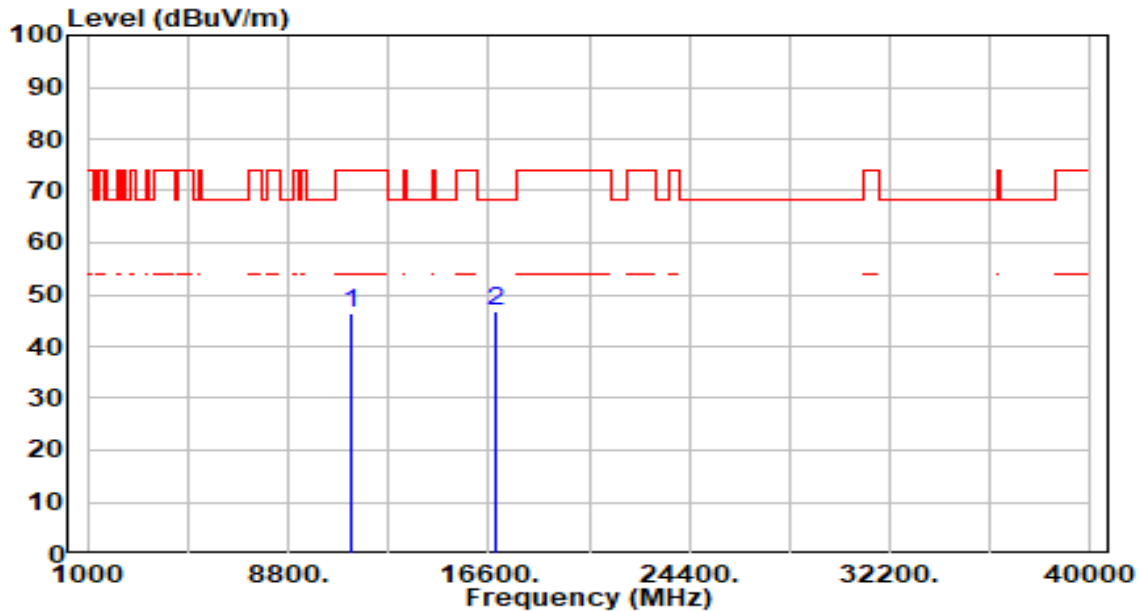


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.46	5.00	46.46	-27.54	74.00	100	56	Peak
2	* 16830.000	40.76	5.98	46.75	-21.45	68.20	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

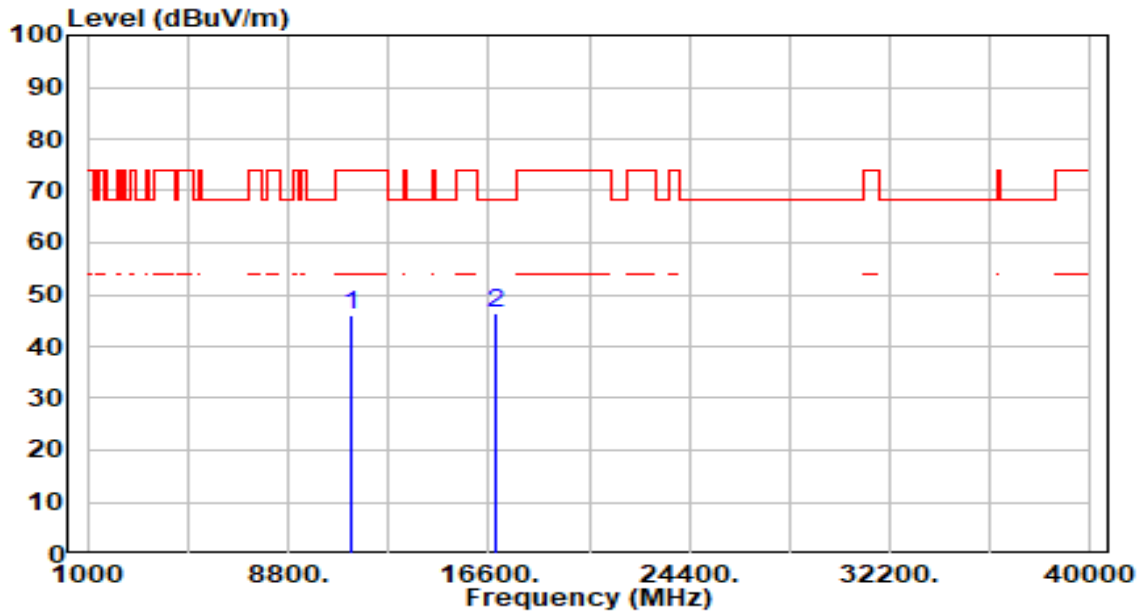


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.97	5.00	45.98	-28.02	74.00	300	3	Peak
2	*	16830.000	40.47	5.98	46.46	-21.74	68.20	300	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

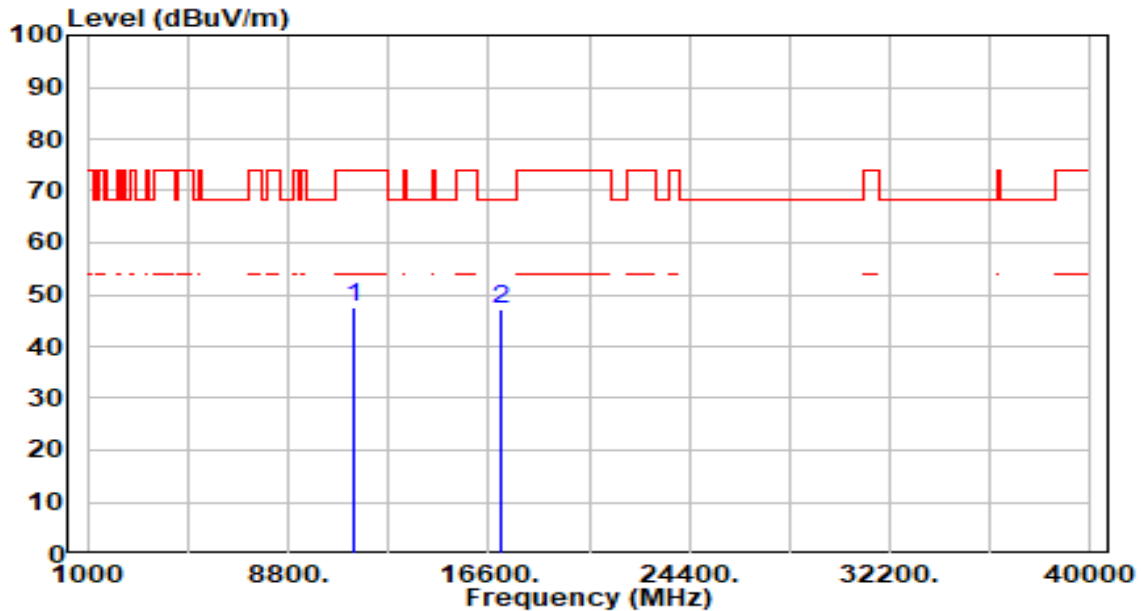


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	42.51	5.19	47.70	-26.30	74.00	100	312	Peak
2	*	17070.000	41.58	5.61	47.19	-21.01	68.20	100	297	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

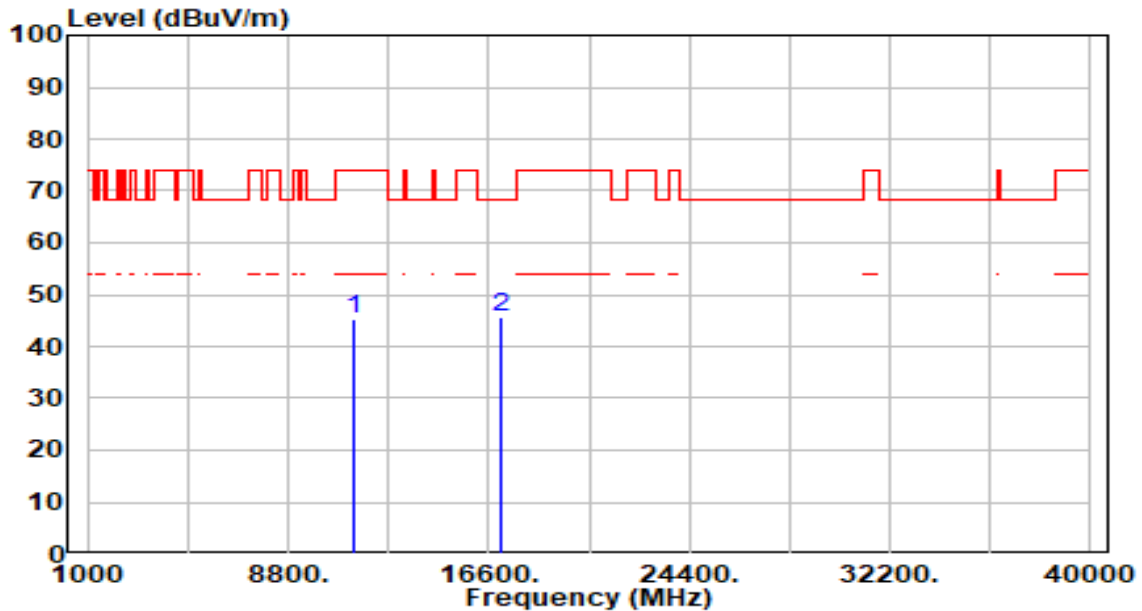


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	40.12	5.19	45.31	-28.69	74.00	300	358	Peak
2	* 17070.000	40.18	5.61	45.79	-22.41	68.20	300	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

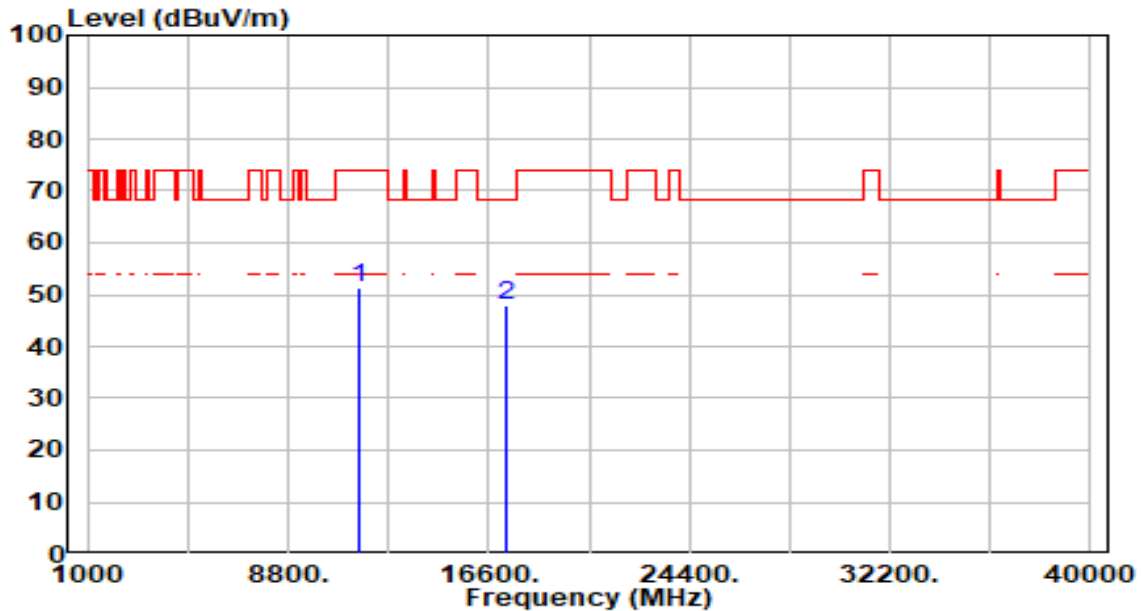


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	45.81	5.33	51.14	-22.86	74.00	100	311	Peak
2	*	17325.000	42.71	5.05	47.76	-20.44	68.20	100	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

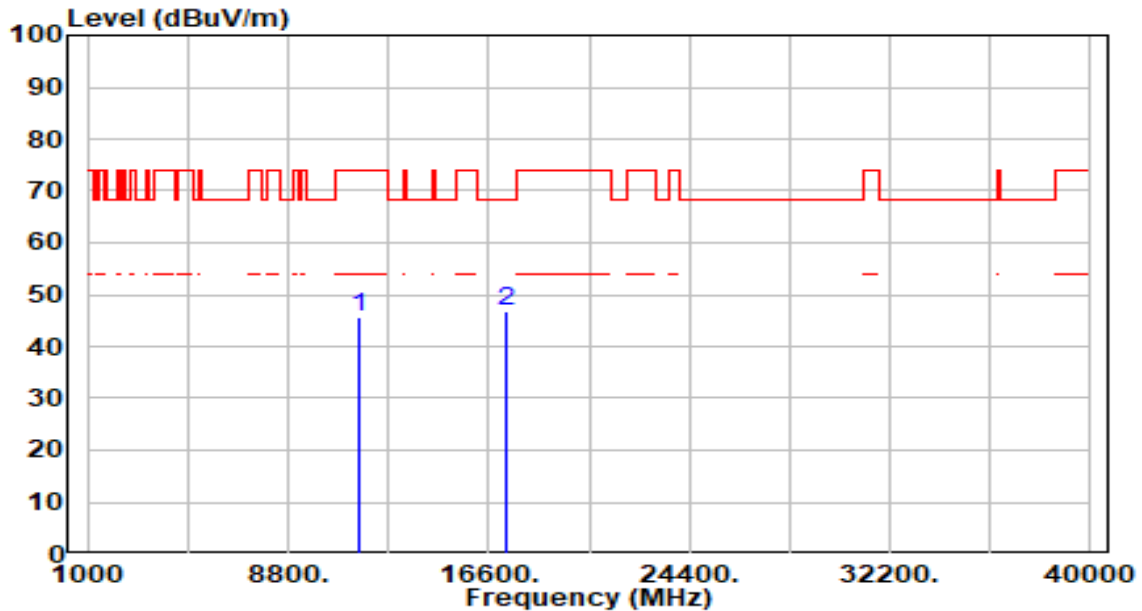


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.33	5.33	45.66	-28.34	74.00	300	151	Peak
2	* 17325.000	41.80	5.05	46.85	-21.35	68.20	300	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

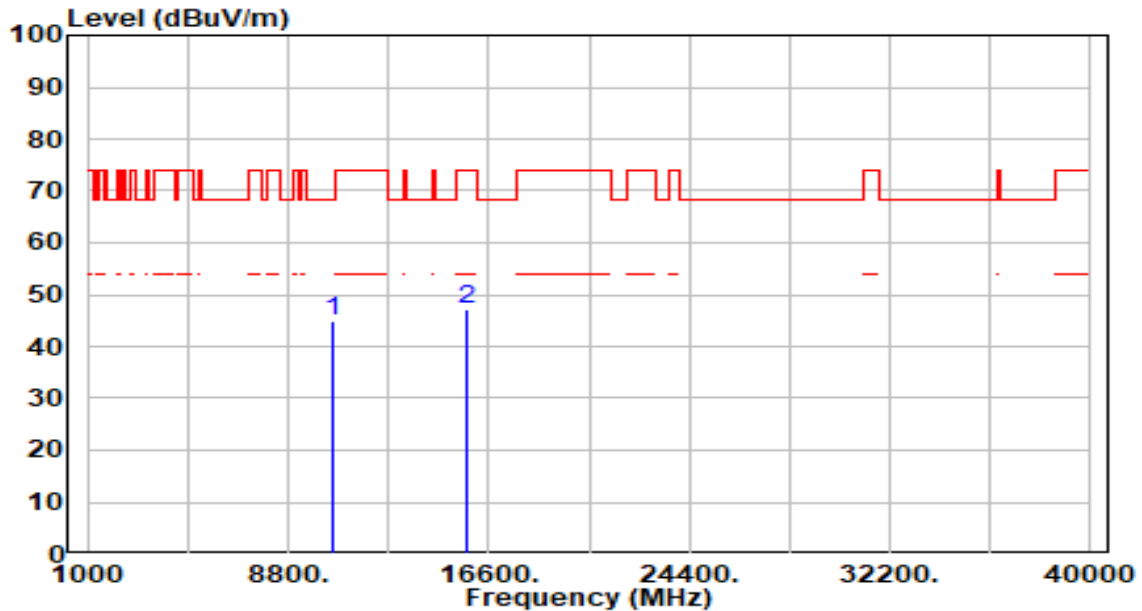


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.15	4.62	44.77	-23.43	68.20	300	154	Peak
2		15750.000	40.80	6.49	47.30	-26.70	74.00	300	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

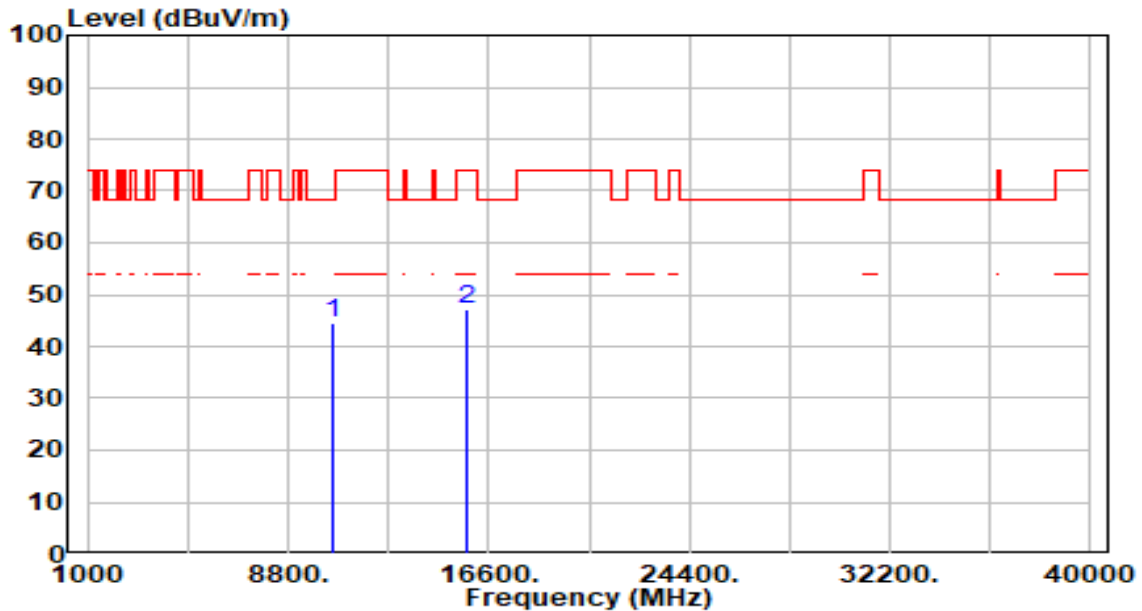


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.82	4.62	44.44	-23.76	68.20	300	360	Peak
2		15750.000	40.81	6.49	47.31	-26.69	74.00	300	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

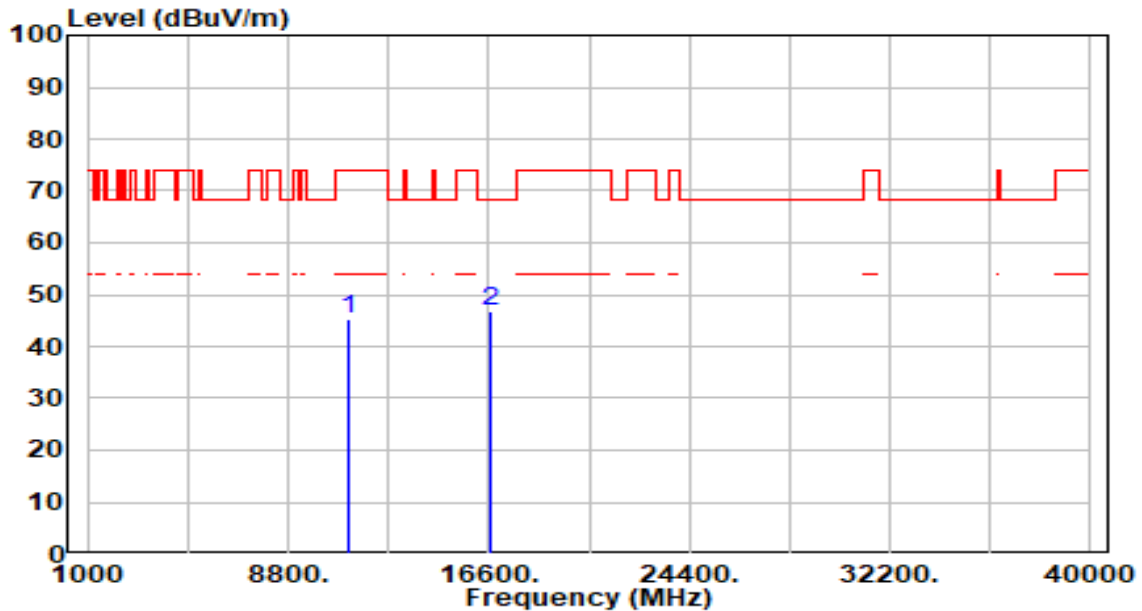


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.37	4.82	45.18	-28.82	74.00	100	170	Peak
2	* 16710.000	40.76	6.01	46.77	-21.43	68.20	100	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

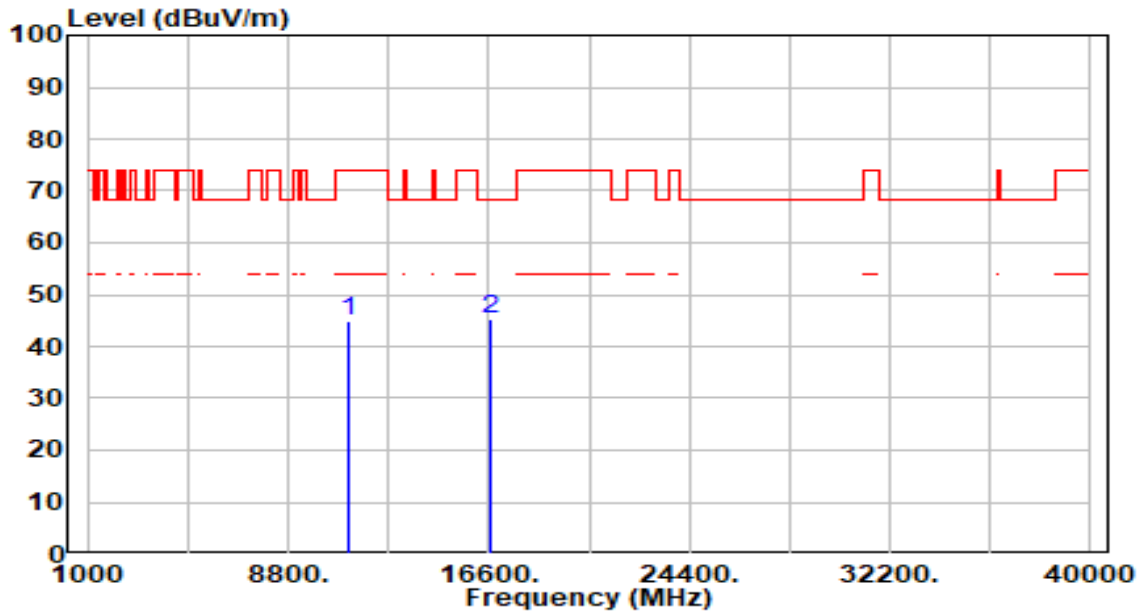


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	39.99	4.82	44.81	-29.19	74.00	300	41	Peak
2	*	16710.000	39.11	6.01	45.12	-23.08	68.20	300	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

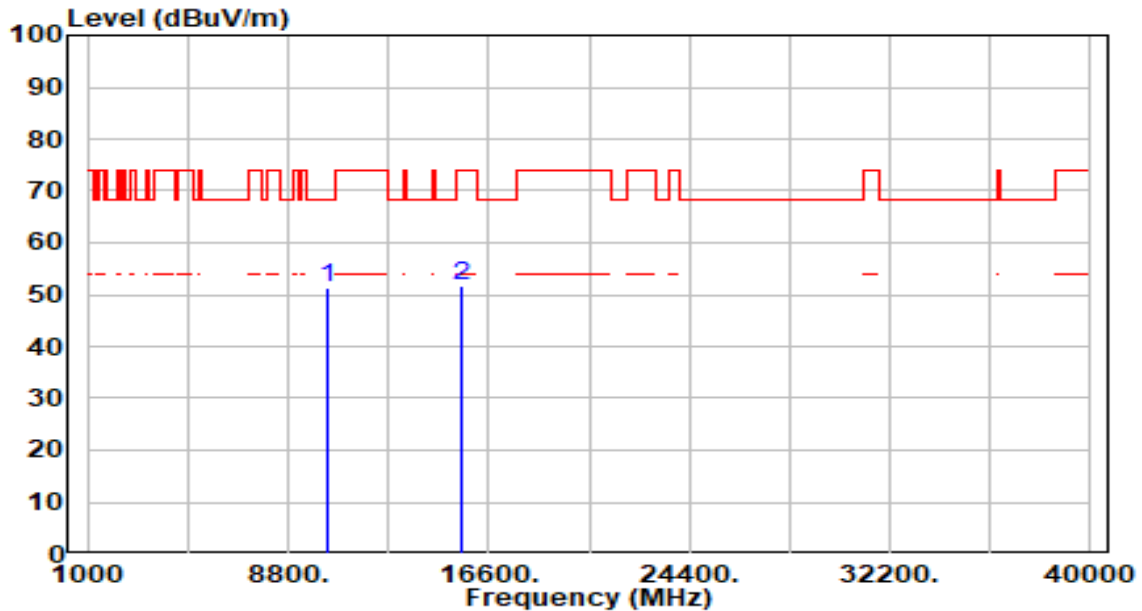


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	46.54	4.81	51.36	-16.84	68.20	100	282	Peak
2		15540.000	45.46	6.28	51.74	-22.26	74.00	100	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

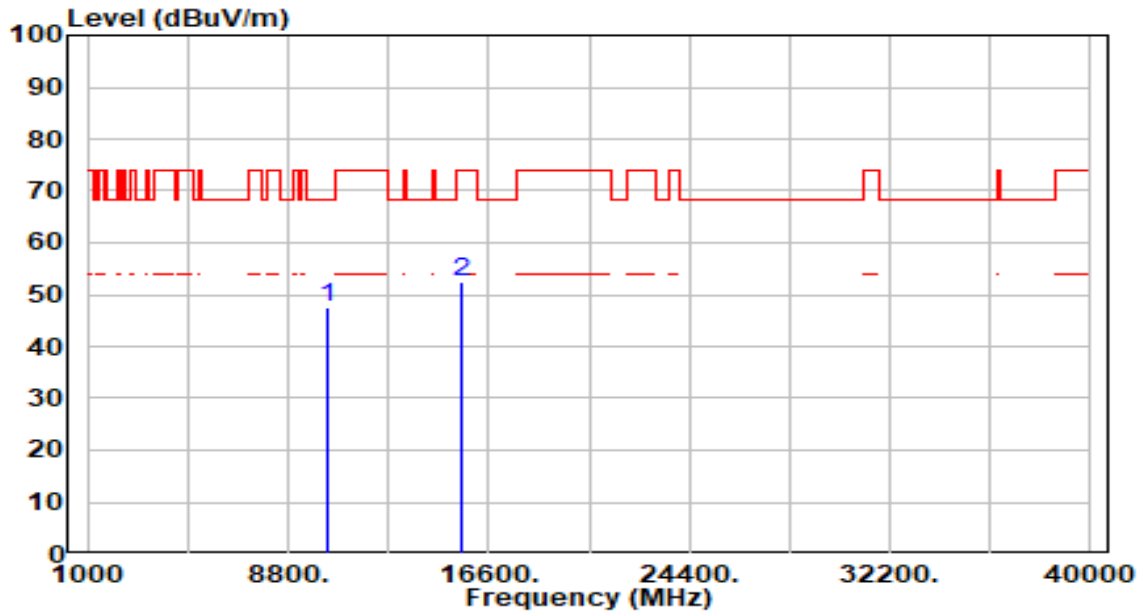


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.91	4.81	47.72	-20.48	68.20	300	361	Peak
2		15540.000	46.10	6.28	52.38	-21.62	74.00	300	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

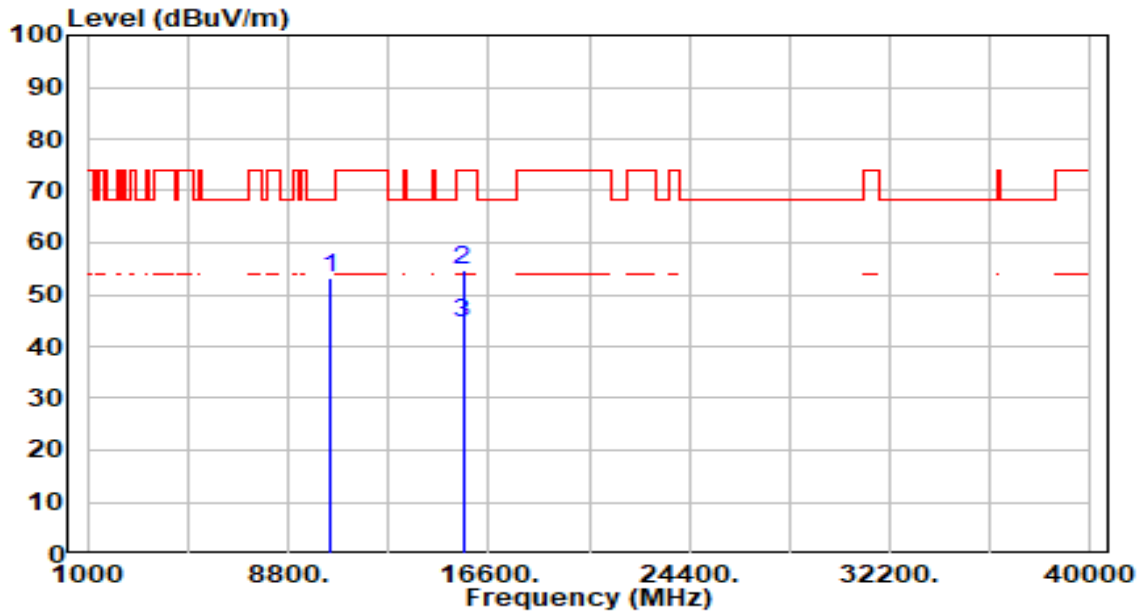


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	48.46	4.77	53.24	-14.96	68.20	100	30	Peak
2		15600.000	48.38	6.19	54.57	-19.43	74.00	100	348	Peak
3	*	15600.000	38.38	6.19	44.57	-9.43	54.00	100	348	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

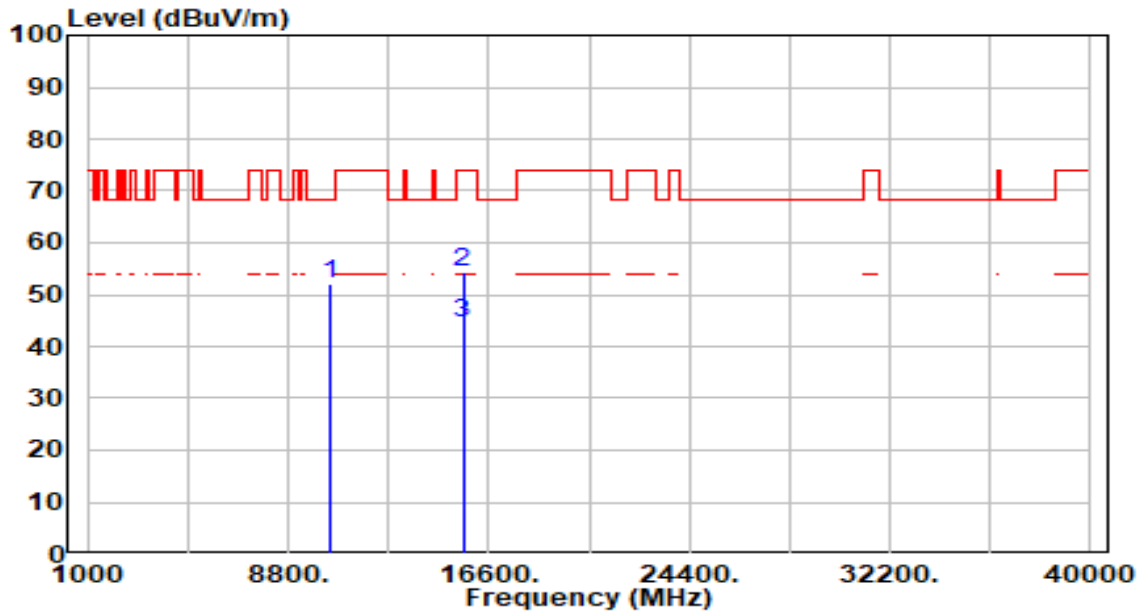


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	47.31	4.77	52.08	-16.12	68.20	300	10	Peak
2		15600.000	48.31	6.19	54.51	-19.49	74.00	300	330	Peak
3	*	15600.000	38.31	6.19	44.51	-9.49	54.00	300	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

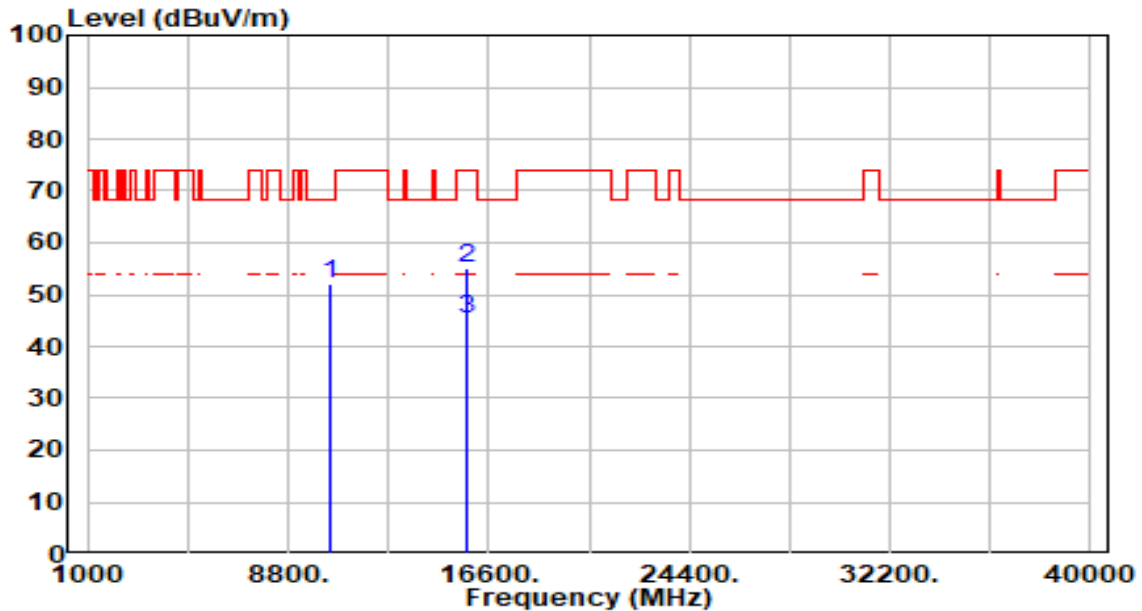


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	47.43	4.65	52.08	-16.12	68.20	100	91	Peak
2		15720.000	48.72	6.43	55.15	-18.85	74.00	100	67	Peak
3	*	15720.000	38.72	6.43	45.15	-8.85	54.00	100	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

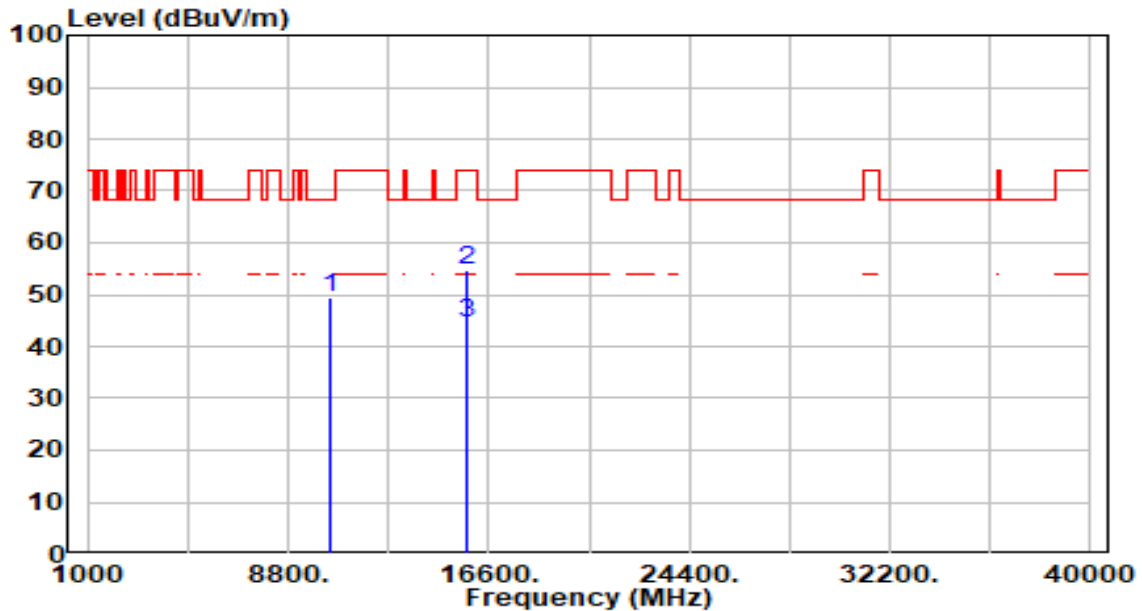


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	44.81	4.65	49.47	-18.73	68.20	300	32	Peak
2		15720.000	48.16	6.43	54.59	-19.41	74.00	300	311	Peak
3	*	15720.000	38.16	6.43	44.59	-9.41	54.00	300	311	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

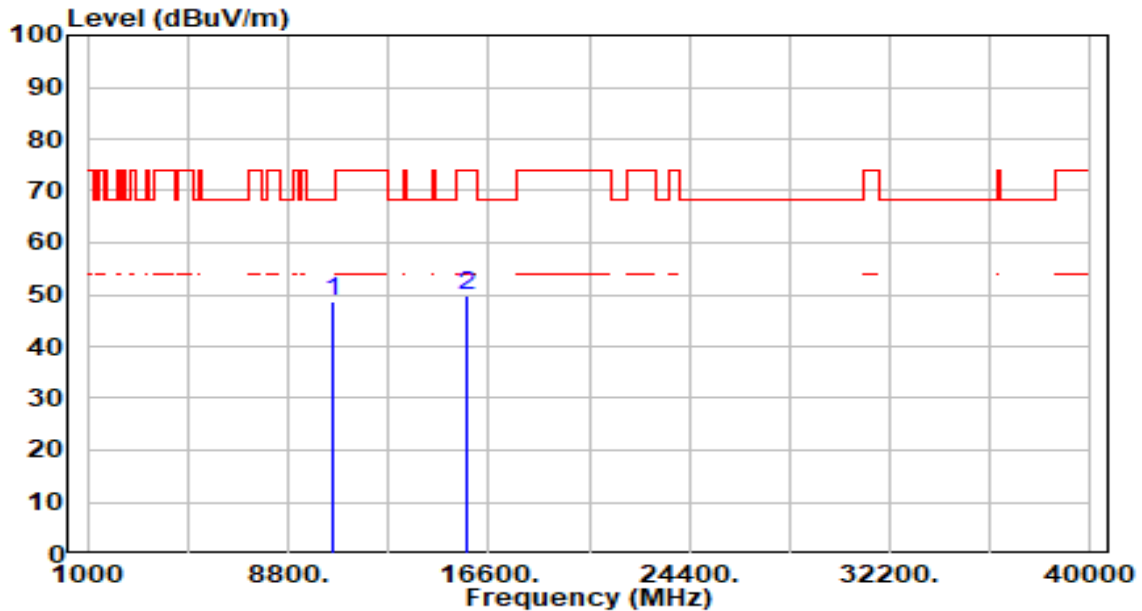


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.88	4.61	48.49	-19.71	68.20	100	95	Peak
2		15780.000	43.27	6.55	49.82	-24.18	74.00	100	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

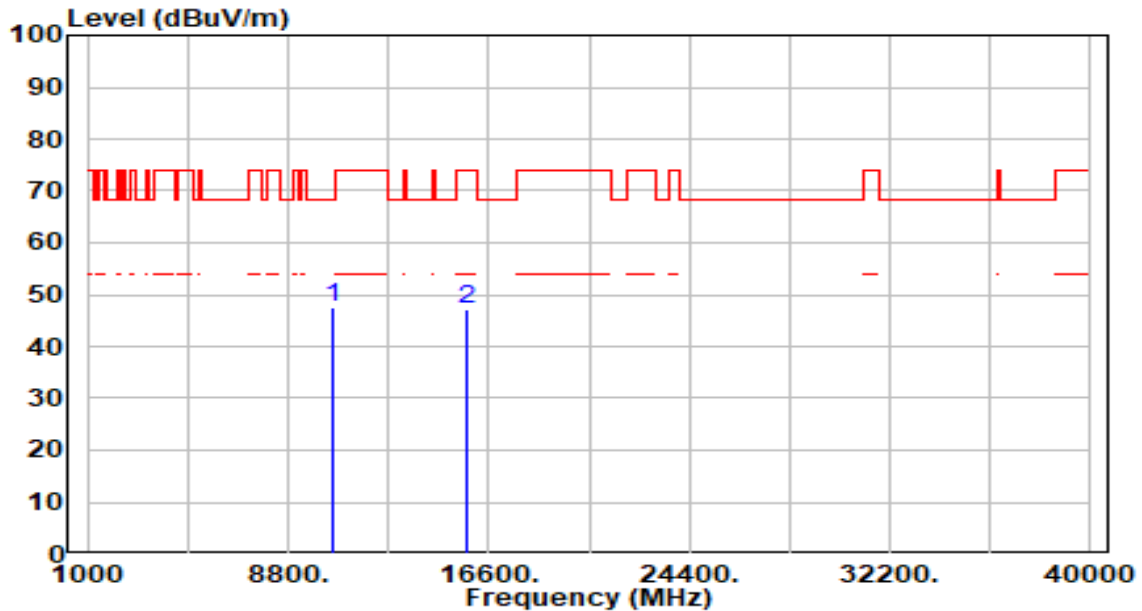


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.93	4.61	47.53	-20.67	68.20	300	4	Peak
2		15780.000	40.60	6.55	47.15	-26.85	74.00	300	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

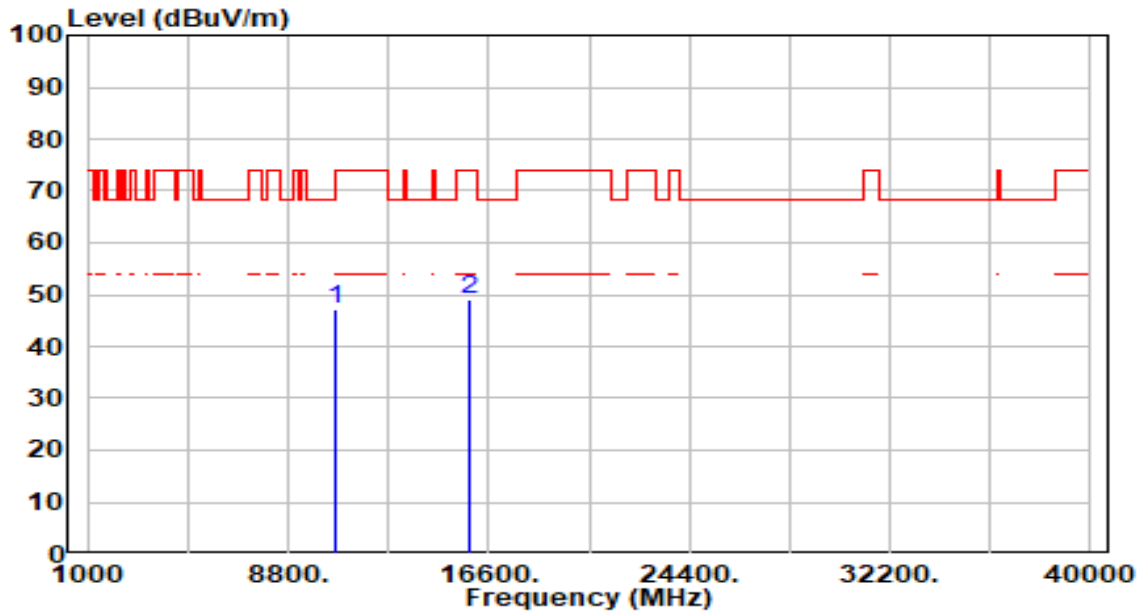


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.46	4.55	47.01	-21.19	68.20	100	77	Peak
2		15900.000	42.32	6.64	48.96	-25.04	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

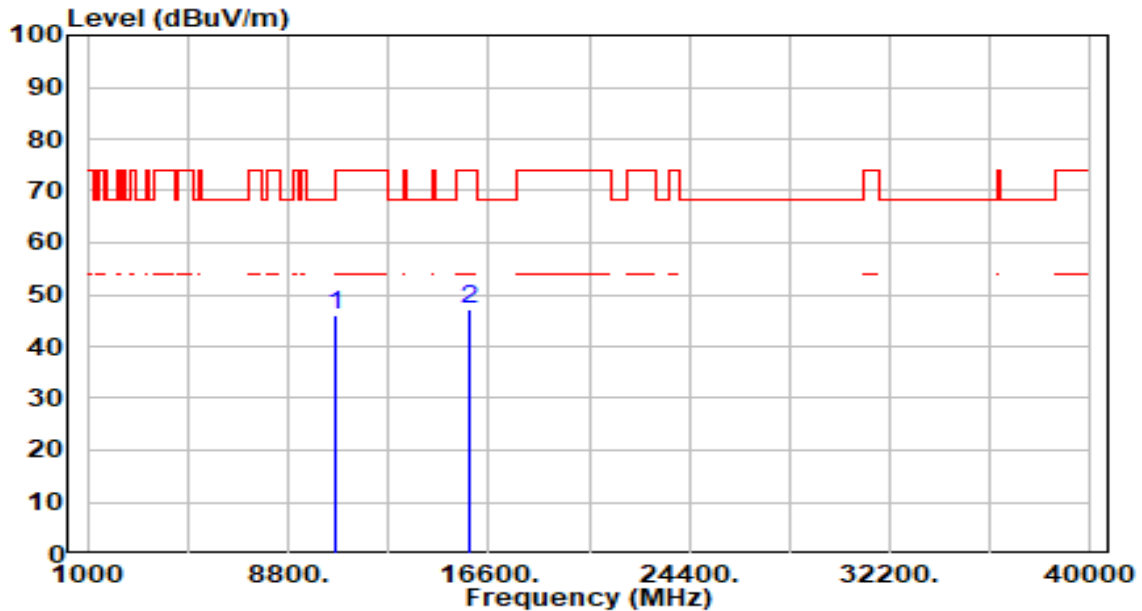


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.38	4.55	45.92	-22.28	68.20	300	25	Peak
2		15900.000	40.67	6.64	47.31	-26.69	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

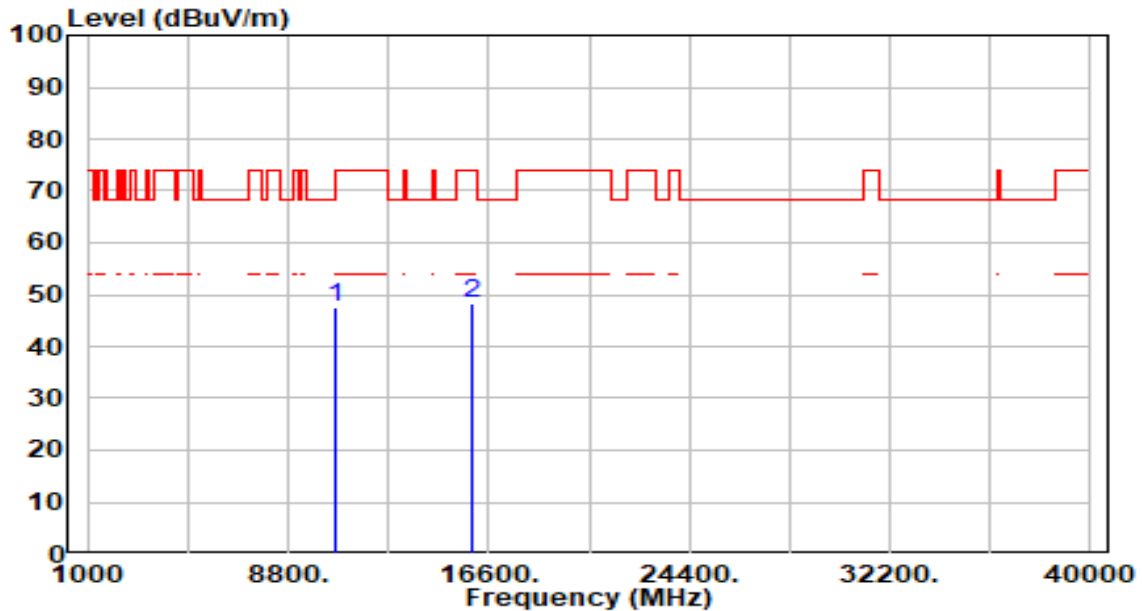


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.98	4.58	47.56	-26.44	74.00	100	124	Peak
2	* 15960.000	41.51	6.67	48.18	-25.82	74.00	100	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

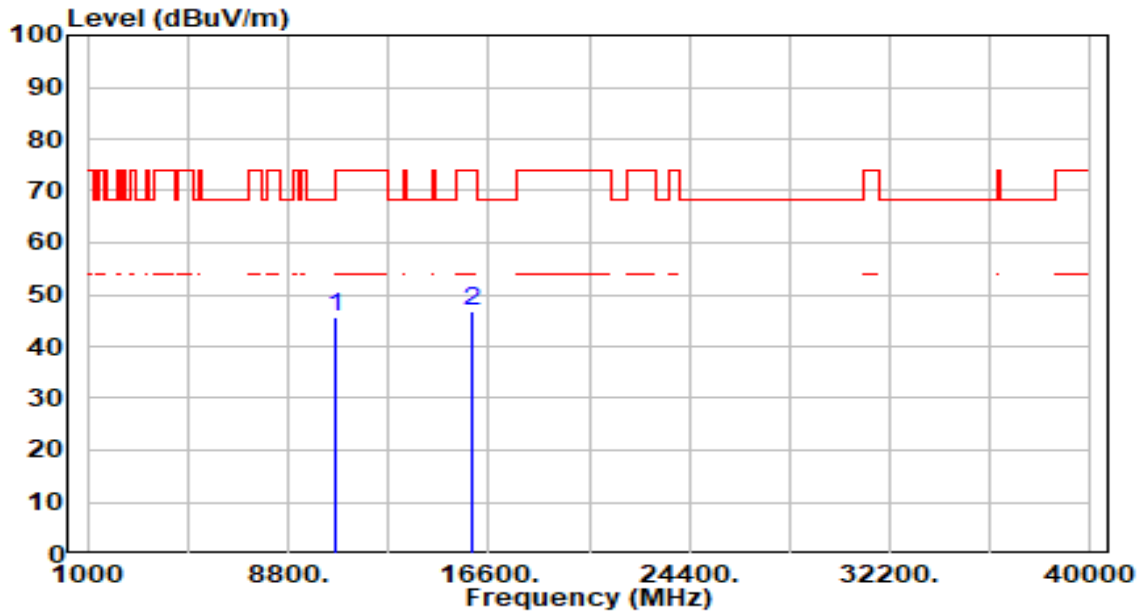


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.09	4.58	45.66	-28.34	74.00	300	311	Peak
2	* 15960.000	40.23	6.67	46.90	-27.10	74.00	300	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

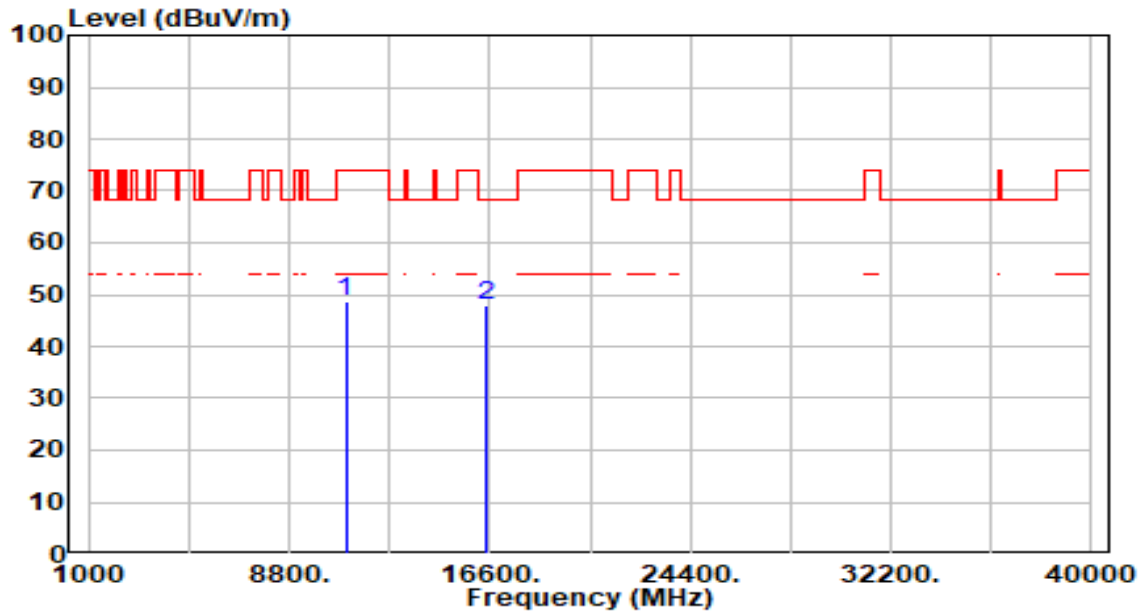


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	44.37	4.44	48.81	-25.19	74.00	100	210	Peak
2	* 16500.000	41.83	6.07	47.90	-20.30	68.20	100	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

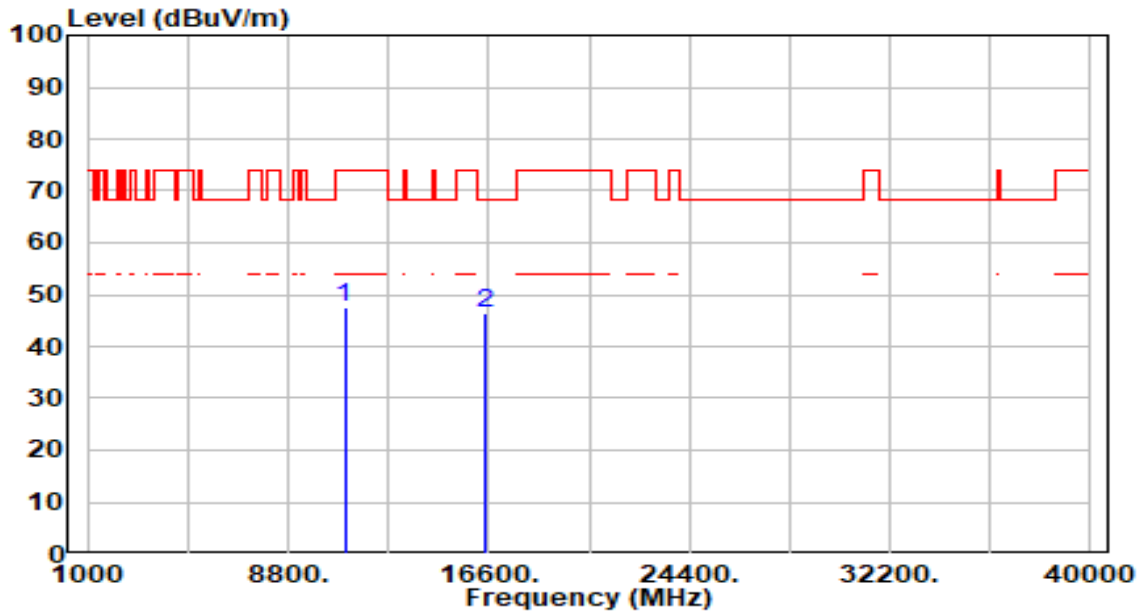


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.01	4.44	47.45	-26.55	74.00	300	0	Peak
2	*	16500.000	40.19	6.07	46.26	-21.94	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

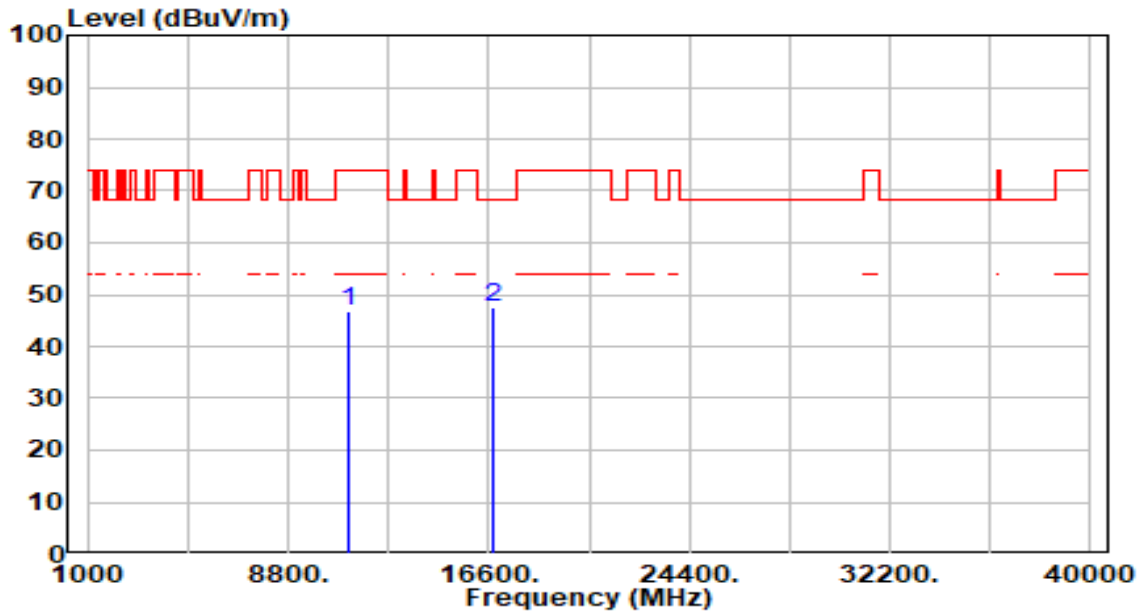


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	41.79	4.87	46.66	-27.34	74.00	100	74	Peak
2	* 16740.000	41.72	6.01	47.73	-20.47	68.20	100	293	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

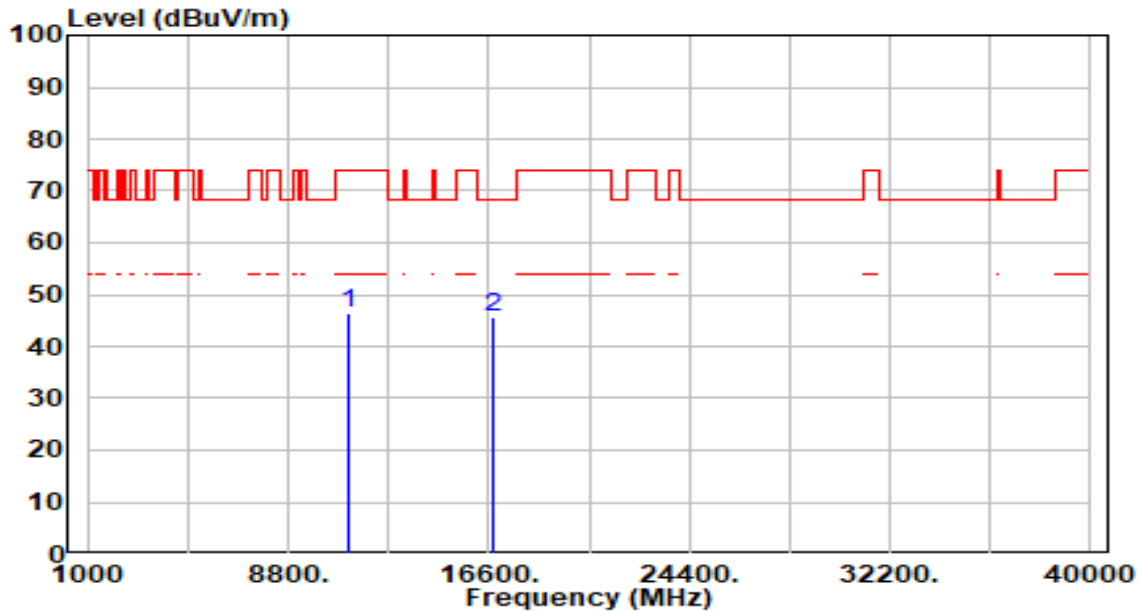


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.46	4.87	46.33	-27.67	74.00	300	0	Peak
2	*	16740.000	39.46	6.01	45.47	-22.73	68.20	300	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

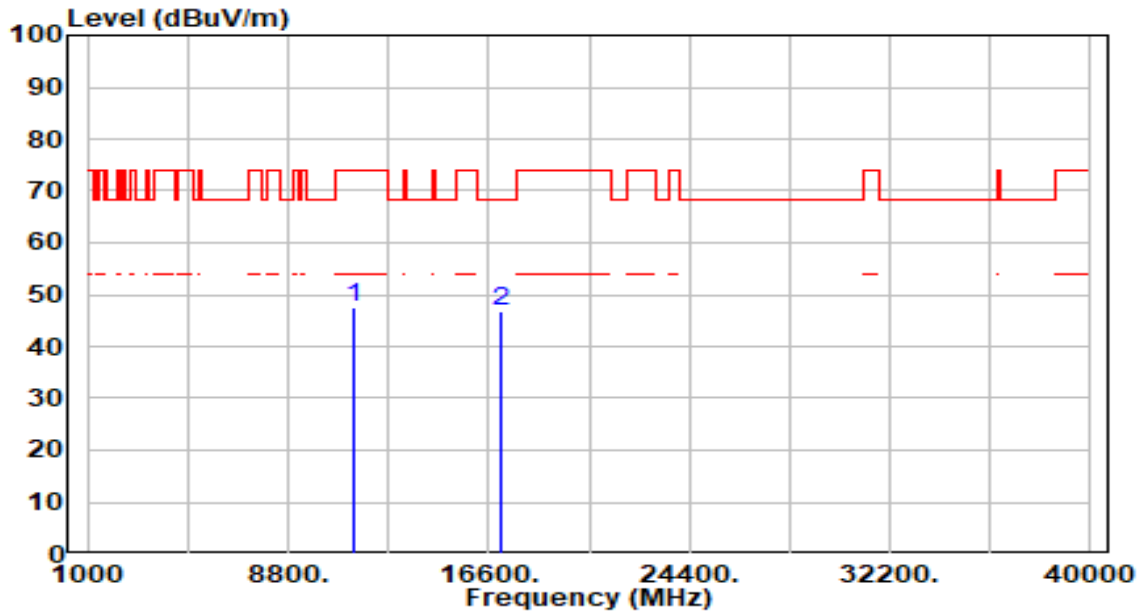


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.46	5.22	47.68	-26.32	74.00	100	250	Peak
2	*	17100.000	41.13	5.54	46.67	-21.53	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

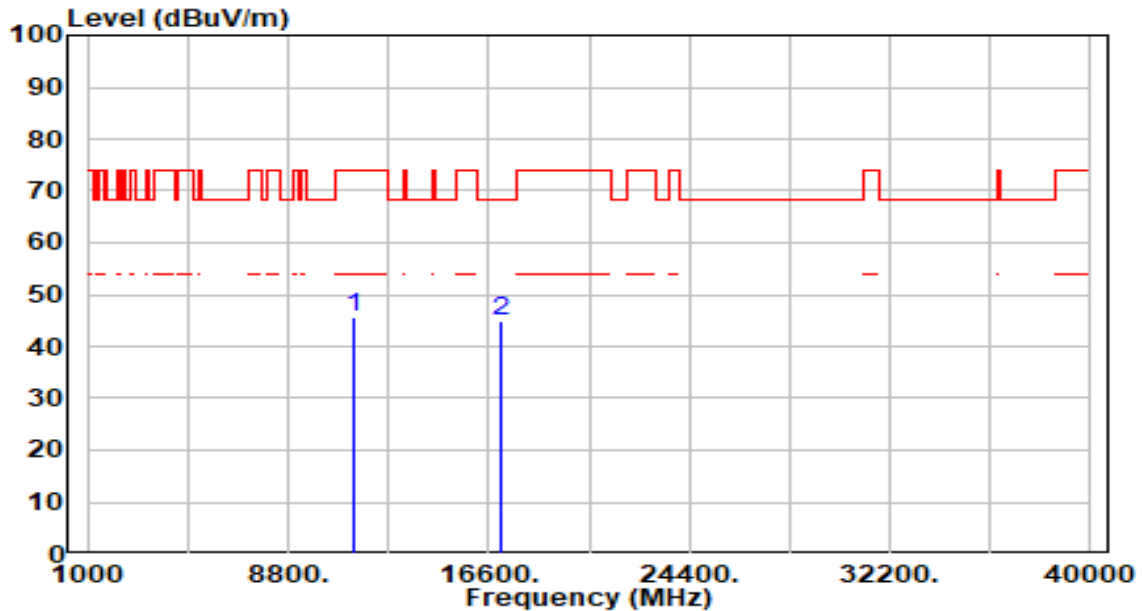


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	40.58	5.22	45.79	-28.21	74.00	300	0	Peak
2	*	17100.000	39.47	5.54	45.01	-23.19	68.20	300	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

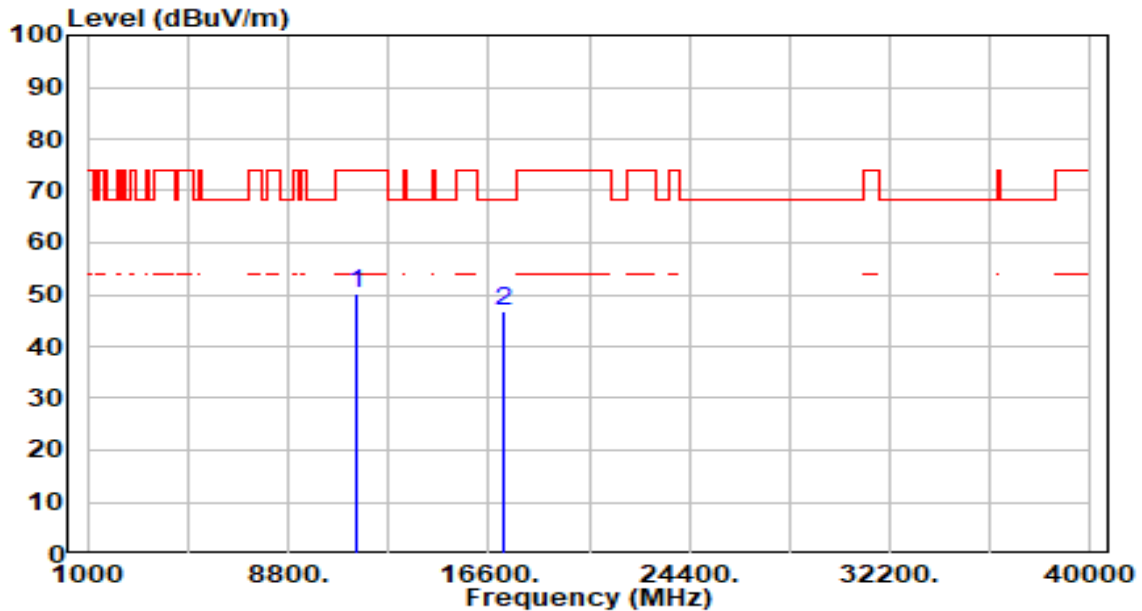


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	44.82	5.24	50.06	-23.94	74.00	100	20	Peak
2	*	17160.000	41.19	5.41	46.61	-21.59	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

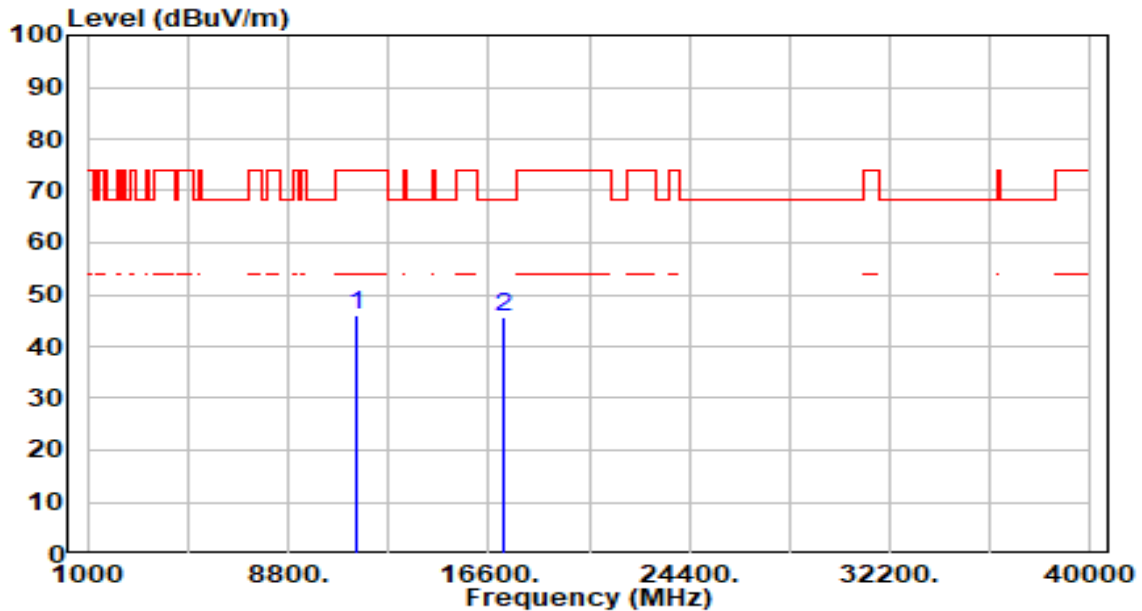


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	40.82	5.24	46.07	-27.93	74.00	300	1	Peak
2	*	17160.000	40.31	5.41	45.72	-22.48	68.20	300	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

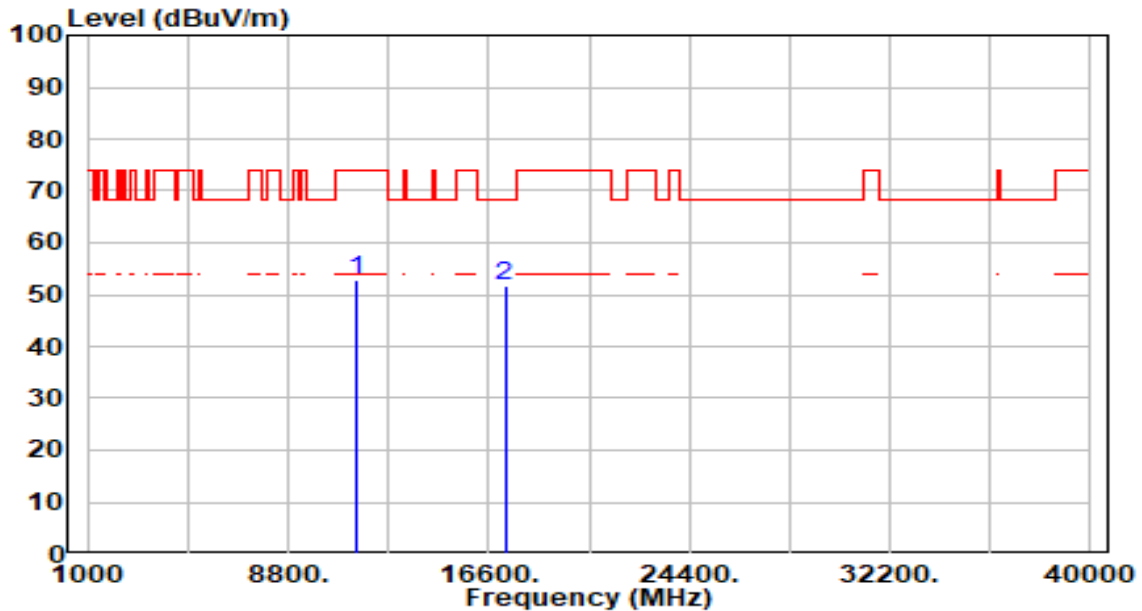


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	47.62	5.28	52.90	-21.10	74.00	100	341	Peak
2	* 17235.000	46.32	5.25	51.57	-16.63	68.20	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

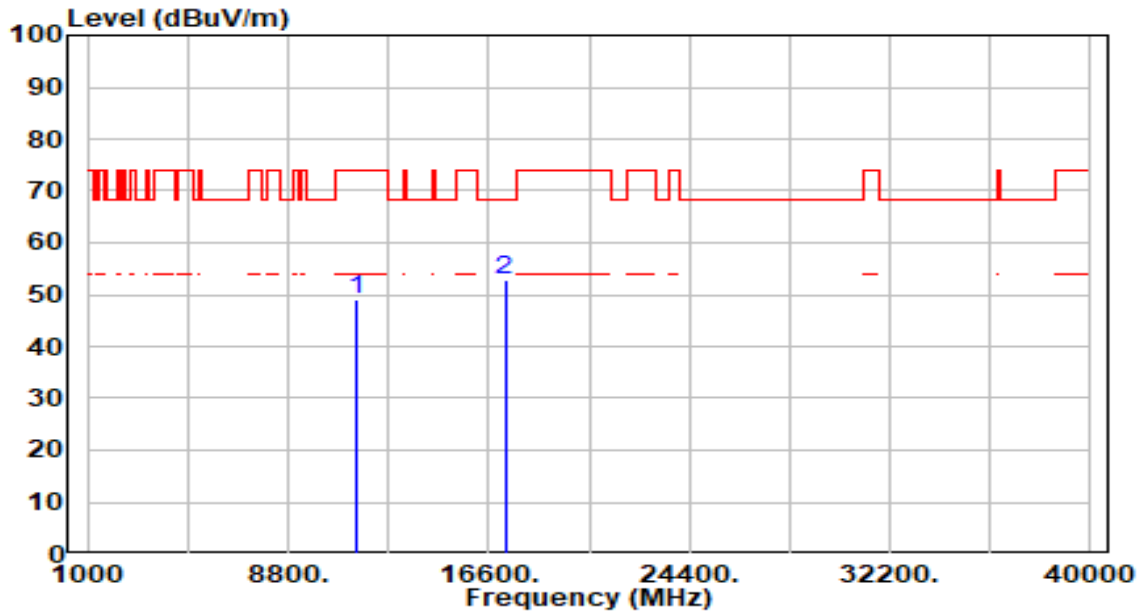


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.73	5.28	49.01	-24.99	74.00	300	360	Peak
2	* 17235.000	47.44	5.25	52.69	-15.51	68.20	300	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

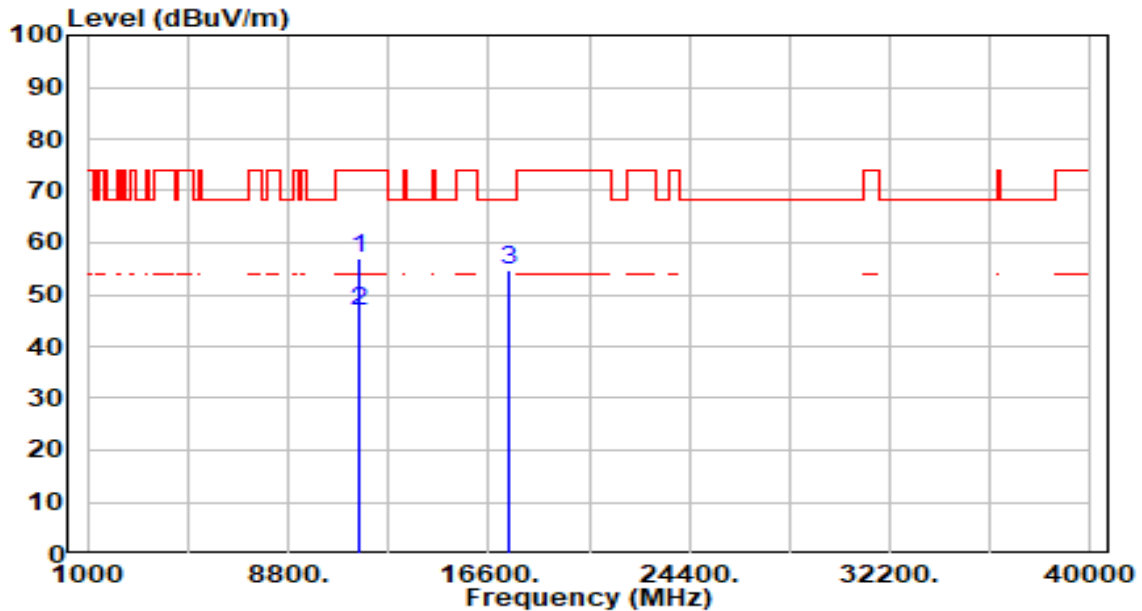


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	51.48	5.35	56.83	-17.17	74.00	100	316	Peak
2	*	11570.000	41.48	5.35	46.83	-7.17	54.00	100	316	Average
3	*	17355.000	49.83	4.99	54.82	-13.38	68.20	100	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

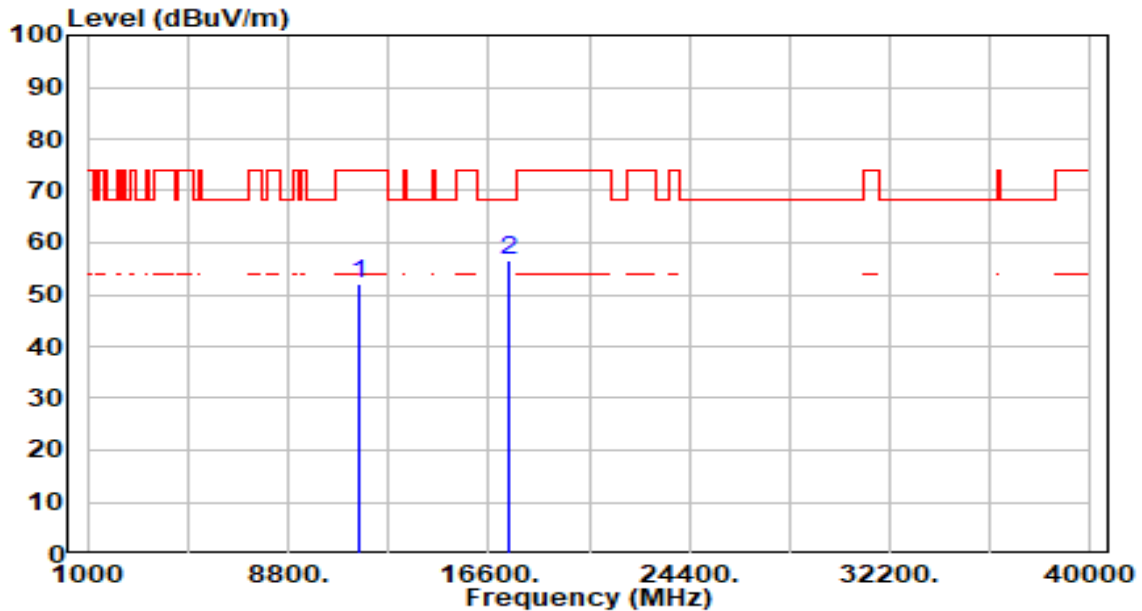


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	46.83	5.35	52.18	-21.82	74.00	300	0	Peak
2	*	17355.000	51.58	4.99	56.56	-11.64	68.20	300	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

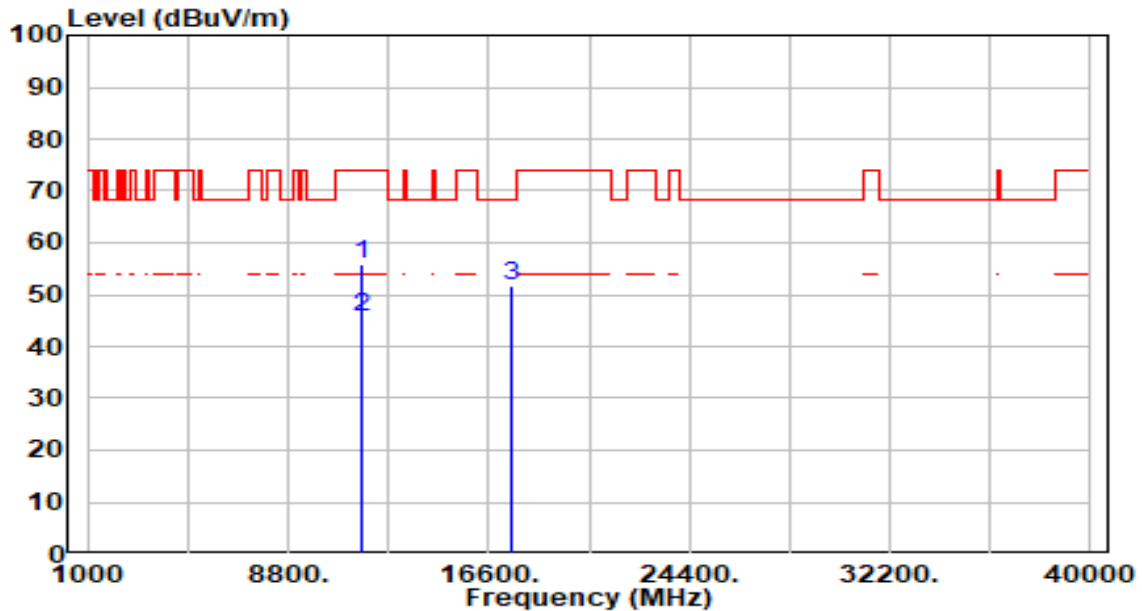


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	50.29	5.37	55.66	-18.34	74.00	100	313	Peak
2	*	11650.000	40.29	5.37	45.66	-8.34	54.00	100	313	Average
3	*	17475.000	46.61	5.02	51.64	-16.56	68.20	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

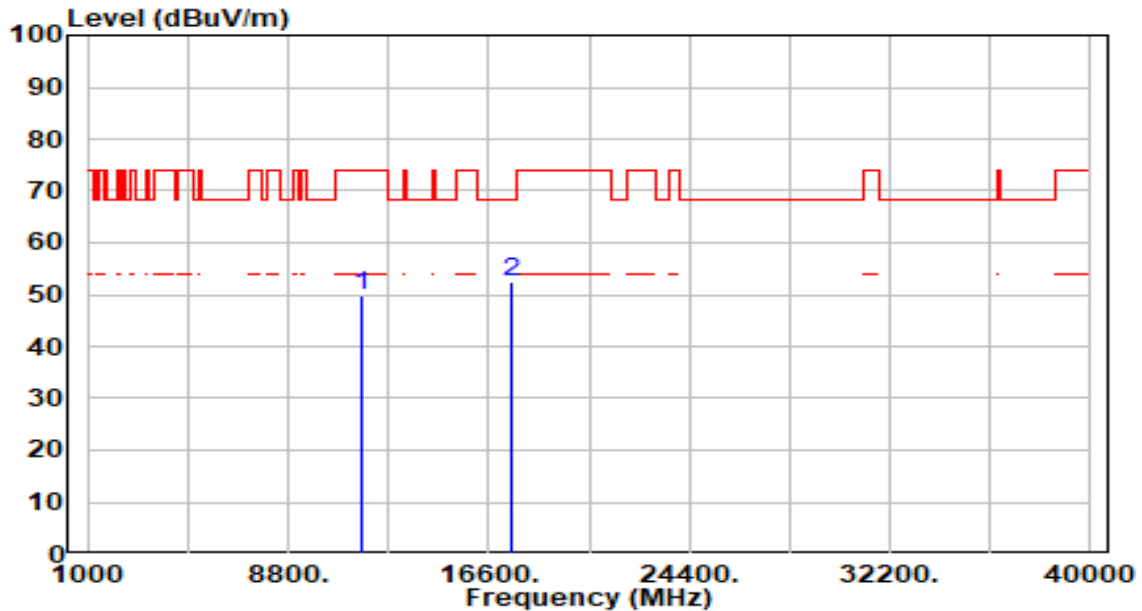


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	44.58	5.37	49.95	-24.05	74.00	300	2	Peak
2	* 17475.000	47.35	5.02	52.38	-15.82	68.20	300	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

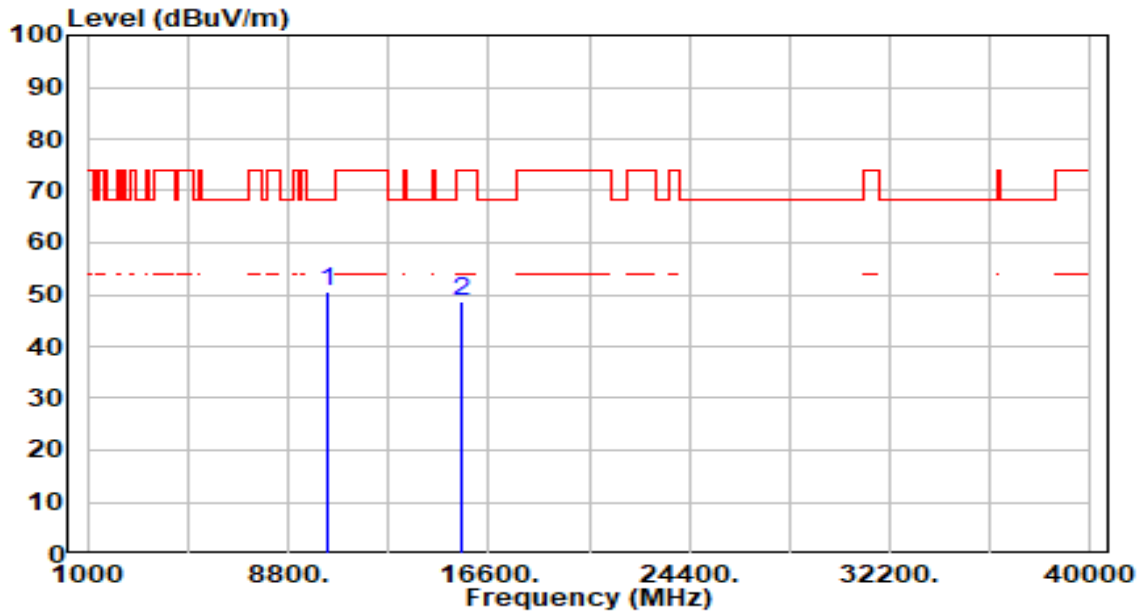


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	45.79	4.79	50.58	-17.62	68.20	100	26	Peak
2		15570.000	42.29	6.24	48.53	-25.47	74.00	100	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

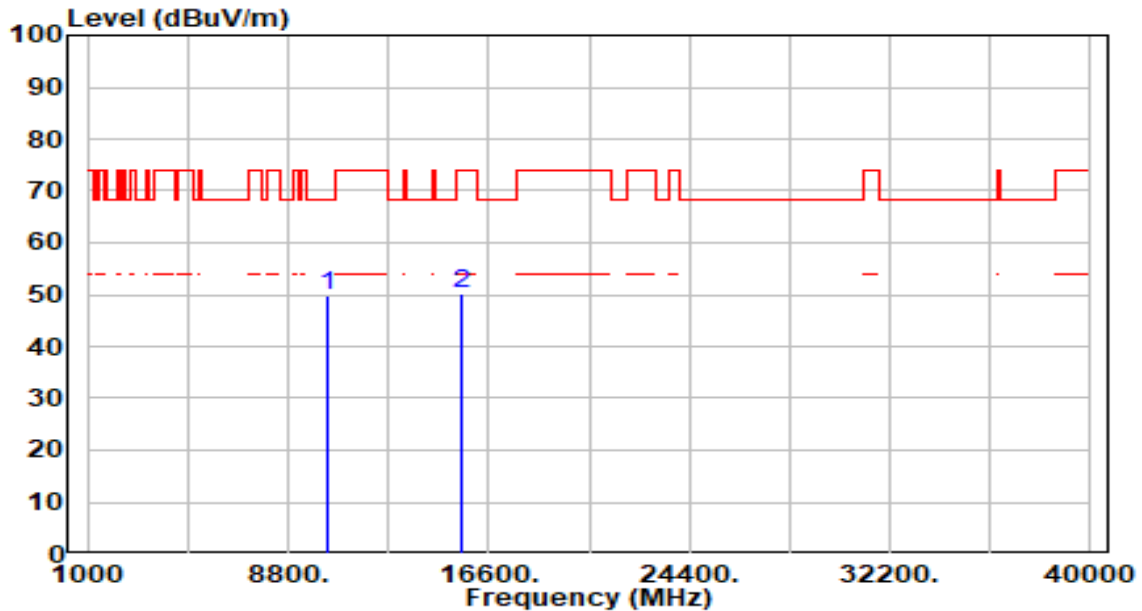


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	45.17	4.79	49.96	-18.24	68.20	300	186	Peak
2		15570.000	43.96	6.24	50.20	-23.80	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

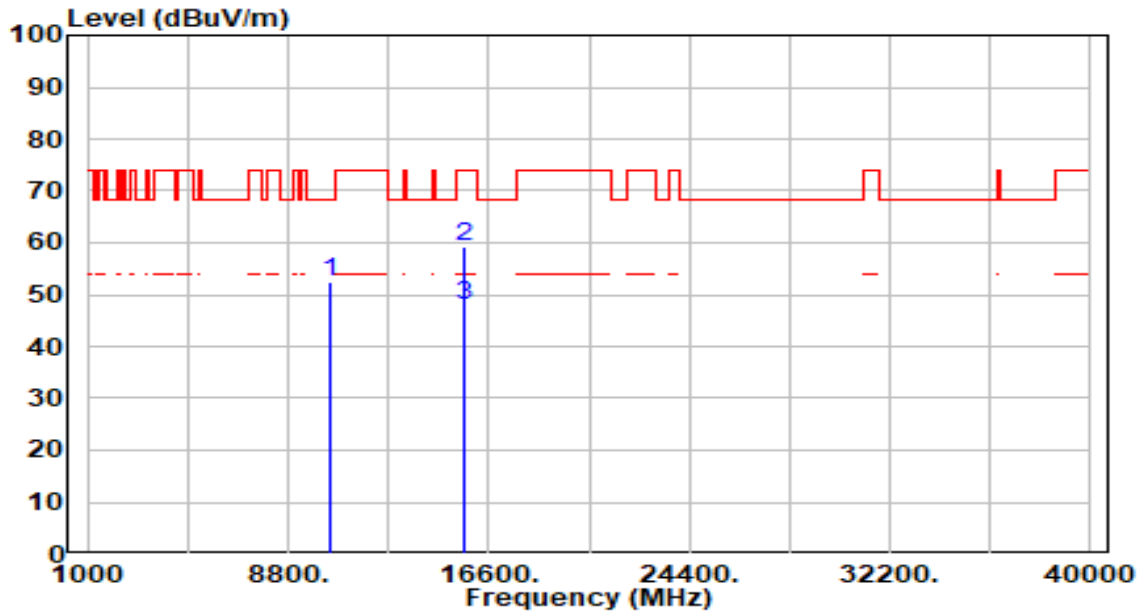


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10460.000	47.77	4.68	52.46	-15.74	68.20	100	296	Peak
2	*	15690.000	52.72	6.37	59.10	-14.90	74.00	200	225	Peak
3	*	15690.000	41.64	6.37	48.01	-5.99	54.00	200	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

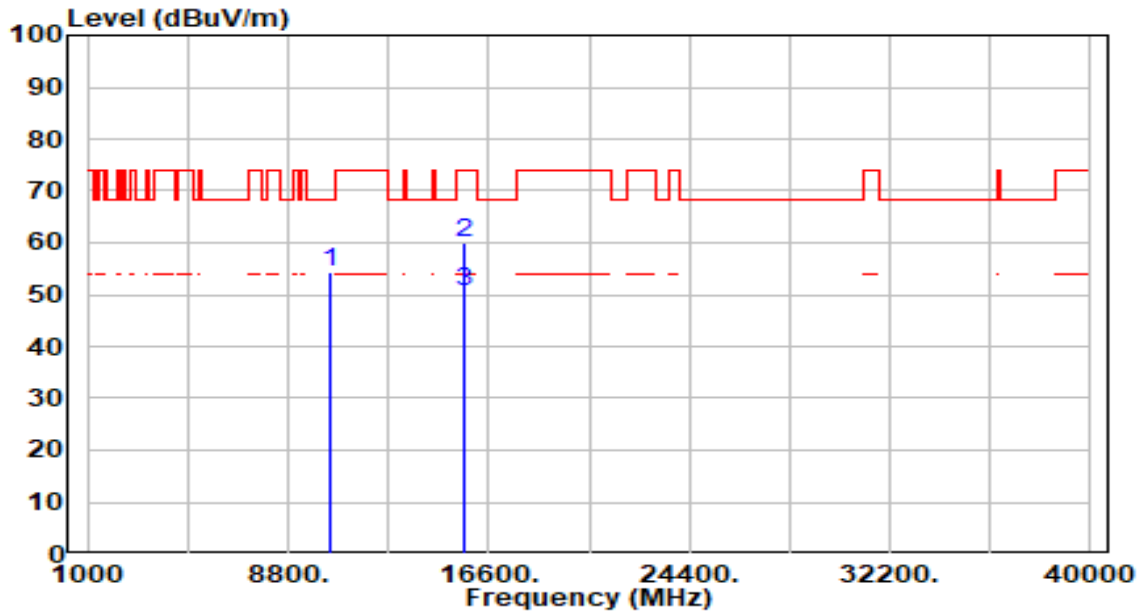


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	49.77	4.68	54.45	-13.75	68.20	220	0	Peak
2		15690.000	53.70	6.37	60.08	-13.92	74.00	100	5	Peak
3	*	15690.000	44.01	6.37	50.38	-3.62	54.00	100	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

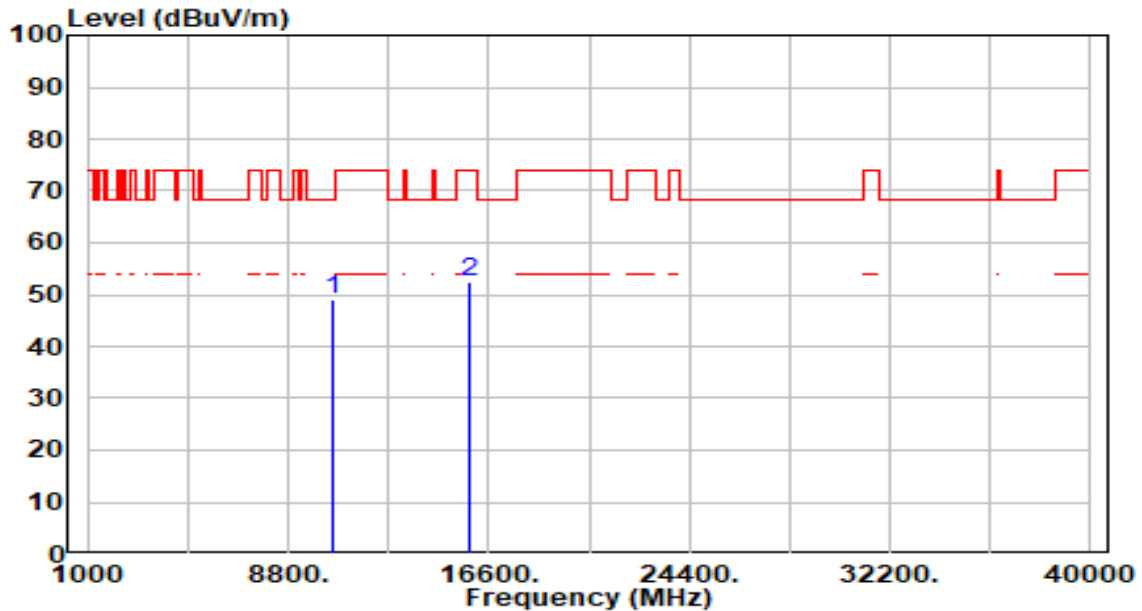


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	44.51	4.59	49.10	-19.10	68.20	200	298	Peak
2		15810.000	45.96	6.60	52.55	-21.45	74.00	200	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

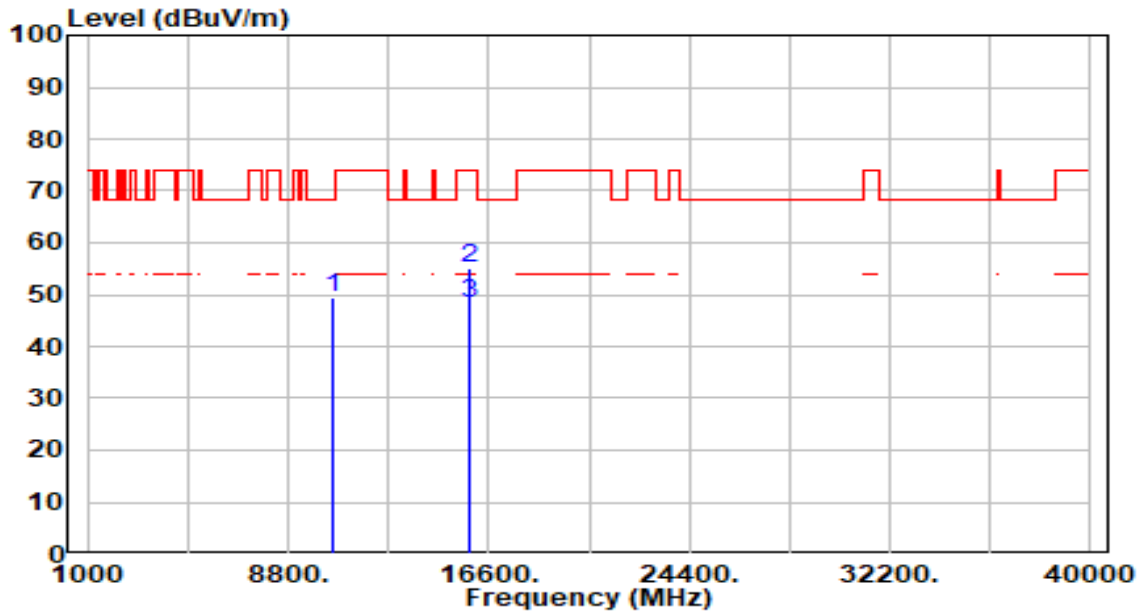


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	44.88	4.59	49.47	-18.73	68.20	100	0	Peak
2		15810.000	48.34	6.60	54.94	-19.06	74.00	100	0	Peak
3	*	15810.000	41.71	6.60	48.31	-5.69	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

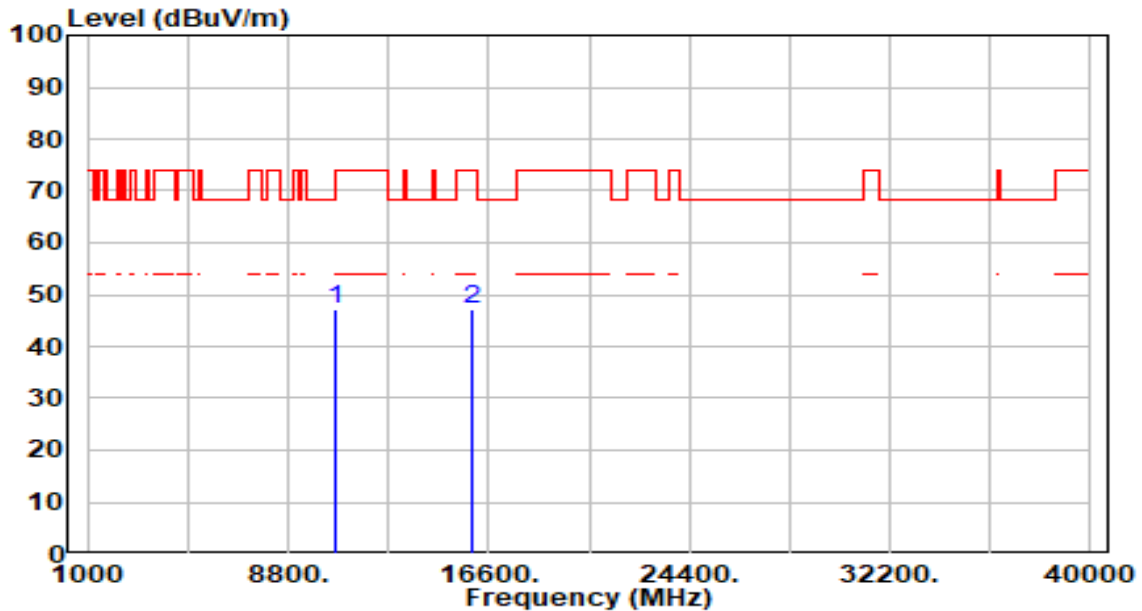


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10620.000	42.62	4.56	47.18	-26.82	74.00	200	95	Peak
2		15930.000	40.45	6.66	47.10	-26.90	74.00	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

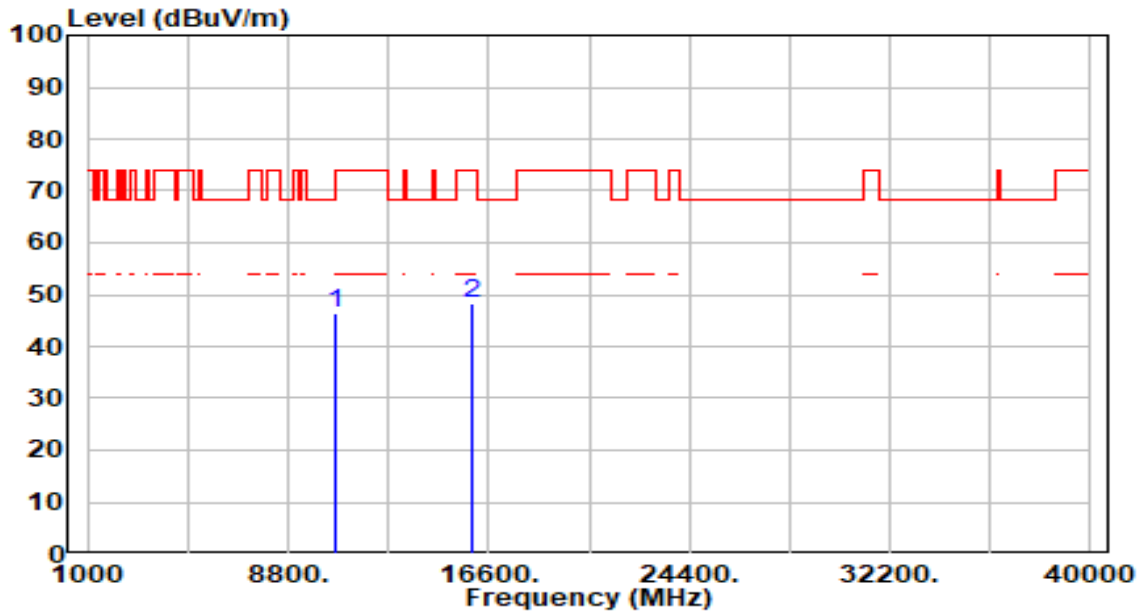


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.77	4.56	46.33	-27.67	74.00	100	303	Peak
2	* 15930.000	41.53	6.66	48.19	-25.81	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

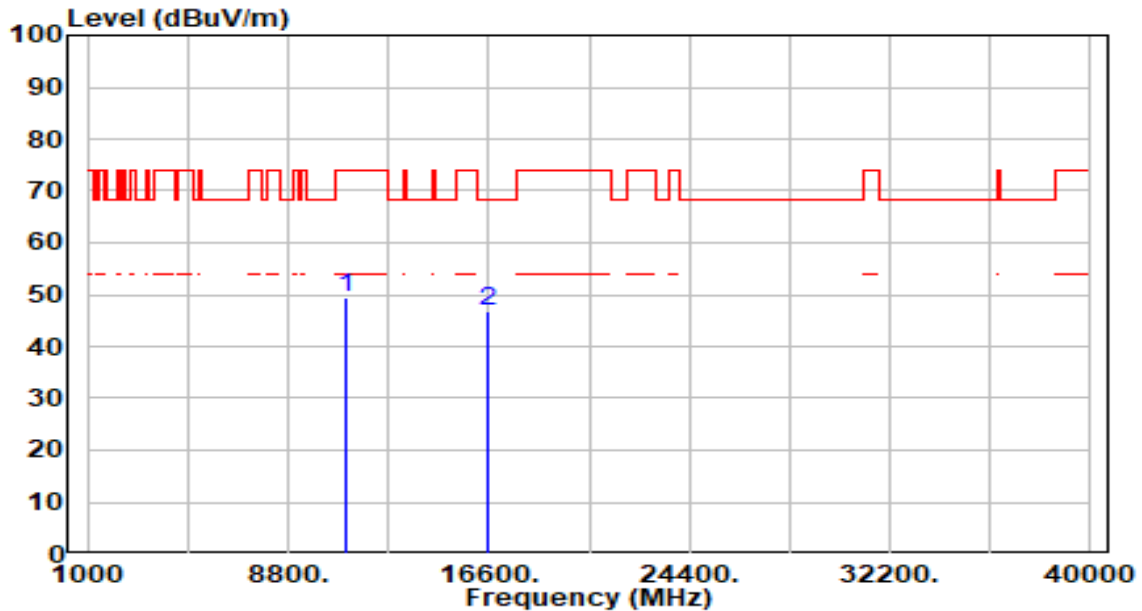


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	45.03	4.49	49.53	-24.47	74.00	200	161	Peak
2	* 16530.000	40.87	6.05	46.91	-21.29	68.20	200	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

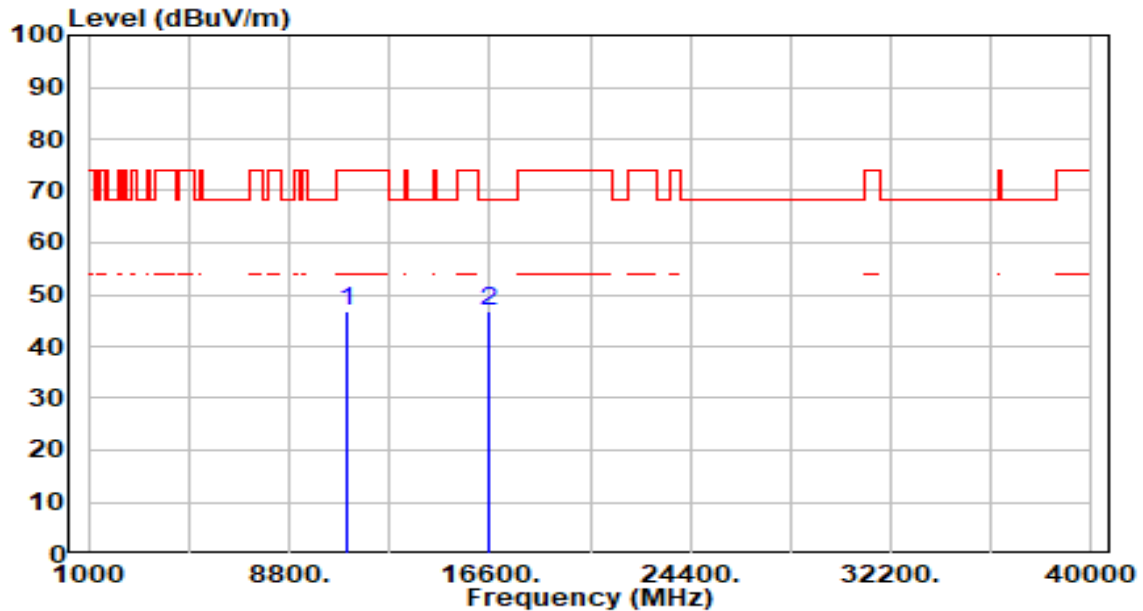


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.15	4.49	46.65	-27.35	74.00	100	7	Peak
2	* 16530.000	40.82	6.05	46.86	-21.34	68.20	100	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

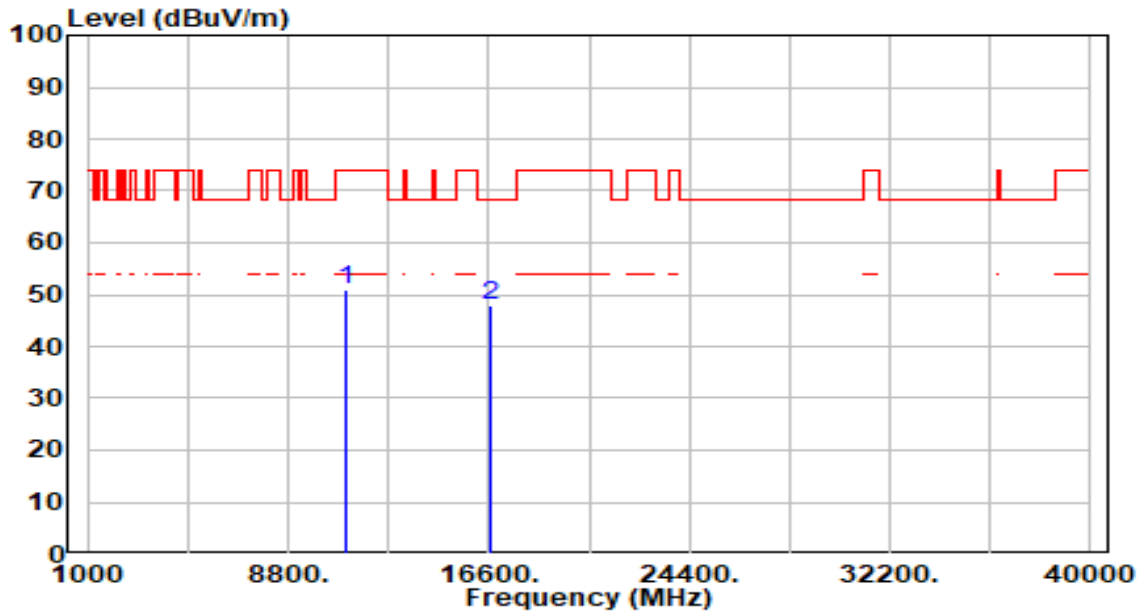


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	46.41	4.71	51.12	-22.88	74.00	200	157	Peak
2	*	16650.000	41.92	6.00	47.92	-20.28	68.20	200	302	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

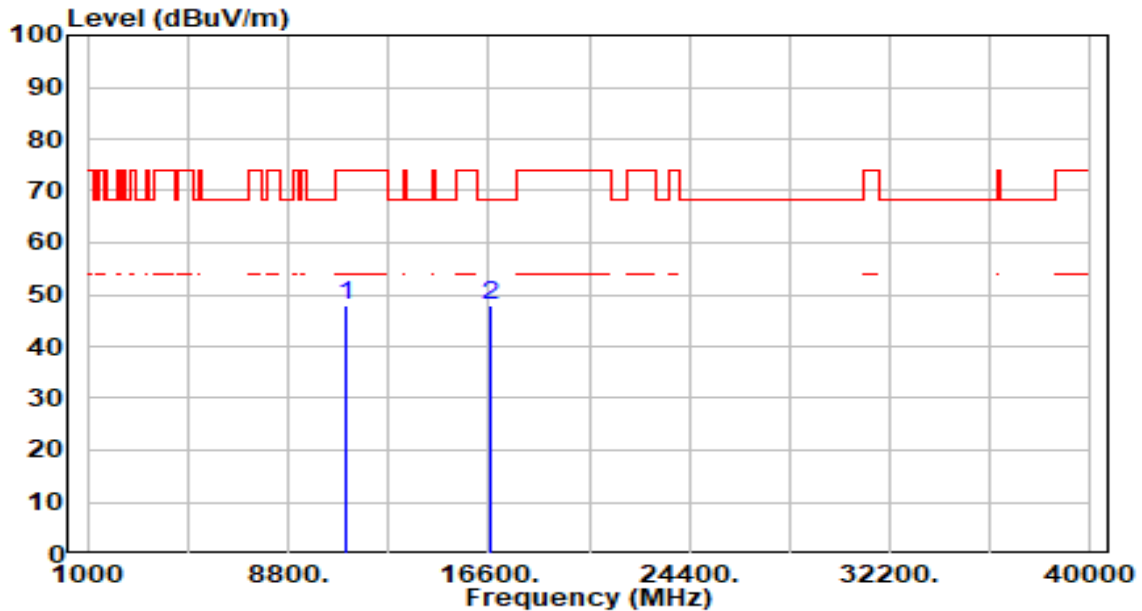


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.15	4.71	47.86	-26.14	74.00	100	152	Peak
2	* 16650.000	42.05	6.00	48.05	-20.15	68.20	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

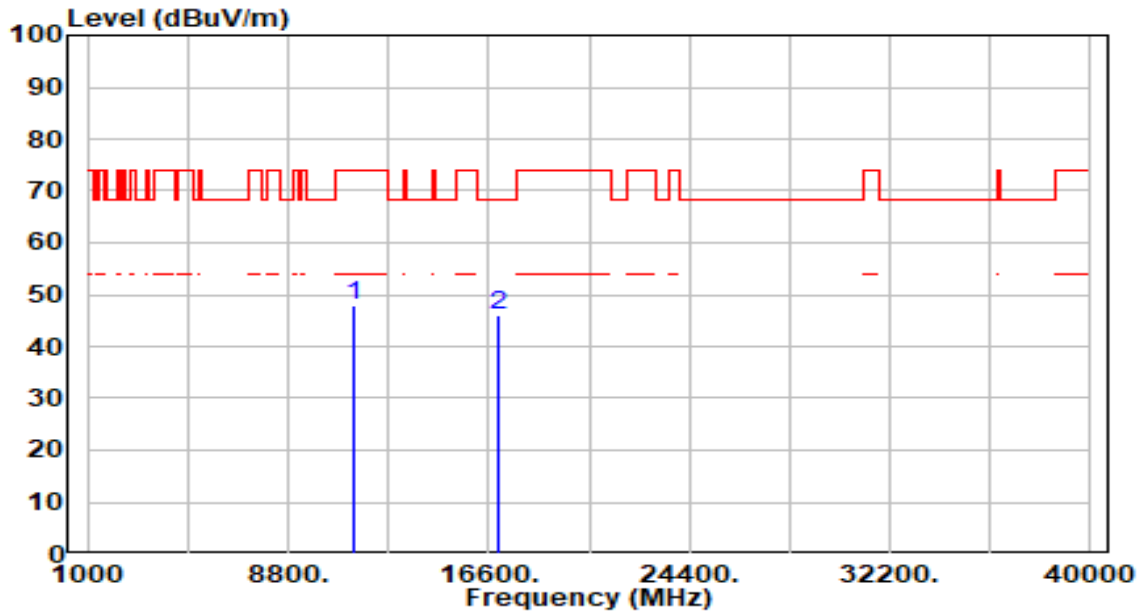


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	42.75	5.14	47.90	-26.10	74.00	200	320	Peak
2	*	17010.000	40.25	5.74	45.99	-22.21	68.20	200	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

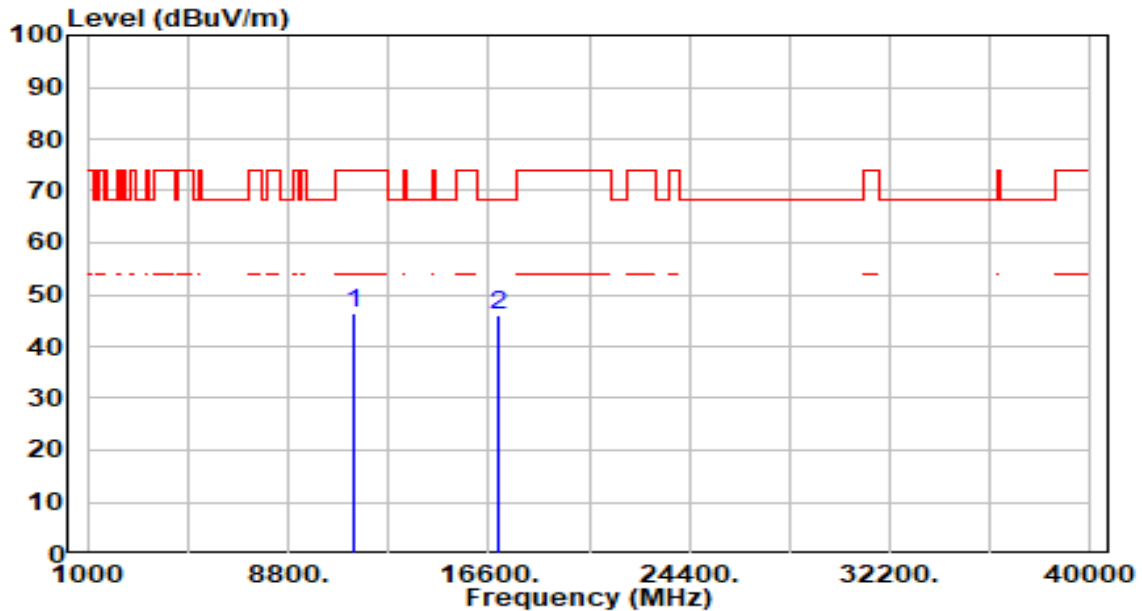


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.17	5.14	46.31	-27.69	74.00	100	359	Peak
2	* 17010.000	40.14	5.74	45.88	-22.32	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

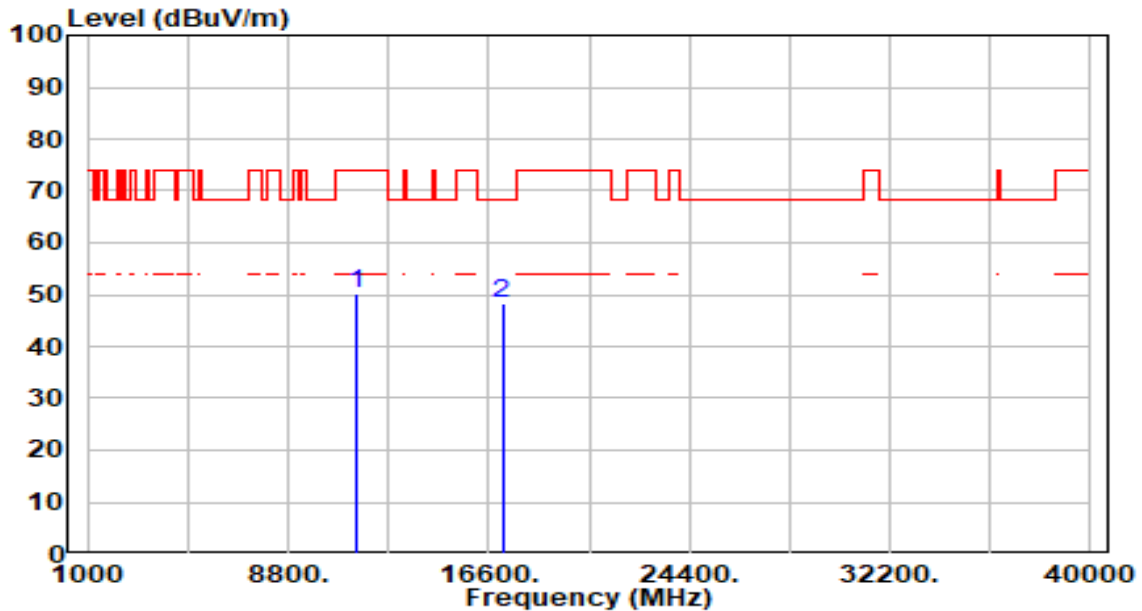


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	45.00	5.23	50.23	-23.77	74.00	200	300	Peak
2	* 17130.000	42.73	5.48	48.21	-19.99	68.20	200	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

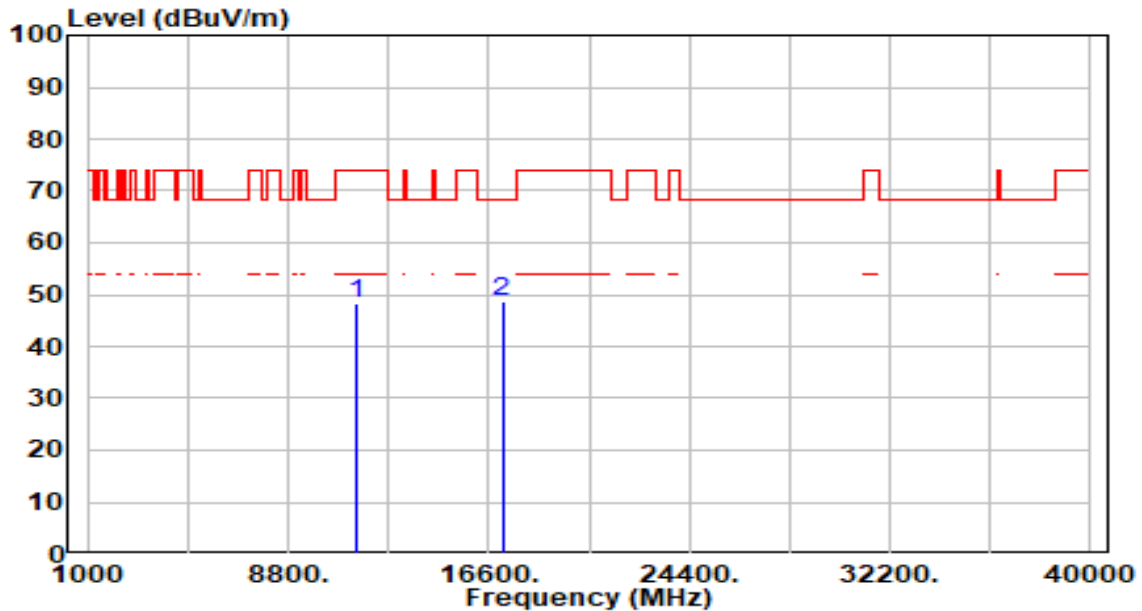


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	43.01	5.23	48.24	-25.76	74.00	100	360	Peak
2	* 17130.000	43.21	5.48	48.69	-19.51	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

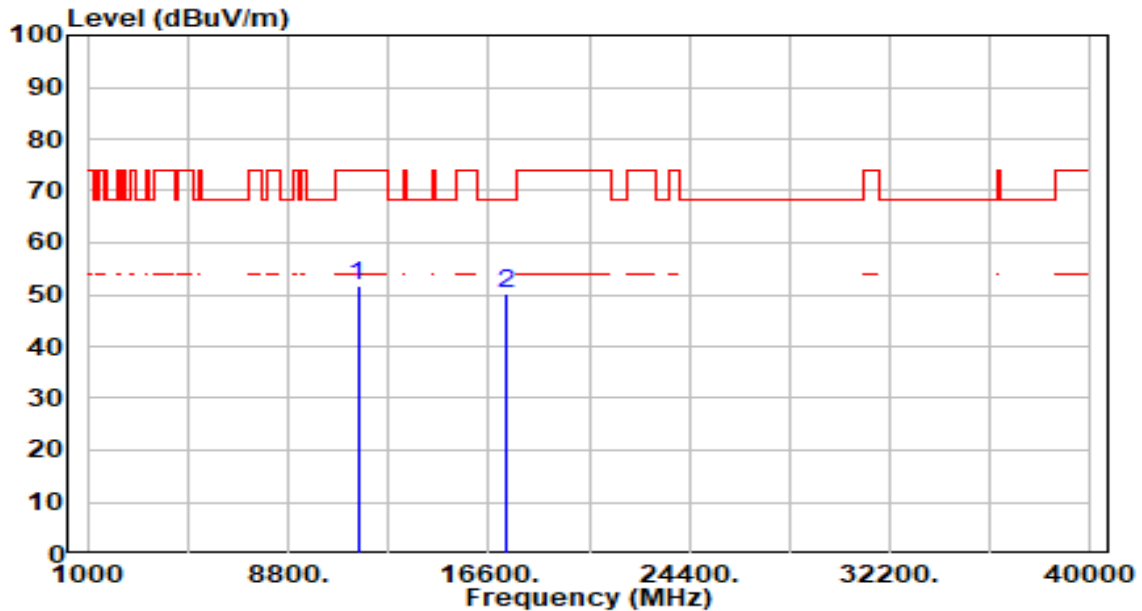


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	46.42	5.29	51.72	-22.28	74.00	200	313	Peak
2	* 17265.000	44.86	5.18	50.04	-18.16	68.20	200	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

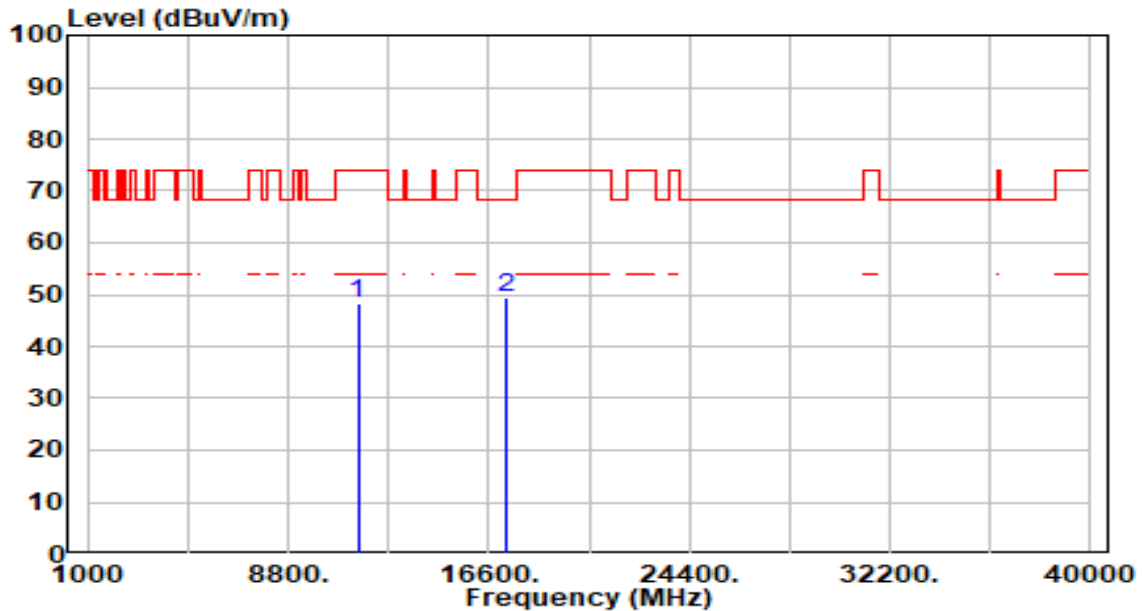


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.06	5.29	48.35	-25.65	74.00	114	358	Peak
2	* 17265.000	44.31	5.18	49.50	-18.70	68.20	109	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

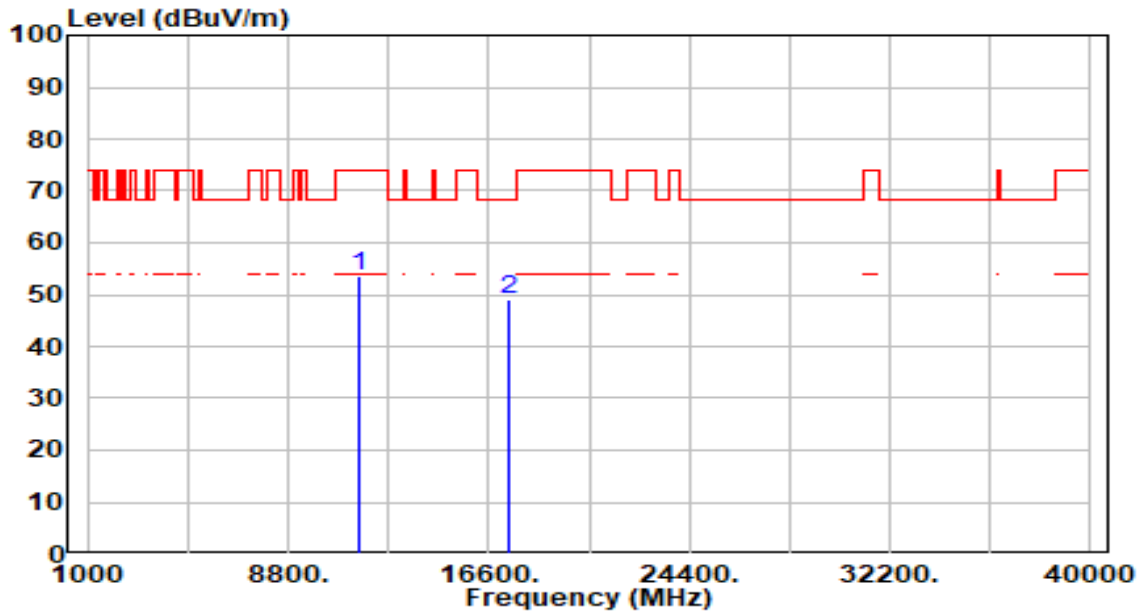


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	48.11	5.37	53.47	-20.53	74.00	180	355	Peak
2	*	17385.000	44.27	4.92	49.19	-19.01	68.20	200	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

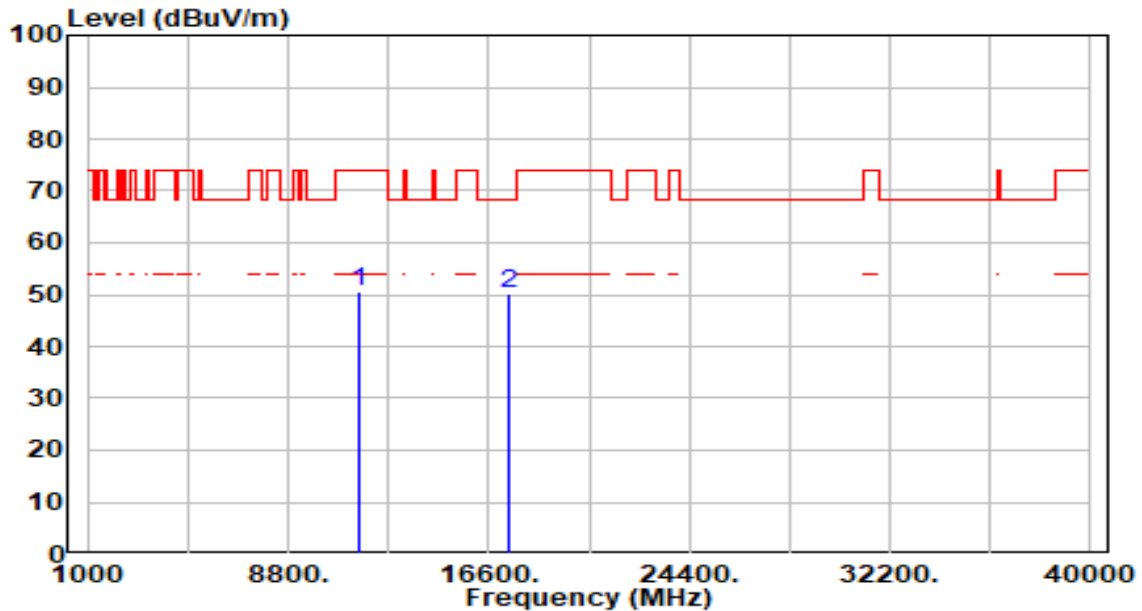


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	45.04	5.37	50.40	-23.60	74.00	100	30	Peak
2	* 17385.000	45.44	4.92	50.36	-17.84	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

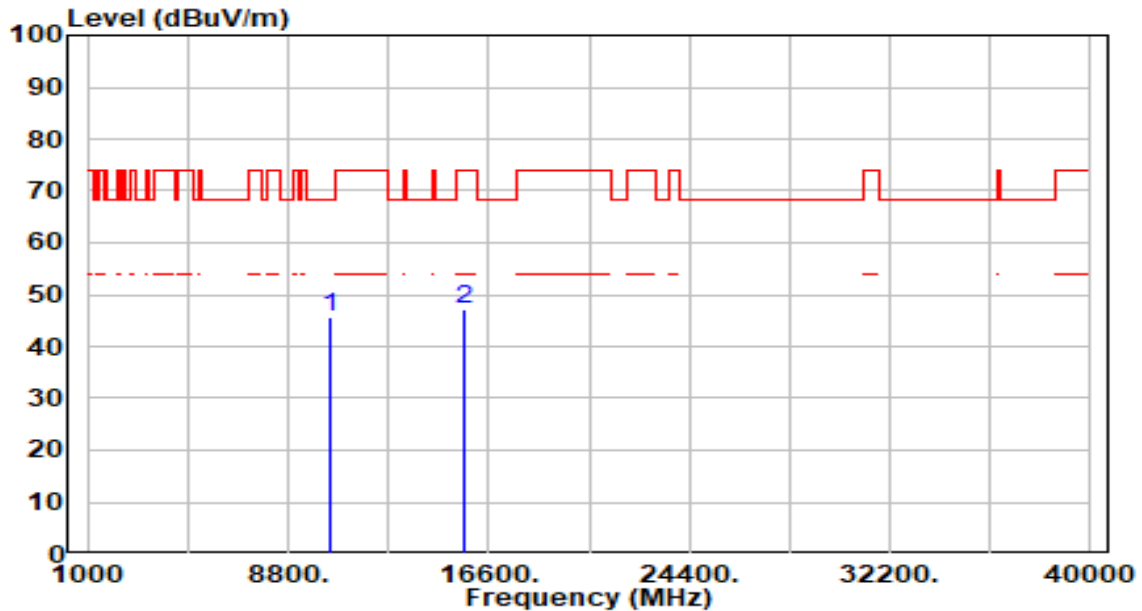


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.07	4.74	45.82	-22.38	68.20	200	106	Peak
2		15630.000	41.06	6.25	47.32	-26.68	74.00	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

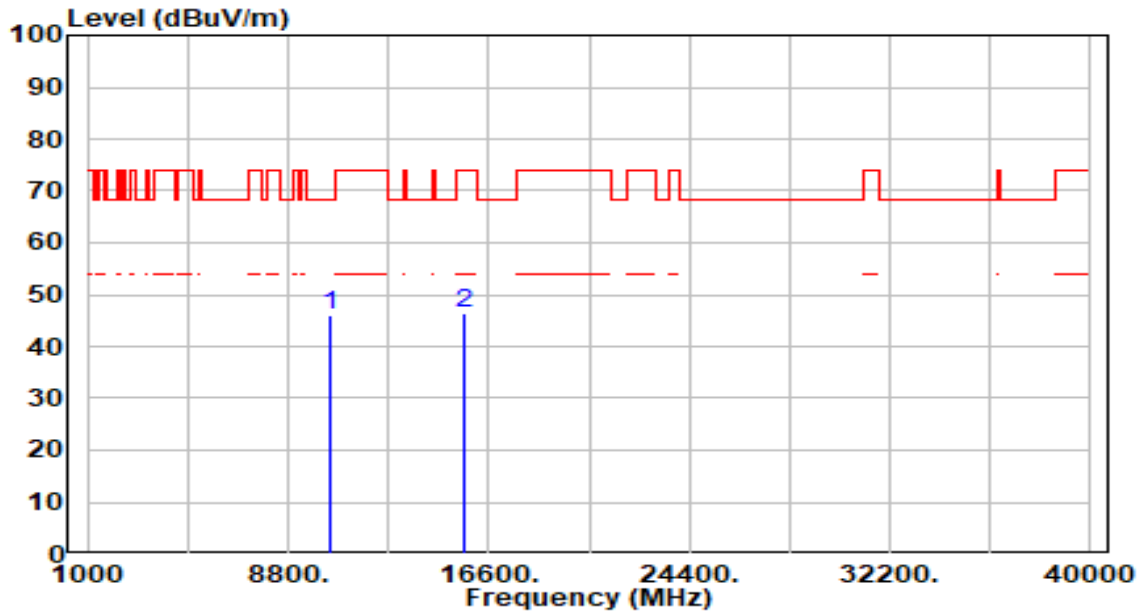


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.46	4.74	46.20	-22.00	68.20	100	152	Peak
2		15630.000	40.31	6.25	46.56	-27.44	74.00	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

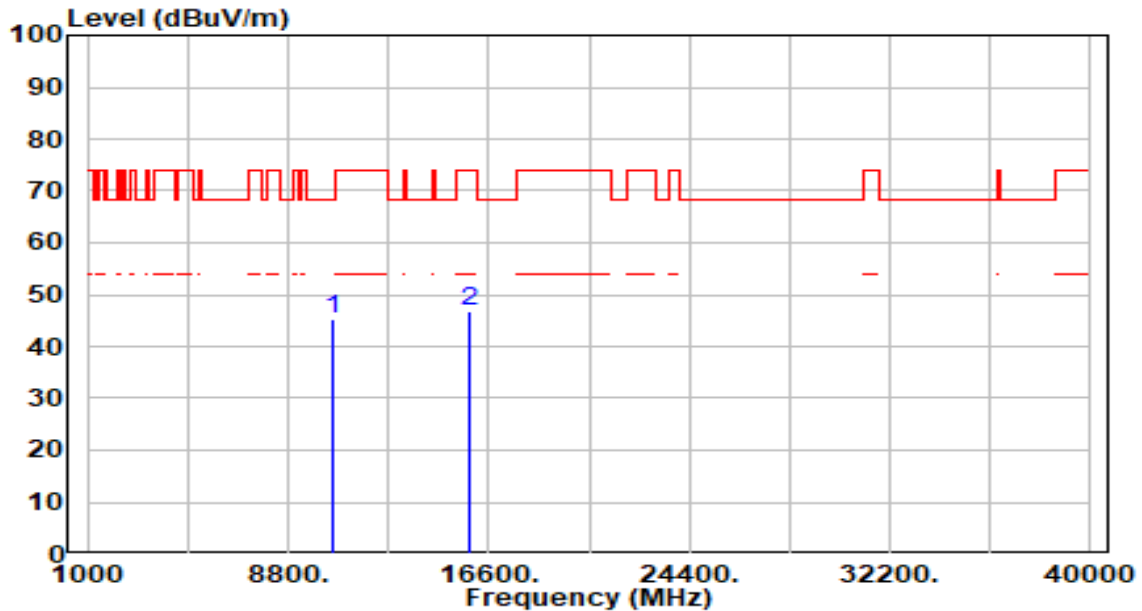


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.58	4.56	45.15	-23.05	68.20	200	227	Peak
2		15870.000	40.13	6.63	46.75	-27.25	74.00	200	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

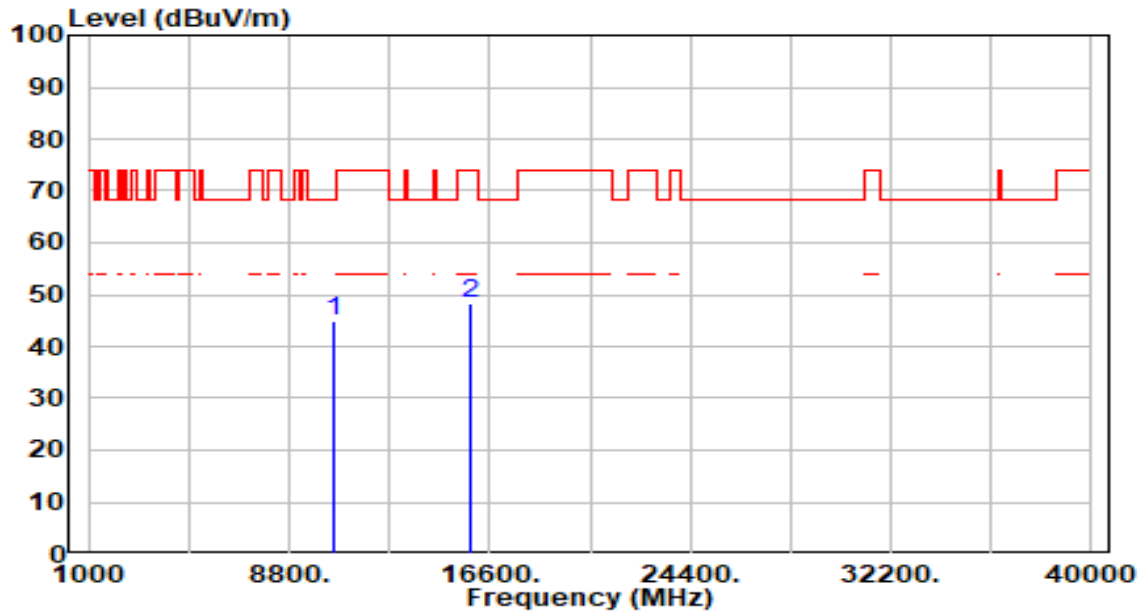


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.22	4.56	44.78	-23.42	68.20	100	241	Peak
2		15870.000	41.51	6.63	48.13	-25.87	74.00	100	296	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

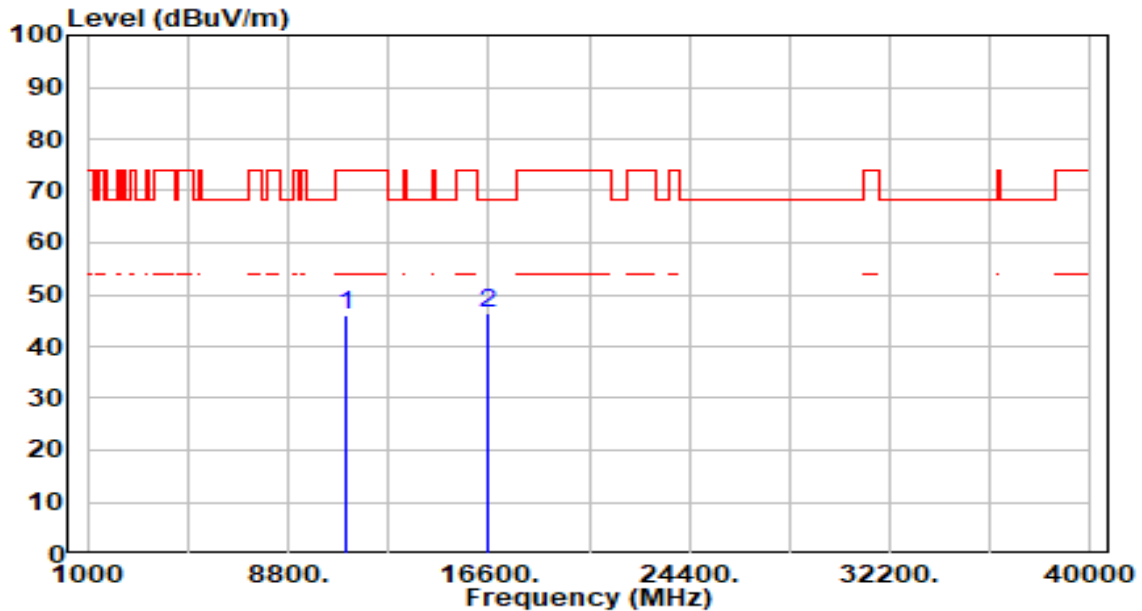


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.35	4.60	45.95	-28.05	74.00	200	260	Peak
2	* 16590.000	40.52	6.00	46.52	-21.68	68.20	200	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

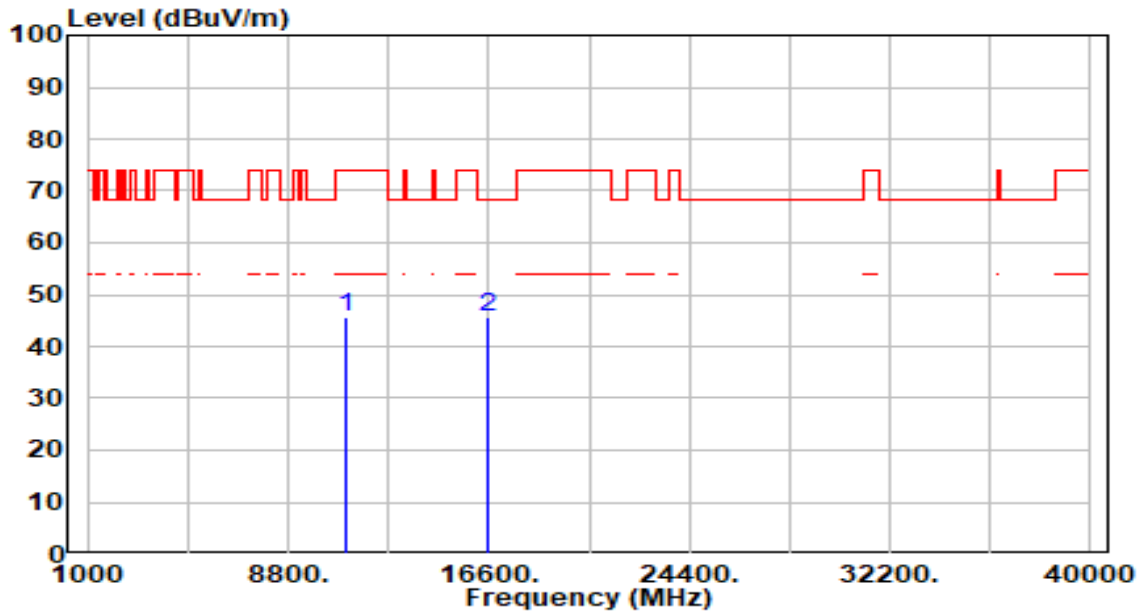


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.02	4.60	45.62	-28.38	74.00	100	185	Peak
2	* 16590.000	39.64	6.00	45.64	-22.56	68.20	100	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

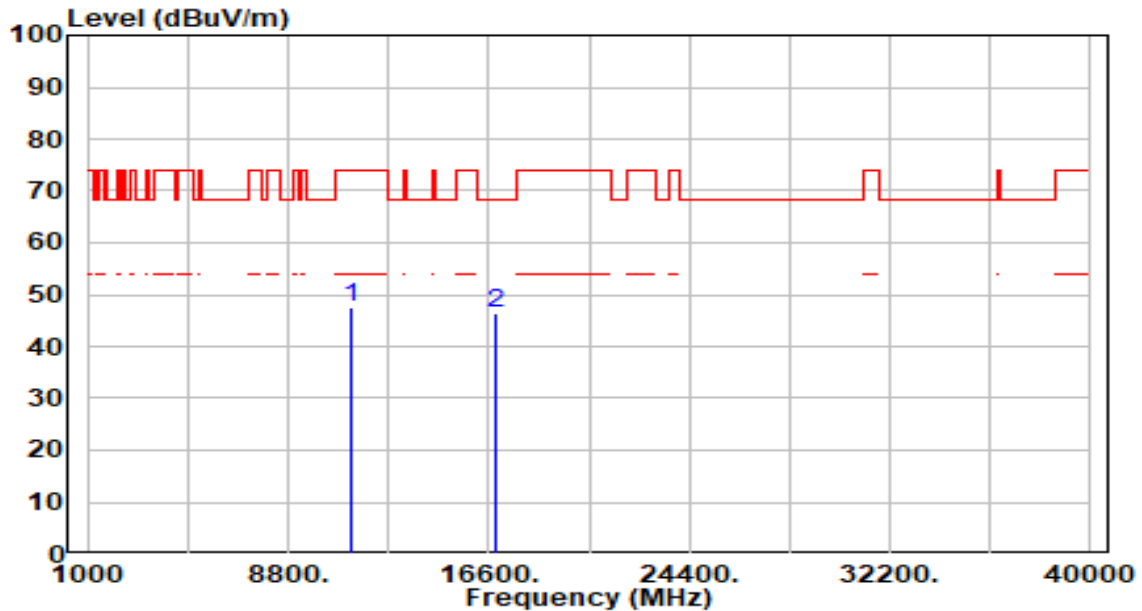


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.37	5.00	47.38	-26.62	74.00	200	209	Peak
2	* 16830.000	40.35	5.98	46.33	-21.87	68.20	200	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

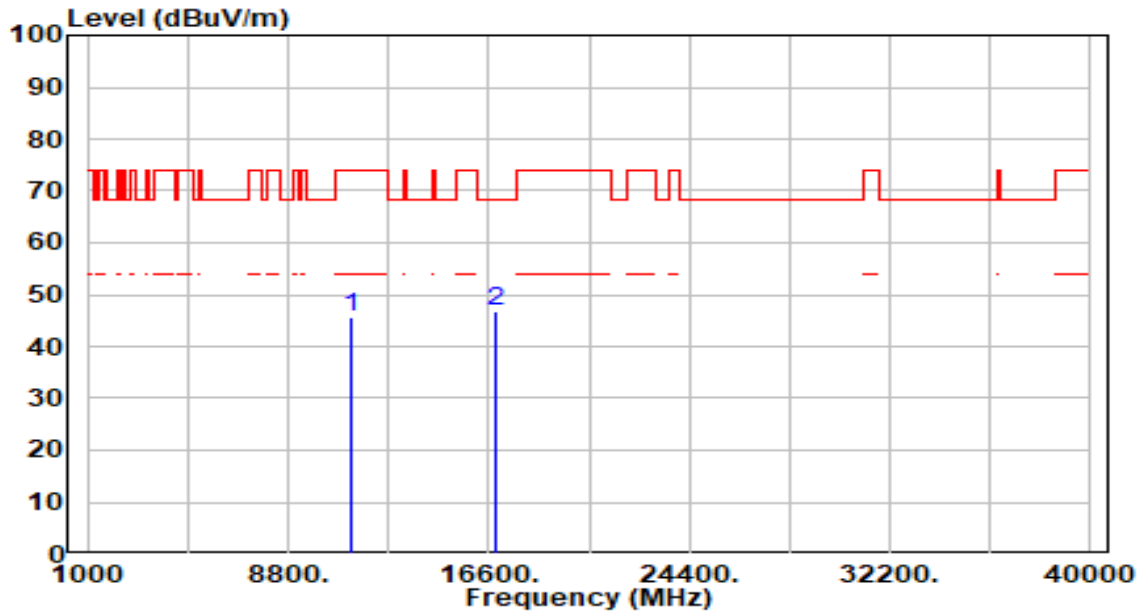


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.48	5.00	45.48	-28.52	74.00	100	49	Peak
2	*	16830.000	40.80	5.98	46.78	-21.42	68.20	100	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

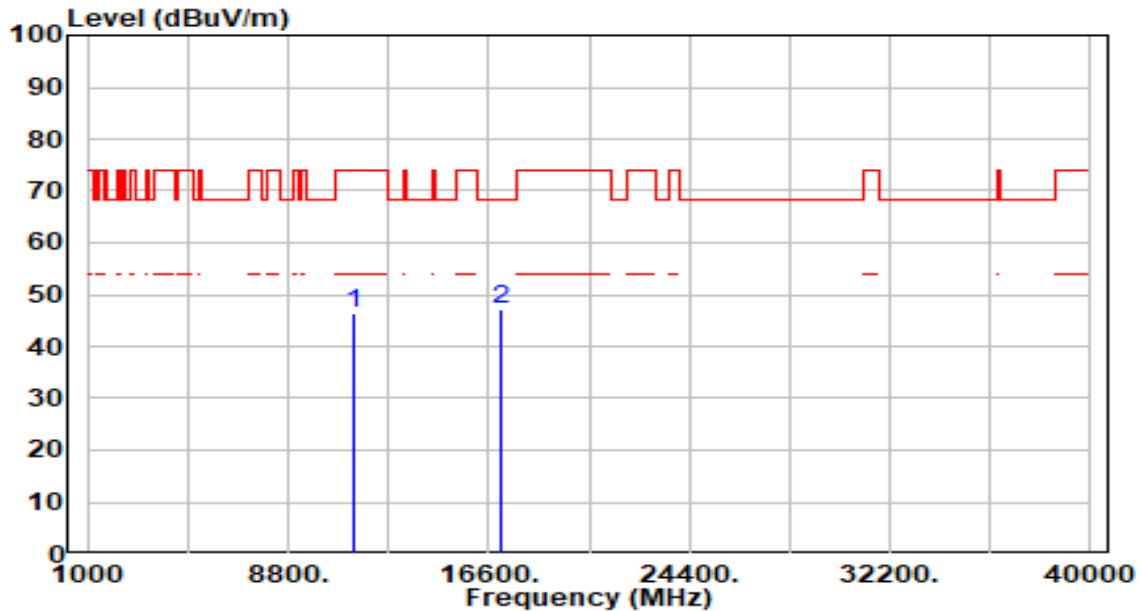


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.36	5.19	46.55	-27.45	74.00	200	82	Peak
2	* 17070.000	41.53	5.61	47.14	-21.06	68.20	200	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

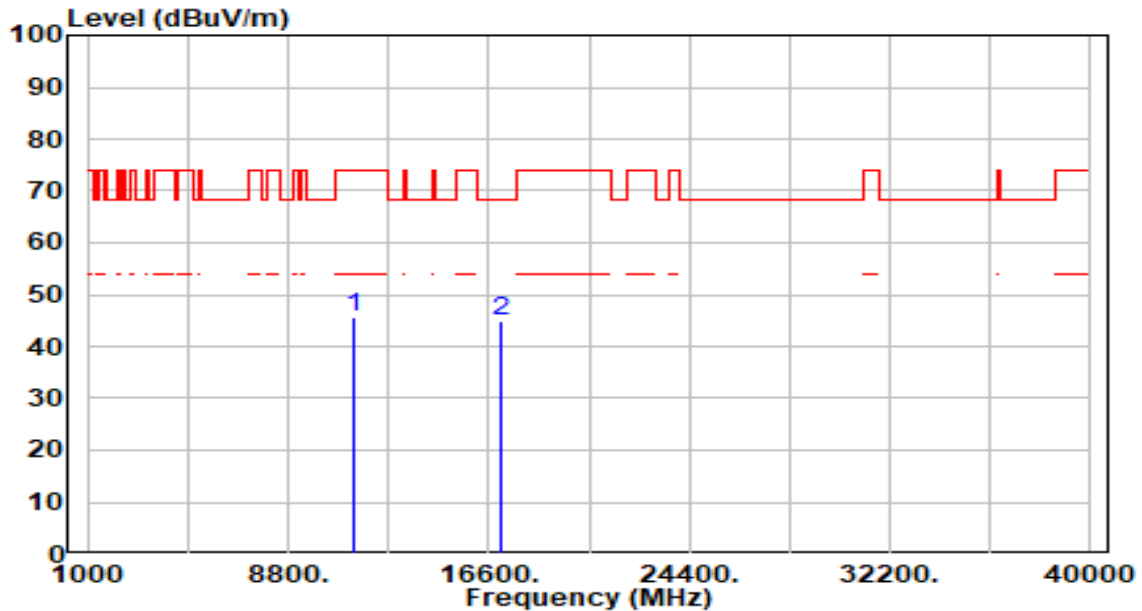


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	40.49	5.19	45.68	-28.32	74.00	124	348	Peak
2	* 17070.000	39.15	5.61	44.76	-23.44	68.20	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

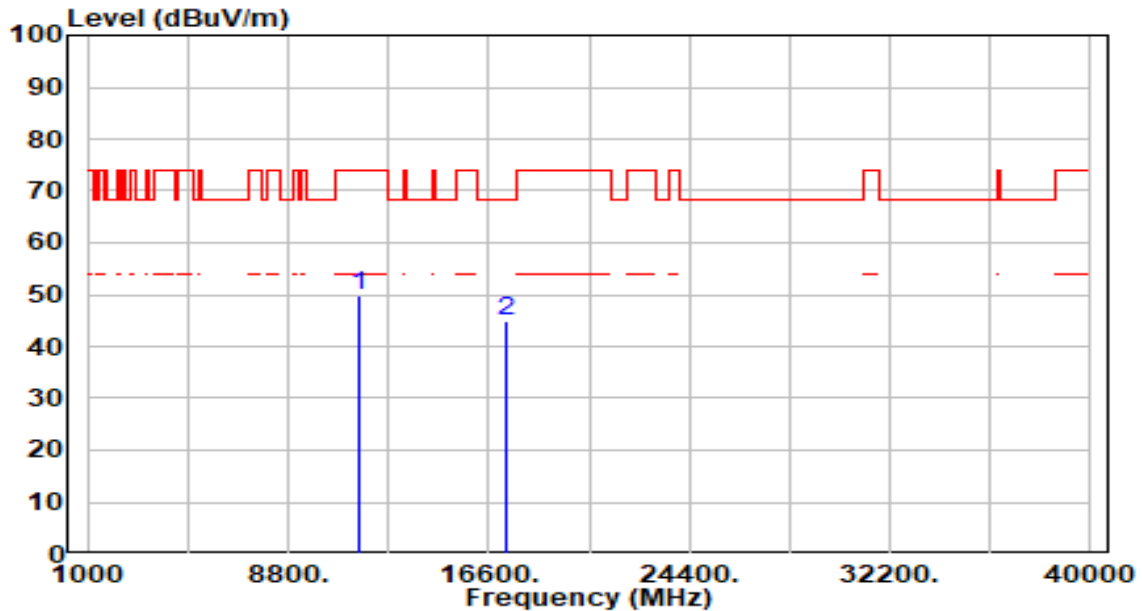


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	44.31	5.33	49.64	-24.36	74.00	200	317	Peak
2	* 17325.000	39.74	5.05	44.79	-23.41	68.20	200	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

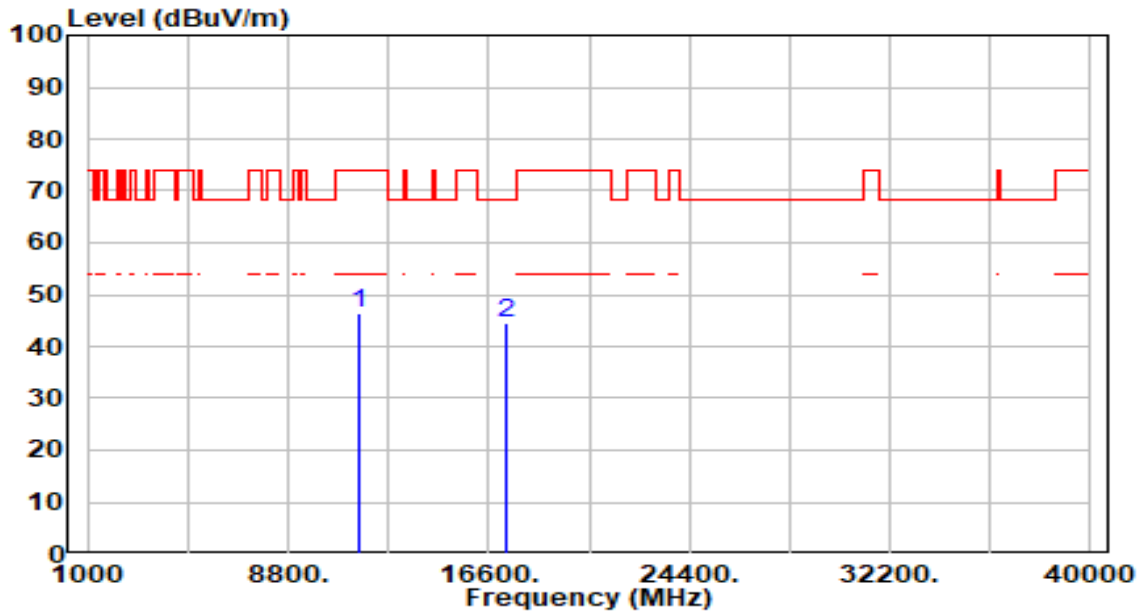


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.92	5.33	46.25	-27.75	74.00	100	284	Peak
2	* 17325.000	39.46	5.05	44.51	-23.69	68.20	100	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1.2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

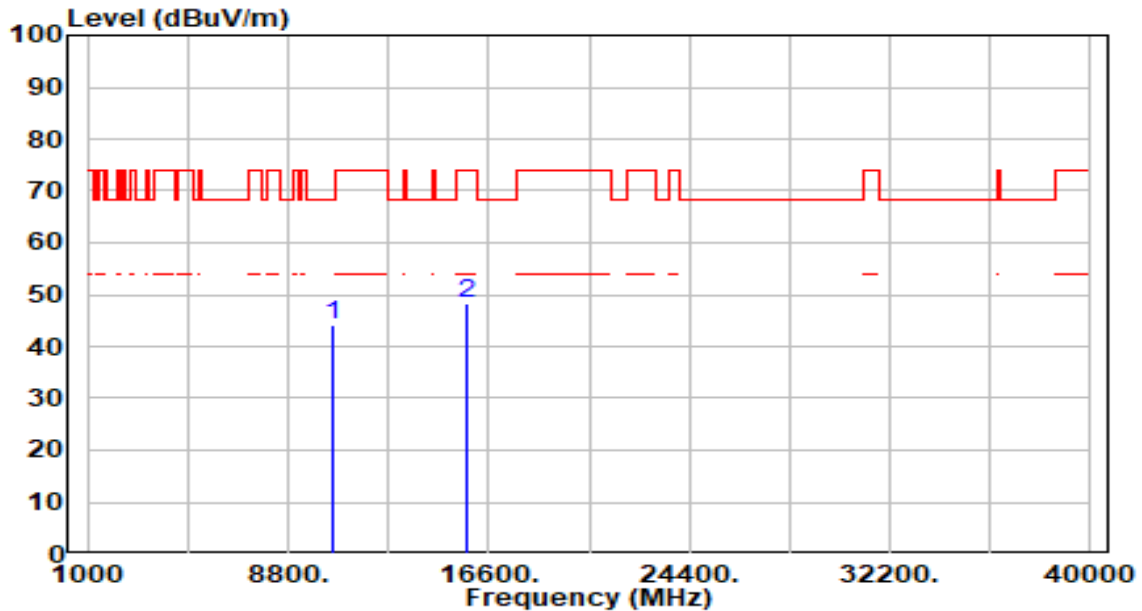


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.59	4.62	44.22	-23.98	68.20	200	180	Peak
2		15750.000	41.69	6.49	48.18	-25.82	74.00	200	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1.2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

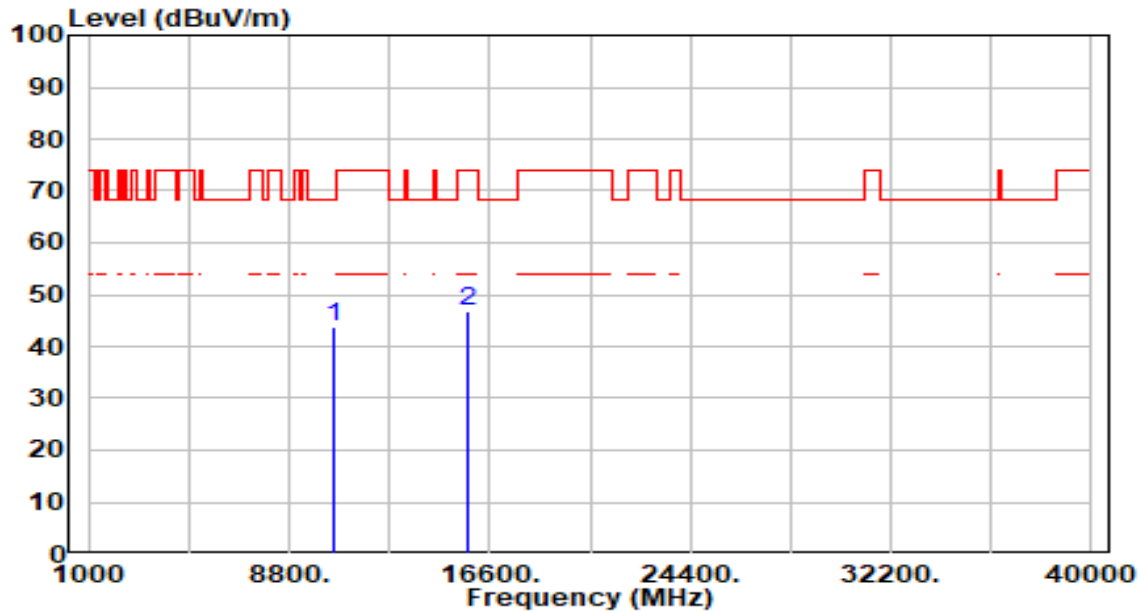


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.30	4.62	43.93	-24.27	68.20	100	280	Peak
2		15750.000	40.35	6.49	46.85	-27.15	74.00	100	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

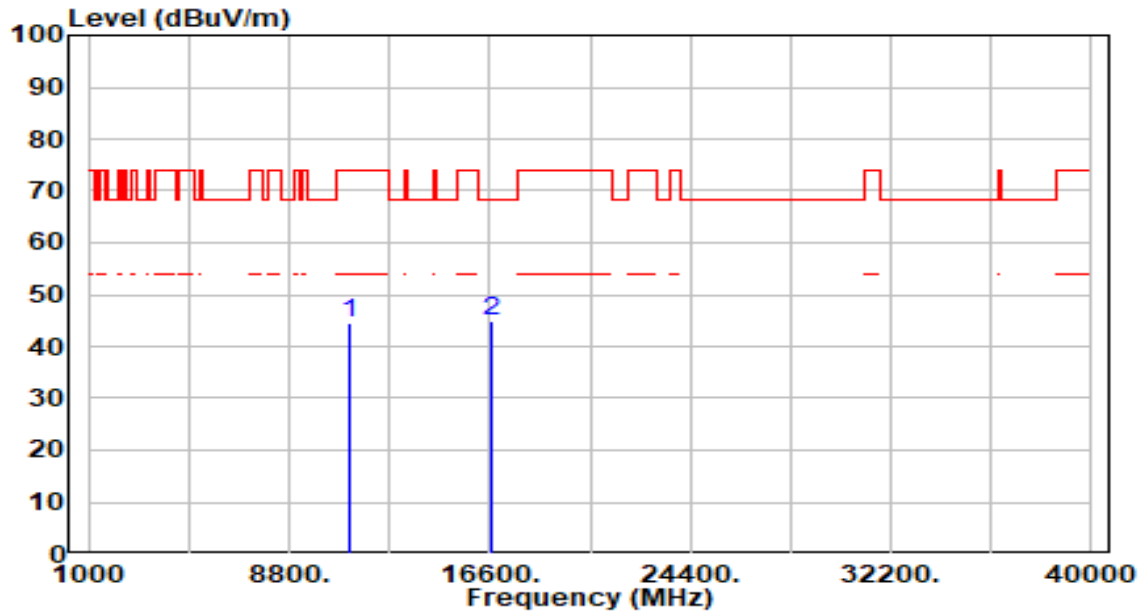


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	39.79	4.82	44.61	-29.39	74.00	200	119	Peak
2	*	16710.000	38.97	6.01	44.98	-23.22	68.20	200	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

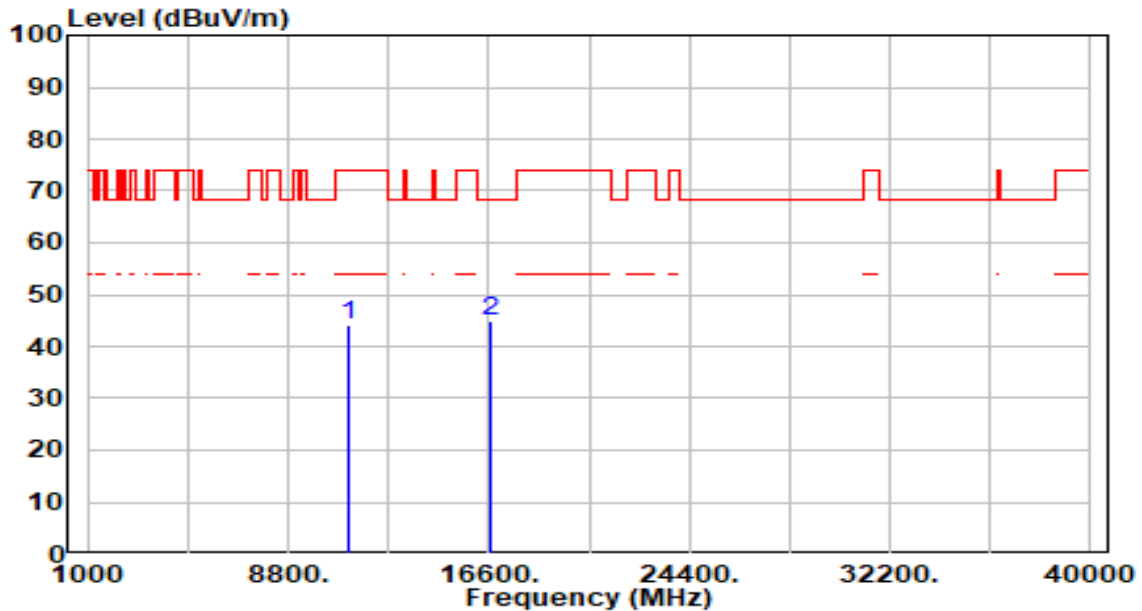

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	39.45	4.82	44.27	-29.73	74.00	100	12	Peak
2	* 16710.000	38.99	6.01	44.99	-23.21	68.20	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2.Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3.Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4.Test Setup

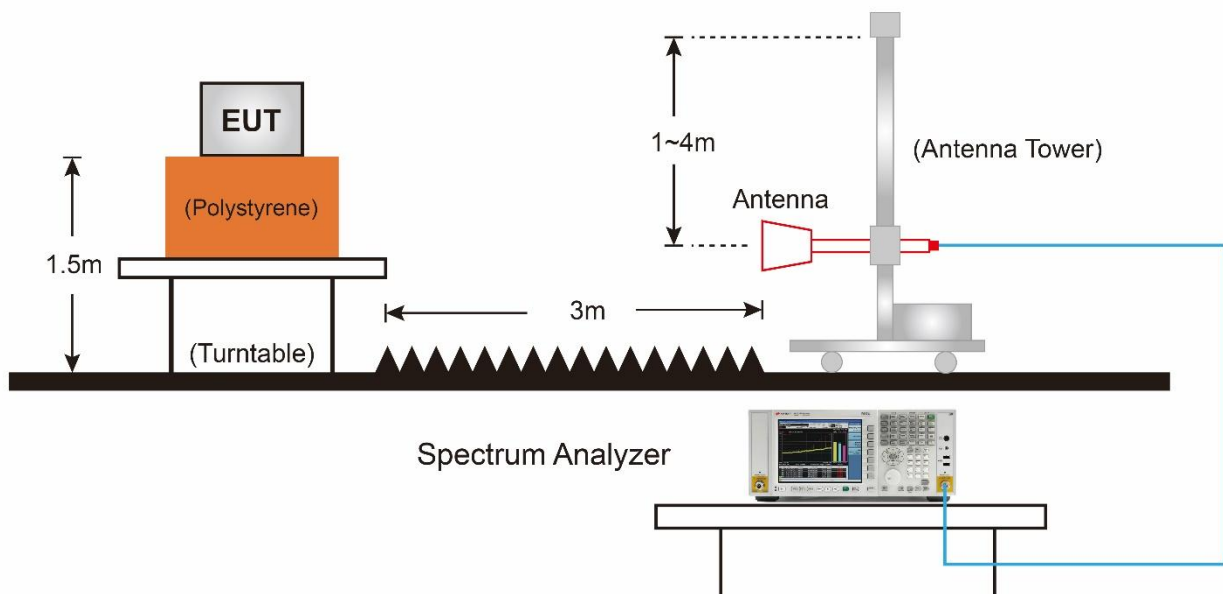

7.9.5.Test Result

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

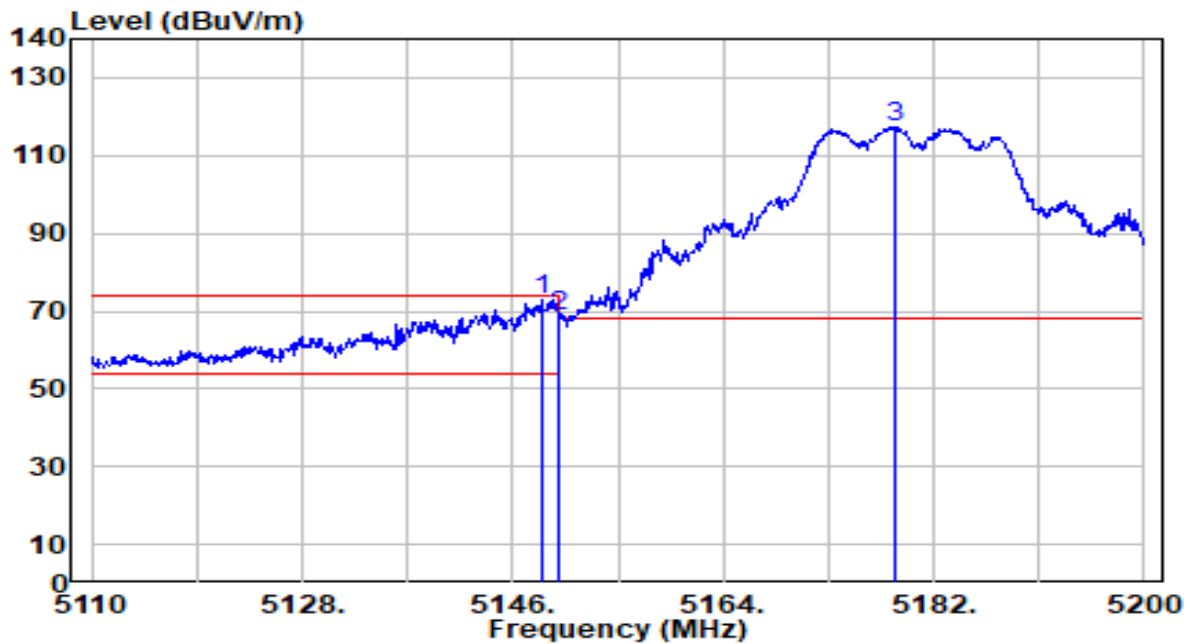


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.430	72.50	0.65	73.15	-0.85	74.00	286	197	Peak
2		5150.000	67.90	0.65	68.56	-5.44	74.00	286	197	Peak
3		5178.760	116.82	0.68	117.51	N/A	N/A	286	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

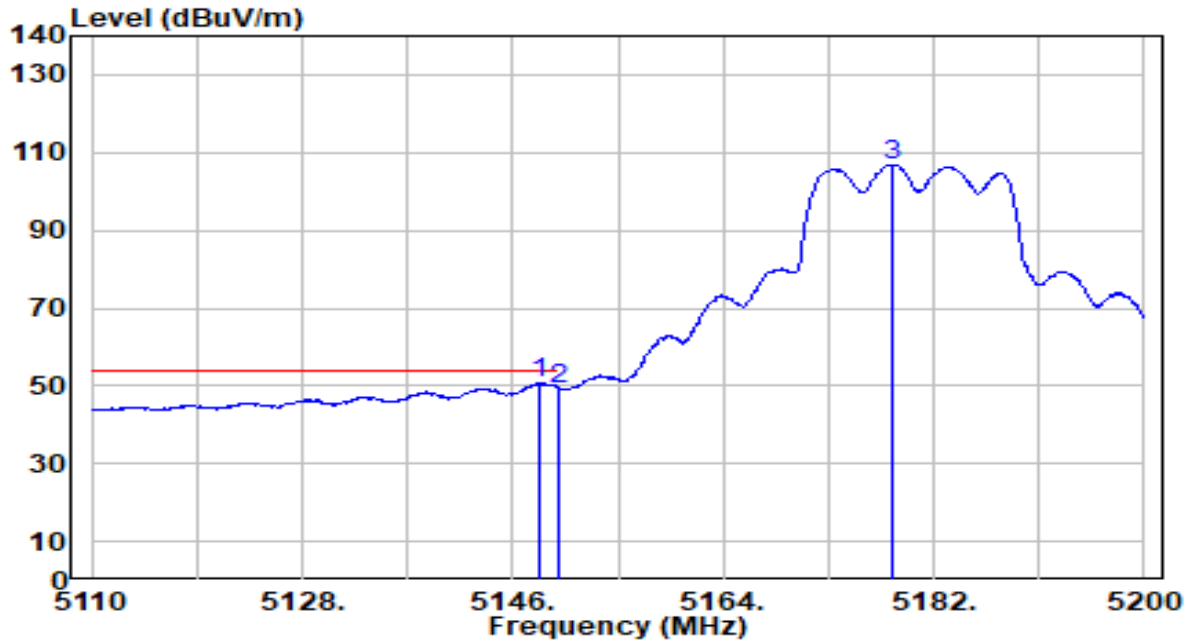


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	49.92	0.65	50.58	-3.42	54.00	286	197	Average
2		5150.000	48.74	0.65	49.39	-4.61	54.00	286	197	Average
3		5178.490	106.20	0.68	106.88	N/A	N/A	286	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

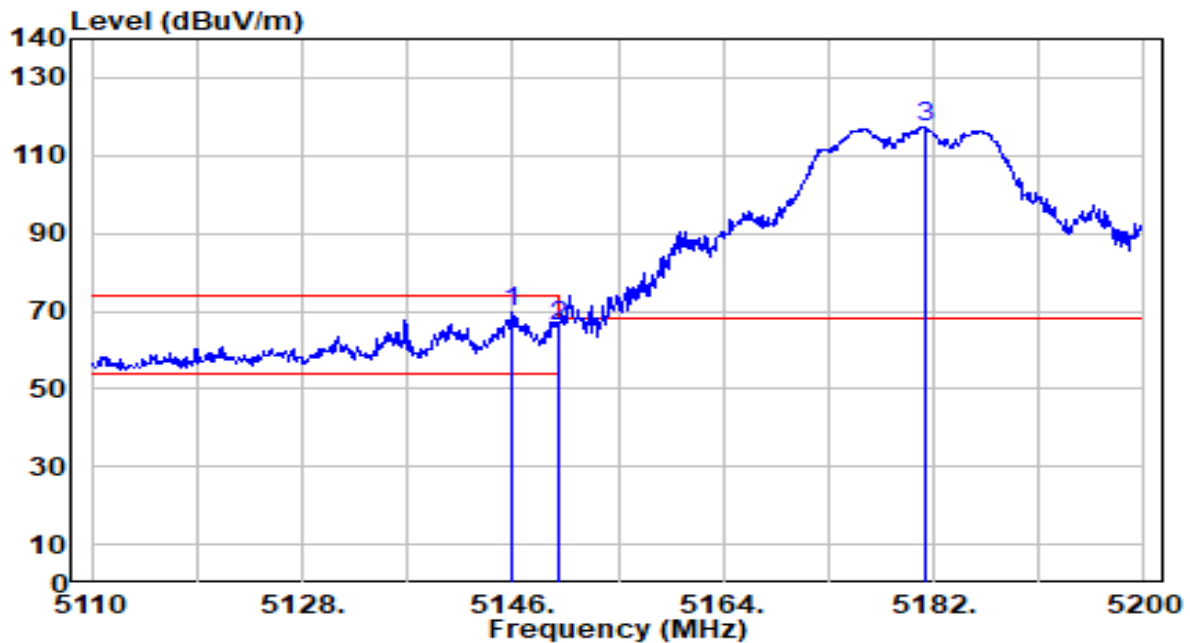


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.820	68.97	0.65	69.62	-4.38	74.00	173	169	Peak
2		5150.000	65.45	0.65	66.10	-7.90	74.00	173	169	Peak
3		5181.190	116.75	0.68	117.43	N/A	N/A	173	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

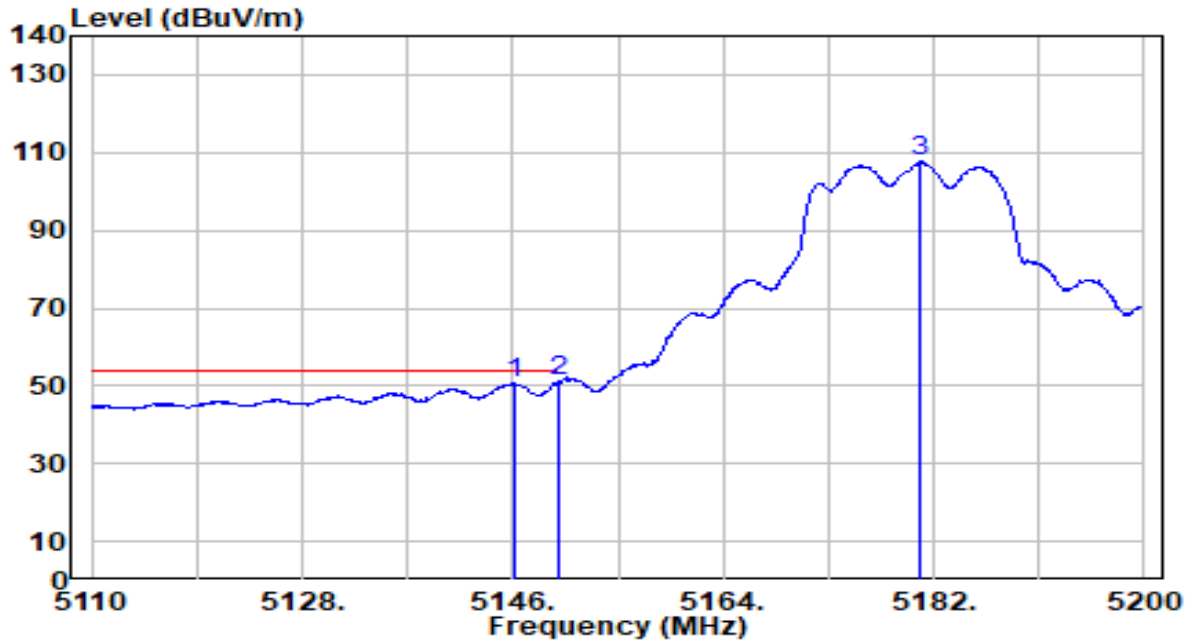


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5146.090	50.05	0.65	50.70	-3.30	54.00	173	169	Average
2	*	5150.000	50.33	0.65	50.98	-3.02	54.00	173	169	Average
3		5180.830	106.86	0.68	107.54	N/A	N/A	173	169	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

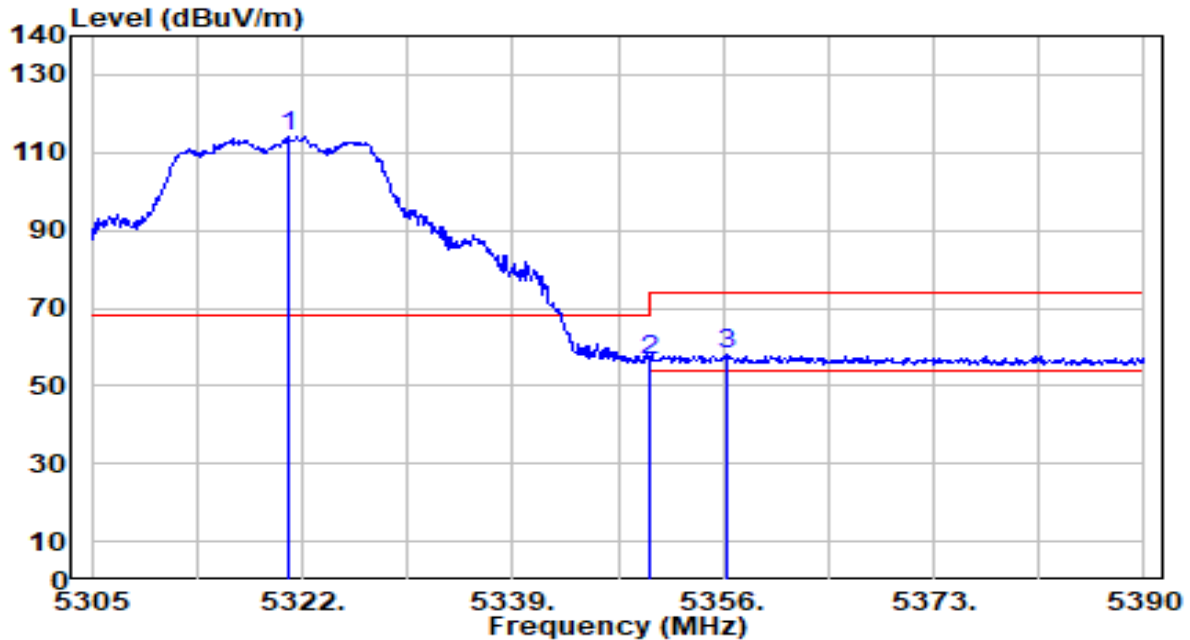


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.810	113.44	0.52	113.96	N/A	N/A	248	191	Peak
2	5350.000	56.29	0.47	56.77	-17.23	74.00	248	191	Peak
3	* 5356.255	57.67	0.46	58.13	-15.87	74.00	248	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

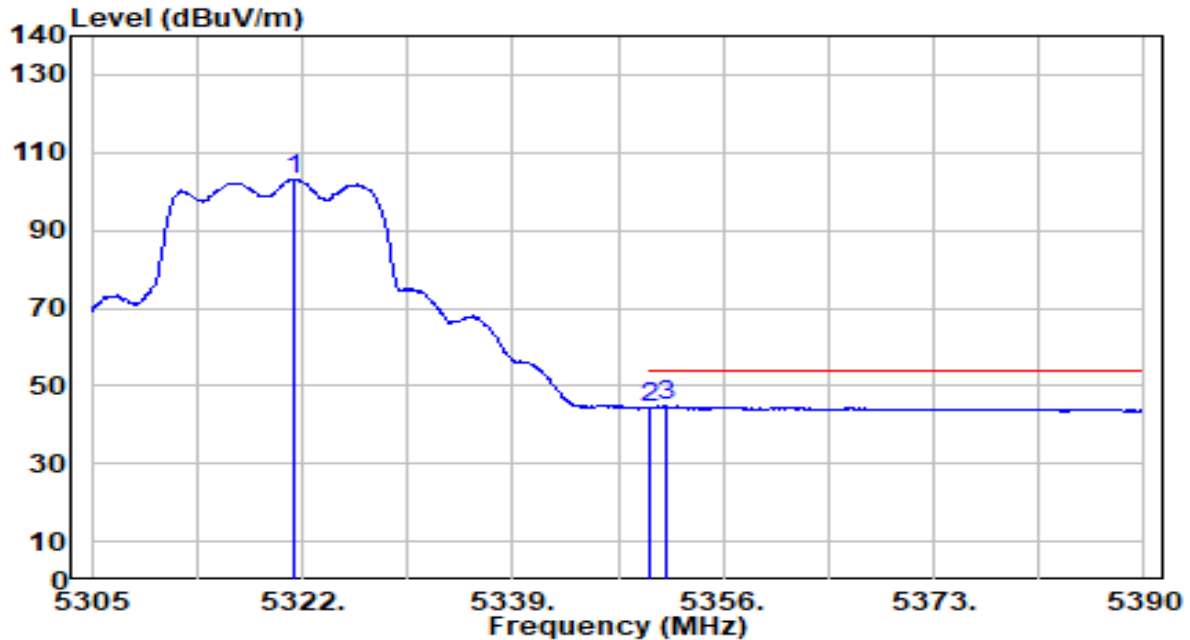


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.320	102.73	0.52	103.24	N/A	N/A	248	191	Average
2	5350.000	43.81	0.47	44.28	-9.72	54.00	248	191	Average
3	* 5351.325	44.33	0.47	44.79	-9.21	54.00	248	191	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

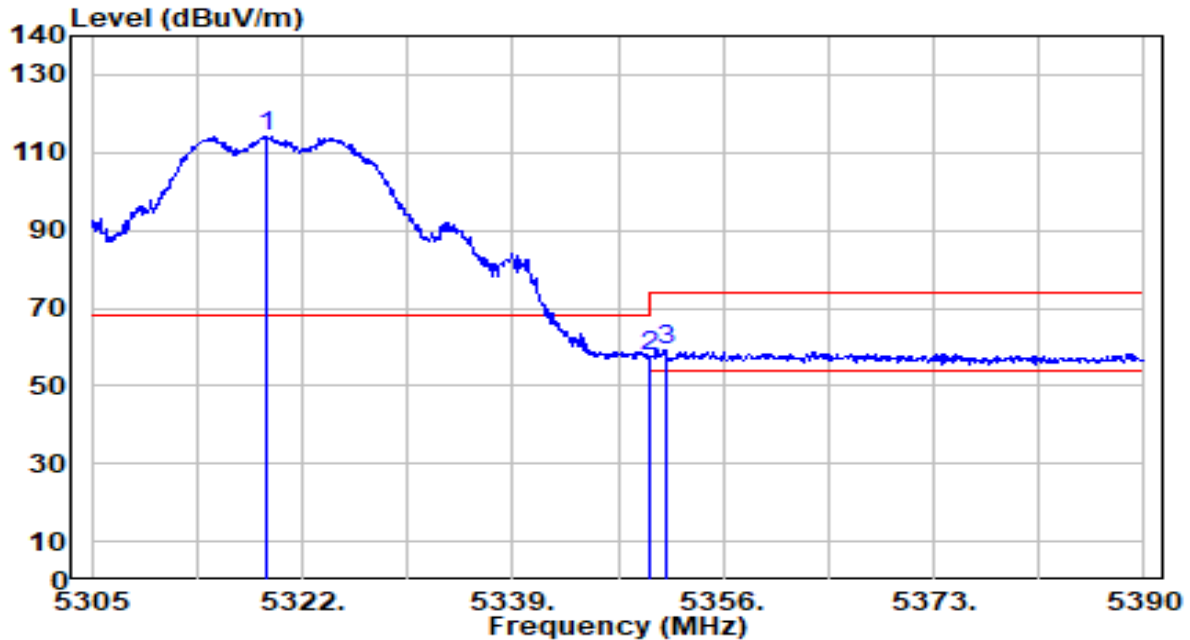


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.195	113.80	0.52	114.32	N/A	N/A	130	172	Peak
2	5350.000	57.09	0.47	57.56	-16.44	74.00	130	172	Peak
3	* 5351.325	58.82	0.47	59.29	-14.71	74.00	130	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

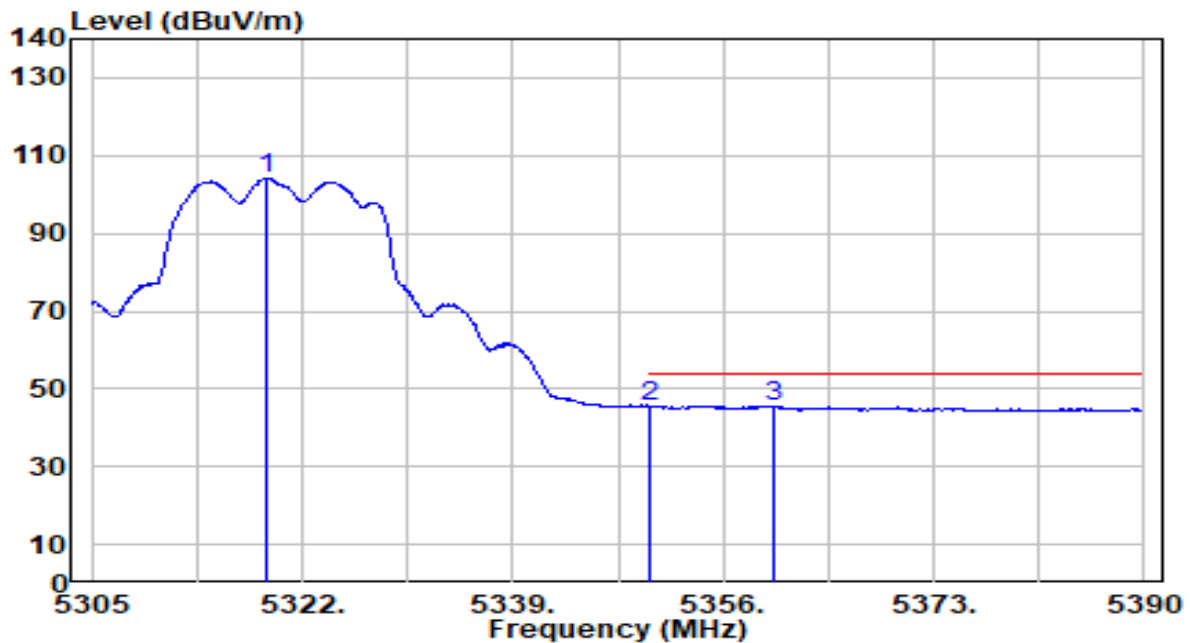


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.110	103.71	0.52	104.23	N/A	N/A	130	172	Average
2	5350.000	45.08	0.47	45.55	-8.45	54.00	130	172	Average
3	* 5360.165	45.17	0.46	45.63	-8.37	54.00	130	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

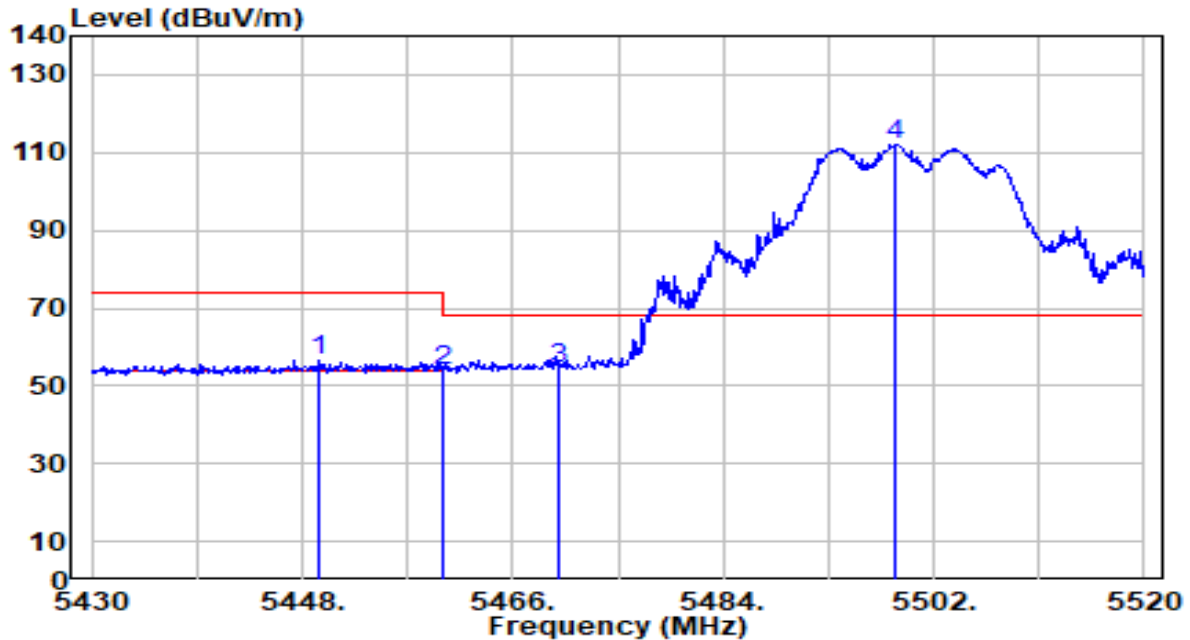


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.530	55.83	0.61	56.45	-17.55	74.00	100	144	Peak
2	5460.000	53.17	0.66	53.83	-20.17	74.00	100	144	Peak
3	* 5470.000	53.81	0.71	54.52	-13.68	68.20	100	144	Peak
4	5498.760	111.25	0.83	112.09	N/A	N/A	100	144	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

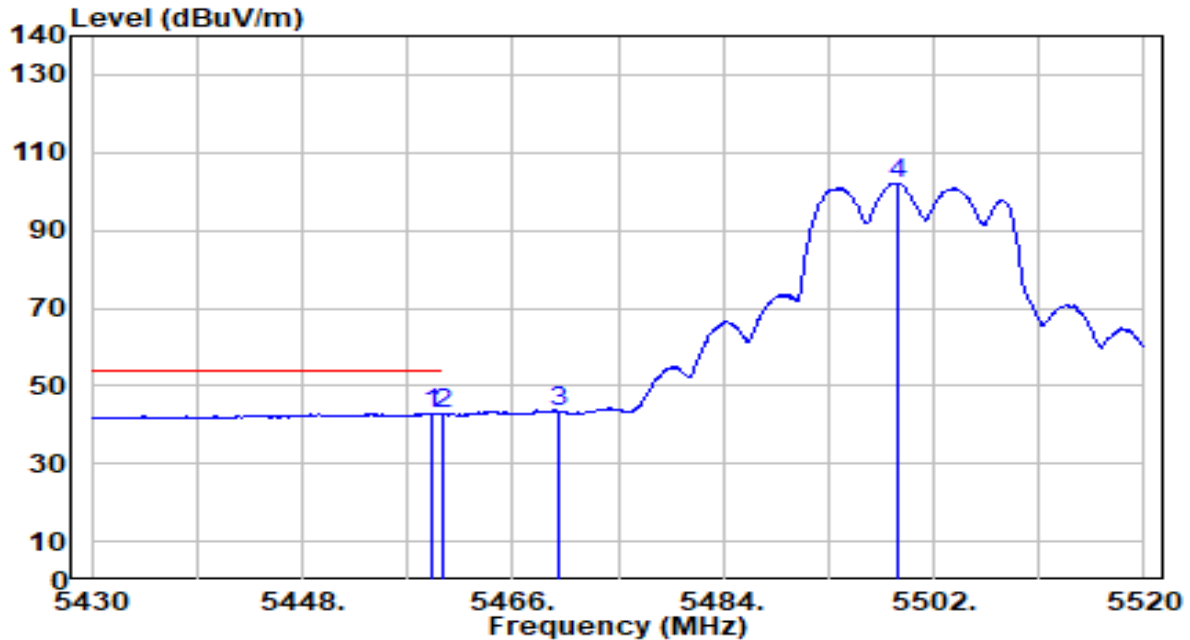


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.980	42.16	0.66	42.81	-11.19	54.00	100	144	Average
2	*	5460.000	42.33	0.66	42.99	-11.01	54.00	100	144	Average
3		5470.000	42.87	0.71	43.57	N/A	N/A	100	144	Average
4		5498.850	101.35	0.83	102.19	N/A	N/A	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

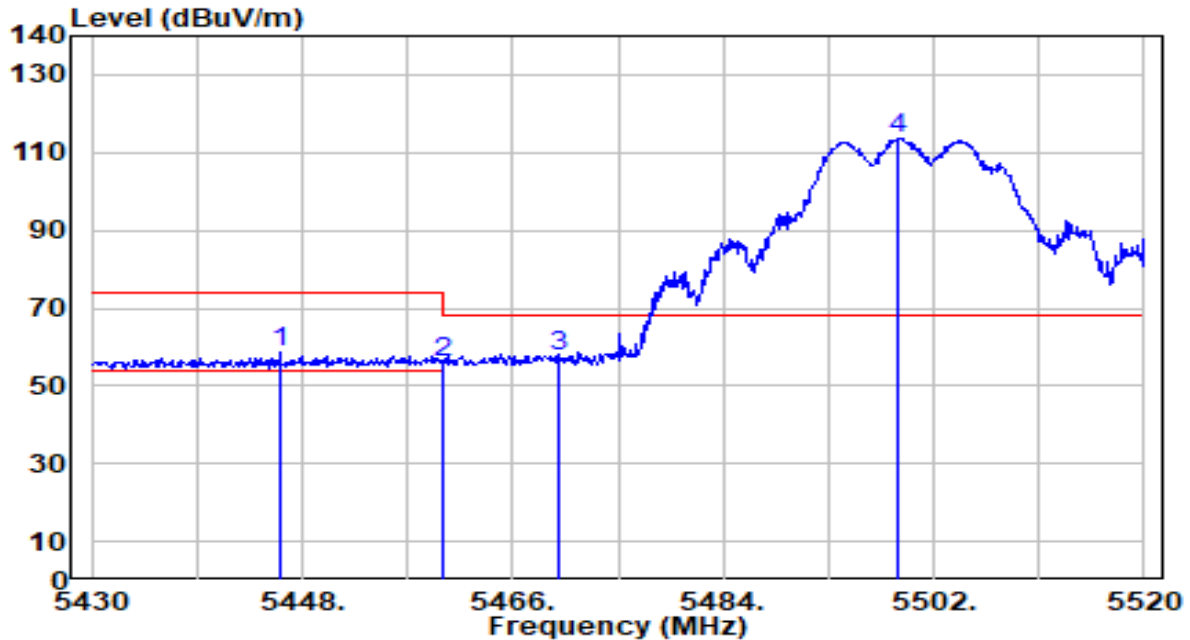


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.110	58.09	0.60	58.69	-15.31	74.00	109	184	Peak
2	5460.000	55.46	0.66	56.12	-17.88	74.00	109	184	Peak
3	* 5470.000	57.00	0.71	57.71	-10.49	68.20	109	184	Peak
4	5498.940	112.79	0.84	113.63	N/A	N/A	109	184	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

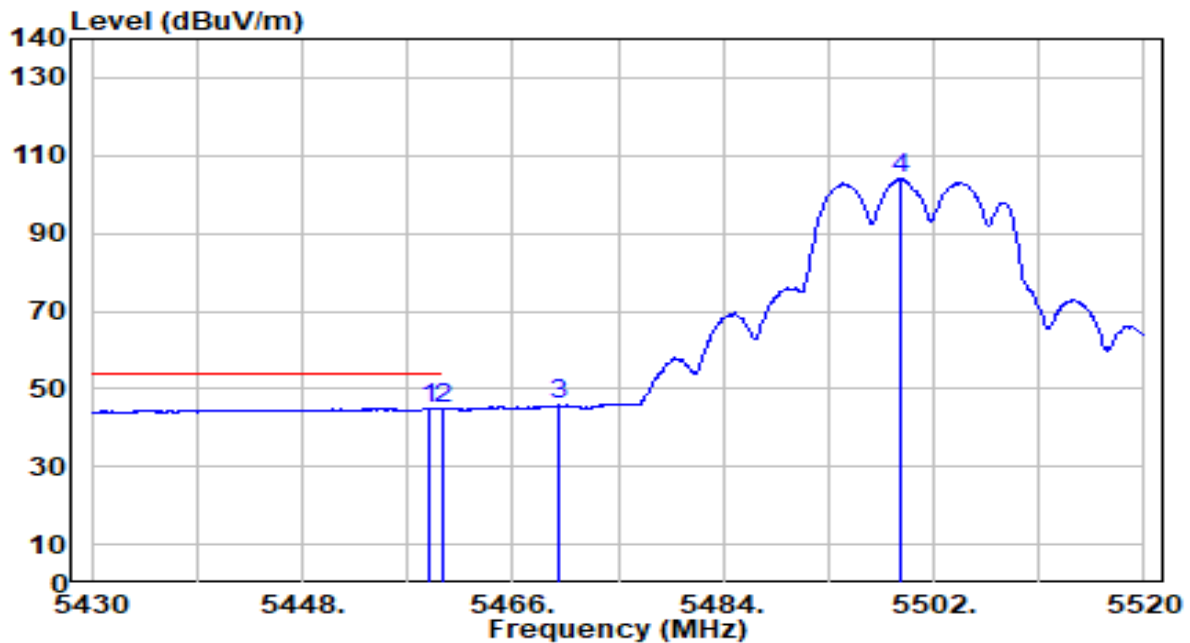


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.890	44.26	0.66	44.91	-9.09	54.00	109	184	Average
2	*	5460.000	44.49	0.66	45.16	-8.84	54.00	109	184	Average
3		5470.000	45.03	0.71	45.74	N/A	N/A	109	184	Average
4		5499.120	103.16	0.84	104.00	N/A	N/A	109	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

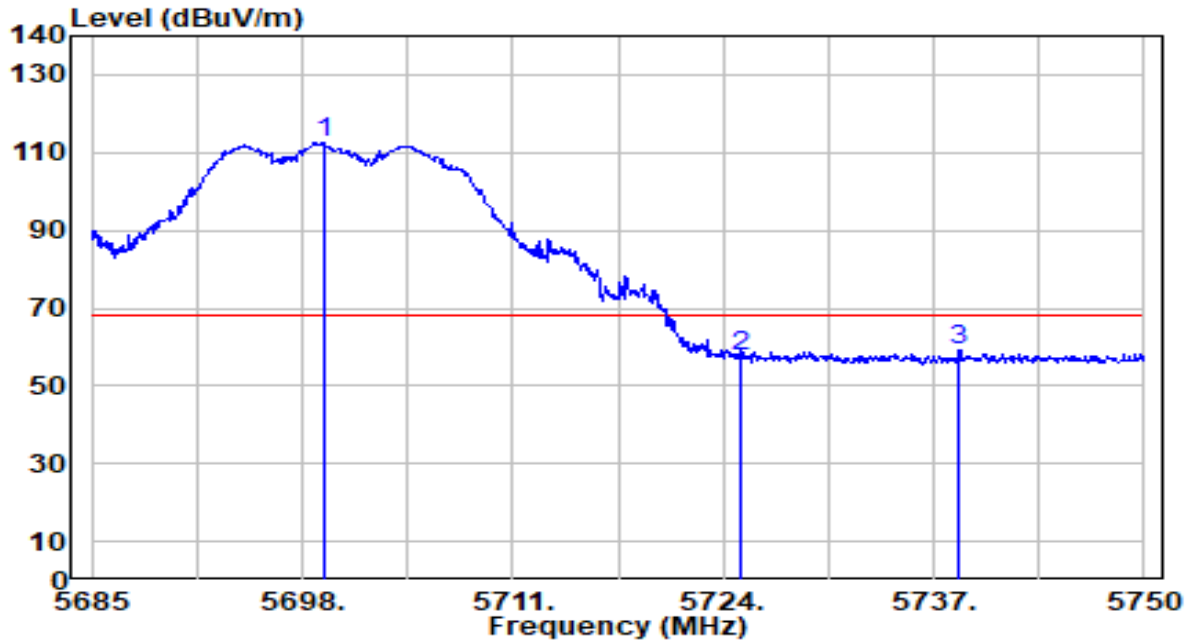


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.300	110.91	1.77	112.68	N/A	N/A	200	118	Peak
2	5725.000	55.89	1.89	57.78	-10.42	68.20	200	118	Peak
3	* 5738.560	57.11	1.96	59.06	-9.14	68.20	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

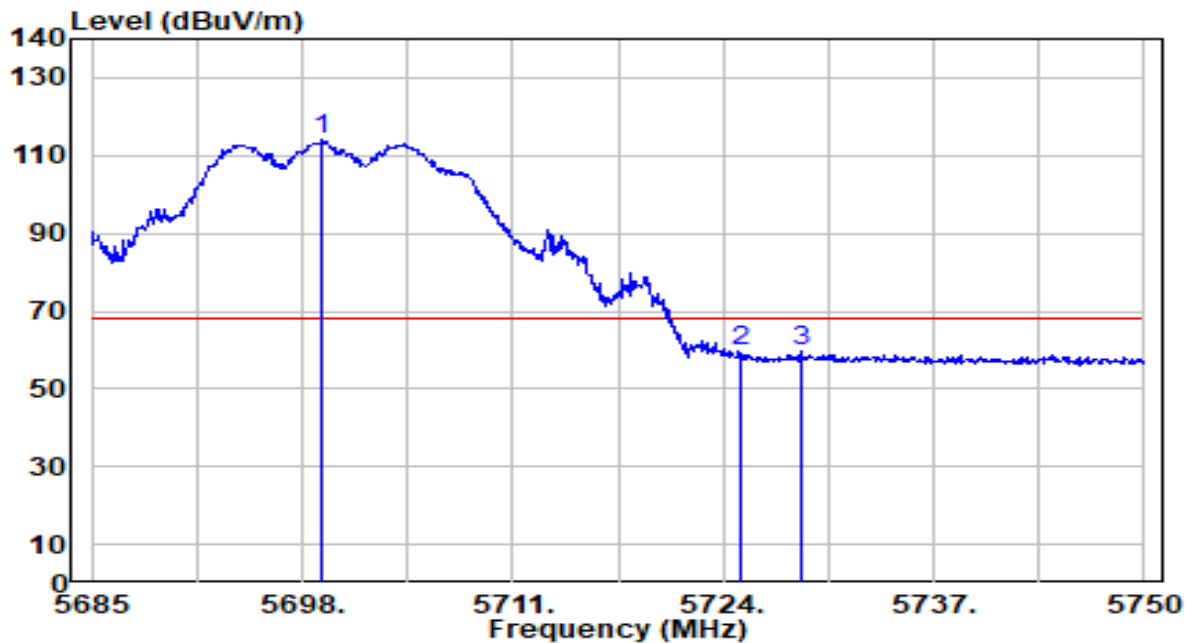


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.235	112.14	1.77	113.91	N/A	N/A	100	194	Peak
2	5725.000	57.56	1.89	59.45	-8.75	68.20	100	194	Peak
3	* 5728.810	57.73	1.91	59.65	-8.55	68.20	100	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

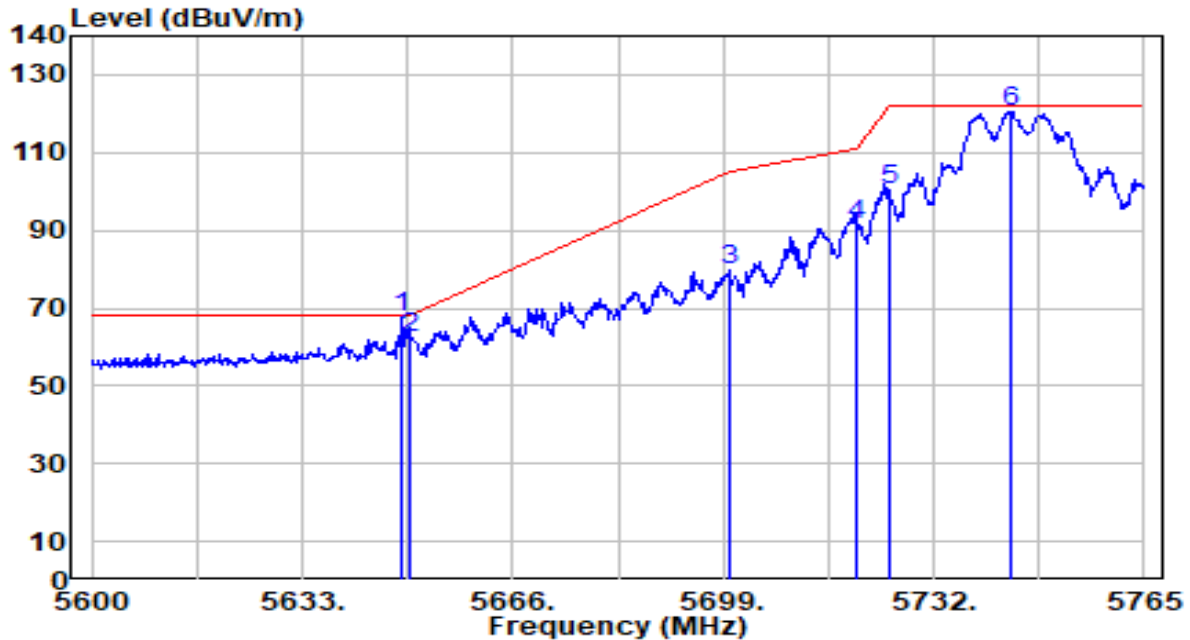


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.675	65.94	1.54	67.48	-0.72	68.20	208	192	Peak
2		5650.000	60.59	1.54	62.13	-6.07	68.20	208	192	Peak
3		5700.000	77.97	1.78	79.75	-25.45	105.20	208	192	Peak
4		5720.000	89.67	1.87	91.54	-19.26	110.80	208	192	Peak
5		5725.000	98.57	1.89	100.46	-21.74	122.20	208	192	Peak
6		5744.045	118.68	1.98	120.66	N/A	N/A	208	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

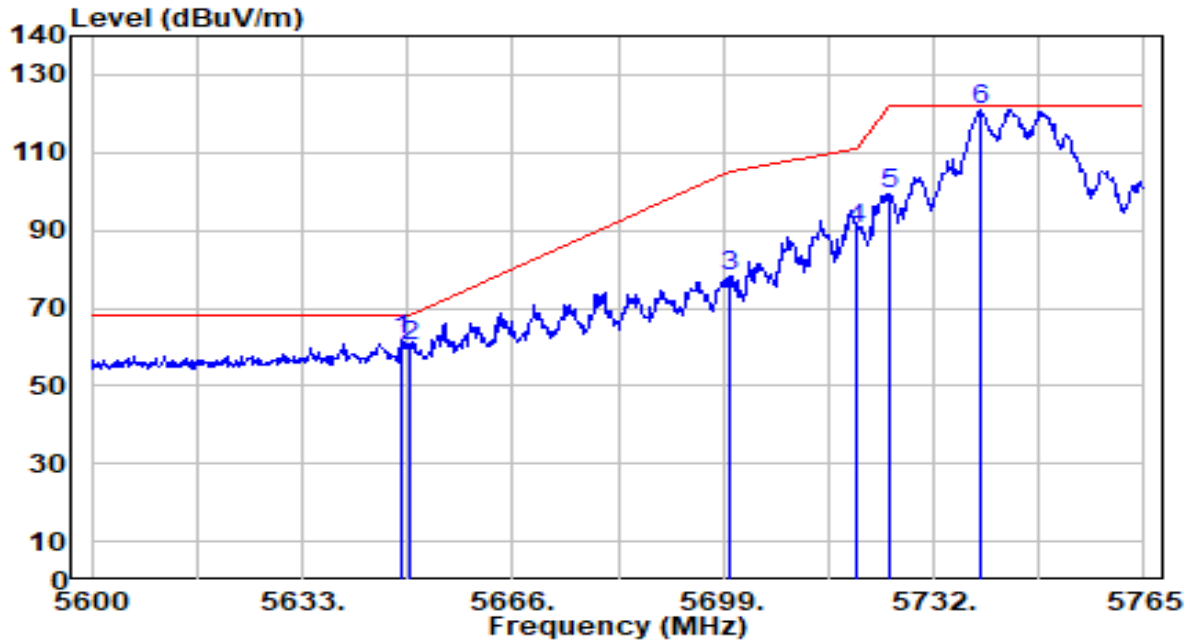


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.510	60.43	1.54	61.96	-6.24	68.20	102	193	Peak
2		5650.000	58.80	1.54	60.34	-7.86	68.20	102	193	Peak
3		5700.000	76.57	1.78	78.34	-26.86	105.20	102	193	Peak
4		5720.000	88.45	1.87	90.32	-20.48	110.80	102	193	Peak
5		5725.000	97.29	1.89	99.18	-23.02	122.20	102	193	Peak
6		5739.260	119.06	1.96	121.02	N/A	N/A	102	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

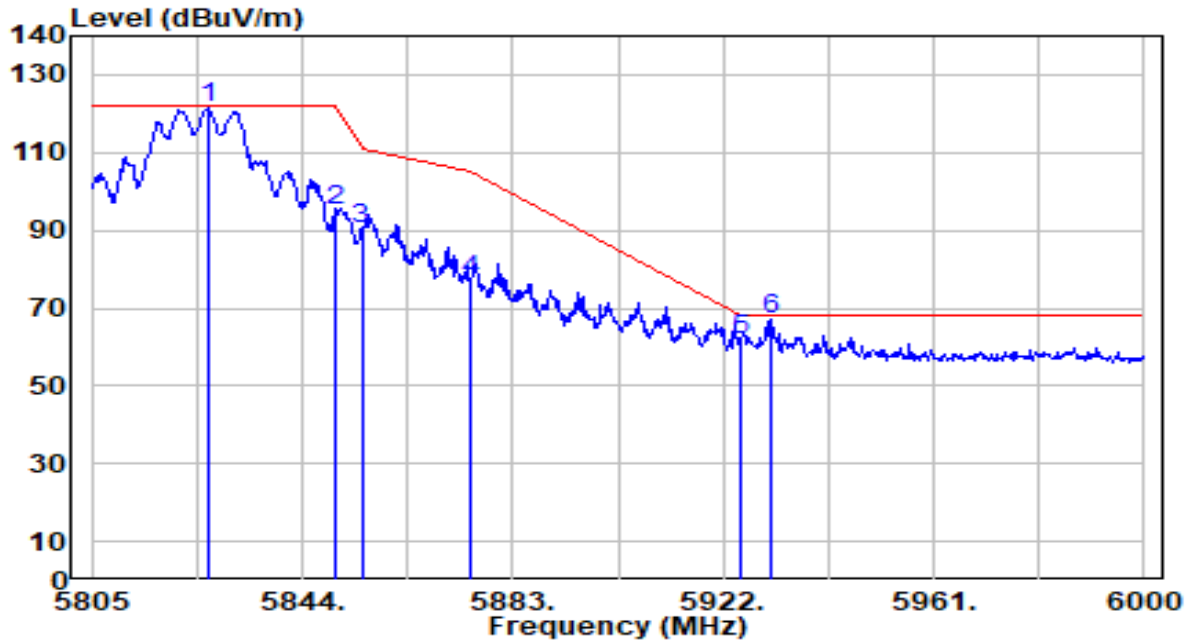


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	119.01	2.25	121.26	N/A	N/A	191	245	Peak
2	5850.000	92.65	2.25	94.90	-27.30	122.20	191	245	Peak
3	5855.000	88.06	2.25	90.31	-20.49	110.80	191	245	Peak
4	5875.000	74.65	2.26	76.91	-28.29	105.20	191	245	Peak
5	5925.000	59.79	2.27	62.06	-6.14	68.20	191	245	Peak
6	* 5930.775	64.99	2.27	67.25	-0.95	68.20	191	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

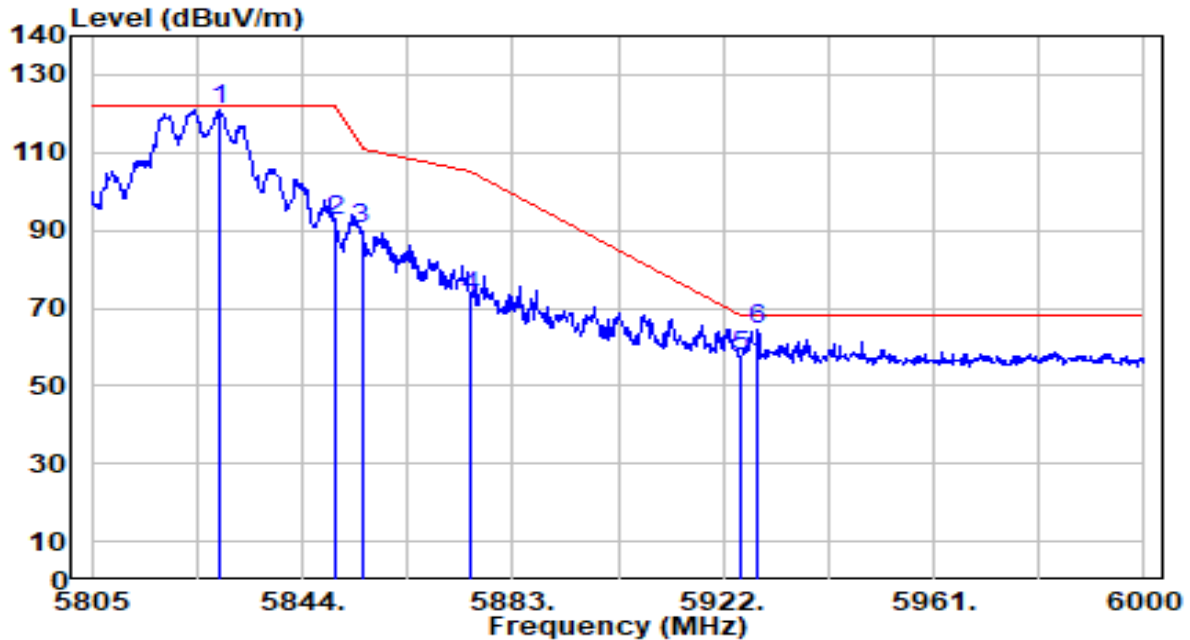


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.595	118.61	2.25	120.86	N/A	N/A	100	192	Peak
2	5850.000	89.95	2.25	92.20	-30.00	122.20	100	192	Peak
3	5855.000	88.19	2.25	90.44	-20.36	110.80	100	192	Peak
4	5875.000	70.66	2.26	72.91	-32.29	105.20	100	192	Peak
5	5925.000	55.24	2.27	57.51	-10.69	68.20	100	192	Peak
6	* 5928.435	62.36	2.27	64.63	-3.57	68.20	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

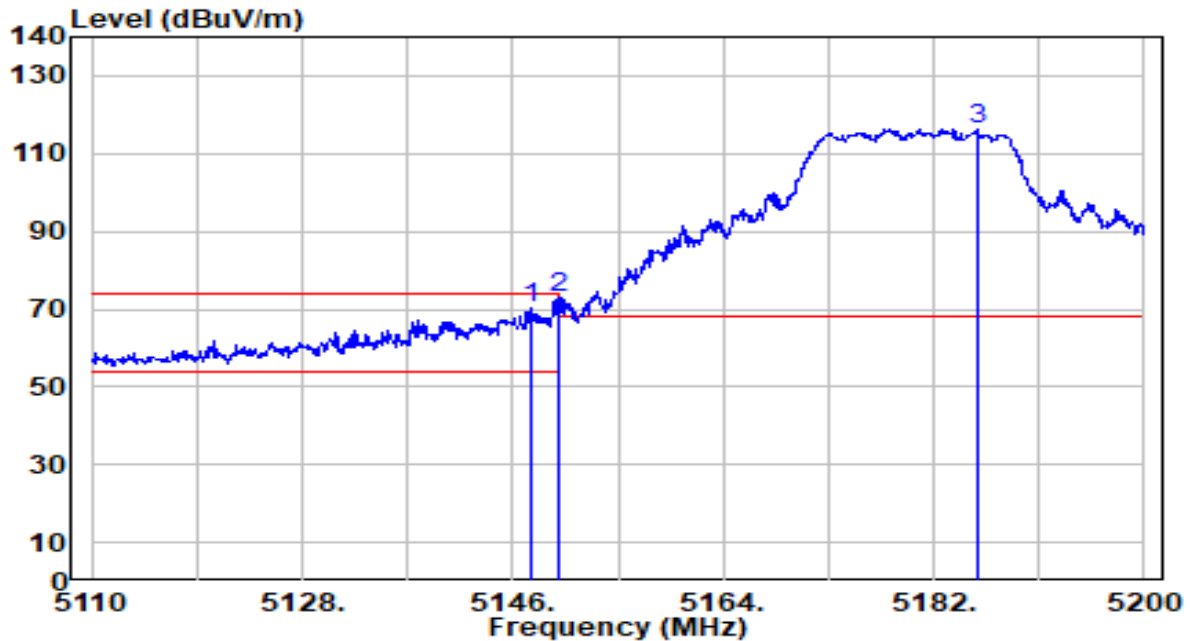


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.620	69.66	0.65	70.31	-3.69	74.00	286	197	Peak
2	*	5150.000	72.42	0.65	73.07	-0.93	74.00	286	197	Peak
3		5185.690	115.74	0.69	116.43	N/A	N/A	286	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

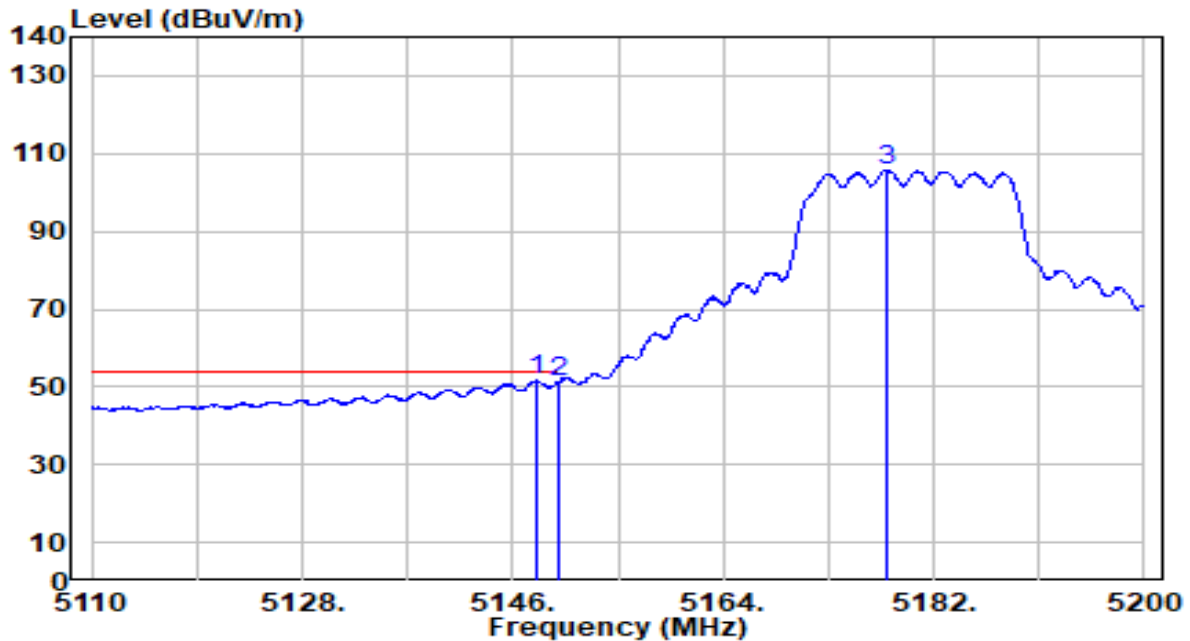


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.980	50.87	0.65	51.52	-2.48	54.00	286	197	Average
2		5150.000	50.73	0.65	51.38	-2.62	54.00	286	197	Average
3		5178.040	104.93	0.68	105.61	N/A	N/A	286	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

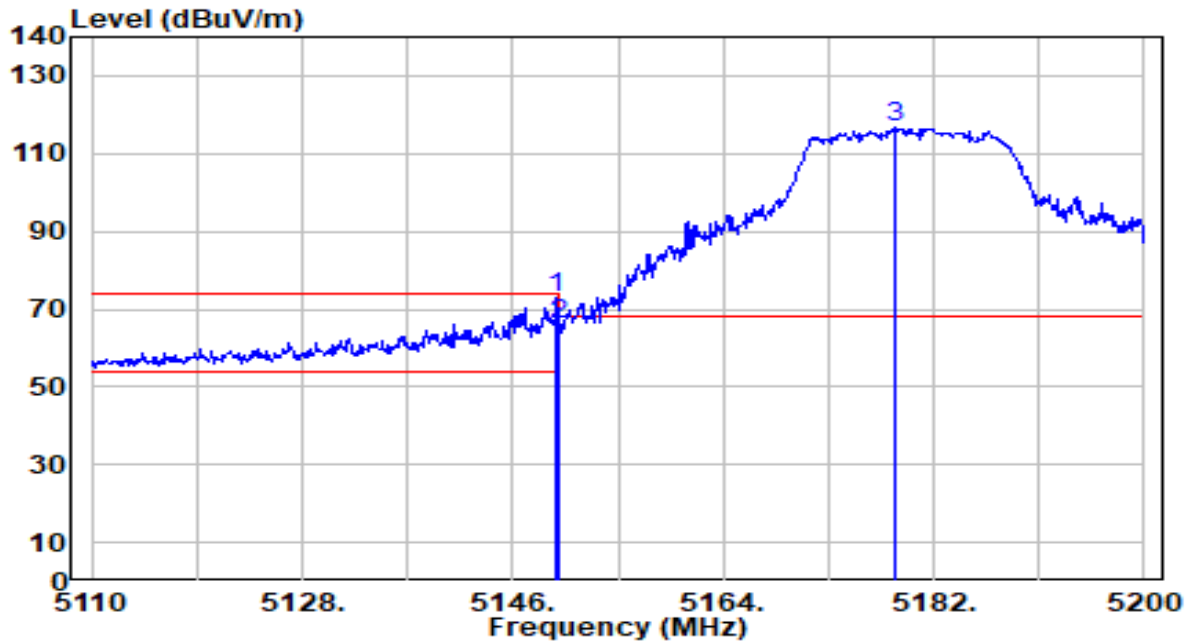


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.690	72.03	0.65	72.69	-1.31	74.00	173	169	Peak
2		5150.000	65.56	0.65	66.21	-7.79	74.00	173	169	Peak
3		5178.670	115.95	0.68	116.63	N/A	N/A	173	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

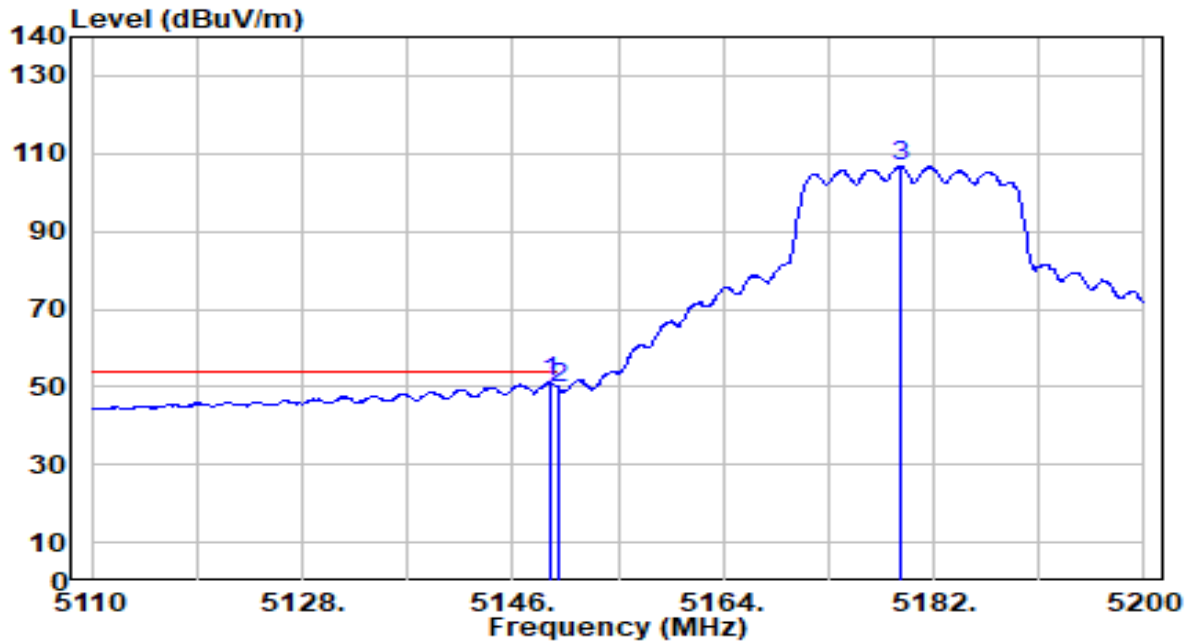


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	50.54	0.65	51.19	-2.81	54.00	173	169	Average
2		5150.000	48.99	0.65	49.64	-4.36	54.00	173	169	Average
3		5179.120	106.19	0.68	106.88	N/A	N/A	173	169	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

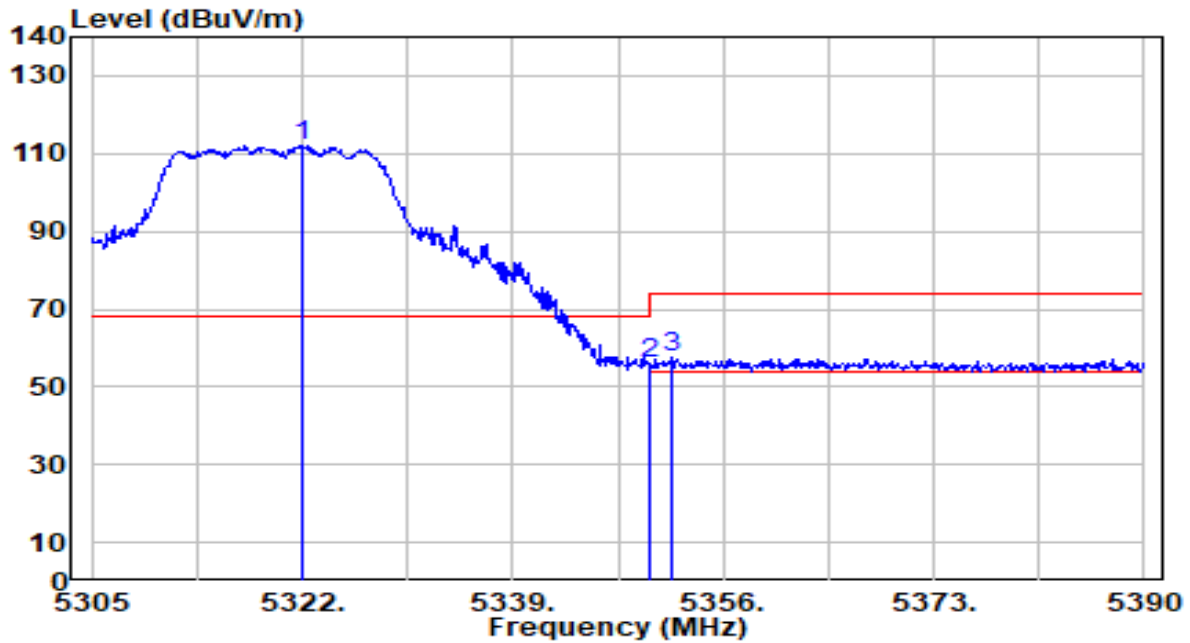


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.000	111.67	0.51	112.18	N/A	N/A	248	191	Peak
2	5350.000	55.42	0.47	55.89	-18.11	74.00	248	191	Peak
3	* 5351.835	56.87	0.47	57.34	-16.66	74.00	248	191	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

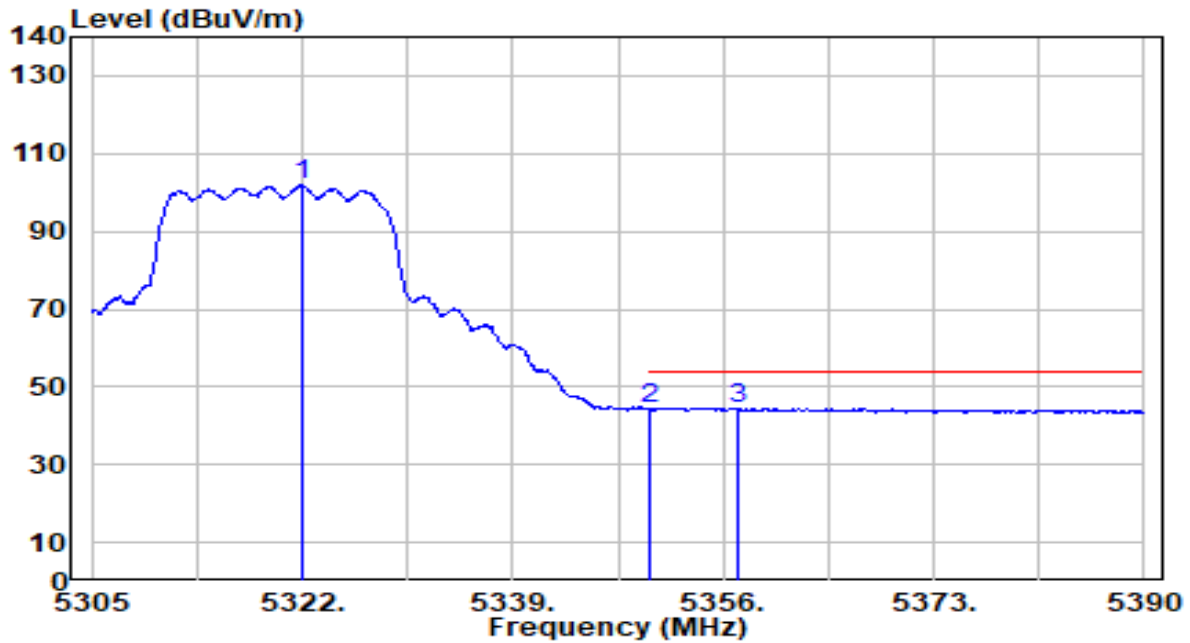


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.915	101.34	0.51	101.86	N/A	N/A	248	191	Average
2	5350.000	43.95	0.47	44.42	-9.58	54.00	248	191	Average
3	* 5357.190	44.14	0.46	44.60	-9.40	54.00	248	191	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

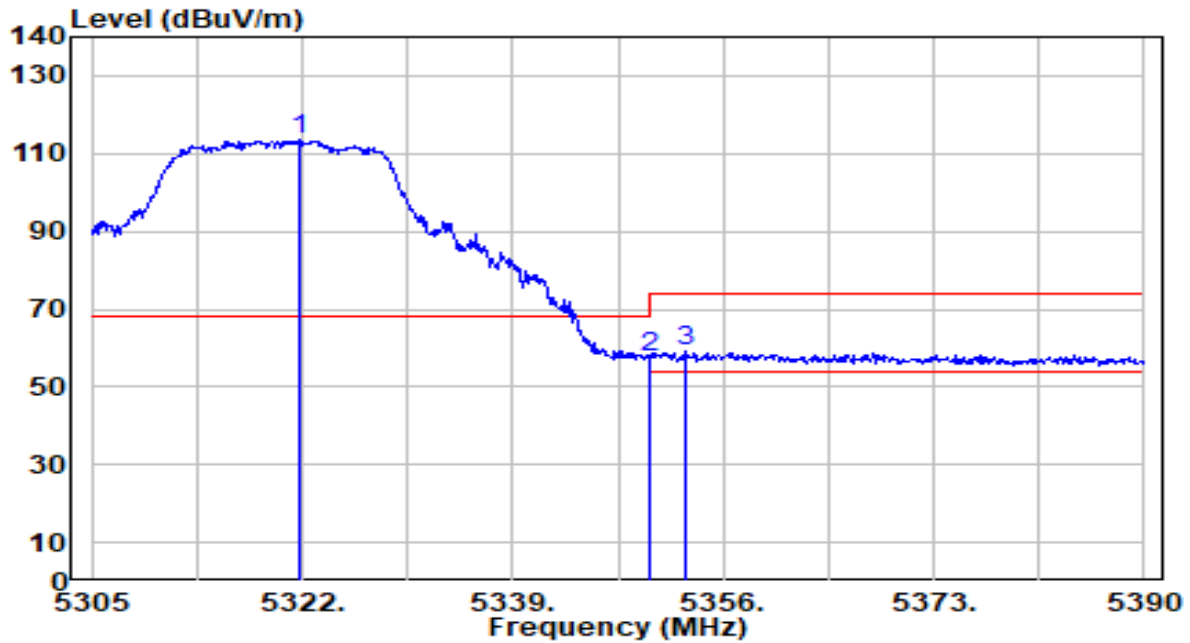


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.745	113.01	0.51	113.52	N/A	N/A	130	172	Peak
2	5350.000	57.05	0.47	57.52	-16.48	74.00	130	172	Peak
3	* 5352.855	58.61	0.47	59.07	-14.93	74.00	130	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

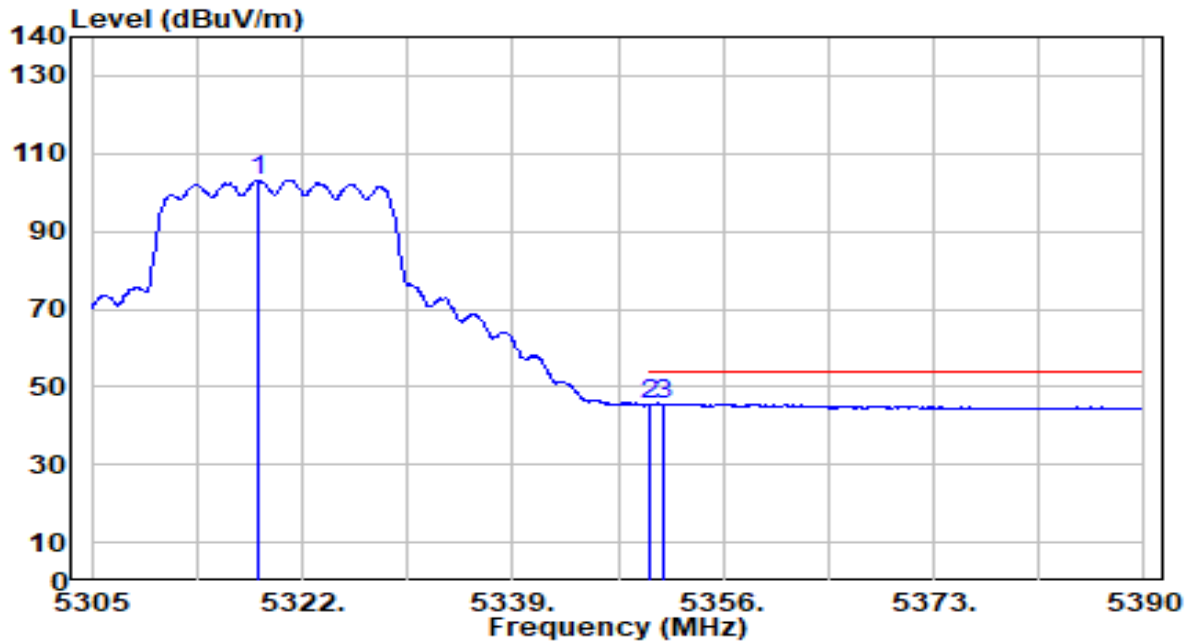


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	102.75	0.52	103.27	N/A	N/A	130	172	Average
2	5350.000	44.79	0.47	45.26	-8.74	54.00	130	172	Average
3	* 5351.240	45.22	0.47	45.69	-8.31	54.00	130	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

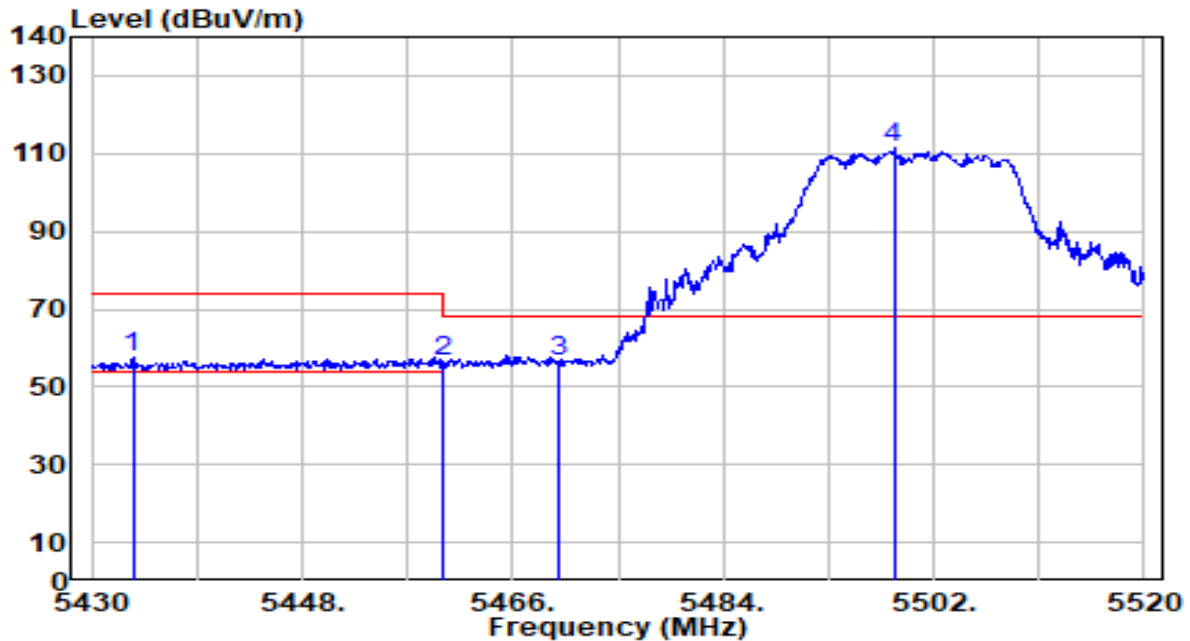


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.510	56.85	0.54	57.39	-16.61	74.00	100	144	Peak
2	5460.000	55.61	0.66	56.27	-17.73	74.00	100	144	Peak
3	* 5470.000	55.61	0.71	56.31	-11.89	68.20	100	144	Peak
4	5498.580	110.83	0.83	111.66	N/A	N/A	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

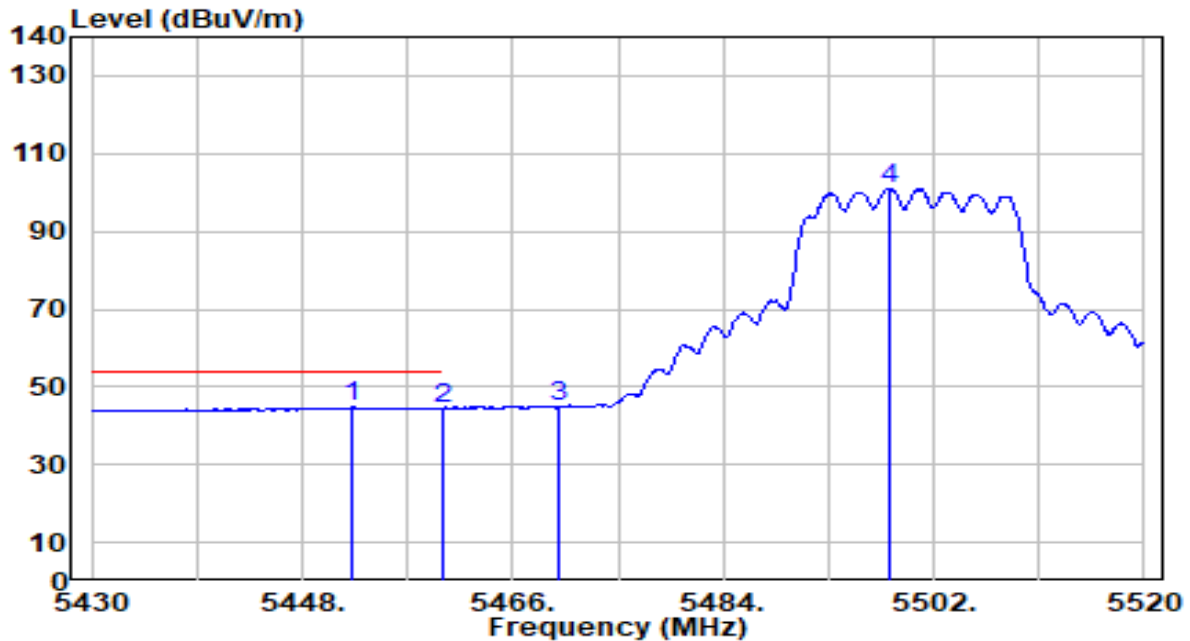


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.320	44.02	0.63	44.65	-9.35	54.00	100	144	Average
2		5460.000	43.89	0.66	44.55	-9.45	54.00	100	144	Average
3		5470.000	43.95	0.71	44.65	N/A	N/A	100	144	Average
4		5498.130	100.13	0.83	100.96	N/A	N/A	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

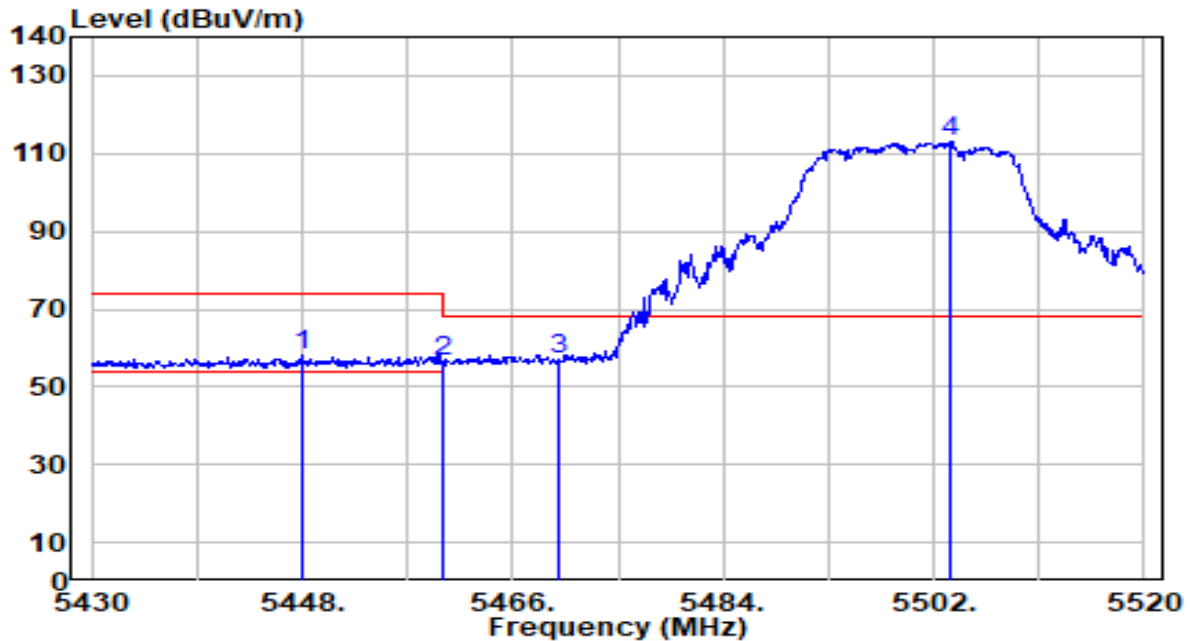


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.910	57.31	0.61	57.92	-16.08	74.00	109	184	Peak
2	5460.000	56.07	0.66	56.73	-17.27	74.00	109	184	Peak
3	* 5470.000	56.14	0.71	56.84	-11.36	68.20	109	184	Peak
4	5503.350	112.04	0.86	112.90	N/A	N/A	109	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

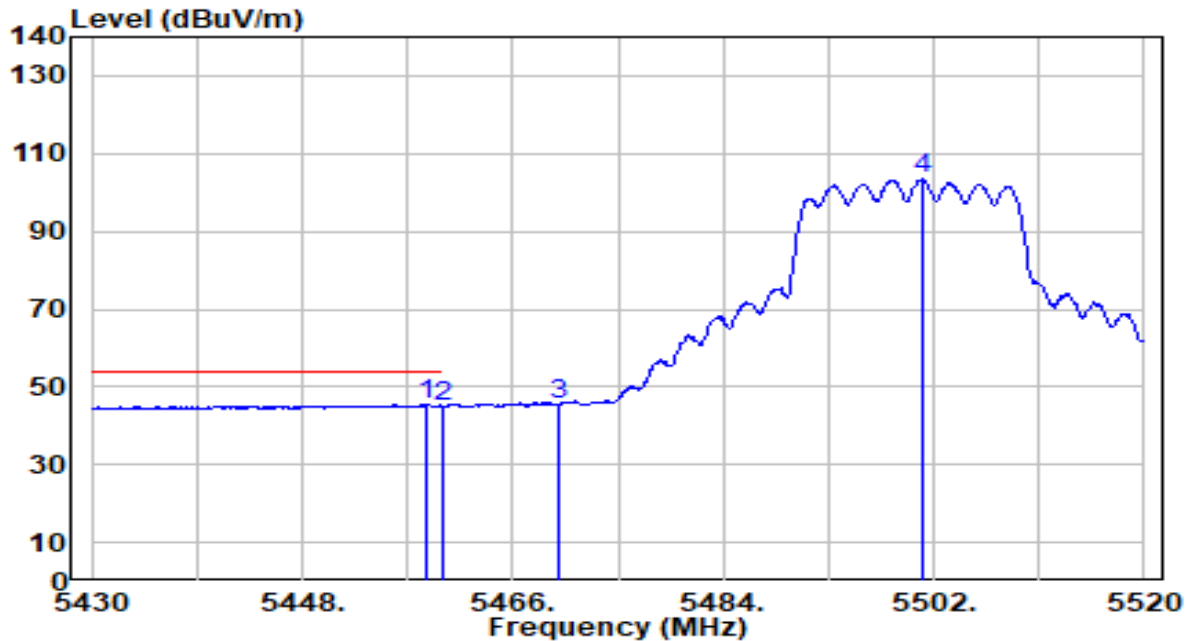


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.620	44.86	0.66	45.52	-8.48	54.00	109	184	Average
2		5460.000	44.27	0.66	44.93	-9.07	54.00	109	184	Average
3		5470.000	44.78	0.71	45.49	N/A	N/A	109	184	Average
4		5501.010	102.50	0.84	103.34	N/A	N/A	109	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

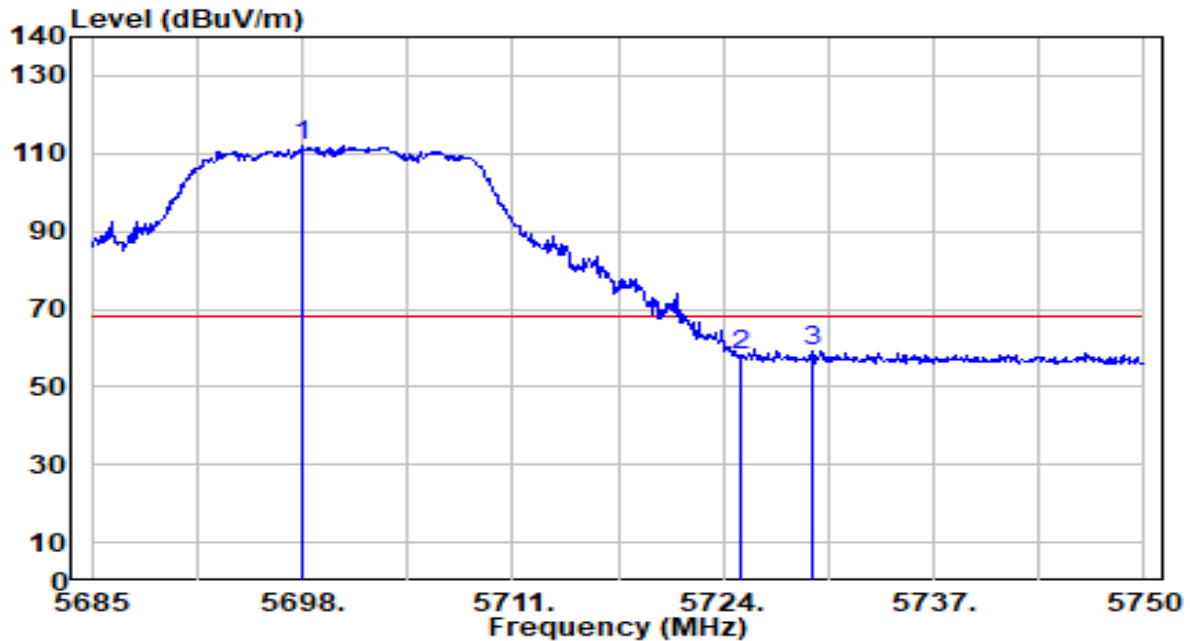


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.065	110.03	1.77	111.80	N/A	N/A	200	119	Peak
2	5725.000	56.41	1.89	58.31	-9.89	68.20	200	119	Peak
3	* 5729.460	57.31	1.91	59.23	-8.97	68.20	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

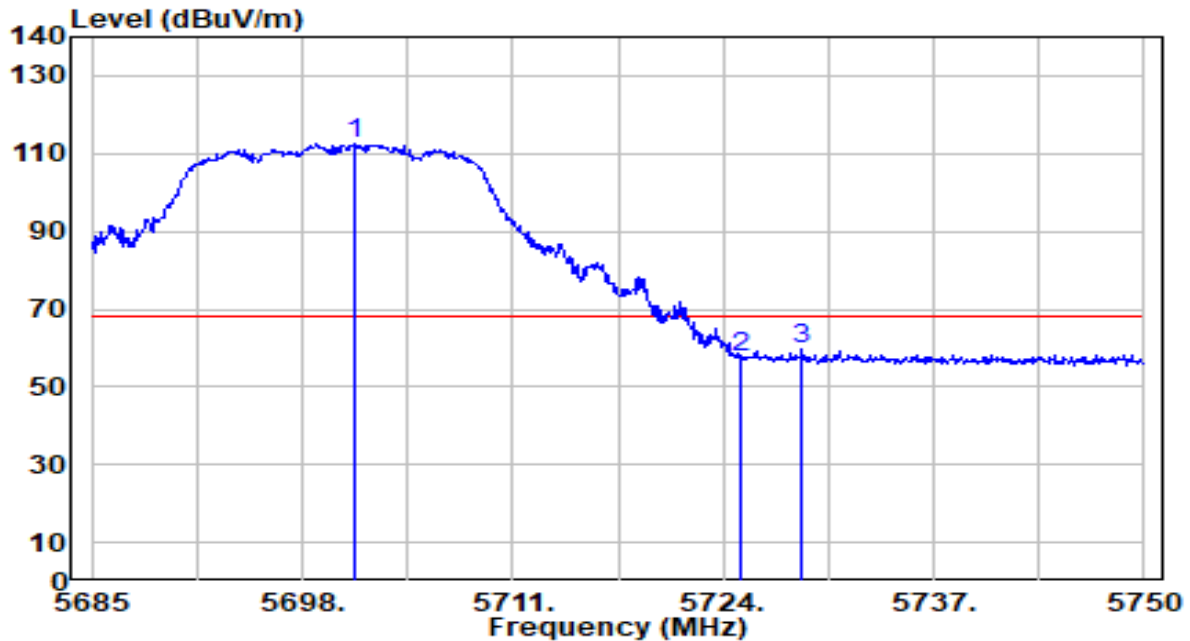


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.250	110.86	1.78	112.64	N/A	N/A	100	202	Peak
2	5725.000	55.81	1.89	57.70	-10.50	68.20	100	202	Peak
3	* 5728.875	57.59	1.91	59.50	-8.70	68.20	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

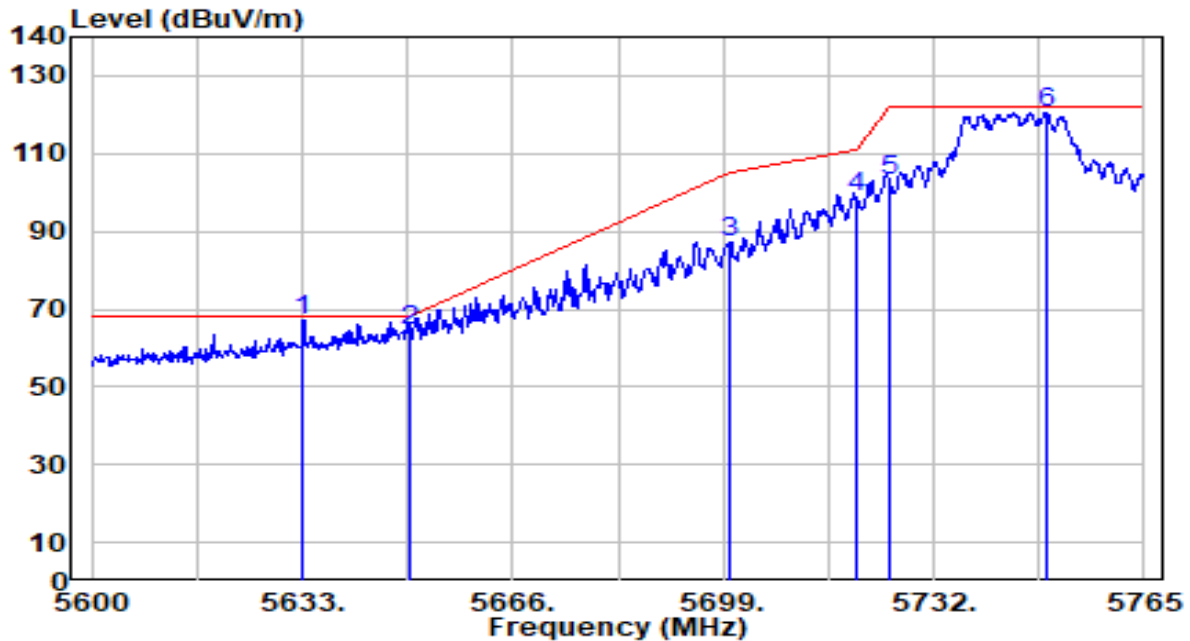


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5633.165	65.83	1.46	67.29	-0.91	68.20	208	192	Peak
2		5650.000	63.05	1.54	64.59	-3.61	68.20	208	192	Peak
3		5700.000	85.27	1.78	87.05	-18.15	105.20	208	192	Peak
4		5720.000	96.75	1.87	98.62	-12.18	110.80	208	192	Peak
5		5725.000	100.97	1.89	102.87	-19.33	122.20	208	192	Peak
6		5749.655	118.59	2.01	120.60	N/A	N/A	208	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

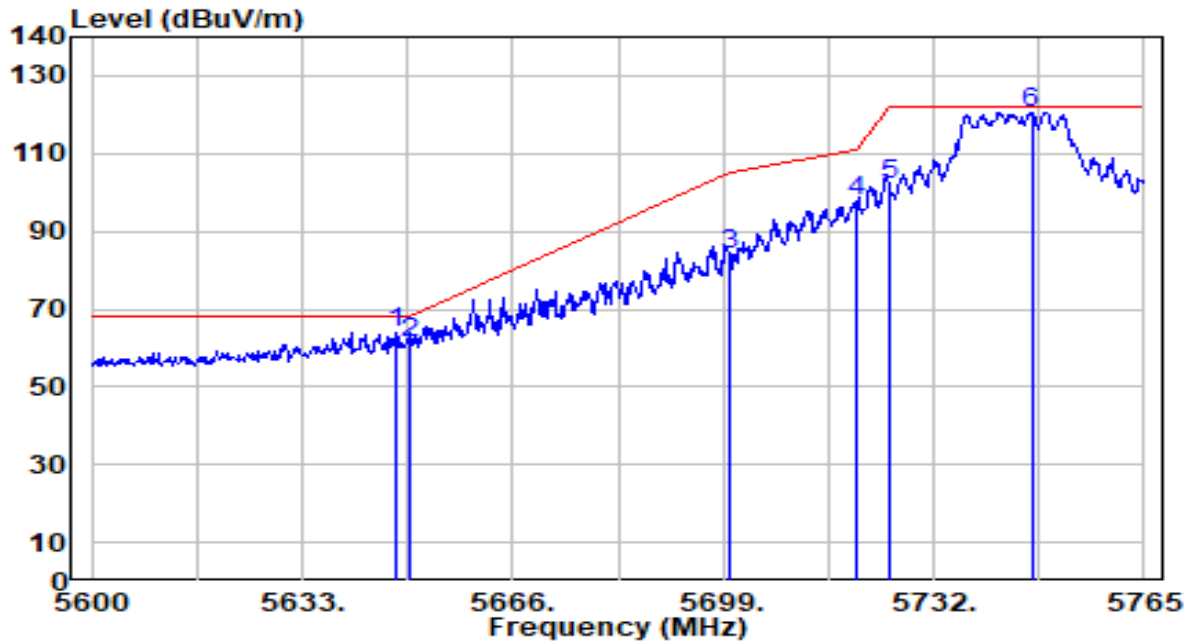


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.520	62.49	1.53	64.02	-4.18	68.20	102	193	Peak
2		5650.000	59.93	1.54	61.47	-6.73	68.20	102	193	Peak
3		5700.000	82.31	1.78	84.09	-21.11	105.20	102	193	Peak
4		5720.000	96.05	1.87	97.92	-12.88	110.80	102	193	Peak
5		5725.000	100.13	1.89	102.02	-20.18	122.20	102	193	Peak
6		5747.345	118.65	2.00	120.64	N/A	N/A	102	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

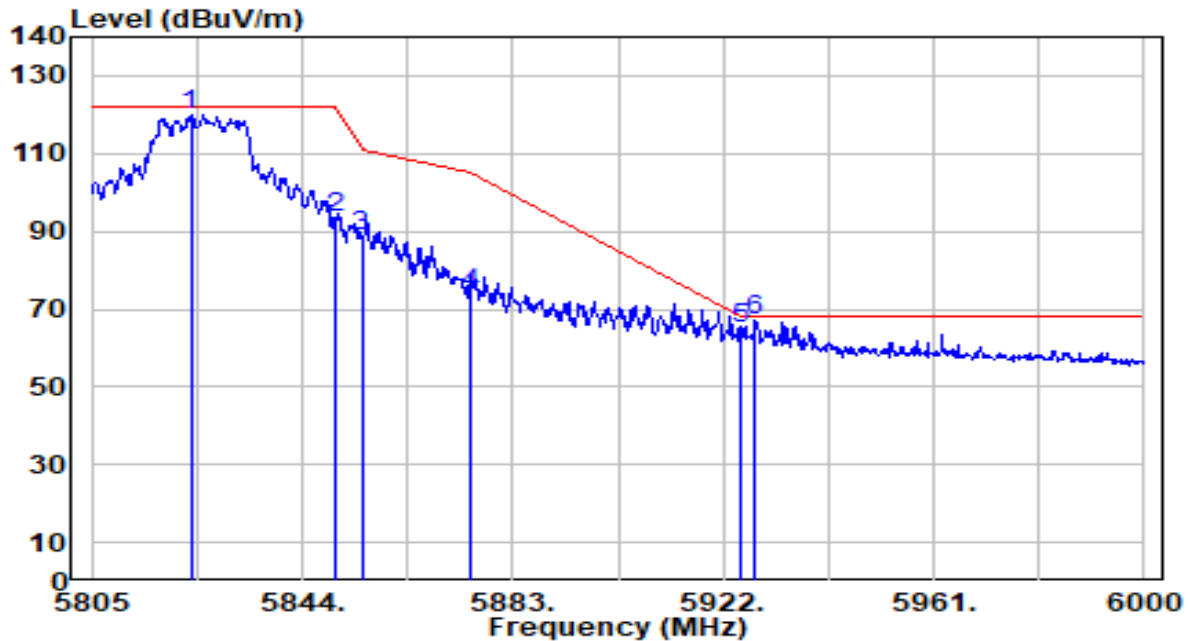


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.330	117.54	2.25	119.78	N/A	N/A	191	245	Peak
2	5850.000	91.21	2.25	93.47	-28.73	122.20	191	245	Peak
3	5855.000	86.42	2.25	88.67	-22.13	110.80	191	245	Peak
4	5875.000	71.86	2.26	74.12	-31.08	105.20	191	245	Peak
5	5925.000	62.92	2.27	65.19	-3.01	68.20	191	245	Peak
6	* 5927.850	64.96	2.27	67.23	-0.97	68.20	191	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

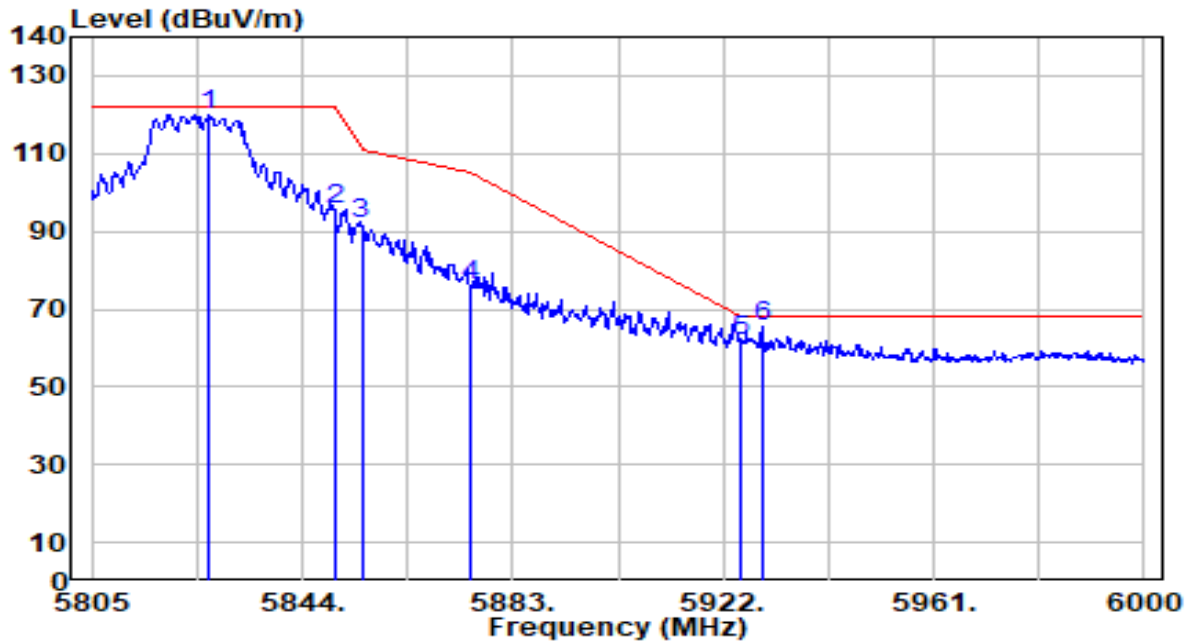


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.645	117.67	2.25	119.91	N/A	N/A	100	192	Peak
2	5850.000	93.20	2.25	95.45	-26.75	122.20	100	192	Peak
3	5855.000	89.86	2.25	92.11	-18.69	110.80	100	192	Peak
4	5875.000	73.59	2.26	75.84	-29.36	105.20	100	192	Peak
5	5925.000	59.38	2.27	61.65	-6.55	68.20	100	192	Peak
6	* 5929.215	63.05	2.27	65.32	-2.88	68.20	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

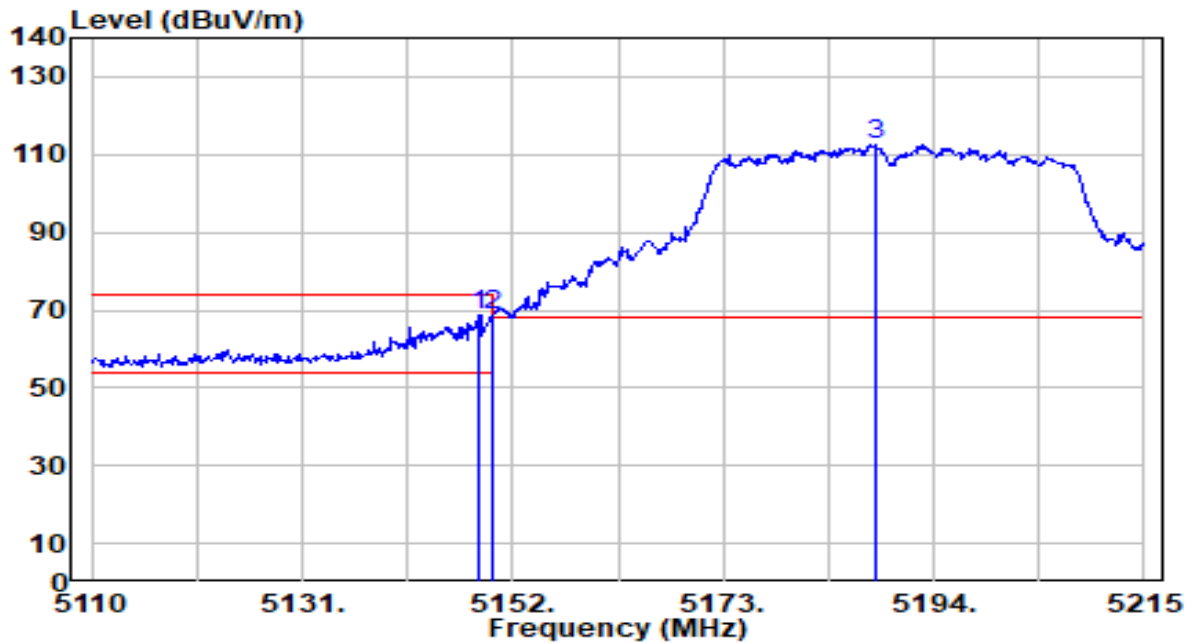


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.535	67.99	0.65	68.64	-5.36	74.00	286	197	Peak
2	*	5150.000	68.03	0.65	68.68	-5.32	74.00	286	197	Peak
3		5188.330	111.98	0.69	112.67	N/A	N/A	286	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

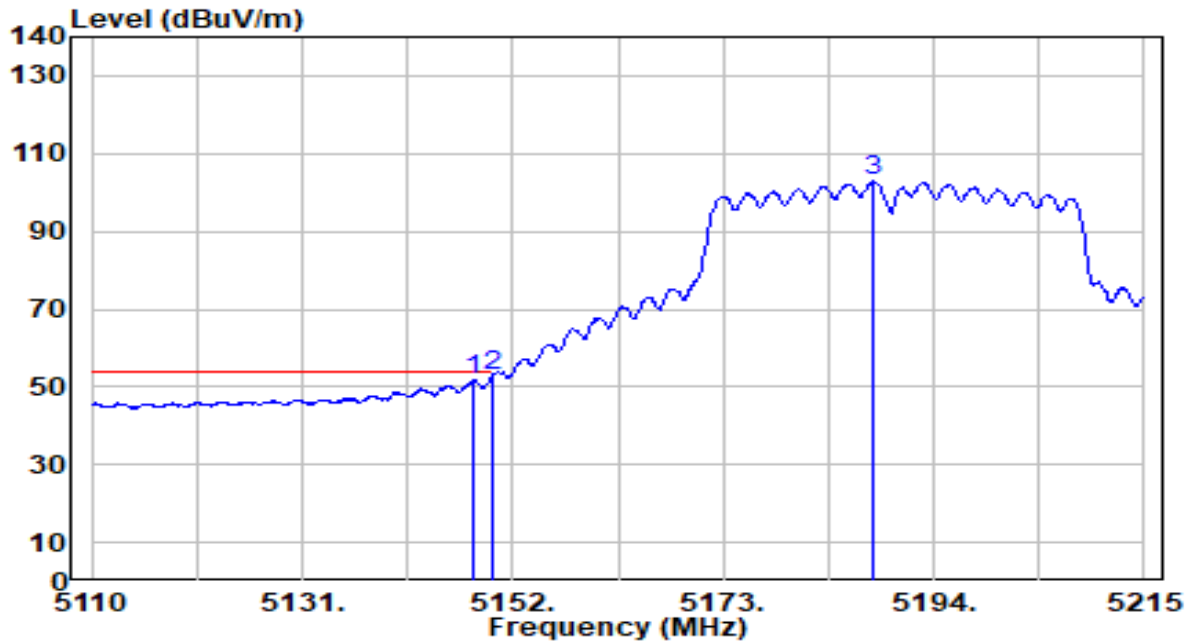


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.010	51.00	0.65	51.65	-2.35	54.00	286	197	Average
2	*	5150.000	52.39	0.65	53.04	-0.96	54.00	286	197	Average
3		5187.910	102.12	0.69	102.81	N/A	N/A	286	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

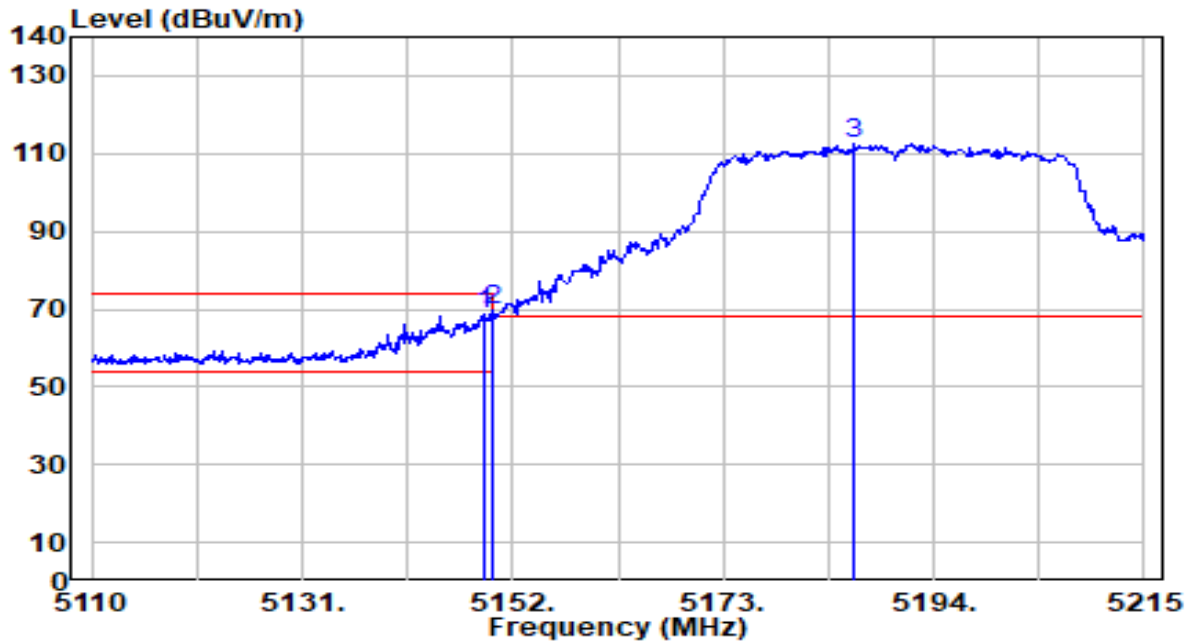


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.165	68.26	0.65	68.91	-5.09	74.00	173	169	Peak
2	*	5150.000	68.93	0.65	69.58	-4.42	74.00	173	169	Peak
3		5186.020	111.83	0.69	112.51	N/A	N/A	173	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

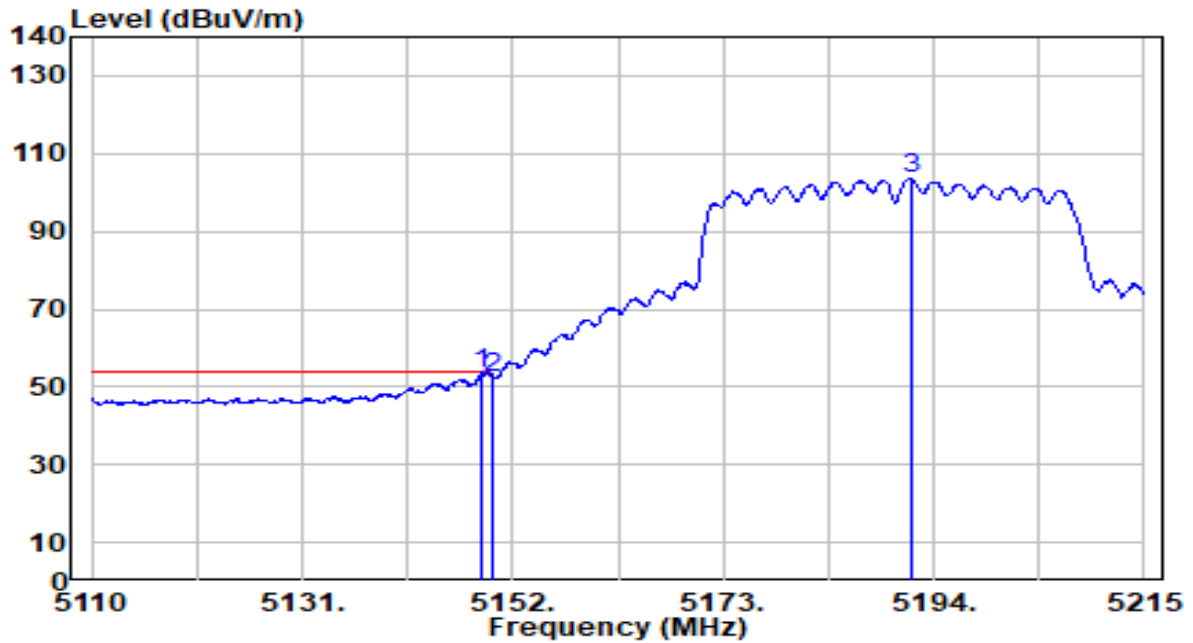


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	52.79	0.65	53.45	-0.55	54.00	173	169	Average
2		5150.000	51.85	0.65	52.50	-1.50	54.00	173	169	Average
3		5191.795	102.95	0.69	103.65	N/A	N/A	173	169	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

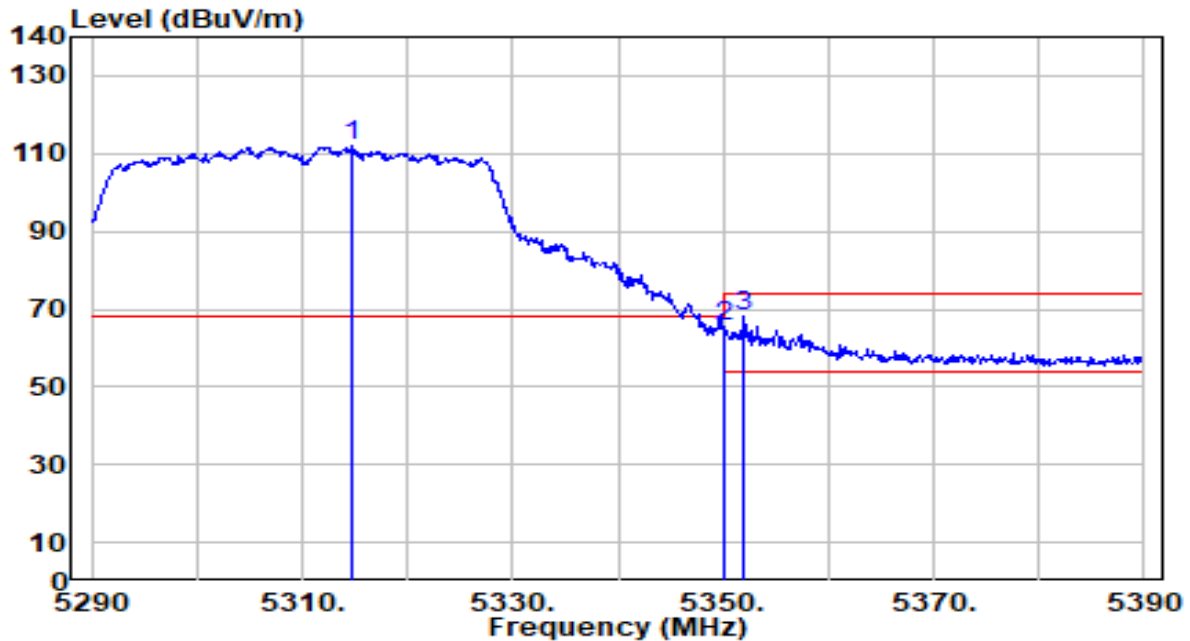


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.800	111.36	0.53	111.89	N/A	N/A	248	191	Peak
2	5350.000	65.17	0.47	65.64	-8.36	74.00	248	191	Peak
3	* 5352.000	67.54	0.47	68.01	-5.99	74.00	248	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

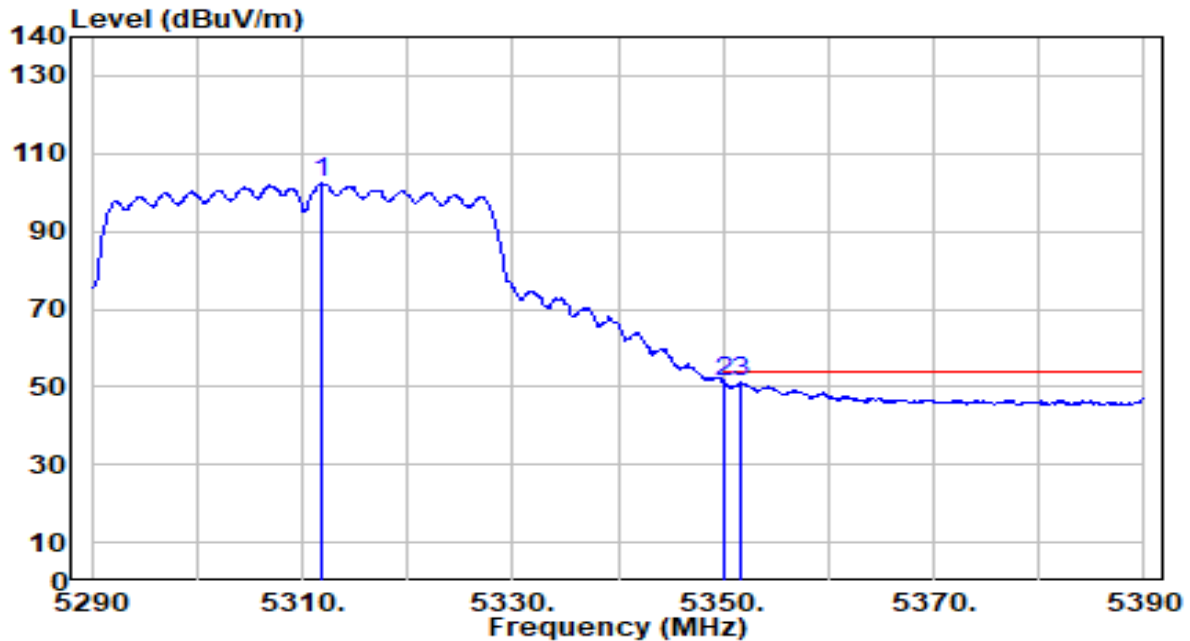


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.900	101.79	0.53	102.32	N/A	N/A	248	191	Average
2	*	5350.000	50.76	0.47	51.23	-2.77	54.00	248	191	Average
3		5351.700	50.62	0.47	51.09	-2.91	54.00	248	191	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

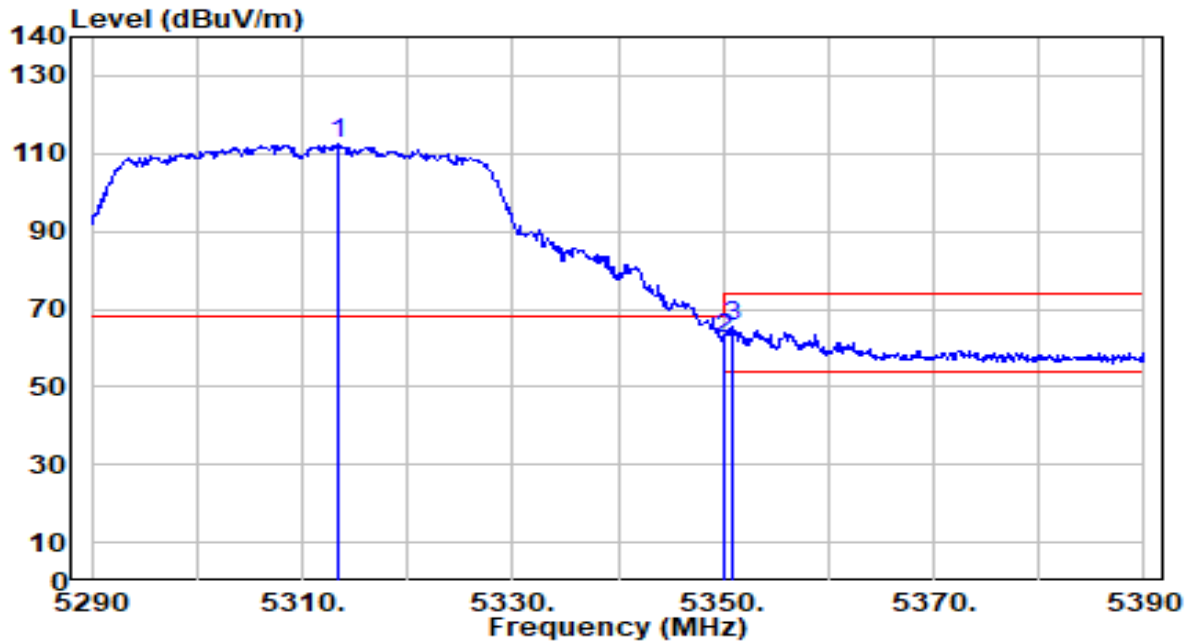


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.300	111.93	0.53	112.46	N/A	N/A	130	172	Peak
2	5350.000	61.84	0.47	62.32	-11.68	74.00	130	172	Peak
3	* 5351.000	65.02	0.47	65.49	-8.51	74.00	130	172	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

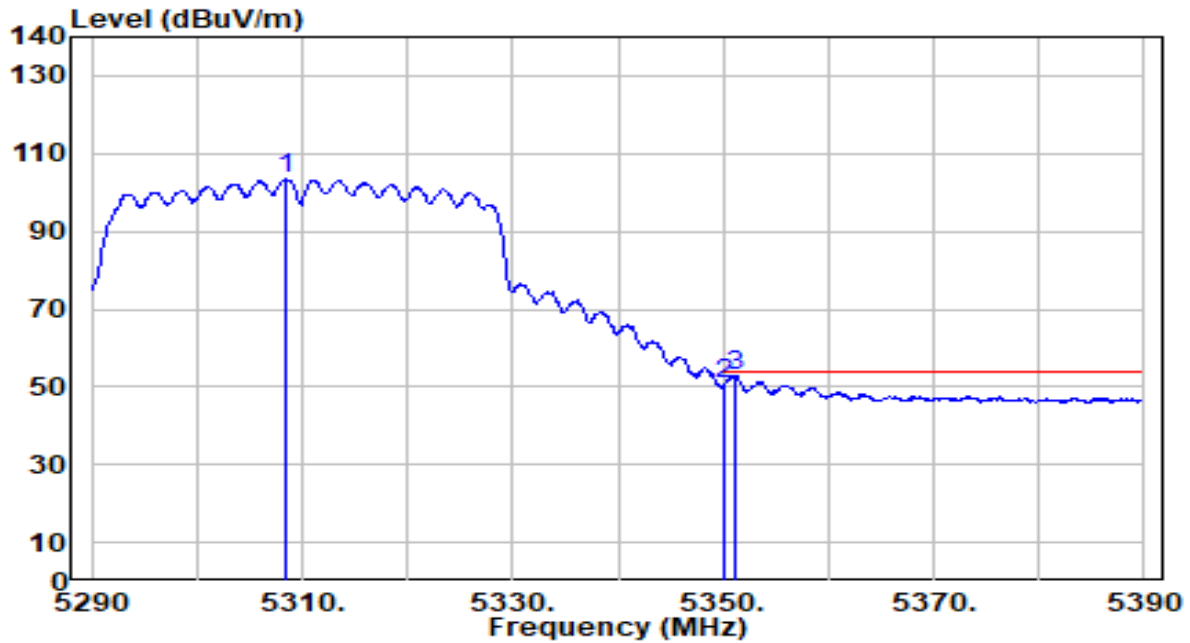


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.400	102.78	0.54	103.32	N/A	N/A	130	172	Average
2	5350.000	50.01	0.47	50.48	-3.52	54.00	130	172	Average
3	* 5351.100	52.61	0.47	53.08	-0.92	54.00	130	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

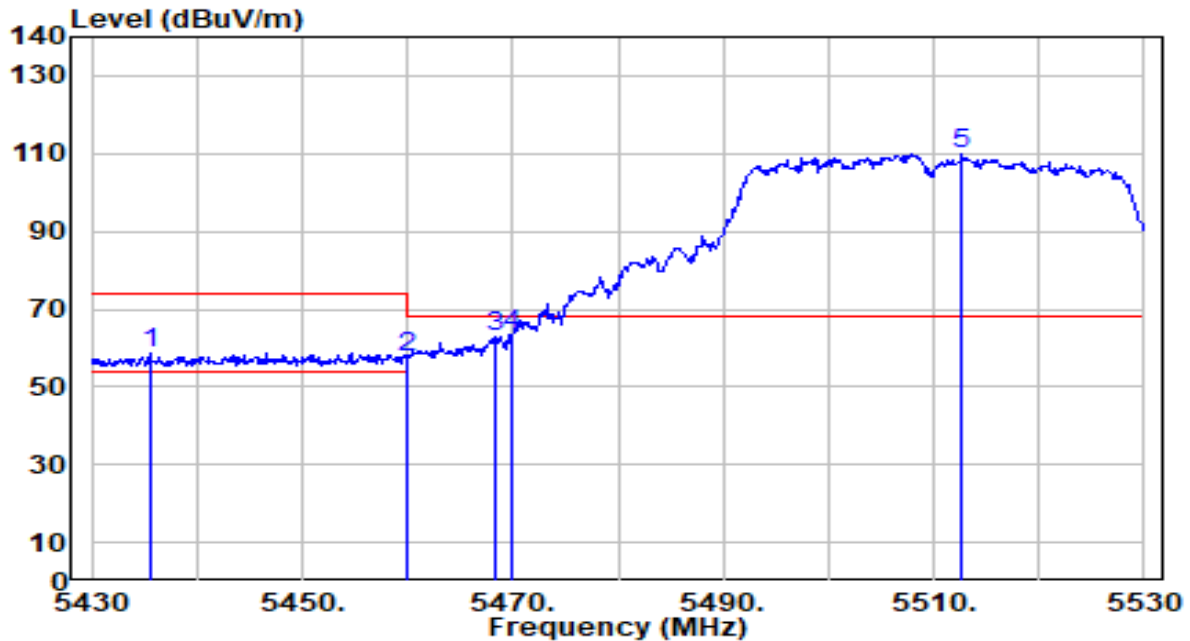


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5435.500	57.99	0.55	58.54	-15.46	74.00	100	144	Peak
2	5460.000	56.90	0.66	57.56	-16.44	74.00	100	144	Peak
3	5468.300	62.11	0.70	62.80	-5.40	68.20	100	144	Peak
4	* 5470.000	62.50	0.71	63.21	-4.99	68.20	100	144	Peak
5	5512.700	108.98	0.90	109.88	N/A	N/A	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

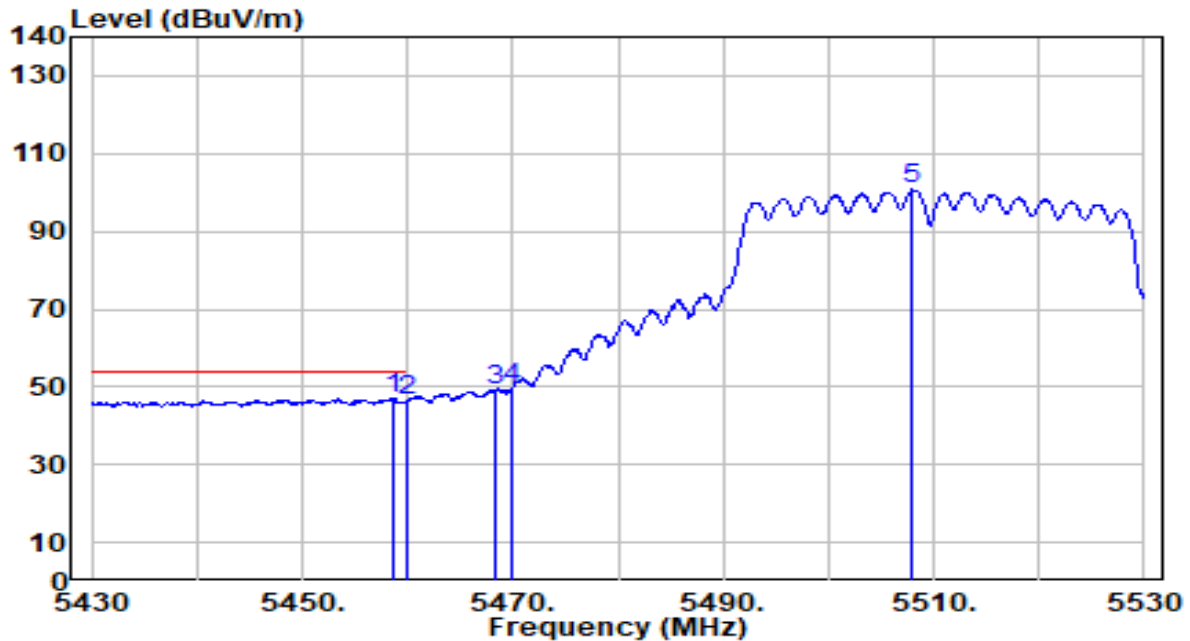


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.600	46.40	0.66	47.06	-6.94	54.00	100	144	Average
2		5460.000	45.99	0.66	46.66	-7.34	54.00	100	144	Average
3		5468.300	48.53	0.70	49.23	N/A	N/A	100	144	Average
4		5470.000	49.12	0.71	49.83	N/A	N/A	100	144	Average
5		5508.000	99.78	0.88	100.66	N/A	N/A	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

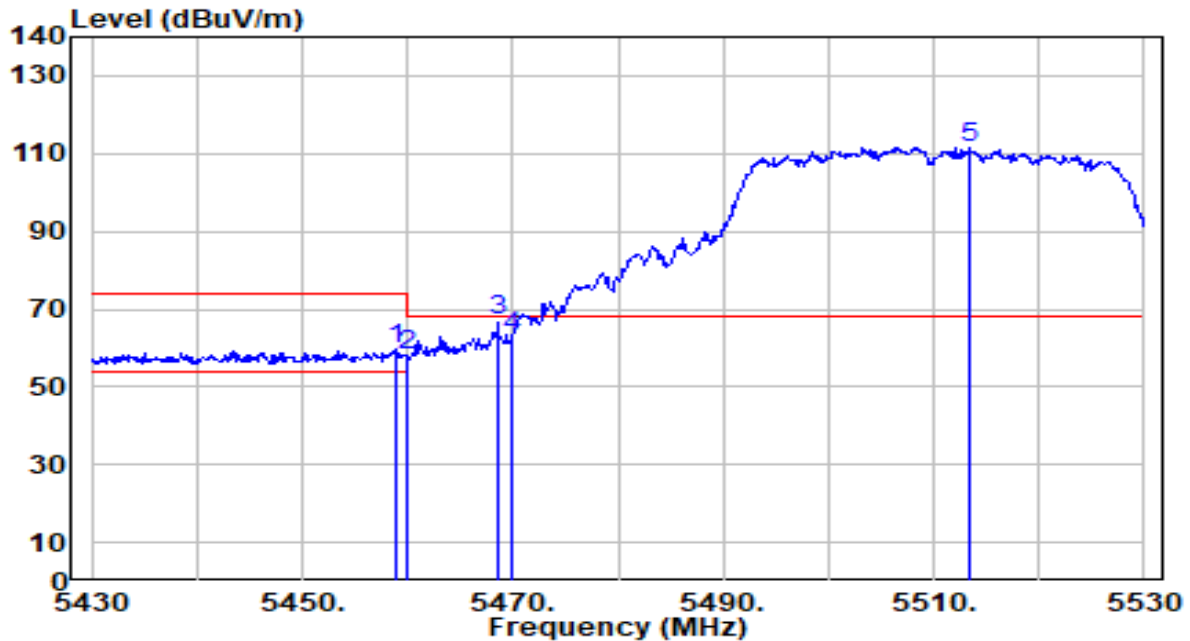


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.800	58.78	0.66	59.44	-14.56	74.00	109	184	Peak
2	5460.000	57.67	0.66	58.33	-15.67	74.00	109	184	Peak
3	* 5468.600	66.51	0.70	67.21	-0.99	68.20	109	184	Peak
4	5470.000	62.34	0.71	63.05	-5.15	68.20	109	184	Peak
5	5513.500	110.52	0.90	111.43	N/A	N/A	109	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

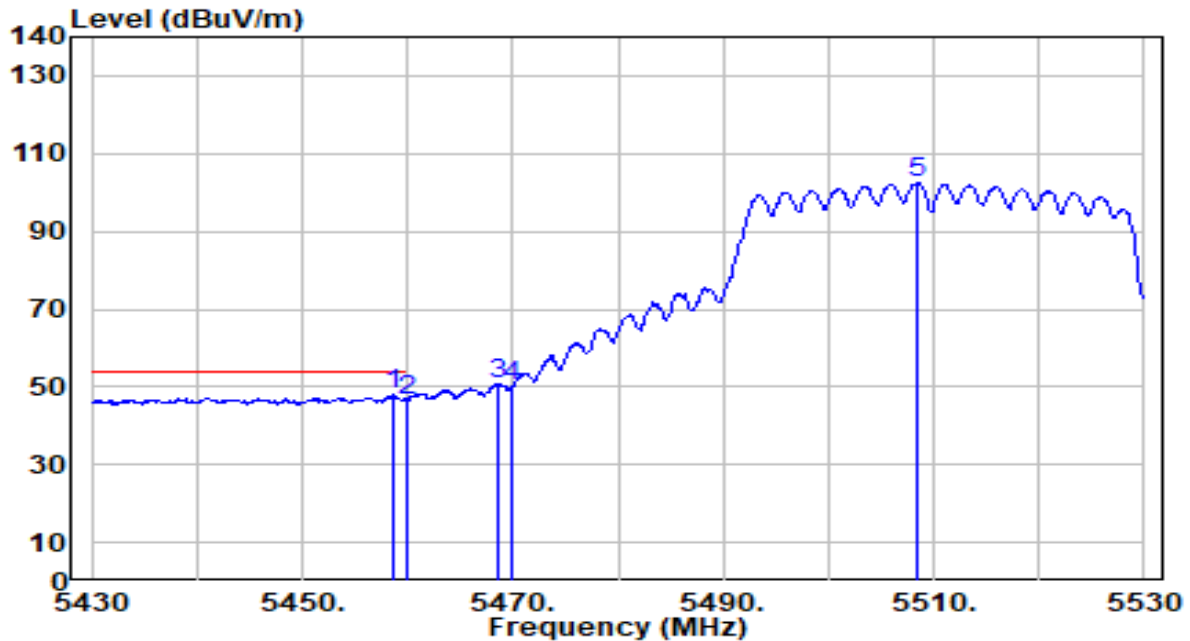


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.700	47.21	0.66	47.86	-6.14	54.00	109	184	Average
2		5460.000	46.07	0.66	46.74	-7.26	54.00	109	184	Average
3		5468.600	49.86	0.70	50.56	N/A	N/A	109	184	Average
4		5470.000	49.54	0.71	50.25	N/A	N/A	109	184	Average
5		5508.500	101.61	0.88	102.49	N/A	N/A	109	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

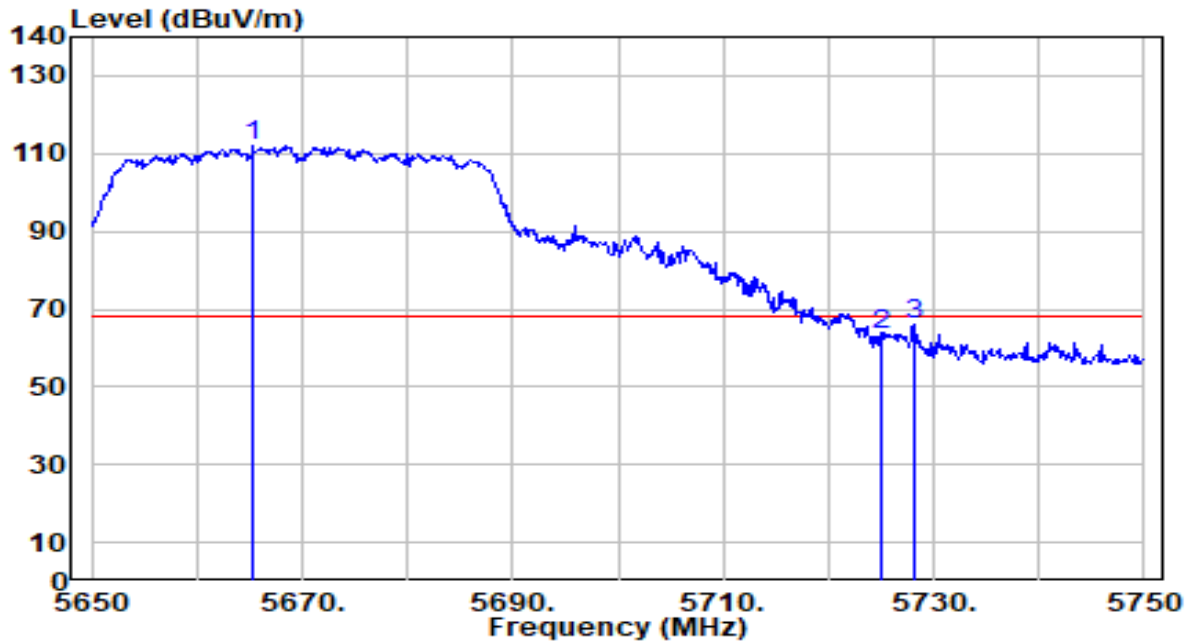


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.300	110.60	1.61	112.21	N/A	N/A	200	119	Peak
2	5725.000	61.38	1.89	63.28	-4.92	68.20	200	119	Peak
3	* 5728.200	64.19	1.91	66.10	-2.10	68.20	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

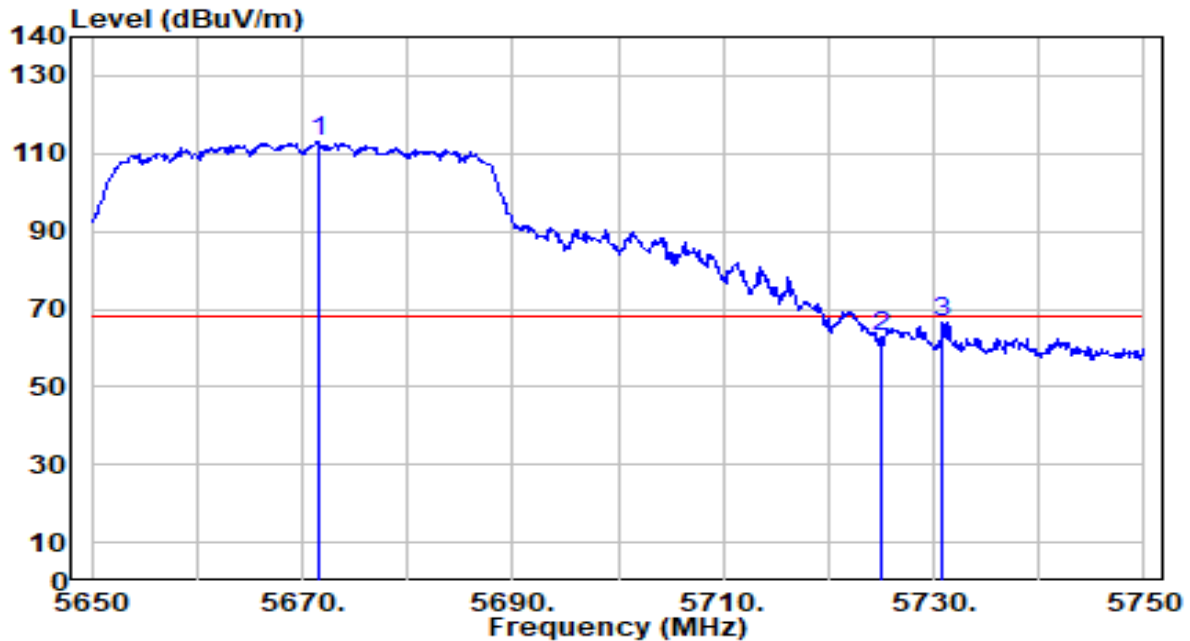


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.500	111.59	1.64	113.24	N/A	N/A	100	202	Peak
2	5725.000	60.74	1.89	62.63	-5.57	68.20	100	202	Peak
3	* 5730.900	64.66	1.92	66.58	-1.62	68.20	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

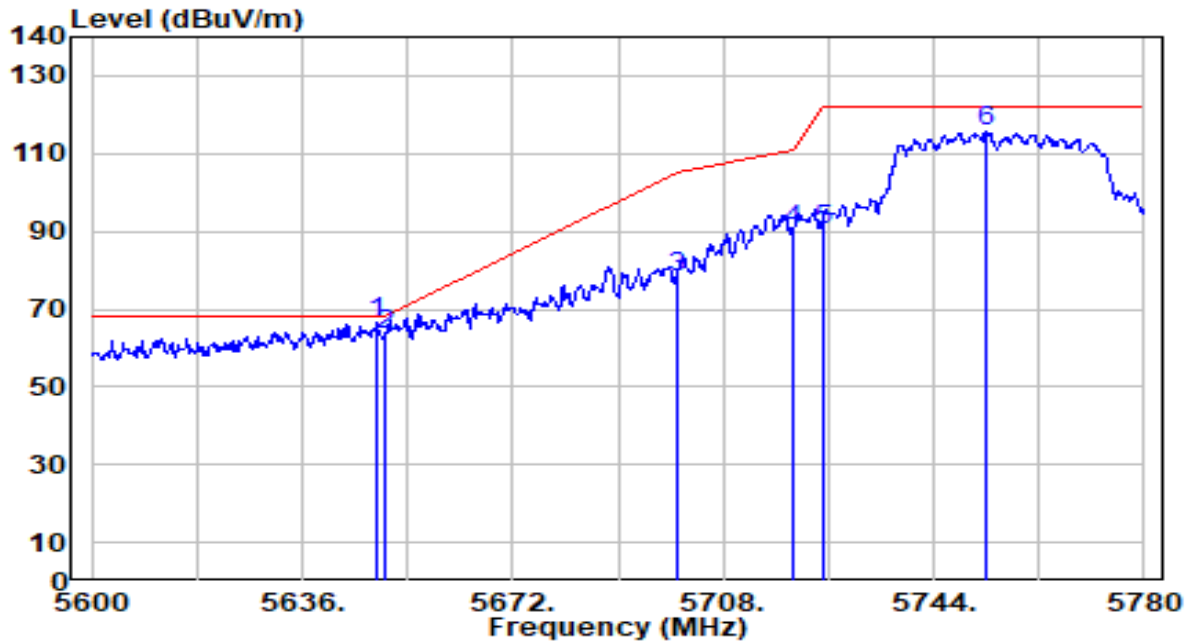


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.780	64.98	1.54	66.51	-1.69	68.20	208	193	Peak
2		5650.000	62.03	1.54	63.57	-4.63	68.20	208	193	Peak
3		5700.000	76.66	1.78	78.44	-26.76	105.20	208	193	Peak
4		5720.000	88.71	1.87	90.58	-20.22	110.80	208	193	Peak
5		5725.000	88.64	1.89	90.53	-31.67	122.20	208	193	Peak
6		5753.000	113.42	2.02	115.44	N/A	N/A	208	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

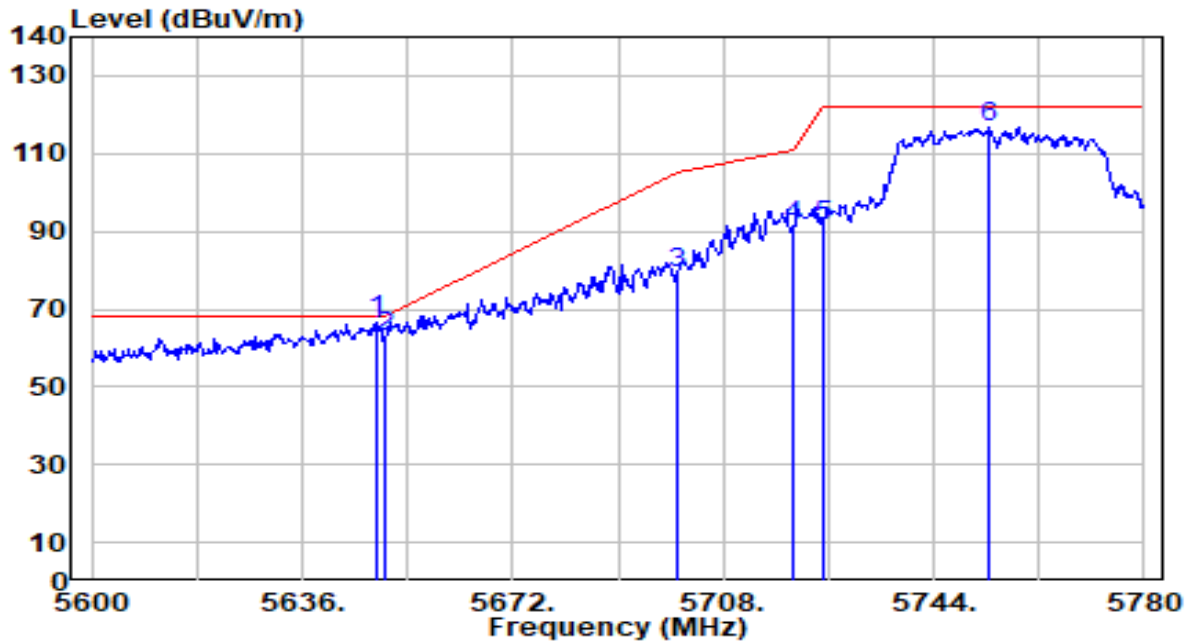


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.780	65.81	1.54	67.34	-0.86	68.20	102	193	Peak
2		5650.000	61.36	1.54	62.91	-5.29	68.20	102	193	Peak
3		5700.000	77.28	1.78	79.06	-26.14	105.20	102	193	Peak
4		5720.000	89.74	1.87	91.61	-19.19	110.80	102	193	Peak
5		5725.000	89.58	1.89	91.47	-30.73	122.20	102	193	Peak
6		5753.540	114.58	2.03	116.61	N/A	N/A	102	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

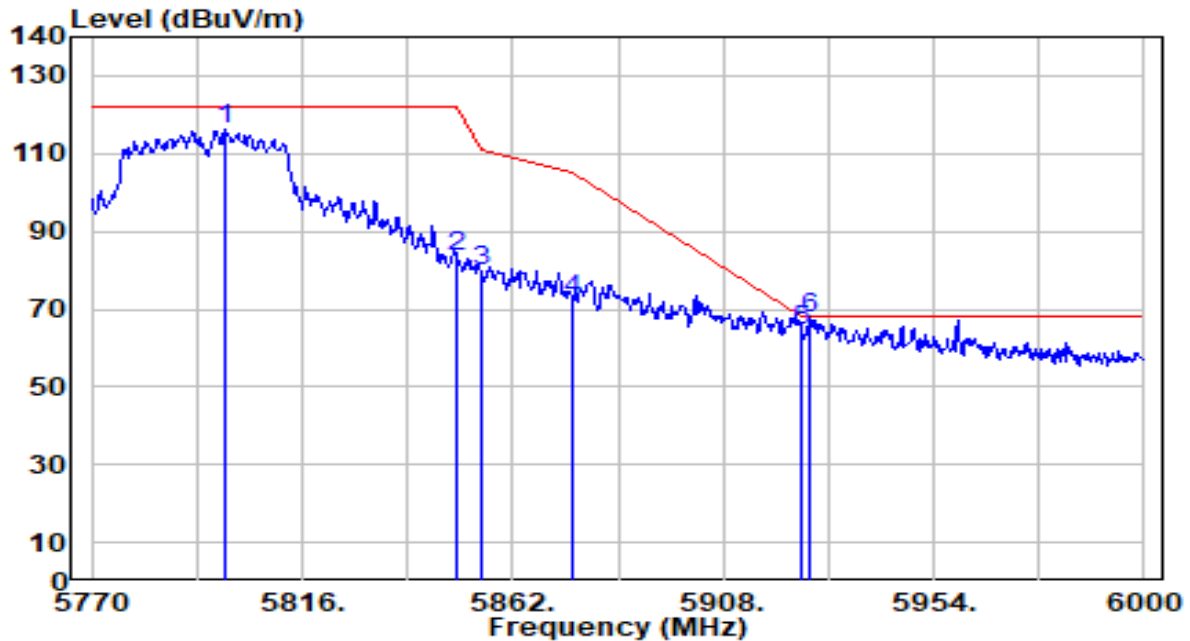


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.440	113.72	2.24	115.96	N/A	N/A	191	245	Peak
2	5850.000	81.24	2.25	83.50	-38.70	122.20	191	245	Peak
3	5855.000	77.62	2.25	79.87	-30.93	110.80	191	245	Peak
4	5875.000	70.12	2.26	72.38	-32.82	105.20	191	245	Peak
5	5925.000	62.25	2.27	64.51	-3.69	68.20	191	245	Peak
6	* 5926.630	65.10	2.27	67.37	-0.83	68.20	191	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

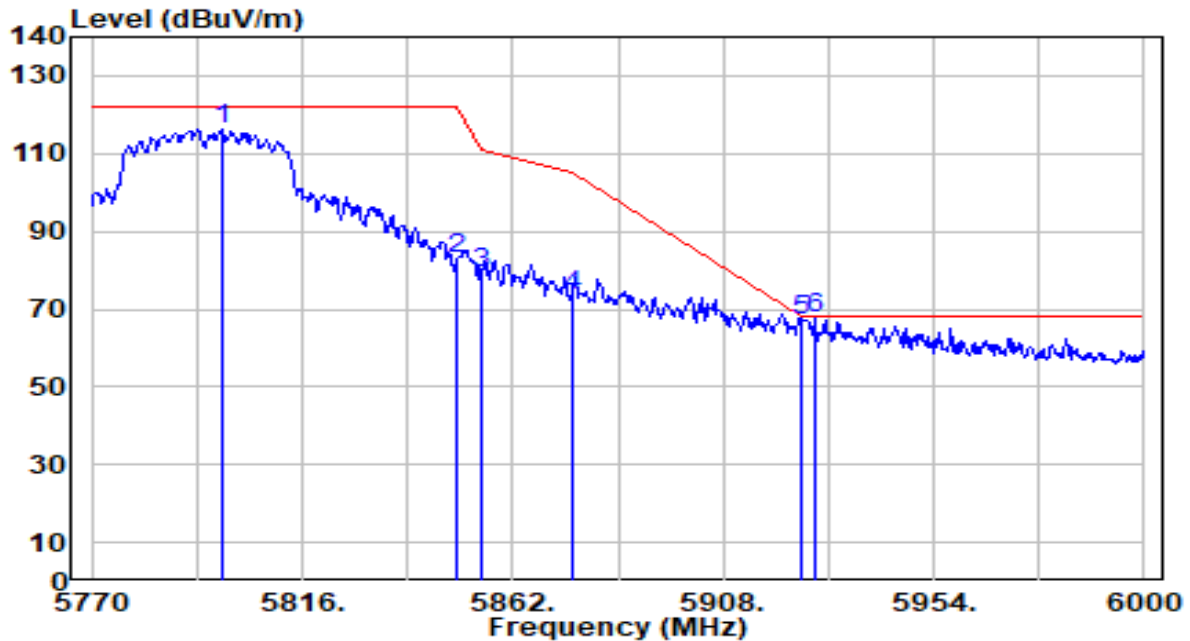


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.290	113.93	2.24	116.17	N/A	N/A	100	192	Peak
2	5850.000	80.56	2.25	82.81	-39.39	122.20	100	192	Peak
3	5855.000	76.91	2.25	79.17	-31.63	110.80	100	192	Peak
4	5875.000	71.41	2.26	73.67	-31.53	105.20	100	192	Peak
5	5925.000	65.04	2.27	67.31	-0.89	68.20	100	192	Peak
6	* 5928.010	65.35	2.27	67.62	-0.58	68.20	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

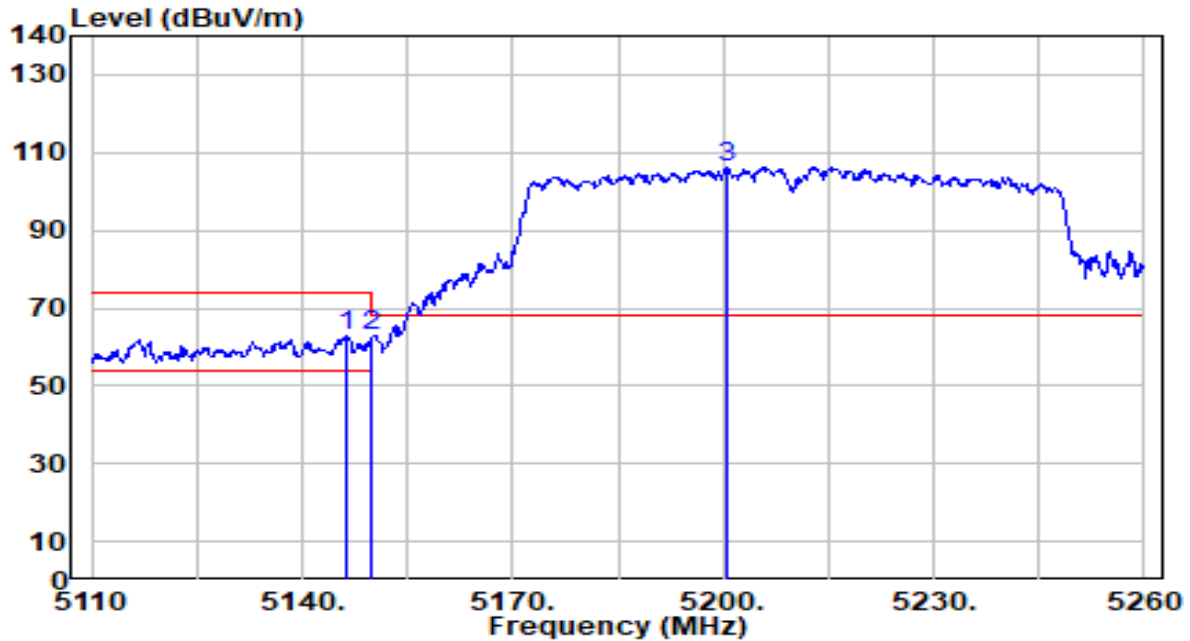


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.300	62.45	0.65	63.10	-10.90	74.00	286	197	Peak
2		5150.000	62.09	0.65	62.74	-11.26	74.00	286	197	Peak
3		5200.450	105.71	0.70	106.41	N/A	N/A	286	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

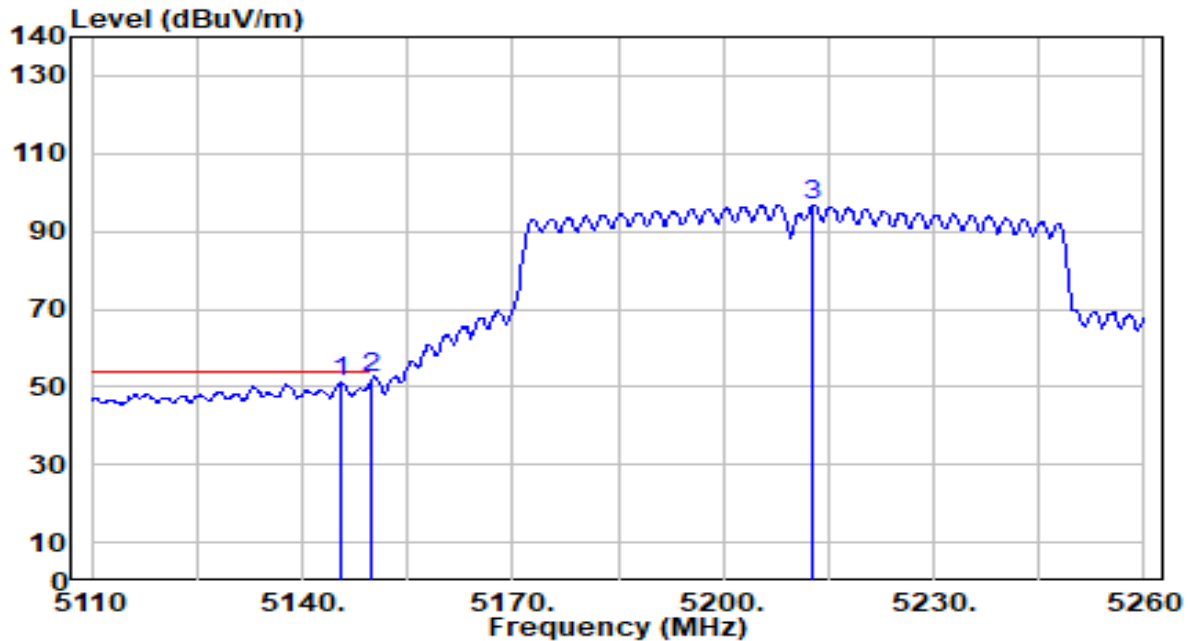


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.400	50.57	0.65	51.22	-2.78	54.00	286	197	Average
2	*	5150.000	51.55	0.65	52.21	-1.79	54.00	286	197	Average
3		5212.750	96.13	0.68	96.81	N/A	N/A	286	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

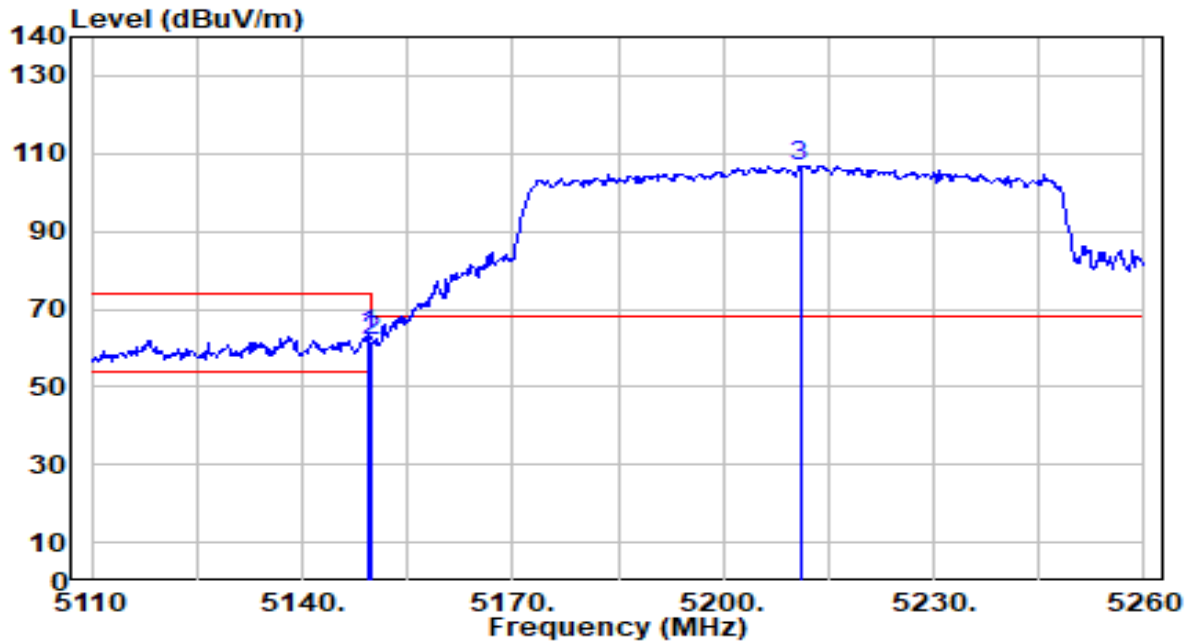


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	62.51	0.65	63.16	-10.84	74.00	173	169	Peak
2		5150.000	61.11	0.65	61.76	-12.24	74.00	173	169	Peak
3		5210.950	106.13	0.69	106.81	N/A	N/A	173	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

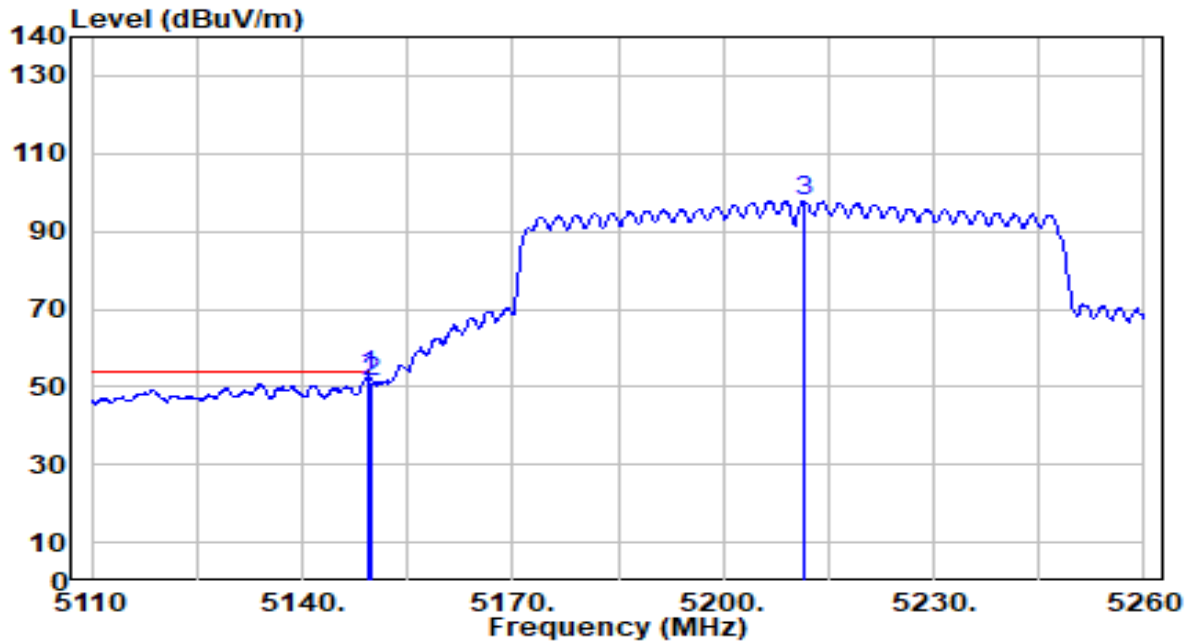


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	52.40	0.65	53.05	-0.95	54.00	173	169	Average
2		5150.000	50.85	0.65	51.51	-2.49	54.00	173	169	Average
3		5211.400	97.20	0.68	97.89	N/A	N/A	173	169	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

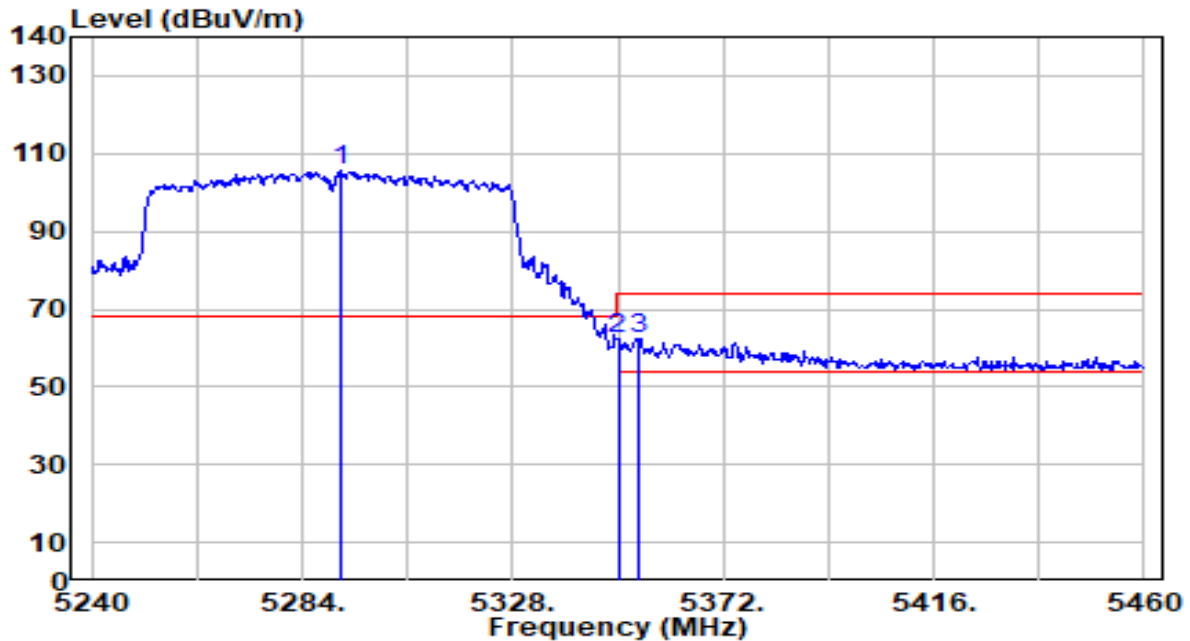


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.920	104.96	0.56	105.53	N/A	N/A	248	191	Peak
2	5350.000	61.79	0.47	62.26	-11.74	74.00	248	191	Peak
3	* 5354.180	62.00	0.46	62.46	-11.54	74.00	248	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

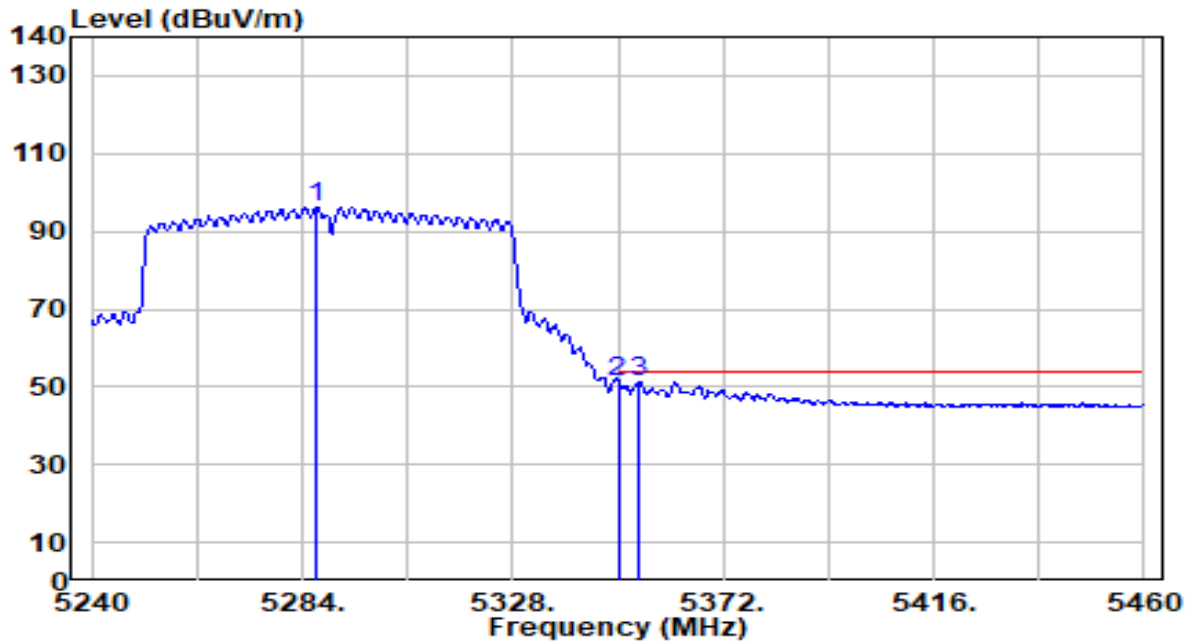


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5286.860	95.70	0.57	96.27	N/A	N/A	248	191	Average
2	*	5350.000	51.02	0.47	51.49	-2.51	54.00	248	191	Average
3		5354.400	50.76	0.46	51.22	-2.78	54.00	248	191	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

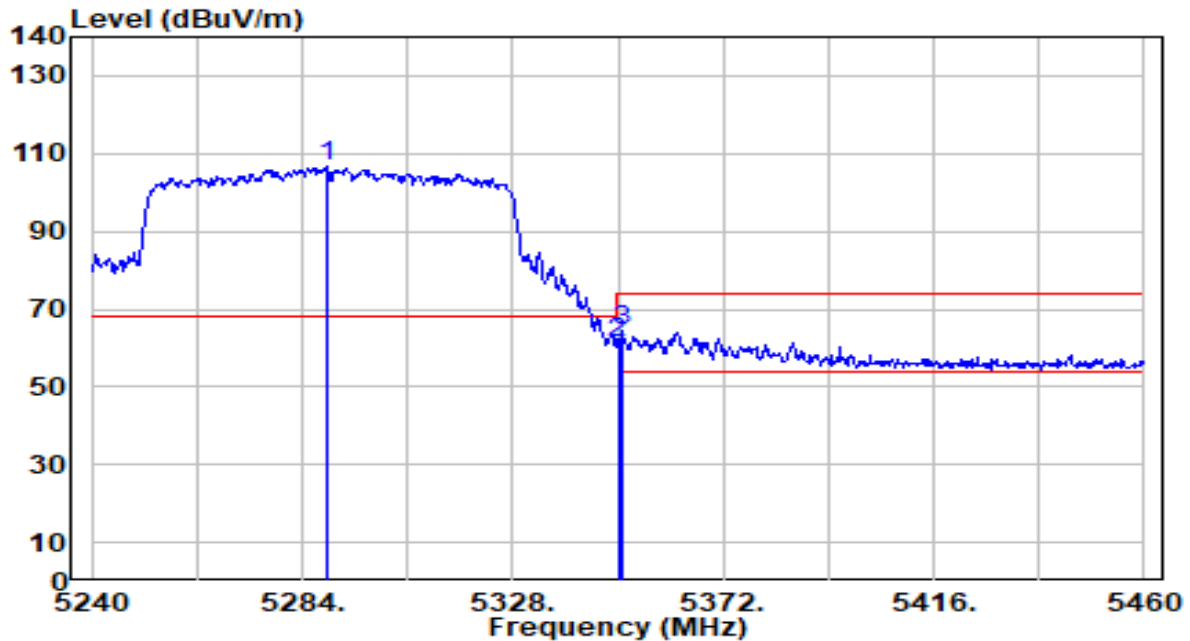


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5289.060	106.03	0.56	106.60	N/A	N/A	130	172	Peak
2	5350.000	60.83	0.47	61.30	-12.70	74.00	130	172	Peak
3	* 5350.880	63.81	0.47	64.28	-9.72	74.00	130	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

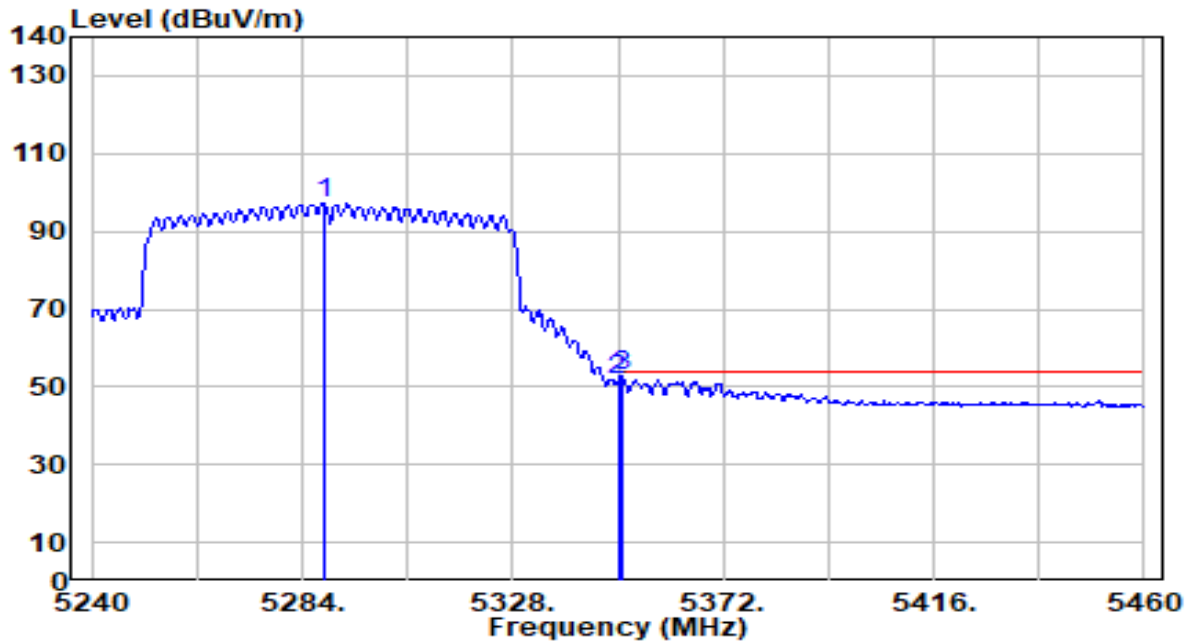


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5288.400	96.85	0.57	97.42	N/A	N/A	130	172	Average
2	5350.000	51.41	0.47	51.88	-2.12	54.00	130	172	Average
3	* 5350.880	52.60	0.47	53.07	-0.93	54.00	130	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

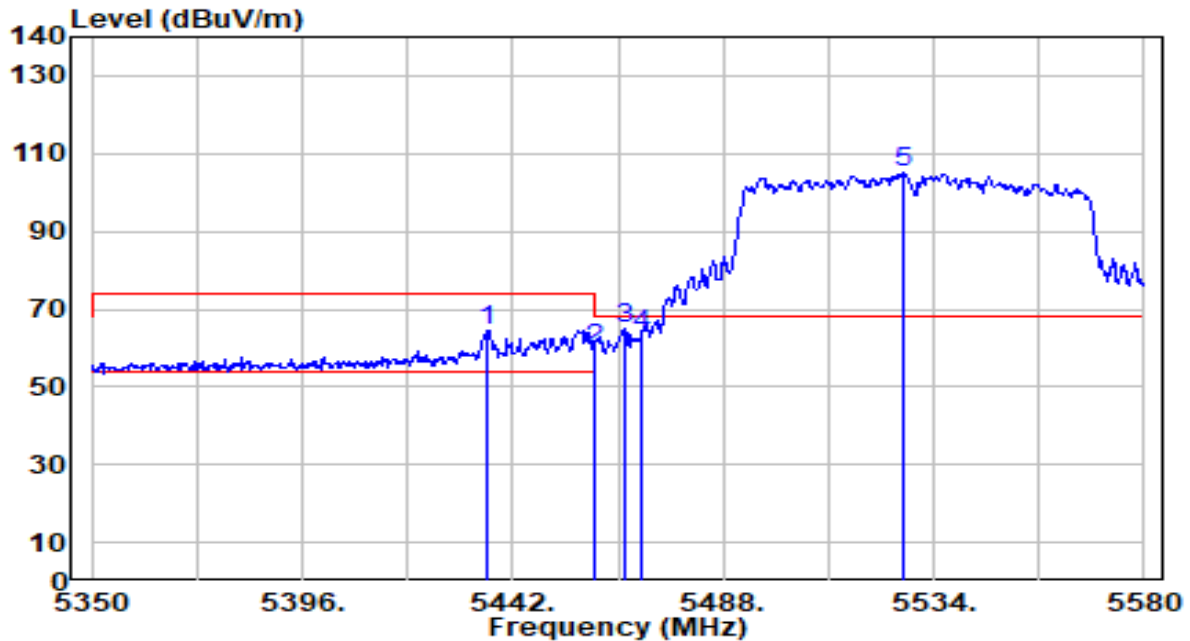


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5436.250	63.94	0.56	64.49	-9.51	74.00	100	144	Peak
2	5460.000	59.25	0.66	59.91	-14.09	74.00	100	144	Peak
3	* 5466.380	64.24	0.69	64.93	-3.27	68.20	100	144	Peak
4	5470.000	62.57	0.71	63.28	-4.92	68.20	100	144	Peak
5	5527.330	103.91	0.97	104.88	N/A	N/A	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

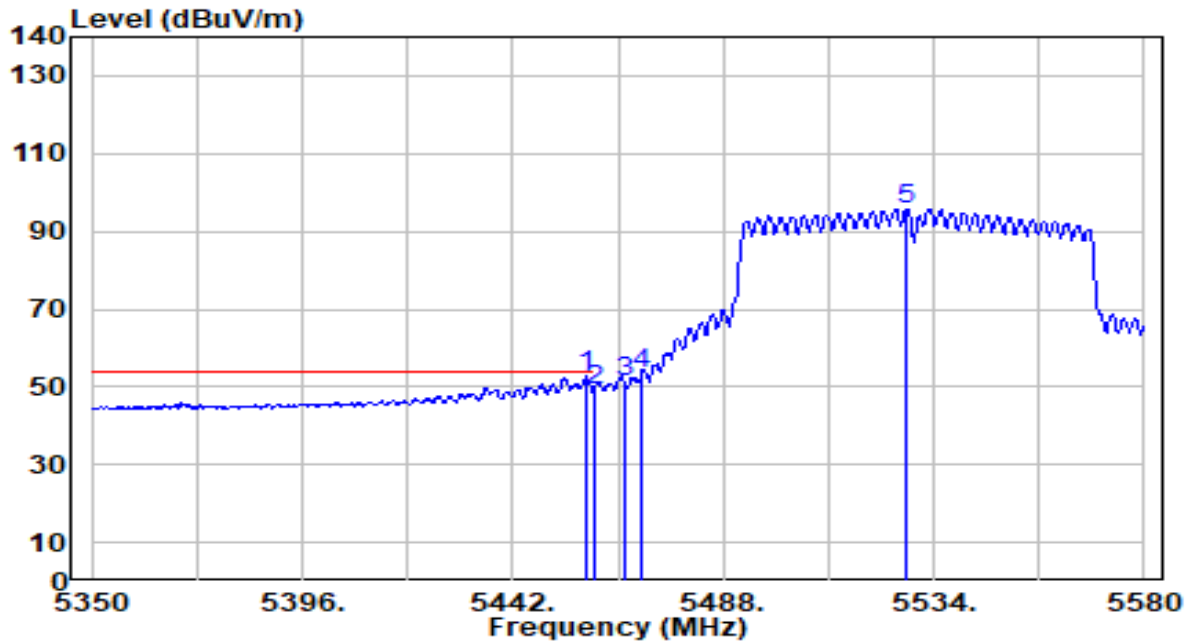


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.870	51.97	0.65	52.62	-1.38	54.00	100	144	Average
2		5460.000	48.63	0.66	49.30	-4.70	54.00	100	144	Average
3		5466.380	50.50	0.69	51.19	N/A	N/A	100	144	Average
4		5470.000	52.70	0.71	53.41	N/A	N/A	100	144	Average
5		5528.250	94.75	0.97	95.72	N/A	N/A	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

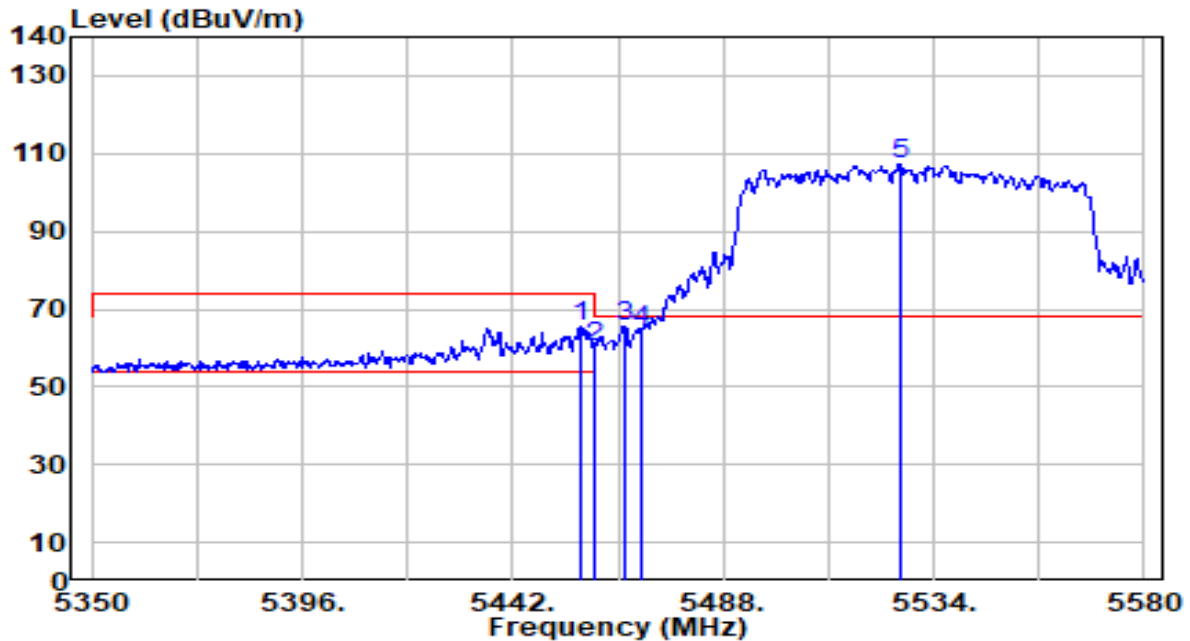


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.950	64.98	0.65	65.63	-8.37	74.00	109	184	Peak
2	5460.000	59.65	0.66	60.31	-13.69	74.00	109	184	Peak
3	* 5466.380	64.95	0.69	65.64	-2.56	68.20	109	184	Peak
4	5470.000	63.63	0.71	64.34	-3.86	68.20	109	184	Peak
5	5526.640	106.05	0.96	107.02	N/A	N/A	109	184	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

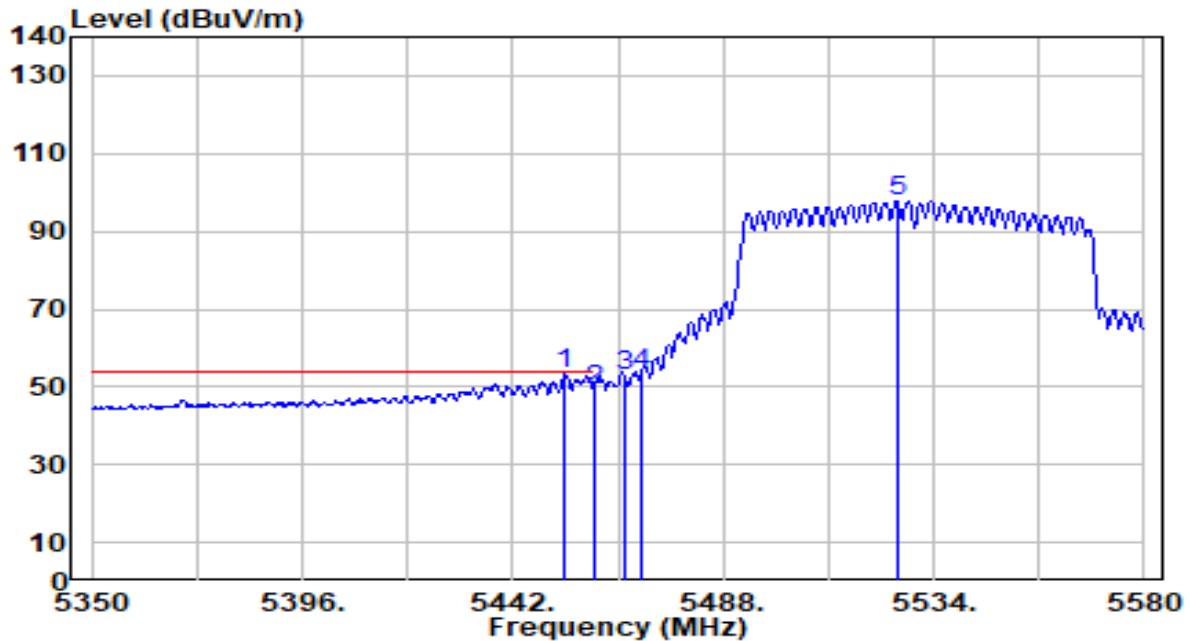


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.500	52.83	0.63	53.46	-0.54	54.00	109	184	Average
2		5460.000	48.65	0.66	49.31	-4.69	54.00	109	184	Average
3		5466.380	52.20	0.69	52.90	N/A	N/A	109	184	Peak
4		5470.000	52.84	0.71	53.55	N/A	N/A	109	184	Average
5		5525.950	96.98	0.96	97.94	N/A	N/A	109	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

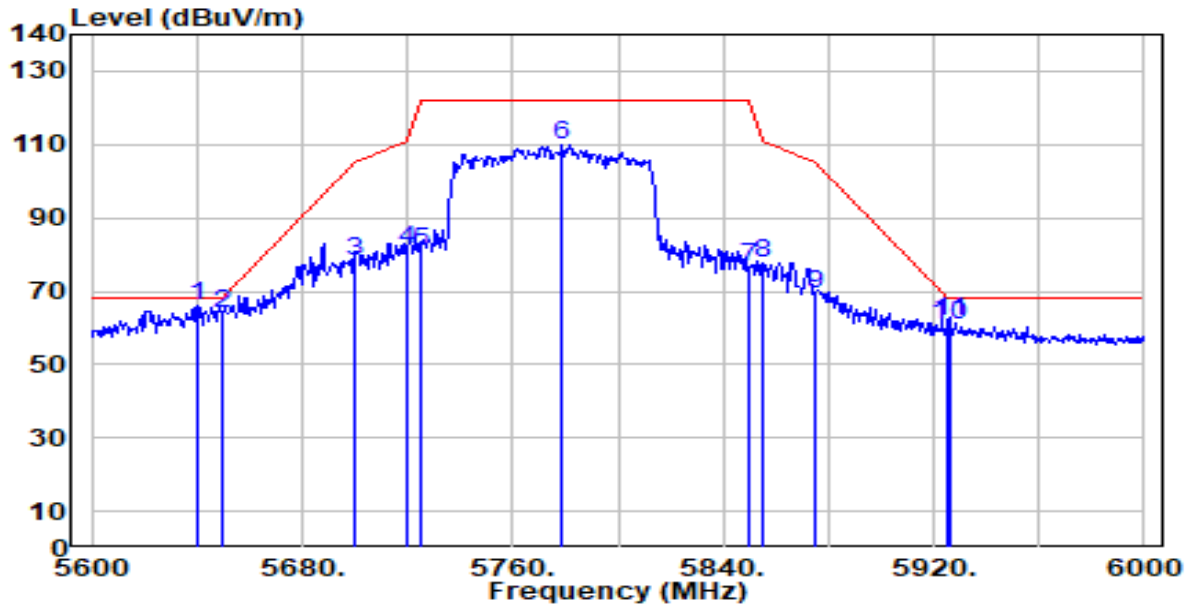


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.400	64.36	1.50	65.86	-2.34	68.20	208	192	Peak
2		5650.000	62.49	1.54	64.03	-4.17	68.20	208	192	Peak
3		5700.000	76.63	1.78	78.41	-26.79	105.20	208	192	Peak
4		5720.000	79.35	1.87	81.22	-29.58	110.80	208	192	Peak
5		5725.000	79.05	1.89	80.94	-41.26	122.20	208	192	Peak
6		5778.400	107.63	2.14	109.78	N/A	N/A	208	192	Peak
7		5850.000	74.27	2.25	76.52	-45.68	122.20	208	192	Peak
8		5855.000	75.35	2.25	77.60	-33.20	110.80	208	192	Peak
9		5875.000	67.18	2.26	69.44	-35.76	105.20	208	192	Peak
10		5925.000	58.27	2.27	60.54	-7.66	68.20	208	192	Peak
11		5926.400	59.53	2.27	61.79	-6.41	68.20	208	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

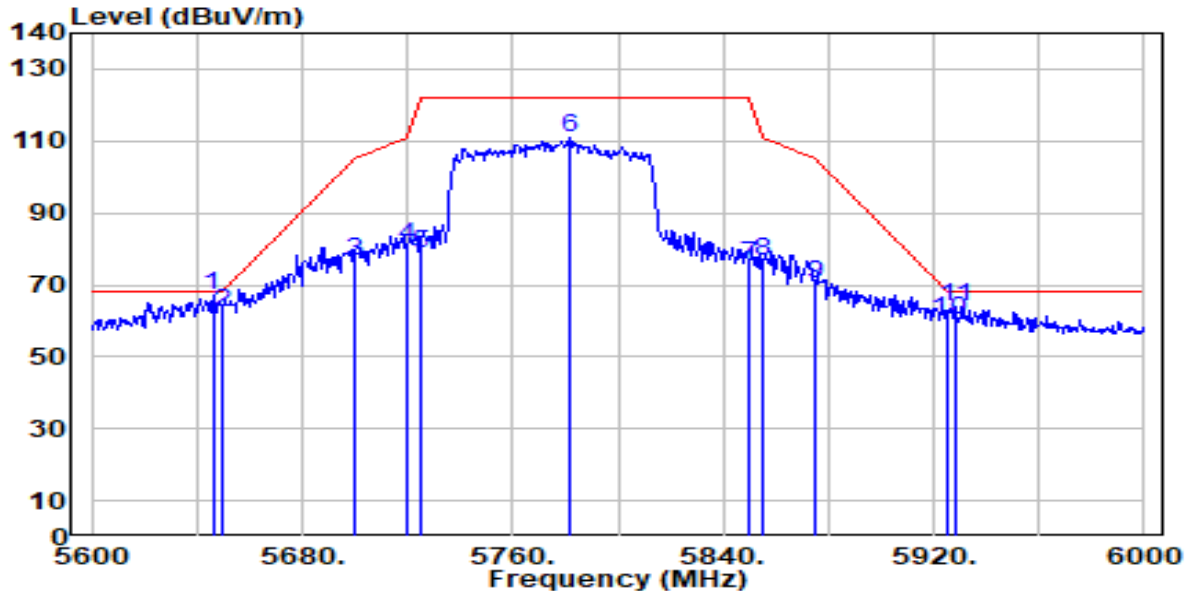


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.000	65.75	1.52	67.28	-0.92	68.20	102	193	Peak
2		5650.000	60.54	1.54	62.08	-6.12	68.20	102	193	Peak
3		5700.000	75.04	1.78	76.82	-28.38	105.20	102	193	Peak
4		5720.000	78.90	1.87	80.77	-30.03	110.80	102	193	Peak
5		5725.000	76.94	1.89	78.83	-43.37	122.20	102	193	Peak
6		5781.600	108.73	2.16	110.89	N/A	N/A	102	193	Peak
7		5850.000	73.41	2.25	75.67	-46.53	122.20	102	193	Peak
8		5855.000	74.15	2.25	76.41	-34.39	110.80	102	193	Peak
9		5875.000	68.27	2.26	70.52	-34.68	105.20	102	193	Peak
10		5925.000	57.80	2.27	60.07	-8.13	68.20	102	193	Peak
11		5928.400	61.77	2.27	64.03	-4.17	68.20	102	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

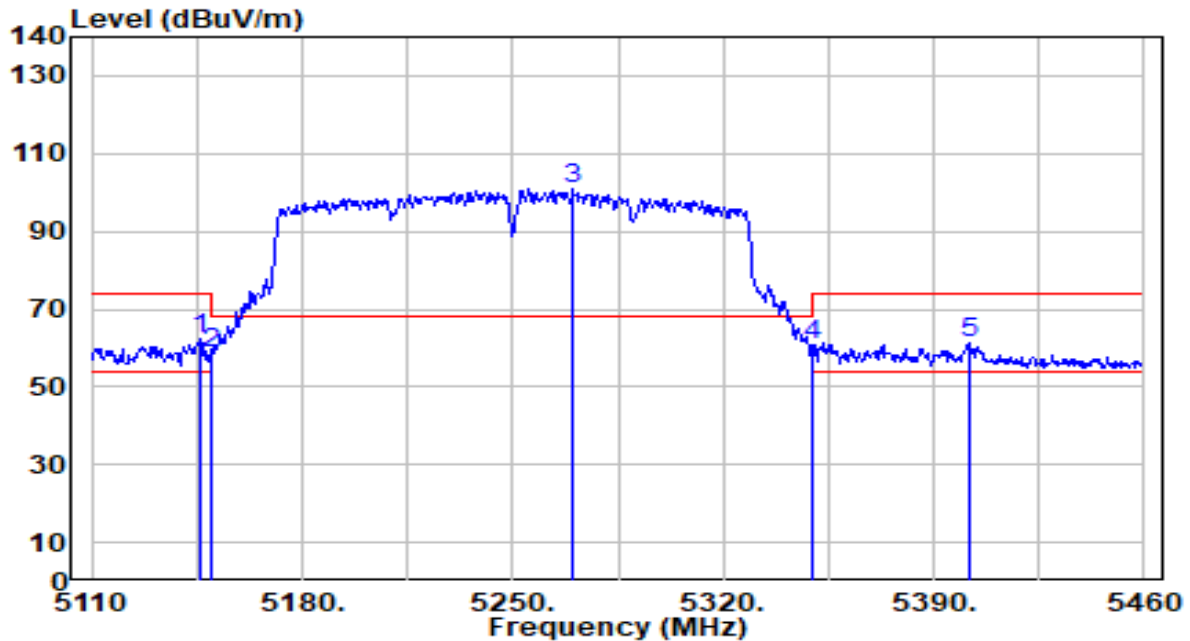


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.050	61.73	0.65	62.38	-11.62	74.00	286	197	Peak
2		5150.000	58.12	0.65	58.78	-15.22	74.00	286	197	Peak
3		5269.950	100.33	0.59	100.93	N/A	N/A	286	197	Peak
4		5350.000	60.27	0.47	60.74	-13.26	74.00	286	197	Peak
5		5401.550	61.03	0.40	61.43	-12.57	74.00	286	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

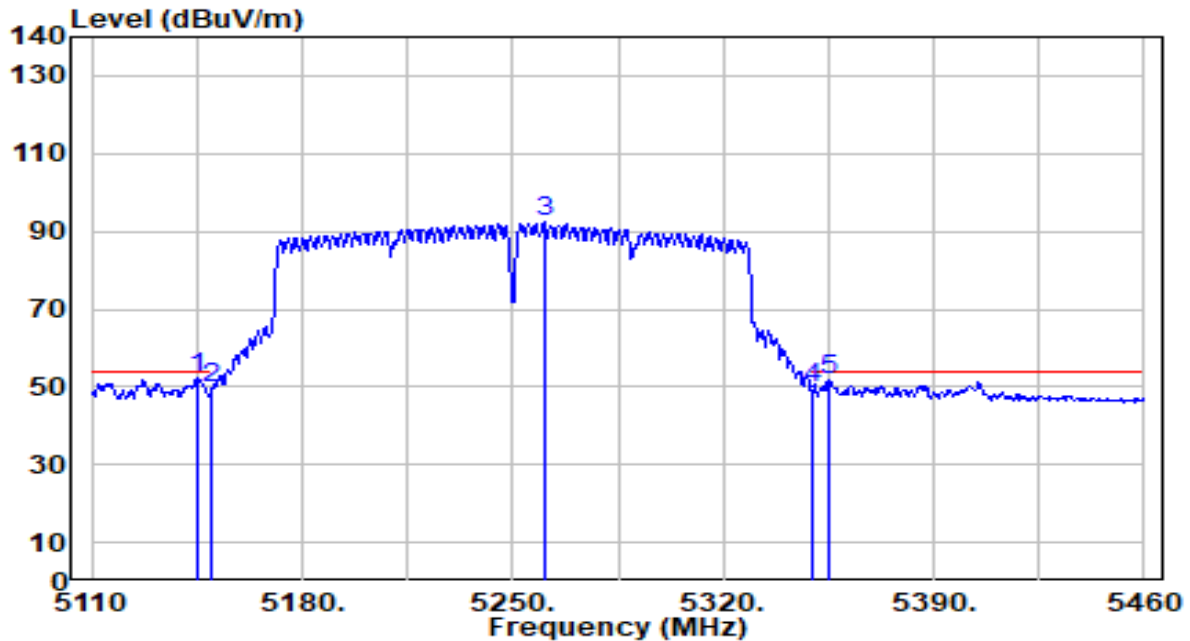


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.000	51.69	0.65	52.34	-1.66	54.00	286	197	Average
2		5150.000	48.93	0.65	49.59	-4.41	54.00	286	197	Average
3		5260.500	91.61	0.61	92.22	N/A	N/A	286	197	Average
4		5350.000	49.29	0.47	49.76	-4.24	54.00	286	197	Average
5		5355.000	51.33	0.46	51.80	-2.20	54.00	286	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

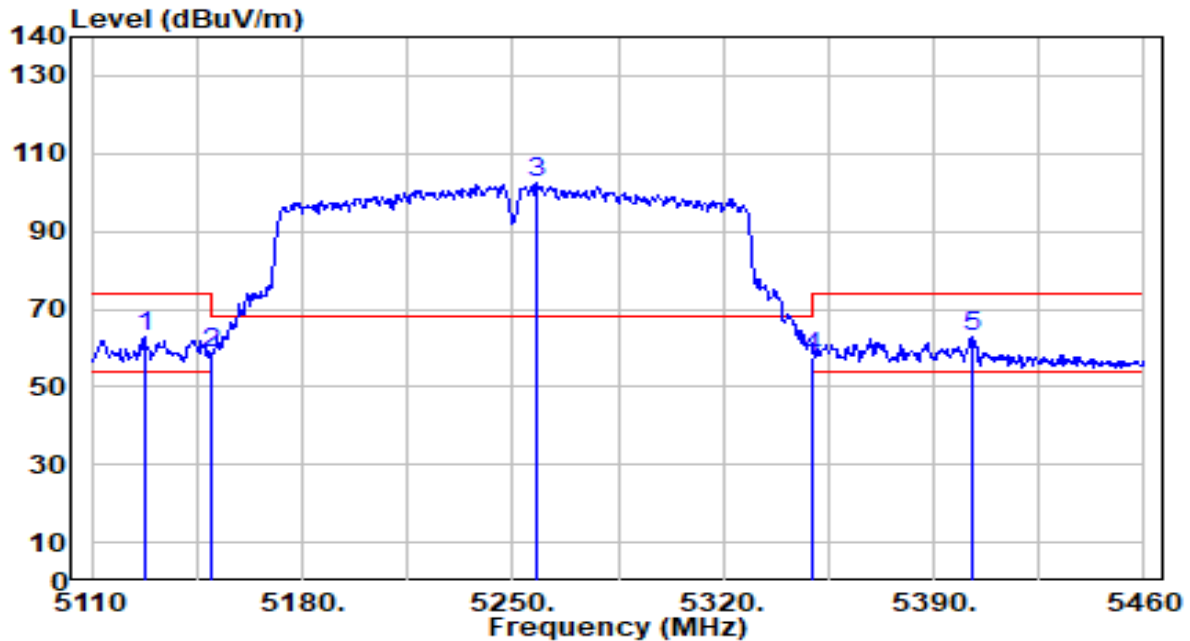


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5127.500	61.98	0.63	62.61	-11.39	74.00	173	169	Peak
2	5150.000	57.83	0.65	58.48	-15.52	74.00	173	169	Peak
3	5258.400	101.69	0.61	102.30	N/A	N/A	173	169	Peak
4	5350.000	57.30	0.47	57.77	-16.23	74.00	173	169	Peak
5	* 5402.600	62.30	0.41	62.70	-11.30	74.00	173	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

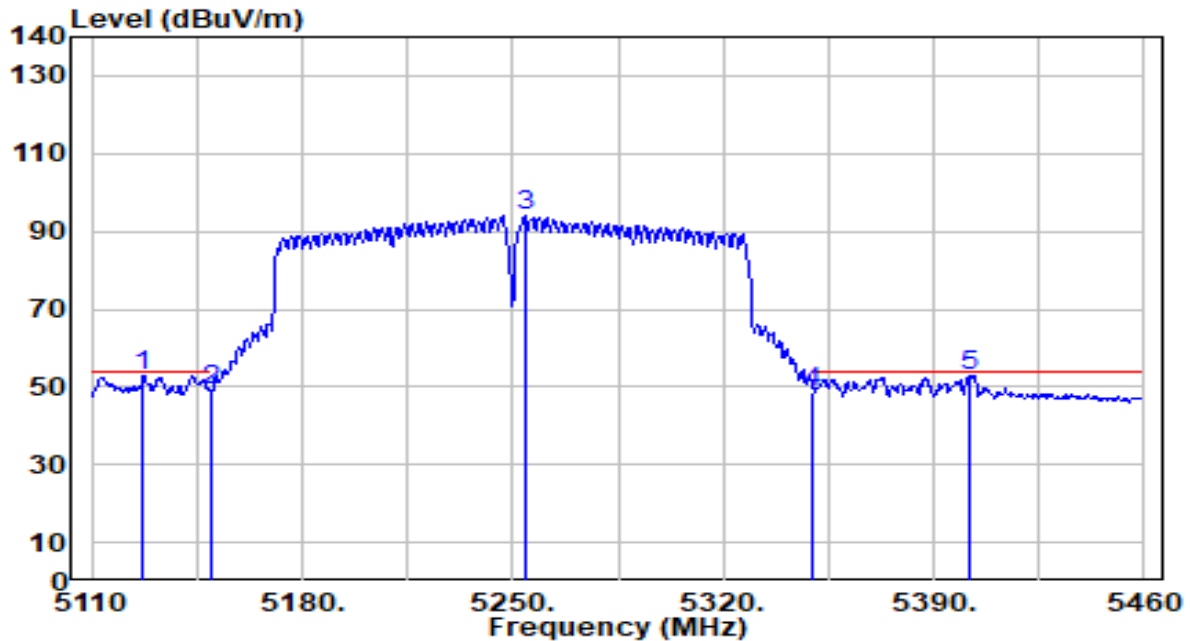


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5127.150	52.36	0.63	52.99	-1.01	54.00	173	169	Average
2	5150.000	48.63	0.65	49.29	-4.71	54.00	173	169	Average
3	5254.200	93.24	0.62	93.86	N/A	N/A	173	169	Average
4	5350.000	48.26	0.47	48.73	-5.27	54.00	173	169	Average
5	* 5401.550	52.61	0.40	53.01	-0.99	54.00	173	169	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

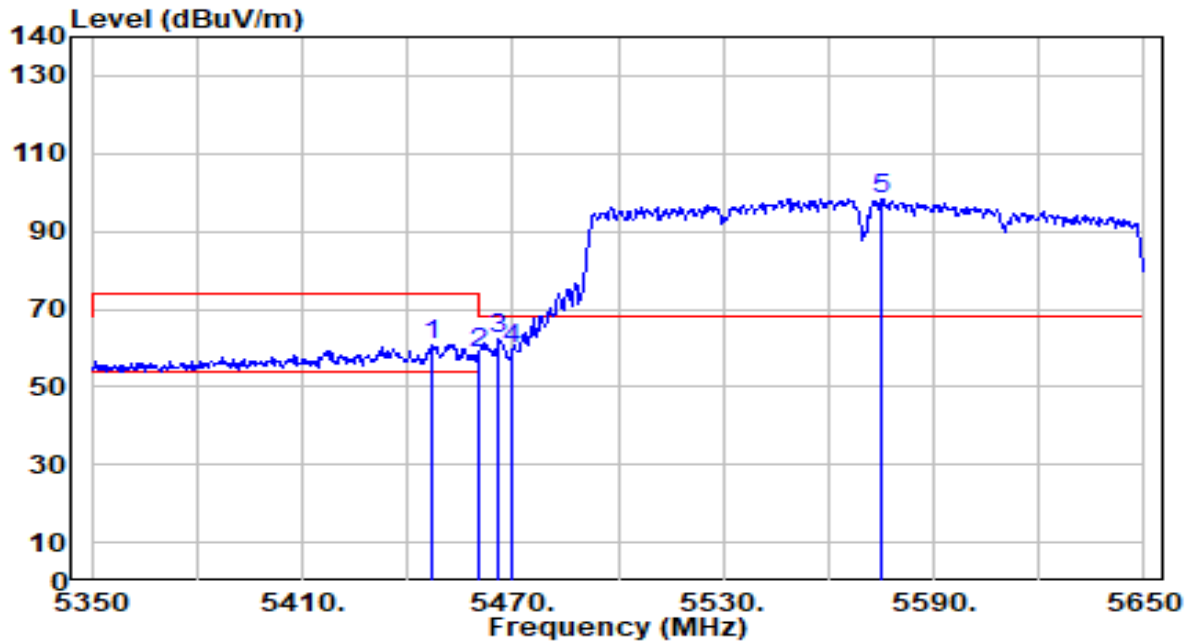


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.600	60.40	0.60	61.00	-13.00	74.00	100	144	Peak
2	5460.000	57.83	0.66	58.49	-15.51	74.00	100	144	Peak
3	* 5466.100	61.56	0.69	62.25	-5.95	68.20	100	144	Peak
4	5470.000	59.15	0.71	59.85	-8.35	68.20	100	144	Peak
5	5575.300	97.15	1.19	98.34	N/A	N/A	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

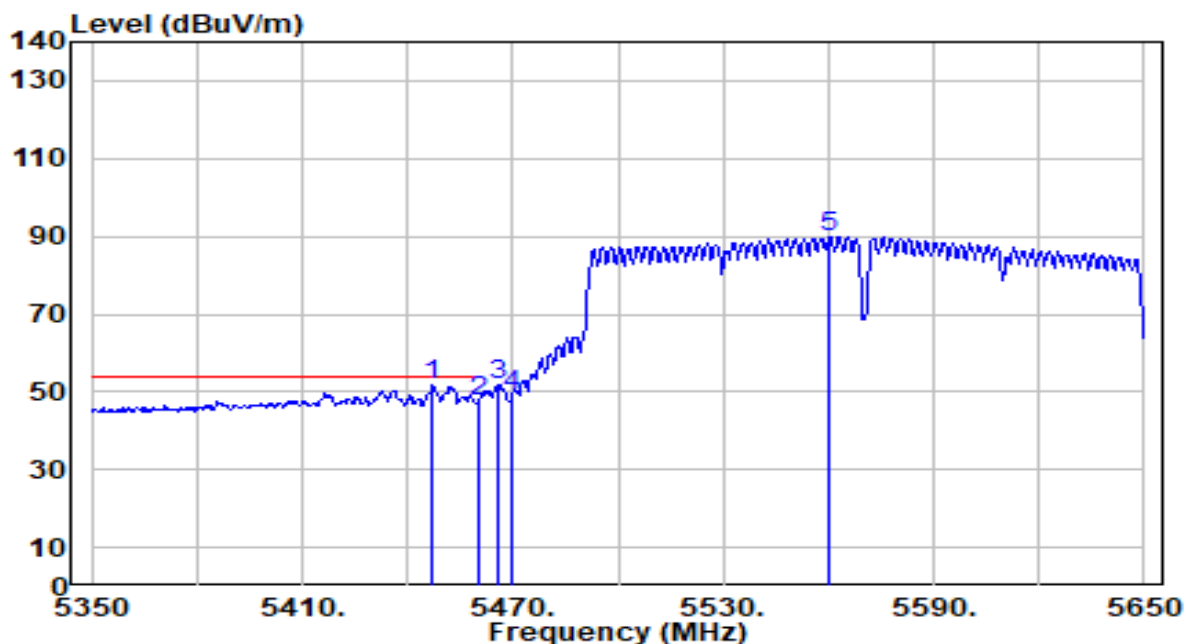


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5447.200	50.91	0.60	51.51	-2.49	54.00	100	144	Average
2		5460.000	46.72	0.66	47.39	-6.61	54.00	100	144	Average
3		5466.100	51.14	0.69	51.83	N/A	N/A	100	144	Average
4		5470.000	48.35	0.71	49.05	N/A	N/A	100	144	Average
5		5560.300	88.81	1.12	89.93	N/A	N/A	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

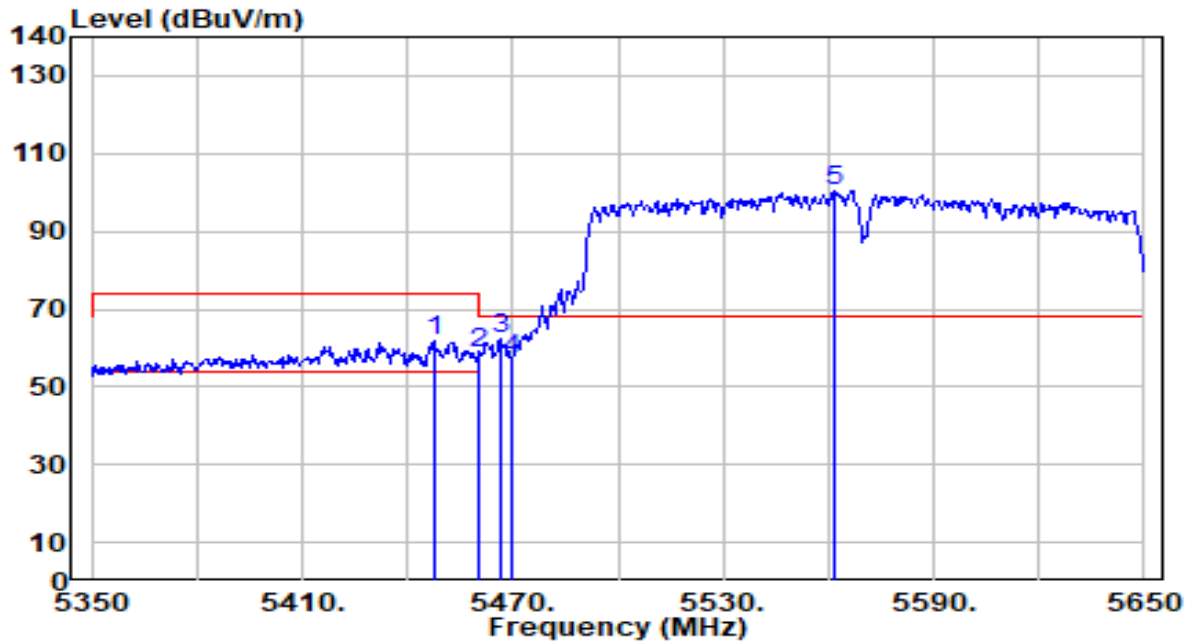


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.800	61.16	0.61	61.77	-12.23	74.00	109	184	Peak
2	5460.000	57.89	0.66	58.55	-15.45	74.00	109	184	Peak
3	* 5466.400	61.70	0.69	62.39	-5.81	68.20	109	184	Peak
4	5470.000	56.30	0.71	57.00	-11.20	68.20	109	184	Peak
5	5561.500	99.38	1.13	100.51	N/A	N/A	109	184	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

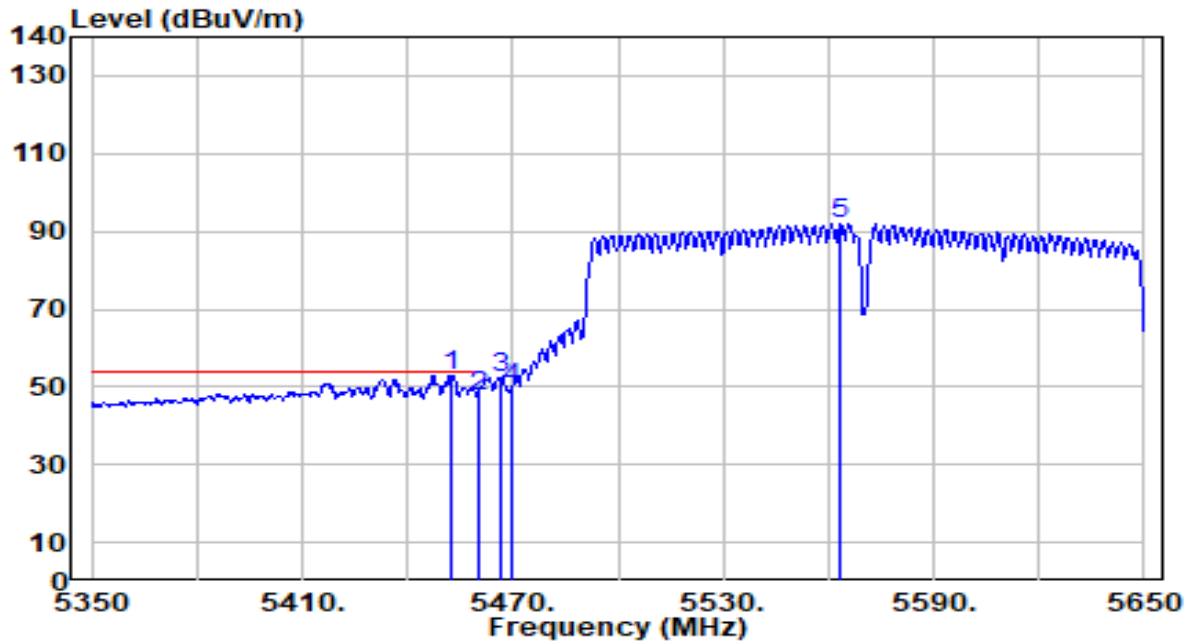


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.300	52.42	0.63	53.05	-0.95	54.00	109	184	Average
2		5460.000	46.97	0.66	47.63	-6.37	54.00	109	184	Average
3		5466.400	51.48	0.69	52.17	N/A	N/A	109	184	Average
4		5470.000	48.97	0.71	49.68	N/A	N/A	109	184	Average
5		5563.300	90.86	1.14	91.99	N/A	N/A	109	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

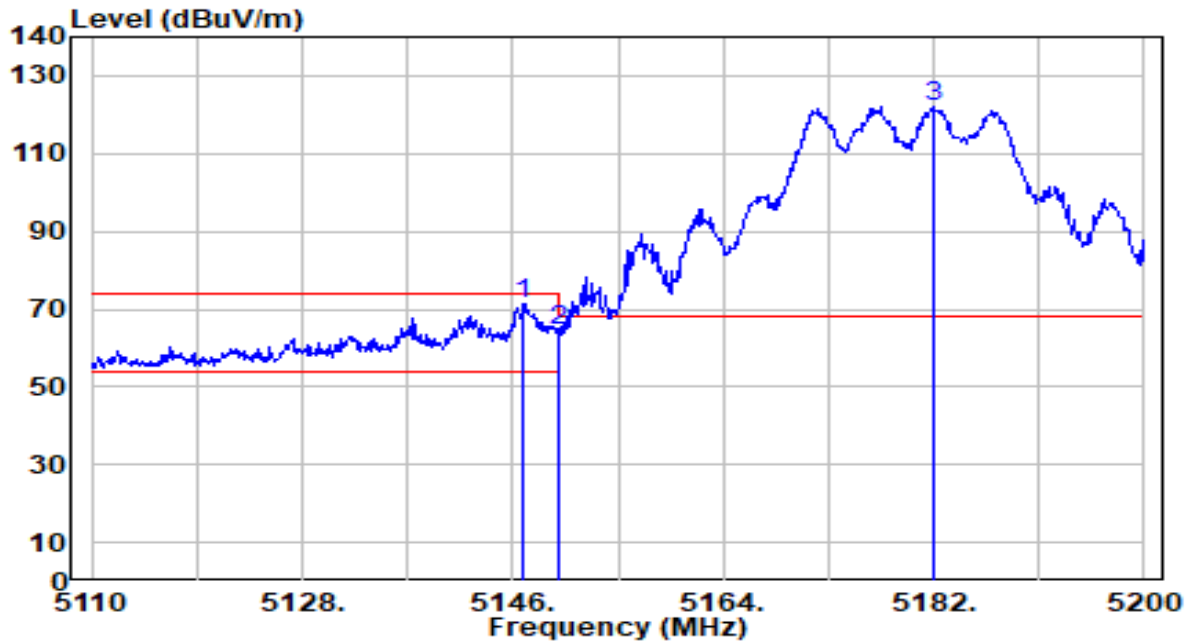


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	70.82	0.65	71.47	-2.53	74.00	220	222	Peak
2		5150.000	63.73	0.65	64.39	-9.61	74.00	220	222	Peak
3		5181.910	121.36	0.68	122.05	N/A	N/A	220	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

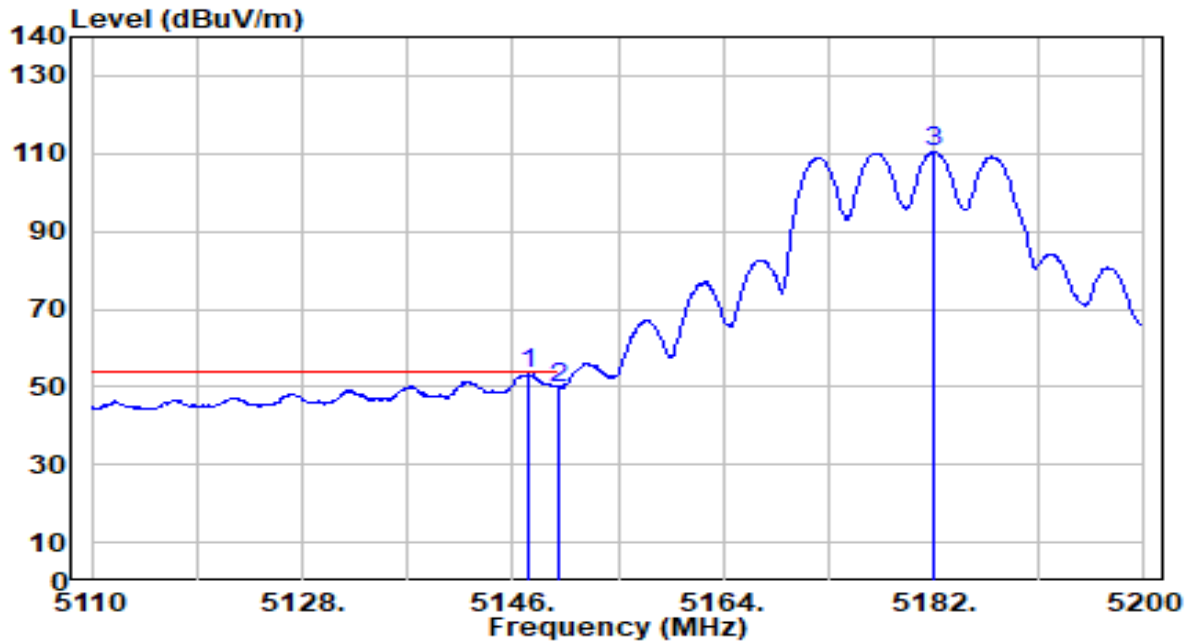


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.440	52.68	0.65	53.34	-0.66	54.00	220	222	Average
2		5150.000	49.20	0.65	49.85	-4.15	54.00	220	222	Average
3		5182.090	109.83	0.68	110.51	N/A	N/A	220	222	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

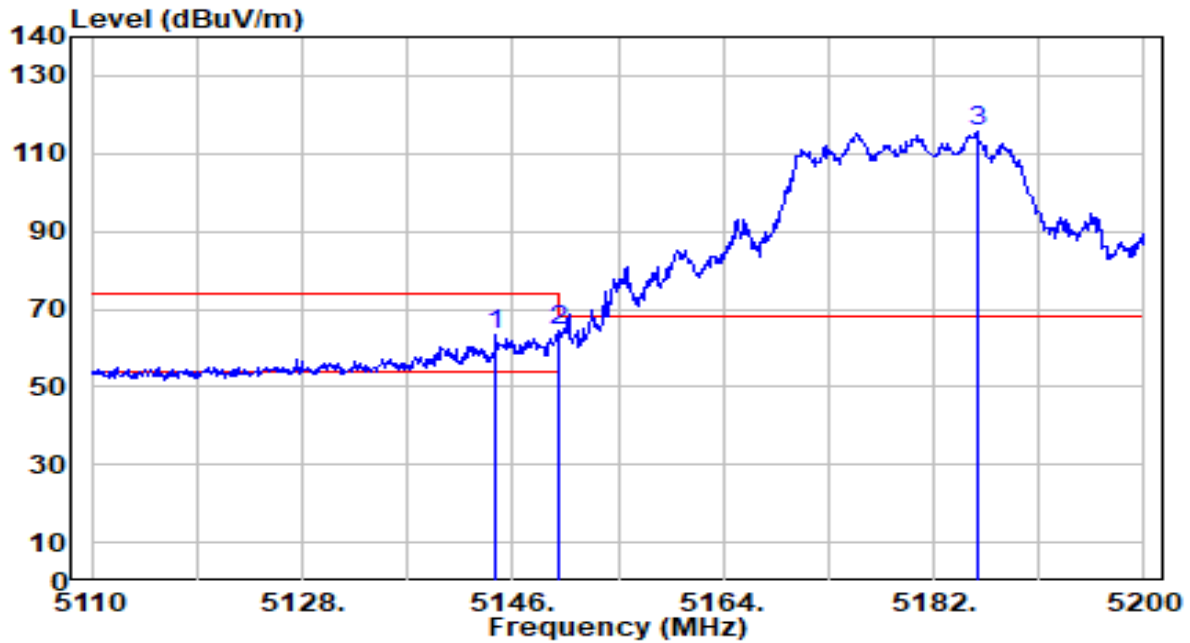


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5144.560	62.49	0.65	63.14	-10.86	74.00	193	218	Peak
2	*	5150.000	63.87	0.65	64.53	-9.47	74.00	193	218	Peak
3		5185.690	114.77	0.69	115.46	N/A	N/A	193	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

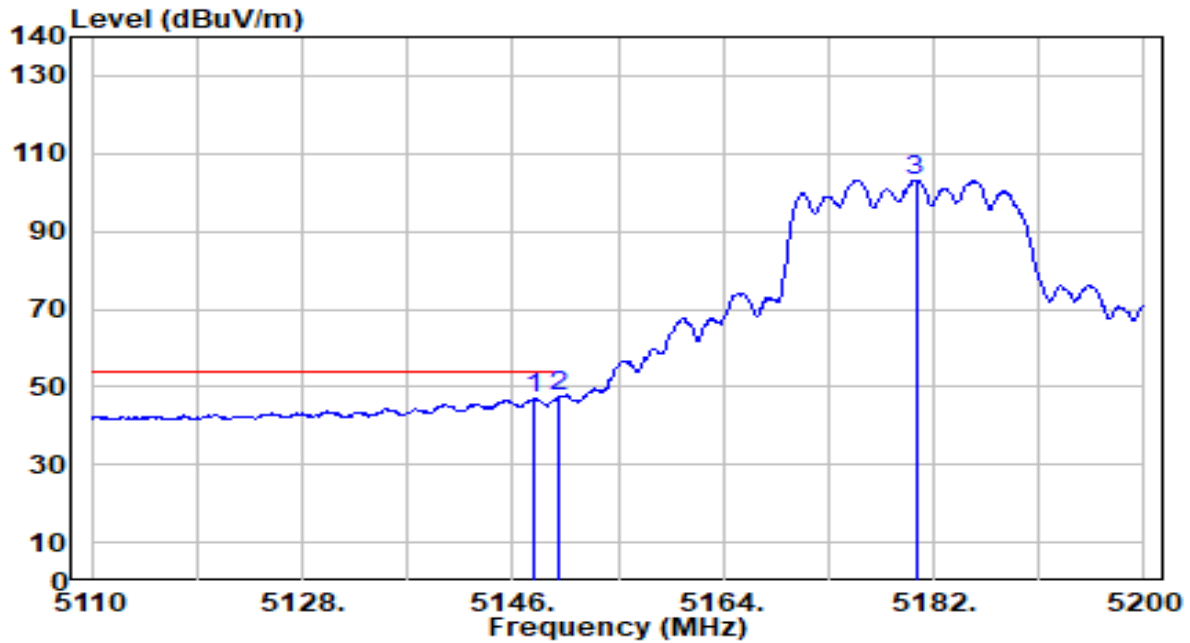


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.710	46.46	0.65	47.12	-6.88	54.00	193	218	Average
2	*	5150.000	47.01	0.65	47.67	-6.33	54.00	193	218	Average
3		5180.470	102.58	0.68	103.26	N/A	N/A	193	218	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

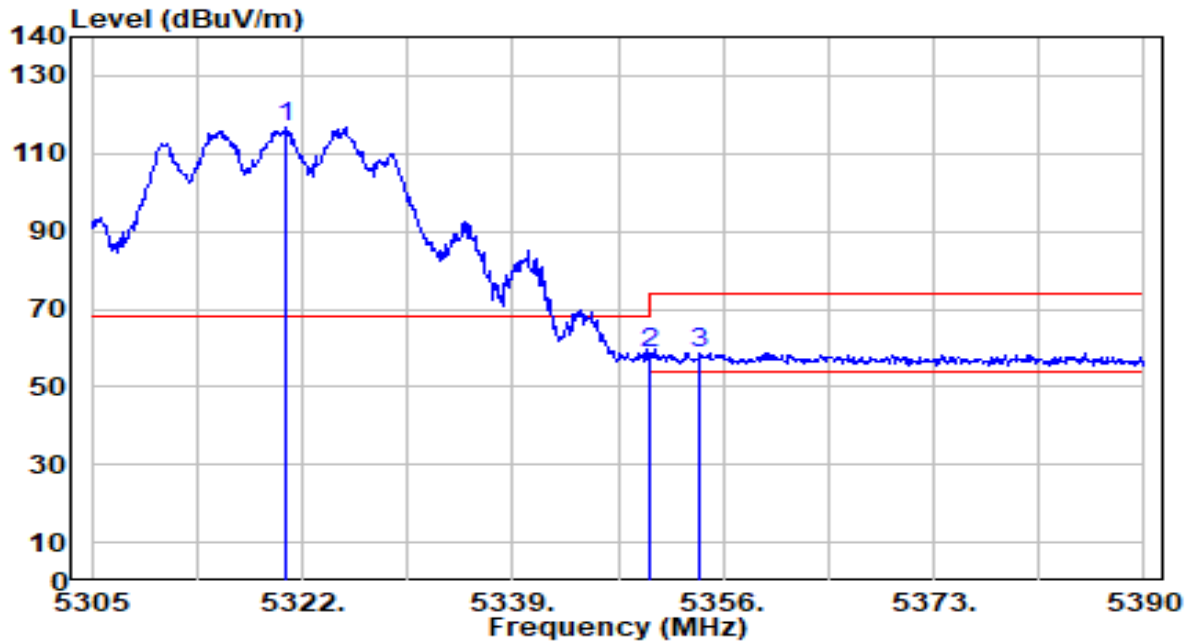


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.640	116.10	0.52	116.62	N/A	N/A	161	210	Peak
2	5350.000	58.03	0.47	58.50	-15.50	74.00	161	210	Peak
3	* 5354.045	58.43	0.46	58.90	-15.10	74.00	161	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

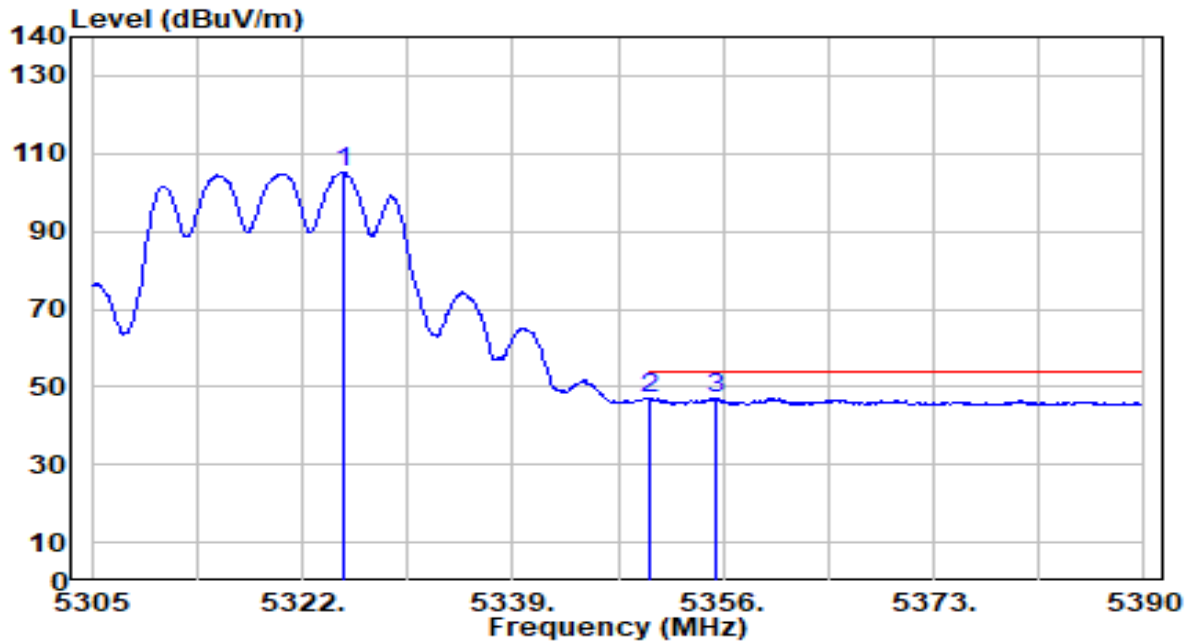


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.315	104.48	0.51	104.99	N/A	N/A	161	210	Average
2	*	5350.000	46.60	0.47	47.07	-6.93	54.00	161	210	Average
3		5355.490	46.57	0.46	47.03	-6.97	54.00	161	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

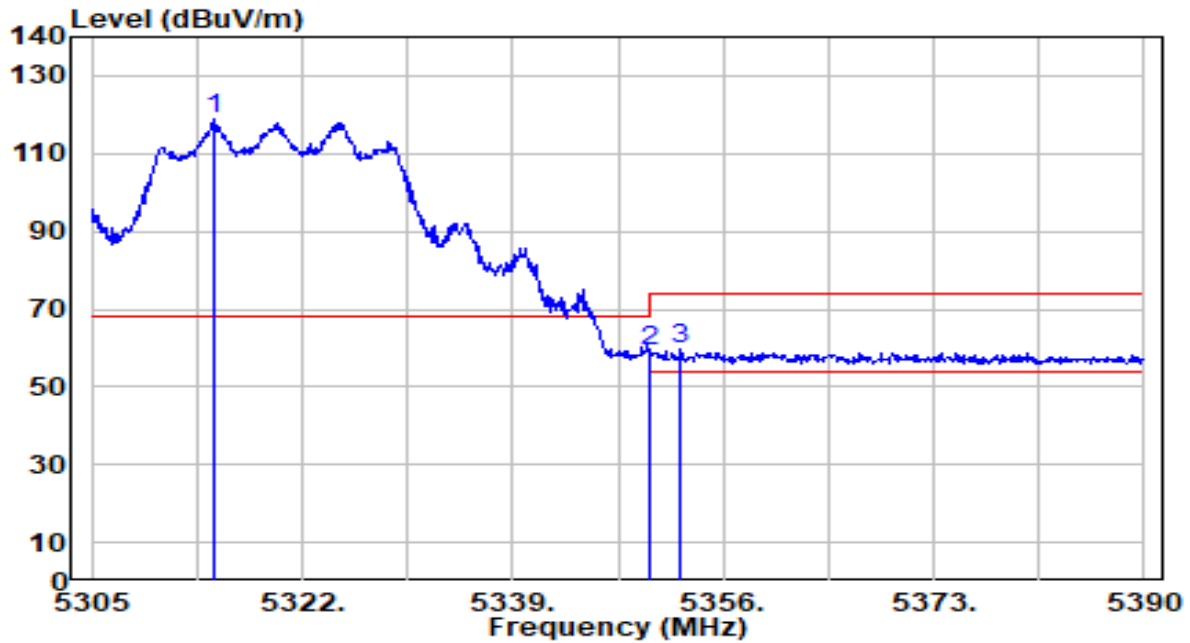


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.860	118.09	0.53	118.62	N/A	N/A	144	178	Peak
2	5350.000	58.79	0.47	59.26	-14.74	74.00	144	178	Peak
3	* 5352.600	59.04	0.47	59.51	-14.49	74.00	144	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

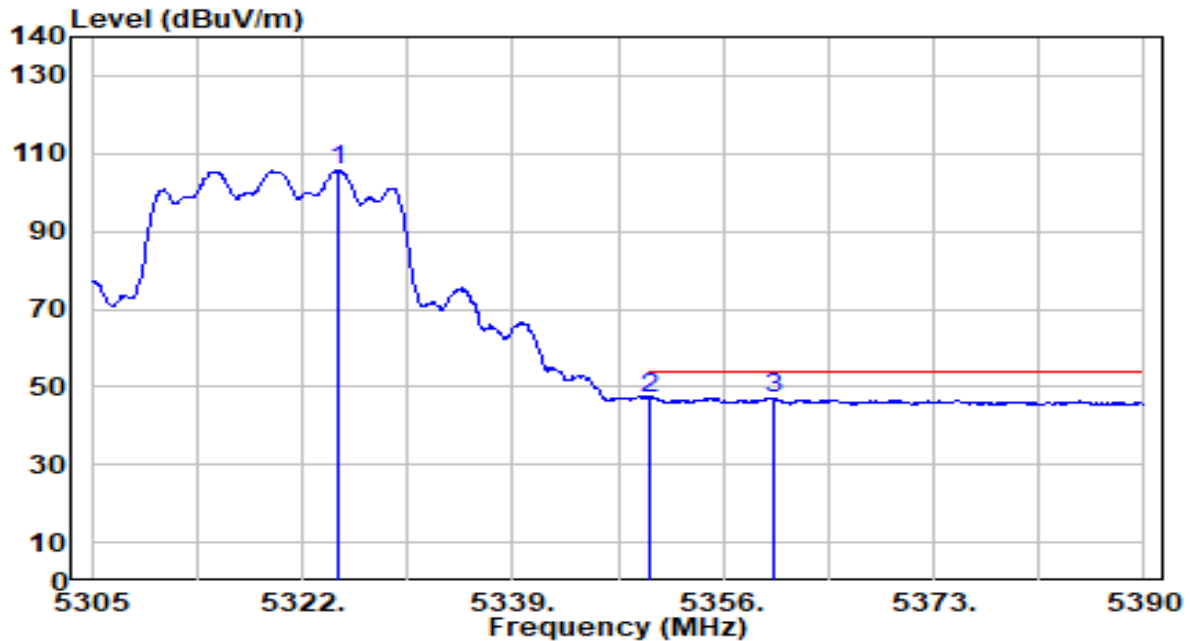


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.890	105.25	0.51	105.76	N/A	N/A	144	178	Average
2	5350.000	46.69	0.47	47.16	-6.84	54.00	144	178	Average
3	* 5360.080	46.73	0.46	47.18	-6.82	54.00	144	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

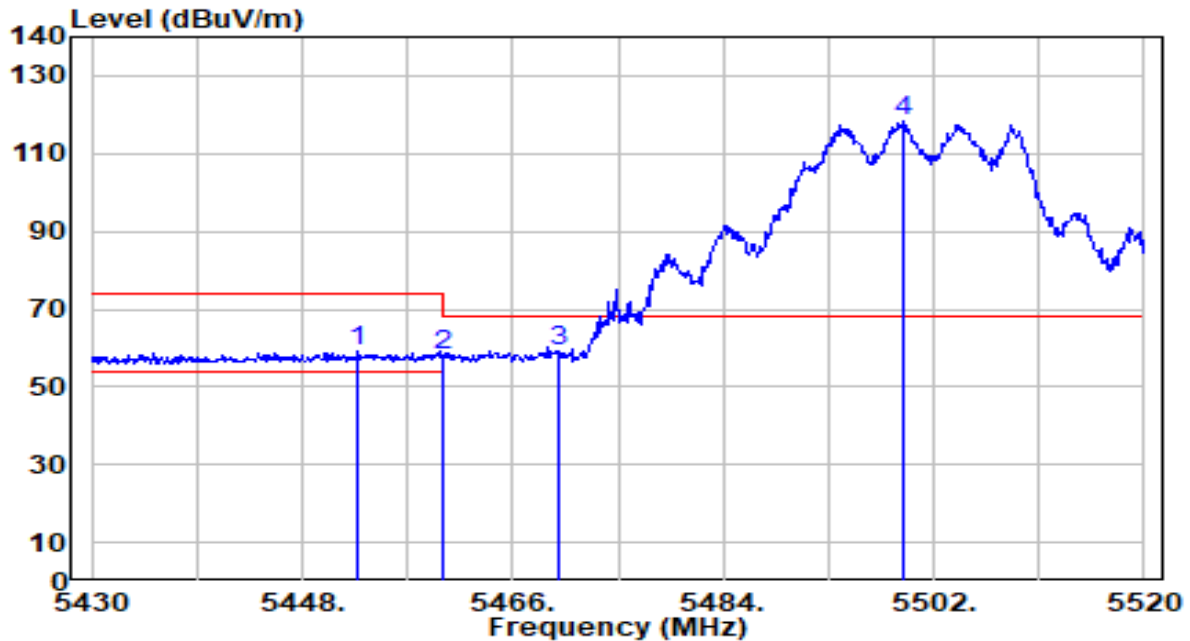


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.770	58.30	0.63	58.93	-15.07	74.00	102	211	Peak
2	5460.000	57.42	0.66	58.09	-15.91	74.00	102	211	Peak
3	* 5470.000	58.34	0.71	59.05	-9.15	68.20	102	211	Peak
4	5499.390	117.40	0.84	118.24	N/A	N/A	102	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

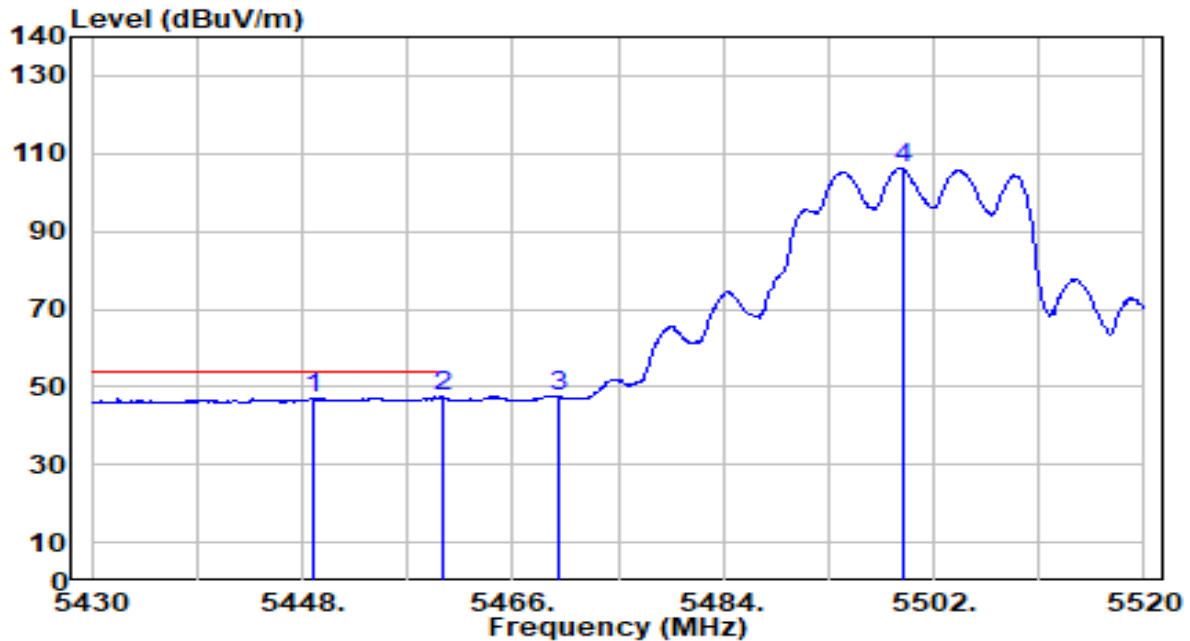


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5448.900	46.49	0.61	47.10	-6.90	54.00	102	211	Average
2	*	5460.000	46.65	0.66	47.31	-6.69	54.00	102	211	Average
3		5470.000	46.63	0.71	47.34	N/A	N/A	102	211	Average
4		5499.300	105.50	0.84	106.33	N/A	N/A	102	211	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

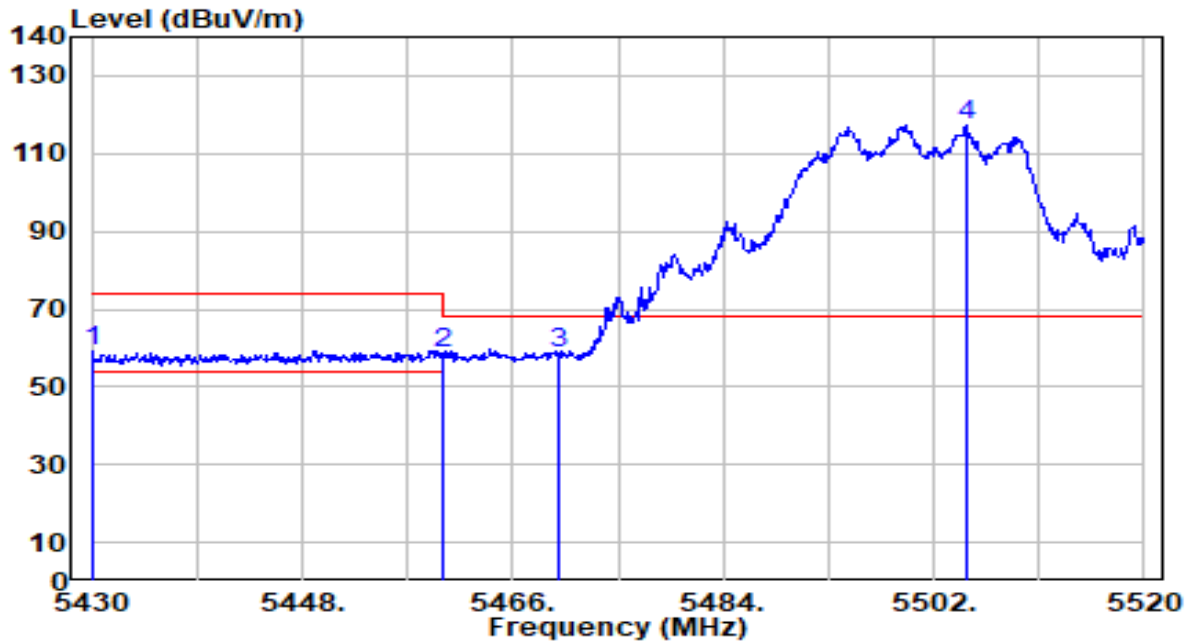


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.000	58.57	0.53	59.10	-14.90	74.00	122	179	Peak
2	5460.000	58.09	0.66	58.75	-15.25	74.00	122	179	Peak
3	* 5470.000	57.71	0.71	58.42	-9.78	68.20	122	179	Peak
4	5504.790	116.57	0.86	117.44	N/A	N/A	122	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

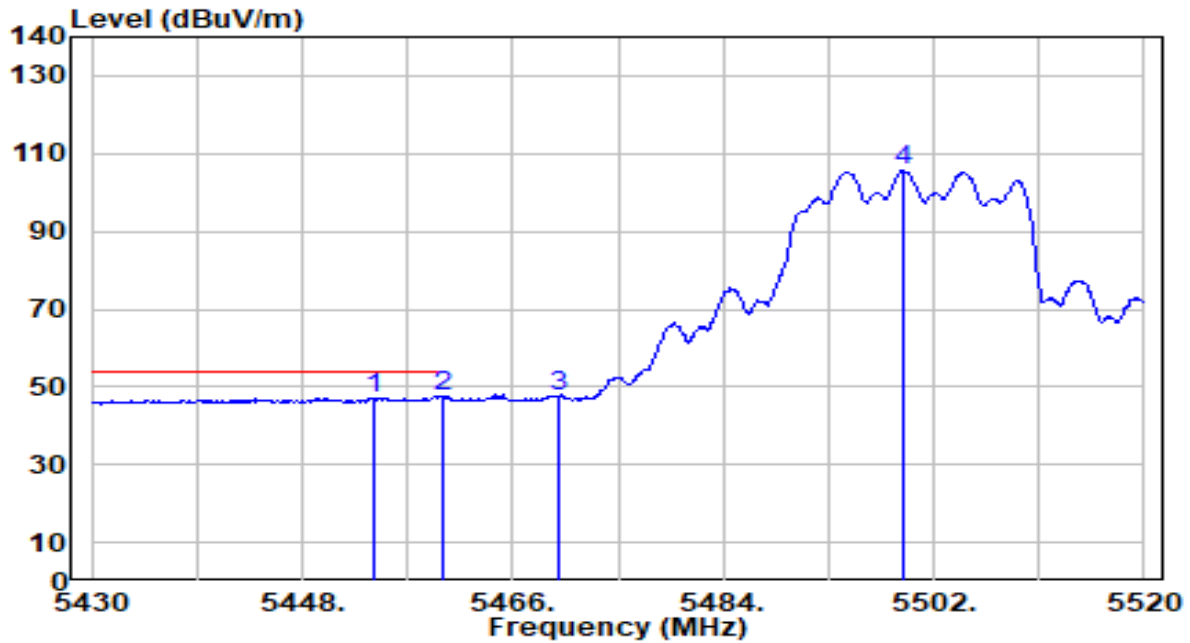


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5454.210	46.49	0.64	47.13	-6.87	54.00	122	179	Average
2	*	5460.000	46.87	0.66	47.53	-6.47	54.00	122	179	Average
3		5470.000	46.85	0.71	47.56	N/A	N/A	122	179	Average
4		5499.390	104.79	0.84	105.62	N/A	N/A	122	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

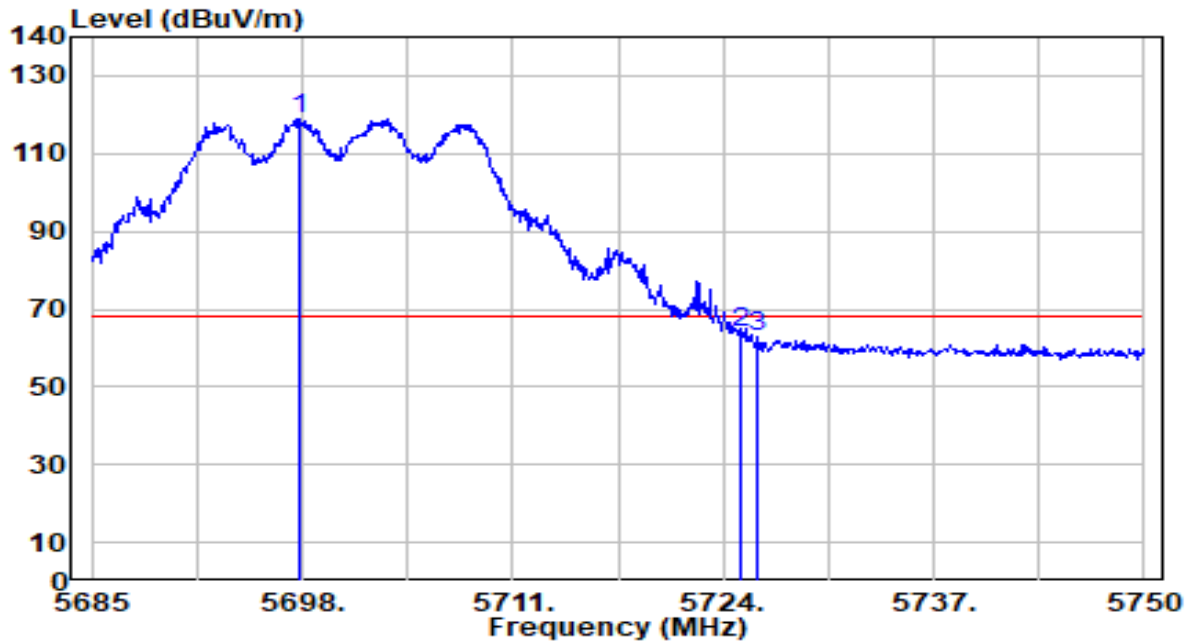


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5697.805	117.31	1.77	119.07	N/A	N/A	143	247	Peak
2	*	5725.000	61.85	1.89	63.75	-4.45	68.20	143	247	Peak
3		5726.080	60.72	1.90	62.62	-5.58	68.20	143	247	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

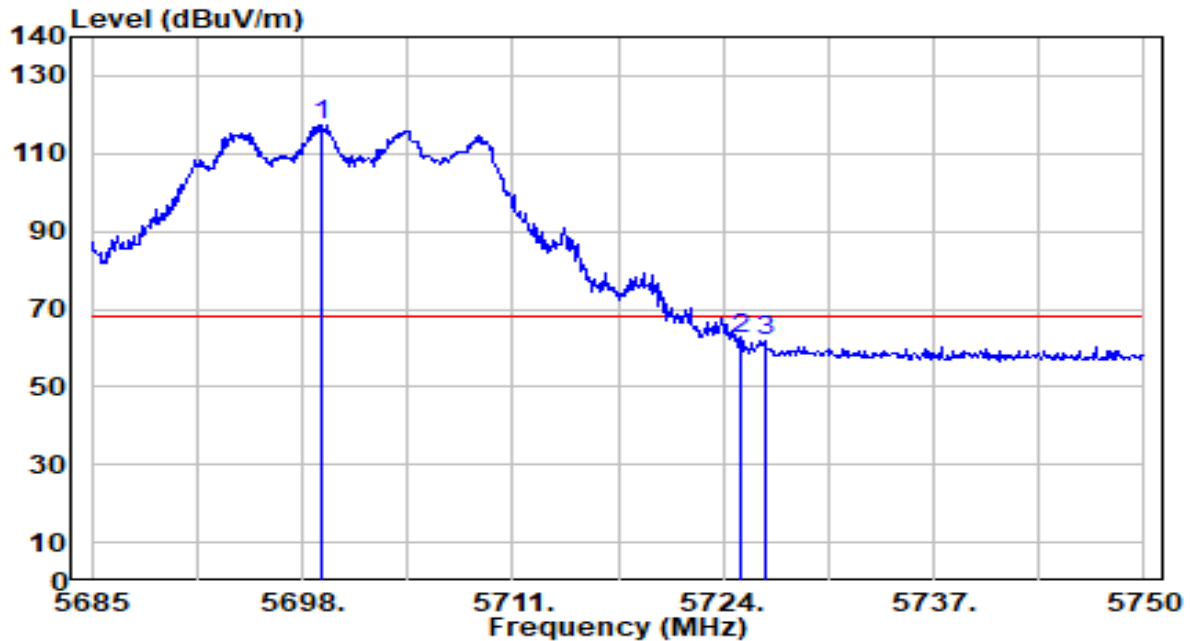


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5699.170	115.67	1.77	117.45	N/A	N/A	114	182	Peak
2	*	5725.000	60.63	1.89	62.53	-5.67	68.20	114	182	Peak
3		5726.535	59.76	1.90	61.66	-6.54	68.20	114	182	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

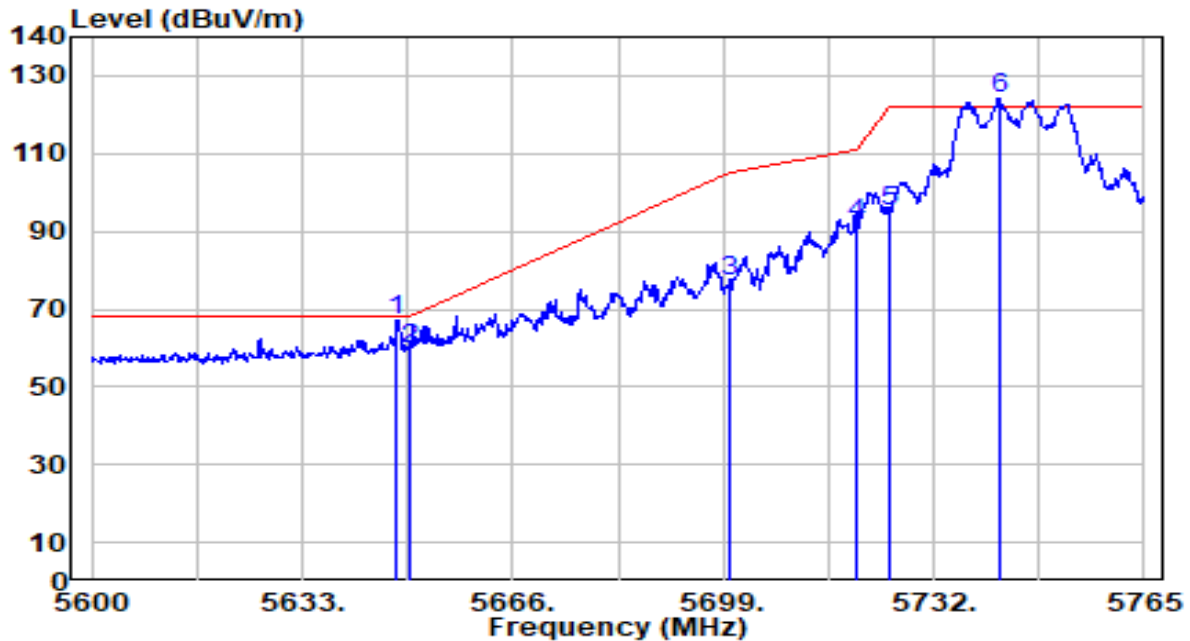


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.850	65.75	1.53	67.29	-0.91	68.20	166	252	Peak
2		5650.000	58.35	1.54	59.89	-8.31	68.20	166	252	Peak
3		5700.000	75.36	1.78	77.13	-28.07	105.20	166	252	Peak
4		5720.000	89.87	1.87	91.74	-19.06	110.80	166	252	Peak
5		5725.000	93.03	1.89	94.92	-27.28	122.20	166	252	Peak
6		5742.230	122.31	1.97	124.29	N/A	N/A	166	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

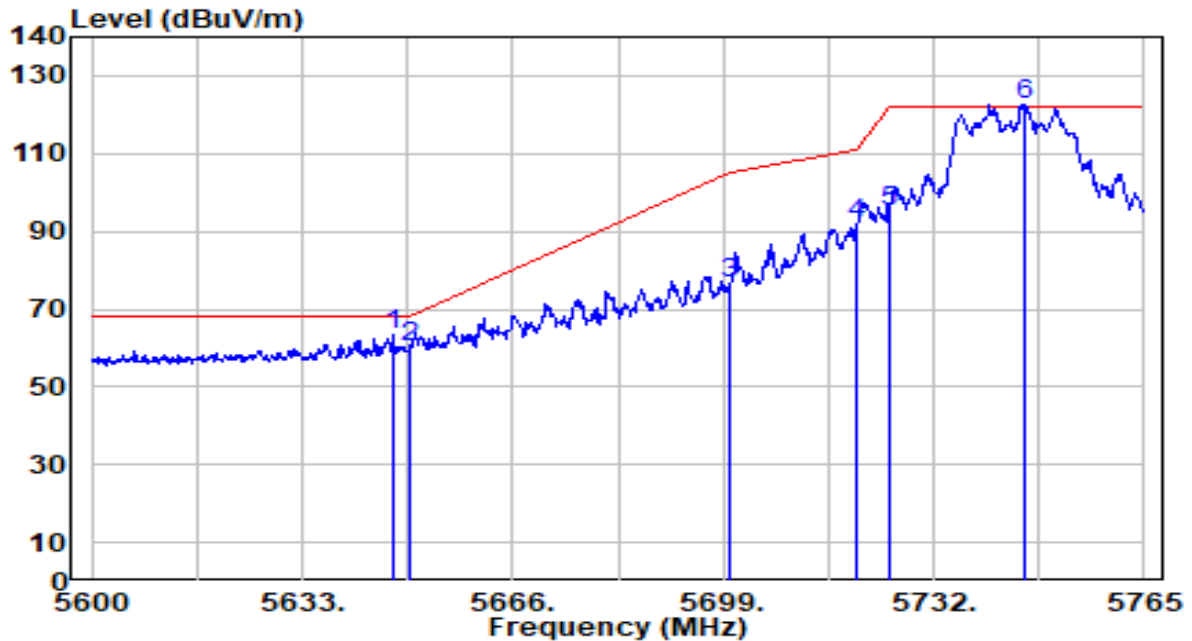


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.190	61.62	1.53	63.15	-5.05	68.20	100	197	Peak
2		5650.000	58.52	1.54	60.06	-8.14	68.20	100	197	Peak
3		5700.000	74.86	1.78	76.64	-28.56	105.20	100	197	Peak
4		5720.000	90.08	1.87	91.95	-18.85	110.80	100	197	Peak
5		5725.000	93.19	1.89	95.08	-27.12	122.20	100	197	Peak
6		5746.355	120.55	1.99	122.54	N/A	N/A	100	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

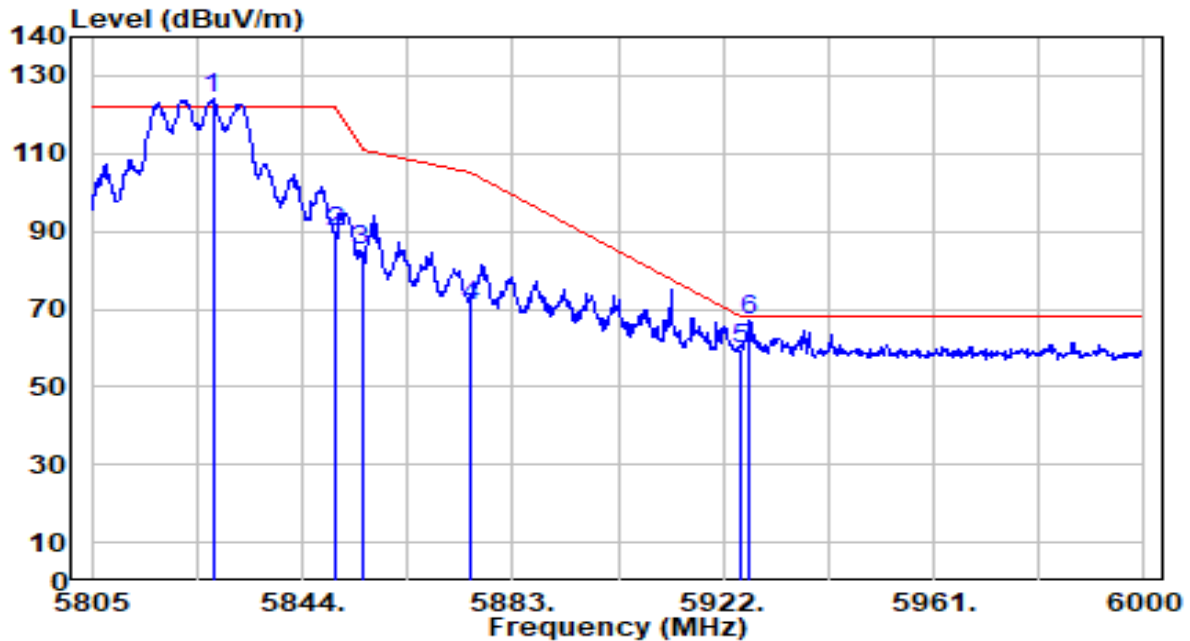


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	122.16	2.25	124.41	N/A	N/A	170	255	Peak
2	5850.000	87.43	2.25	89.68	-32.52	122.20	170	255	Peak
3	5855.000	82.89	2.25	85.15	-25.65	110.80	170	255	Peak
4	5875.000	68.31	2.26	70.57	-34.63	105.20	170	255	Peak
5	5925.000	57.19	2.27	59.46	-8.74	68.20	170	255	Peak
6	* 5926.875	64.94	2.27	67.21	-0.99	68.20	170	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

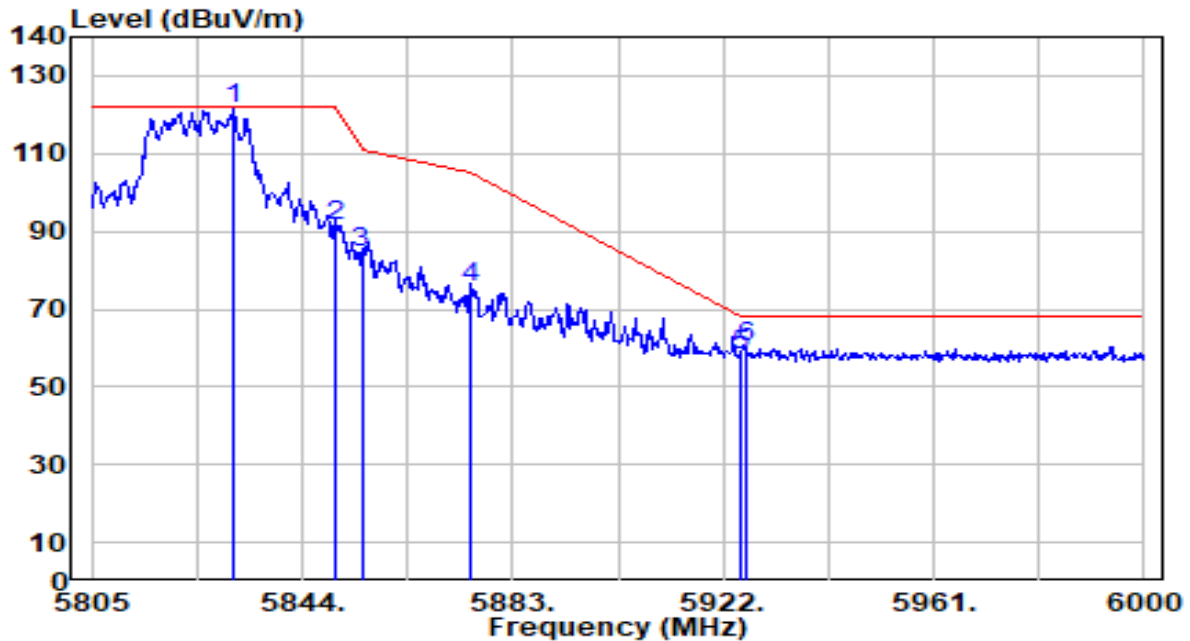


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5831.325	119.09	2.25	121.34	N/A	N/A	100	160	Peak
2	5850.000	89.29	2.25	91.54	-30.66	122.20	100	160	Peak
3	5855.000	82.25	2.25	84.50	-26.30	110.80	100	160	Peak
4	5875.000	73.06	2.26	75.31	-29.89	105.20	100	160	Peak
5	5925.000	56.04	2.27	58.31	-9.89	68.20	100	160	Peak
6	* 5926.485	57.84	2.27	60.11	-8.09	68.20	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

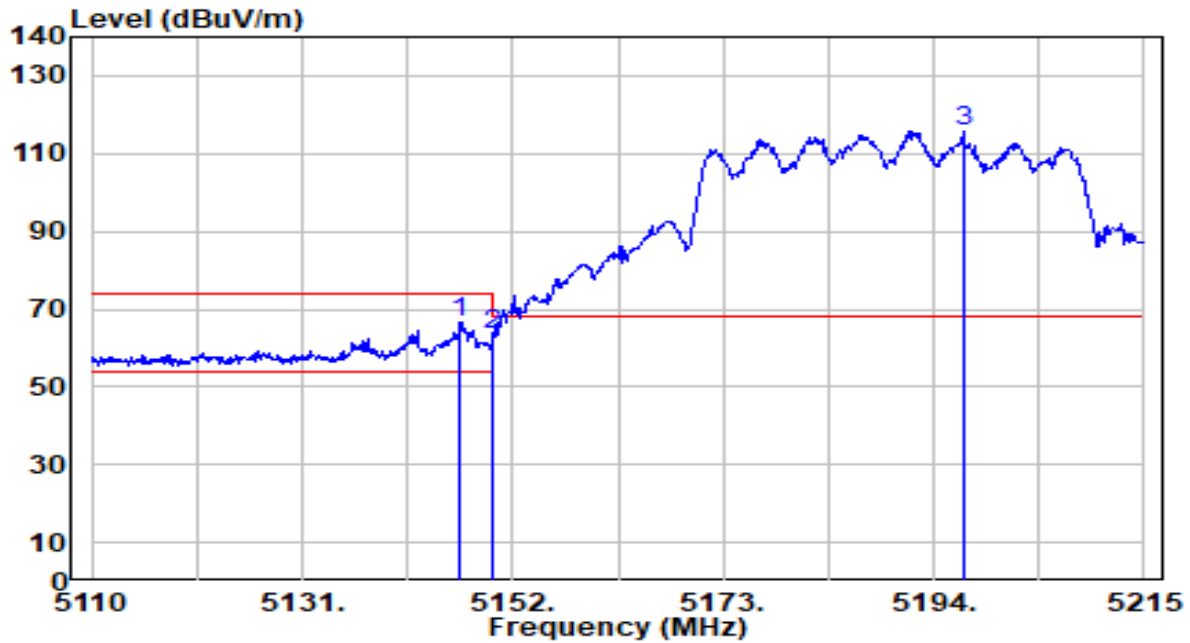


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.750	66.09	0.65	66.74	-7.26	74.00	100	225	Peak
2		5150.000	62.58	0.65	63.24	-10.76	74.00	100	225	Peak
3		5197.045	115.02	0.70	115.72	N/A	N/A	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

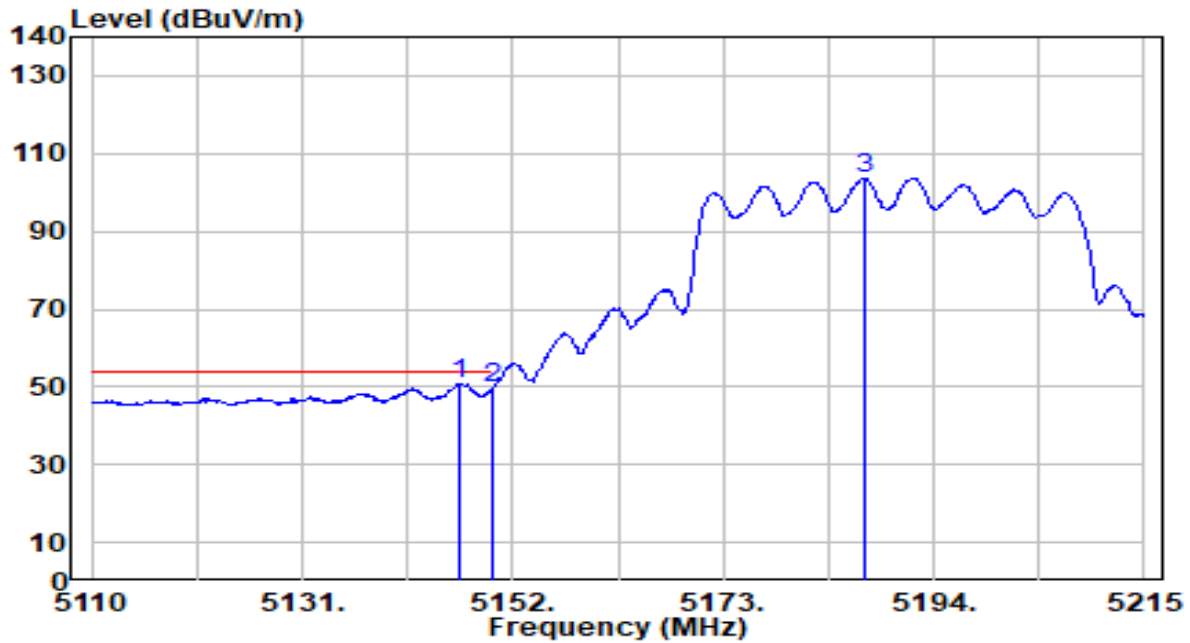


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.750	50.21	0.65	50.86	-3.14	54.00	110	186	Average
2		5150.000	49.09	0.65	49.74	-4.26	54.00	110	186	Average
3		5187.070	103.04	0.69	103.73	N/A	N/A	110	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

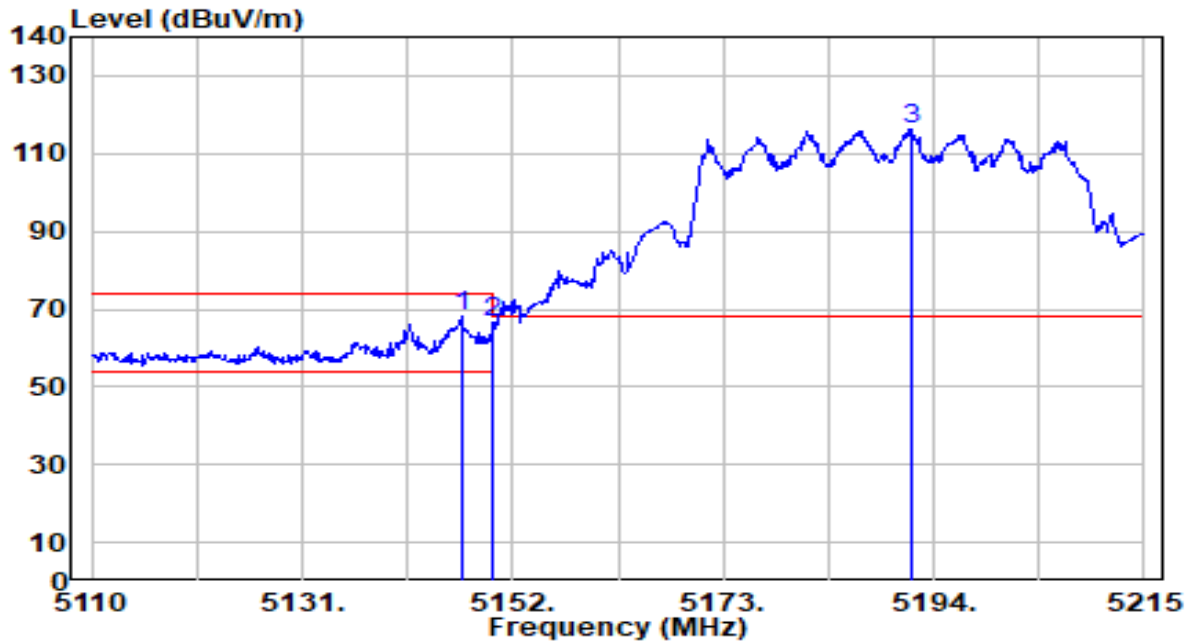


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.855	67.70	0.65	68.35	-5.65	74.00	105	30	Peak
2		5150.000	65.70	0.65	66.36	-7.64	74.00	105	30	Peak
3		5191.795	115.72	0.69	116.42	N/A	N/A	105	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

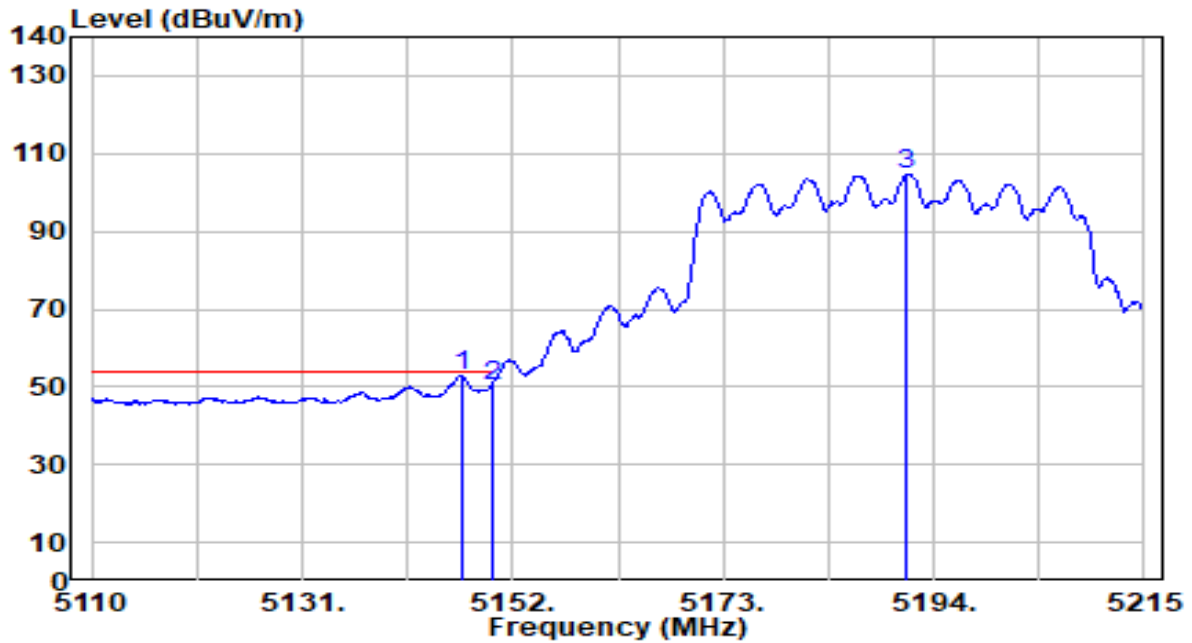


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.960	52.44	0.65	53.09	-0.91	54.00	122	185	Average
2		5150.000	49.70	0.65	50.36	-3.64	54.00	122	185	Average
3		5191.375	103.91	0.69	104.60	N/A	N/A	122	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

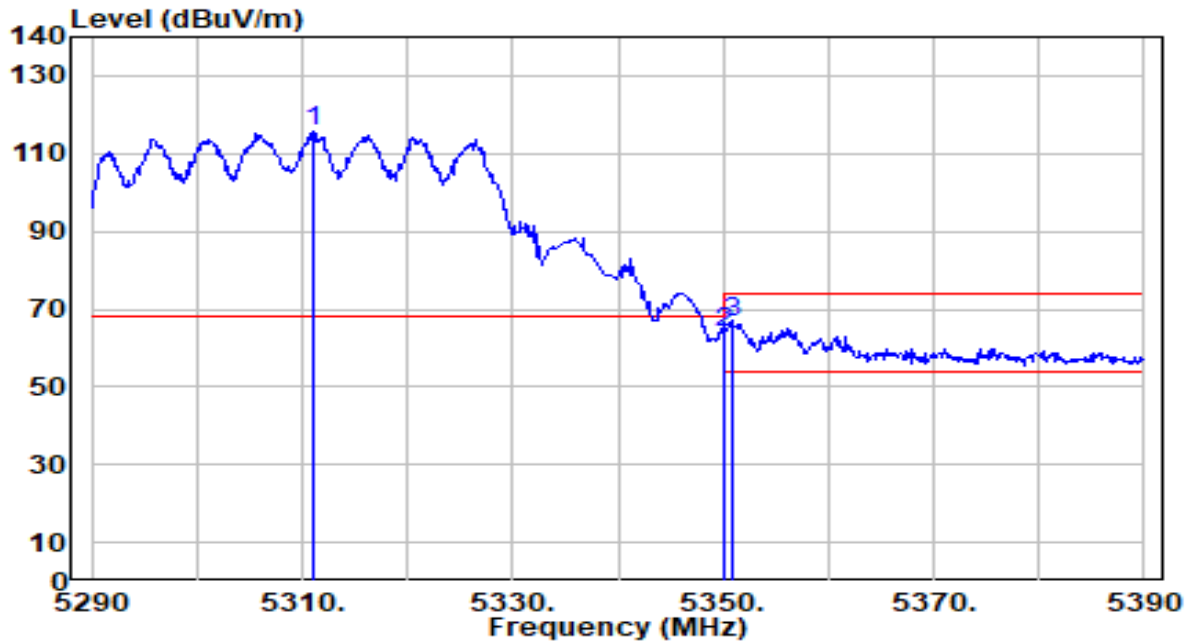


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.000	115.39	0.53	115.93	N/A	N/A	112	215	Peak
2	5350.000	63.71	0.47	64.18	-9.82	74.00	112	215	Peak
3	* 5351.000	66.23	0.47	66.70	-7.30	74.00	112	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

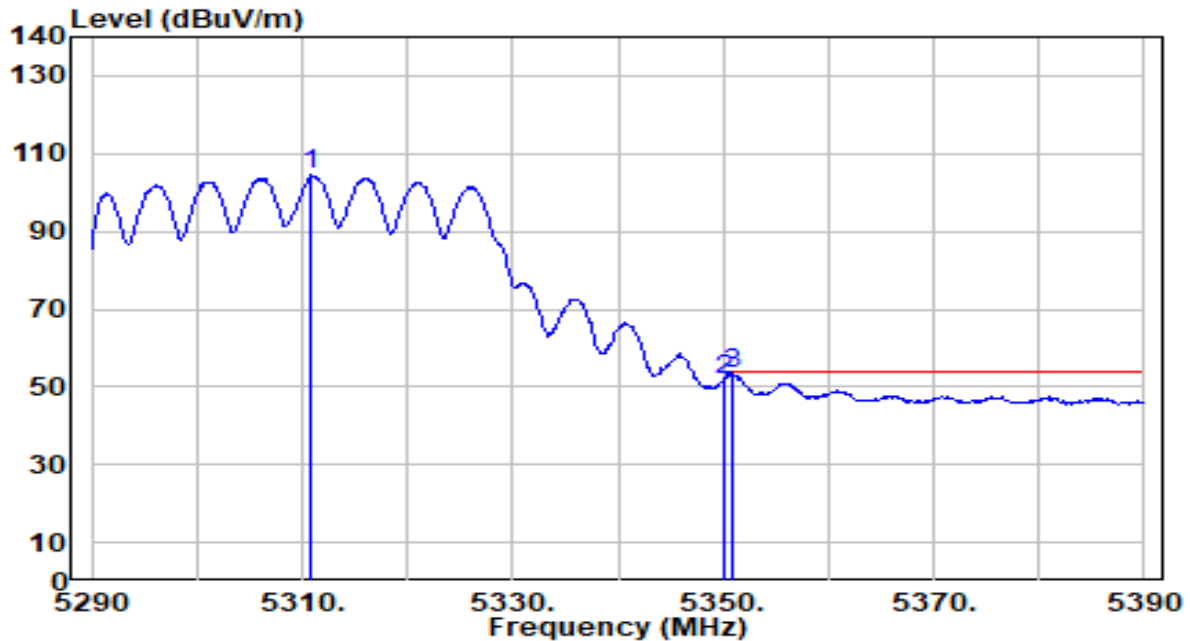


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5310.900	103.85	0.53	104.38	N/A	N/A	112	215	Average
2	5350.000	51.41	0.47	51.88	-2.12	54.00	112	215	Average
3	* 5351.000	52.77	0.47	53.24	-0.76	54.00	112	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

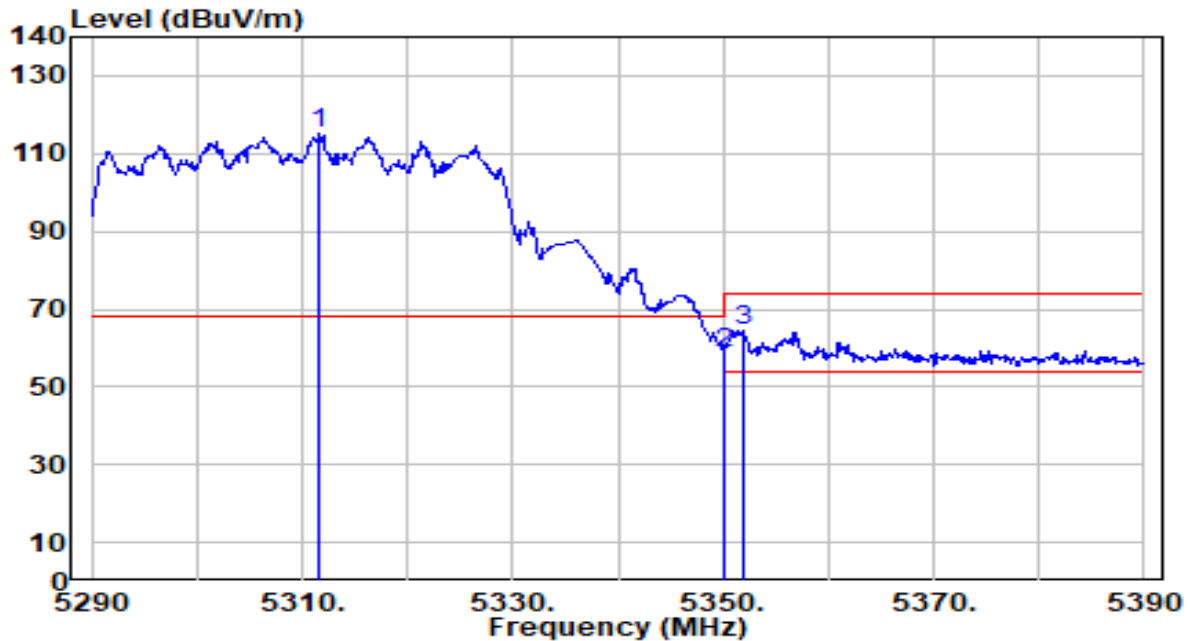


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.700	114.80	0.53	115.33	N/A	N/A	114	190	Peak
2	5350.000	58.40	0.47	58.87	-15.13	74.00	114	190	Peak
3	* 5351.900	64.00	0.47	64.47	-9.53	74.00	114	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

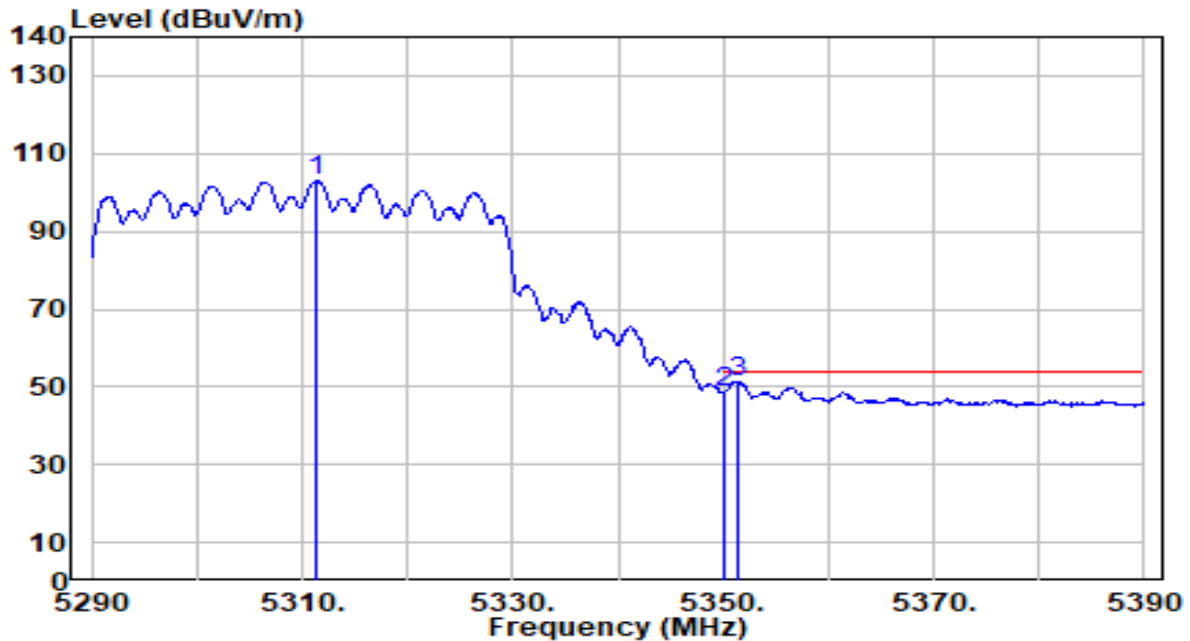


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.400	102.65	0.53	103.18	N/A	N/A	114	190	Average
2	5350.000	48.12	0.47	48.59	-5.41	54.00	114	190	Average
3	* 5351.500	50.89	0.47	51.35	-2.65	54.00	114	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

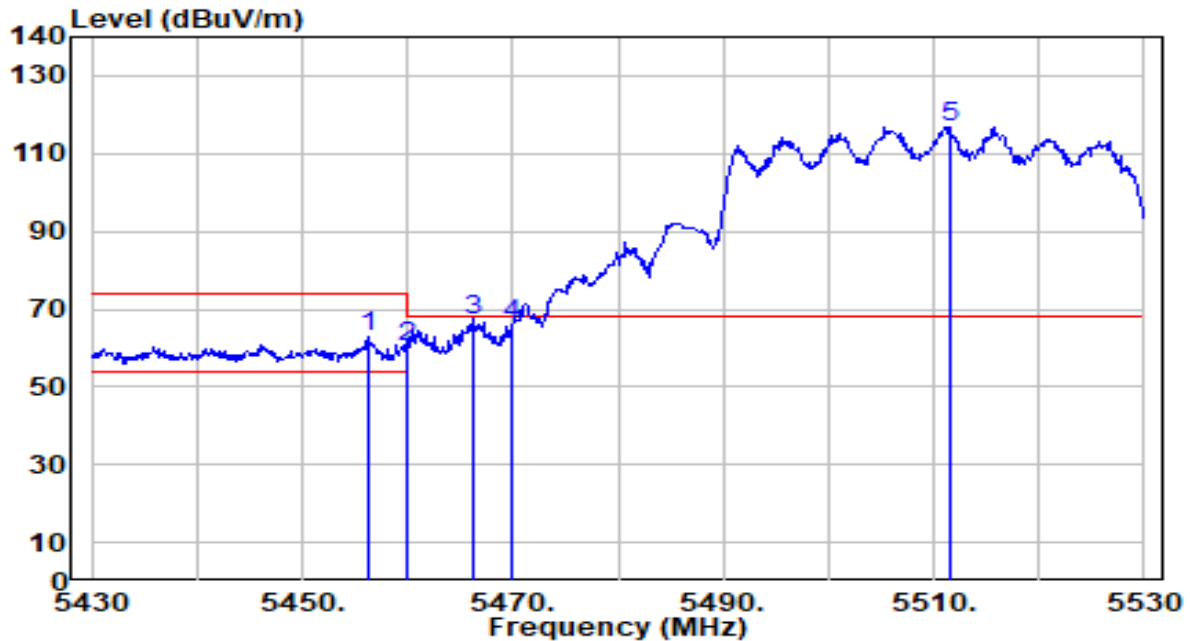


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.400	62.18	0.65	62.83	-11.17	74.00	122	220	Peak
2	5460.000	59.36	0.66	60.02	-13.98	74.00	122	220	Peak
3	* 5466.200	66.54	0.69	67.23	-0.97	68.20	122	220	Peak
4	5470.000	65.14	0.71	65.84	-2.36	68.20	122	220	Peak
5	5511.500	115.95	0.89	116.85	N/A	N/A	122	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

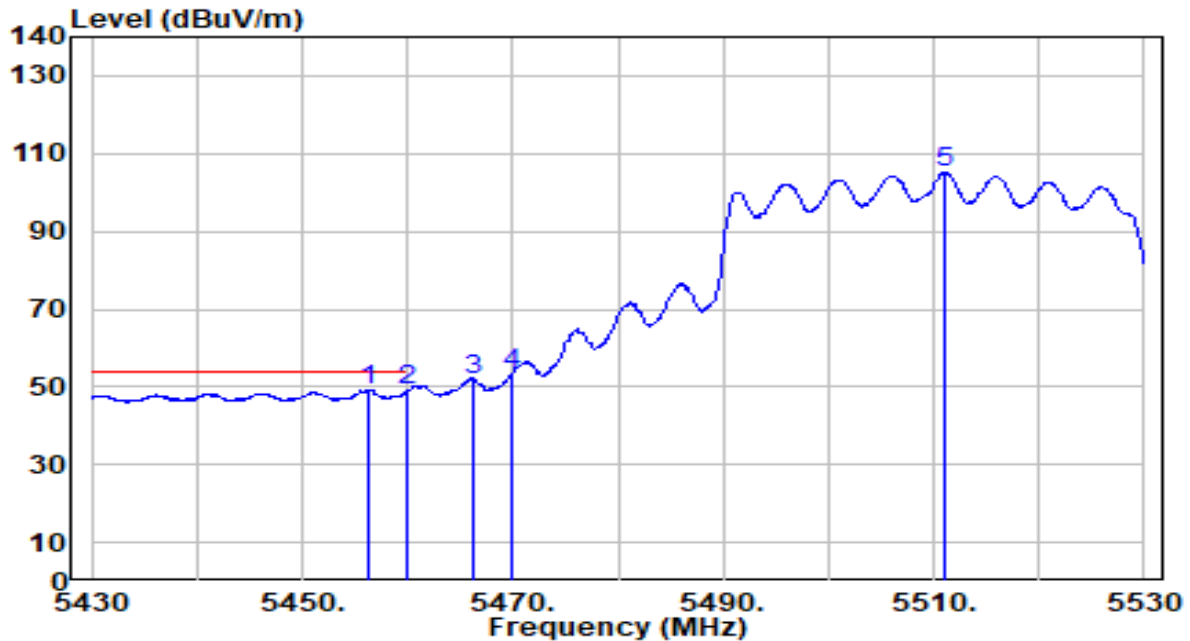


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.200	48.51	0.64	49.15	-4.85	54.00	122	220	Average
2		5460.000	48.28	0.66	48.94	-5.06	54.00	122	220	Average
3		5466.200	50.85	0.69	51.54	N/A	N/A	122	220	Average
4		5470.000	52.62	0.71	53.32	N/A	N/A	122	220	Average
5		5511.000	104.21	0.89	105.11	N/A	N/A	122	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

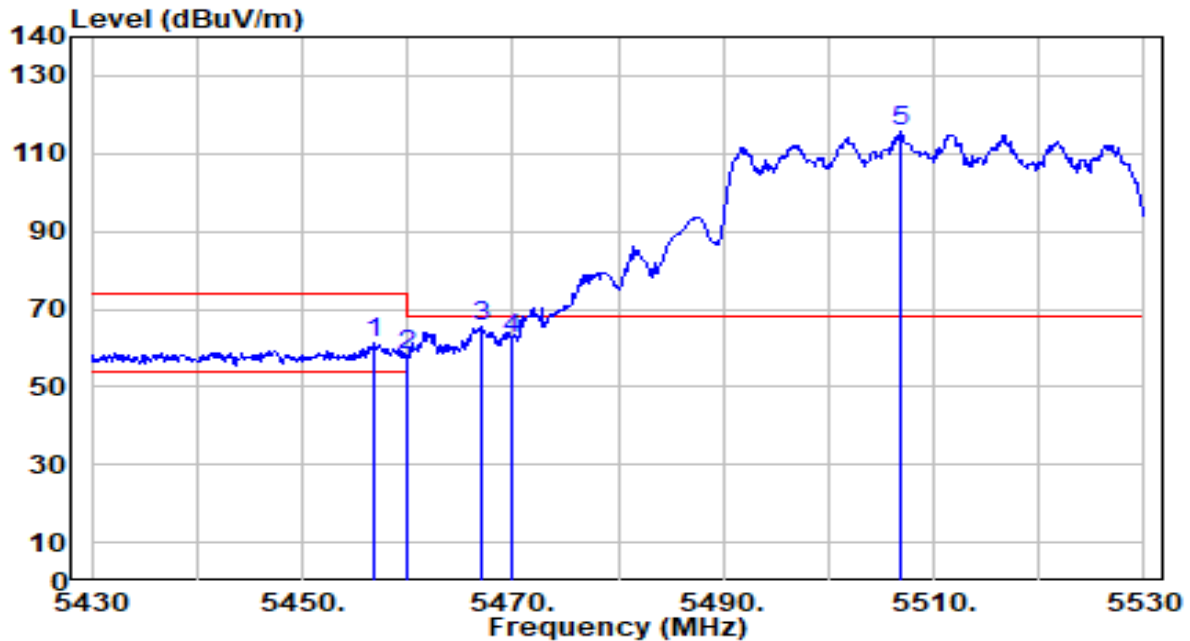


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.700	60.66	0.65	61.31	-12.69	74.00	100	80	Peak
2	5460.000	57.59	0.66	58.25	-15.75	74.00	100	80	Peak
3	* 5467.100	64.90	0.69	65.59	-2.61	68.20	100	80	Peak
4	5470.000	61.58	0.71	62.29	-5.91	68.20	100	80	Peak
5	5506.900	114.74	0.87	115.62	N/A	N/A	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

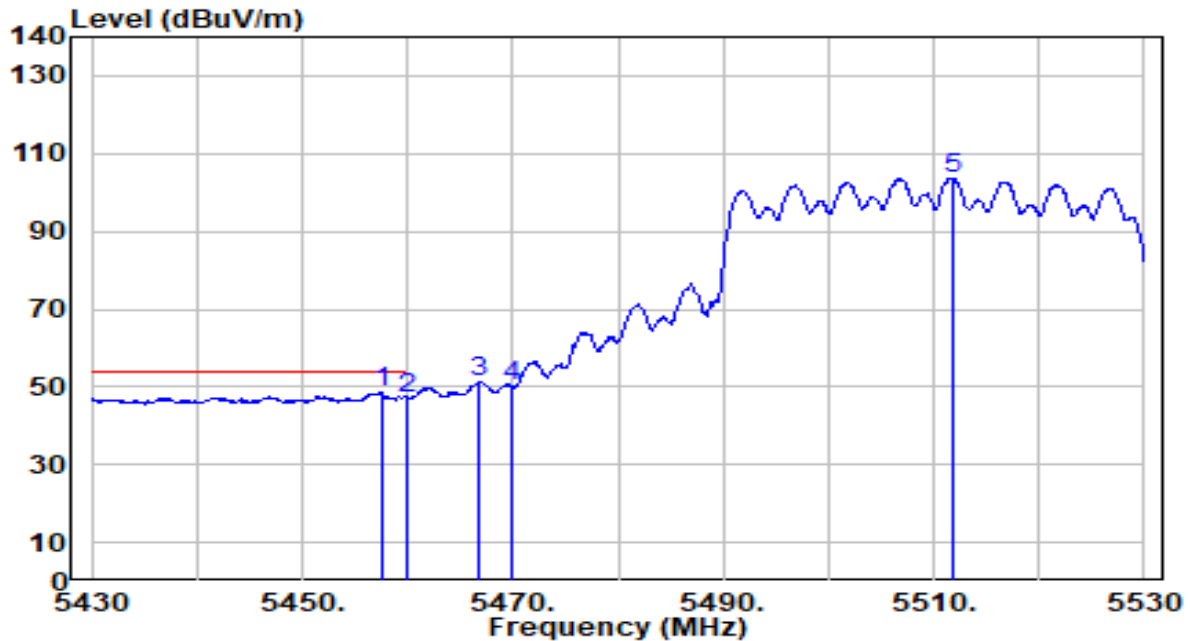


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.500	47.74	0.65	48.39	-5.61	54.00	122	197	Average
2		5460.000	46.61	0.66	47.27	-6.73	54.00	122	197	Average
3		5466.800	50.55	0.69	51.24	N/A	N/A	122	197	Average
4		5470.000	49.29	0.71	50.00	N/A	N/A	122	197	Average
5		5511.800	102.84	0.90	103.74	N/A	N/A	122	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

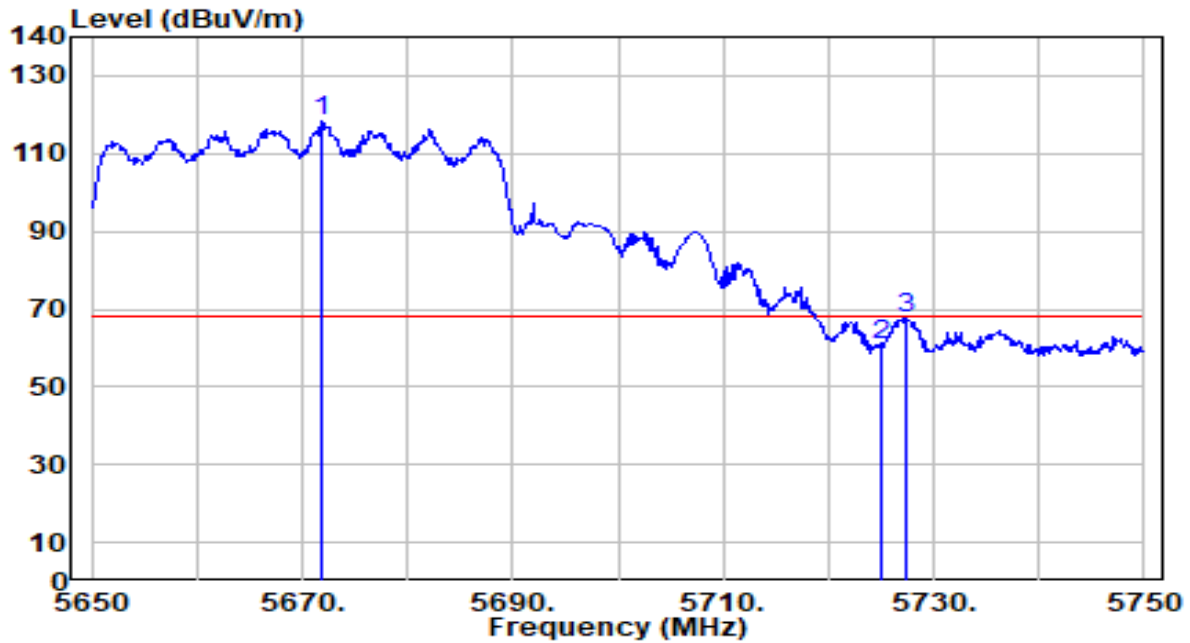


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.900	116.82	1.64	118.47	N/A	N/A	168	252	Peak
2	5725.000	59.05	1.89	60.95	-7.25	68.20	168	252	Peak
3	* 5727.300	65.63	1.90	67.54	-0.66	68.20	168	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

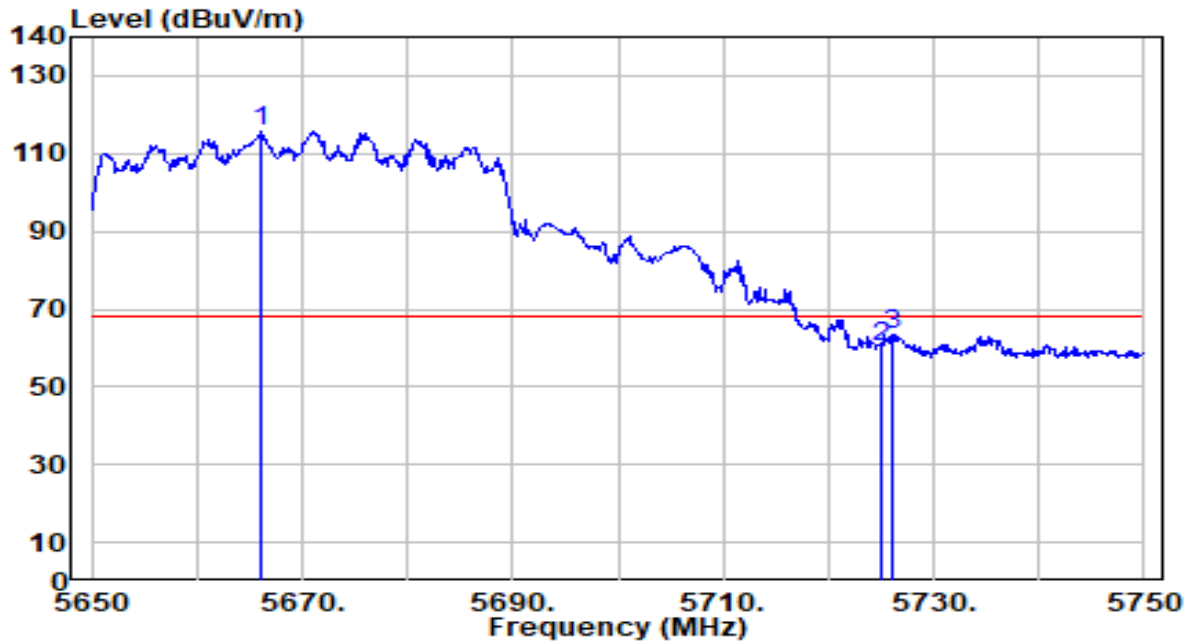


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.200	114.29	1.62	115.91	N/A	N/A	100	195	Peak
2	5725.000	58.34	1.89	60.23	-7.97	68.20	100	195	Peak
3	* 5726.100	61.76	1.90	63.66	-4.54	68.20	100	195	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

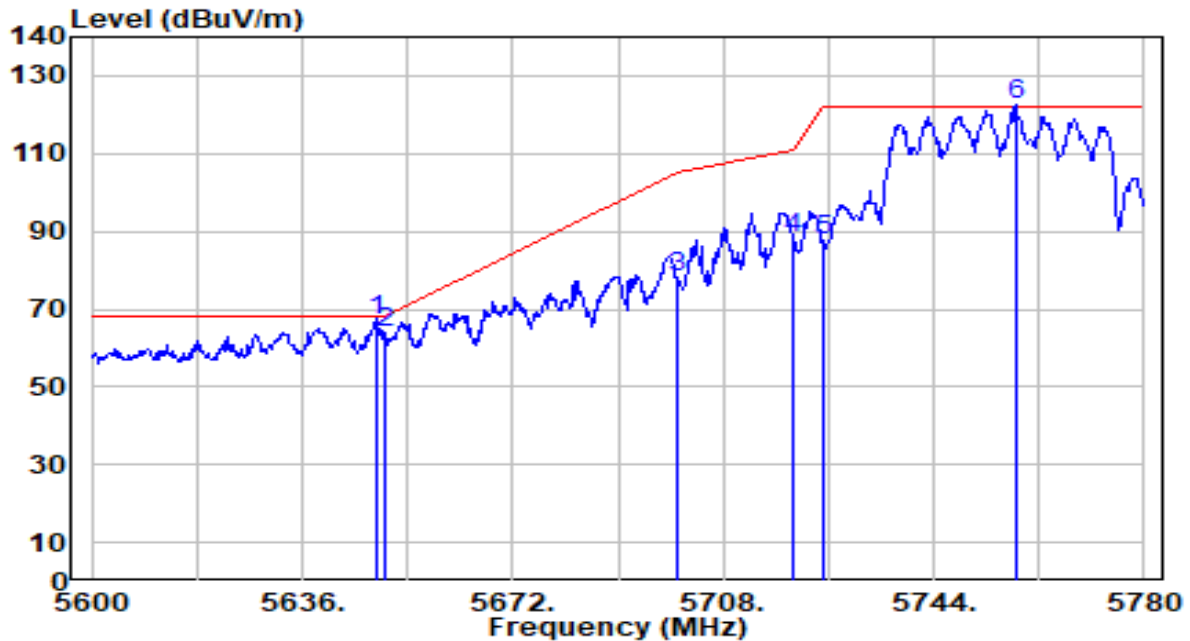


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.600	65.67	1.54	67.21	-0.99	68.20	203	254	Peak
2		5650.000	62.36	1.54	63.90	-4.30	68.20	203	254	Peak
3		5700.000	76.25	1.78	78.02	-27.18	105.20	203	254	Peak
4		5720.000	86.29	1.87	88.15	-22.65	110.80	203	254	Peak
5		5725.000	85.62	1.89	87.52	-34.68	122.20	203	254	Peak
6		5758.040	120.47	2.05	122.51	N/A	N/A	203	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

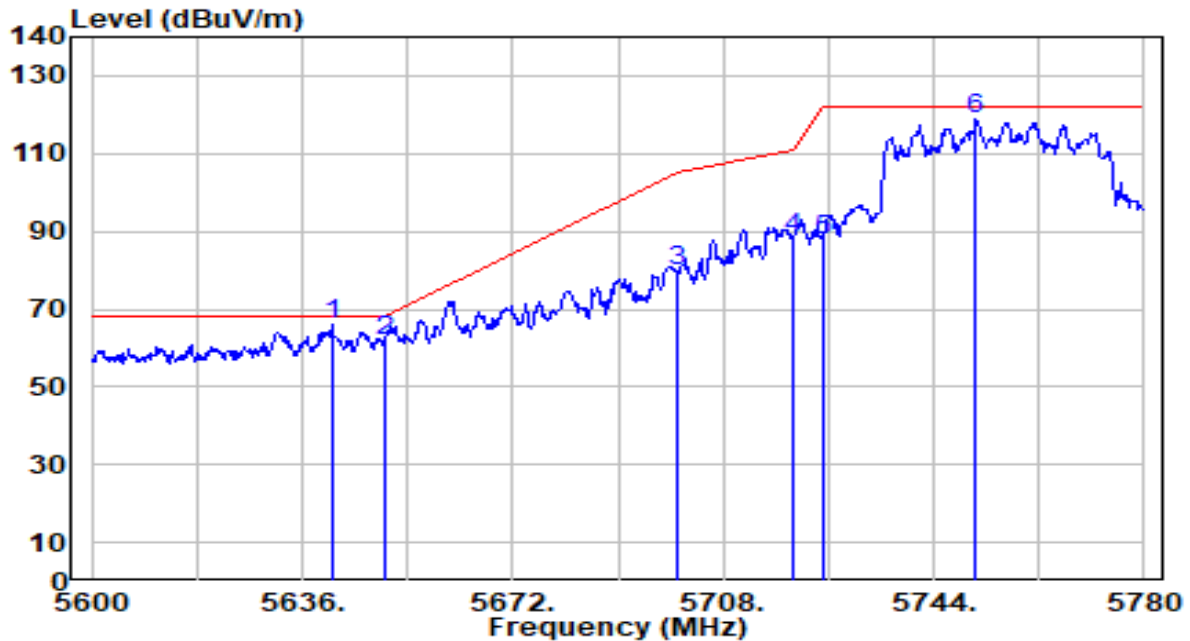


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.040	64.80	1.50	66.30	-1.90	68.20	100	160	Peak
2		5650.000	60.17	1.54	61.71	-6.49	68.20	100	160	Peak
3		5700.000	77.97	1.78	79.74	-25.46	105.20	100	160	Peak
4		5720.000	86.53	1.87	88.40	-22.40	110.80	100	160	Peak
5		5725.000	86.04	1.89	87.93	-34.27	122.20	100	160	Peak
6		5751.200	116.72	2.02	118.74	N/A	N/A	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

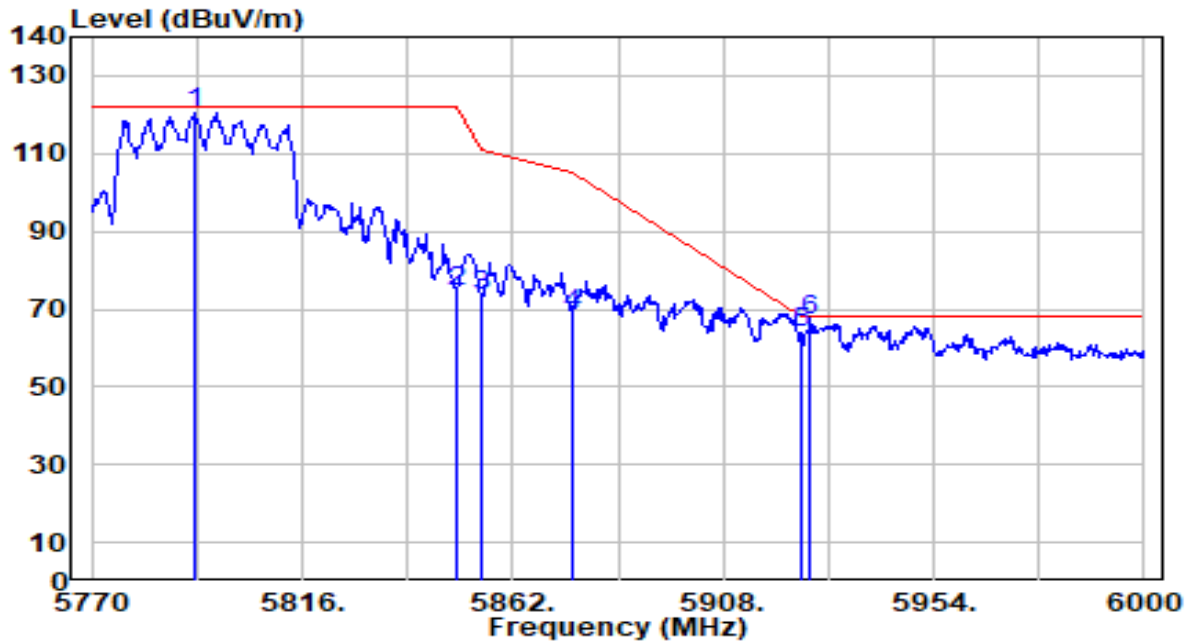


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.540	118.19	2.21	120.40	N/A	N/A	173	255	Peak
2	5850.000	72.43	2.25	74.68	-47.52	122.20	173	255	Peak
3	5855.000	71.05	2.25	73.31	-37.49	110.80	173	255	Peak
4	5875.000	66.65	2.26	68.91	-36.29	105.20	173	255	Peak
5	5925.000	61.80	2.27	64.07	-4.13	68.20	173	255	Peak
6	* 5927.090	64.95	2.27	67.22	-0.98	68.20	173	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

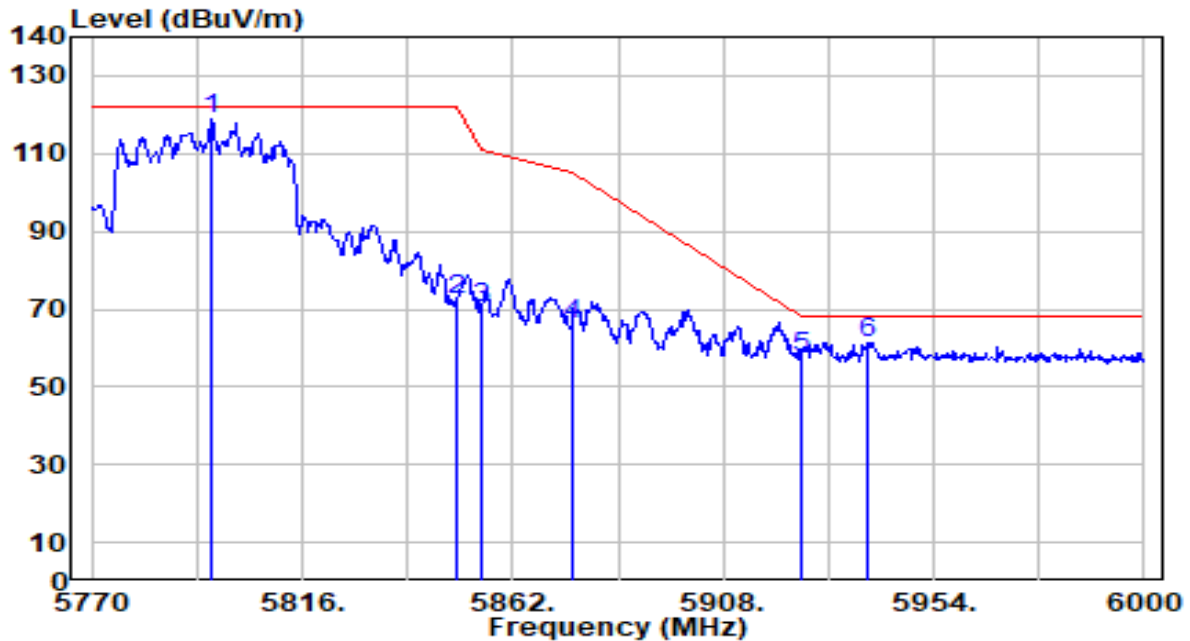


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.220	116.39	2.23	118.62	N/A	N/A	100	180	Peak
2	5850.000	69.96	2.25	72.22	-49.98	122.20	100	180	Peak
3	5855.000	67.84	2.25	70.10	-40.70	110.80	100	180	Peak
4	5875.000	63.77	2.26	66.03	-39.17	105.20	100	180	Peak
5	5925.000	55.36	2.27	57.63	-10.57	68.20	100	180	Peak
6	* 5939.510	59.16	2.27	61.43	-6.77	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

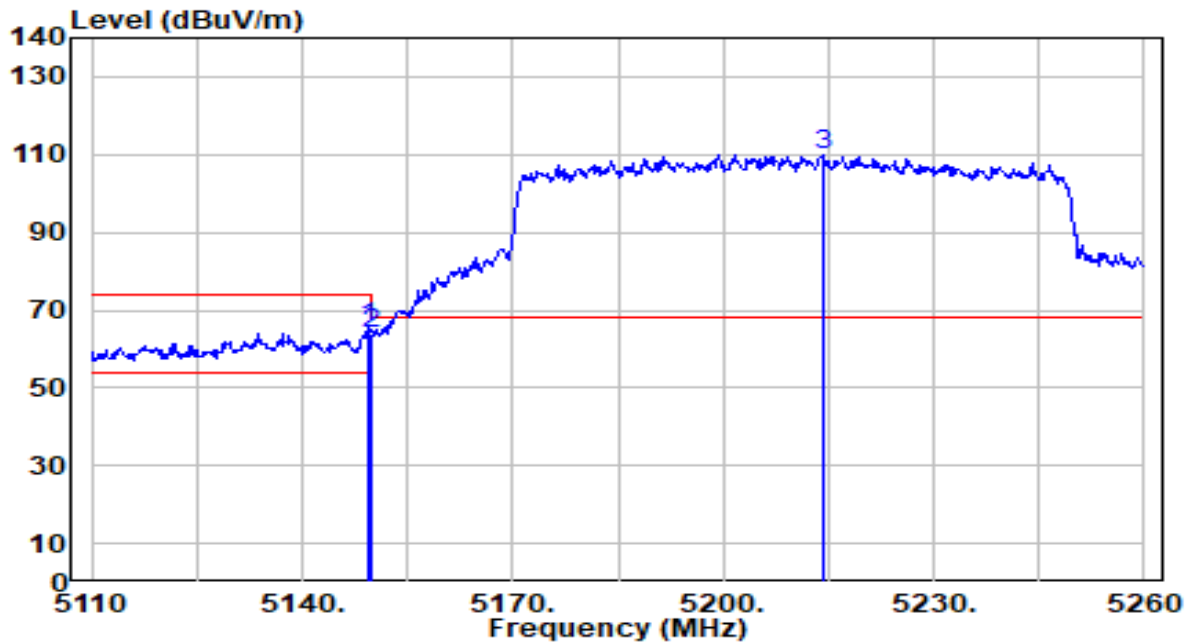


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	64.68	0.65	65.33	-8.67	74.00	232	188	Peak
2		5150.000	63.52	0.65	64.17	-9.83	74.00	232	188	Peak
3		5214.100	109.29	0.68	109.97	N/A	N/A	232	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

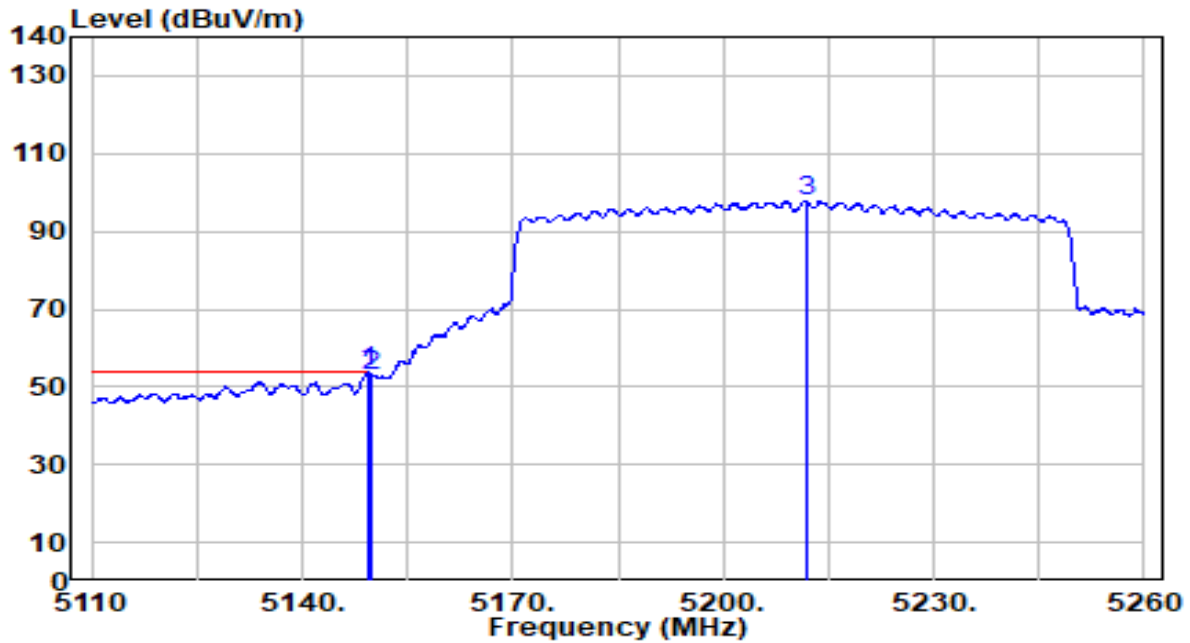


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	53.22	0.65	53.88	-0.12	54.00	232	188	Average
2		5150.000	52.17	0.65	52.82	-1.18	54.00	232	188	Average
3		5211.850	97.19	0.68	97.87	N/A	N/A	232	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

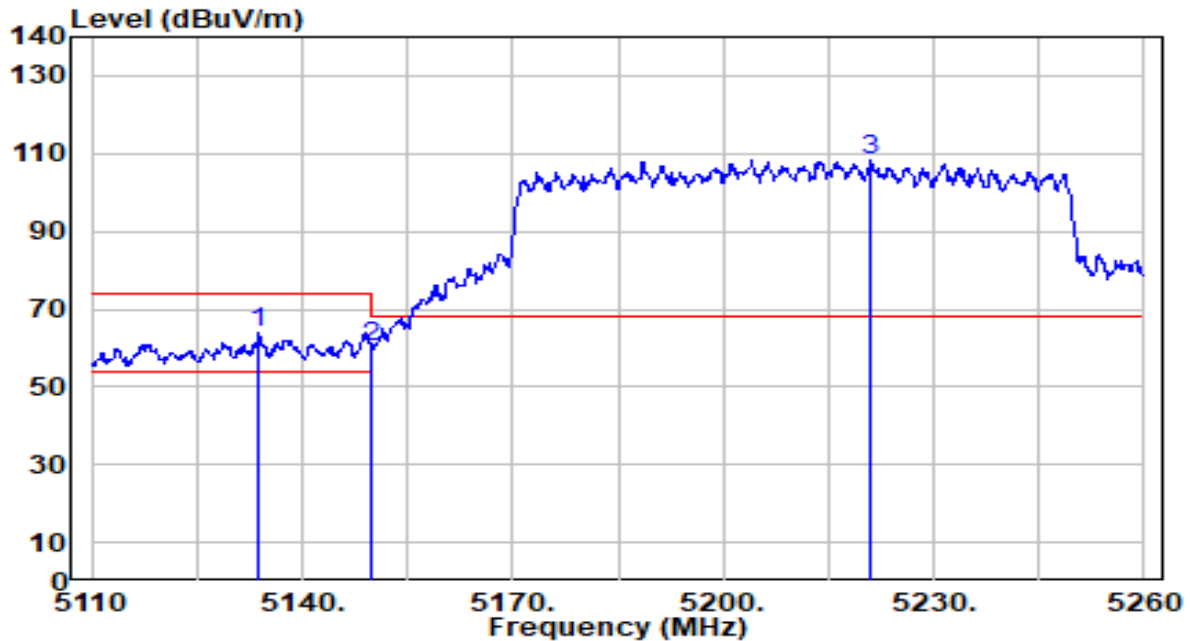


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5133.850	63.42	0.64	64.06	-9.94	74.00	254	183	Peak
2		5150.000	59.38	0.65	60.03	-13.97	74.00	254	183	Peak
3		5221.150	107.66	0.67	108.33	N/A	N/A	254	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

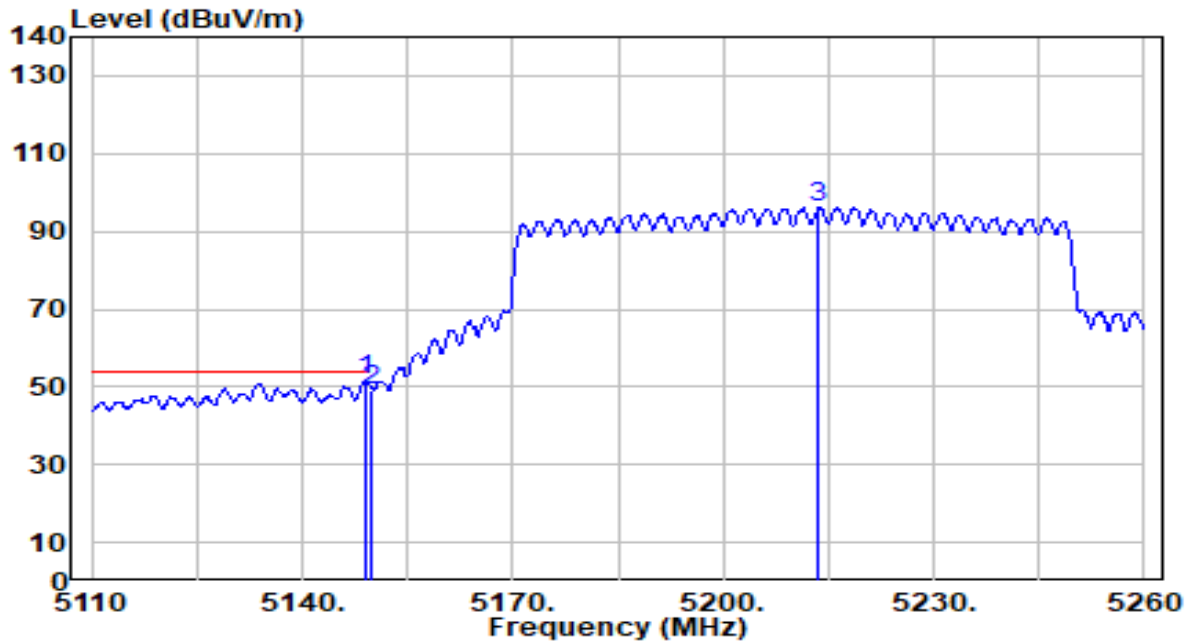


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	50.95	0.65	51.60	-2.40	54.00	254	183	Average
2		5150.000	48.49	0.65	49.15	-4.85	54.00	254	183	Average
3		5213.650	95.31	0.68	95.99	N/A	N/A	254	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

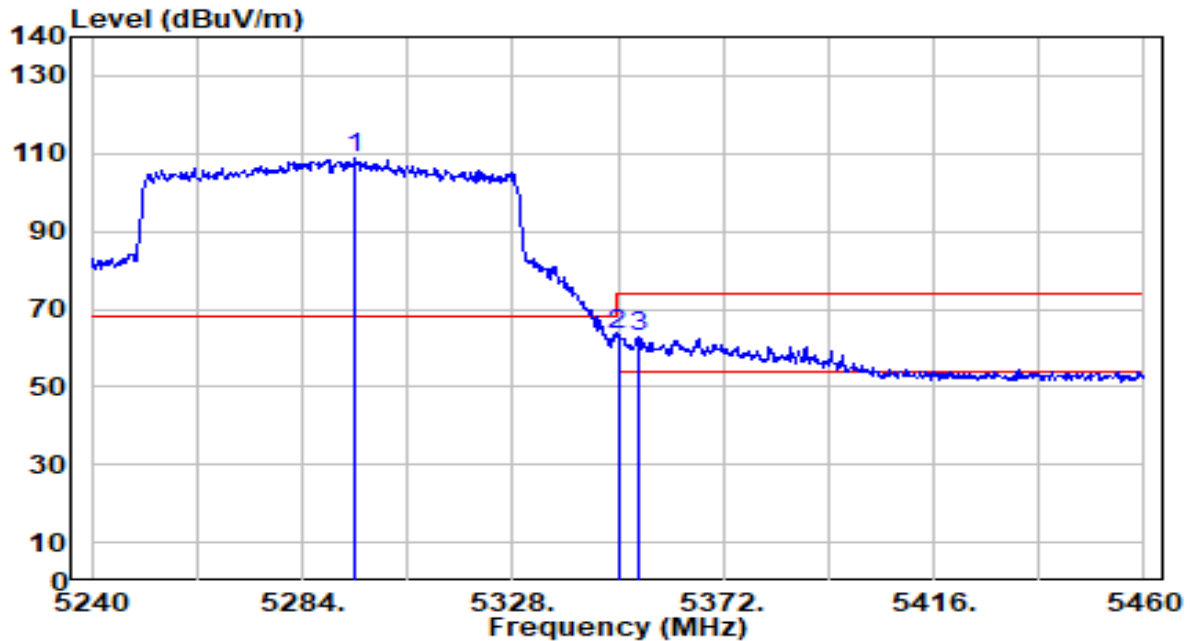


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5295.000	108.33	0.56	108.88	N/A	N/A	248	184	Peak
2	*	5350.000	62.67	0.47	63.14	-10.86	74.00	248	184	Peak
3		5354.180	62.33	0.46	62.80	-11.20	74.00	248	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

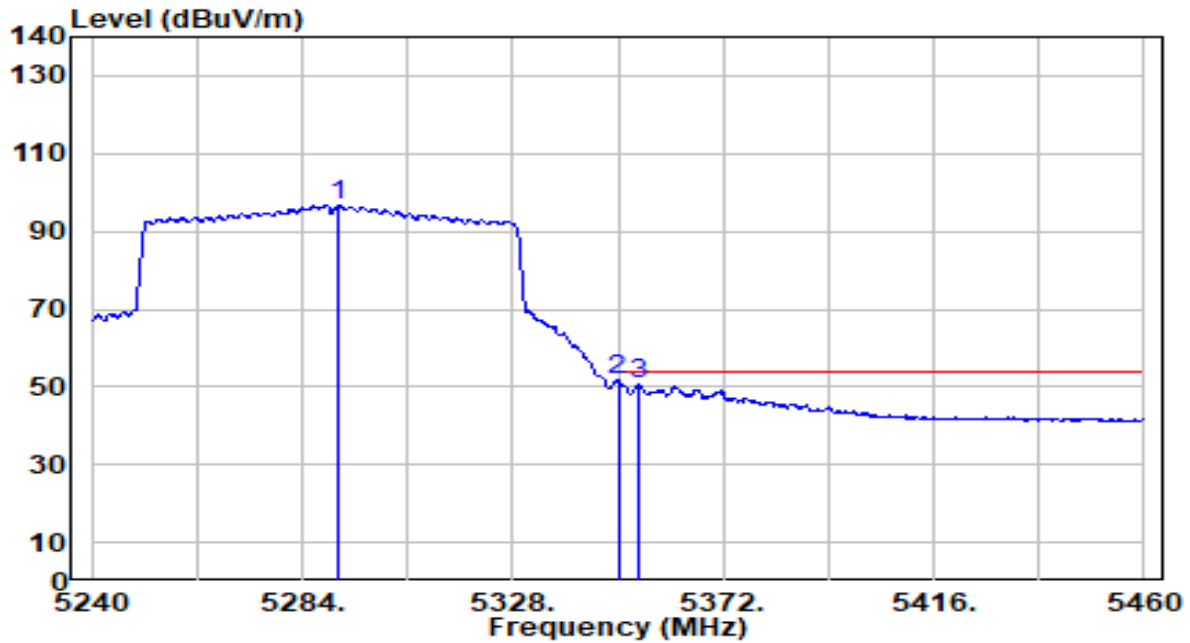


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5291.700	96.09	0.56	96.65	N/A	N/A	248	184	Average
2	*	5350.000	51.10	0.47	51.57	-2.43	54.00	248	184	Average
3		5354.180	50.35	0.46	50.81	-3.19	54.00	248	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

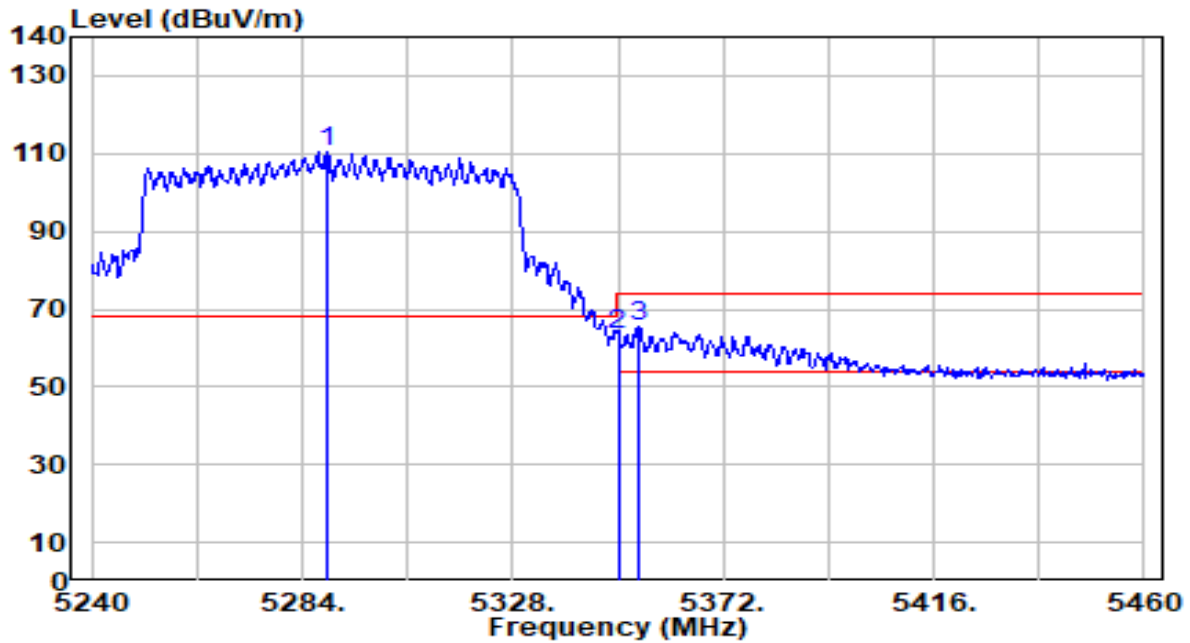


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5289.280	109.99	0.56	110.56	N/A	N/A	130	190	Peak
2	5350.000	62.84	0.47	63.31	-10.69	74.00	130	190	Peak
3	* 5354.180	65.16	0.46	65.62	-8.38	74.00	130	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-11
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

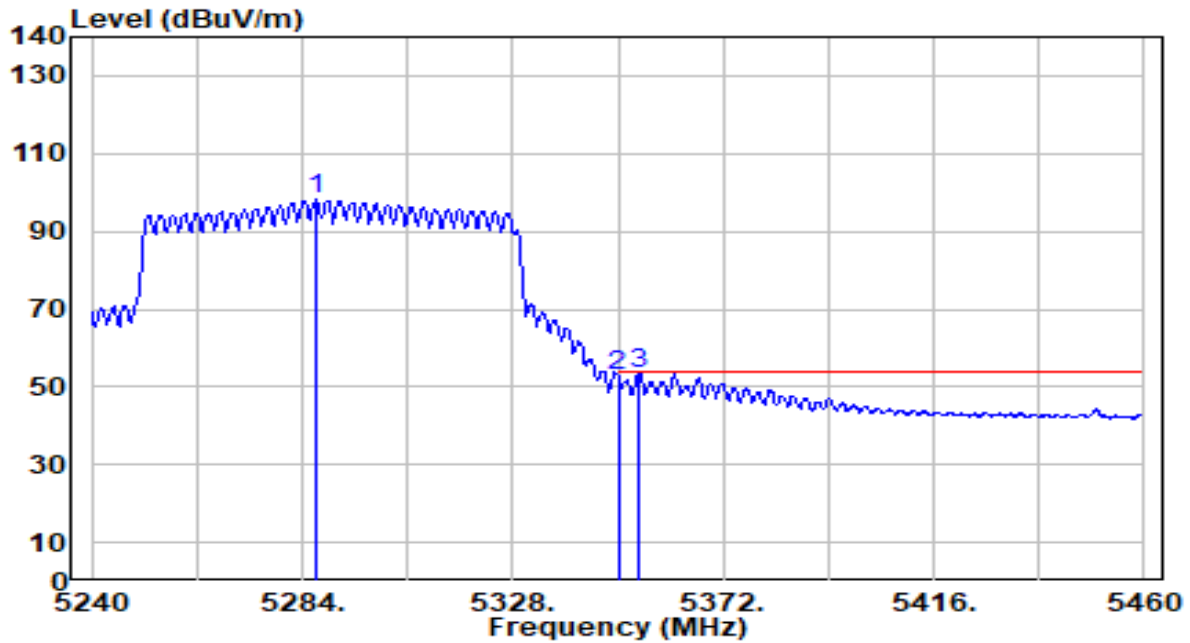


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.080	97.47	0.57	98.04	N/A	N/A	130	190	Average
2	5350.000	52.23	0.47	52.70	-1.30	54.00	130	190	Average
3	* 5354.180	53.07	0.46	53.53	-0.47	54.00	130	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

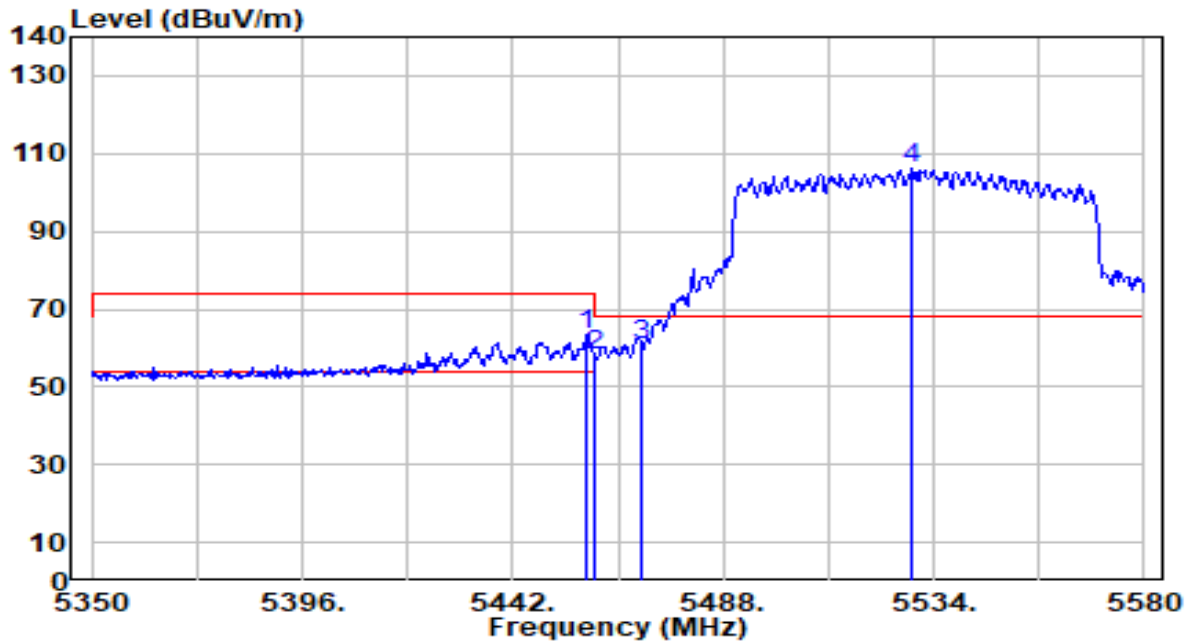


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.330	62.57	0.65	63.23	-10.77	74.00	102	211	Peak
2	5460.000	57.56	0.66	58.22	-15.78	74.00	102	211	Peak
3	* 5470.000	60.13	0.71	60.84	-7.36	68.20	102	211	Peak
4	5529.400	105.35	0.98	106.32	N/A	N/A	102	211	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

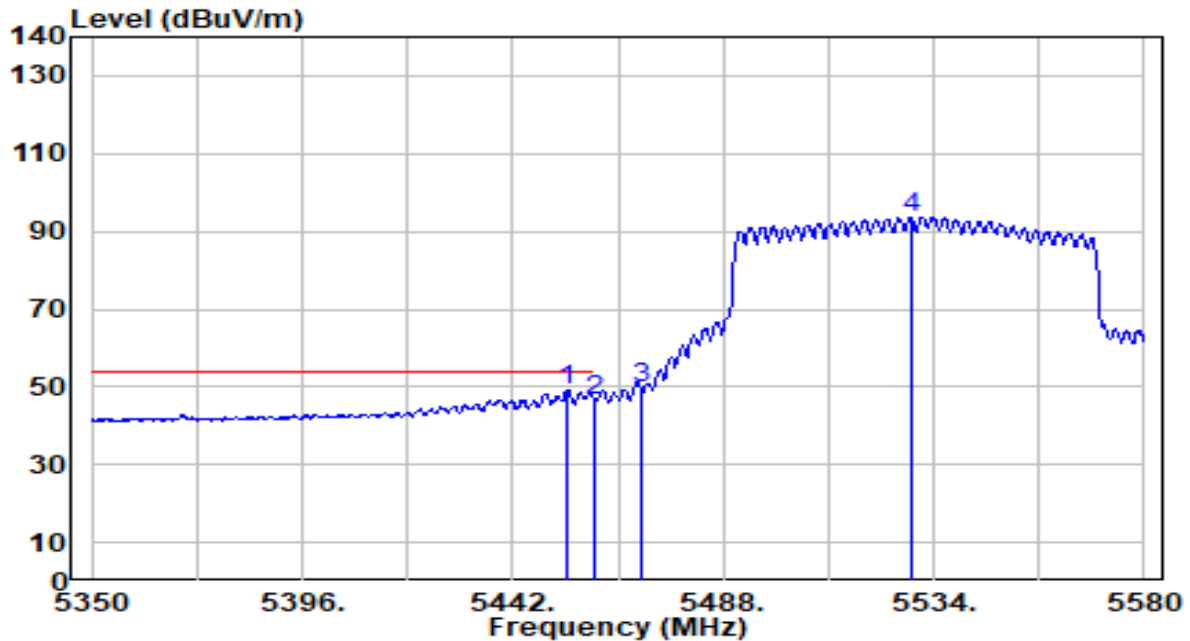


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.960	48.71	0.63	49.35	-4.65	54.00	102	211	Average
2		5460.000	45.92	0.66	46.58	-7.42	54.00	102	211	Average
3		5470.000	48.95	0.71	49.66	N/A	N/A	102	211	Average
4		5528.940	92.58	0.98	93.56	N/A	N/A	102	211	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

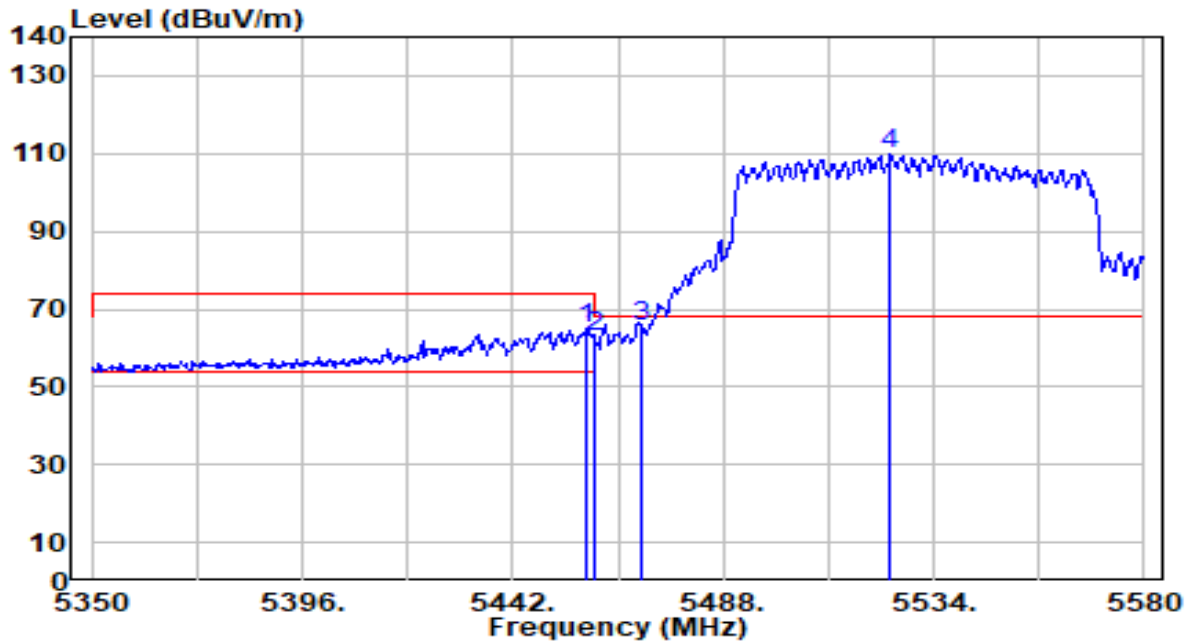


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	64.21	0.65	64.87	-9.13	74.00	122	179	Peak
2	5460.000	62.17	0.66	62.83	-11.17	74.00	122	179	Peak
3	* 5470.000	64.74	0.71	65.45	-2.75	68.20	122	179	Peak
4	5524.570	109.01	0.95	109.97	N/A	N/A	122	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

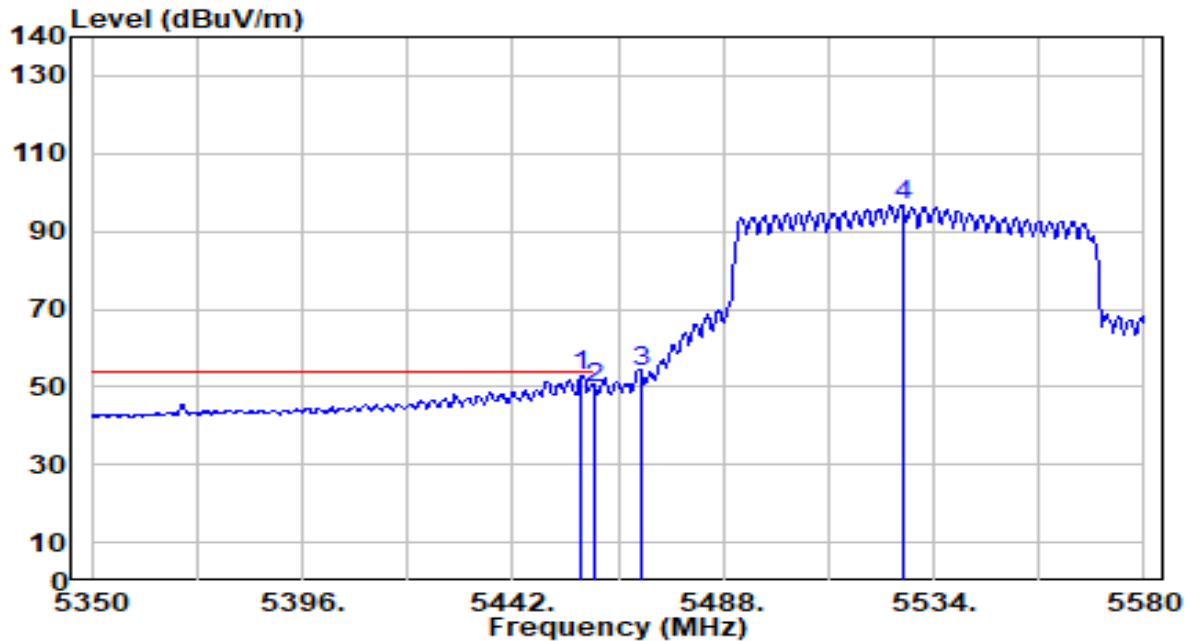


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.950	52.42	0.65	53.07	-0.93	54.00	122	179	Average
2		5460.000	49.25	0.66	49.91	-4.09	54.00	122	179	Average
3		5470.000	52.96	0.71	53.66	N/A	N/A	122	179	Average
4		5527.100	95.70	0.97	96.67	N/A	N/A	122	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

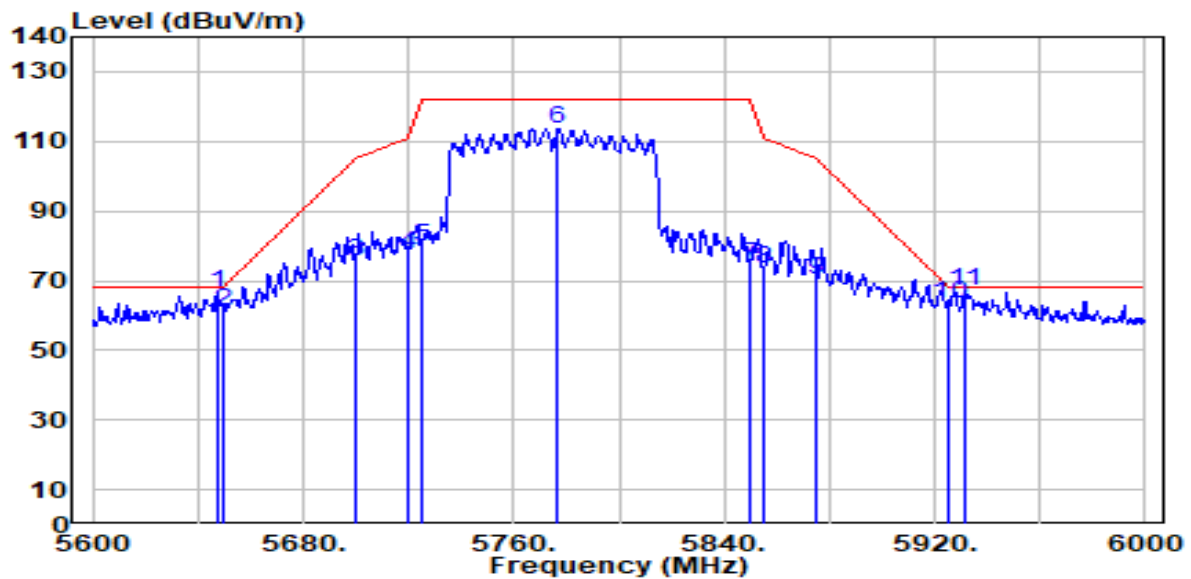


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5647.200	65.06	1.53	66.59	-1.61	68.20	151	256	Peak
2	5650.000	59.69	1.54	61.24	-6.96	68.20	151	256	Peak
3	5700.000	73.83	1.78	75.60	-29.60	105.20	151	256	Peak
4	5720.000	75.59	1.87	77.46	-33.34	110.80	151	256	Peak
5	5725.000	77.86	1.89	79.75	-42.45	122.20	151	256	Peak
6	5776.800	111.47	2.14	113.60	N/A	N/A	151	256	Peak
7	5850.000	72.37	2.25	74.63	-47.57	122.20	151	256	Peak
8	5855.000	71.21	2.25	73.47	-37.33	110.80	151	256	Peak
9	5875.000	68.01	2.26	70.27	-34.93	105.20	151	256	Peak
10	5925.000	61.07	2.27	63.33	-4.87	68.20	151	256	Peak
11 *	5931.600	64.84	2.27	67.11	-1.09	68.20	151	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

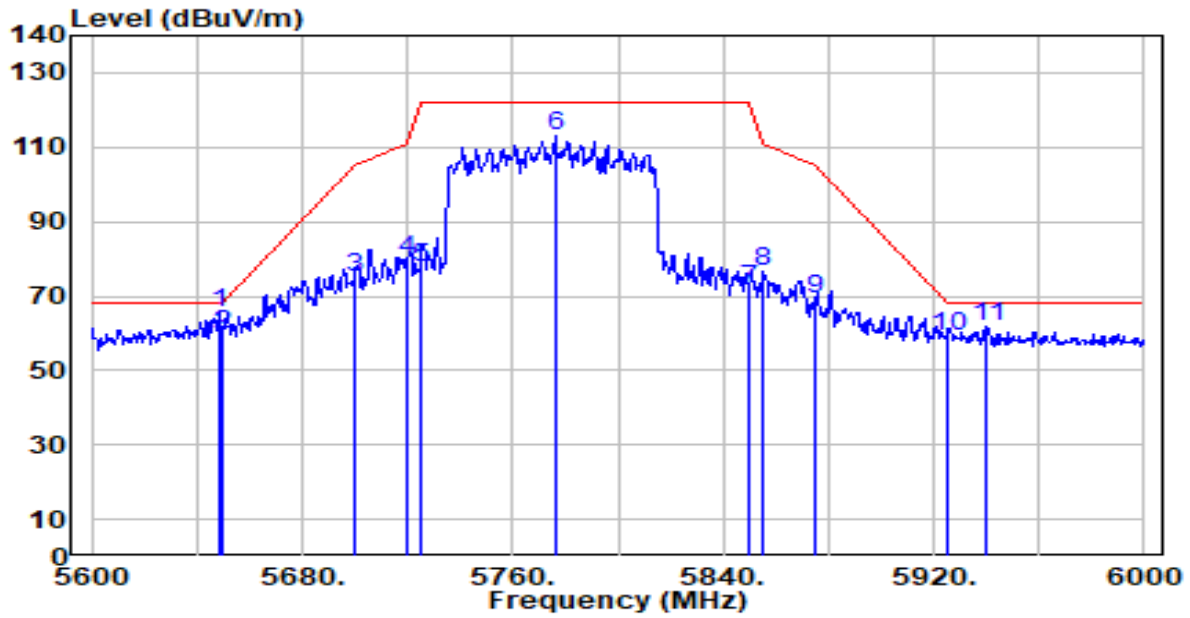


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	63.77	1.53	65.30	-2.90	68.20	100	180	Peak
2		5650.000	58.41	1.54	59.96	-8.24	68.20	100	180	Peak
3		5700.000	73.05	1.78	74.83	-30.37	105.20	100	180	Peak
4		5720.000	78.05	1.87	79.92	-30.88	110.80	100	180	Peak
5		5725.000	75.54	1.89	77.43	-44.77	122.20	100	180	Peak
6		5776.400	110.71	2.13	112.84	N/A	N/A	100	180	Peak
7		5850.000	69.60	2.25	71.85	-50.35	122.20	100	180	Peak
8		5855.000	74.10	2.25	76.35	-34.45	110.80	100	180	Peak
9		5875.000	66.82	2.26	69.07	-36.13	105.20	100	180	Peak
10		5925.000	56.87	2.27	59.13	-9.07	68.20	100	180	Peak
11		5940.400	59.37	2.27	61.64	-6.56	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

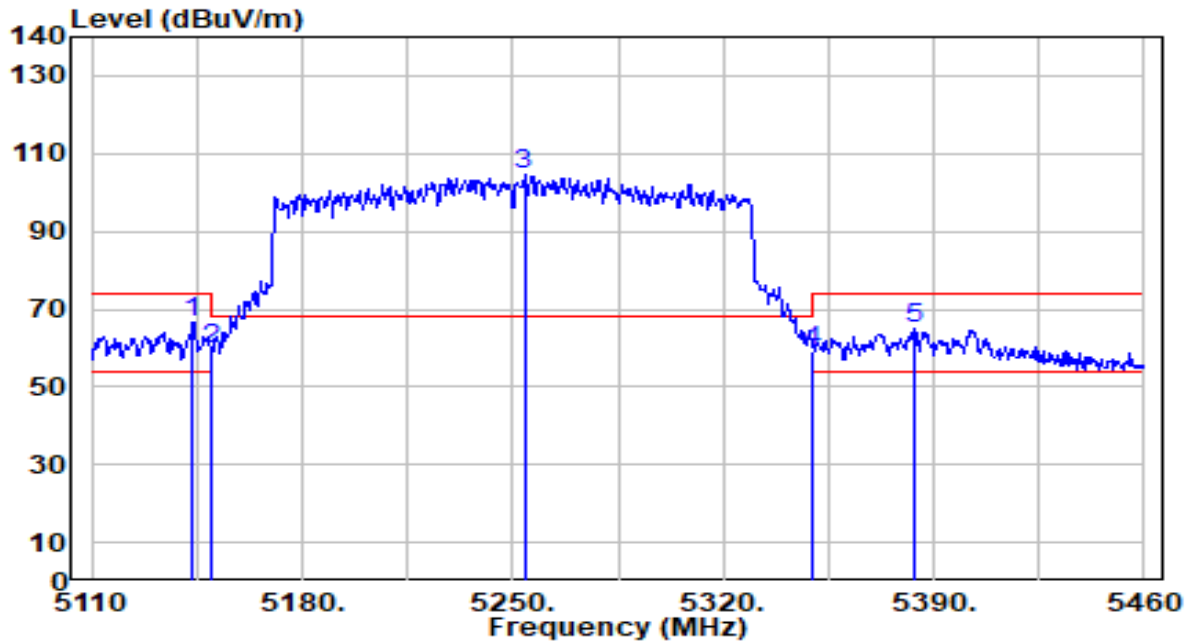


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.600	66.10	0.65	66.75	-7.25	74.00	198	218	Peak
2		5150.000	58.85	0.65	59.50	-14.50	74.00	198	218	Peak
3		5253.850	103.78	0.62	104.40	N/A	N/A	198	218	Peak
4		5350.000	58.44	0.47	58.91	-15.09	74.00	198	218	Peak
5		5383.700	64.44	0.42	64.86	-9.14	74.00	198	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

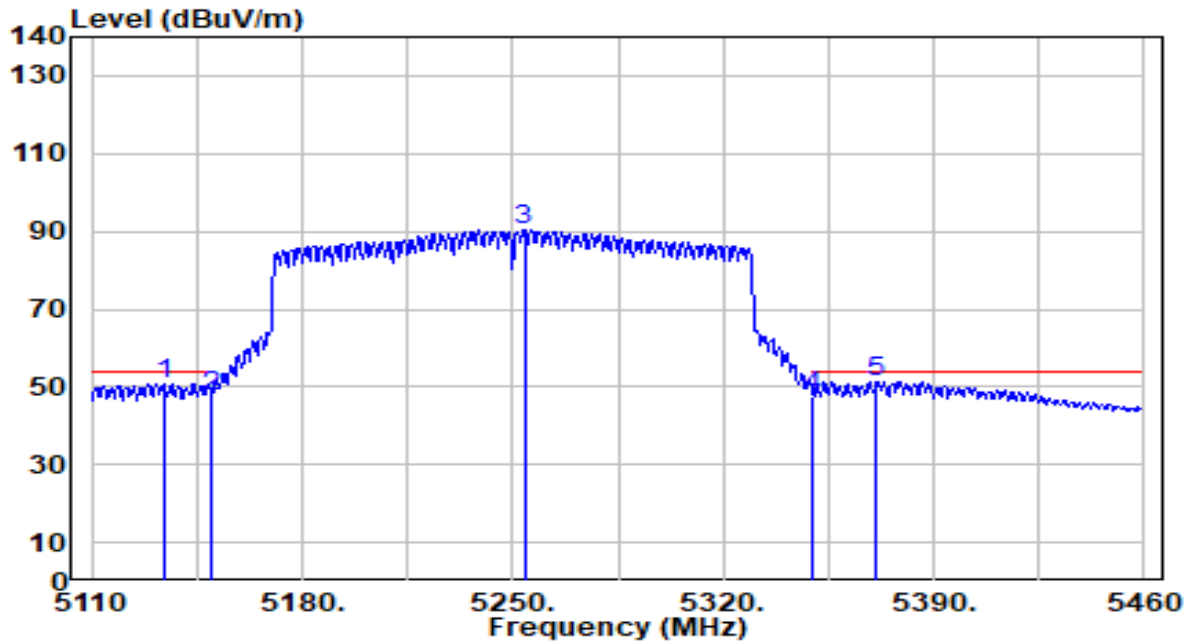


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	50.34	0.64	50.98	-3.02	54.00	198	218	Average
2	5150.000	47.07	0.65	47.72	-6.28	54.00	198	218	Average
3	5253.850	89.94	0.62	90.56	N/A	N/A	198	218	Average
4	5350.000	46.96	0.47	47.43	-6.57	54.00	198	218	Average
5	* 5371.100	50.97	0.44	51.41	-2.59	54.00	198	218	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

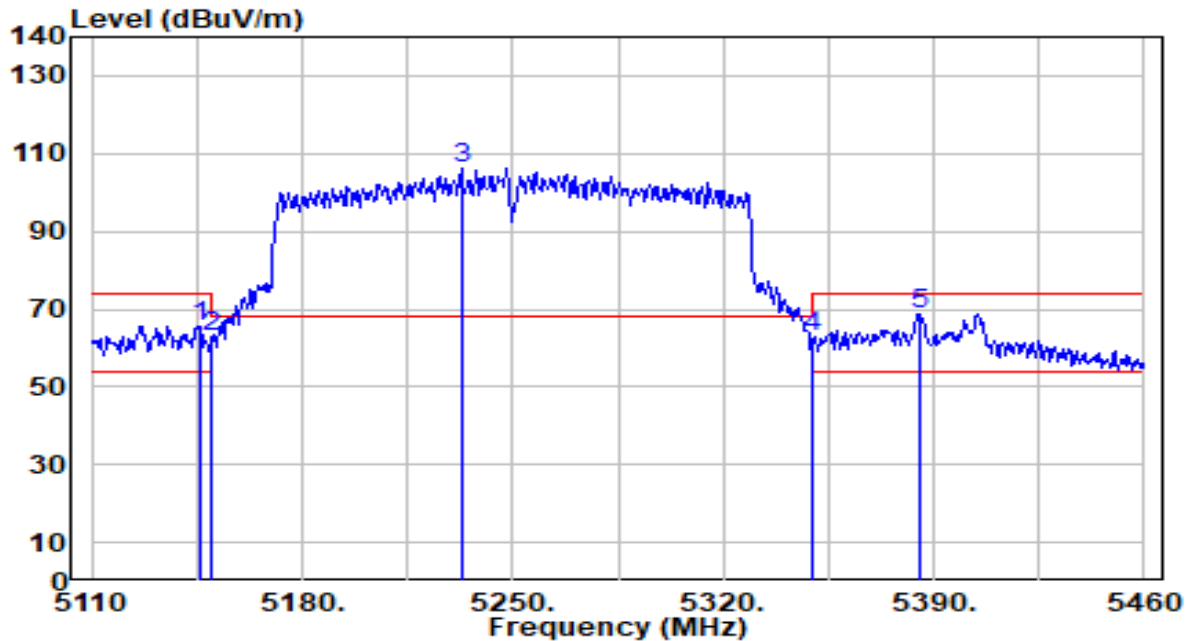


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.700	65.09	0.65	65.74	-8.26	74.00	101	192	Peak
2	5150.000	62.13	0.65	62.78	-11.22	74.00	101	192	Peak
3	5232.850	105.32	0.65	105.97	N/A	N/A	101	192	Peak
4	5350.000	62.50	0.47	62.97	-11.03	74.00	101	192	Peak
5	* 5385.100	68.39	0.42	68.81	-5.19	74.00	101	192	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-02
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

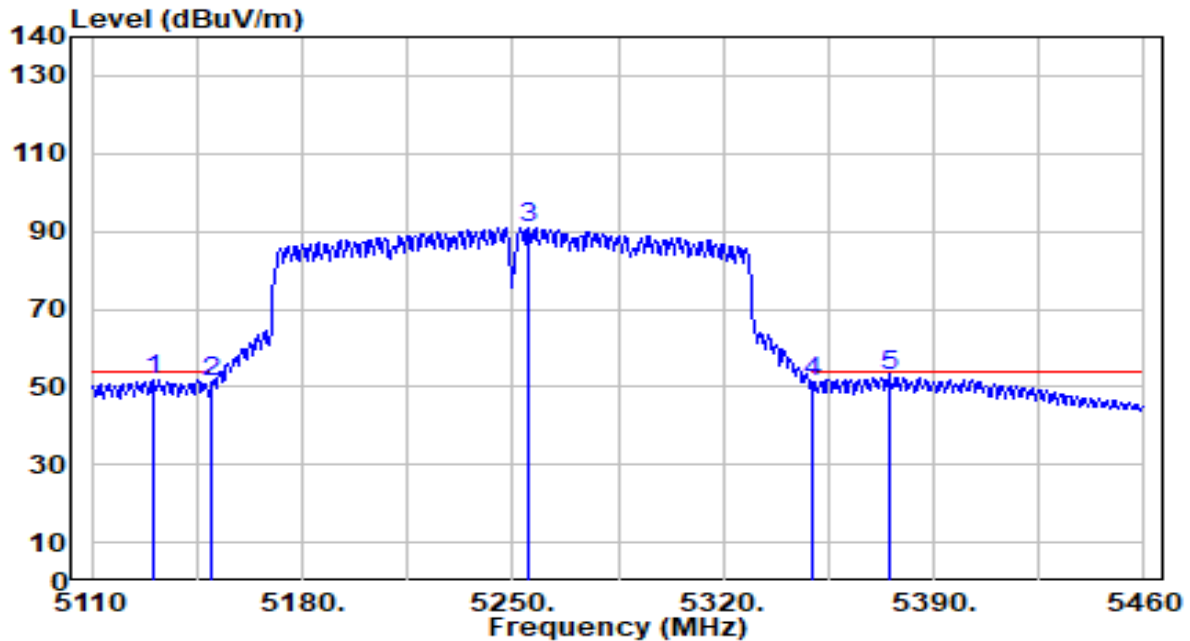


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5130.300	51.26	0.64	51.90	-2.10	54.00	101	192	Average
2	5150.000	50.42	0.65	51.08	-2.92	54.00	101	192	Average
3	5255.250	90.50	0.62	91.12	N/A	N/A	101	192	Average
4	5350.000	50.90	0.47	51.37	-2.63	54.00	101	192	Average
5	* 5375.300	52.59	0.43	53.02	-0.98	54.00	101	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

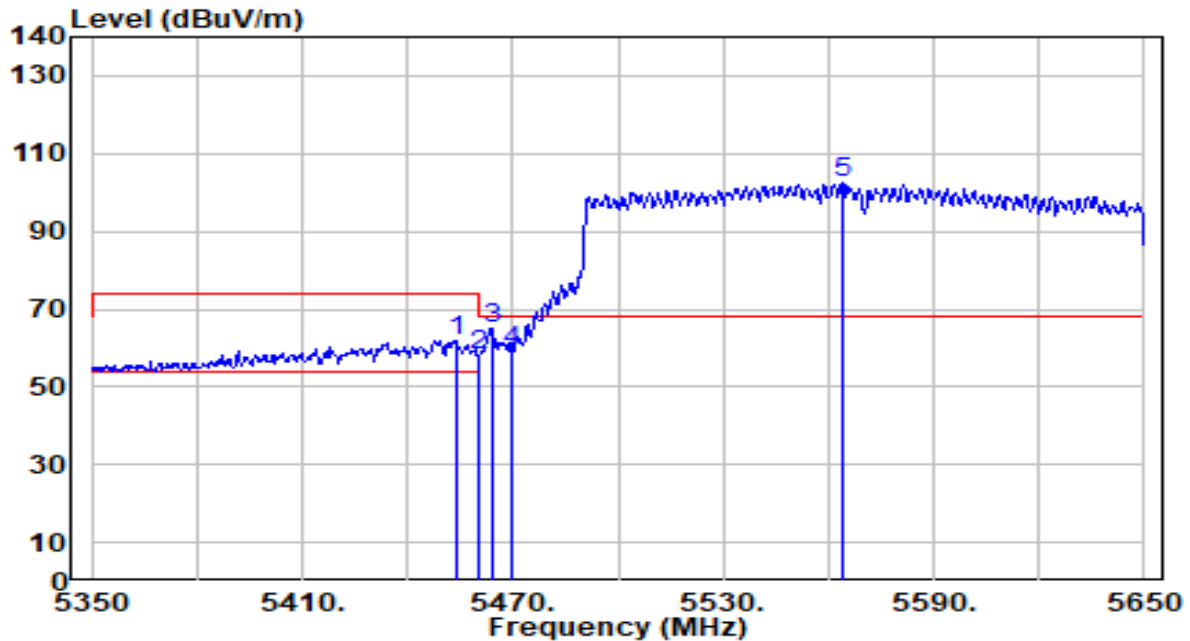


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.800	61.44	0.63	62.07	-11.93	74.00	102	211	Peak
2	5460.000	57.66	0.66	58.32	-15.68	74.00	102	211	Peak
3	* 5464.000	64.42	0.68	65.10	-3.10	68.20	102	211	Peak
4	5470.000	58.62	0.71	59.32	-8.88	68.20	102	211	Peak
5	5563.900	101.28	1.14	102.42	N/A	N/A	102	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

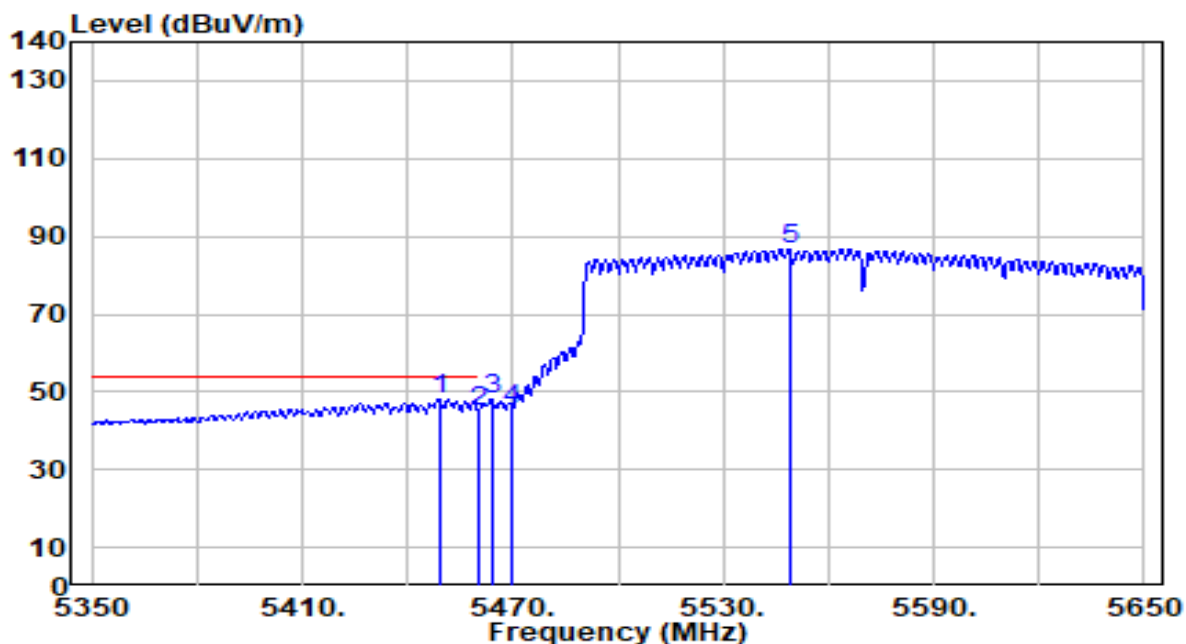


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.000	47.72	0.61	48.33	-5.67	54.00	102	211	Average
2		5460.000	44.35	0.66	45.02	-8.98	54.00	102	211	Average
3		5464.000	47.25	0.68	47.92	N/A	N/A	102	211	Average
4		5470.000	44.95	0.71	45.66	N/A	N/A	102	211	Average
5		5548.900	85.48	1.07	86.55	N/A	N/A	102	211	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

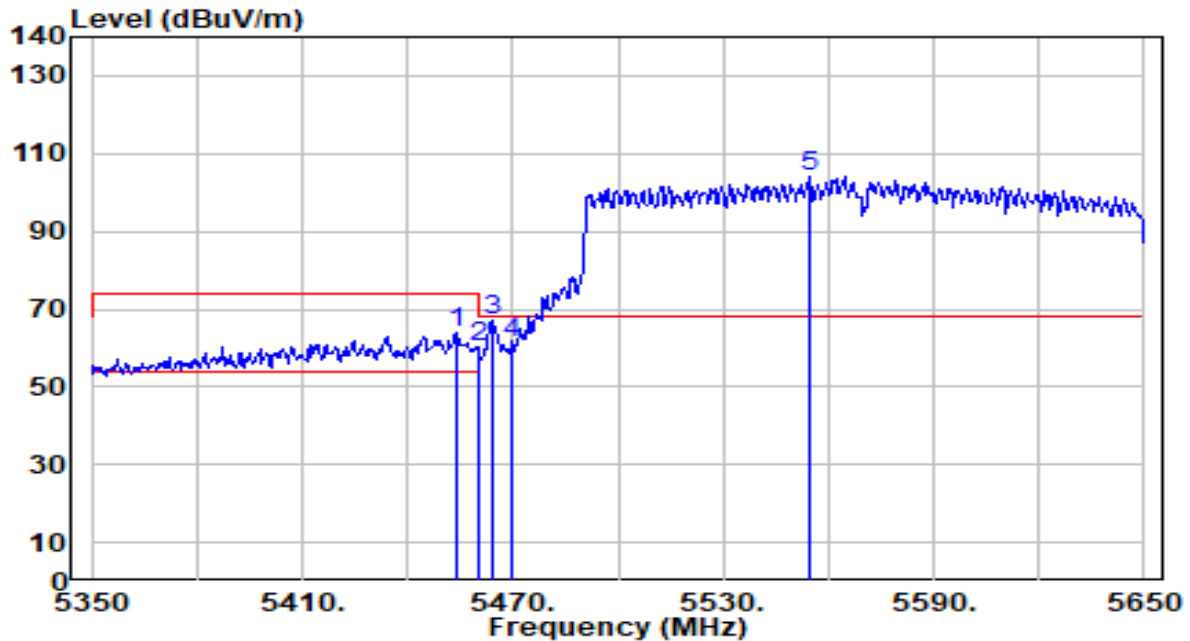


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.800	63.14	0.63	63.78	-10.22	74.00	122	179	Peak
2	5460.000	59.80	0.66	60.47	-13.53	74.00	122	179	Peak
3	* 5464.000	66.62	0.68	67.30	-0.90	68.20	122	179	Peak
4	5470.000	60.33	0.71	61.04	-7.16	68.20	122	179	Peak
5	5554.600	103.15	1.10	104.25	N/A	N/A	122	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-04-01
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

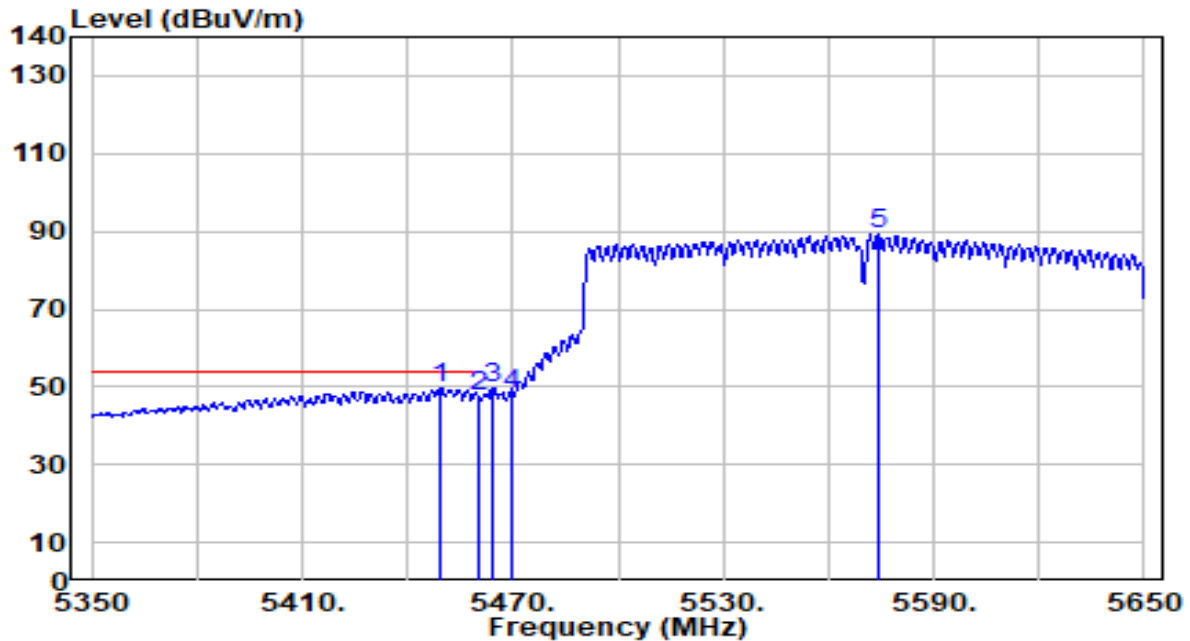

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.000	49.24	0.61	49.85	-4.15	54.00	122	179	Average
2		5460.000	47.02	0.66	47.68	-6.32	54.00	122	179	Average
3		5464.000	48.90	0.68	49.58	N/A	N/A	122	179	Average
4		5470.000	47.62	0.71	48.32	N/A	N/A	122	179	Average
5		5574.100	87.85	1.19	89.04	N/A	N/A	122	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

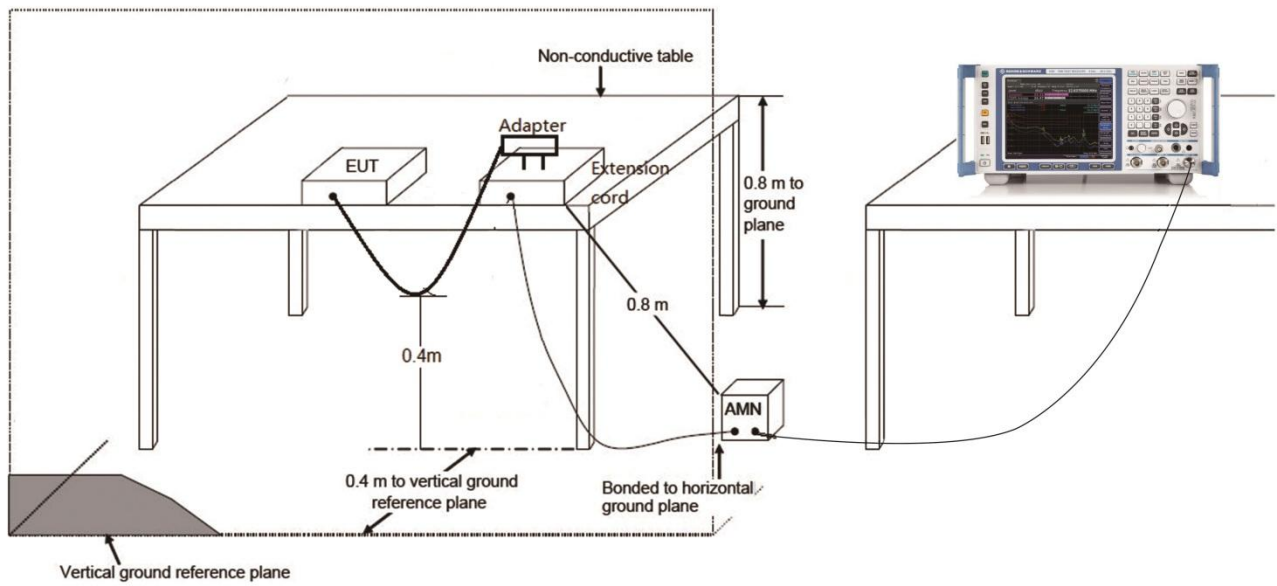

7.10.4.Test Result

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.5°C /59%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

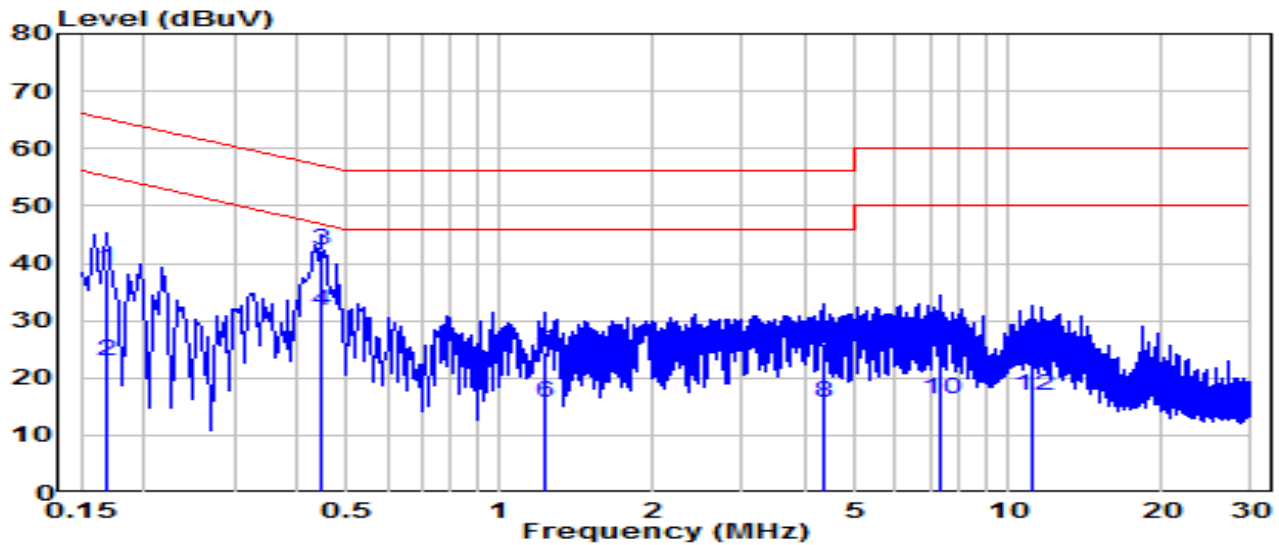


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	29.26	9.63	38.89	-26.17	65.06	QP
2	0.168	13.28	9.63	22.90	-32.16	55.06	Average
3	* 0.442	32.58	9.64	42.22	-14.80	57.02	QP
4	* 0.442	22.00	9.64	31.64	-15.37	47.02	Average
5	1.230	14.86	9.68	24.54	-31.46	56.00	QP
6	1.230	5.90	9.68	15.58	-30.42	46.00	Average
7	4.339	16.35	9.74	26.09	-29.91	56.00	QP
8	4.339	6.04	9.74	15.78	-30.22	46.00	Average
9	7.376	16.32	9.81	26.13	-33.87	60.00	QP
10	7.376	6.53	9.81	16.34	-33.66	50.00	Average
11	11.201	14.80	9.88	24.67	-35.33	60.00	QP
12	11.201	7.01	9.88	16.88	-33.12	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.5°C /59%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

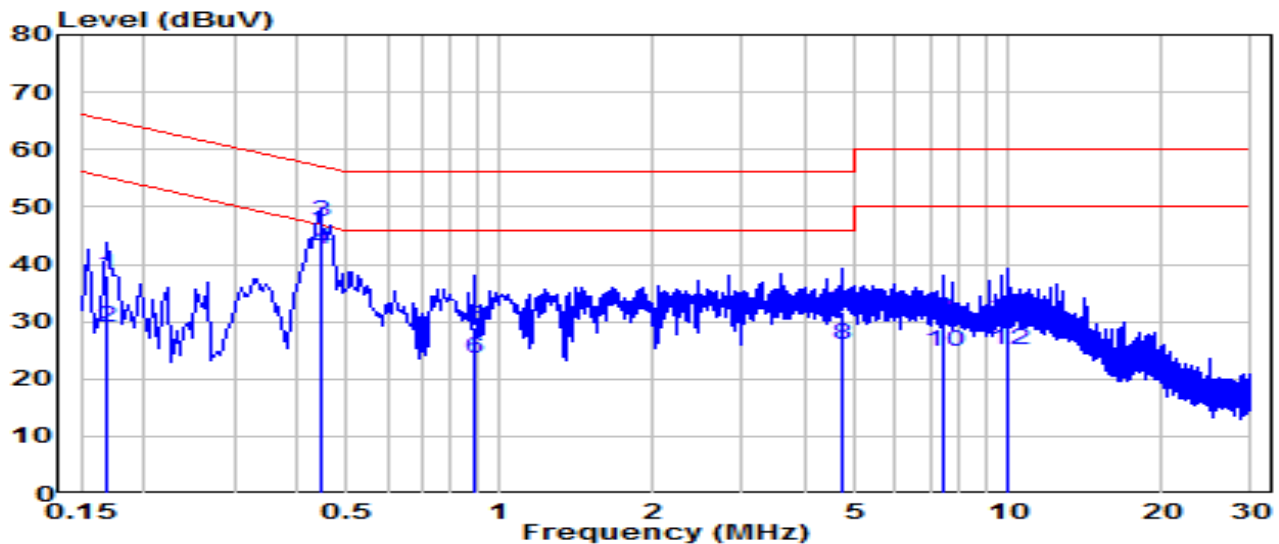

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	28.35	9.63	37.98	-27.08	65.06	QP
2	0.168	19.45	9.63	29.07	-25.98	55.06	Average
3	* 0.442	37.89	9.64	47.53	-9.48	57.02	QP
4	* 0.442	32.96	9.64	42.60	-4.41	47.02	Average
5	0.892	19.41	9.66	29.07	-26.93	56.00	QP
6	0.892	13.83	9.66	23.49	-22.51	46.00	Average
7	4.735	22.03	9.74	31.77	-24.23	56.00	QP
8	4.735	16.27	9.74	26.01	-19.99	46.00	Average
9	7.444	20.61	9.81	30.42	-29.58	60.00	QP
10	7.444	14.82	9.81	24.63	-25.37	50.00	Average
11	9.991	20.68	9.87	30.55	-29.45	60.00	QP
12	9.991	15.07	9.87	24.94	-25.06	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2502TWL804 -UT” file.

Appendix B : EUT Photograph

Refer to “2502TWL804 -UE” file.

Appendix C : Internal Photograph

Refer to “2502TWL804 -UI” file.

_____ The End _____