FCC CFR47 PART 15 SUBPART C CERTIFICATION

TEST REPORT

FOR

2.4GHZ WIRELESS ROUTER

MODEL NUMBER: DI-524

FCC ID: KA2DI524C1

REPORT NUMBER: 04U2807-1

ISSUE DATE: JULY 1, 2004

Prepared for
D-LINK CORPORATION
2F, NO. 233-2, PAO-CHIAO RD.,
HSIN-TEIN 231 TAIPEI
TAIWAN, R.O.C.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION 3

2. EUT DESCRIPTION 4

3. TEST METHODOLOGY 5

4. FACILITIES AND ACCREDITATION 5

5. CALIBRATION AND UNCERTAINTY 6

5.1. MEASURING INSTRUMENT CALIBRATION 6

5.2. MEASUREMENT UNCERTAINTY 6

5.3. TEST AND MEASUREMENT EQUIPMENT 7

6. SETUP OF EQUIPMENT UNDER TEST 8

7. APPLICABLE LIMITS AND TEST RESULTS 12

7.1. 6 dB BANDWIDTH 12

7.2. 99% BANDWIDTH 20

7.3. PEAK OUTPUT POWER 28

7.4. MAXIMUM PERMISSIBLE EXPOSURE 37

7.5. AVERAGE POWER 40

7.6. PEAK POWER SPECTRAL DENSITY 41

7.7. CONDUCTED SPURIOUS EMISSIONS 49

7.8. RADIATED EMISSIONS 64

7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS 64
7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ, PCB Monopole Antenna 67
7.8.3. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ, Dipole Antenna 86

8. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz 105

8.1. POWERLINE CONDUCTED EMISSIONS 109

9. SETUP PHOTOS 112

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

1. TEST RESULT CERTIFICATION

COMPANY NAME: D-LINK CORPORATION
2F, NO. 233-2, PAO-CHIAO RD.,
HSIN-TEIN 231 TAIPEI
TAIWAN, R.O.C.

EUT DESCRIPTION: 802.11b/g 2.4GHz Wireless Router

MODEL: DI-524

DATE TESTED: JUNE 11 – 29, 2004

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

NEELESH RAJ
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

2. EUT DESCRIPTION

The EUT is a high speed 2.4 GHz (802.11b/g/g Turbo) wireless router. It operates in the 2400-2483.5 MHz band.

The transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	21.83	152.41
2412 - 2462	802.11g	21.89	154.53
2437	802.11g Turbo	21.74	149.28

The radio utilizes one dipole antenna, with a maximum gain of 1.8 dBi, and one printed circuit board monopole antenna, with a maximum gain of 0 dBi.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://www.ccsemc.com.

NVLAP®

LAB CODE:200065-0

No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	US42070220	4/1/2005
Preamplifier, 1 ~ 26 GHz	Miteq	NSP10023988	646456	4/25/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29301	12/26/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/13/2004
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	10/13/2004
EMI Test Receiver	R & S	ESIB40	100192	11/21/2004
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	2/4/2005
4.6GHz HPF	FSY Microwave	FM-4570-9SS	3	CNR
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924341	4/25/2005

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	IBM	R40	FX-28550	DOC
AC Adapter	Jentec	JTA 0302B	N/A	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	IEC	Unshielded	1.5m	no
2	DC	2	IEC	Unshielded	1.5m	no
3	LAN	5	RJ-45	Unshielded	2m	yes

TEST SETUP

The EUT is a standalone unit and is connected to a PC via an RJ45 LAN cable.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SETUP DIAGRAM FOR TESTS

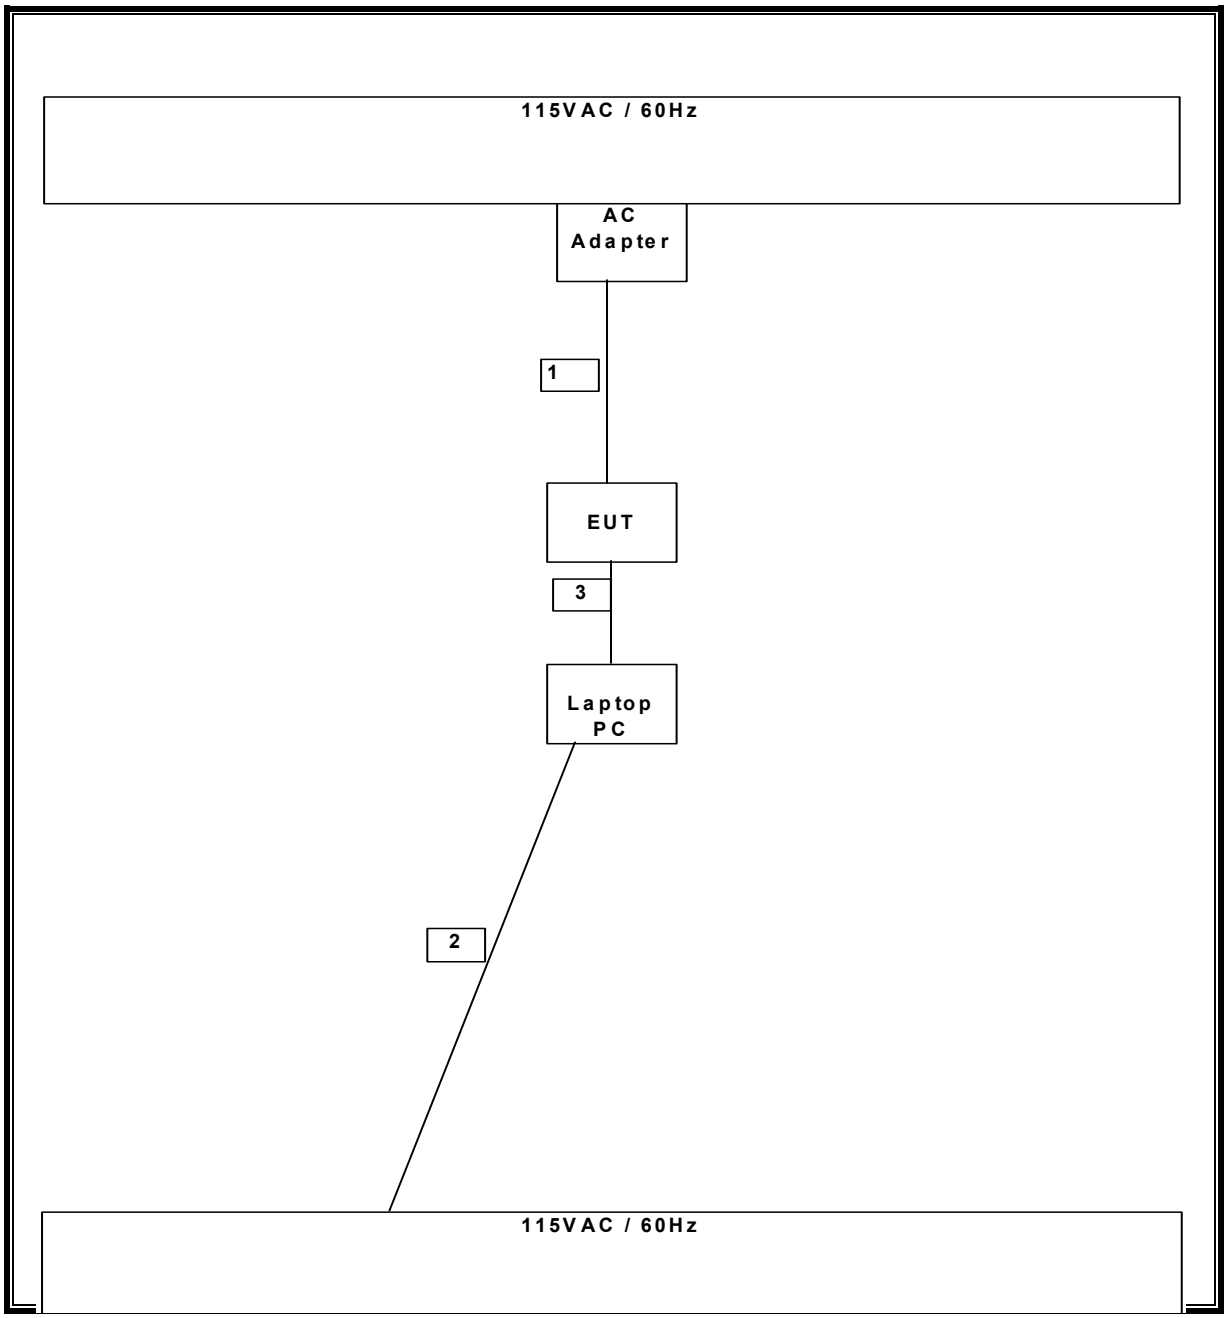

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SETUP FOR DIGITAL DEVICE TESTS

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Printer	HP	2225C	2930S52614	DS16XU2225
Laptop PC	IBM	R40	FX-28550	DOC
USB Floppy Drive	Mitsumi	D353FUE	3M11HT0282	DOC
USB Mouse	Logitech	M-E58	HCA24201816	DOC
AC Adapter	Jentec	JTA 0302B	N/A	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	IEC	Unshielded	1.5m	no
2	DC	2	IEC	Unshielded	1.5m	no
3	LAN	5	RJ-45	Unshielded	2m	yes
4	USB	1	USB	Shielded	1.5m	yes
5	USB	1	USB	Shielded	1.5m	yes
6	Parallel	1	25pin	Shielded	1.5m	yes

TEST SETUP

The EUT is a standalone unit and is connected to a PC via an RJ45 LAN cable.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

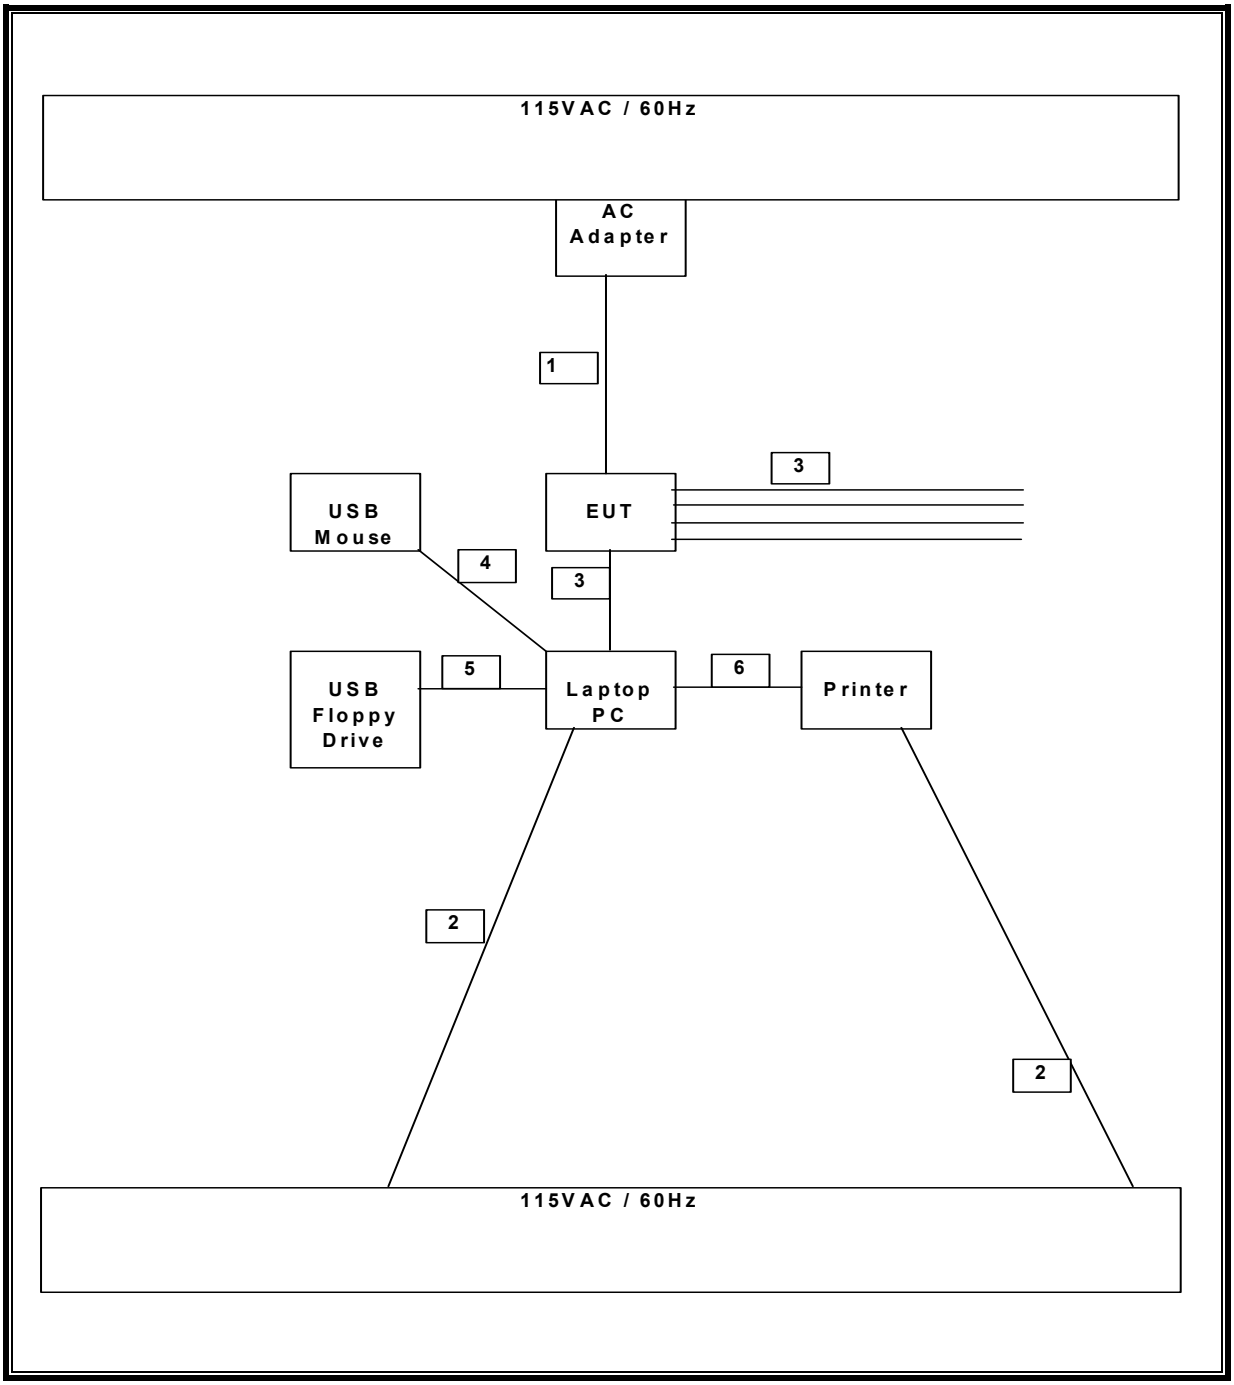

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12080	500	11580
Middle	2437	12000	500	11500
High	2462	12250	500	11750

802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16580	500	16080
Middle	2437	16580	500	16080
High	2462	16580	500	16080

802.11g Turbo Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Middle	2437	32000	500	31500

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH (802.11b MODE)

6 DB BANDWIDTH LOW CH (802.11b mode)

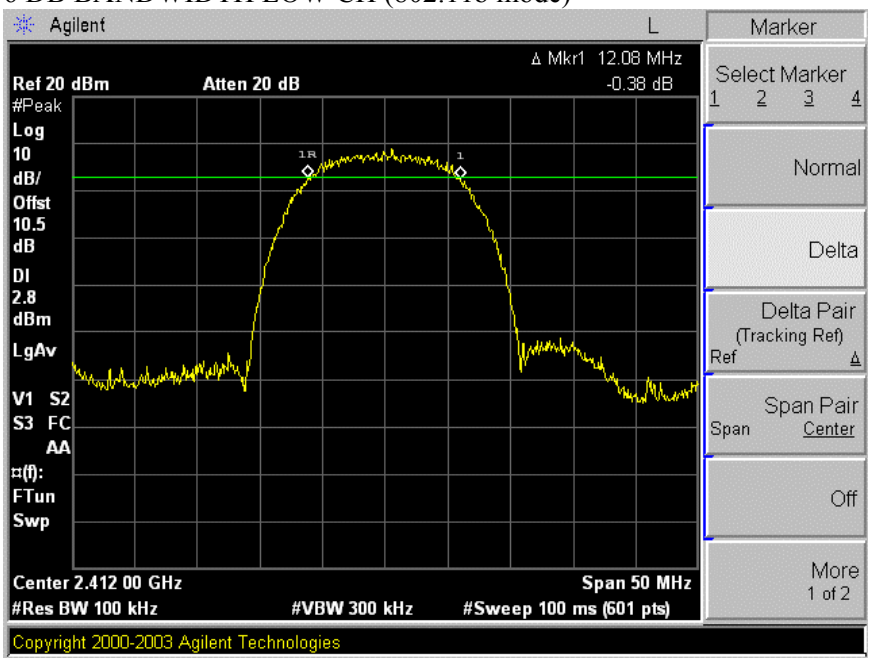

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH MID CH (802.11b mode)

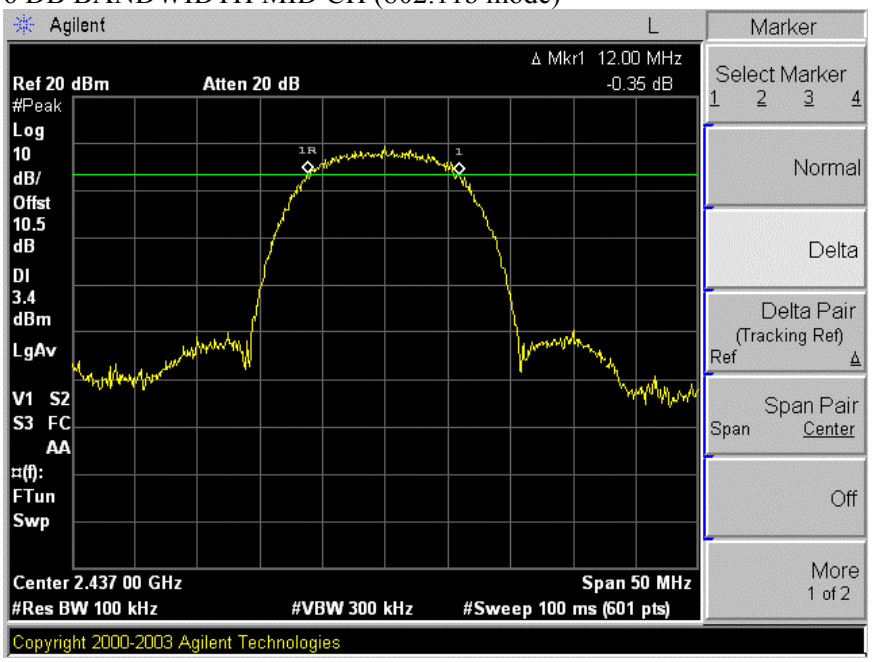

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH HIGH CH (802.11b mode)

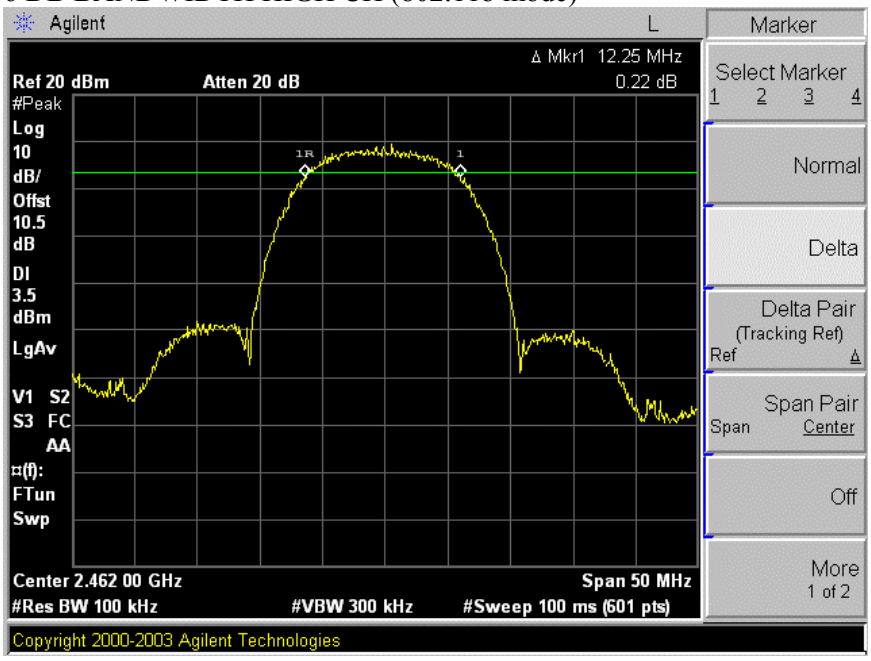

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH (802.11g MODE)

6 DB BANDWIDTH LOW CH (802.11g mode)

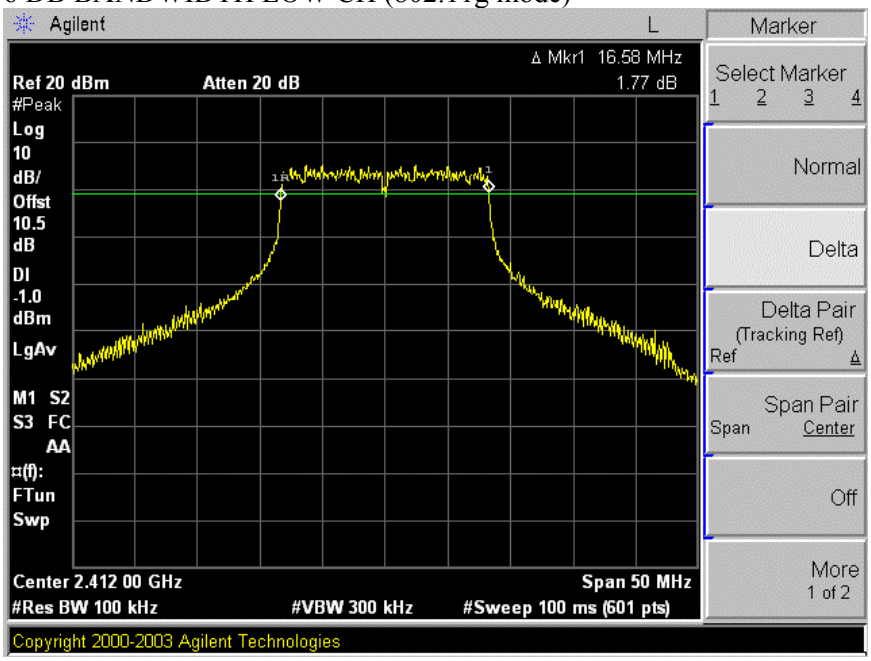

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH MID CH (802.11g mode)

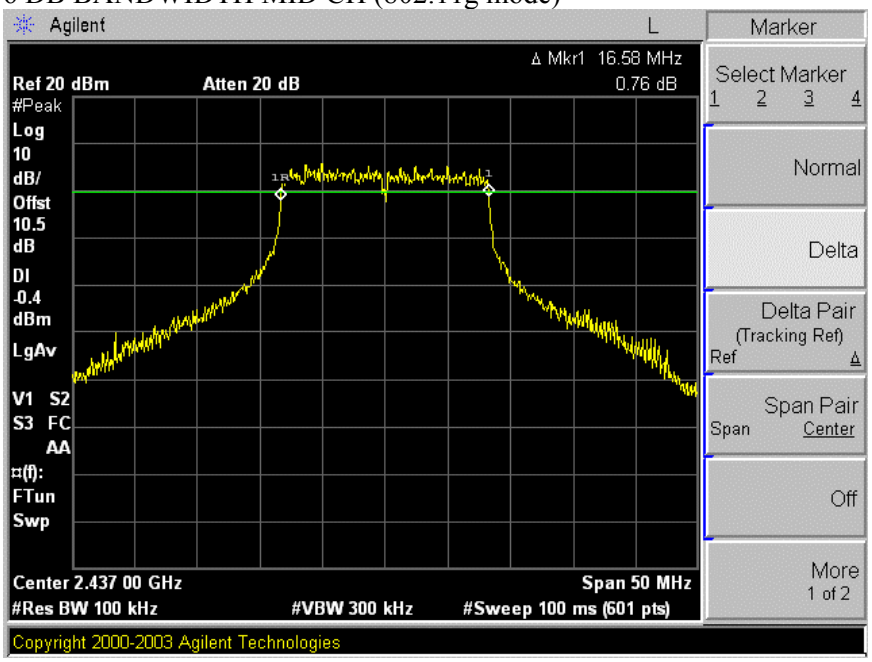

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH HIGH CH (802.11g mode)

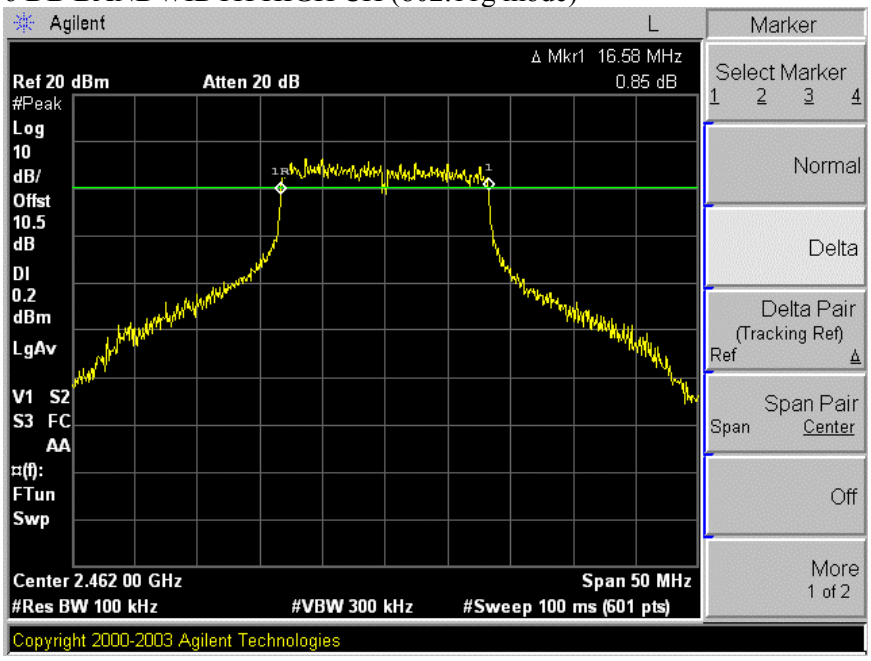

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH (802.11g TURBO MODE)

6 DB BANDWIDTH MID CH (802.11g Turbo mode)

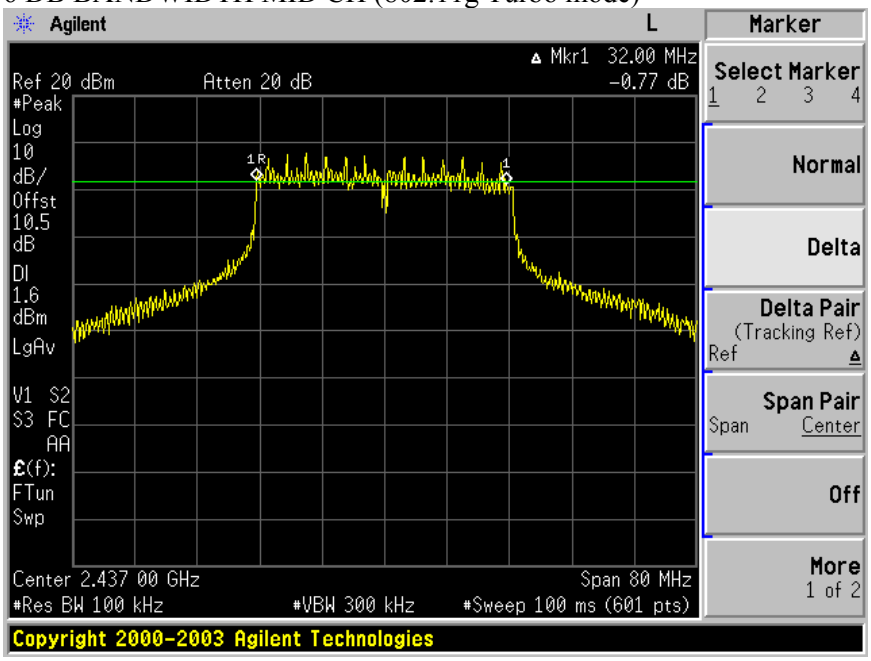

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.3829
Middle	2437	15.454
High	2462	15.3979

802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4706
Middle	2437	16.5235
High	2462	16.6129

802.11g Turbo Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Middle	2437	32.6917

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH (802.11b MODE)

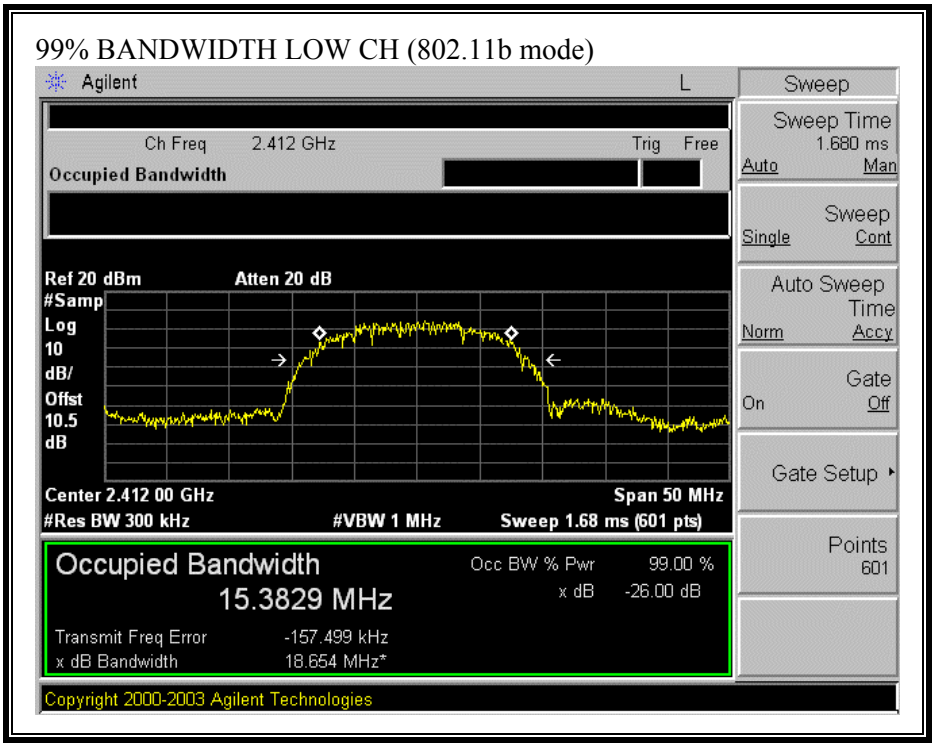

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH MID CH (802.11b mode)

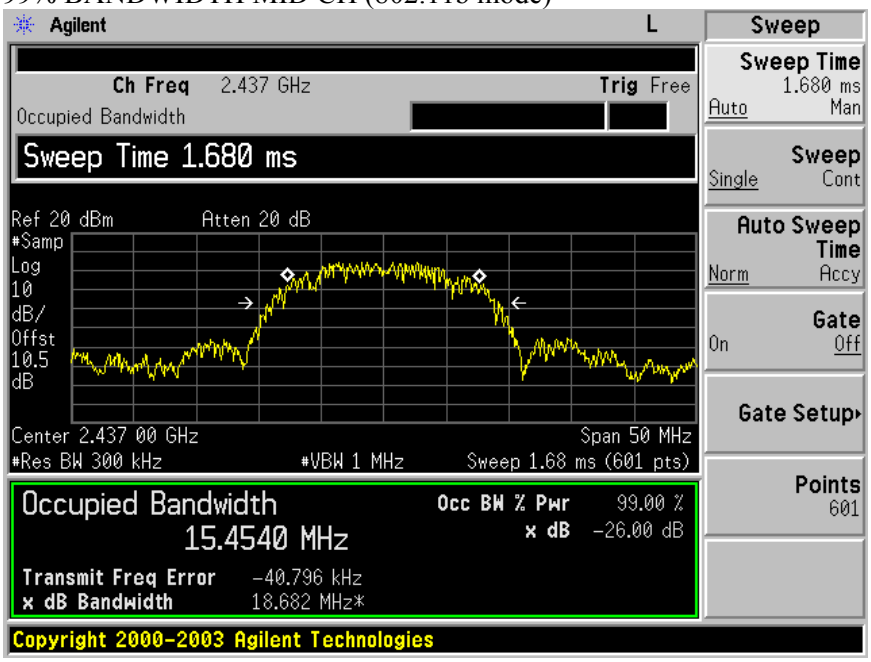

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH HIGH CH (802.11b mode)

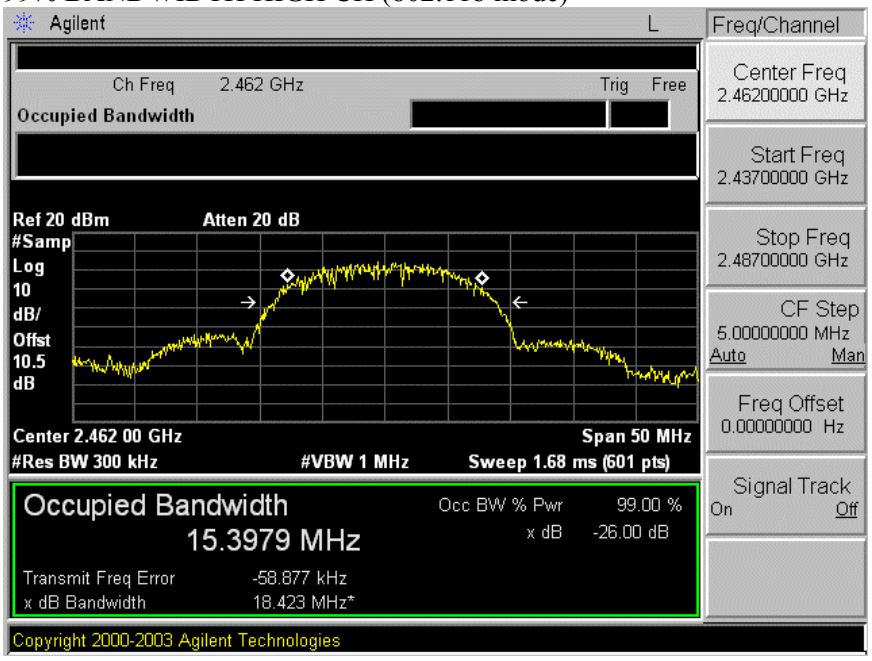

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH (802.11g MODE)

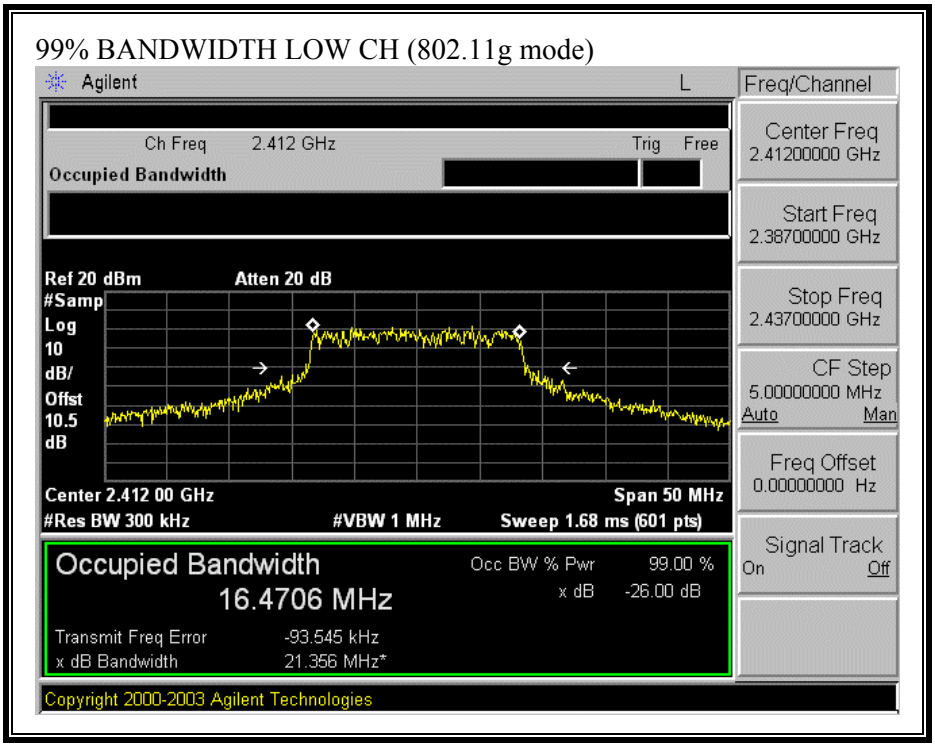

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH MID CH (802.11g mode)

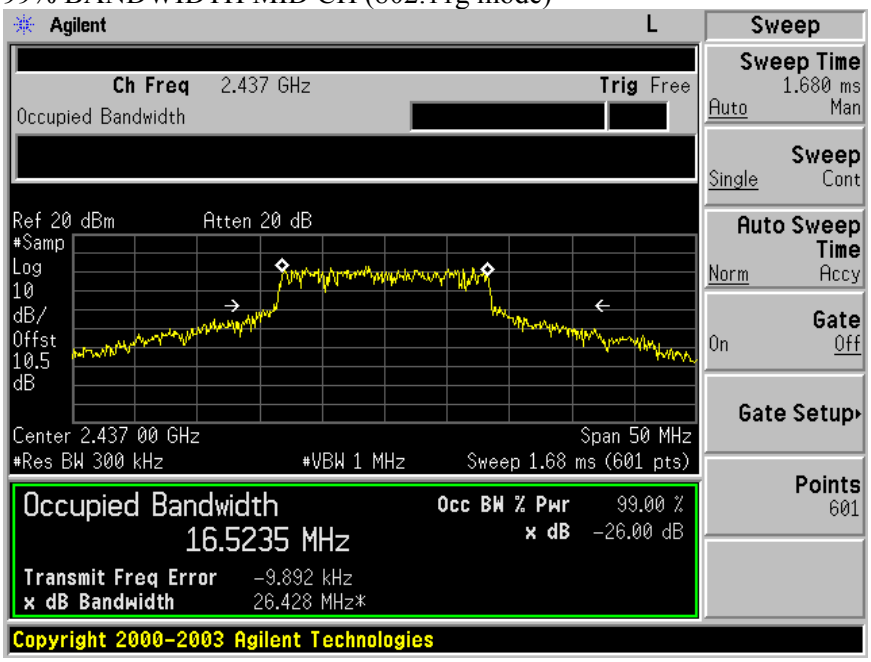

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH HIGH CH (802.11g mode)

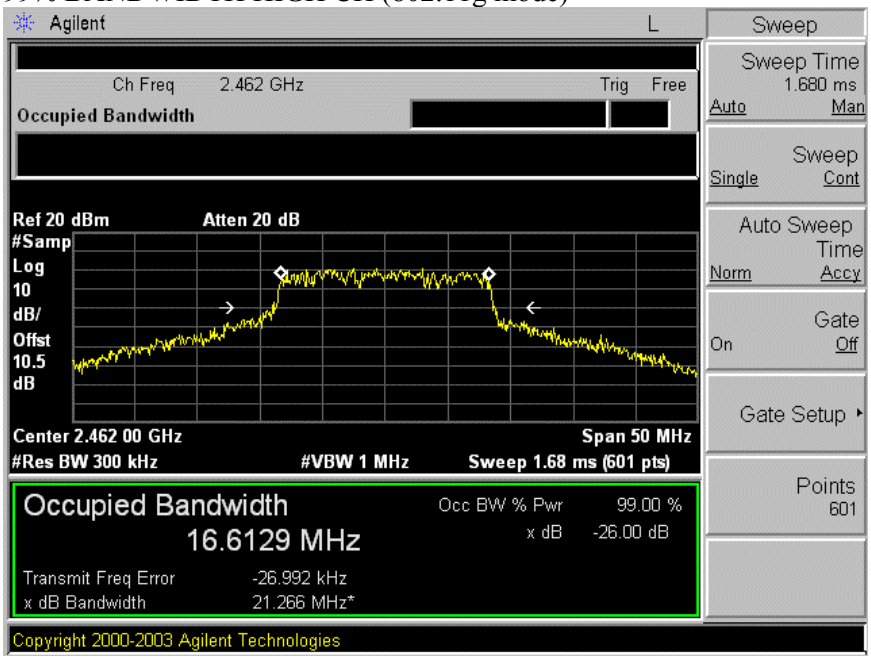

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH (802.11g TURBO MODE)

99% BANDWIDTH MID CH (802.11g Turbo mode)

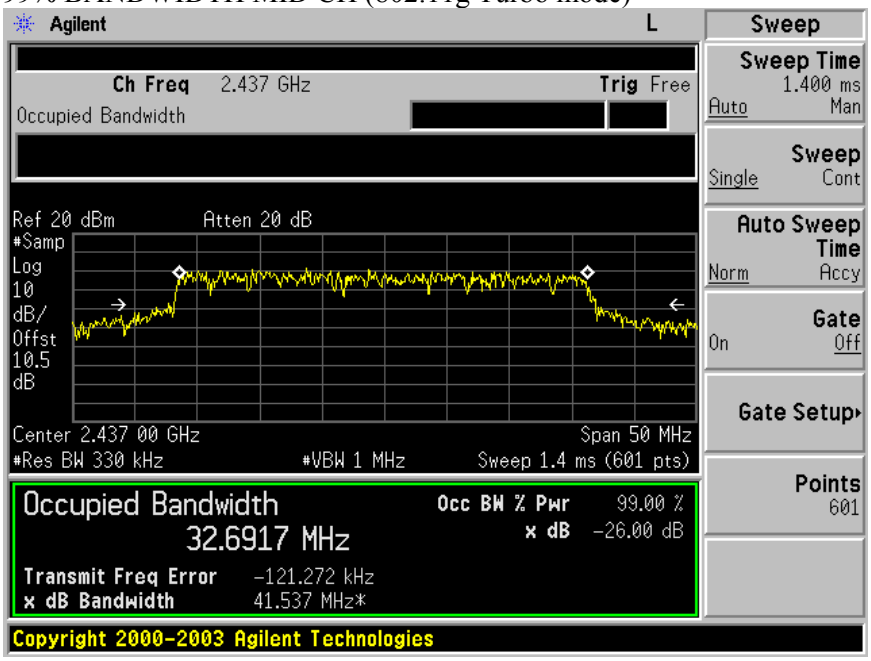

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 1.8 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	21.61	30	-8.39
Middle	2437	21.83	30	-8.17
High	2462	21.39	30	-8.61

802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.70	30	-10.30
Middle	2437	21.89	30	-8.11
High	2462	19.99	30	-10.01

802.11g Turbo Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	21.74	30	-8.26

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

OUTPUT POWER (802.11b MODE)

PEAK POWER LOW CH (802.11b mode)

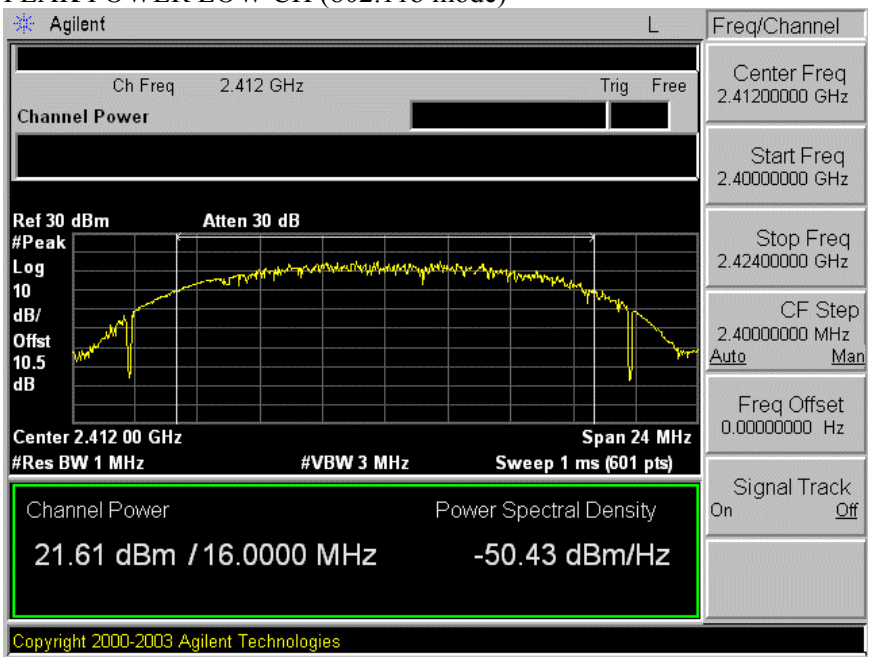

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER MID CH (802.11b mode)

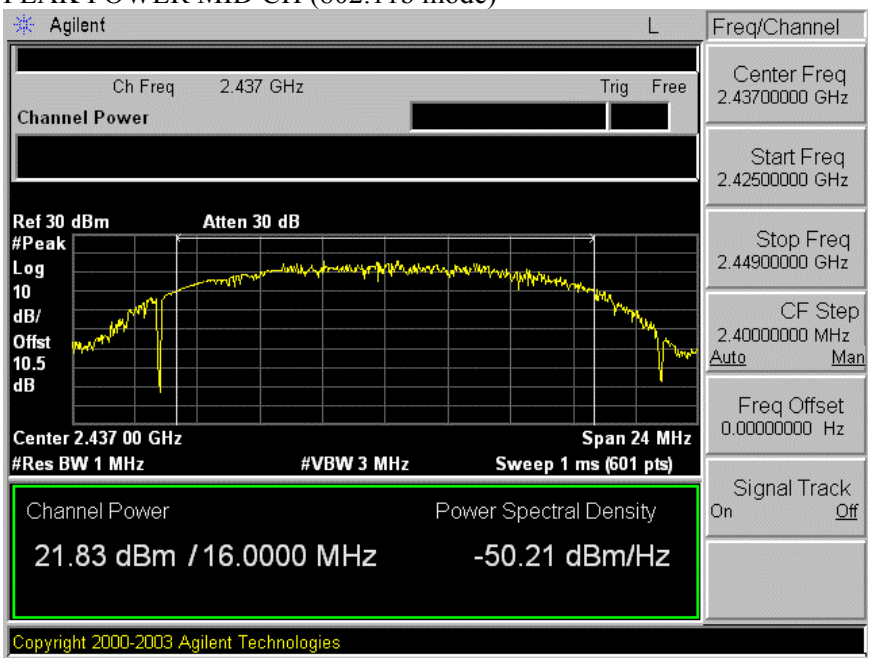

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER HIGH CH (802.11b mode)

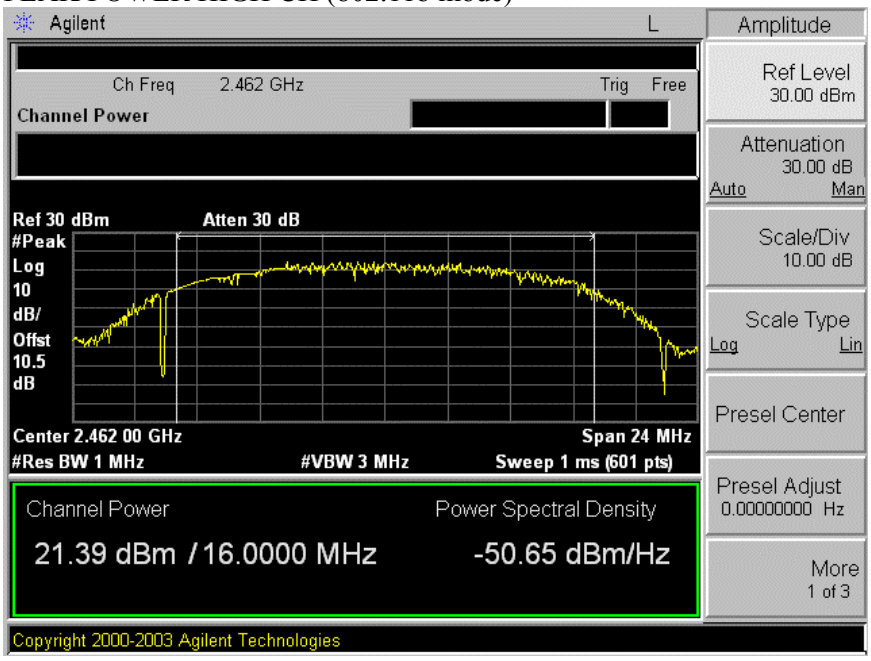

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

OUTPUT POWER (802.11g MODE)

PEAK POWER LOW CH (802.11g mode)

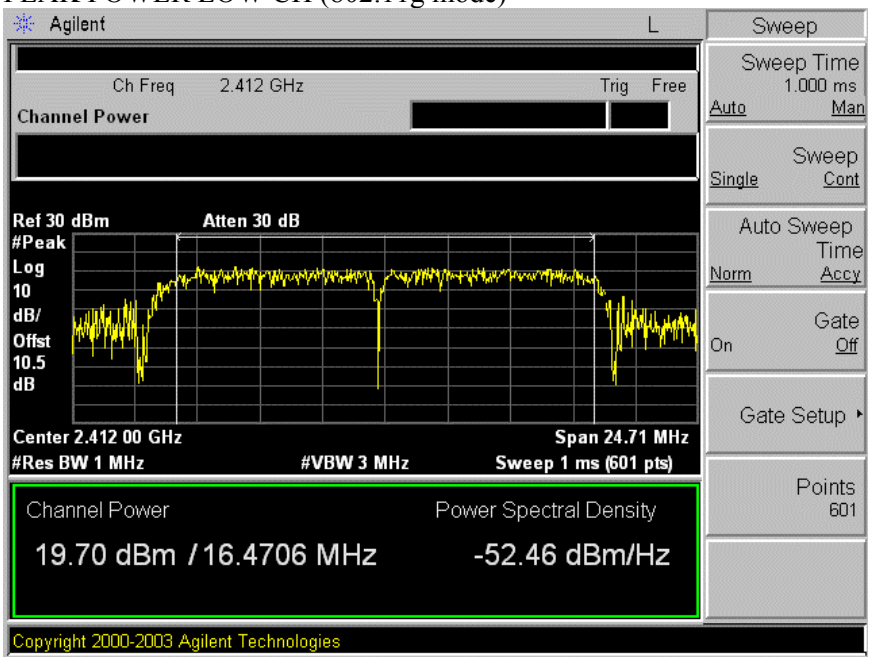

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER MID CH (802.11g mode)

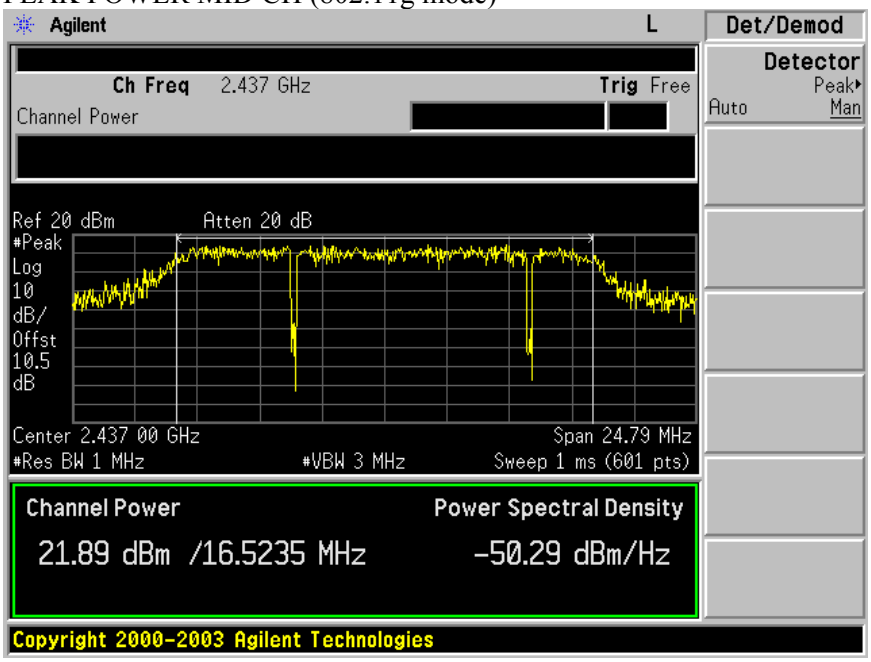

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER HIGH CH (802.11g mode)

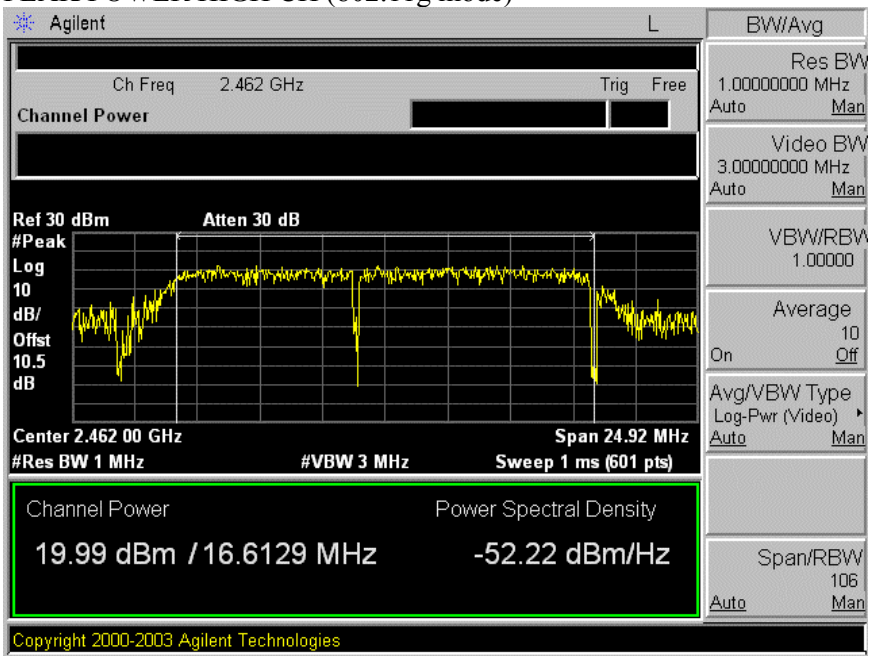

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

OUTPUT POWER (802.11g TURBO MODE)

PEAK POWER (802.11g Turbo mode)

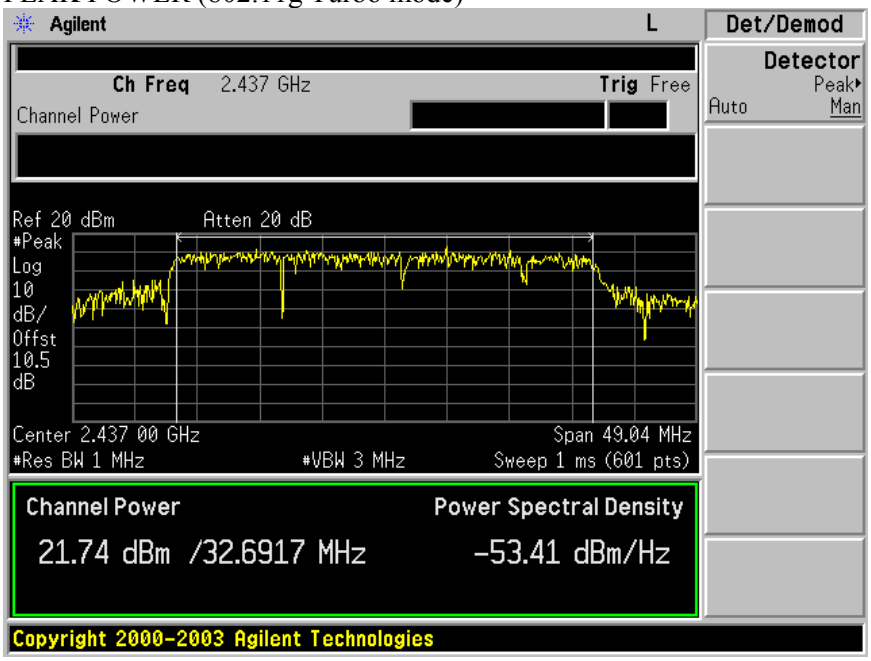

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f²)	6
30–300	61.4	0.163	1.0	6
300–1500	.....	.....	f/300	6
1500–100,000	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	.....	.....	f/1500	30
1500–100,000	.....	.....	1.0	30

f = frequency in MHz
* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

CALCULATIONS

Given

$E = \sqrt{(30 * P * G)} / d$

and

$S = E ^ 2 / 3770$

where

E = Field Strength in Volts/meter
P = Power in Watts
G = Numeric antenna gain
d = Distance in meters
S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$d = \sqrt{((30 * P * G) / (3770 * S))}$

Changing to units of Power to mW and Distance to cm, using:

P (mW) = P (W) / 1000 and
d (cm) =100 * d (m)

yields

$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$
$d = 0.282 * \sqrt{(P * G / S)}$

where

d = distance in cm
P = Power in mW
G = Numeric antenna gain
S = Power Density in mW/cm^2

Substituting the logarithmic form of power and gain using:

P (mW) = 10 ^ (P (dBm) / 10) and
G (numeric) = 10 ^ (G (dBi) / 10)

yields

$d = 0.282 * 10 ^ ((P + G) / 20) / \sqrt{S}$ Equation (1)

where

d = MPE distance in cm
P = Power in dBm
G = Antenna Gain in dBi
S = Power Density Limit in mW/cm^2

Equation (1) and the measured peak power is used to calculate the MPE distance.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LIMITS

From §1.1310 Table 1 (B), S = 1.0 mW/cm^2

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm^2)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	21.83	1.80	4.28
802.11g	1.0	21.89	1.80	4.31
802.11g Turbo	1.0	21.74	1.80	4.24

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	18.60
Middle	2437	19.00
High	2462	18.30

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.00
Middle	2437	18.20
High	2462	17.10

802.11g Turbo Mode

Channel	Frequency (MHz)	Power (dBm)
Middle	2437	18.40

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-1.25	8	-9.25
Middle	2437	-0.58	8	-8.58
High	2462	-0.33	8	-8.33

802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.69	8	-11.69
Middle	2437	-1.69	8	-9.69
High	2462	-2.78	8	-10.78

802.11g Turbo Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	-1.43	8	-9.43

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER SPECTRAL DENSITY (802.11b MODE)

PPSD LOW CH (802.11b mode)

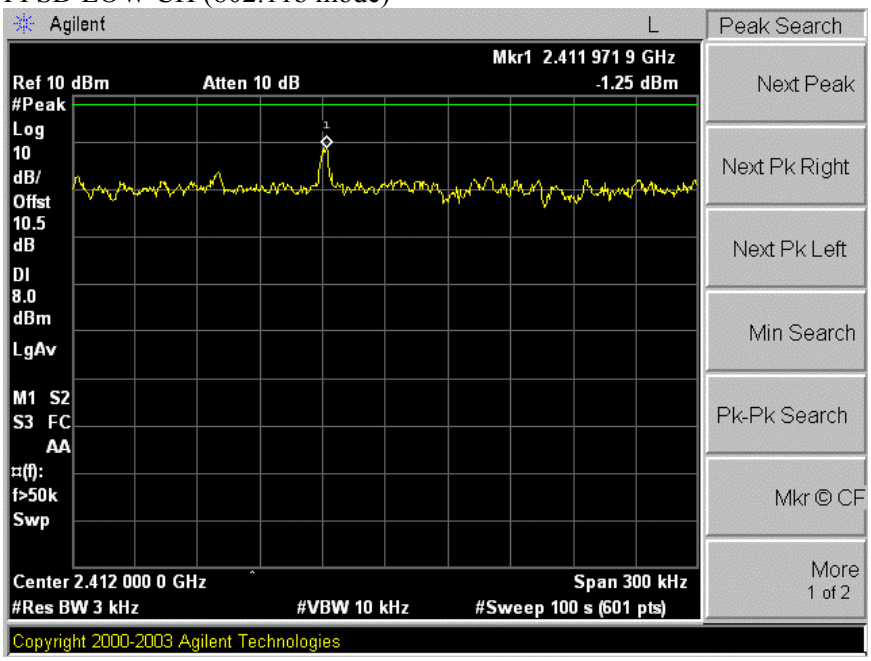

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD MID CH (802.11b mode)

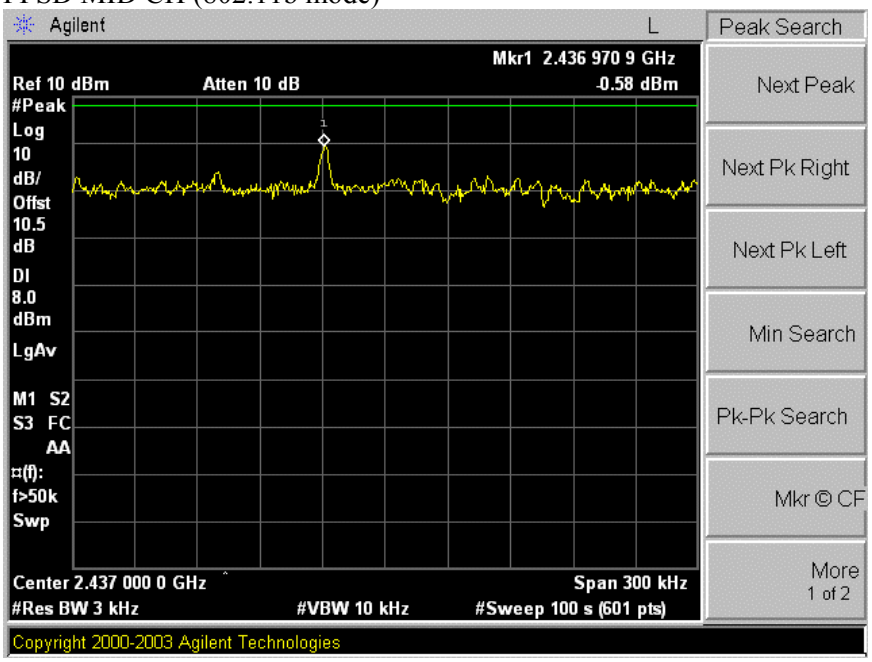

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD HIGH CH (802.11b mode)

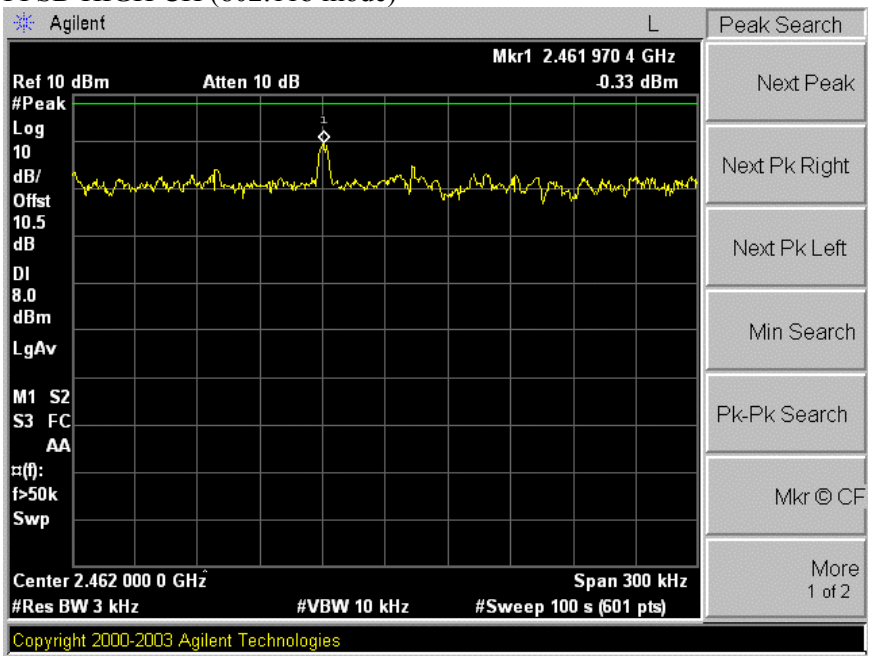

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

PPSD LOW CH (802.11g mode)

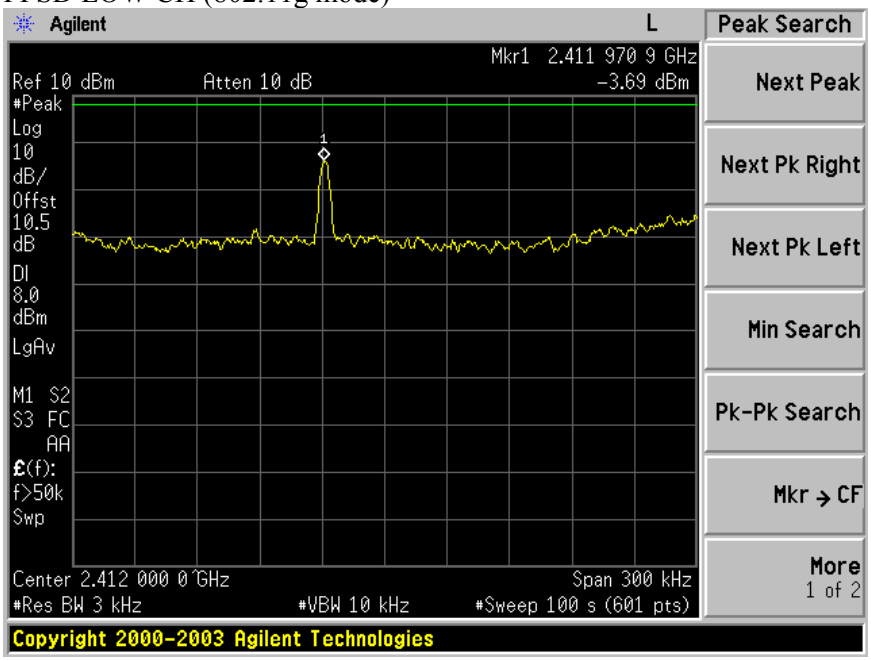

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD MID CH (802.11g mode)

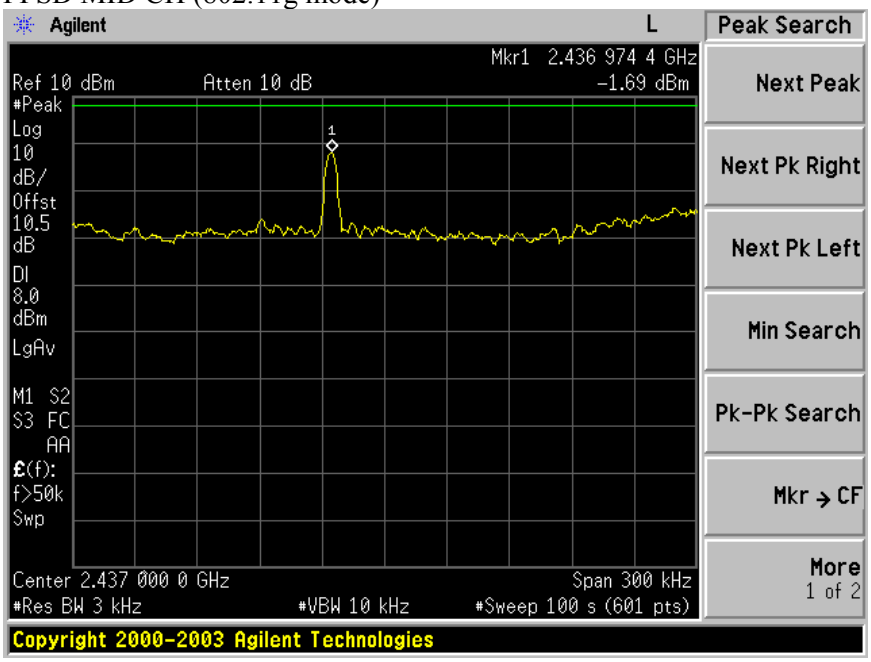

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD HIGH CH (802.11g mode)

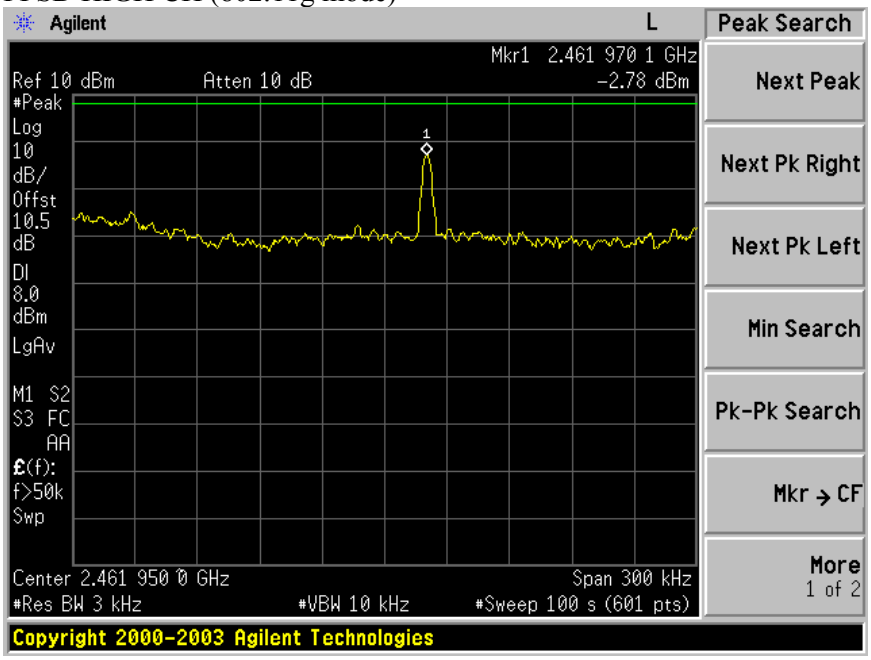

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER SPECTRAL DENSITY (802.11g TURBO MODE)

PPSD MID CH (802.11g Turbo mode)

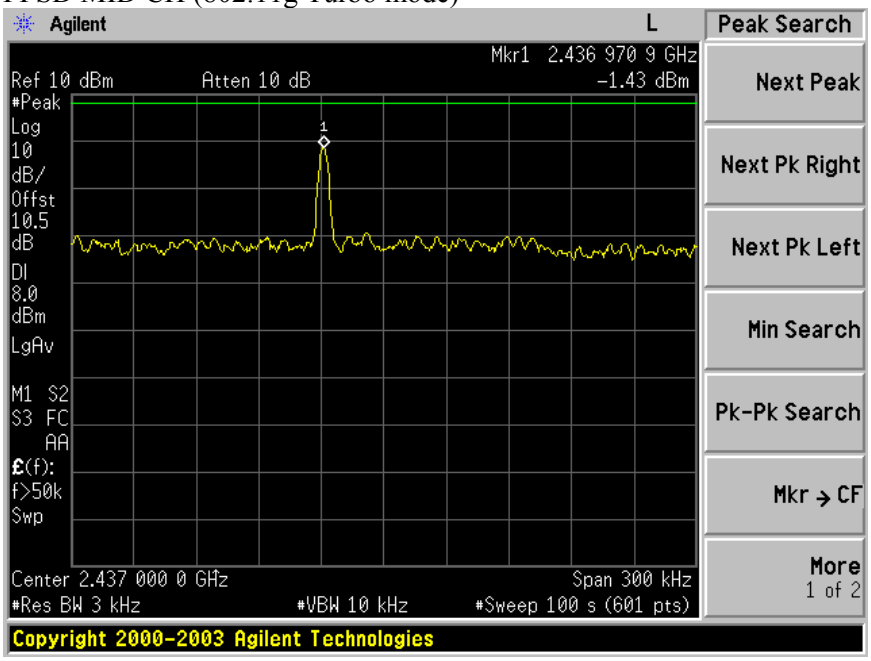

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS

No non-compliance noted:

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

LOW CH BANDEDGE (802.11b mode)

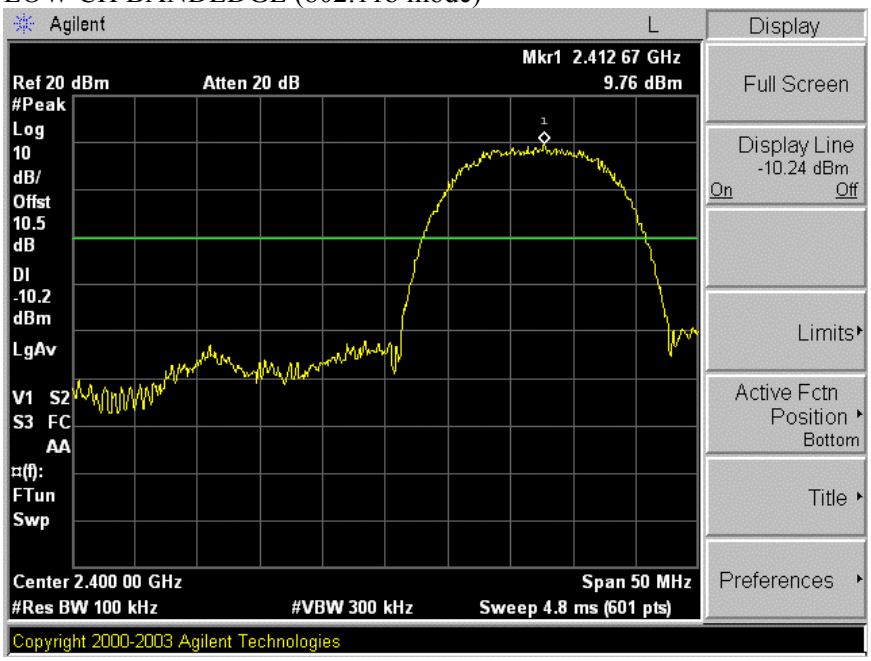

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH SPURIOUS (802.11b mode)

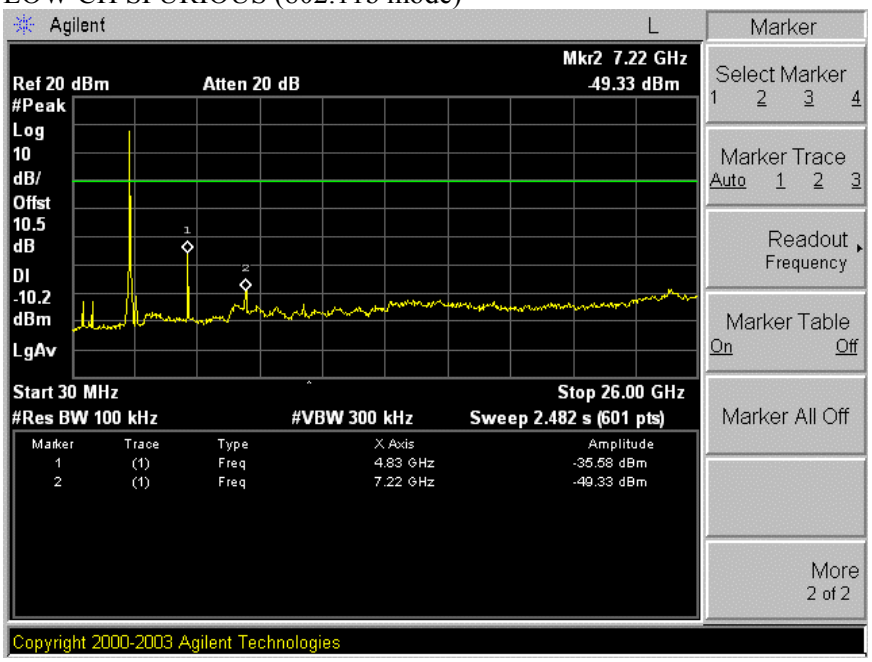

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

MID CH REFERENCE (802.11b mode)

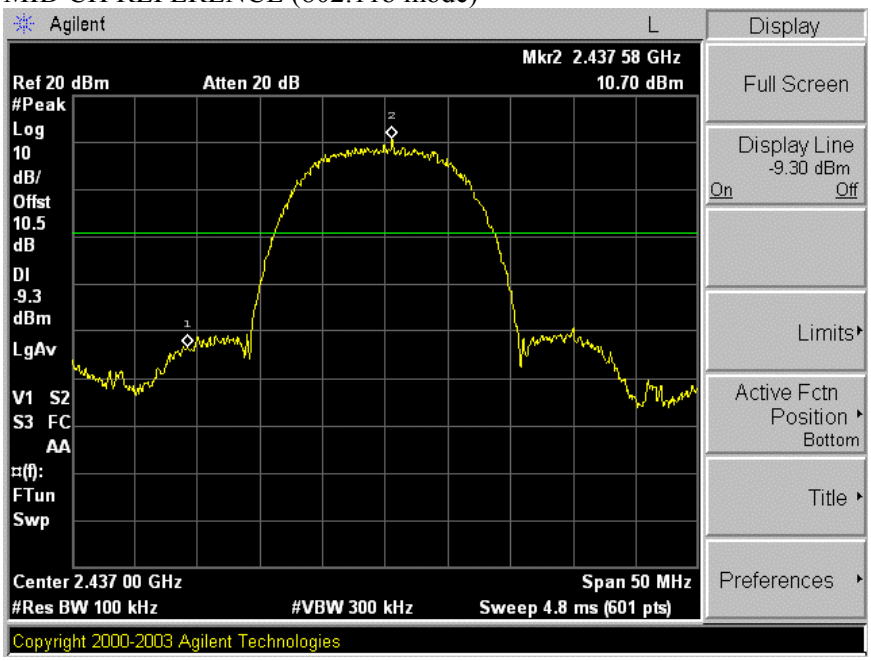

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

MID CH SPURIOUS (802.11b mode)

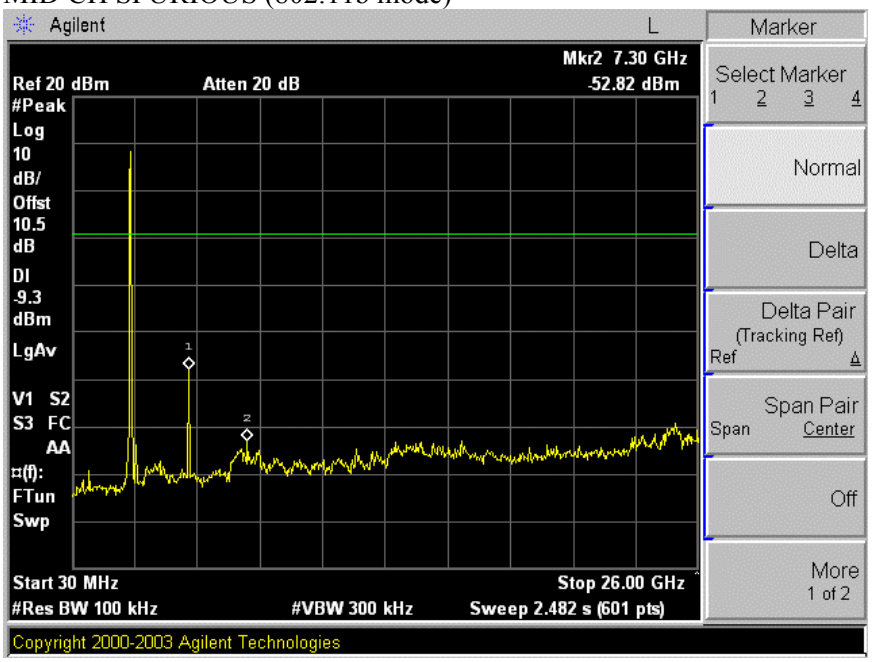

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

HIGH CH BANDEDGE (802.11b mode)

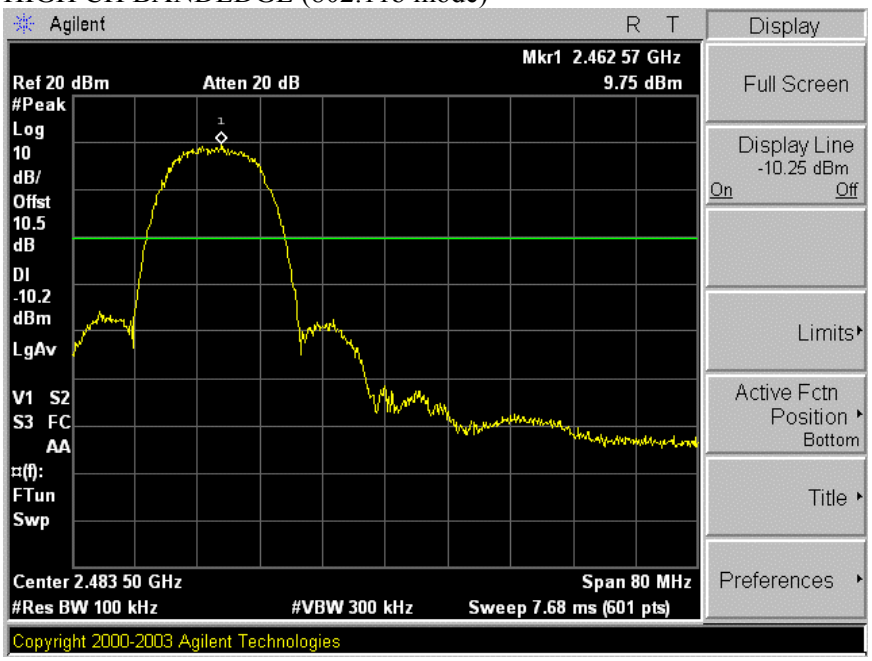

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH SPURIOUS (802.11b mode)

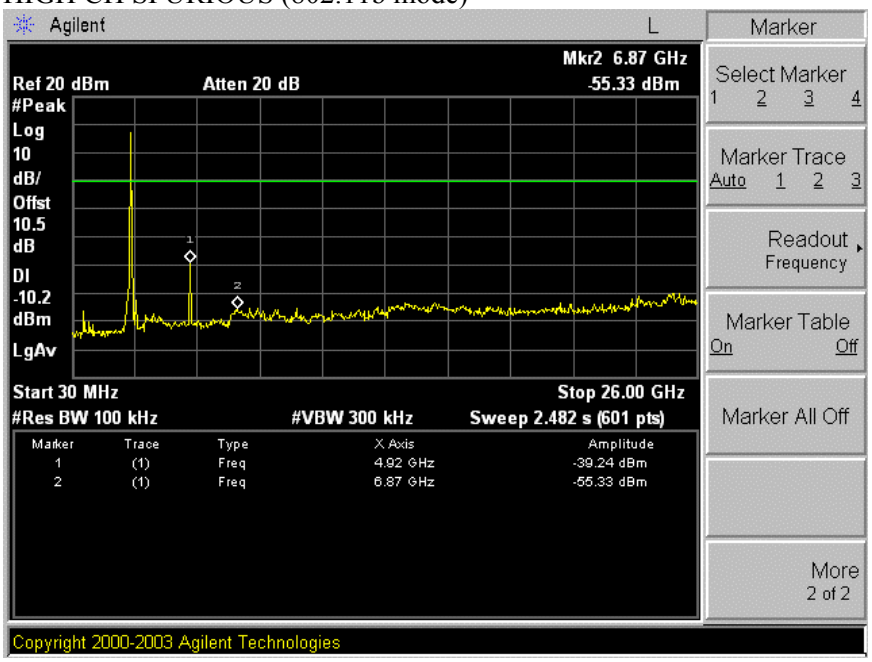

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

LOW CH BANDEDGE (802.11g mode)

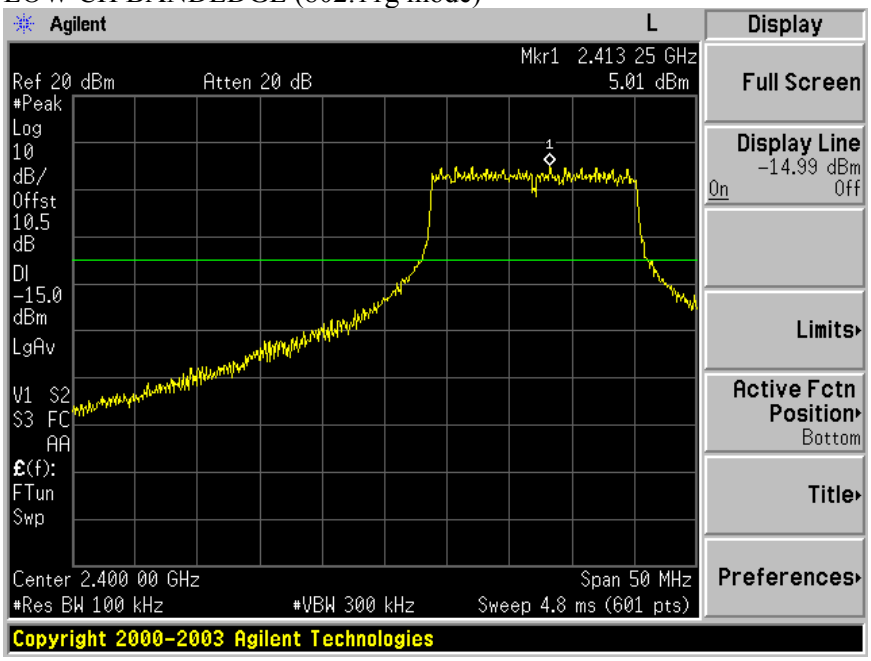

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH SPURIOUS (802.11g mode)

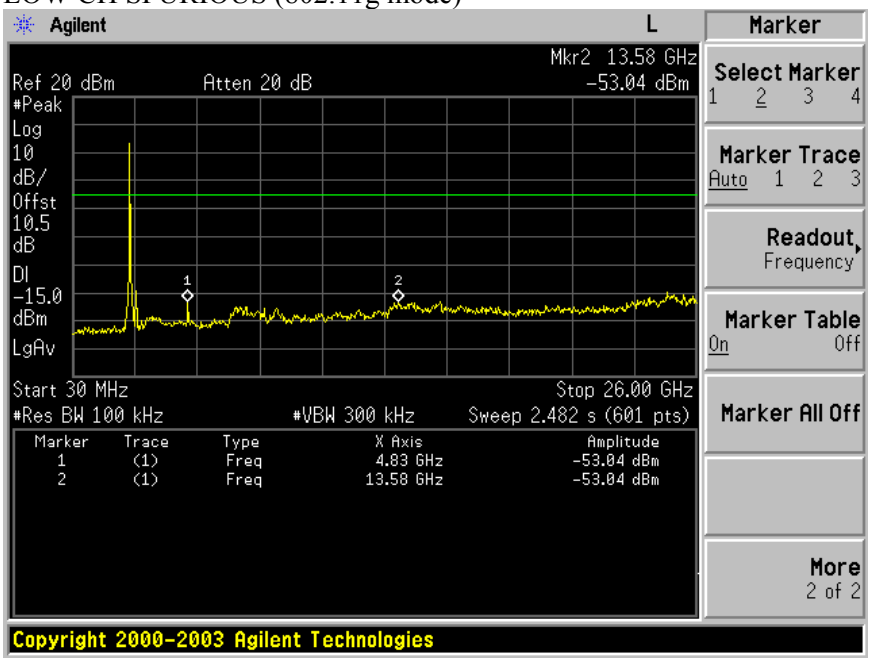

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

MID CH REFERENCE (802.11g mode)

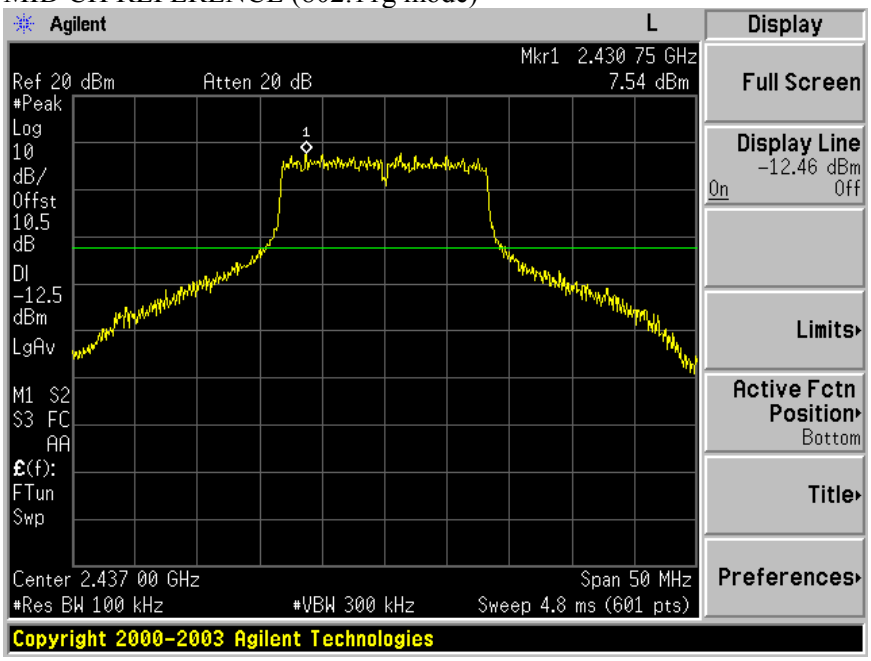

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

MID CH SPURIOUS (802.11g mode)

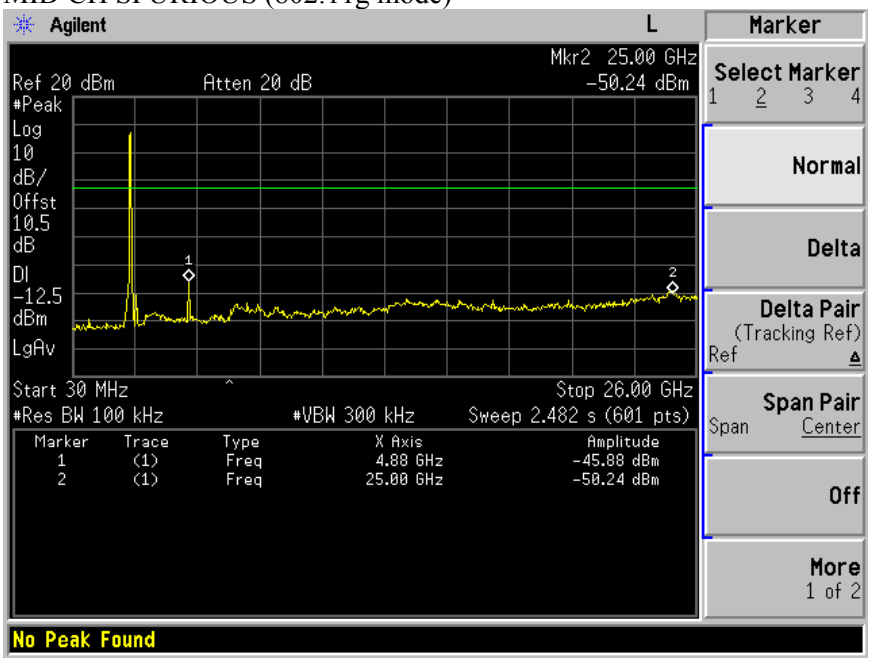

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

HIGH CH BANDEDGE (802.11g mode)

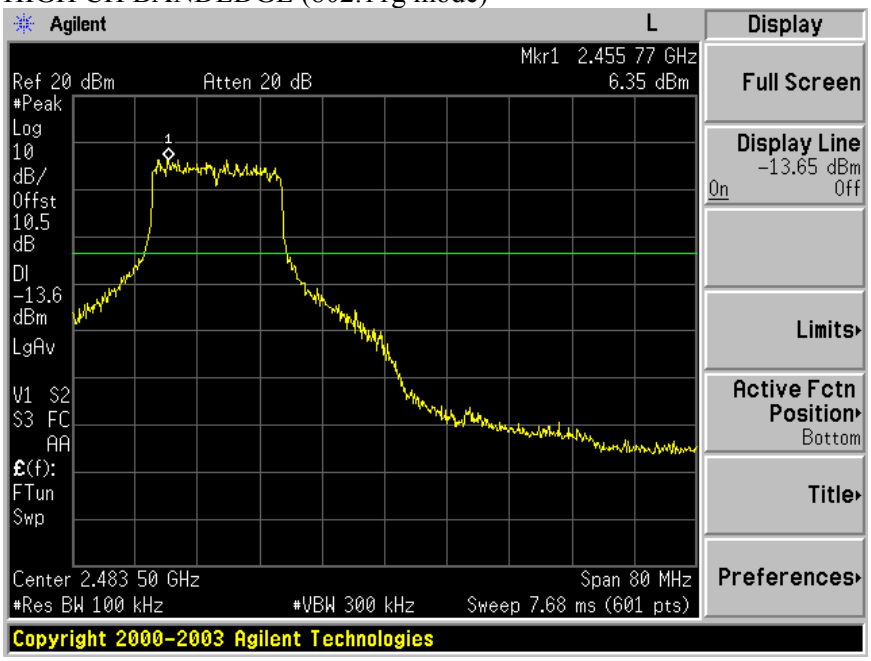

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH SPURIOUS (802.11g mode)

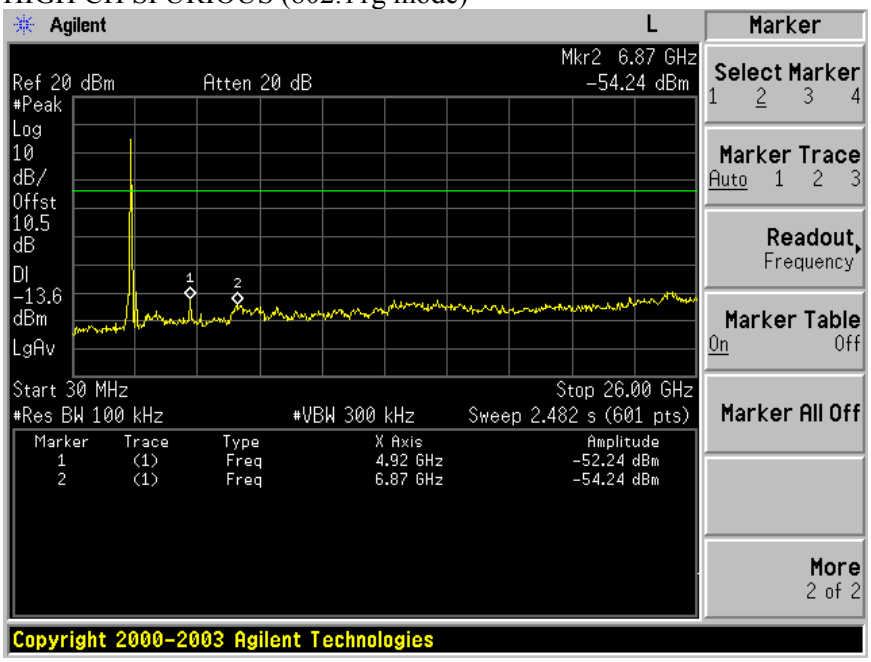

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, MID CHANNEL (802.11g TURBO MODE)

MID CH REFERENCE (802.11g Turbo mode)

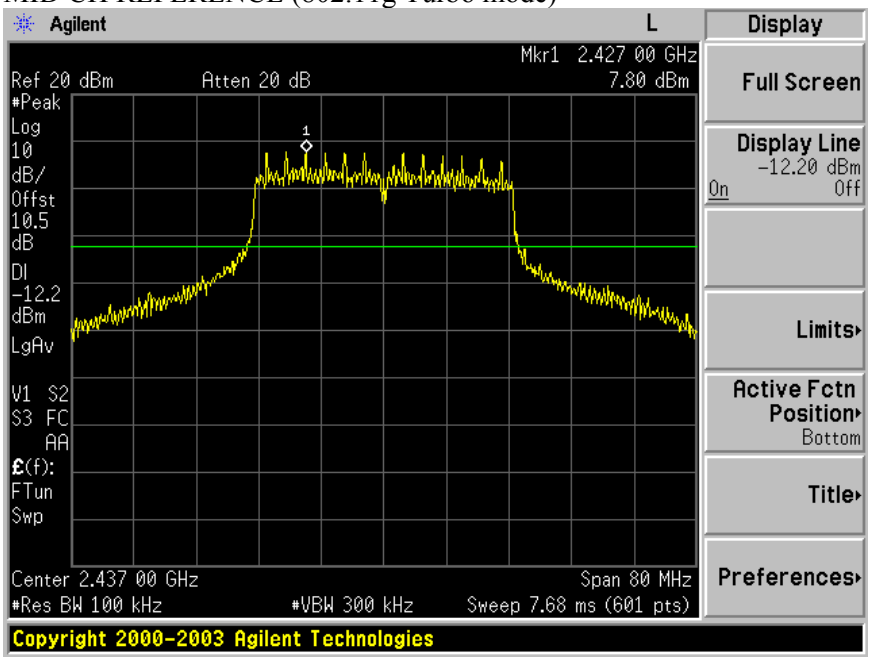

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

MID CH SPURIOUS (802.11g Turbo mode)

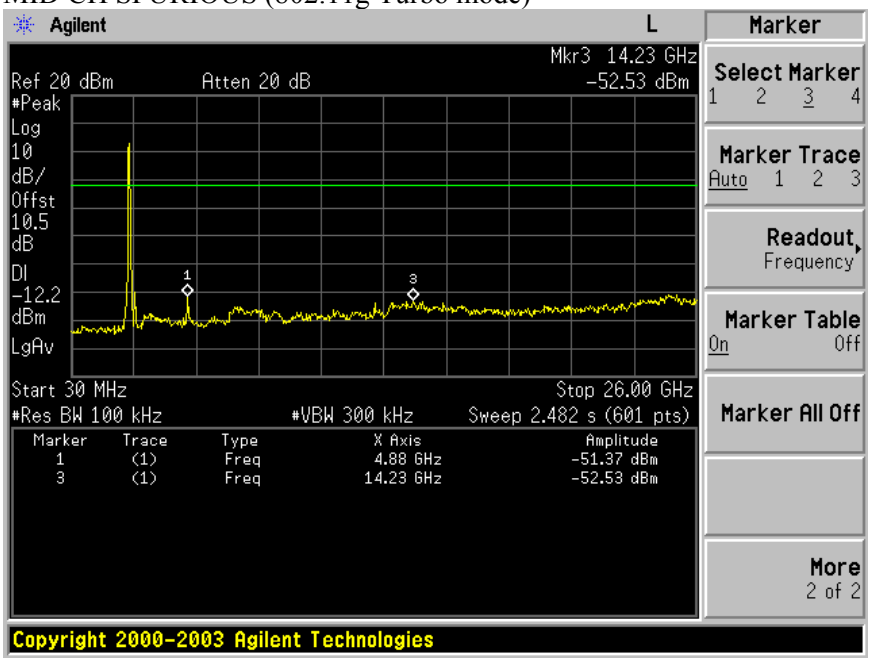

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8. RADIATED EMISSIONS

7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1]0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41			

[1] Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
[2] Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS

No non-compliance noted:

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ, PCB Monopole Antenna

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

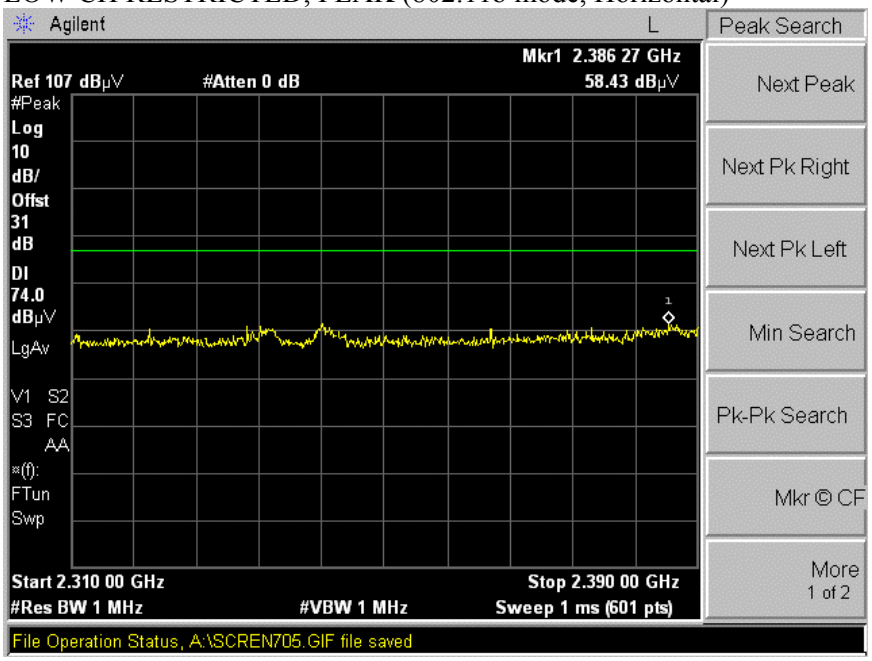

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

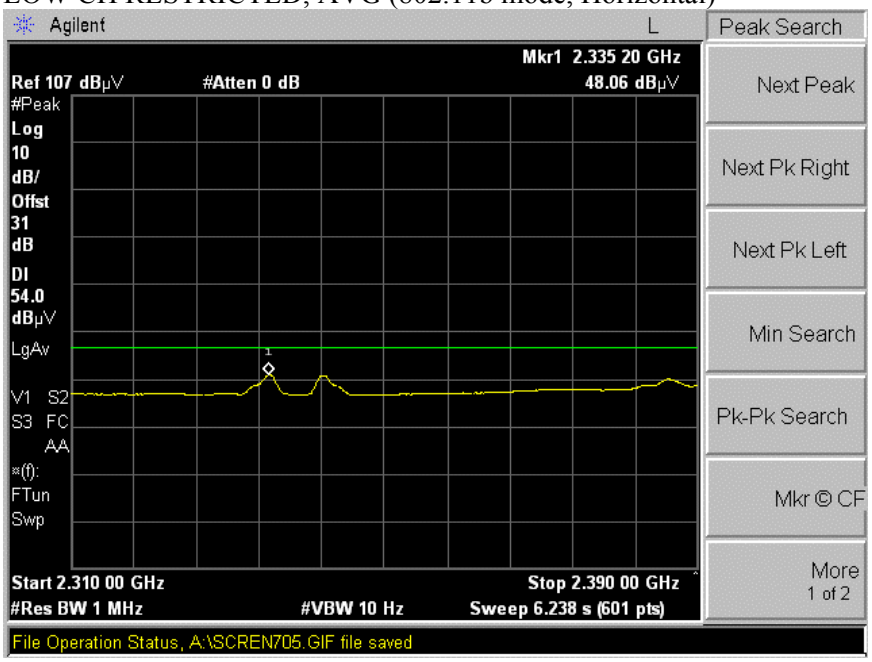

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

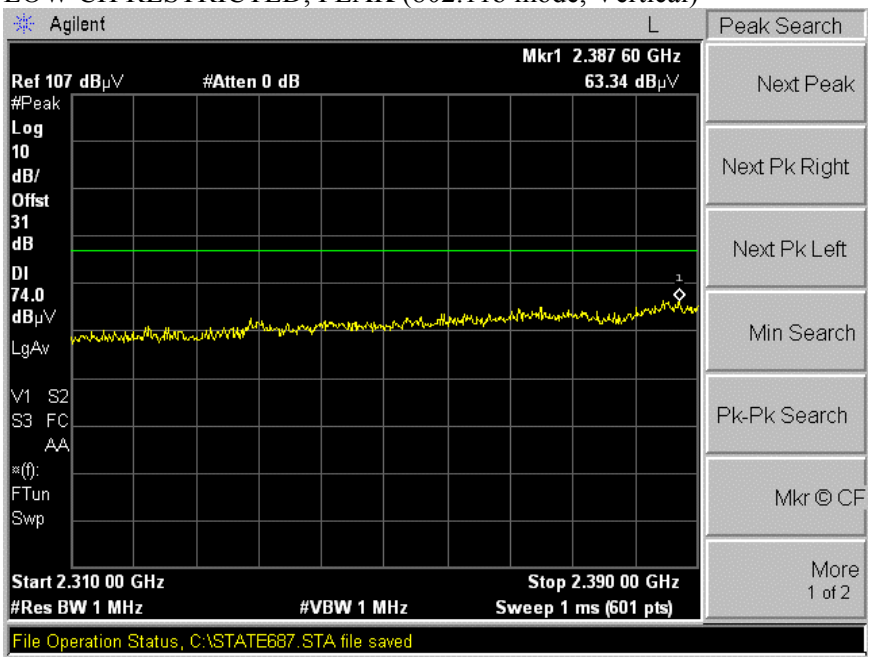

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

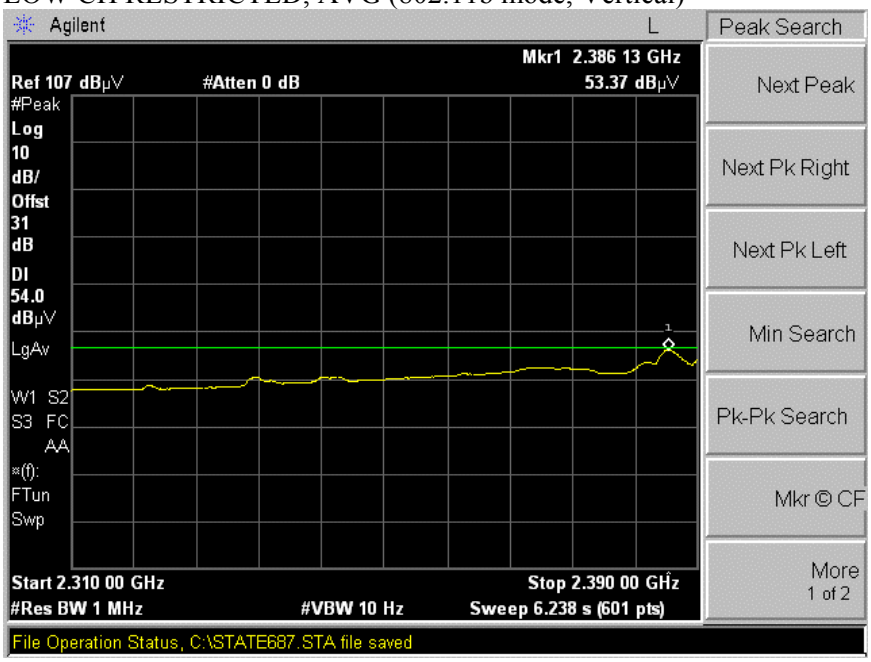

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

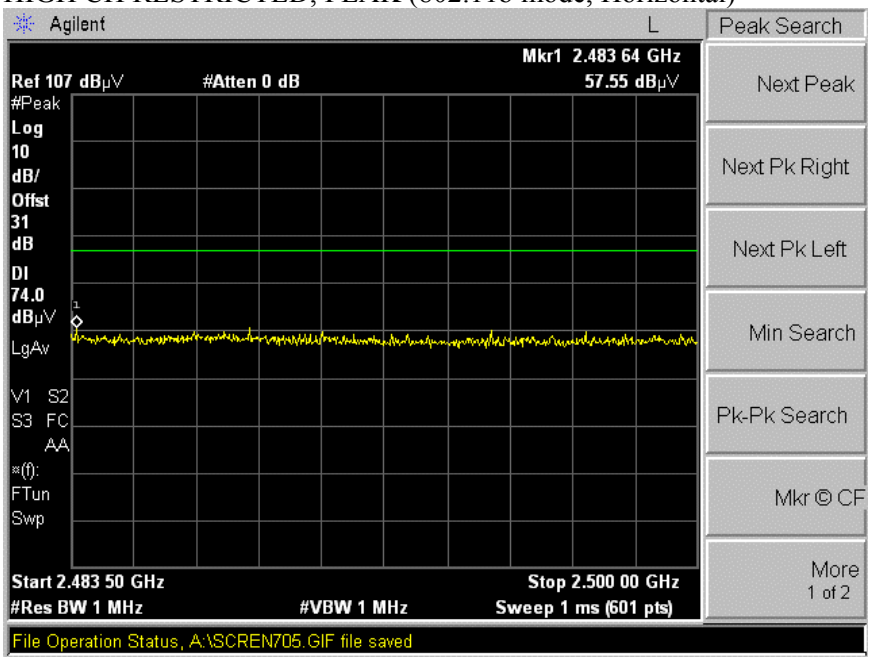

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

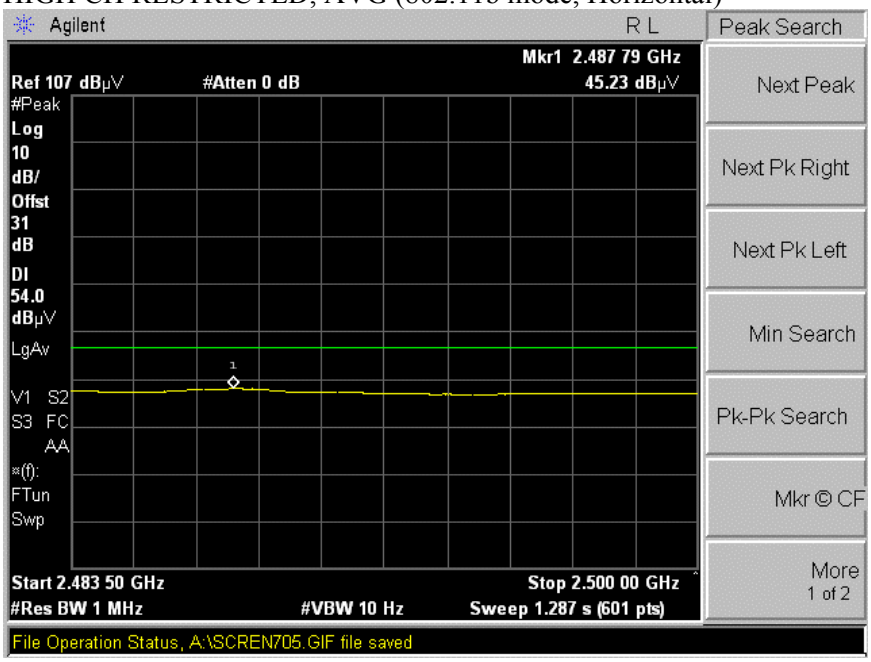

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

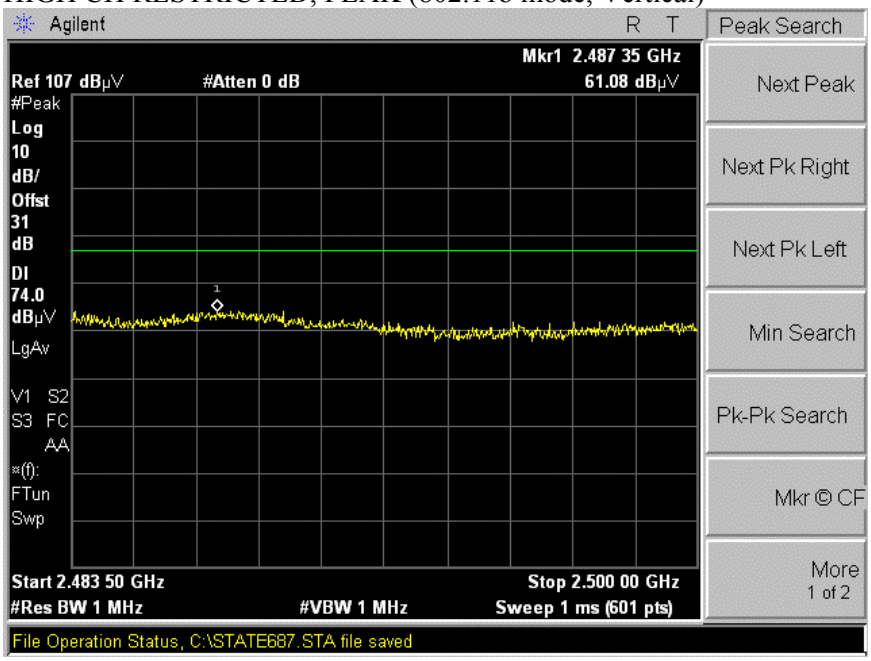

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

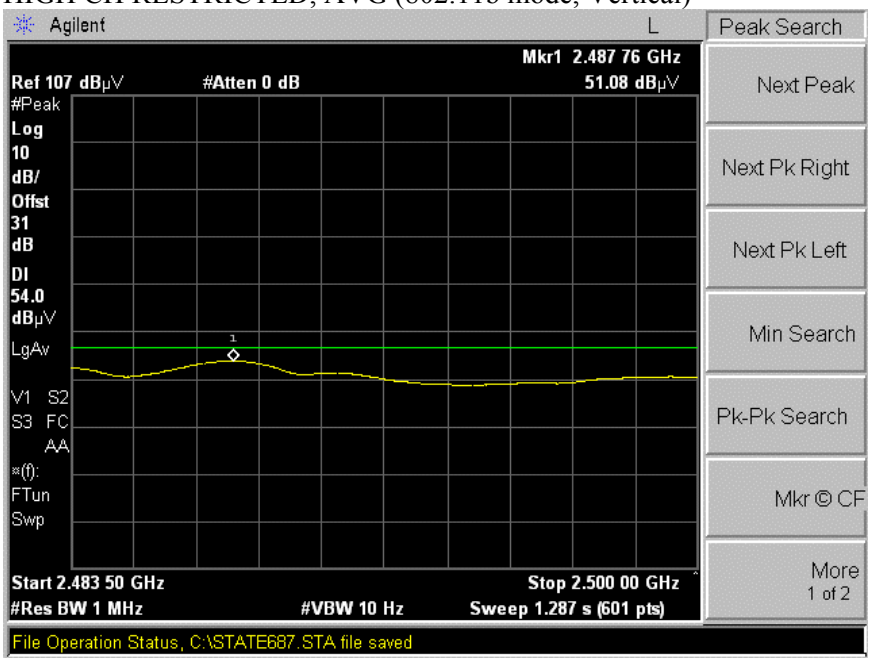

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/28/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U2807-1
Company:Atheros
EUT Descrip.:D-Link 802.11 b/g Access Point.
EUT M/N:CUS53
Test Target:FCC 15.247
Mode Oper:TX, B Mode, A Antenna

Test Equipment:

EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	Agilent E4446A Analyzer	T63 Miteq 646456		

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

B mode, A antenna

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
low ch								1.0							V
4.824	9.8	58.9	51.2	33.4	2.9	-35.3	0.0	1.0	60.8	53.1	74.0	54.0	-13.2	-0.9	V
4.824	9.8	54.0	48.7	33.4	2.9	-35.3	0.0	1.0	55.9	50.6	74.0	54.0	-18.1	-3.4	H
mid ch															
4.874	9.8	58.3	50.7	33.4	2.9	-35.3	0.0	1.0	60.3	52.7	74.0	54.0	-13.7	-1.3	V
7.311	9.8	51.3	44.0	35.8	3.7	-34.6	0.0	1.0	57.2	49.9	74.0	54.0	-16.8	-4.1	V
4.874	9.8	52.9	48.5	33.4	2.9	-35.3	0.0	1.0	54.9	50.5	74.0	54.0	-19.1	-3.5	H
7.311	9.8	50.4	43.1	35.8	3.7	-34.6	0.0	1.0	56.3	49.0	74.0	54.0	-17.7	-5.0	H
high ch															
4.924	9.8	58.3	49.3	33.5	3.0	-35.3	0.0	1.0	60.4	51.4	74.0	54.0	-13.6	-2.6	V
7.386	9.8	53.1	42.1	36.0	3.7	-34.5	0.0	1.0	59.2	48.2	74.0	54.0	-14.8	-5.8	V
4.924	9.8	53.4	48.1	33.5	3.0	-35.3	0.0	1.0	55.5	50.2	74.0	54.0	-18.5	-3.8	H
7.386	9.8	45.3	36.0	36.0	3.7	-34.5	0.0	1.0	51.4	42.1	74.0	54.0	-22.6	-11.9	H
Note: No other emissions were detected above the system noise floor.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

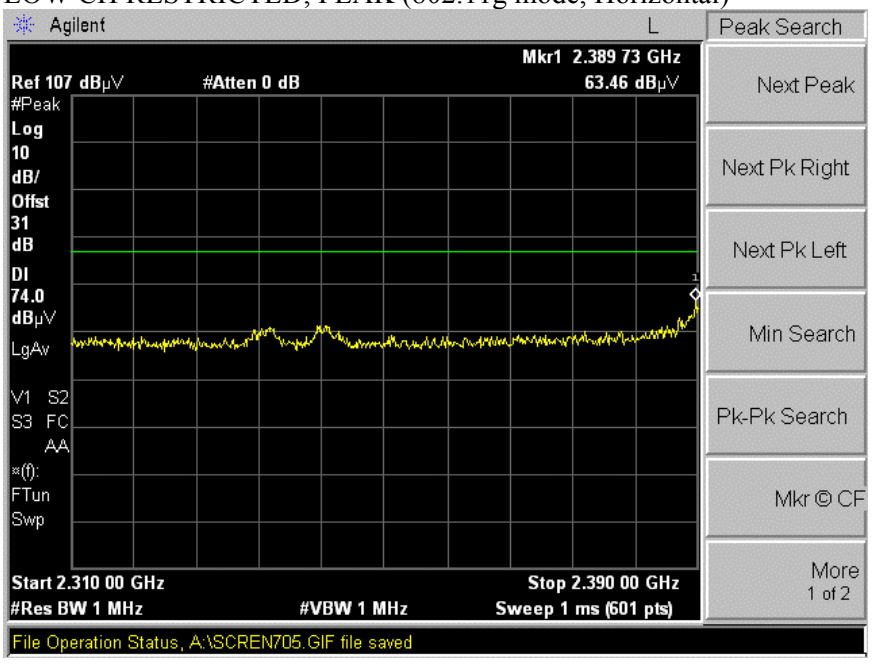

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

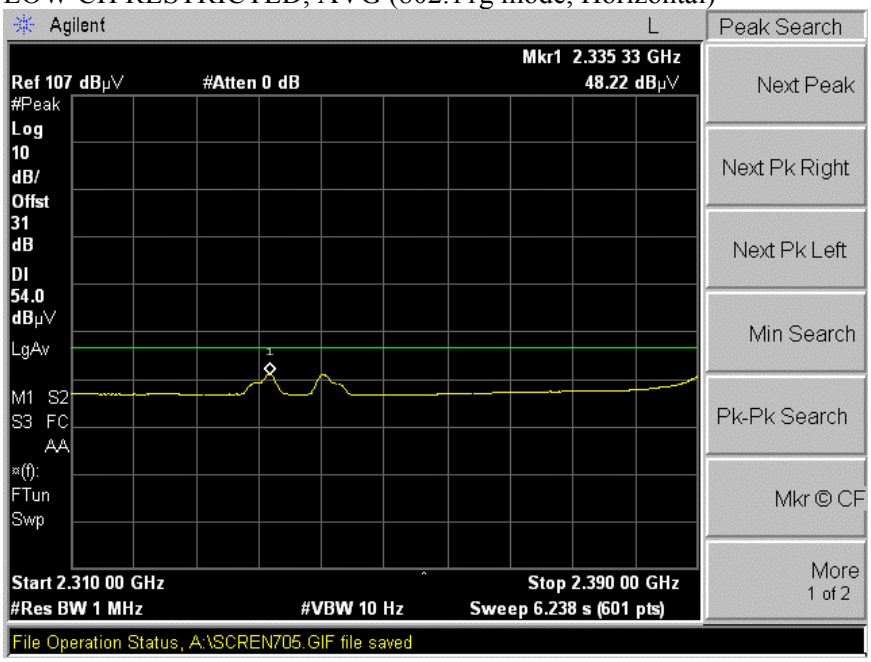

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

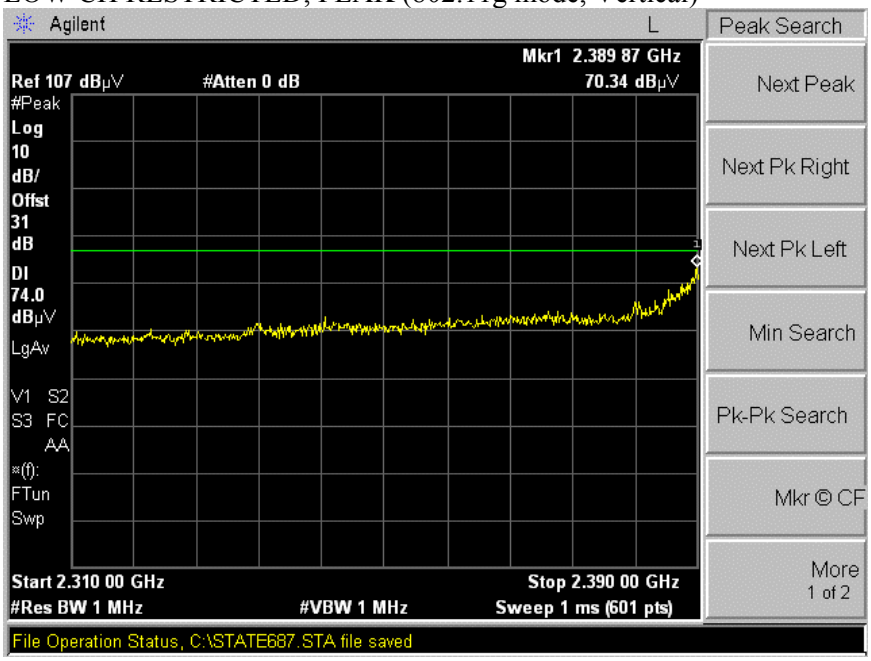

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

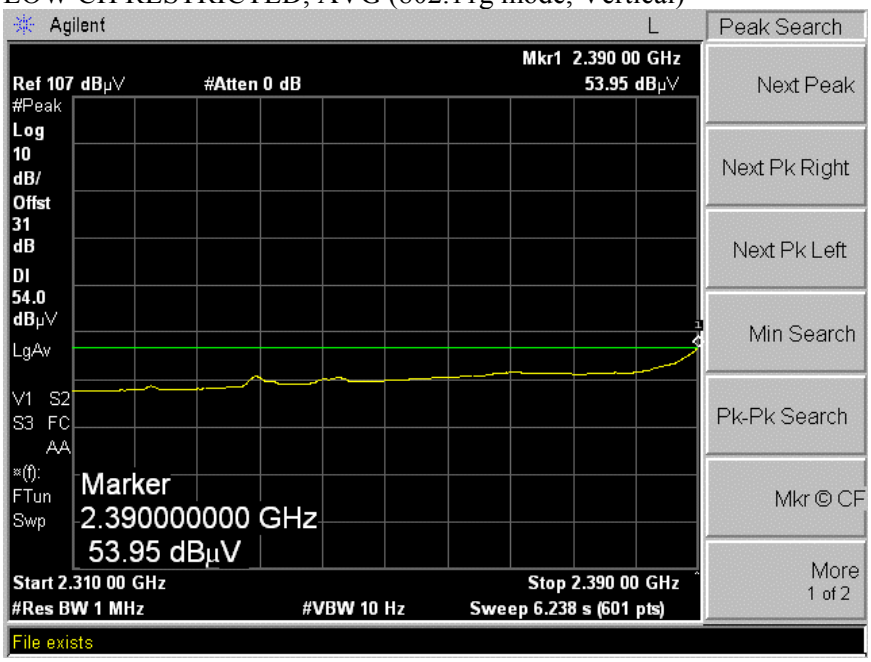

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

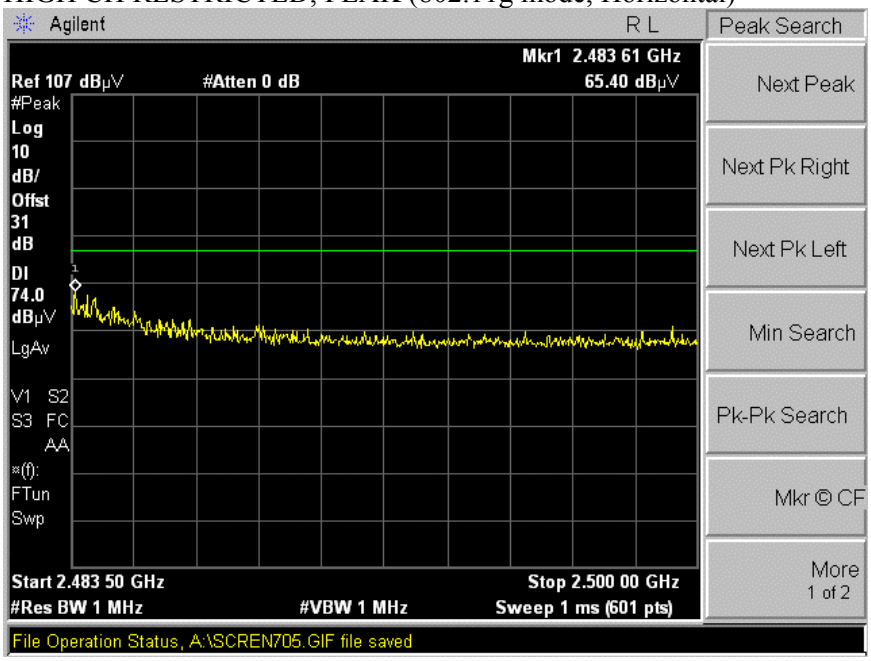

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

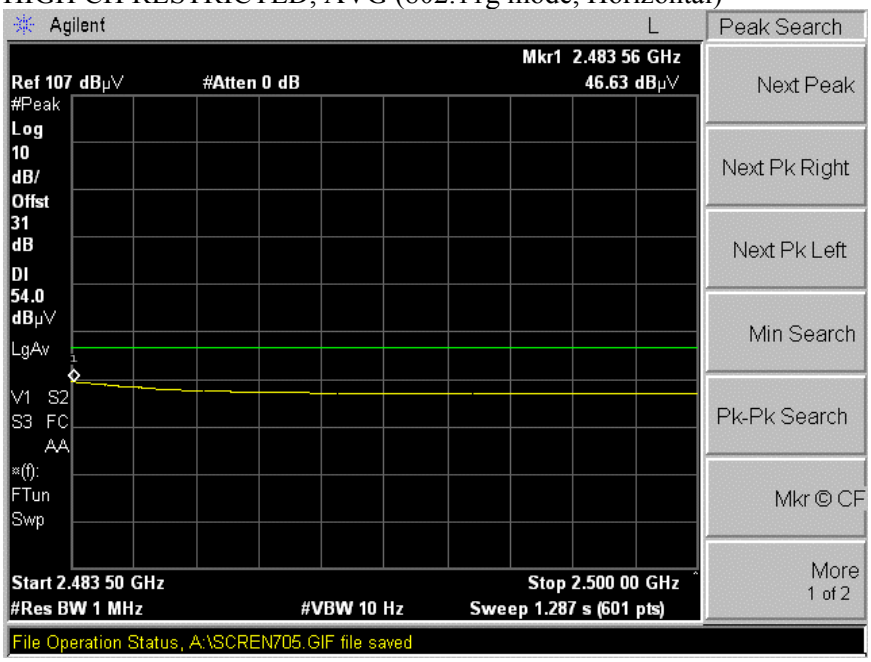

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

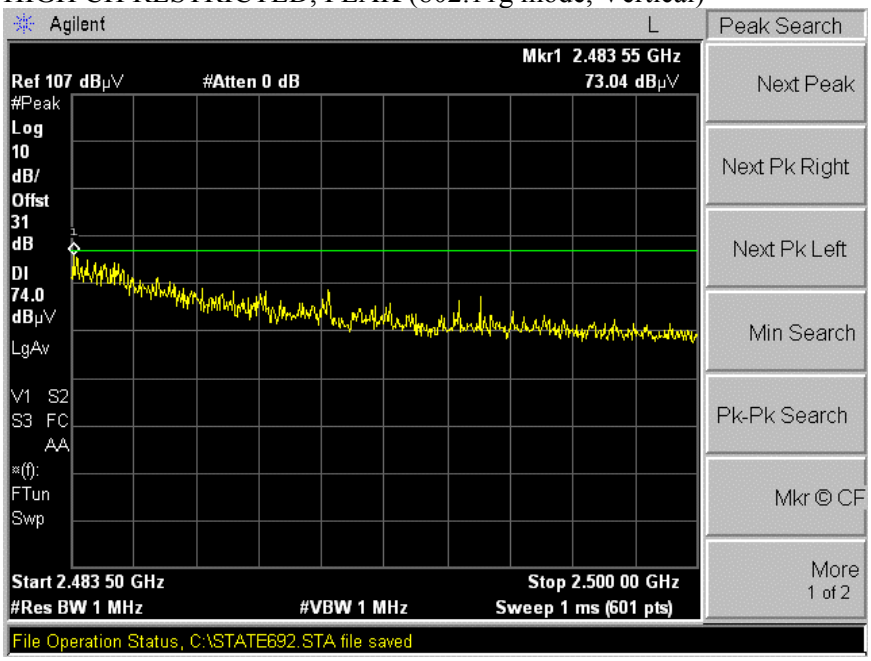

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

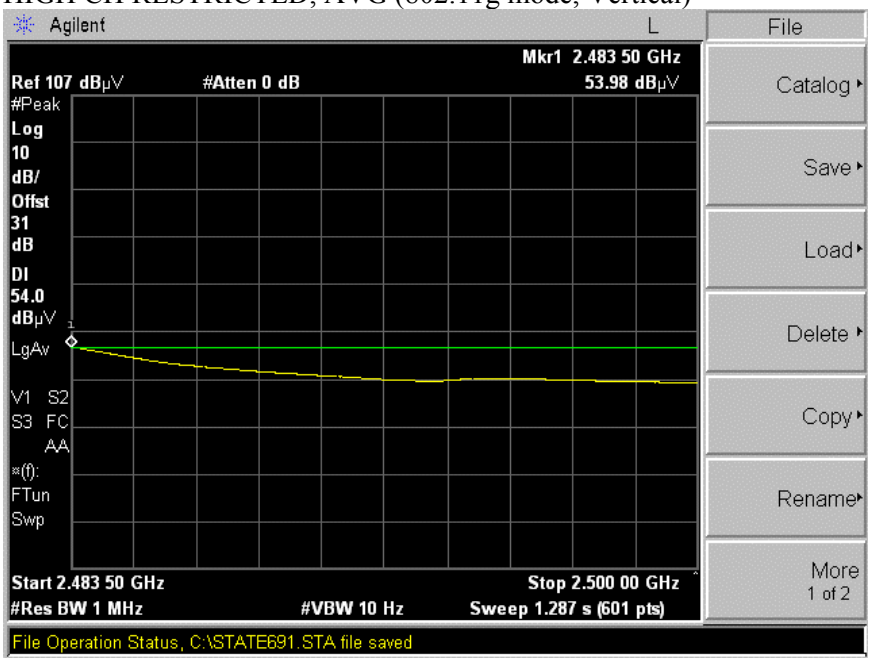

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

6/282004 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U2807-1
Company:Athros
EUT Descrip.:D-Link 802.11 b/g Access Point.
EUT M/N:CUS53
Test Target:FCC 15.247
Mode Oper:TX, G Mode, A Antenna

Test Equipment:

EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	Agilent E4446A Analyzer	T63 Miteq 646456		

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

A Antenna, G mode

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
low ch								1.0							V
4.824	9.8	53.6	38.0	33.4	2.9	-35.3	0.0	1.0	55.6	39.9	74.0	54.0	-18.4	-14.1	V
4.824	9.8	52.0	39.2	33.4	2.9	-35.3	0.0	1.0	53.9	41.1	74.0	54.0	-20.1	-12.9	H
mid ch															
4.874	9.8	51.5	38.6	33.4	2.9	-35.3	0.0	1.0	53.5	40.6	74.0	54.0	-20.5	-13.4	V
7.311	9.8	65.4	47.8	35.8	3.7	-34.6	0.0	1.0	71.3	53.7	74.0	54.0	-2.7	-0.3	V
4.874	9.8	54.0	41.3	33.4	2.9	-35.3	0.0	1.0	56.0	43.3	74.0	54.0	-18.0	-10.7	H
7.311	9.8	54.3	38.5	35.8	3.7	-34.6	0.0	1.0	60.2	44.4	74.0	54.0	-13.8	-9.6	H
high ch															
4.924	9.8	54.5	40.8	33.5	3.0	-35.3	0.0	1.0	56.6	42.9	74.0	54.0	-17.4	-11.1	V
7.386	9.8	59.5	43.0	36.0	3.7	-34.5	0.0	1.0	65.6	49.1	74.0	54.0	-8.4	-4.9	V
4.924	9.8	53.1	40.5	33.5	3.0	-35.3	0.0	1.0	55.2	42.6	74.0	54.0	-18.8	-11.4	H
7.386	9.8	55.7	38.2	36.0	3.7	-34.5	0.0	1.0	61.8	44.3	74.0	54.0	-12.2	-9.7	H
Note: No other emissions were detected above the system noise floor.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)

6/282004 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U2807-1
Company:Athros
EUT Descrip.:D-Link 802.11 b/g Access Point.
EUT M/N:CUS53
Test Target:FCC 15.247
Mode Oper:TX, G Mode, TURBO, A Antenna

Test Equipment:

EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	Agilent E4446A Analyzer	T63 Miteq 646456		

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

A Antenna, G mode Turbo

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Turbo, mid ch															
4.874	9.8	51.0	38.2	33.4	2.9	-35.3	0.0	1.0	53.0	40.2	74.0	54.0	-21.0	-13.8	V
7.311	9.8	57.4	44.6	35.8	3.7	-34.6	0.0	1.0	63.3	50.5	74.0	54.0	-10.7	-3.5	V
4.874	9.8	50.1	37.5	33.4	2.9	-35.3	0.0	1.0	52.1	39.5	74.0	54.0	-21.9	-14.5	H
7.311	9.8	49.0	36.0	35.8	3.7	-34.6	0.0	1.0	54.9	41.9	74.0	54.0	-19.1	-12.1	H

Note: No other emissions were detected above the system noise floor.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.3. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ, Dipole Antenna

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

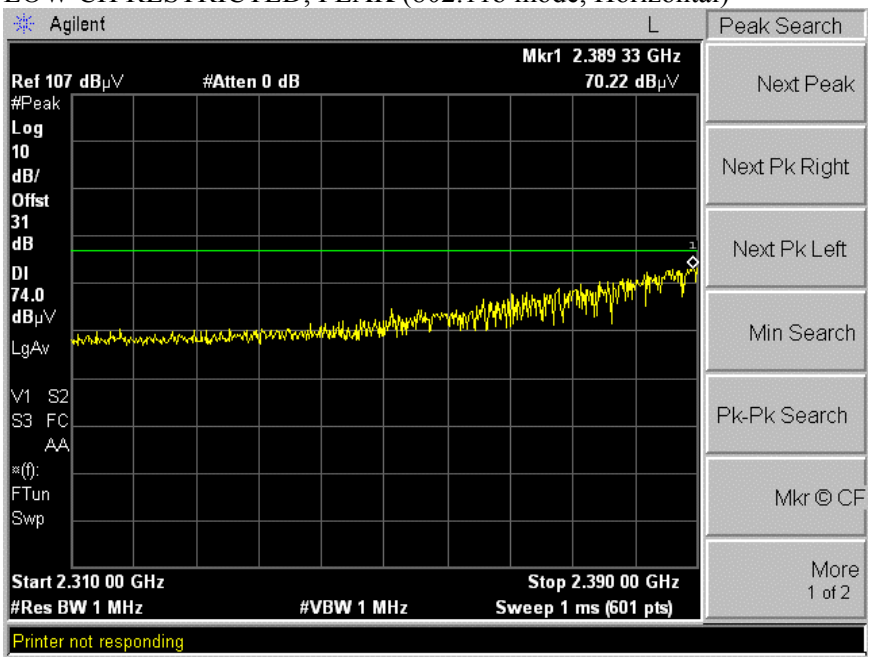

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

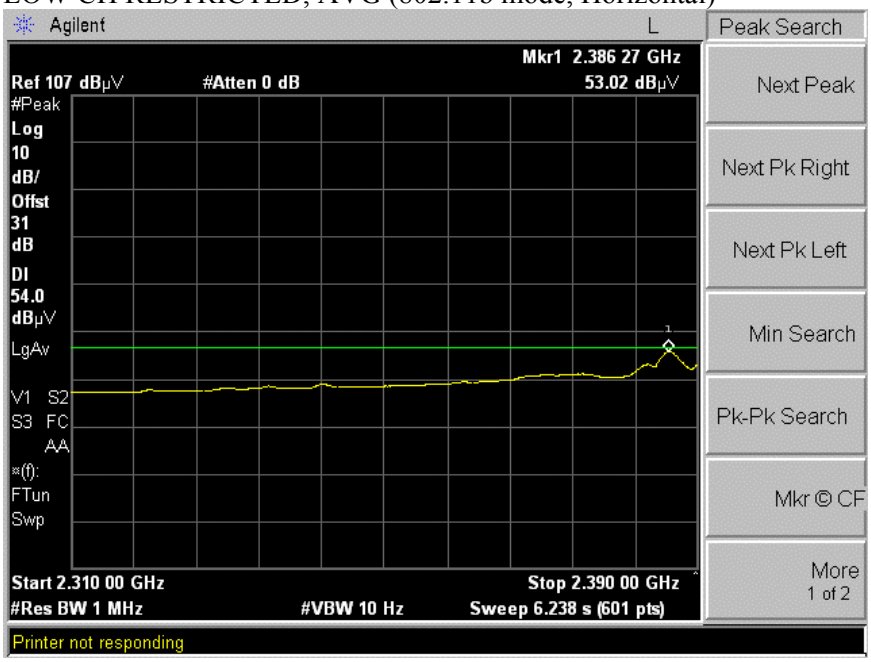

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

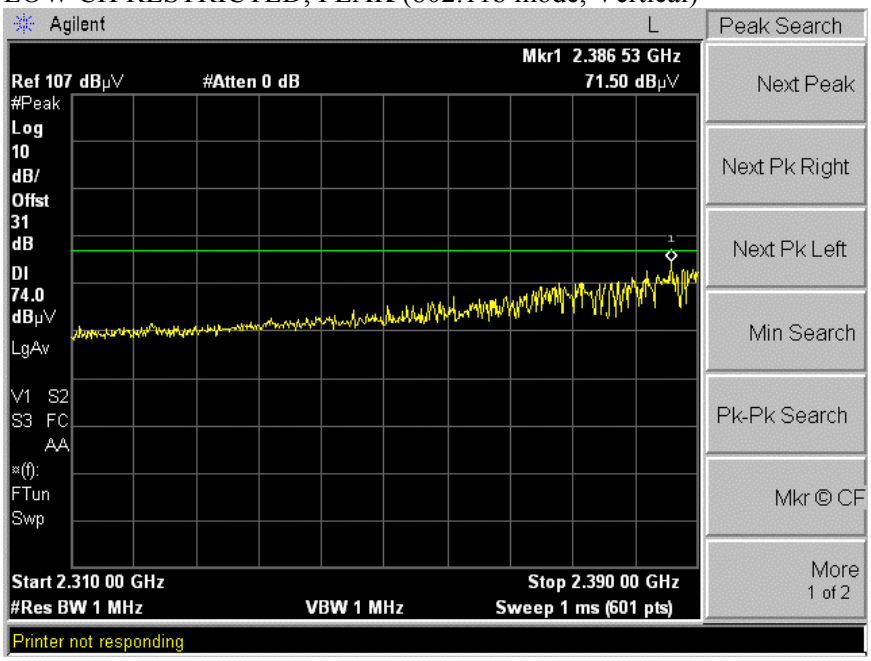

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

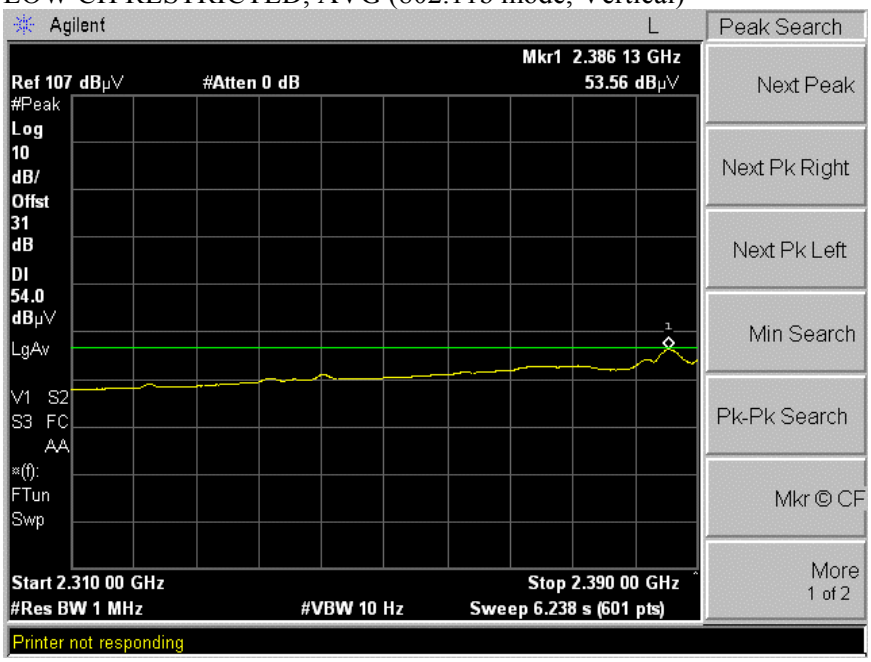

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

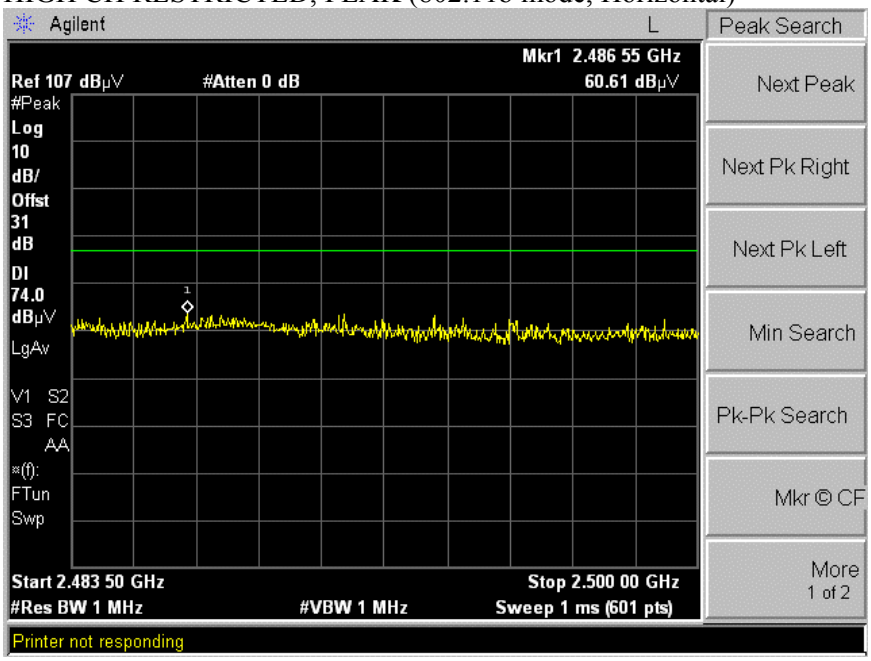

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

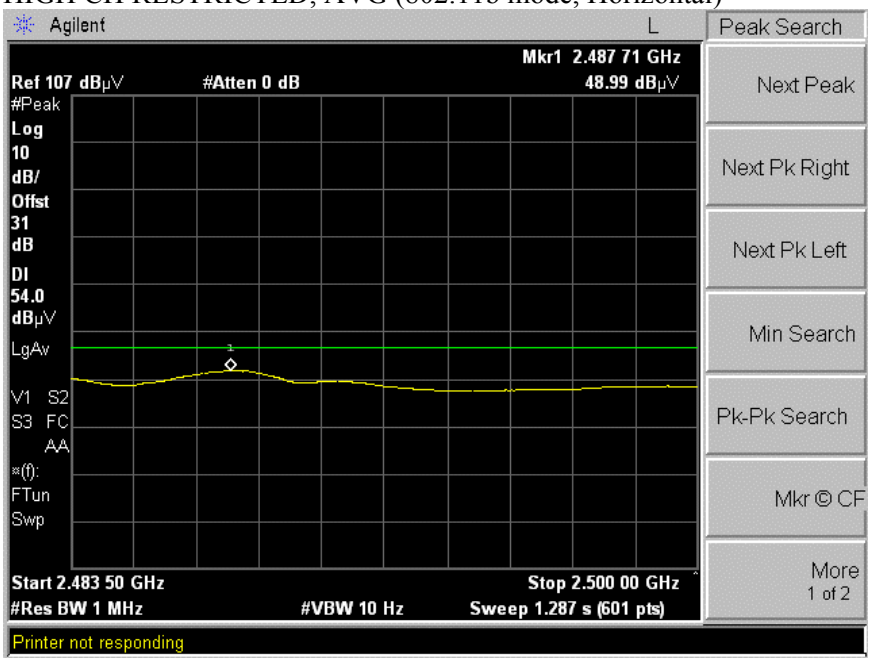

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

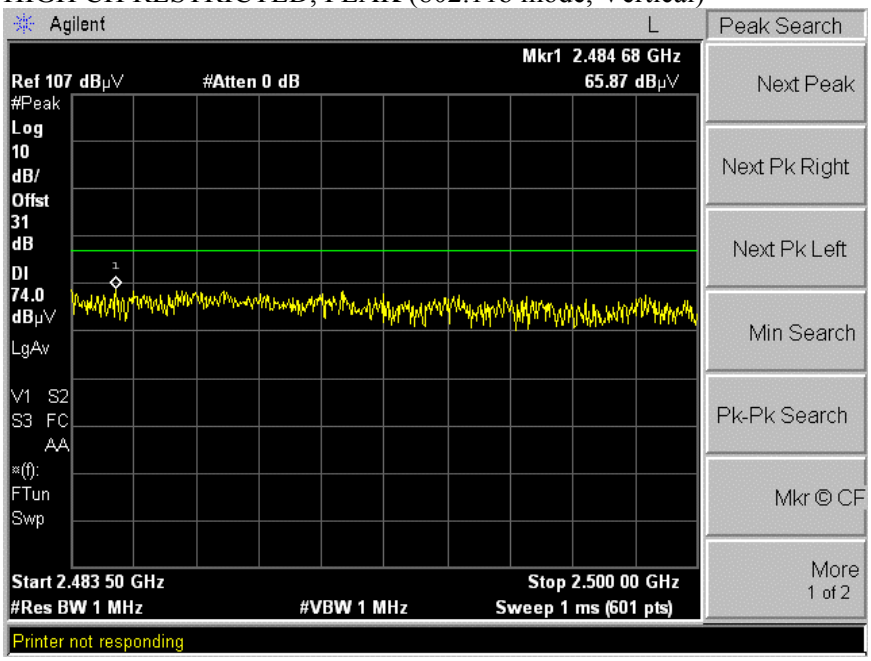

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

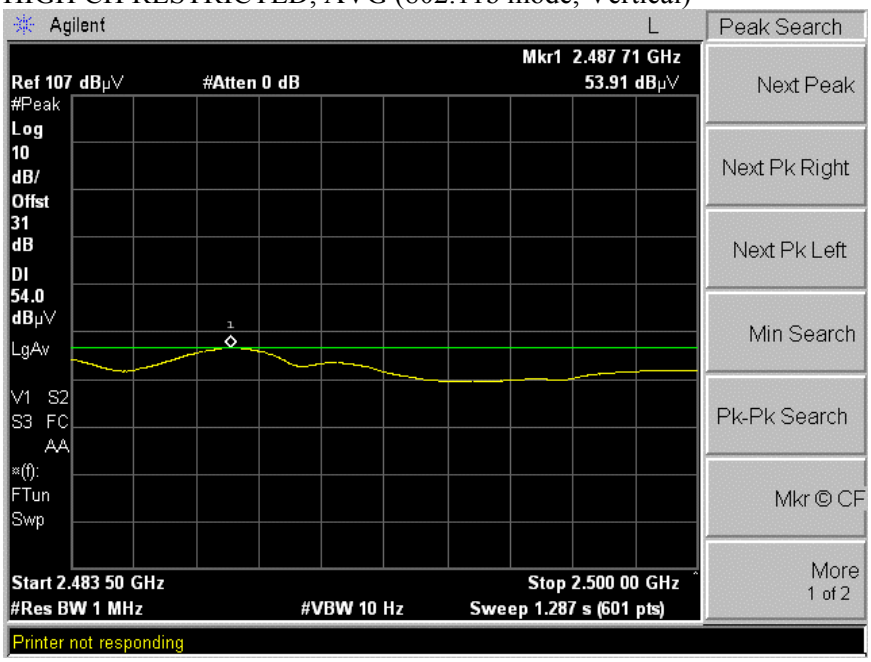

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/28/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U2807-1
Company:Atheros
EUT Descrip.:D-Link 802.11 b/g Access Point
EUT M/N:CUS53
Test Target:FCC 15.247.
Mode Oper:Tx, b mode, B antenna.

Test Equipment:

EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	Agilent E4446A Analyzer	T63 Miteq 646456		

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

b mode, B antenna

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
low ch															
4.824	9.8	56.0	51.6	33.4	2.9	-35.3	0.0	1.0	57.9	53.5	74.0	54.0	-16.1	-0.5	V
4.824	9.8	53.0	48.4	33.4	2.9	-35.3	0.0	1.0	54.9	50.3	74.0	54.0	-19.1	-3.7	H
mid ch															
4.874	9.8	55.5	51.5	33.4	2.9	-35.3	0.0	1.0	57.5	53.5	74.0	54.0	-16.5	-0.5	V
7.311	9.8	54.6	47.8	35.8	3.7	-34.6	0.0	1.0	60.5	53.7	74.0	54.0	-13.5	-0.3	V
4.874	9.8	54.0	50.8	33.4	2.9	-35.3	0.0	1.0	56.0	52.8	74.0	54.0	-18.0	-1.2	H
7.311	9.8	48.1	41.0	35.8	3.7	-34.6	0.0	1.0	54.0	46.9	74.0	54.0	-20.0	-7.1	V
high ch															
4.924	9.8	55.2	51.0	33.5	3.0	-35.3	0.0	1.0	57.3	53.1	74.0	54.0	-16.7	-0.9	V
7.386	9.8	53.9	47.3	36.0	3.7	-34.5	0.0	1.0	60.0	53.4	74.0	54.0	-14.0	-0.6	V
4.924	9.8	53.0	48.3	33.5	3.0	-35.3	0.0	1.0	55.1	50.4	74.0	54.0	-18.9	-3.6	H
7.386	9.8	46.0	36.0	36.0	3.7	-34.5	0.0	1.0	52.1	42.1	74.0	54.0	-21.9	-11.9	H
Note: No other emissions were detected above the system noise floor															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

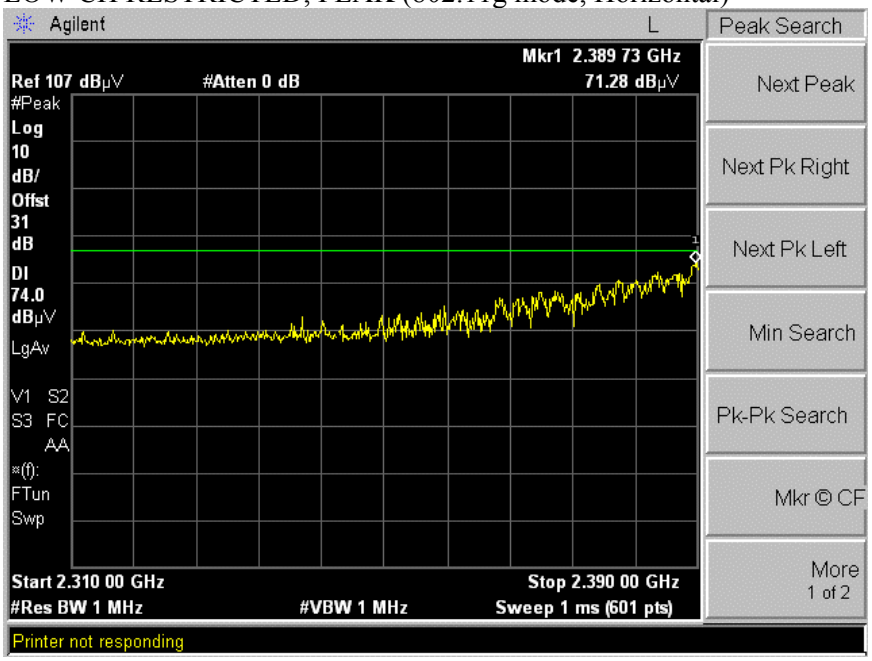

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

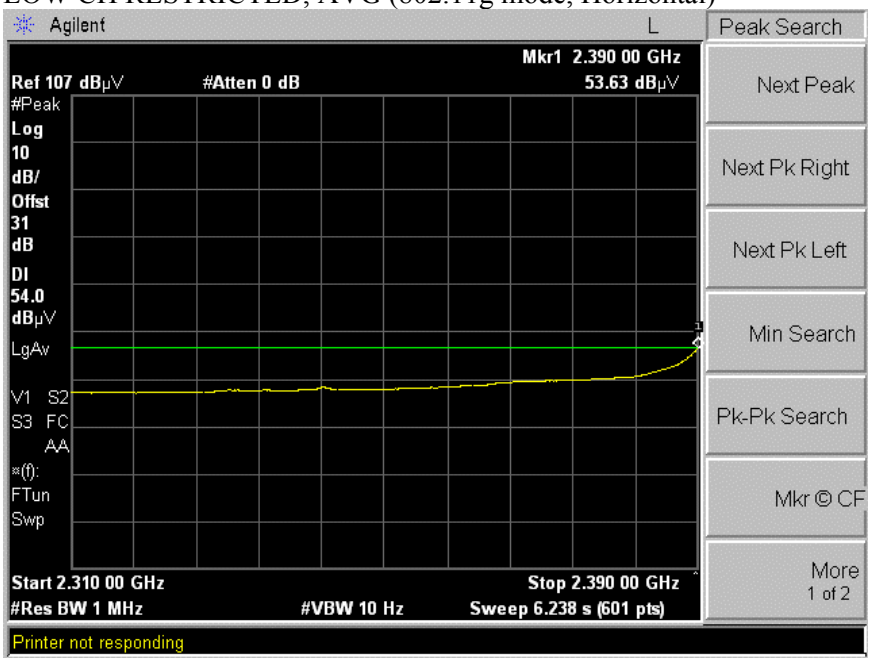

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

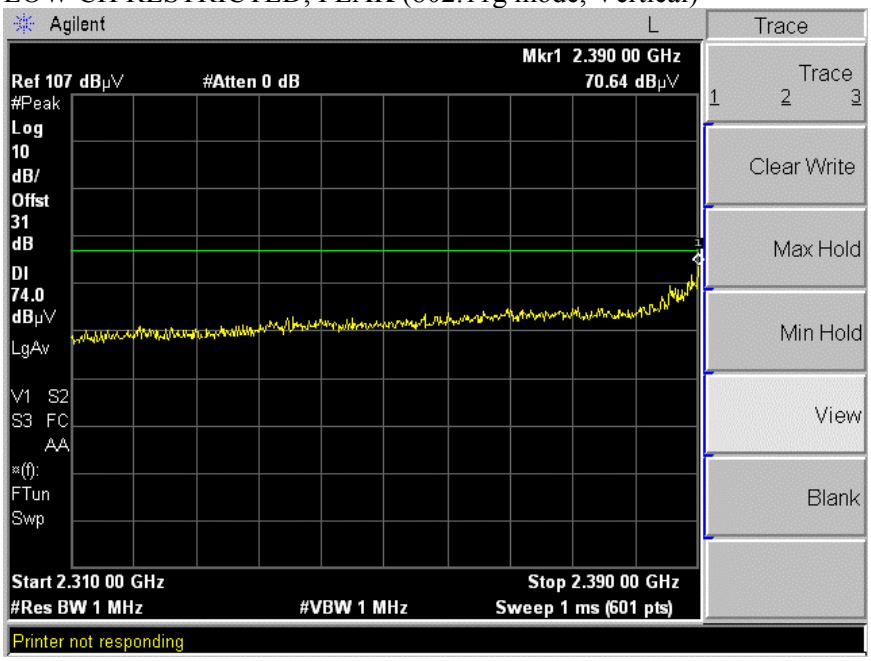

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

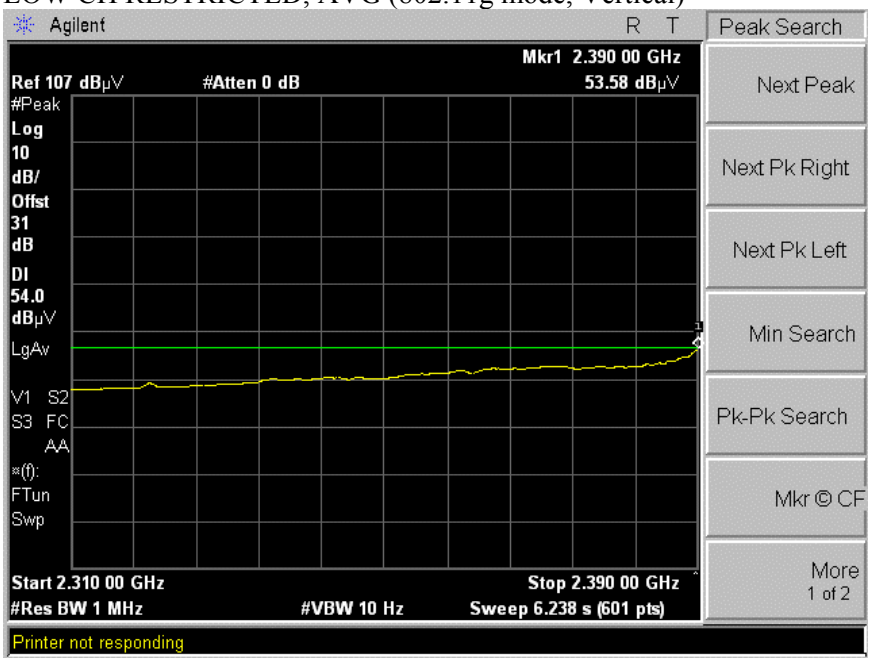

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

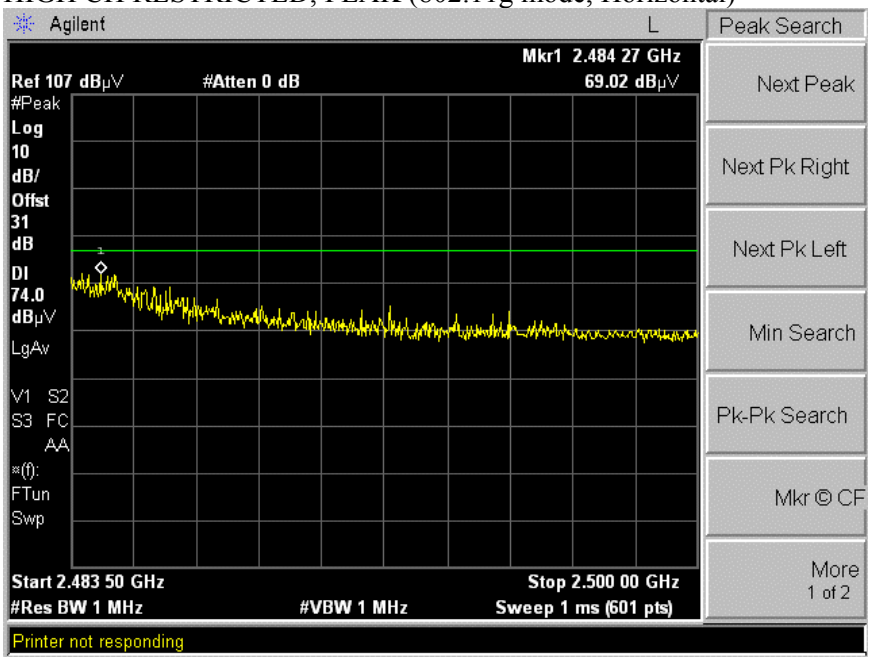

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

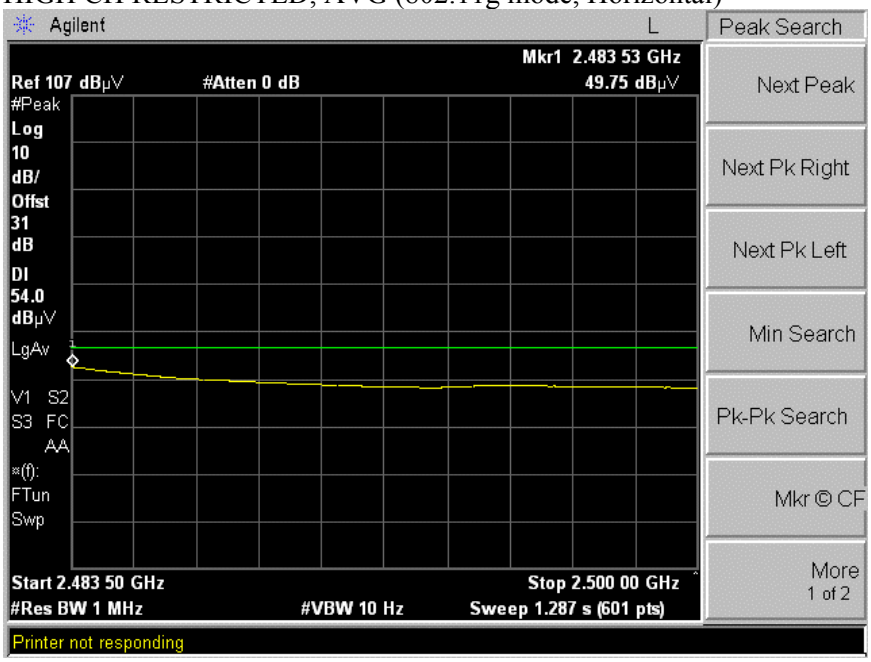

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

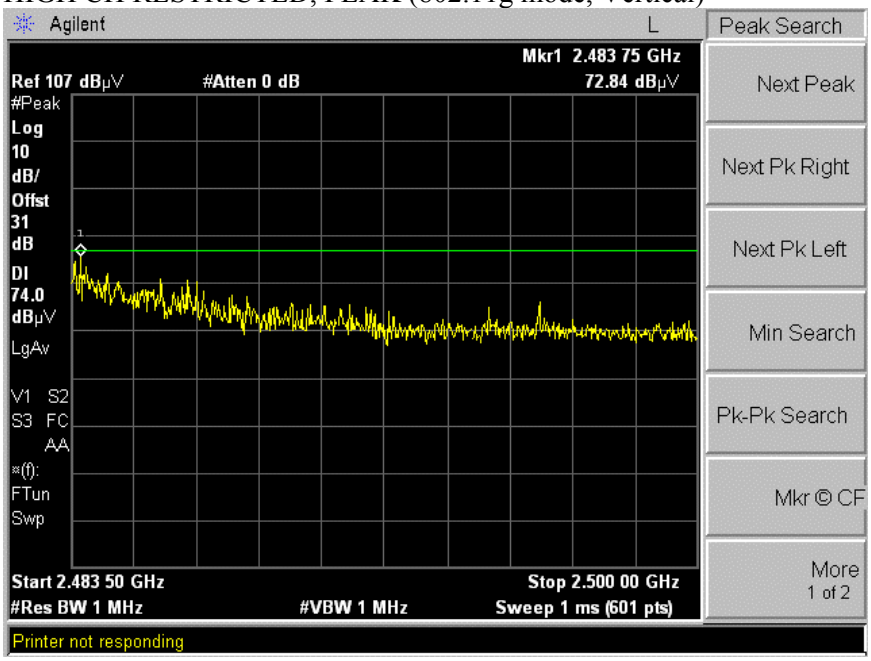

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

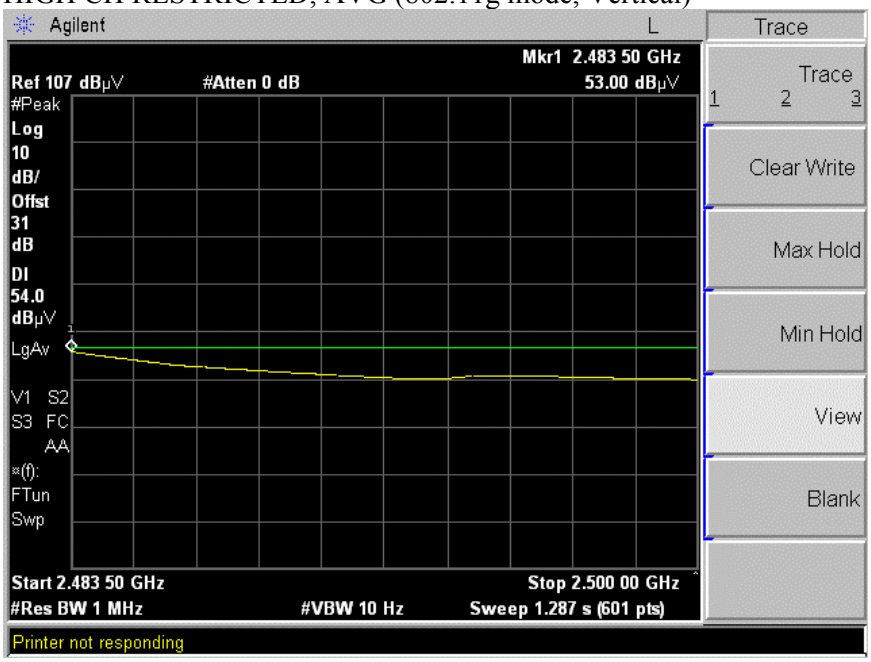

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

06/28/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U2807-1
Company:Atheros
EUT Descrip.:D-Lonk 802.11 b/g Access Point
EUT M/N:CUS53
Test Target:FCC 15.247
Mode Oper:TX, G mode, B antenna.

Test Equipment:

EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	Agilent E4446A Analyzer	T63 Miteq 646456		

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

g mode, B antenna

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
low ch															
4.824	9.8	53.2	41.1	33.4	2.9	-35.3	0.0	1.0	55.1	43.0	74.0	54.0	-18.9	-11.0	V
4.824	9.8	53.0	41.0	33.4	2.9	-35.3	0.0	1.0	54.9	42.9	74.0	54.0	-19.1	-11.1	H
mid ch															
4.874	9.8	53.0	39.1	33.4	2.9	-35.3	0.0	1.0	55.0	41.1	74.0	54.0	-19.0	-12.9	V
7.311	9.8	61.6	47.5	35.8	3.7	-34.6	0.0	1.0	67.5	53.4	74.0	54.0	-6.5	-0.6	V
4.874	9.8	49.8	37.0	33.4	2.9	-35.3	0.0	1.0	51.8	39.0	74.0	54.0	-22.2	-15.0	H
7.311	9.8	53.0	36.8	35.8	3.7	-34.6	0.0	1.0	58.9	42.7	74.0	54.0	-15.1	-11.3	H
high ch															
4.924	9.8	54.0	41.0	33.5	3.0	-35.3	0.0	1.0	56.1	43.1	74.0	54.0	-17.9	-10.9	V
7.386	9.8	65.0	47.5	36.0	3.7	-34.5	0.0	1.0	71.1	53.6	74.0	54.0	-2.9	-0.4	V
4.924	9.8	53.5	40.5	33.5	3.0	-35.3	0.0	1.0	55.6	42.6	74.0	54.0	-18.4	-11.4	H
7.386	9.8	52.0	38.0	36.0	3.7	-34.5	0.0	1.0	58.1	44.1	74.0	54.0	-15.9	-9.9	H

Note: No other emissions were detected above the system noise floor.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)

06/28/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U2807-1
Company:Atheros
EUT Descrip.:D-Lonk 802.11 b/g Access Point
EUT M/N:CUS53
Test Target:FCC 15.247
Mode Oper:TX, G mode, TURBO, B Antenna.

Test Equipment:

EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	Agilent E4446A Analyzer	T63 Miteq 646456		

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

g mode, B antenna

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Turbo, Mid Ch															
4.874	9.8	51.6	40.0	33.4	2.9	-35.3	0.0	1.0	53.6	42.0	74.0	54.0	-20.4	-12.0	V
7.311	9.8	63.8	47.3	35.8	3.7	-34.6	0.0	1.0	69.7	53.2	74.0	54.0	-4.3	-0.8	V
4.874	9.8	49.8	38.0	33.4	2.9	-35.3	0.0	1.0	51.8	40.0	74.0	54.0	-22.2	-14.0	H
7.311	9.8	52.9	36.5	35.8	3.7	-34.6	0.0	1.0	58.8	42.4	74.0	54.0	-15.2	-11.6	H

Note: No other emissions were detected above the system noise floor.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

8. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

COMPLIANCE Engineering Services, Inc.

561F Monterey Road
San Jose, CA 95131
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 20 File#: 04U2807.EMI Date: 06-14-2004 Time: 12:29:30

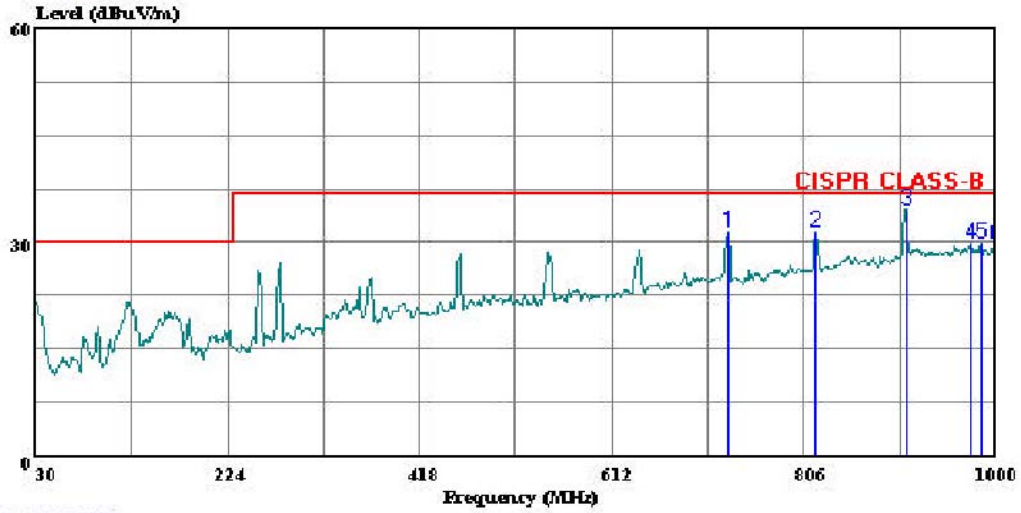

(Audix ATC)
Trace: 19 Ref Trace:

Condition: 3m HORIZONTAL
Test Operator: : David Garcia
Project #: : 04U2807-1
Company: : Atheros
EUT: : 802.11b/g/g turbo WLAN Access Point
Model No: : CUS53
Configuration: : EUT, Digital
Target of Test: : FCC Class B
Mode of Operation: Tx

Page: 1

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HORIZONTAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	730.340	Peak	7.07	24.26	31.33	37.00	-5.67
2	817.640	Peak	6.32	25.18	31.50	37.00	-5.50
3	909.790	Peak	8.18	26.42	34.60	37.00	-2.40
4	974.780	Peak	2.73	27.10	29.83	37.00	-7.17
5	984.480	Peak	2.54	27.27	29.81	37.00	-7.19
6	1000.000	Peak	2.08	27.55	29.63	37.00	-7.37

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT

561F Monterey Road
San Jose, CA 95131
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 18 File#: 04U2807.EMI Date: 06-14-2004 Time: 12:24:39

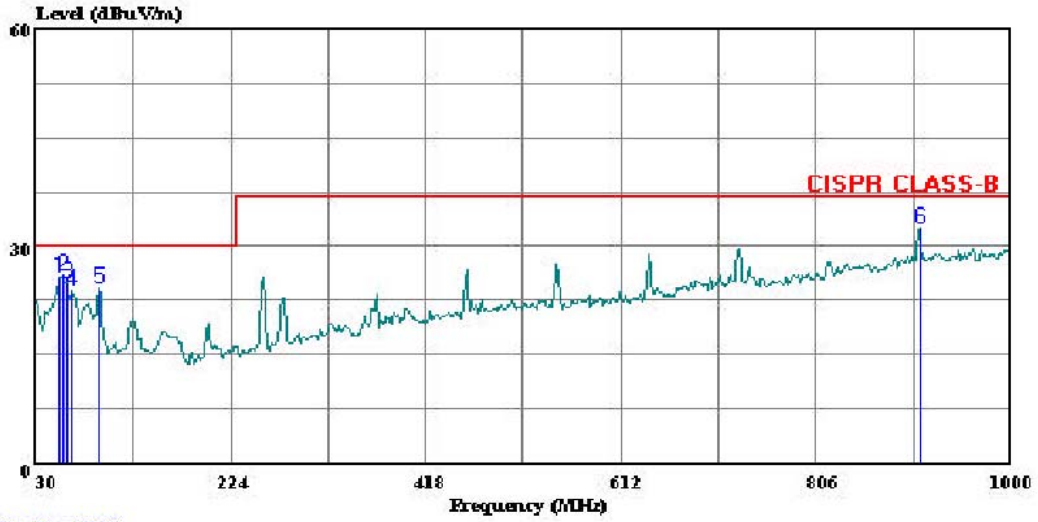

Trace: 17 Ref Trace:

Condition: 3m VERTICAL
Test Operator : David Garcia
Project #: : 04U2807-1
Company: : Atheros
EUT: : 802.11b/g/g turbo WLAN Access Point
Model No: : CUS53
Configuration: : EUT, Digital
Target of Test: : FCC Class B
Mode of Operation: Tx

Page: 1

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

VERTICAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	53.280	Peak	16.72	9.01	25.73	30.00	-4.27
2	56.190	Peak	17.48	8.51	25.99	30.00	-4.01
3	61.040	Peak	16.16	8.90	25.06	30.00	-4.94
4	65.890	Peak	14.60	9.29	23.89	30.00	-6.11
5	92.080	Peak	14.99	9.08	24.07	30.00	-5.93
6	909.790	Peak	5.96	26.42	32.38	37.00	-4.62

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

8.1. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.17	49.86	--	--	0.00	65.46	55.46	-15.60	-5.60	L1
1.93	37.48	--	--	0.00	56.00	46.00	-18.52	-8.52	L1
2.33	35.62	--	--	0.00	56.00	46.00	-20.38	-10.38	L1
0.17	50.90	--	--	0.00	65.40	55.40	-14.50	-4.50	L2
0.23	45.44	--	--	0.00	63.77	53.77	-18.33	-8.33	L2
1.93	38.50	--	--	0.00	56.00	46.00	-17.50	-7.50	L2
6 Worst Data									

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LINE 1 AND LINE 2 RESULTS

COMPLIANCE Engineering Services, Inc.
FCC, VCCI, CISPR, CE
UL, CSA, TÜV

561F Monterey Road,
Morgan Hill, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 6 File#: CUS53FCC.EMI Date: 06-11-2004 Time: 15:09:27

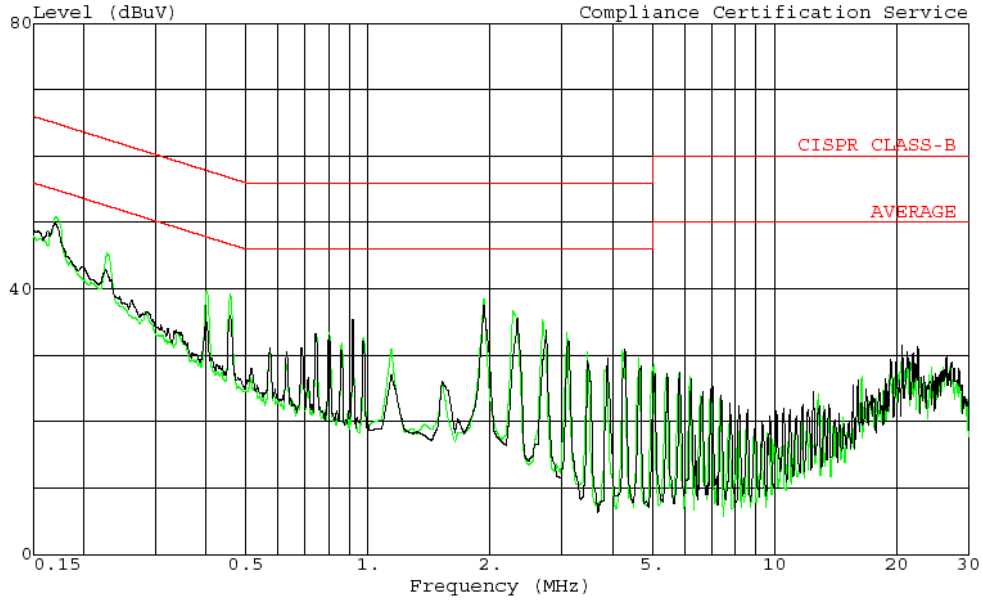

Trace: 13 Ref Trace:

Project #	: 04U2807-1
Test Operator	: David Garcia
Company	: Atheros
EUT	: D-Link 802.11b/g/g turbo Access Point
Model	: CUS53
Configuration	: EUT, Laptop, Dipole antenna
Mode of Operation	: tranmitting; PC interface
Target of Test	: FCC Class B (EN55022 Class B)
Voltage	: 115VAC 60Hz; L1 PK(Black); L2 PK(Green)

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

9. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

ANTENNA PORT CONDUCTED PHOTO

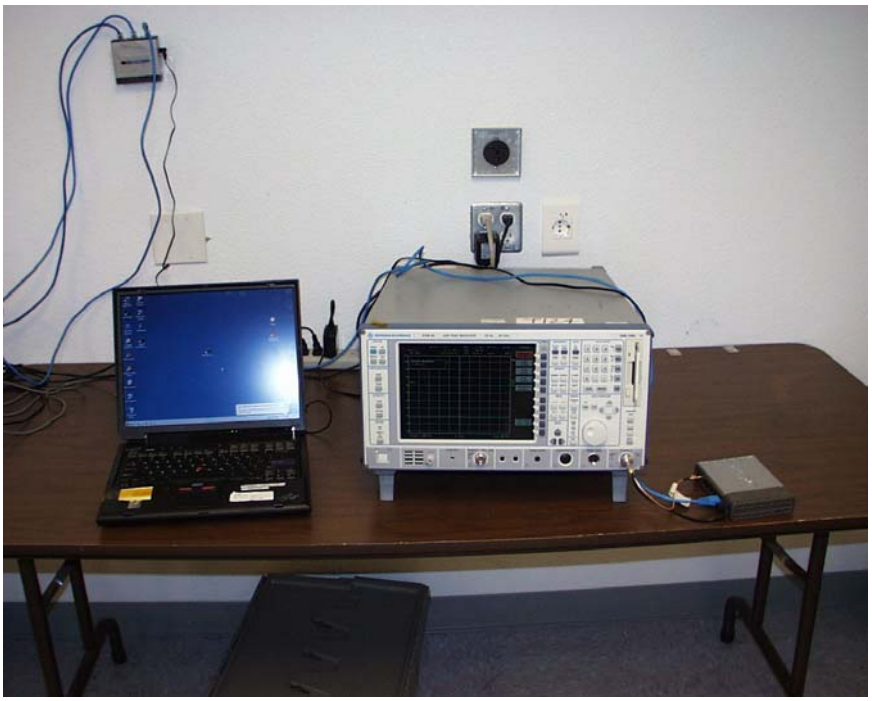

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED BACK PHOTO

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

DIGITAL DEVICE RADIATED EMISSIONS SETUP

DIGITAL DEVICE FRONT PHOTO

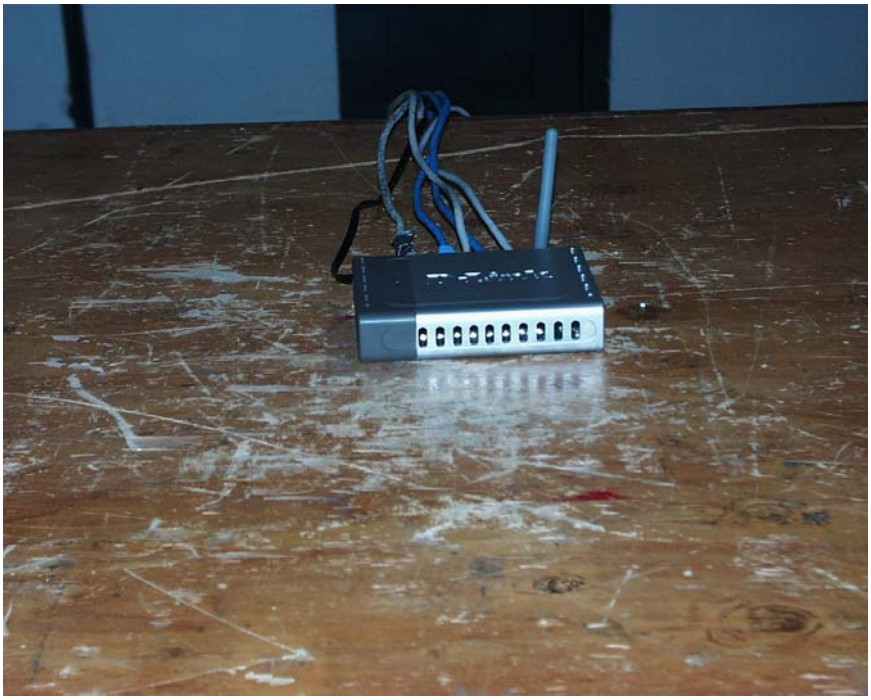

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

DIGITAL DEVICE BACK PHOTO

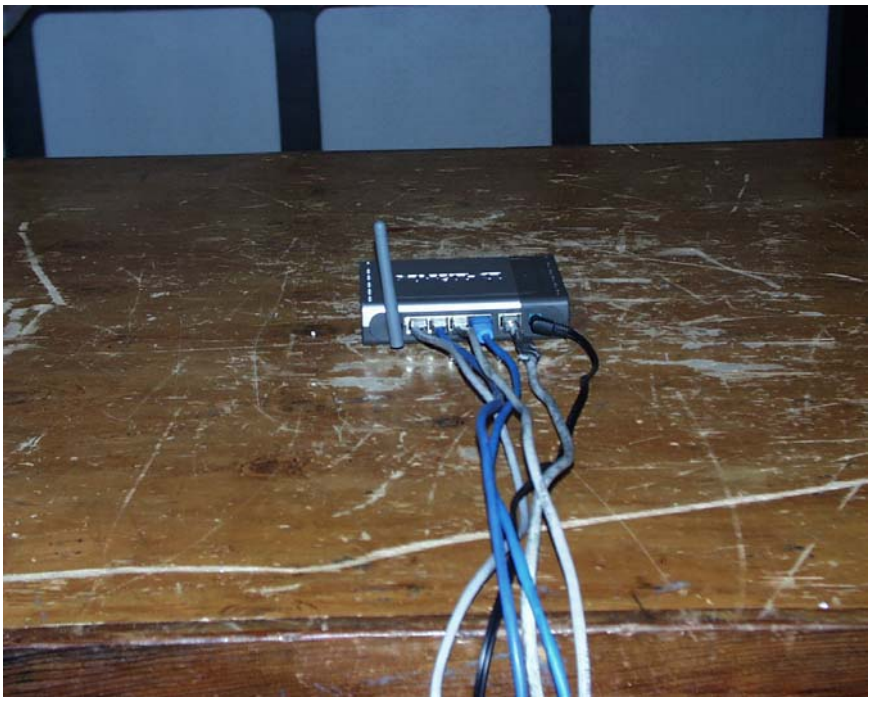

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

LINE CONDUCTED FRONT PHOTO

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LINE CONDUCTED BACK PHOTO

END OF REPORT

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.