



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless USB Adapter

Model: DWL-AG132

Trade Name: D-Link

Issued to

D-Link Corporation
No.8, Li-shing Road VII, Science-based Industrial Park,
Hsinchu, Taiwan R.O.C.

Issued by

Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES8	
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1 SETUP CONFIGURATION OF EUT.....	10
6.2 SUPPORT EQUIPMENT	10
7. FCC PART 15.247 REQUIREMENTS.....	11
7.1 6DB BANDWIDTH.....	11
7.2 PEAK POWER.....	19
7.3 BAND EDGES MEASUREMENT	27
7.4 PEAK POWER SPECTRAL DENSITY	40
7.5 RADIO FREQUENCY EXPOSURE	48
7.6 SPURIOUS EMISSIONS	49
7.7 POWERLINE CONDUCTED EMISSIONS.....	72
APPENDIX 1 PHOTOGRPHS OF TEST SETUP	75



1. TEST RESULT CERTIFICATION

Applicant: D-Link Corporation
No.8, Li-shing Road VII, Science-based Industrial Park,
Hsinchu, Taiwan R.O.C.

Equipment Under Test: Wireless USB Adapter

Trade Name: D-Link

Model: DWL-AG132

Date of Test: November 12 ~ 23 , 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Harris W. Lai
Executive Vice President
Compliance Certification Services Inc.

Devin Chang
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless USB Adapter
Trade Name	D-Link
Model Number	DWL-AG132
Model Discrepancy	N/A
Power Supply	Powered from host device
Frequency Range	IEEE 802.11a: Base mode: 5.745~5.825 GHz Turbo mode: 5.760 GHz / 5.800 GHz IEEE 802.11b/g: 2412~2462 MHz IEEE 802.11g Turbo mode: 2437 MHz
Transmit Power	IEEE 802.11a: 16.07 dBm IEEE 802.11b: 17.19 dBm IEEE 802.11g: 17.17 dBm
Modulation Technique	IEEE 802.11a: DSSS+ OFDM IEEE 802.11b: DSSS IEEE 802.11g: OFDM
Transmit Data Rate	108, 54, 48, 36, 24, 18, 11, 9, 6, 5.5, 2, 1Mbps
Number of Channels	IEEE802.11a: Base mode: 5 Channels Turbo mode: 2 Channels IEEE802.11b/g: 11 Channels IEEE 802.11g Turbo mode: 1 Channel
Antenna Specification	IEEE802.11a: Multilayer Chip Antenna / Gain: 2.0 dBi IEEE802.11b/g: Multilayer Chip Antenna / Gain: 0 dBi

Note: This submittal(s) (test report) is intended for FCC ID: KA2DWLAG132B1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: DWL-AG132) can work alone or with a cradle, after pretest, EUT connected with a cradle was chose as the worst configuration for final testing with the test mode listed below.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz's worst case is in normal link mode.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 11Mbps higher data rate were chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6Mbps higher data rate were chosen for the final testing.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (Registration no: 93105 and 90471).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS CISPR 22, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1/2, EN 300 220-1/2/3, EN 300 440-1/2, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15 Subpart C/D/E, EN 55013, CNS 13439, EN 55014-1, CNS 13783-1, EN 55022, CNS 13438, CISPR 22, AS/NZS 3548, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, IEEE Std 1528, FCC OET Bulletin, 65+Supplement C, EN50360, EN50361, EN50371, RSS102	 0363 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
Notebook PC	IBM	2672(X31)	99PBTKB	FCC DoC	N/A	Unshielded, 1.8m
Printer	EPSON	STYLUS C60	DR3K039633	FCC DoC	Shielded, 1.8m	Unshielded, 1.8m
USB Mouse	HP	MO19UCA	20440964	FCC DoC	Shielded, 1.8m	N/A

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT


For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

**TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	12500	>500	PASS
Mid	2437	12330		PASS
High	2462	11500		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)		Bandwidth (kHz)	Limit (kHz)	Test Result
Low	Base mode	2412	16170	>500	PASS
Mid		2437	16580		PASS
High		2462	16580		PASS
Mid	Turbo mode	2437	32830		PASS

Test mode: IEEE 802.11a


Channel	Frequency (MHz)		Bandwidth (kHz)	Limit (kHz)	Test Result
Low	Base mode	5745	16500	>500	PASS
Mid		5785	16420		PASS
High		5825	16080		PASS
Low	Turbo mode	5760	32830		PASS
High		5800	32830		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

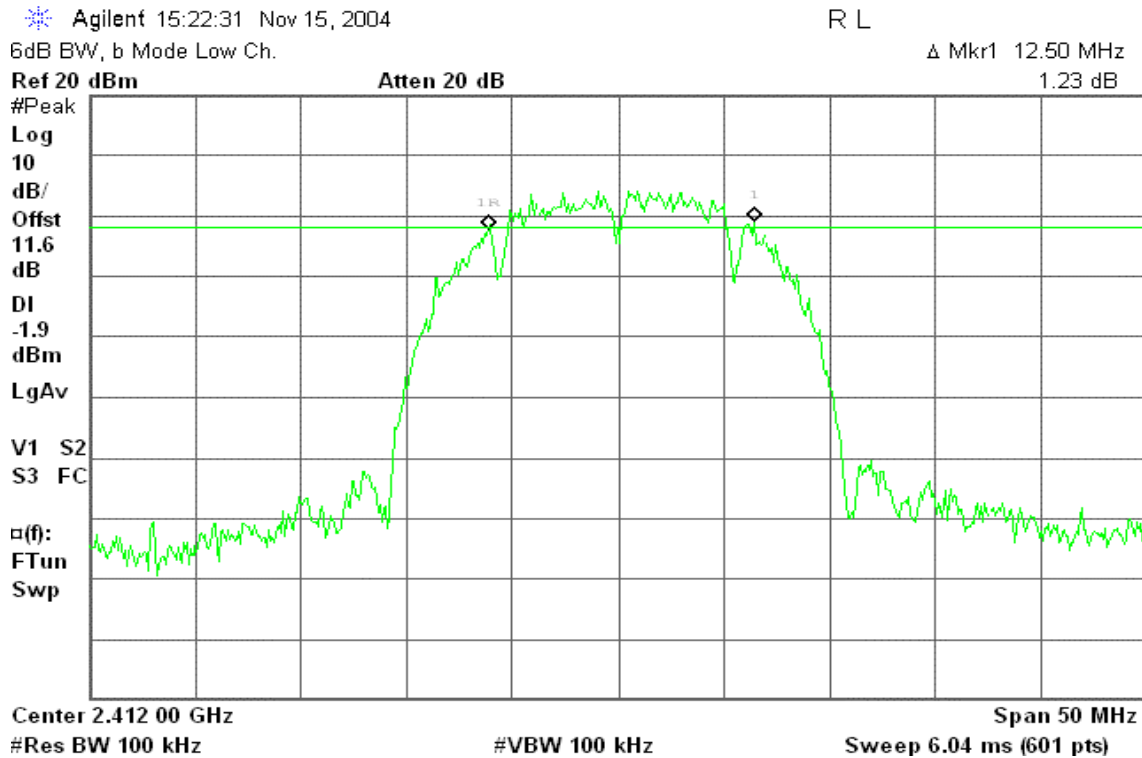

6dB Bandwidth (CH Mid)

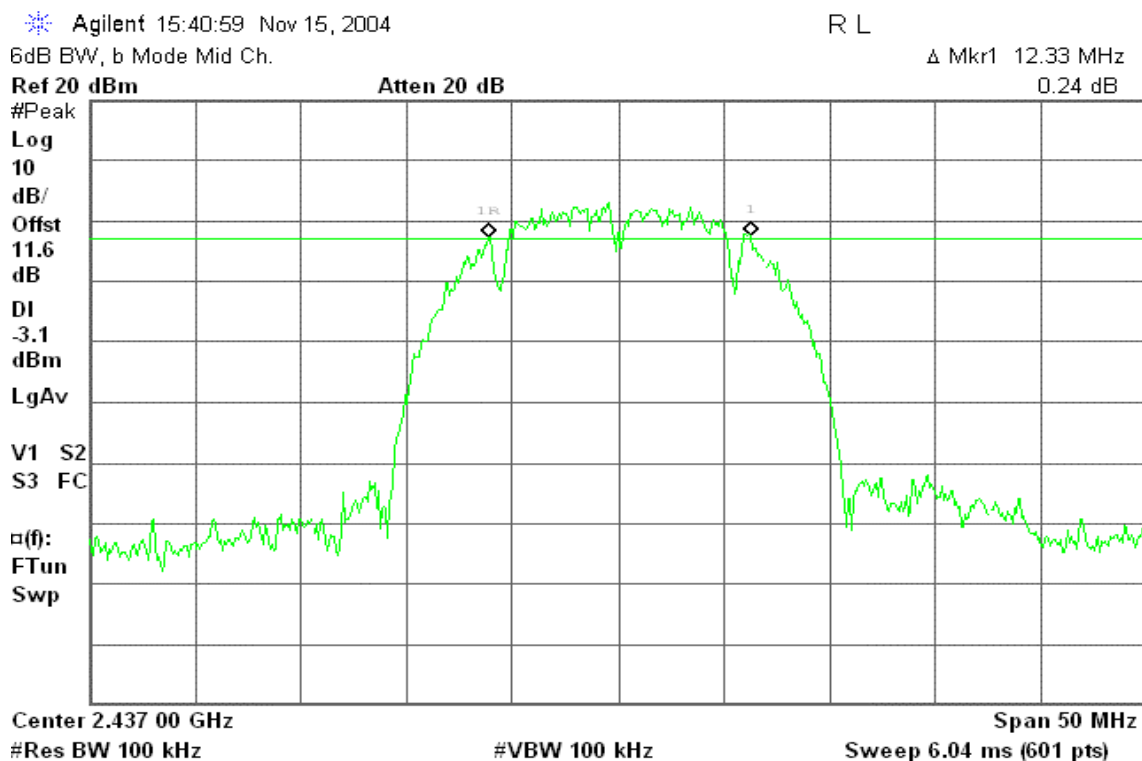



6dB Bandwidth (CH High)

Agilent 15:47:54 Nov 15, 2004

R L

6dB BW, b Mode High Ch.

Δ Mkr1 11.50 MHz

Ref 20 dBm

Atten 20 dB

1.35 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-2.1

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

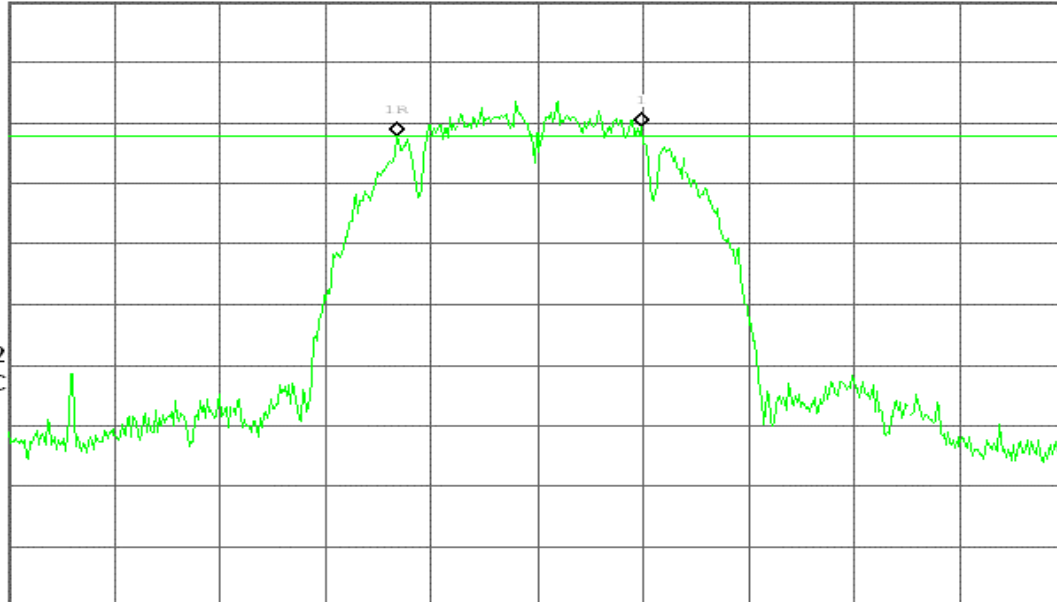

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 16:00:45 Nov 15, 2004

R L

6dB BW, g Mode Low Ch.

Δ Mkr1 16.17 MHz

Ref 20 dBm

Atten 20 dB

0.67 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

0.3

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

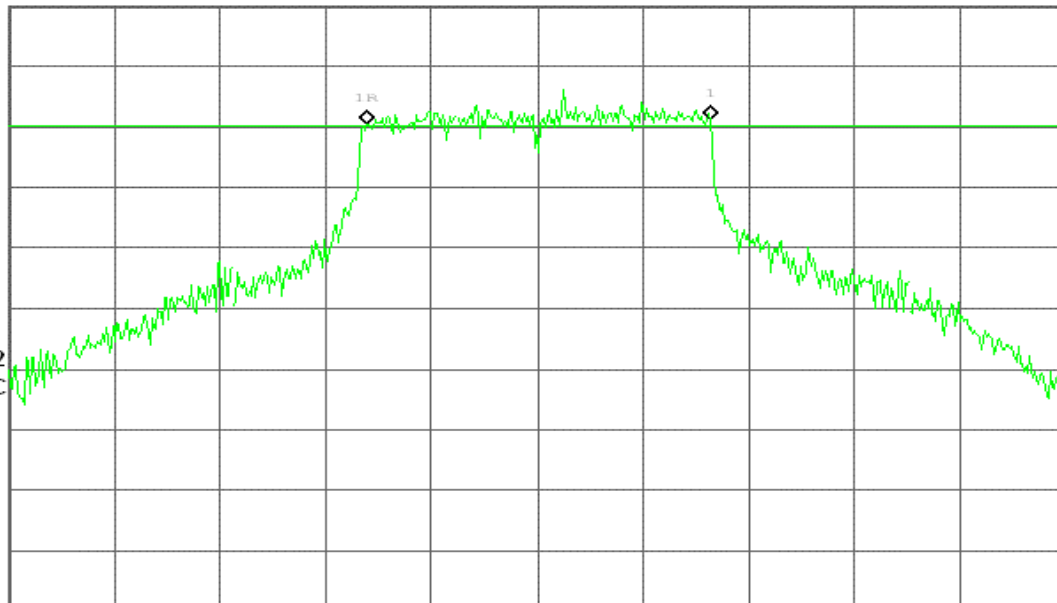

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 16:17:45 Nov 15, 2004

R L

6dB BW, g Mode Mid Ch.

Δ Mkr1 16.58 MHz

Ref 20 dBm

Atten 20 dB

1.47 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-6.1

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

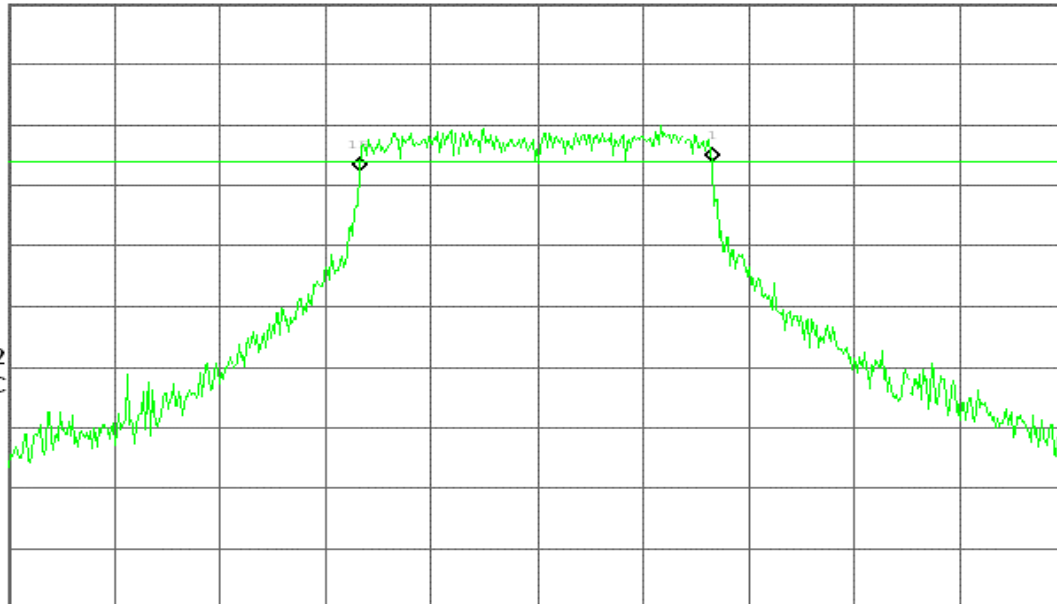

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 16:24:47 Nov 15, 2004

R L

6dB BW, g Mode High Ch.

Δ Mkr1 16.58 MHz

Ref 20 dBm

Atten 20 dB

-0.76 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-6.8

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

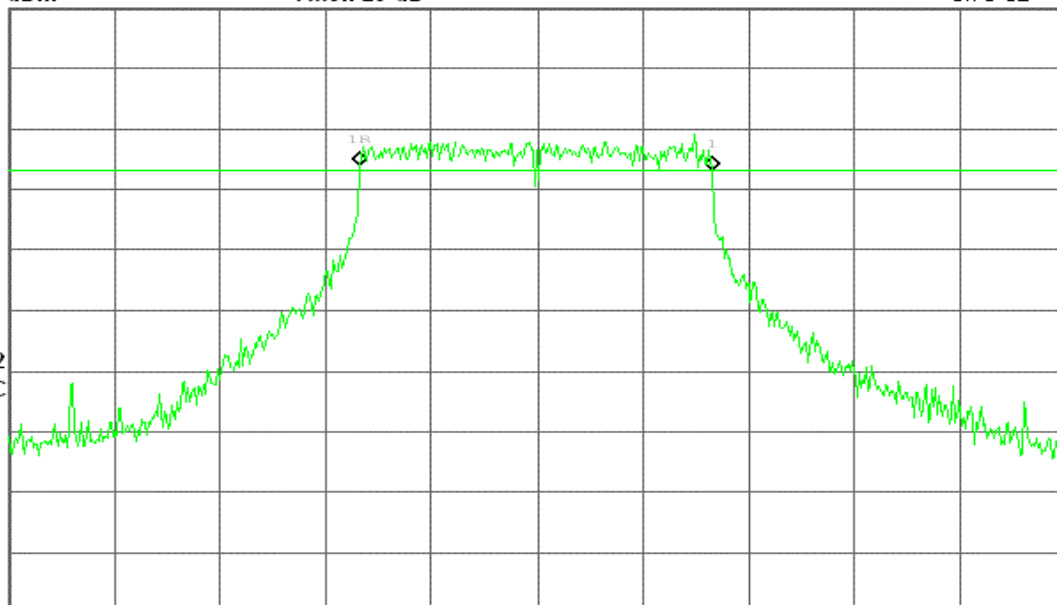

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



IEEE 802.11g Turbo mode

6dB Bandwidth (CH Mid)

Agilent 14:25:17 Nov 19, 2004

R L

6dB BW, g turbo Mode Mid Ch.

Δ Mkr1 32.83 MHz

Ref 30 dBm

Atten 30 dB

0.34 dB

#Peak

Log

10

dB/

Offst

11.1

dB

DI

-8.1

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

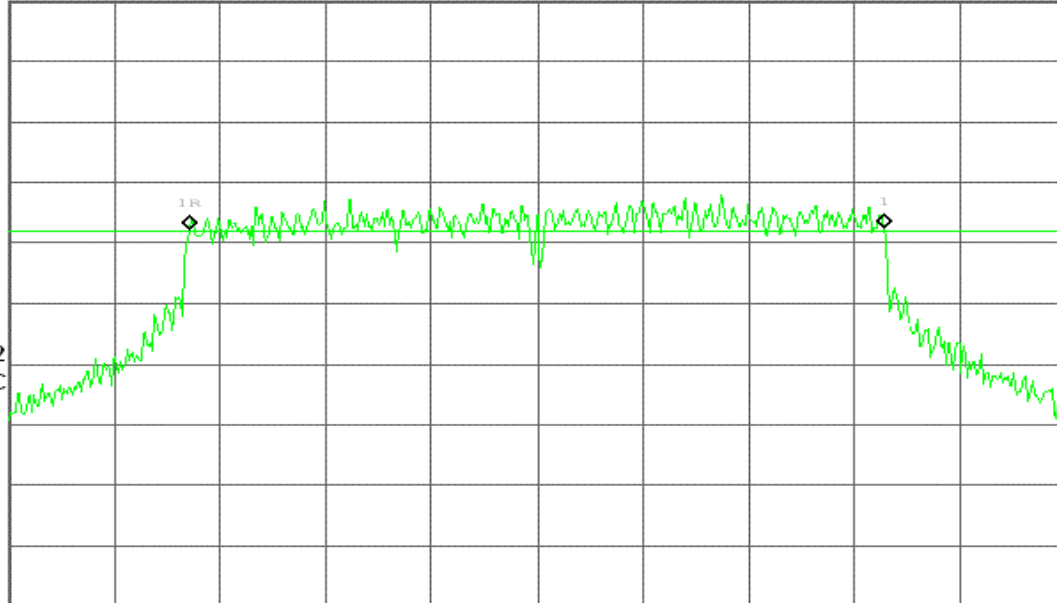

Center 2.437 00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 50 MHz

Sweep 6.04 ms (601 pts)

IEEE 802.11a Base mode

6dB Bandwidth (CH Low)

Agilent 17:35:29 Nov 15, 2004

R L

6dB BW, a Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

1.94 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-7.3

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

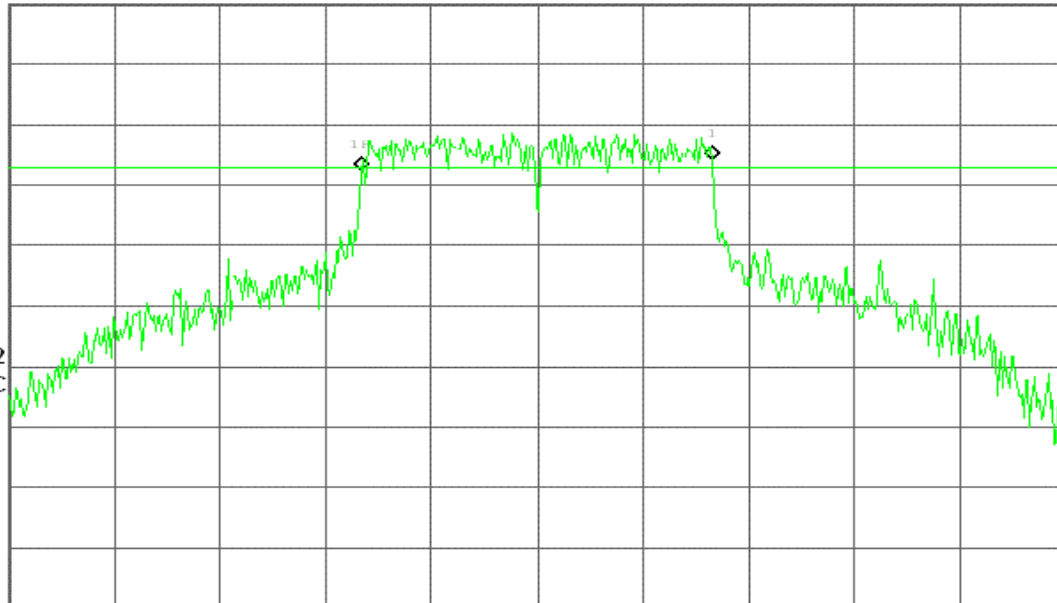

Center 5.745 00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 50 MHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 17:47:11 Nov 15, 2004

R L

6dB BW, a Mode Mid Ch.

Δ Mkr1 16.42 MHz

Ref 20 dBm

Atten 20 dB

-0.91 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-9.2

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

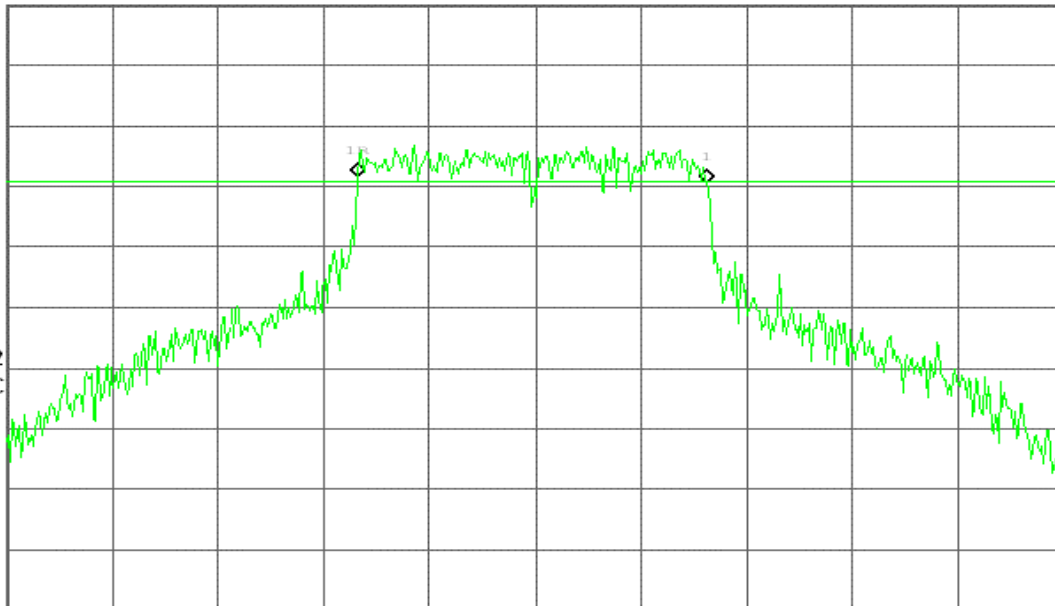

Center 5.785 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 17:54:03 Nov 15, 2004

R L

6dB BW, a Mode High Ch.

Δ Mkr1 16.08 MHz

Ref 20 dBm

Atten 20 dB

-0.67 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-6.8

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

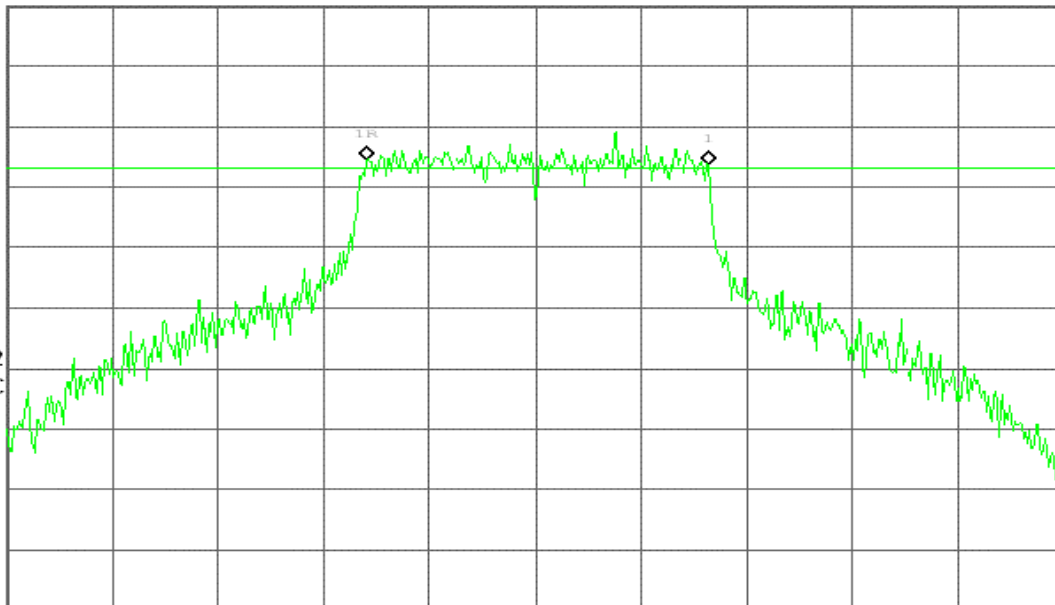

Center 5.825 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



IEEE 802.11a Turbo mode

6dB Bandwidth (CH Low)

Agilent 15:17:25 Nov 23, 2004

R L

6dB BW, a turbo Mode Low Ch.

Δ Mkr1 32.83 MHz

Ref 20 dBm

Atten 20 dB

-1.33 dB

#Peak

Log

10

dB/

Offst

11.1

dB

DI

-6.0

dBm

LgAv

V1 S2

S3 FC

□(f):

FTun

Swp

Center 5.760 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 15:25:37 Nov 23, 2004

R L

6dB BW, a turbo Mode High Ch.

Δ Mkr1 32.83 MHz

Ref 20 dBm

Atten 20 dB

0.29 dB

#Peak

Log

10

dB/

Offst

11.1

dB

DI

-9.2

dBm

LgAv

V1 S2

S3 FC

□(f):

FTun

Swp

Center 5.800 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	5.53	11.6	17.13	0.05164	1	PASS
Mid	2437	5.59	11.6	17.19	0.05236		PASS
High	2462	5.58	11.6	17.18	0.05224		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)		Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)
Low	Base mode	2412	5.48	11.6	17.08	0.05105	1
Mid		2437	5.57	11.6	17.17	0.05212	
High		2462	5.53	11.6	17.13	0.05164	
Mid	Turbo mode	2437	5.73	11.1	16.83	0.04819	

Test mode: IEEE 802.11a mode

Channel	Frequency (MHz)		Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)
Low	Base mode	5745	4.33	11.6	15.93	0.03917	1
Mid		5785	3.96	11.6	15.56	0.03597	
High		5825	4.40	11.6	16.00	0.03981	
Low	Turbo mode	5760	4.84	11.1	15.94	0.03926	
High		5800	4.97	11.1	16.07	0.04046	



Test Plot

IEEE 802.11b mode

Peak power (CH Low)


Agilent 15:24:23 Nov 15, 2004

R L

Peak Output Power, b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

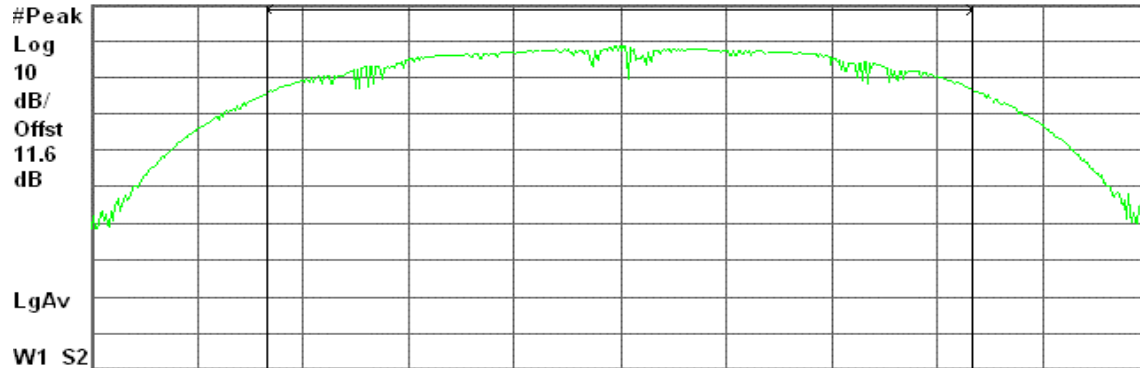

Center 2.412 00 GHz

Span 23.24 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

17.13 dBm / 15.4930 MHz

-54.77 dBm/Hz

Peak power (CH Mid)


Agilent 15:42:08 Nov 15, 2004

R L

Peak Output Power, b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

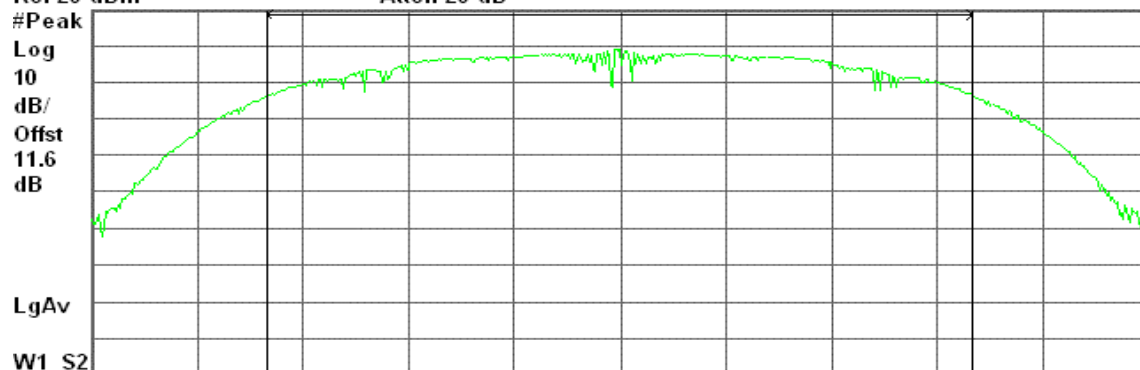

Center 2.437 00 GHz

Span 23.18 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

17.19 dBm / 15.4500 MHz

-54.70 dBm/Hz



Peak power (CH High)


Agilent 15:49:43 Nov 15, 2004

R L

Peak Output Power, b Mode High Ch.

Ref 20 dBm

Atten 20 dB

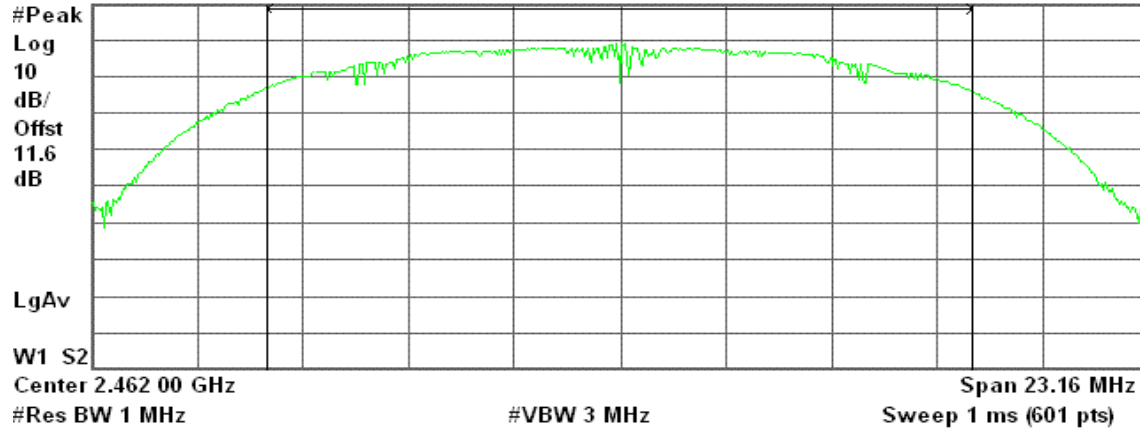

Channel Power

17.18 dBm / 15.4380 MHz

Power Spectral Density

-54.71 dBm/Hz

IEEE 802.11g mode

Peak power (CH Low)


Agilent 16:02:38 Nov 15, 2004

R L

Peak Output Power, g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

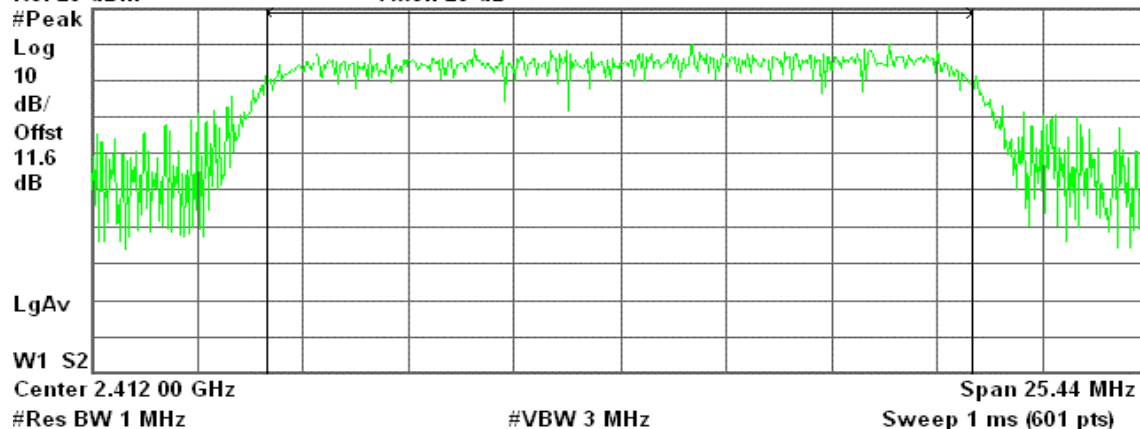

Channel Power

17.08 dBm / 16.9570 MHz

Power Spectral Density

-55.21 dBm/Hz



Peak power (CH Mid)


Agilent 16:19:20 Nov 15, 2004

R L

Peak Output Power, g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

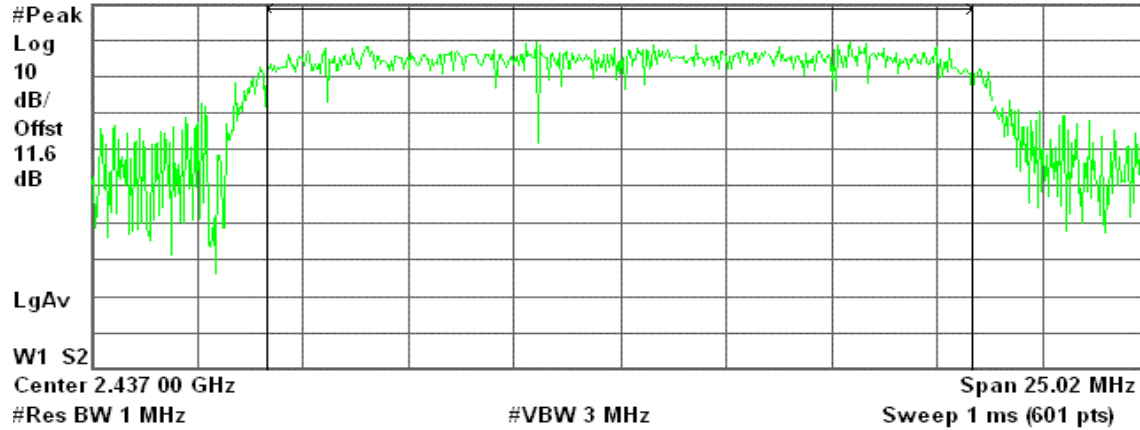

Channel Power

17.17 dBm / 16.6800 MHz

Power Spectral Density

-55.05 dBm/Hz

Peak power (CH High)


Agilent 16:26:08 Nov 15, 2004

R L

Peak Output Power, g Mode High Ch.

Ref 20 dBm

Atten 20 dB

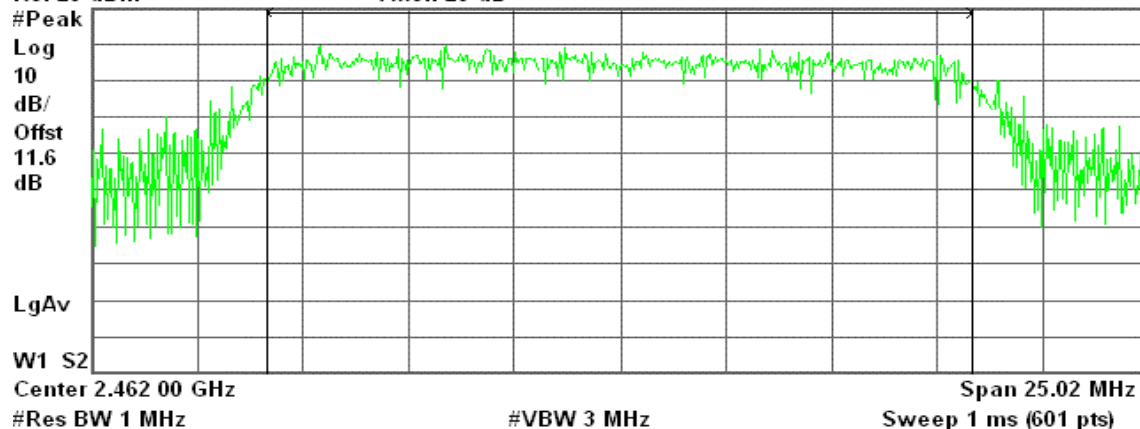

Channel Power

17.13 dBm / 16.6820 MHz

Power Spectral Density

-55.09 dBm/Hz



IEEE 802.11g Turbo mode

Peak power (CH Mid)


Agilent 14:26:23 Nov 19, 2004

R L

Peak Output Power, g turbo Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

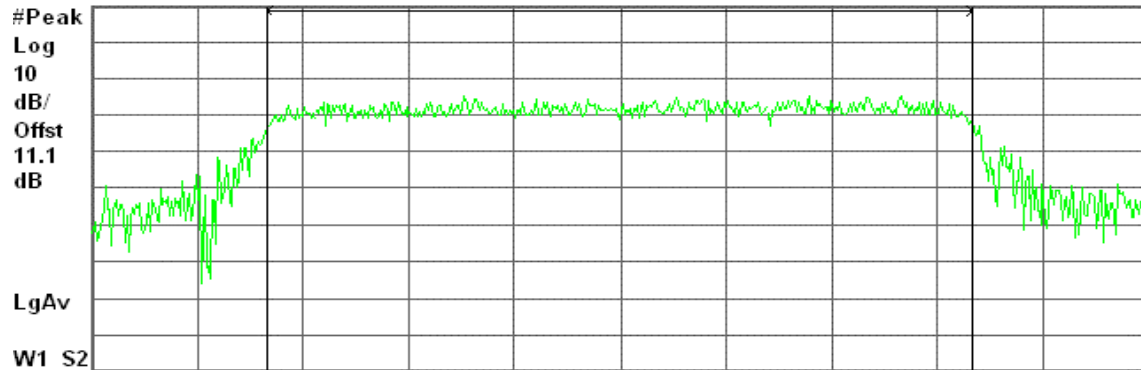

Center 2.437 00 GHz

Span 49.76 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.83 dBm / 33.1720 MHz

-58.37 dBm/Hz

IEEE 802.11a Base mode

Peak power (CH Low)

Agilent 17:39:25 Nov 15, 2004

R L

Peak Output Power, a Mode Low Ch.

Ref 20 dBm

Atten 20 dB



Center 5.745 00 GHz

Span 29.14 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.93 dBm / 19.4260 MHz

-56.96 dBm/Hz



Peak power (CH Mid)


Agilent 17:48:21 Nov 15, 2004

R L

Peak Output Power, a Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

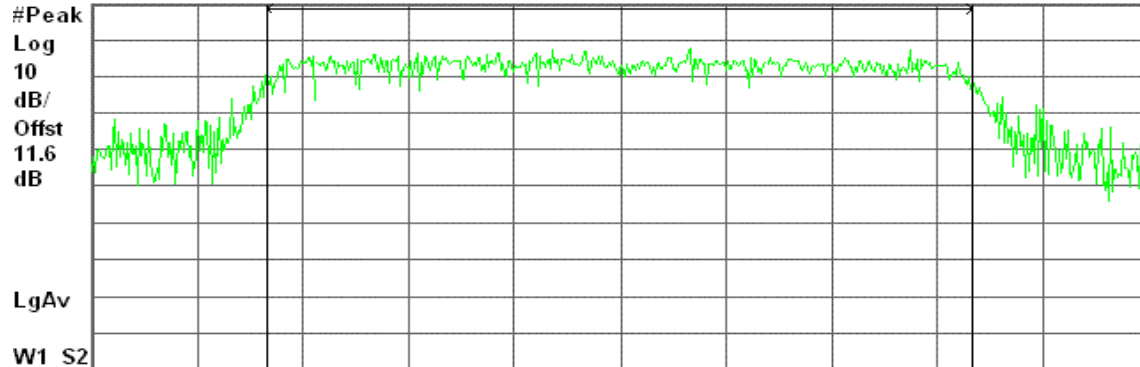

Center 5.785 00 GHz

Span 25.37 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.56 dBm / 16.9140 MHz

-56.72 dBm/Hz

Peak power (CH High)


Agilent 17:55:22 Nov 15, 2004

R L

Peak Output Power, a Mode High Ch.

Ref 20 dBm

Atten 20 dB

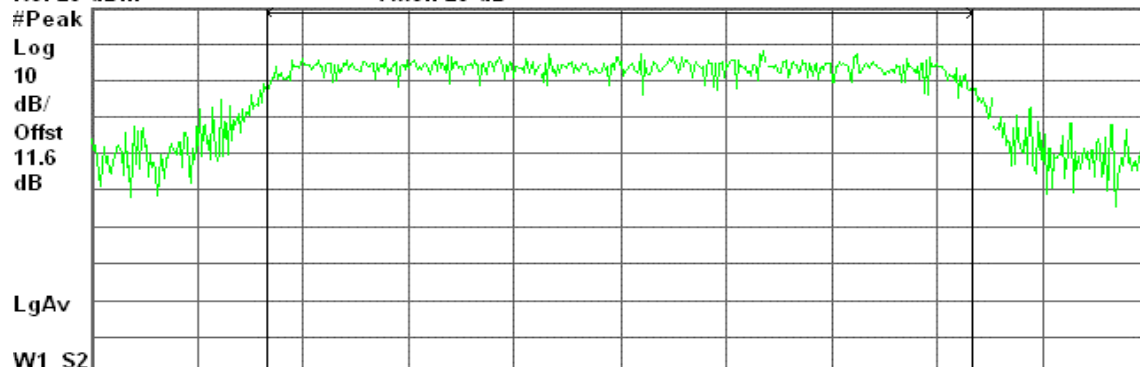

Center 5.825 00 GHz

Span 25.42 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.00 dBm / 16.9460 MHz

-56.29 dBm/Hz



IEEE 802.11a Turbo mode

Peak power (CH Low)


Agilent 15:18:53 Nov 23, 2004

R L

Peak Output Power, a turbo Mode Low Ch.

Ref 20 dBm

Atten 20 dB

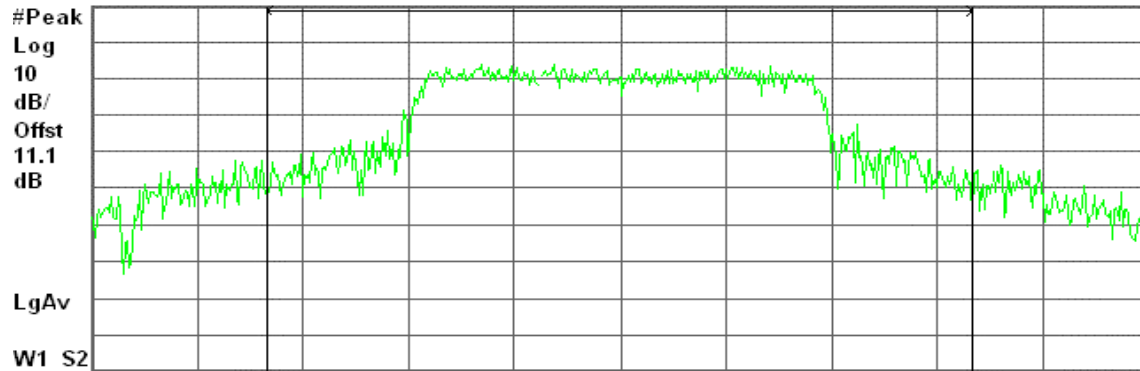

Center 5.760 00 GHz

Span 88.99 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.94 dBm / 59.3290 MHz

-61.79 dBm/Hz

Peak power (CH High)


Agilent 15:27:45 Nov 23, 2004

R L

Peak Output Power, a turbo Mode High Ch.

Ref 20 dBm

Atten 20 dB

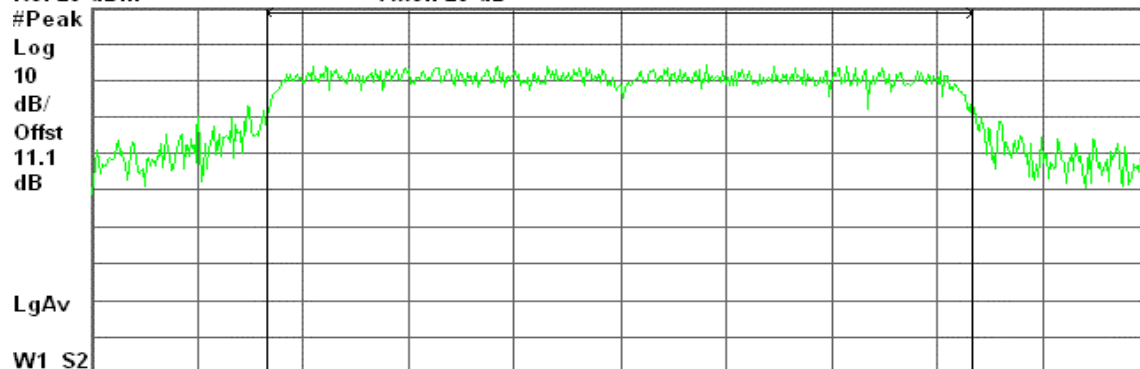

Center 5.800 00 GHz

Span 51.04 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.07 dBm / 34.0250 MHz

-59.25 dBm/Hz

7.3 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEB	8258929/011	07/13/2005
Pre-Amplifier	HP	8447D	2944A09173	03/03/2005
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2005
Pre-Amplifier	HP	8449B	3008B00965	10/02/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

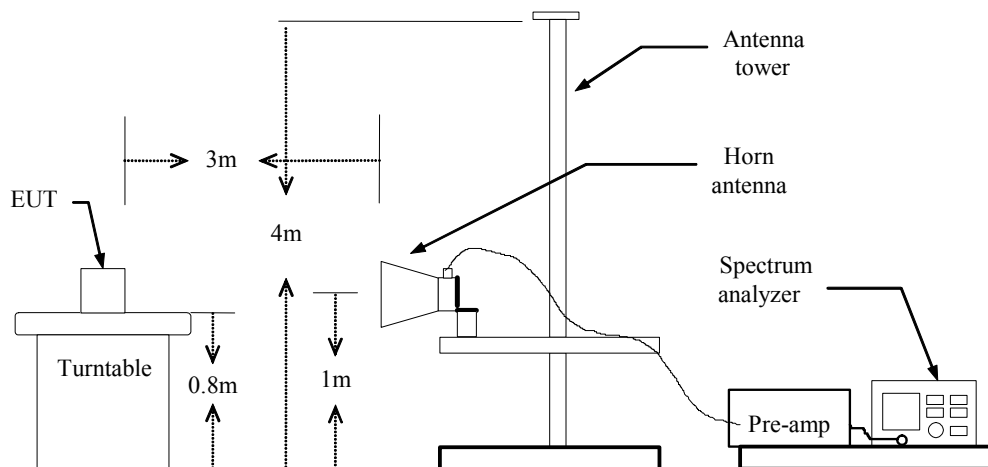

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

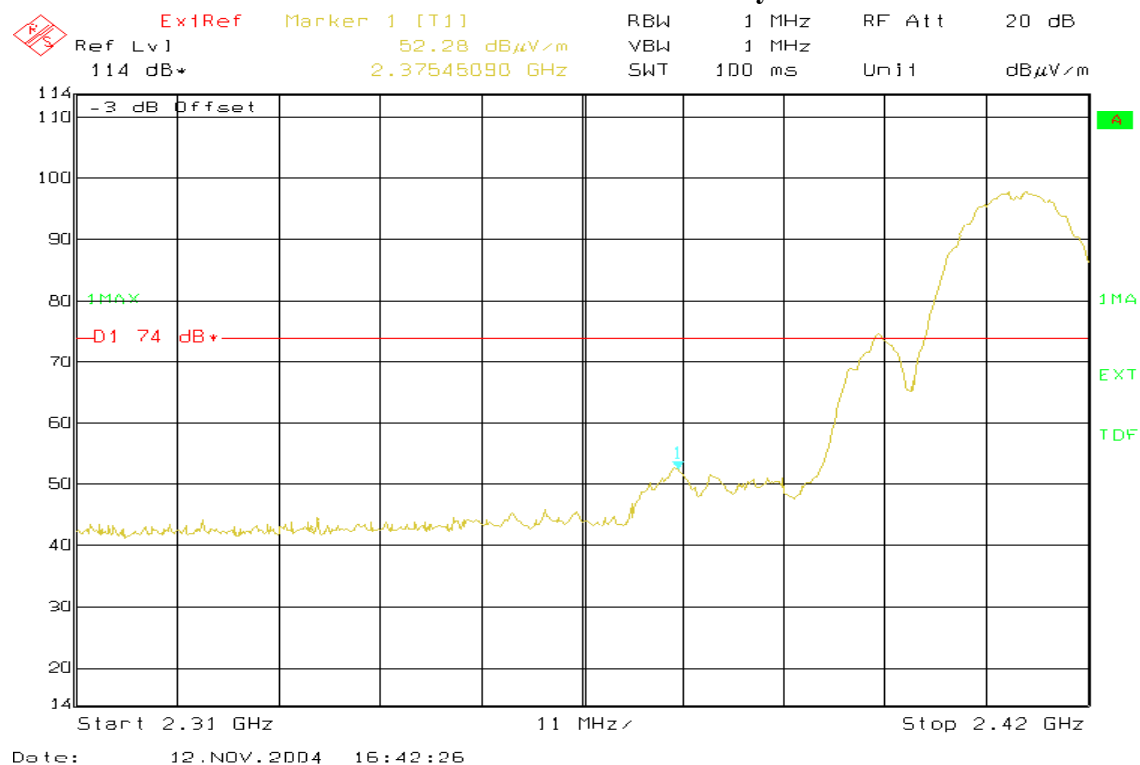

Detector mode: Average


Polarity: Vertical

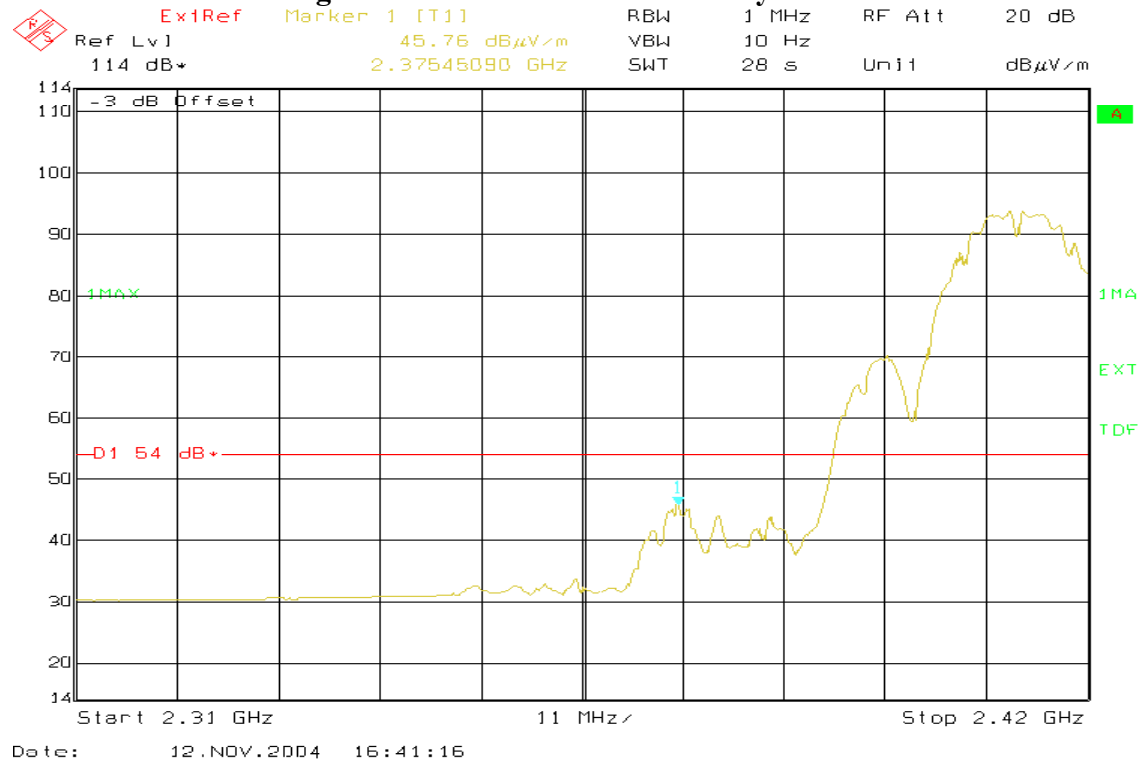




Detector mode: Peak

Polarity: Horizontal

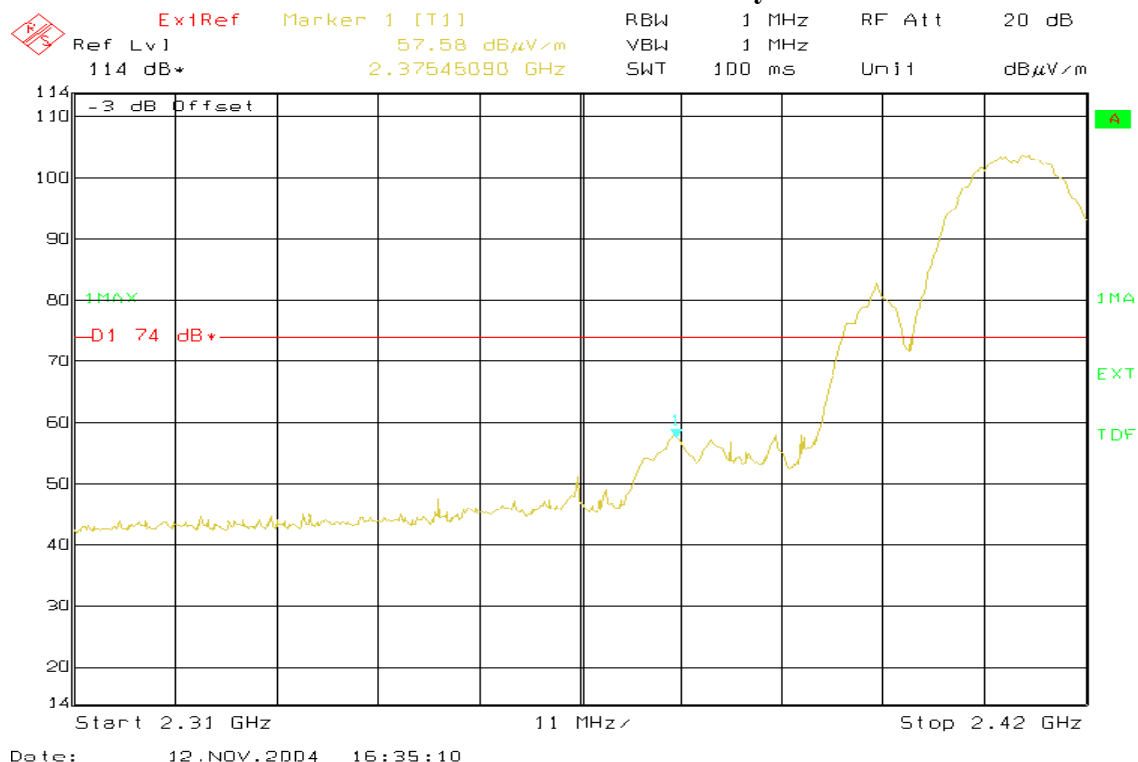

Detector mode: Average

Polarity: Horizontal

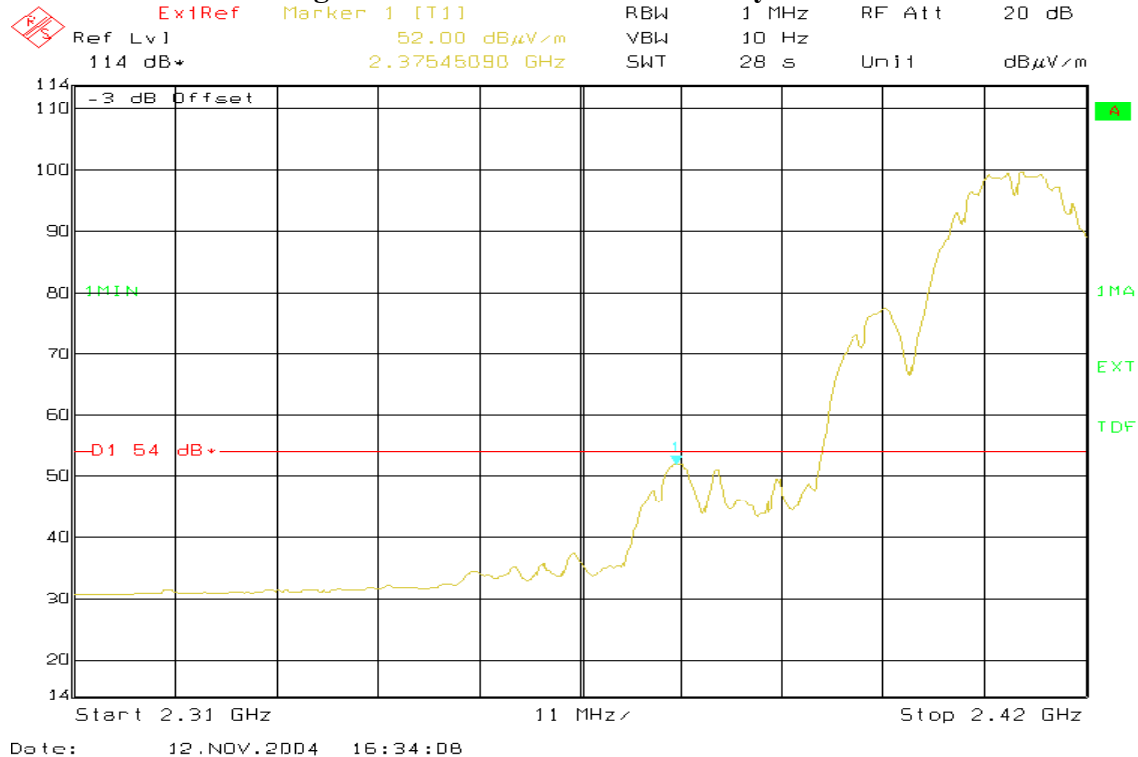




Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

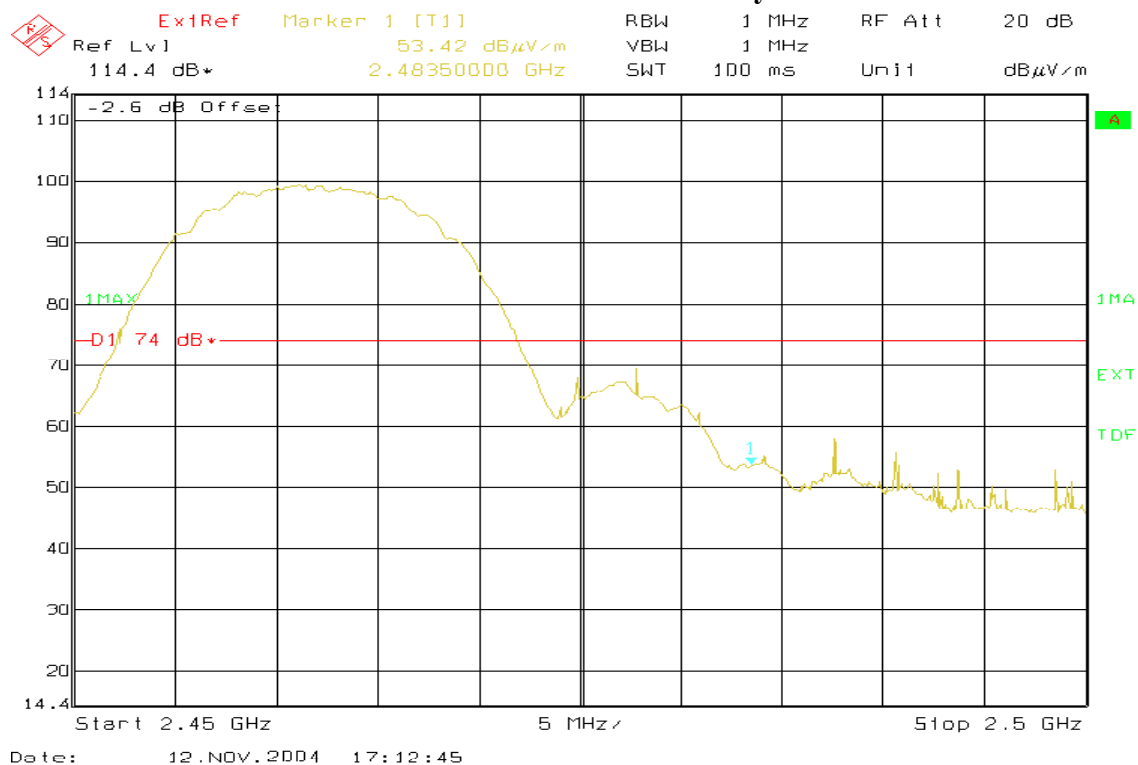

Detector mode: Average


Polarity: Vertical

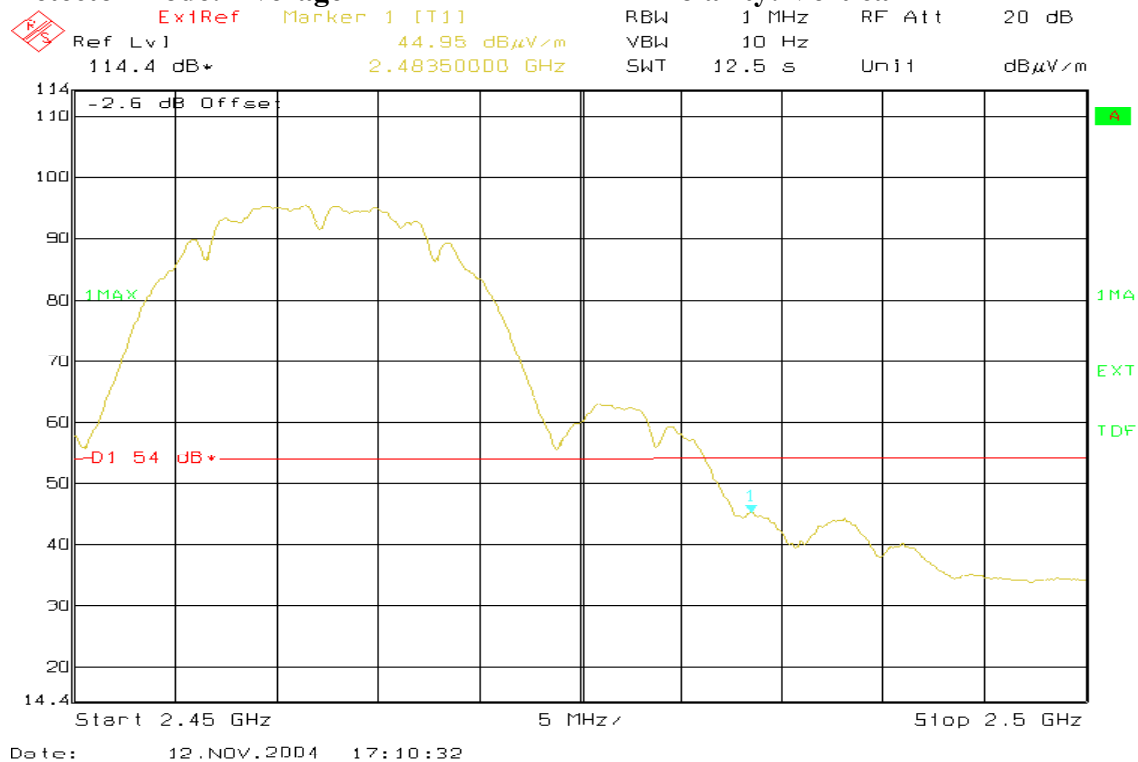




Detector mode: Peak

Polarity: Horizontal

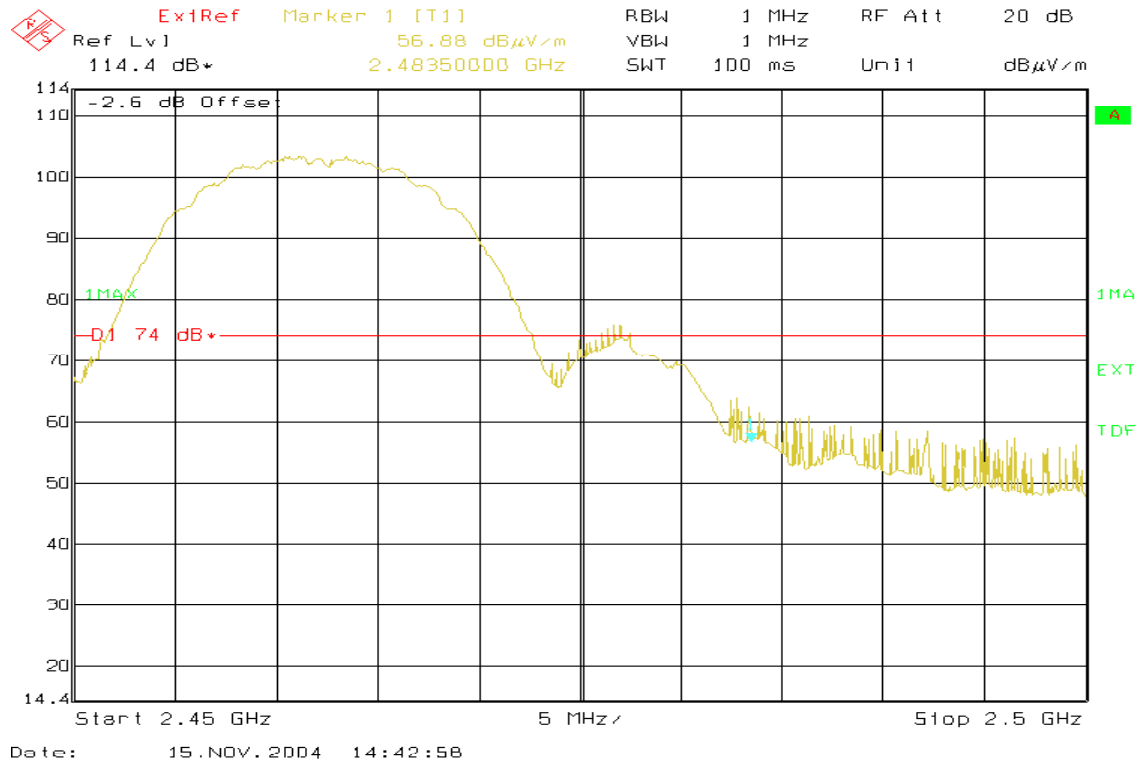

Detector mode: Average

Polarity: Horizontal

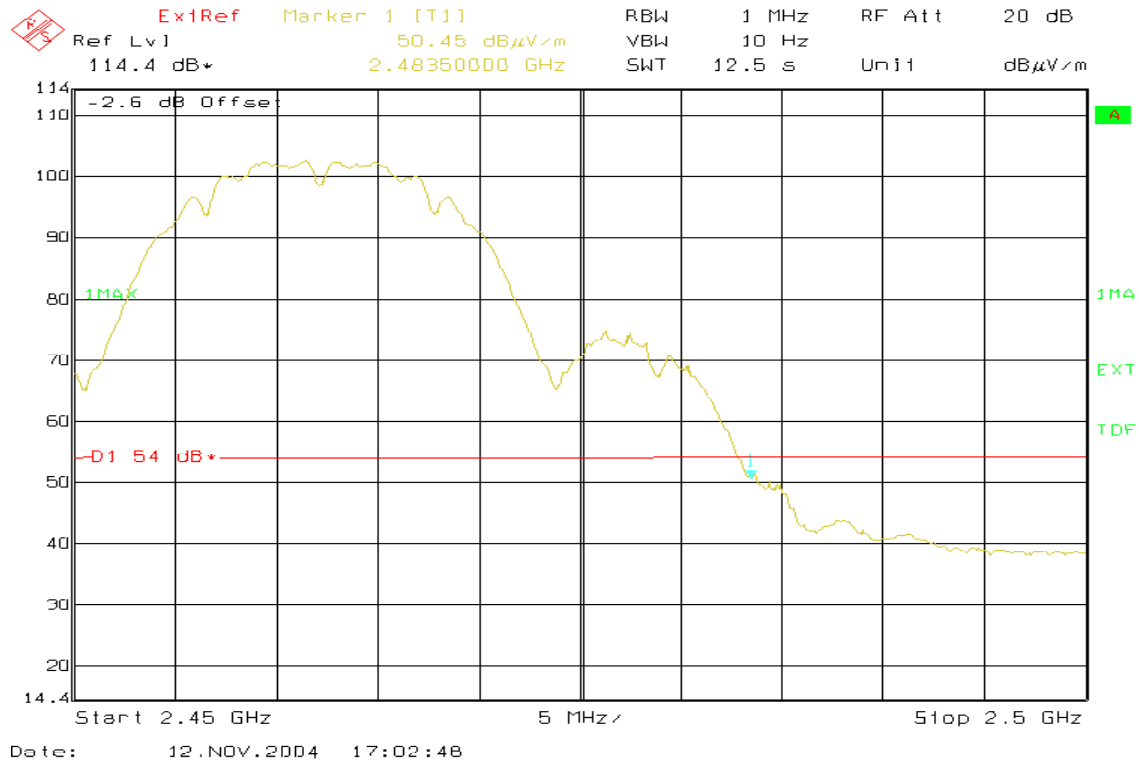




Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

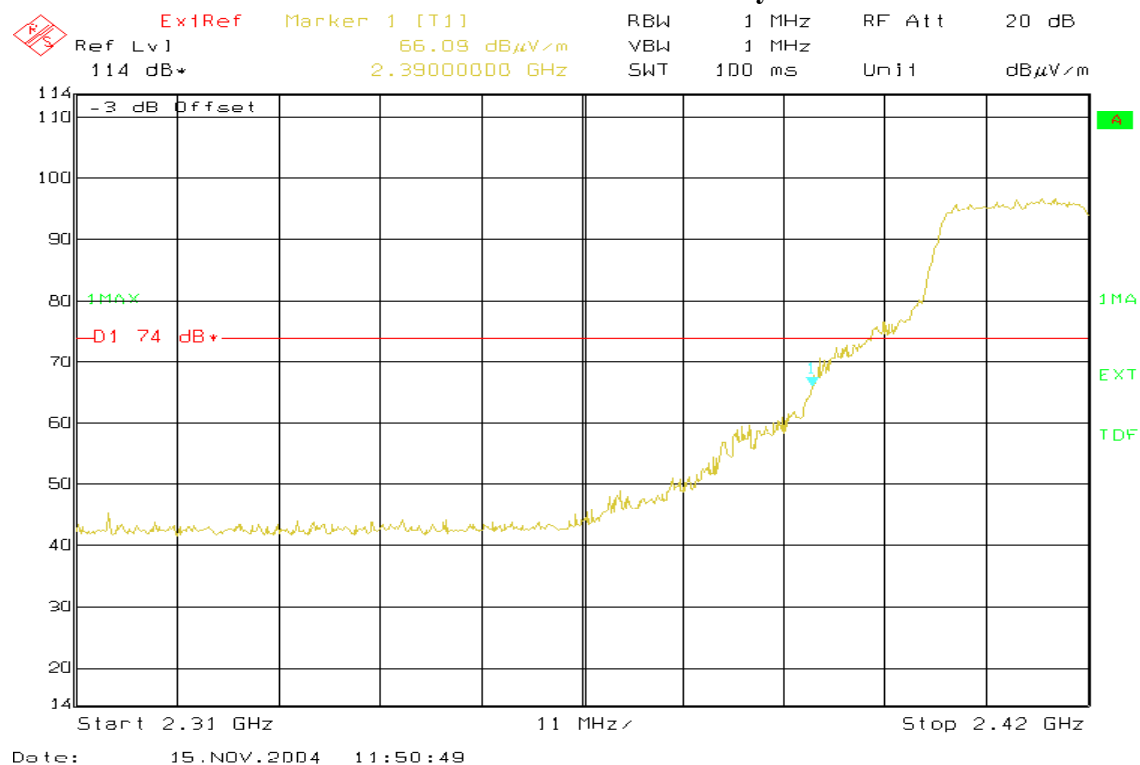

Detector mode: Average


Polarity: Vertical

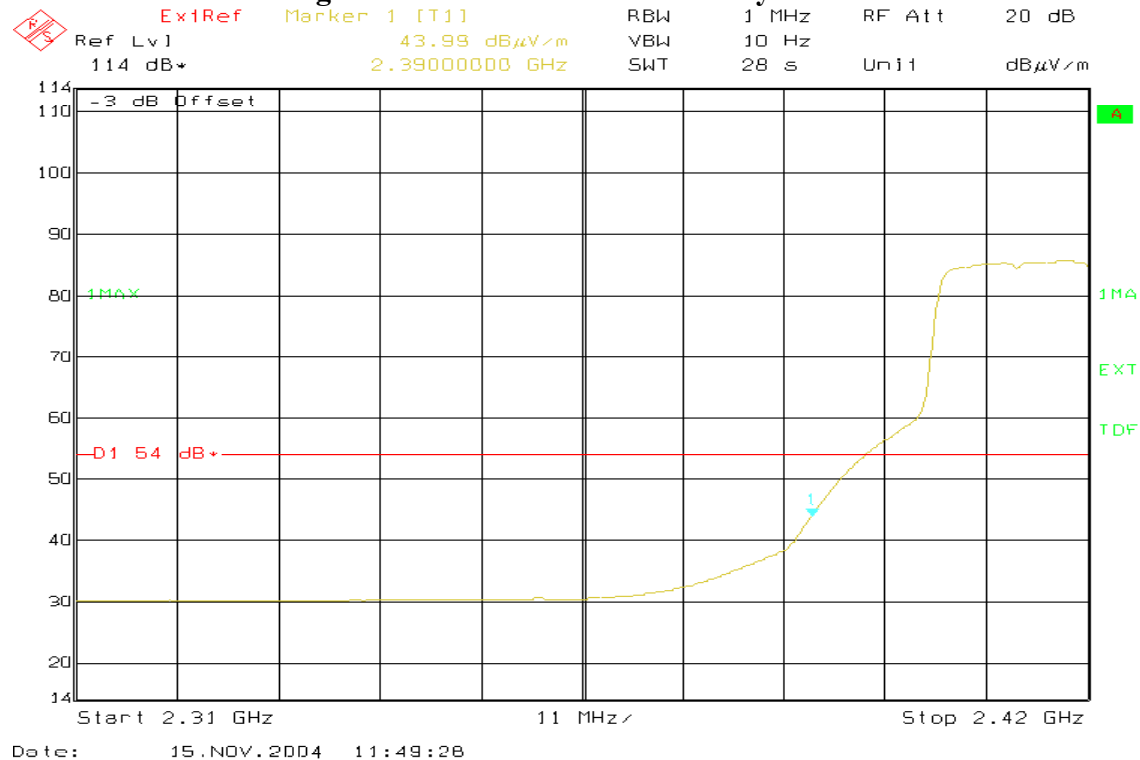




Detector mode: Peak

Polarity: Horizontal

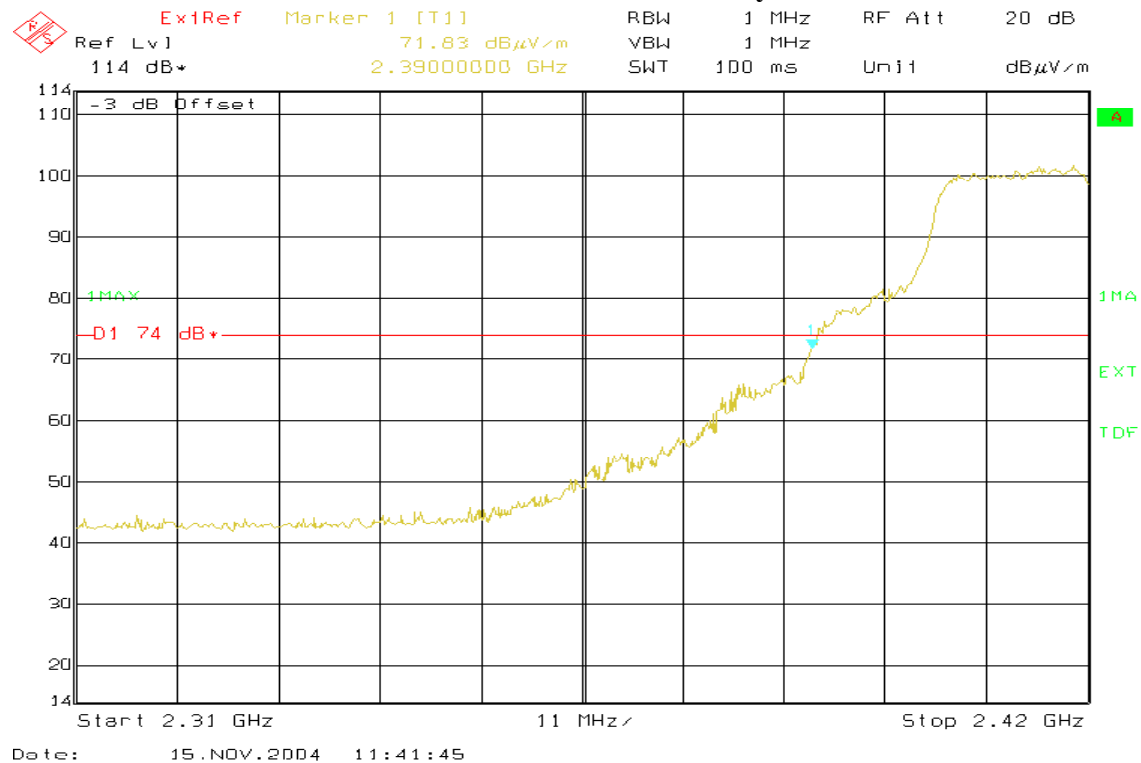

Detector mode: Average

Polarity: Horizontal

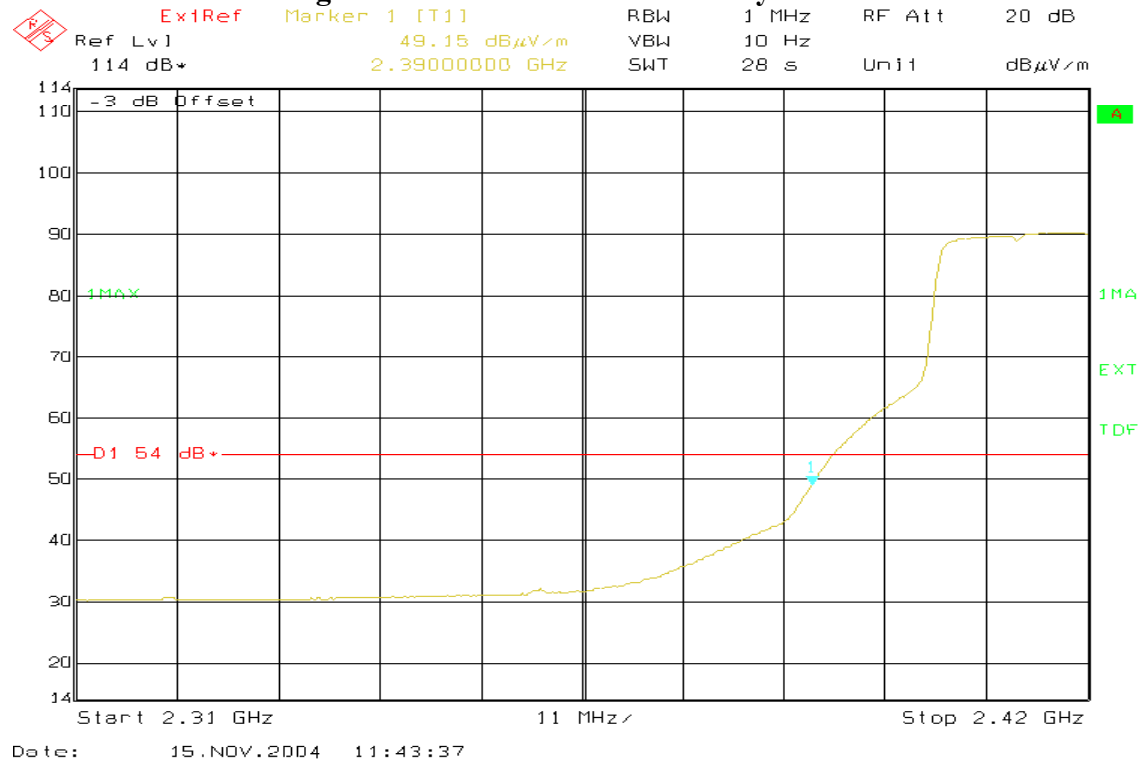




Band Edges (IEEE 802.11g mode/ CH High)


Detector mode: Peak

Polarity: Vertical

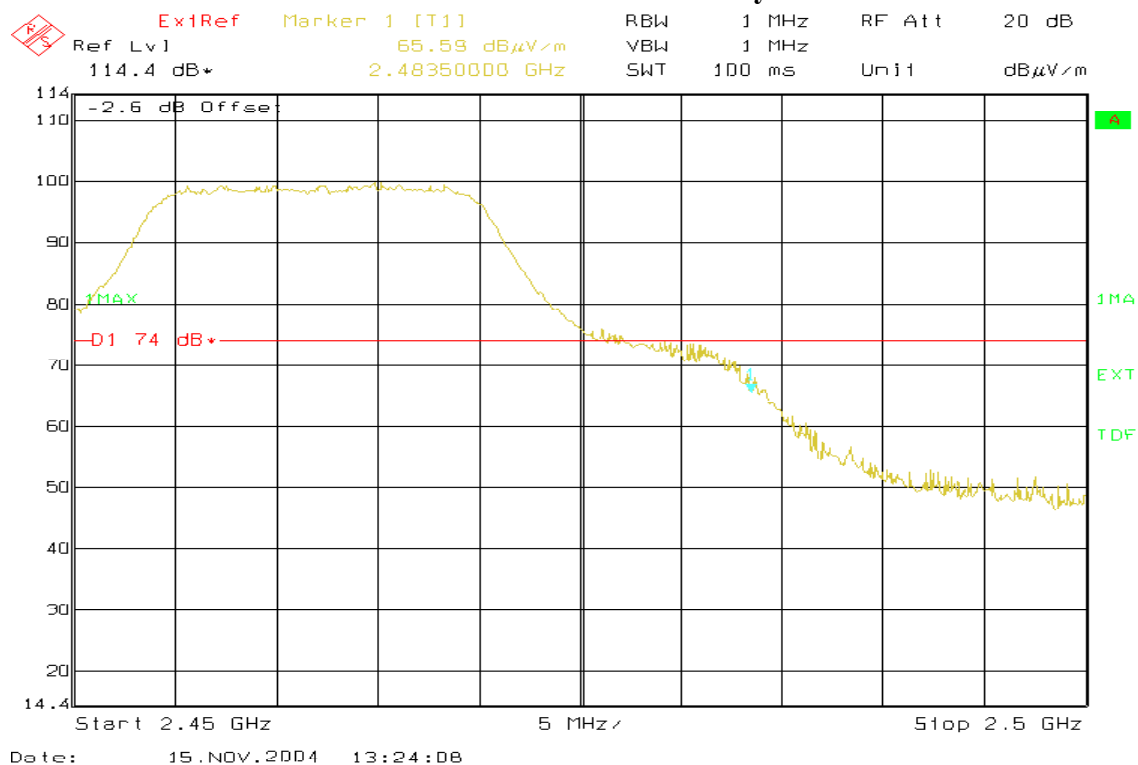

Detector mode: Average


Polarity: Vertical

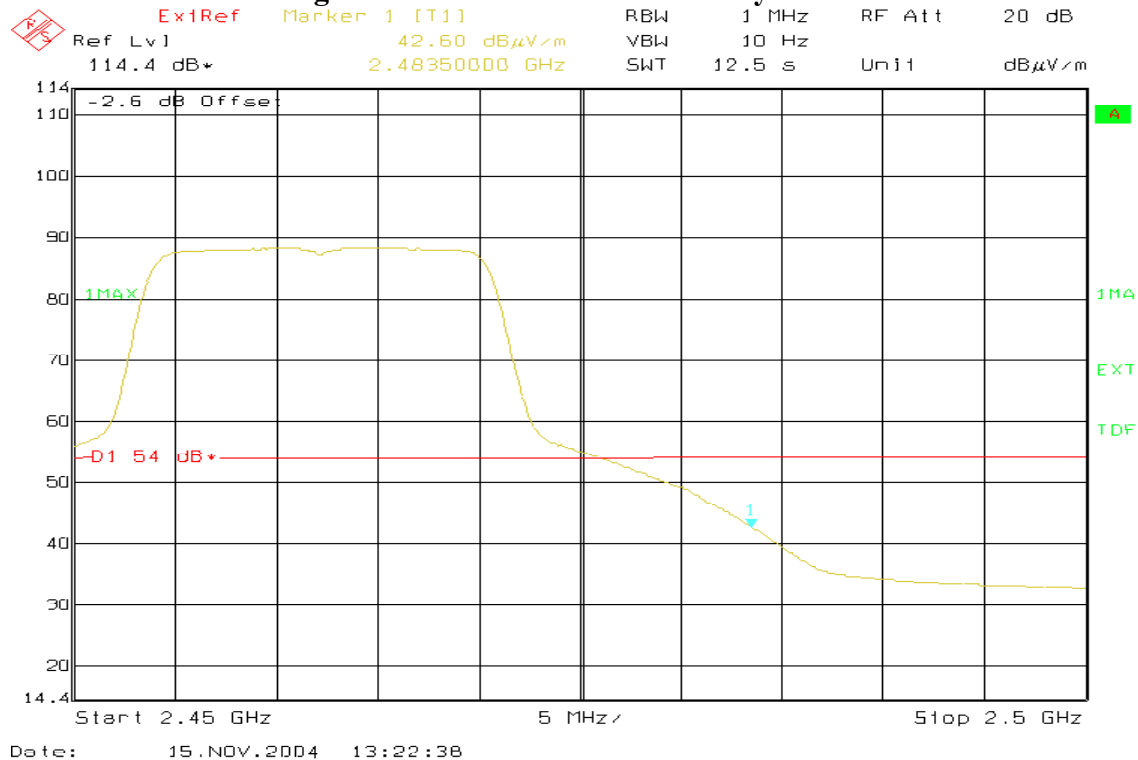




Detector mode: Peak

Polarity: Horizontal

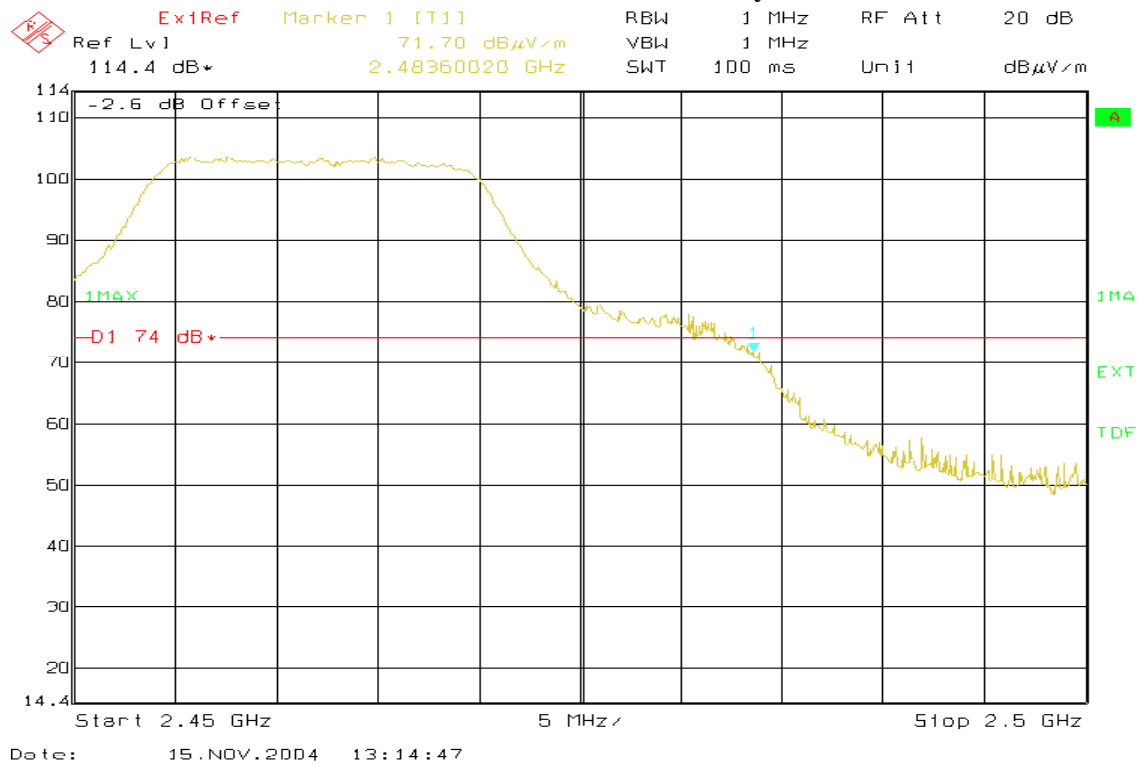

Detector mode: Average

Polarity: Horizontal

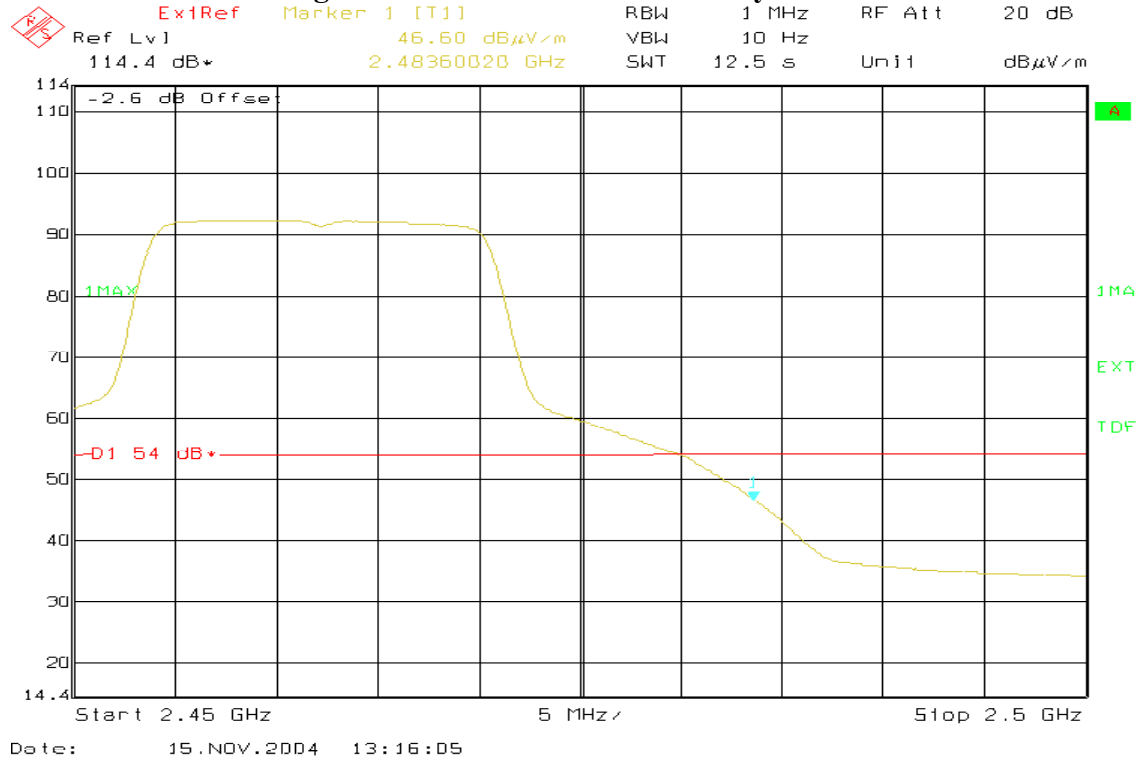




Band Edges (IEEE 802.11g Turbo mode / CH 2390MHz)


Detector mode: Peak

Polarity: Vertical

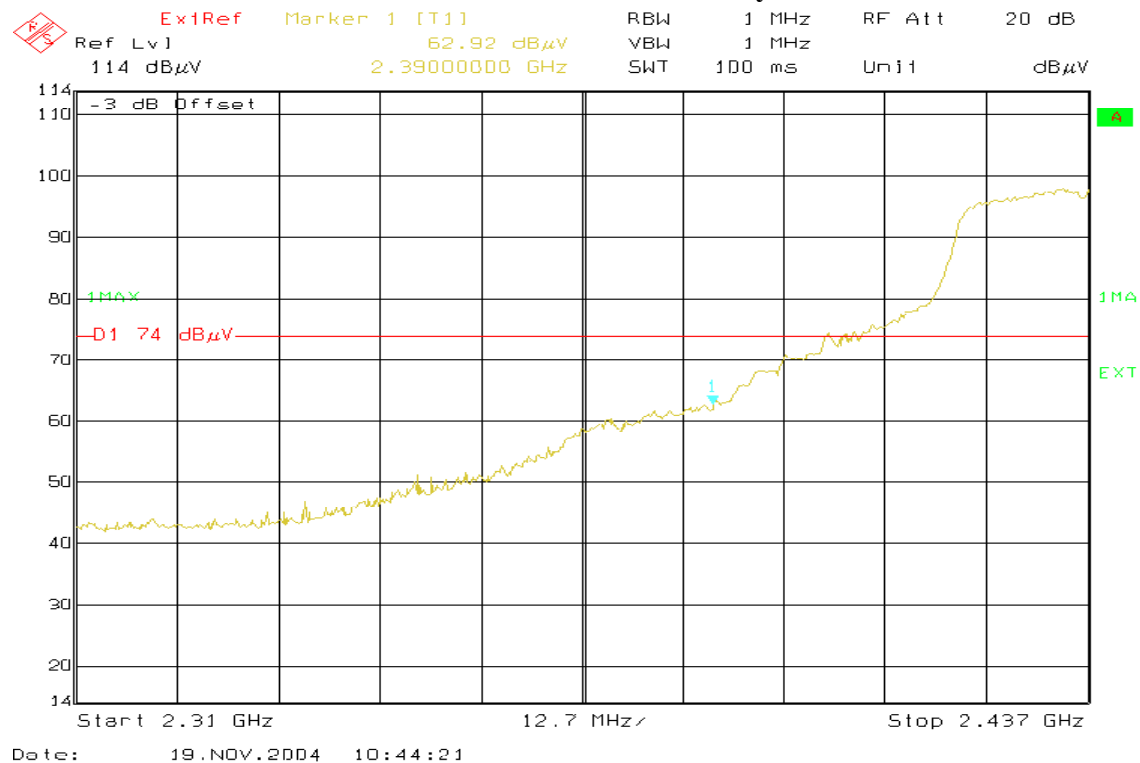

Detector mode: Average


Polarity: Vertical

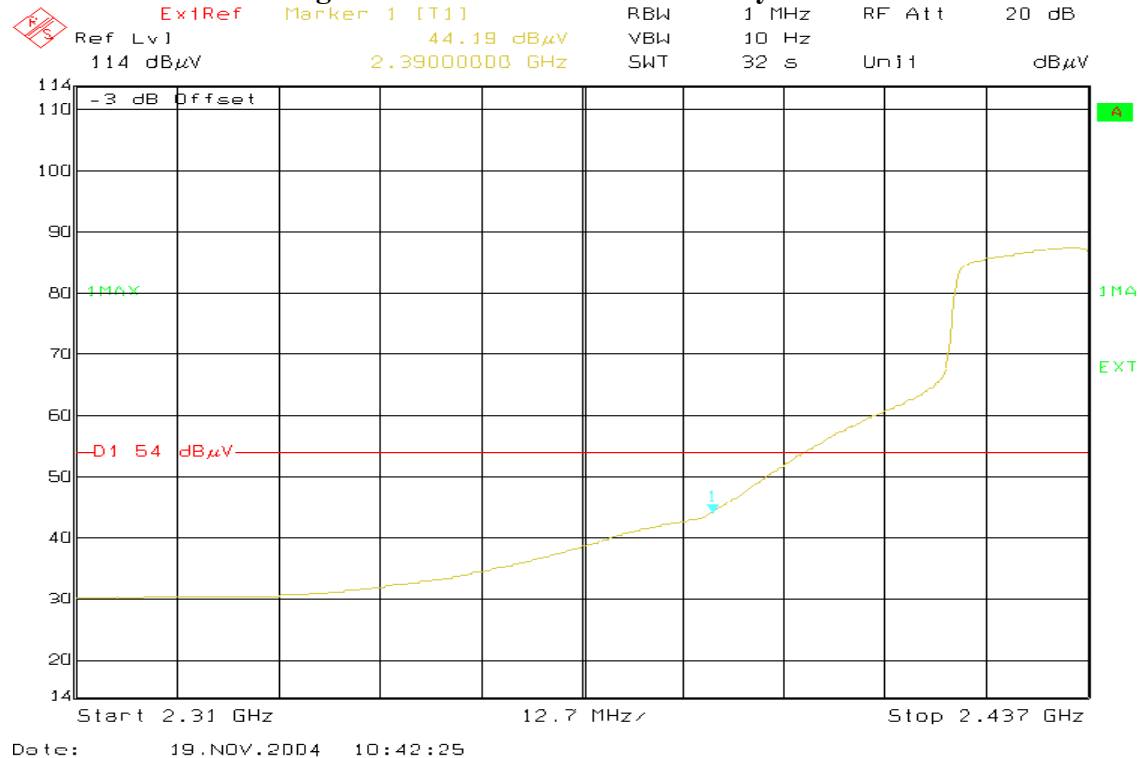




Detector mode: Peak

Polarity: Horizontal

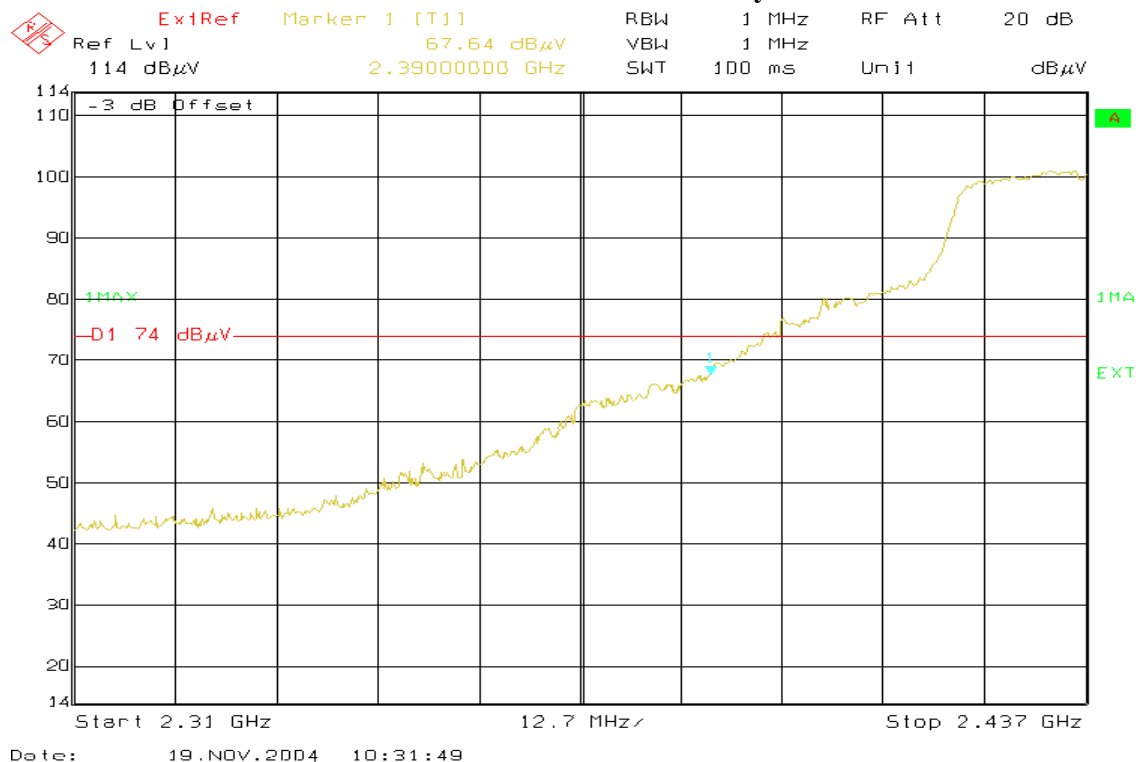

Detector mode: Average

Polarity: Horizontal

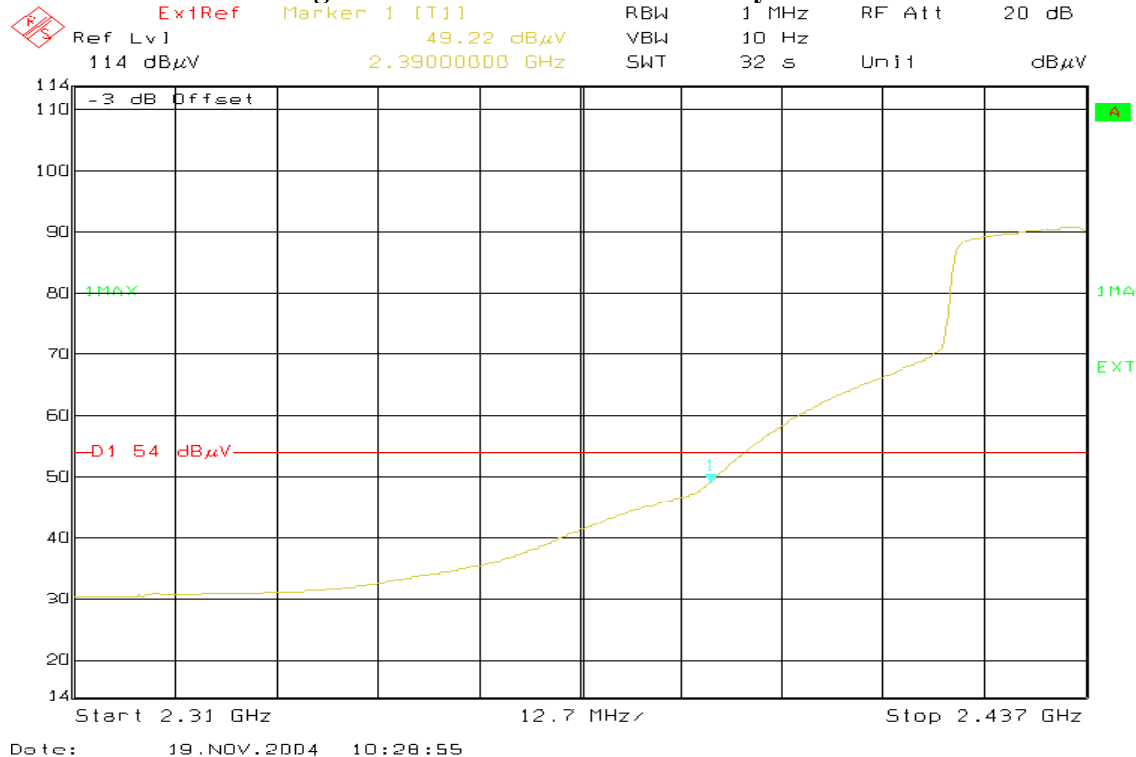




Band Edges (IEEE 802.11g Turbo mode / CH 2483.5MHz)


Detector mode: Peak

Polarity: Vertical

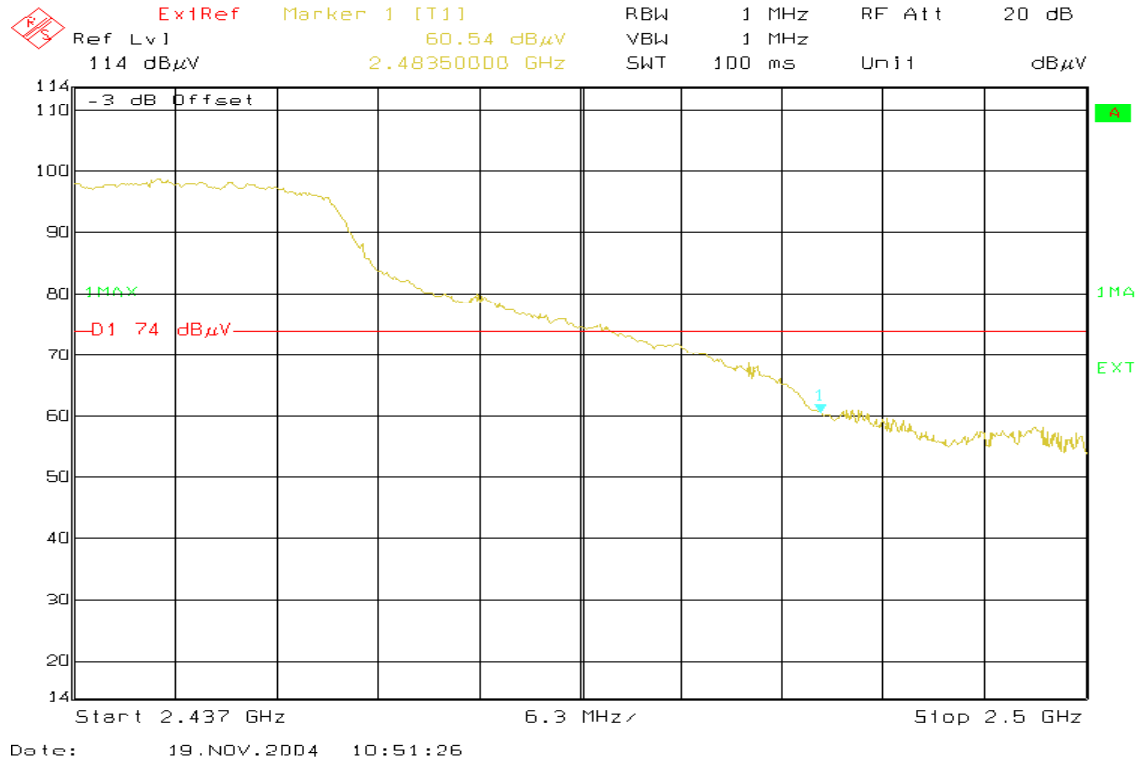

Detector mode: Average


Polarity: Vertical

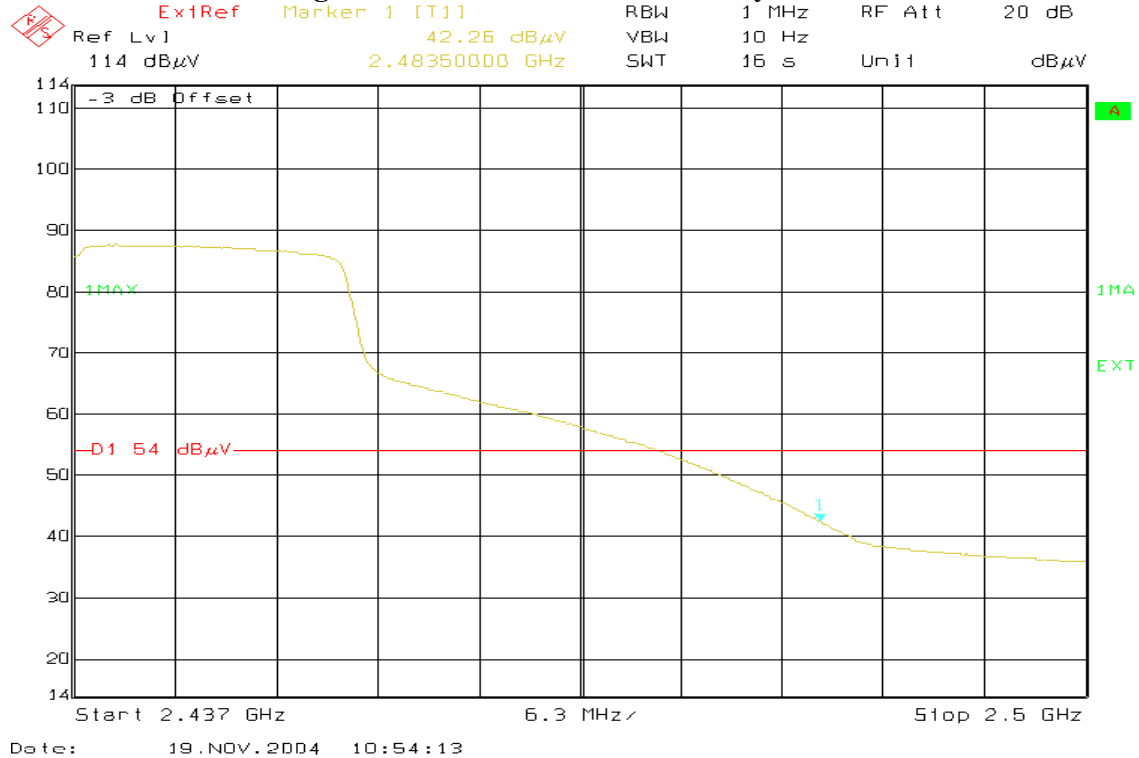



Detector mode: Peak


Polarity: Horizontal

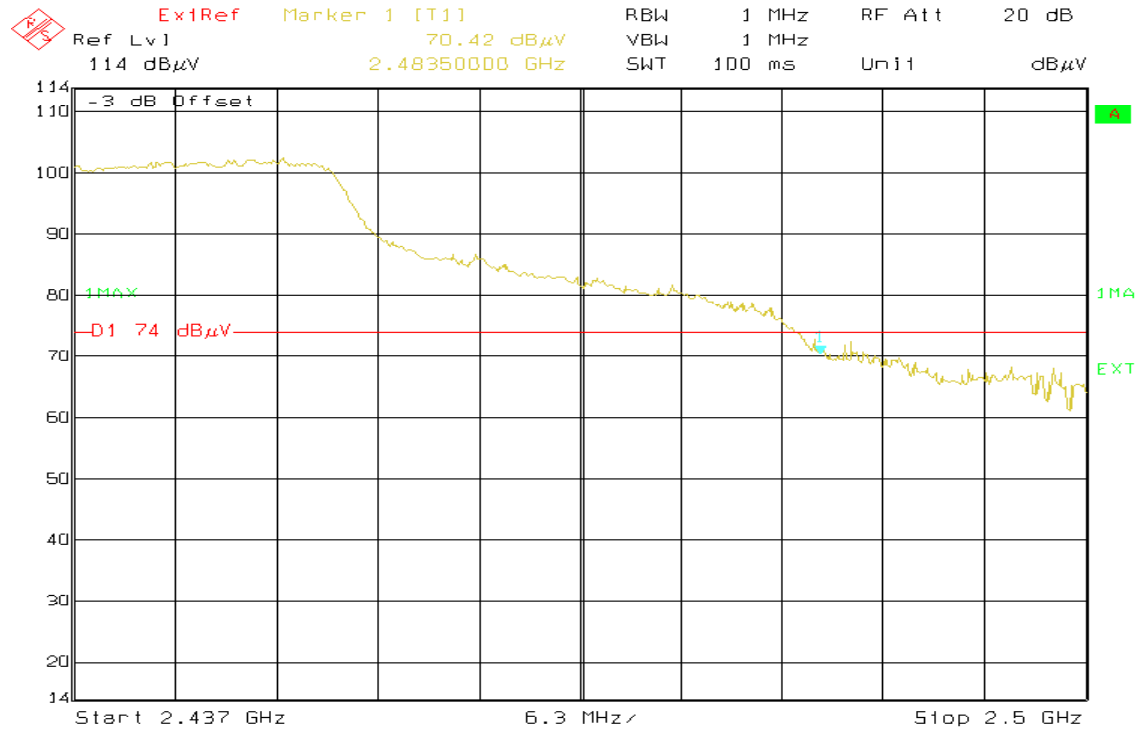

Date: 19.NOV.2004 10:25:13

Detector mode: Average

Polarity: Horizontal

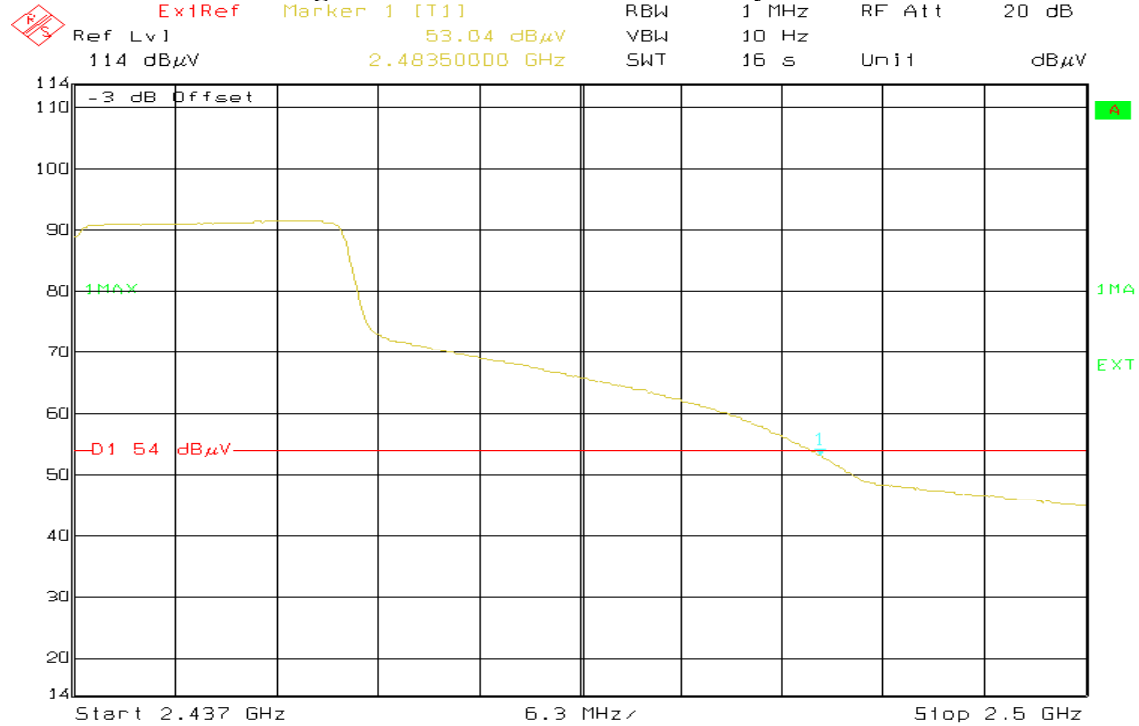

Date: 19.NOV.2004 10:23:30



7.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

**TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-17.11	11.60	-5.51	8.00	PASS
Mid	2437	-15.47	11.60	-3.87		PASS
High	2462	-15.74	11.60	-4.14		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency		Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	Base mode	2412	-17.81	11.60	-6.21	8.00	PASS
Mid		2437	-17.30	11.60	-5.70		PASS
High		2462	-16.71	11.60	-5.11		PASS
Mid	Turbo mode	2437	-17.73	11.10	-6.63		PASS

Test mode: IEEE 802.11a mode


Channel	Frequency		Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	Base mode	5745	-24.16	11.60	-12.56	8.00	PASS
Mid		5785	-24.87	11.60	-13.27		PASS
High		5825	-23.29	11.60	-11.69		PASS
Low	Turbo mode	5760	-24.87	11.10	-13.77		PASS
High		5800	-26.19	11.10	-15.09		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

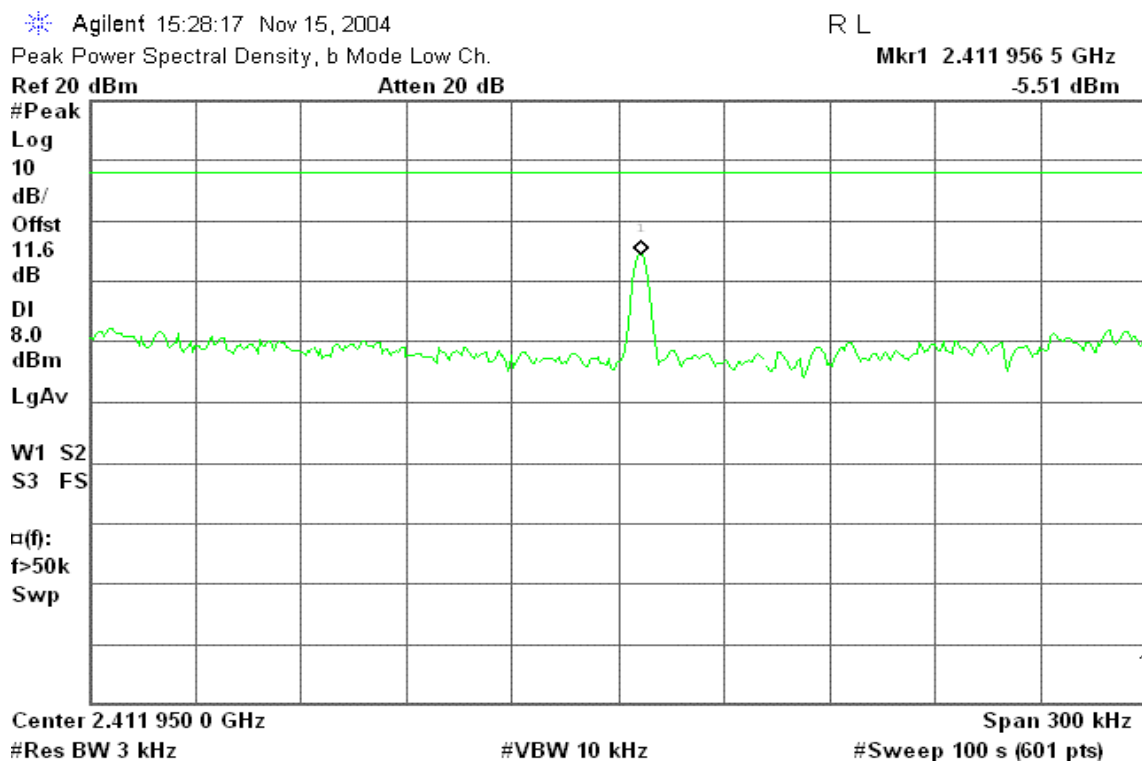


PPSD (CH Mid)

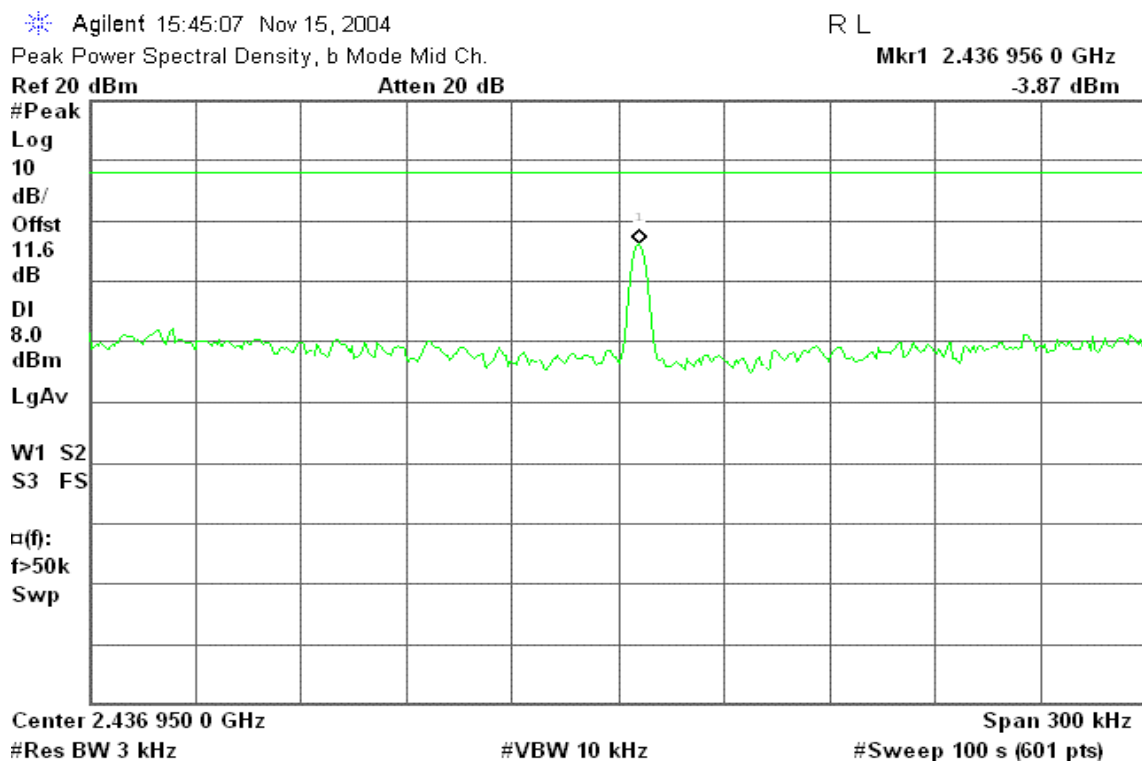




PPSD (CH High)

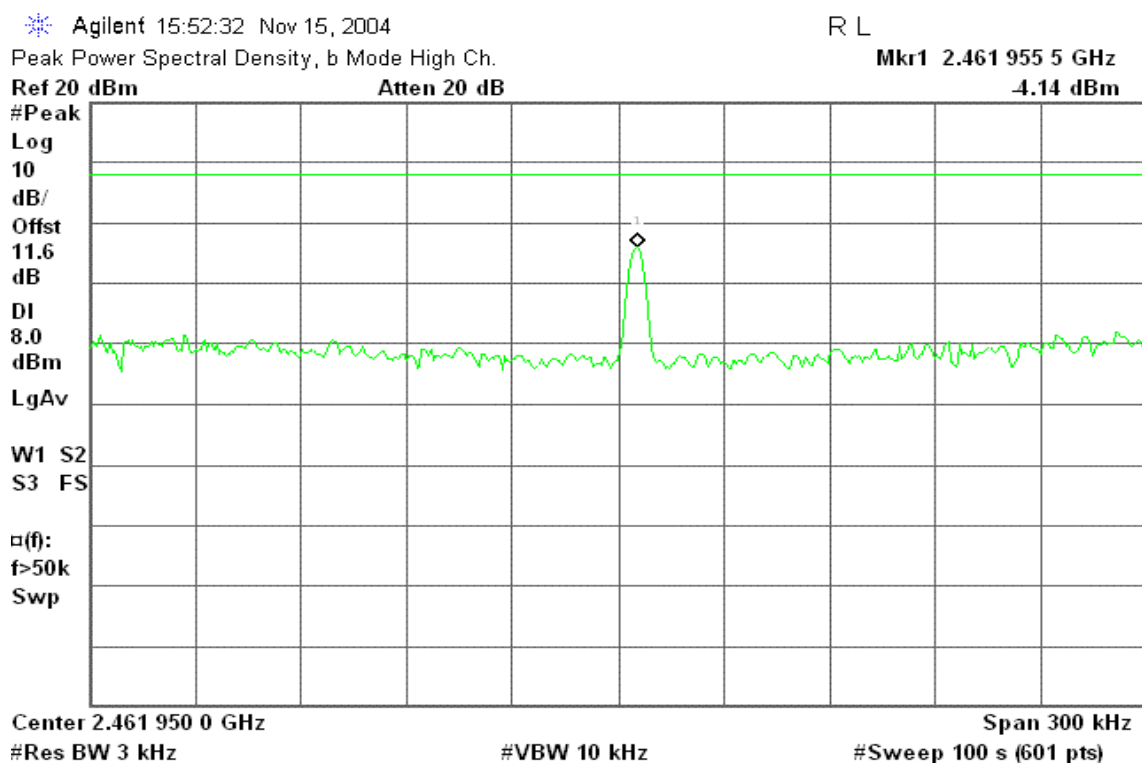


IEEE 802.11g mode

PPSD (CH Low)

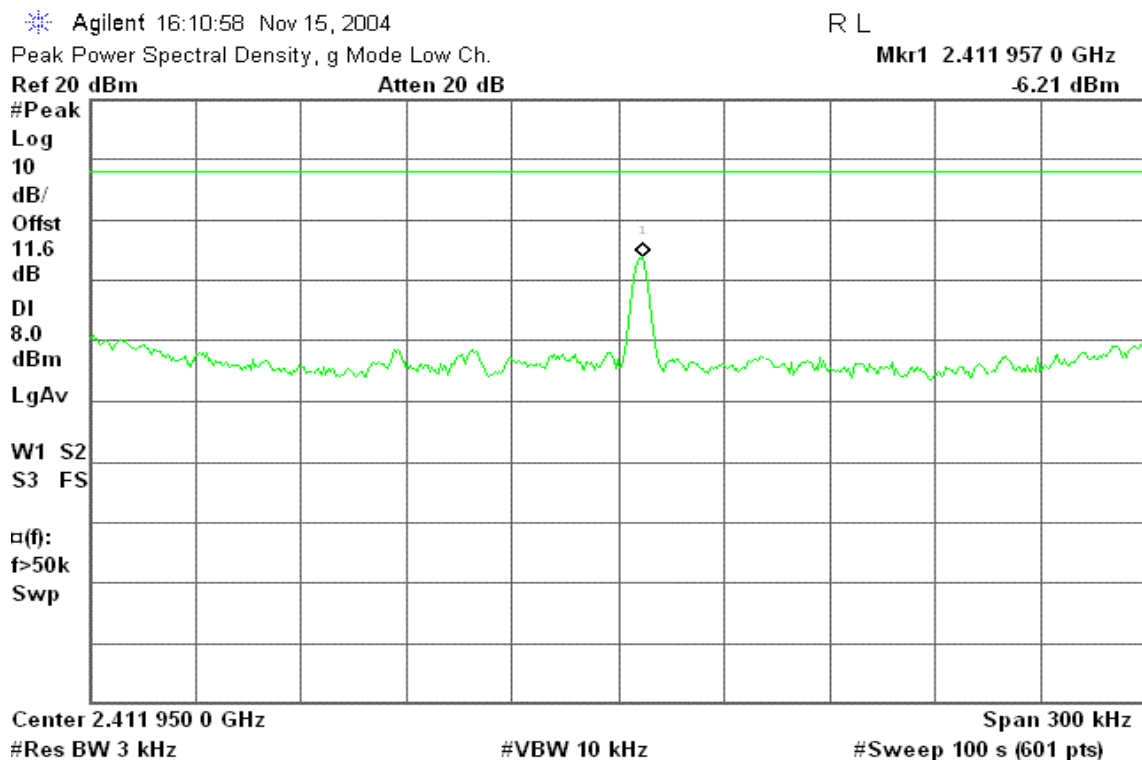




PPSD (CH Mid)

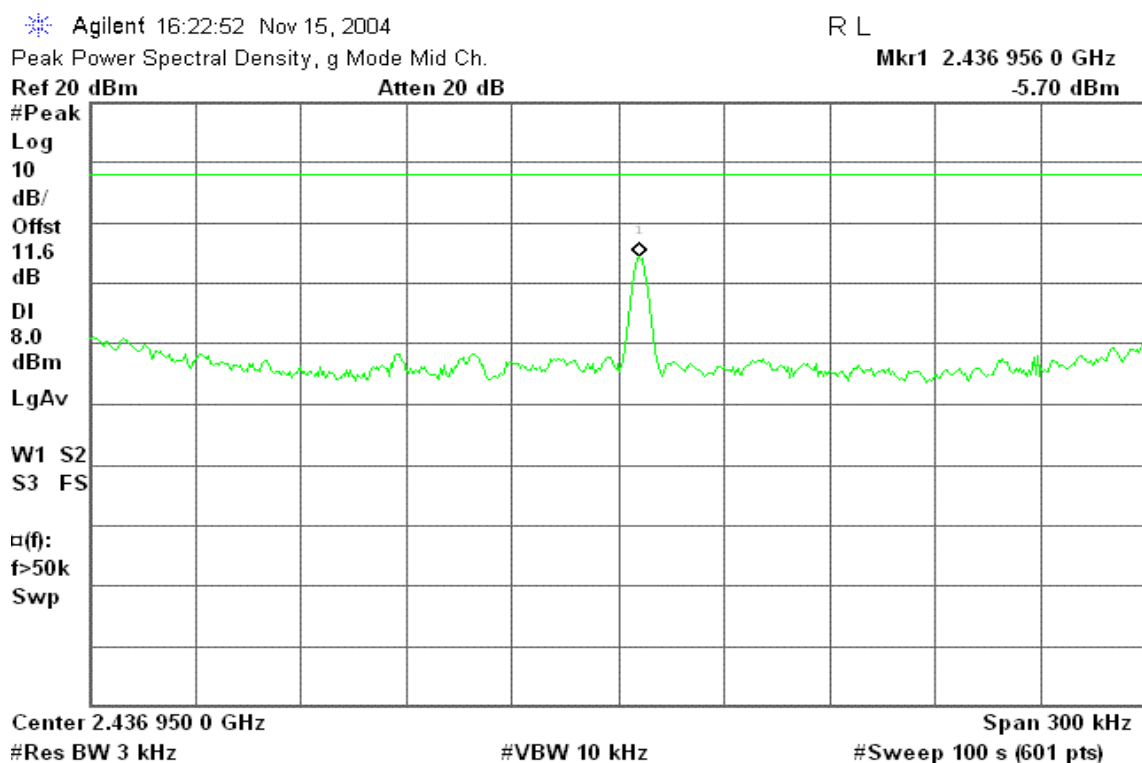

PPSD (CH High)

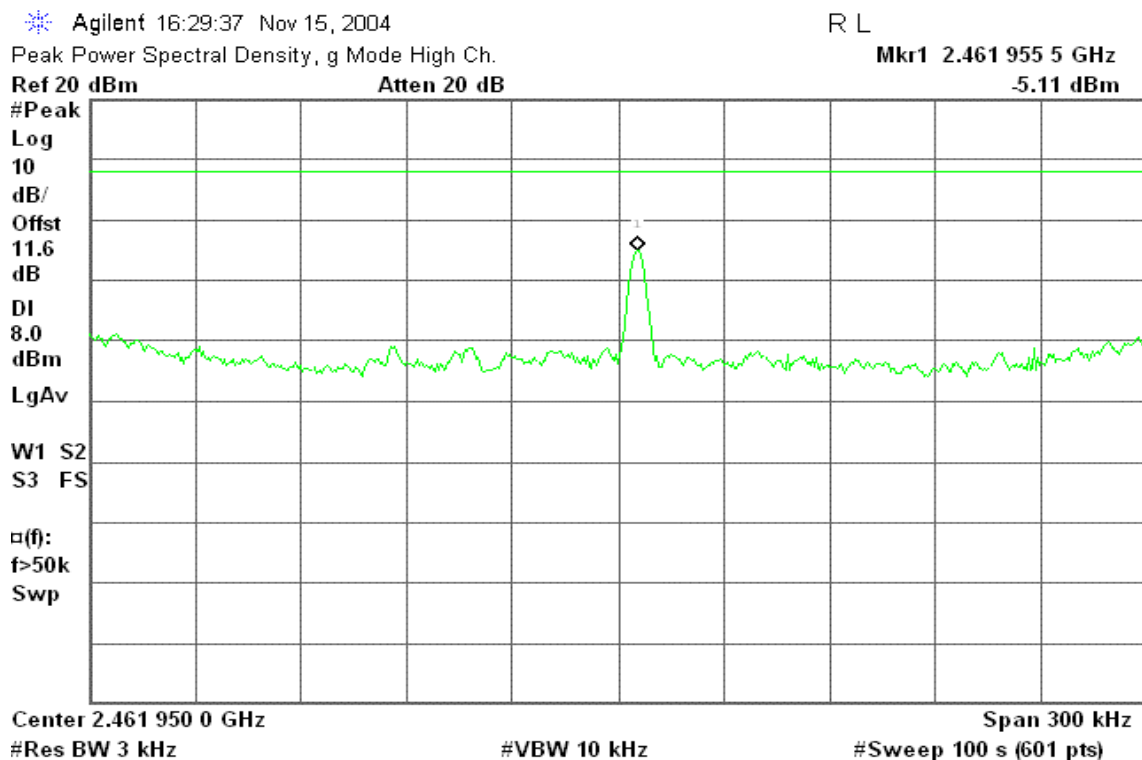



IEEE 802.11g Turbo mode

PPSD

Agilent 14:30:02 Nov 19, 2004

R L

Mkr1 2.436 956 0 GHz

-6.63 dBm

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.1

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f>50k

Swp

Center 2.436 950 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11a Base mode

PPSD (CH Low)

Agilent 17:43:52 Nov 15, 2004

R L

Mkr1 5.740 608 5 GHz

-12.56 dBm

Peak Power Spectral Density, a Mode Low Ch.

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11.6

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f>50k

Swp

Center 5.740 600 0 GHz

Span 300 kHz


#Res BW 3 kHz

#VBW 10 kHz


#Sweep 100 s (601 pts)



PPSD (CH Mid)

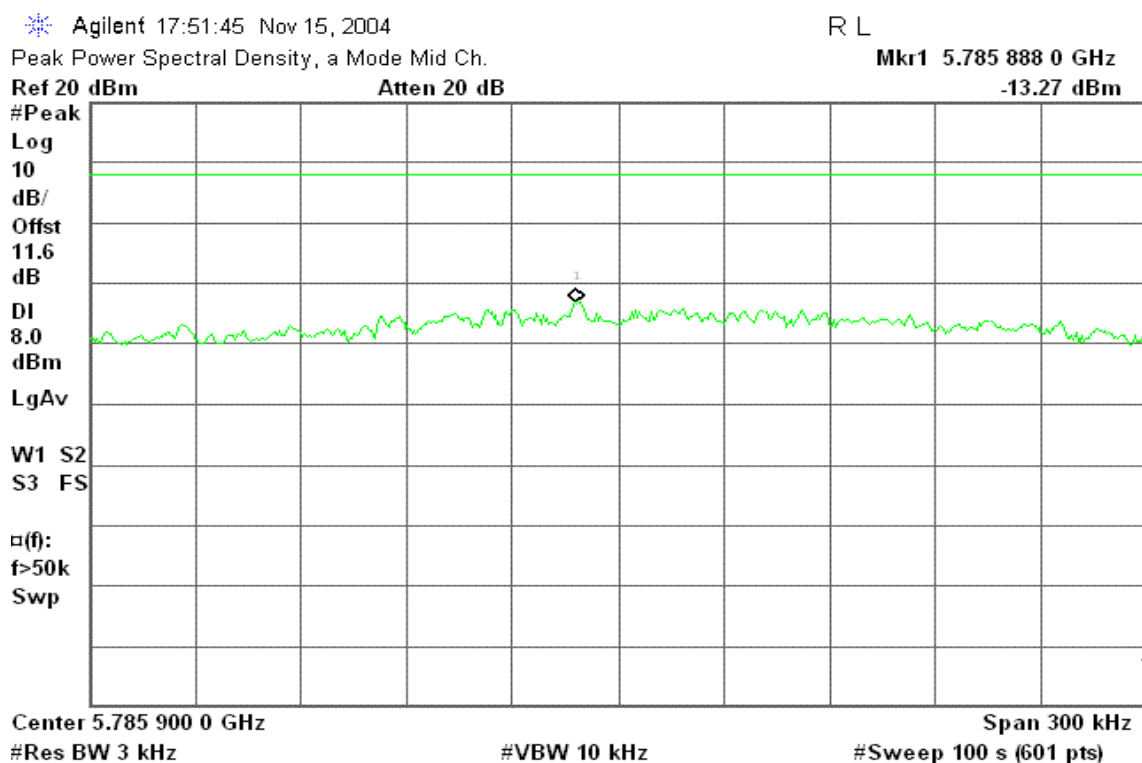

PPSD (CH High)

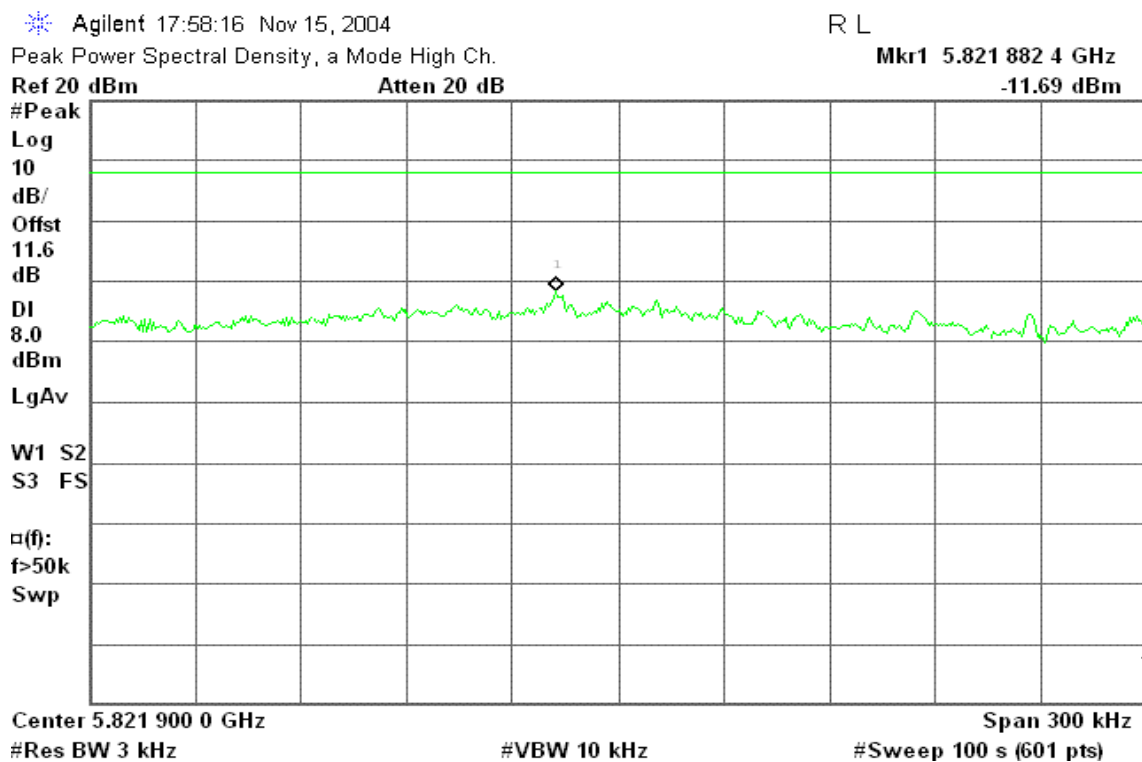



IEEE 802.11a Turbo mode


PPSD (CH Low)

Agilent 15:21:56 Nov 23, 2004

R L

Mkr1 5.760 009 8 GHz

-13.77 dBm

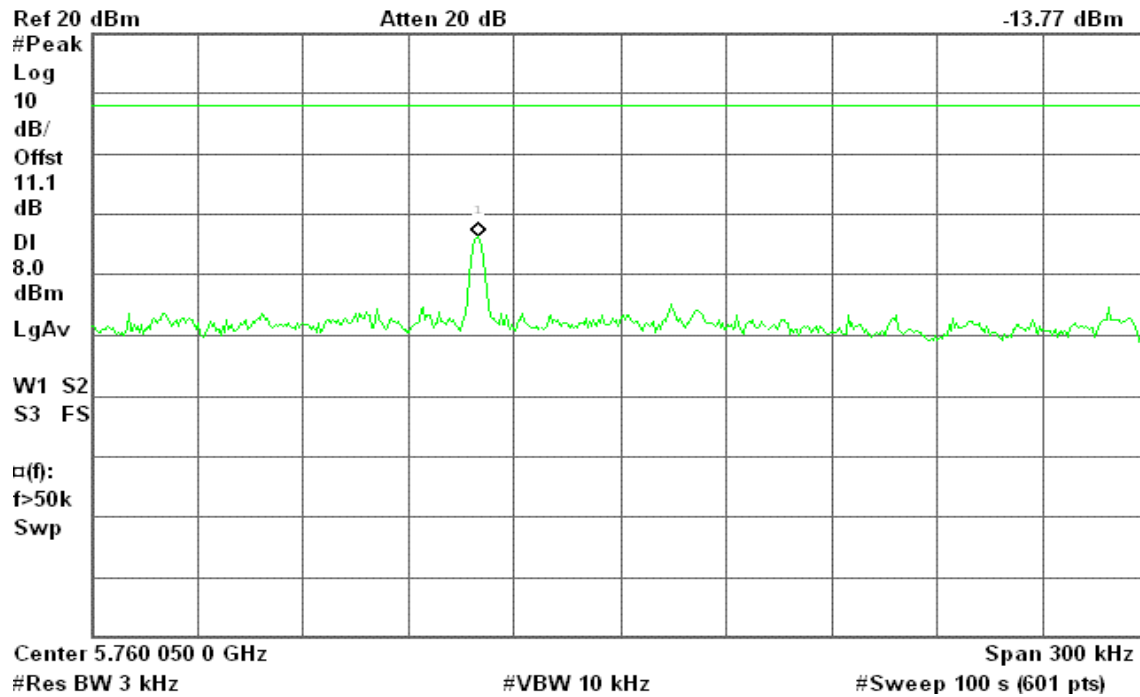


PPSD (CH High)

Agilent 15:30:38 Nov 23, 2004

R L

Mkr1 5.802 452 9 GHz

-15.09 dBm

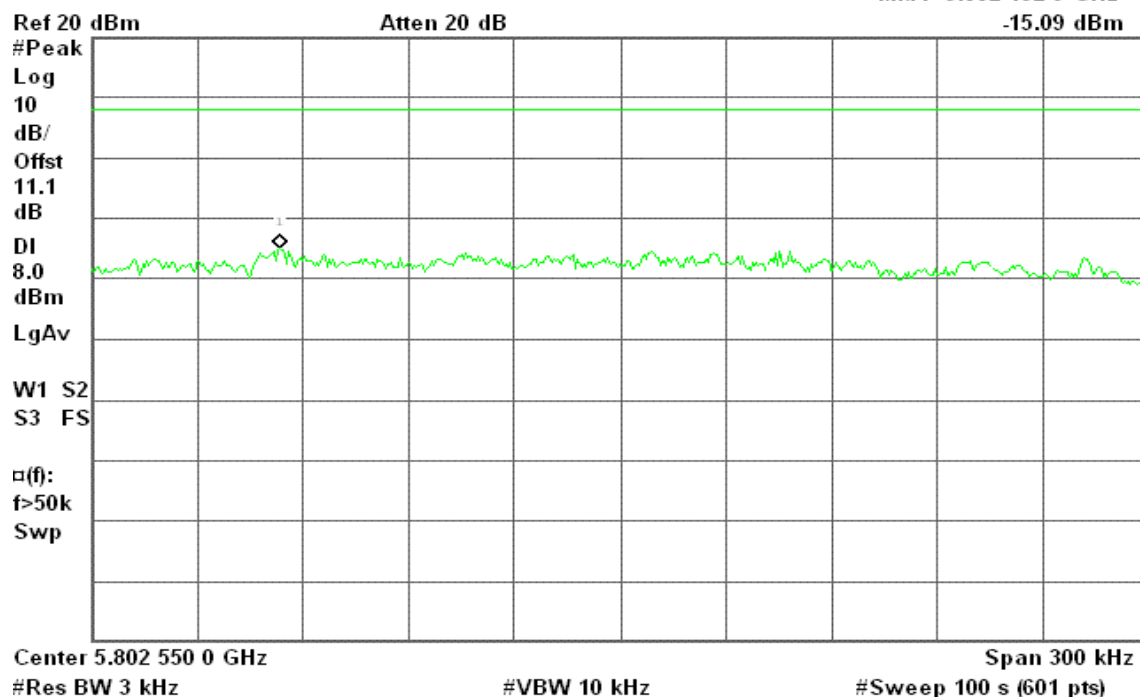



7.5 RADIO FREQUENCY EXPOSURE

LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

EUT Specification

EUT	Wireless USB Adapter
Frequency band (Operating)	☒ WLAN: 2.412GHz ~ 2.462GHz ☐ WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz ☒ WLAN: 5.745GHz ~ 5.825GHz ☐ Others
Device category	☒ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others
Exposure classification	☐ Occupational/Controlled exposure (S = 5mW/cm ²) ☒ General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	☐ Single antenna ☒ Multiple antennas (One for 2.4GHz, One for 5GHz) ☐ Tx diversity ☐ Rx diversity ☒ Tx/Rx diversity
Max. output power	IEEE 802.11a: 16.07 dBm (40.46mW) IEEE 802.11b: 17.19 dBm (52.36mW) IEEE 802.11g: 17.17 dBm (52.12mW)
Antenna gain (Max)	IEEE802.11a: 2.0 dBi (Numeric gain: 1.58) IEEE802.11b/g: 0 dBi (Numeric gain: 1)
Evaluation applied	☐ MPE Evaluation ☒ SAR Evaluation*

Note:

1. The maximum output power is 17.19dBm (52.36mW) at 2437MHz (with 1.58 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

TEST RESULTS

No non-compliance noted.

Note: Please refer to the separated SAR report.



7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

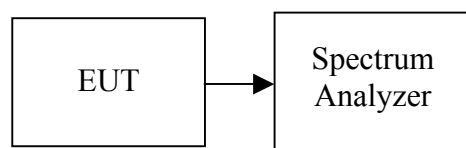

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

IEEE 802.11b mode

CH Low

* Agilent 15:40:03 Nov 15, 2004

L

Spurious, b Mode Low Ch.

Mkr4 2.68 GHz

Ref 20 dBm

Atten 20 dB

-46.51 dBm

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-16.6

dBm

LgAv

V1 S2

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.74 GHz	-47.74 dBm
2	(1)	Freq	2.00 GHz	-36.17 dBm
3	(1)	Freq	2.42 GHz	3.38 dBm
4	(1)	Freq	2.68 GHz	-46.51 dBm

CH Mid

* Agilent 15:47:06 Nov 15, 2004

L

Spurious, b Mode Mid Ch.

Mkr4 2.68 GHz

Ref 20 dBm

Atten 20 dB

-46.61 dBm

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-16.0

dBm

LgAv

V1 S2

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.77 GHz	-46.58 dBm
2	(1)	Freq	2.00 GHz	-36.54 dBm
3	(1)	Freq	2.46 GHz	4.03 dBm
4	(1)	Freq	2.68 GHz	-46.61 dBm

**CH High**

* Agilent 15:53:56 Nov 15, 2004

L

Spurious, b Mode High Ch.

Mkr4 2.68 GHz

Ref 20 dBm

Atten 20 dB

-46.49 dBm

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-16.2

dBm

LgAv

V1 S2

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.80 GHz	-45.44 dBm
2	(1)	Freq	2.00 GHz	-36.35 dBm
3	(1)	Freq	2.47 GHz	3.80 dBm
4	(1)	Freq	2.68 GHz	-46.49 dBm

IEEE 802.11g mode**CH Low**

* Agilent 16:07:43 Nov 15, 2004

L

Spurious, g Mode Low Ch.

Mkr4 2.68 GHz

Ref 20 dBm

Atten 20 dB

-46.09 dBm

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-19.6

dBm

LgAv

V1 S2

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.74 GHz	-46.93 dBm
2	(1)	Freq	2.00 GHz	-36.07 dBm
3	(1)	Freq	2.39 GHz	0.35 dBm
4	(1)	Freq	2.68 GHz	-46.09 dBm



CH Mid

* Agilent 16:24:07 Nov 15, 2004

L


Spurious, g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

Mkr4 2.68 GHz

-46.35 dBm

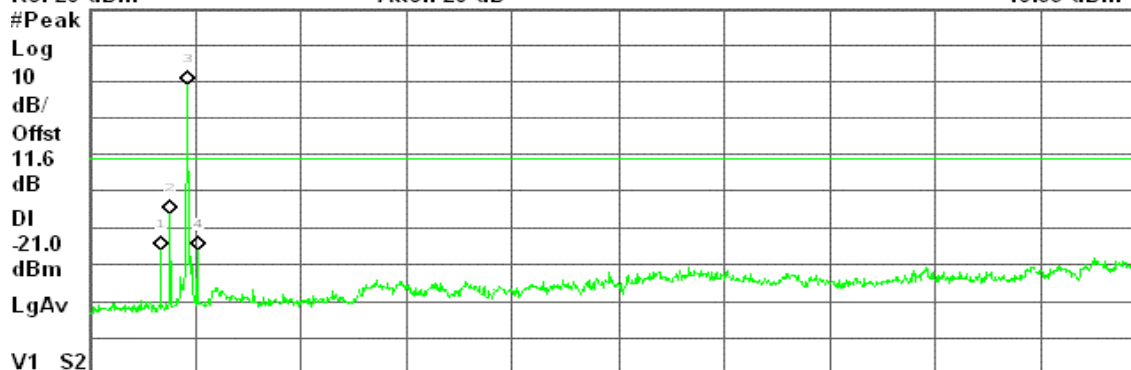

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.77 GHz	-46.36 dBm
2	(1)	Freq	2.00 GHz	-36.18 dBm
3	(1)	Freq	2.46 GHz	-0.97 dBm
4	(1)	Freq	2.68 GHz	-46.35 dBm

CH High

* Agilent 16:30:51 Nov 15, 2004

L


Spurious, g Mode High Ch.

Ref 20 dBm

Atten 20 dB

Mkr4 2.68 GHz

-46.55 dBm

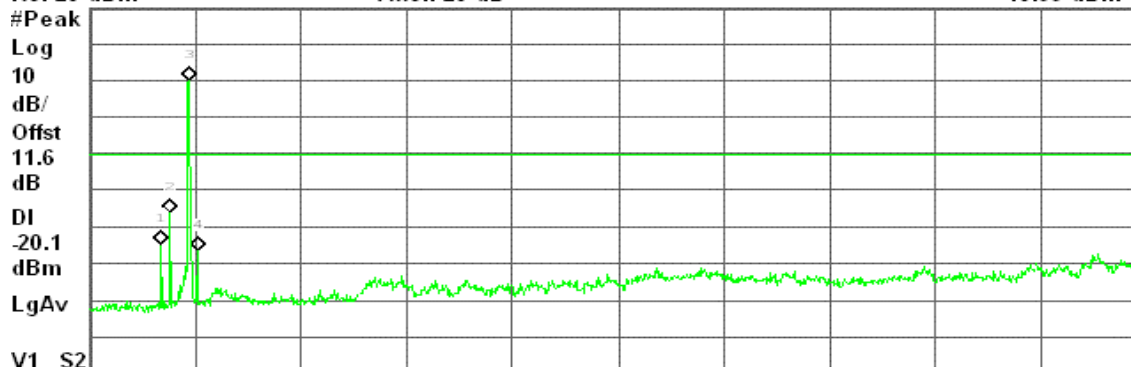

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.80 GHz	-45.15 dBm
2	(1)	Freq	2.00 GHz	-36.26 dBm
3	(1)	Freq	2.47 GHz	-0.11 dBm
4	(1)	Freq	2.68 GHz	-46.55 dBm



IEEE 802.11g Turbo mode

CH Mid

Agilent 14:31:37 Nov 19, 2004

L


Spurious, g turbo Mode Mid Ch.

Mkr4 2.68 GHz

Ref 30 dBm

Atten 30 dB

-46.68 dBm

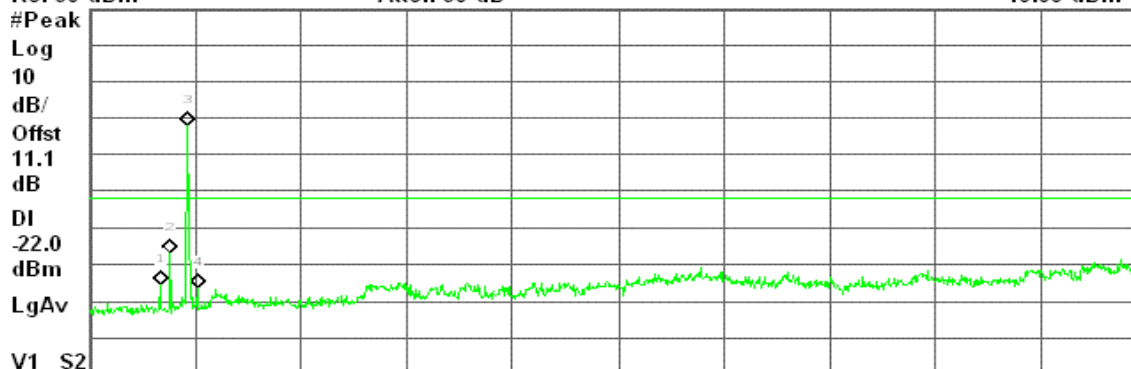

Start 30 MHz

Stop 26.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.77 GHz	-45.57 dBm
2	(1)	Freq	2.00 GHz	-37.17 dBm
3	(1)	Freq	2.45 GHz	-2.03 dBm
4	(1)	Freq	2.68 GHz	-46.68 dBm

IEEE 802.11a mode

CH Low

Agilent 17:45:26 Nov 15, 2004

R L


Bandege/Spurious, a Mode Low Ch.

Mkr3 11.50 GHz

Ref 20 dBm

Atten 20 dB

-50.83 dBm

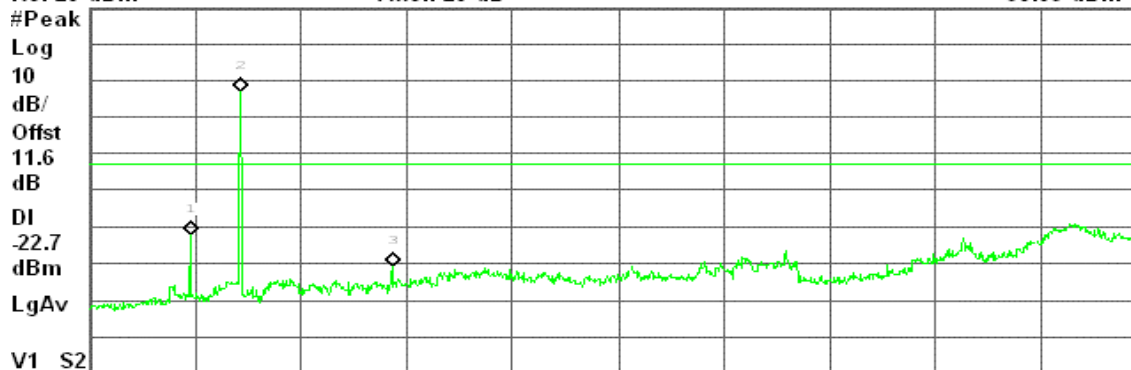

Start 30 MHz

Stop 40.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.82 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	3.83 GHz	-42.26 dBm
2	(1)	Freq	5.75 GHz	-2.74 dBm
3	(1)	Freq	11.50 GHz	-50.83 dBm



CH Mid

Agilent 17:53:07 Nov 15, 2004

R L

Spurious, a Mode Mid Ch.

Mkr3 11.58 GHz

Ref 20 dBm

Atten 20 dB

-49.20 dBm

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-20.3

dBm

LgAv

V1 S2

Start 30 MHz

Stop 40.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.82 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	3.87 GHz	-40.22 dBm
2	(1)	Freq	5.79 GHz	-0.27 dBm
3	(1)	Freq	11.58 GHz	-49.20 dBm

CH High

Agilent 17:59:28 Nov 15, 2004

R L

Spurious, a Mode High Ch.

Mkr3 11.66 GHz

Ref 20 dBm

Atten 20 dB

-48.35 dBm

#Peak

Log

10

dB/

Offst

11.6

dB

DI

-22.5

dBm

LgAv

V1 S2

Start 30 MHz

Stop 40.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.82 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	3.87 GHz	-42.08 dBm
2	(1)	Freq	5.83 GHz	-2.49 dBm
3	(1)	Freq	11.66 GHz	-48.35 dBm

**IEEE 802.11a Turbo mode****CH Low**

Agilent 15:23:18 Nov 23, 2004

R L

Spurious, a turbo Mode Low Ch.

Mkr2 5.75 GHz

Ref 20 dBm

Atten 20 dB

-1.00 dBm

#Peak

Log

10

dB/

Offst

11.1

dB

DI

-24.0

dBm

LgAv

V1 S2

Start 30 MHz

Stop 40.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.82 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	3.83 GHz	-43.31 dBm
2	(1)	Freq	5.75 GHz	-1.00 dBm

CH High

Agilent 15:32:03 Nov 23, 2004

R L

Spurious, a turbo Mode High Ch.

Mkr3 11.58 GHz

Ref 20 dBm

Atten 20 dB

-50.96 dBm

#Peak

Log

10

dB/

Offst

11.1

dB

DI

-23.3

dBm

LgAv

V1 S2

Start 30 MHz

Stop 40.00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.82 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	3.87 GHz	-43.27 dBm
2	(1)	Freq	5.79 GHz	-3.34 dBm
3	(1)	Freq	11.58 GHz	-50.96 dBm



7.6.2 Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/18/2005
Spectrum Analyzer	EMCO	3116	2487	11/27/2005
EMI Test Receiver	R&S	ESVS20	838804/004	01/04/2005
Pre-Amplifier	HP	8447D	2944A09173	03/03/2005
Bi-log Antenna	SCHWAZBECK	VULB9163	145	07/05/2005
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	09/06/2005
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2005
Loop Antenna	EMCO	6502	2356	07/10/2005
Pre-Amplifier	HP	8449B	3008B00965	10/02/2005


Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

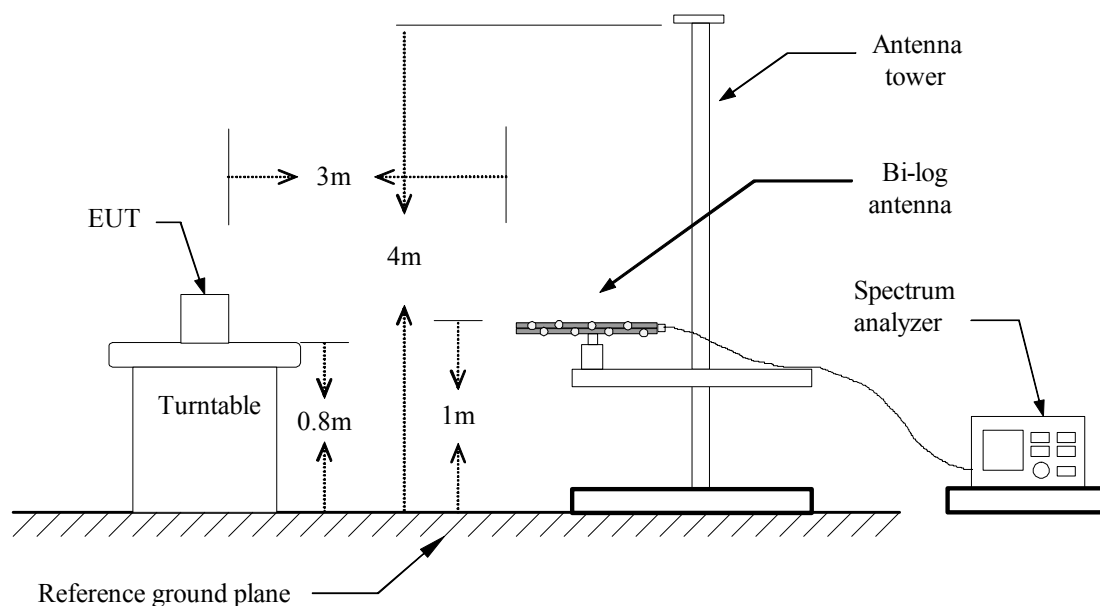

Above 1 GHz

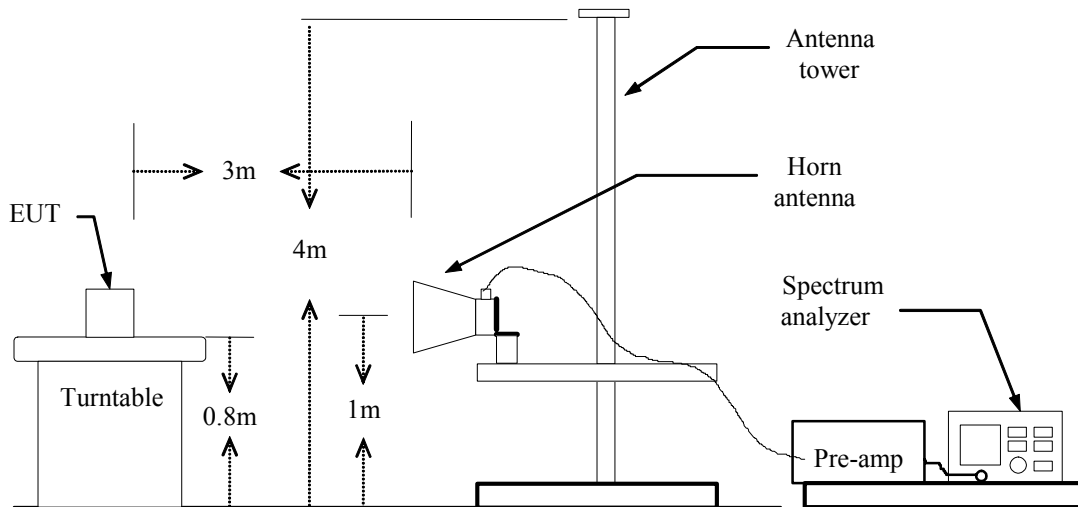

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal link mode (worst case)**Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
259.89	V	PK	16.02	16.50	32.52	46.00	-13.48
288.02	V	PK	15.96	16.88	32.84	46.00	-13.16
454.86	V	PK	13.16	23.81	36.97	46.00	-9.03
576.11	V	PK	10.47	25.10	35.57	46.00	-10.43
665.35	V	PK	6.63	28.18	34.81	46.00	-11.19
874.87	V	PK	6.74	30.83	37.57	46.00	-8.43
185.20	H	PK	16.37	13.02	29.38	43.50	-14.12
288.02	H	PK	16.99	16.88	33.87	46.00	-12.13
454.86	H	PK	8.42	23.81	32.23	46.00	-13.77
576.11	H	PK	6.06	25.10	31.16	46.00	-14.84
666.32	H	PK	8.66	28.15	36.81	46.00	-9.19
877.78	H	PK	4.12	30.85	34.97	46.00	-11.03

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: November 22, 2004

Temperature: 20°C

Tested by: Chris Hsieh

Humidity: 60 % RH

Polarity: Ver. / Hor.

[illegible]

Notes:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.*

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: November 22, 2004

Temperature: 20°C

Tested by: Chris Hsieh

Humidity: 60 % RH

Polarity: Ver. / Hor.[illegible]

Notes:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto*

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: November 22, 2004

Temperature: 20°C

Tested by: Chris Hsieh

Humidity: 60 % RH

Polarity: Ver. / Hor.[illegible]

Notes:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto*

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: November 22, 2004

Temperature: 20°C

Tested by: Chris Hsieh

Humidity: 60 % RH

Polarity: Ver. / Hor.

[illegible]

Notes:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto*

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: November 22, 2004

Temperature: 20°C

Tested by: Chris Hsieh

Humidity: 60 % RH

Polarity: Ver. / Hor.

[illegible]

Notes:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto*

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1199.75	V	40.37	---	-6.91	33.46	---	74.00	54.00	-20.54	Peak
N/A	---	---	---	---	---	---	---	---	---	---
1152.75	H	34.99	---	-6.94	28.05	---	74.00	54.00	-25.95	Peak
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto

Operation Mode: TX / IEEE 802.11g Turbo mode

Test Date: November 22, 2004

Temperature: 20°C

Tested by: Chris Hsieh

Humidity: 60 % RH

Polarity: Ver. / Hor.

[illegible]

Notes:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
 - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
 - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto*

**Operation Mode:** TX / IEEE 802.11a Base mode / CH 5745 **Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
11490	V	41.16	---	9.8	50.96	---	74.00	54.00	-3.04	Peak
17235	V	52.10	38.87	12.26	64.36	51.13	74.00	54.00	-2.87	AVG
N/A	---	---	---	---	---	---	---	---	---	---
11490	H	52.10	38.87	9.80	61.90	48.67	74.00	54.00	-5.33	AVG
17235	H	53.00	38.55	12.26	65.26	50.81	74.00	54.00	-3.19	AVG
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto

**Operation Mode:** TX / IEEE 802.11a Base mode / CH 5785 **Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
11570	V	52.4	42.37	9.91	62.31	52.28	74.00	54.00	-1.72	AVG
17355	V	57.00	37.44	12.86	69.86	50.30	74.00	54.00	-3.70	AVG
N/A	---	---	---	---	---	---	---	---	---	---
11570	H	50.17	42.17	9.91	60.08	52.08	74.00	54.00	-1.92	AVG
17355	H	53.70	38.52	12.86	66.56	51.38	74.00	54.00	-2.62	AVG
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto

**Operation Mode:** TX / IEEE 802.11a Base mode / CH 5825 **Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
11650	V	52.40	42.37	10.05	62.45	52.42	74.00	54.00	-1.58	AVG
17475	V	55.00	37.44	13.45	68.45	50.89	74.00	54.00	-3.11	AVG
N/A	---	---	---	---	---	---	---	---	---	---
11650	H	50.17	42.17	10.05	60.22	52.22	74.00	54.00	-1.78	AVG
17475	H	53.70	38.52	13.45	67.15	51.97	74.00	54.00	-2.03	AVG
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto

**Operation Mode:** TX / IEEE 802.11a Turbo mode / CH 5760 **Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
11600	V	56.44	42.90	9.96	66.40	52.86	74.00	54.00	-1.14	AVG
17400	V	54.76	37.90	13.10	67.86	51.00	74.00	54.00	-3.00	AVG
N/A	---	---	---	---	---	---	---	---	---	---
11600	H	60.60	42.57	9.96	70.56	52.53	74.00	54.00	-1.47	AVG
17400	H	57.47	39.50	13.10	70.57	52.60	74.00	54.00	-1.40	AVG
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto

**Operation Mode:** TX / IEEE 802.11a Turbo mode / CH 5800 **Test Date:** November 22, 2004**Temperature:** 20°C**Tested by:** Chris Hsieh**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
11520	V	55.55	42.56	9.82	65.37	52.38	74.00	54.00	-1.62	AVG
17200	V	52.60	39.80	12.11	64.71	51.91	74.00	54.00	-2.09	AVG
N/A	---	---	---	---	---	---	---	---	---	---
11520	H	54.60	41.35	9.82	64.42	51.17	74.00	54.00	-2.83	AVG
17200	H	53.53	40.60	12.11	65.64	52.71	74.00	54.00	-1.29	AVG
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (*Live Line* and *Neutral Line*) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/24/2005
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/11/2005
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	02/05/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: TX + RX mode **Test Date:** November 17, 2004
Temperature: 20°C **Tested by:** Alex Cheng
Humidity: 60% RH

Freq. (MHz)	QP Reading	AV Reading	Corr. factor	QP Result	AV Result	QP Limit	AV Limit	QP Margin	AV Margin	Note
0.21	37.55	36.23	0.08	37.63	36.31	63.41	53.41	-25.78	-17.10	L1
0.31	36.80	35.19	0.09	36.89	35.28	60.11	50.11	-23.22	-14.83	L1
0.55	34.42	32.19	0.11	34.53	32.30	56.00	46.00	-21.47	-13.70	L1
0.93	32.75	32.23	0.11	32.86	32.34	56.00	46.00	-23.14	-13.66	L1
2.08	35.37	33.15	0.15	35.52	33.30	56.00	46.00	-20.48	-12.70	L1
7.04	29.90	27.37	0.31	30.21	27.68	60.00	50.00	-29.79	-22.32	L1
0.19	41.07	37.16	0.07	41.14	37.23	63.86	53.86	-22.73	-16.64	L2
0.28	40.20	31.87	0.09	40.29	31.96	60.70	50.70	-20.41	-18.74	L2
0.55	32.24	30.21	0.13	32.37	30.34	56.00	46.00	-23.63	-15.66	L2
1.59	31.37	29.61	0.13	31.50	29.74	56.00	46.00	-24.50	-16.26	L2
6.71	31.57	28.69	0.30	31.87	28.99	60.00	50.00	-28.13	-21.01	L2
8.73	27.49	25.31	0.33	27.82	25.64	60.00	50.00	-32.18	-24.36	L2


Note:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.*
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
- 3. “---” denotes the emission level was or more than 2dB below the Average limit*
- 4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;*
- 5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*



Test Plots

Conducted emissions (Line 1)

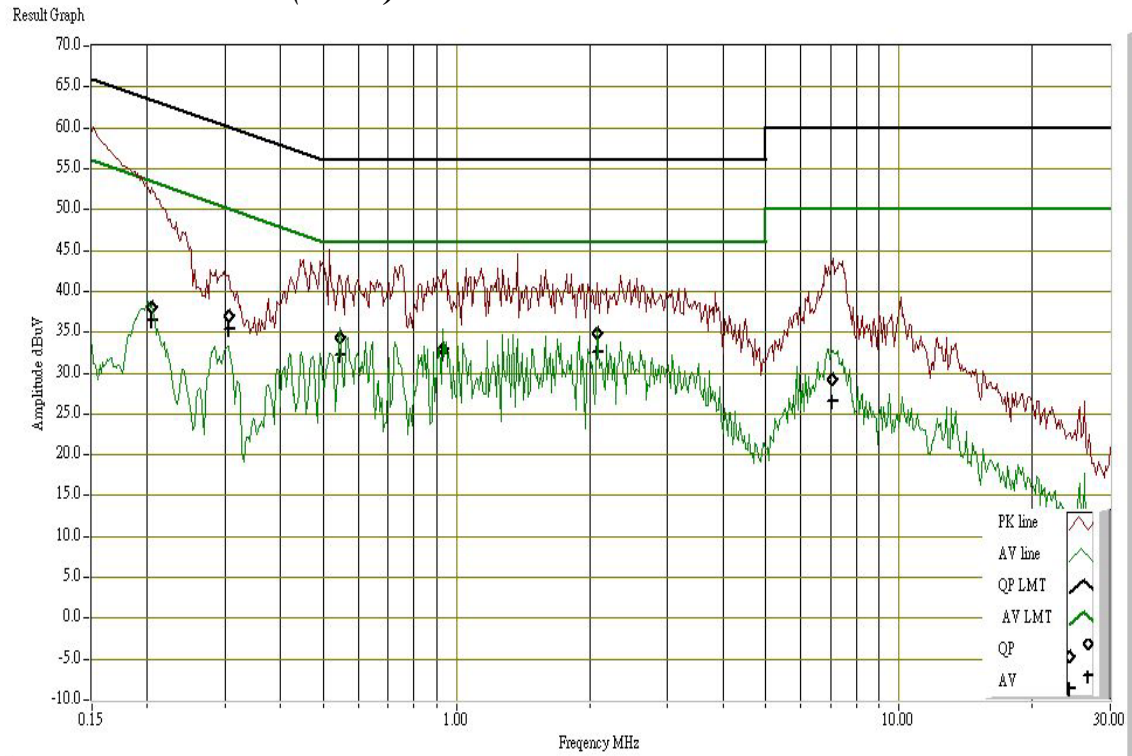

Conducted emissions (Line 2)

