


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	2.4GHz + 5GHz

Horizontal

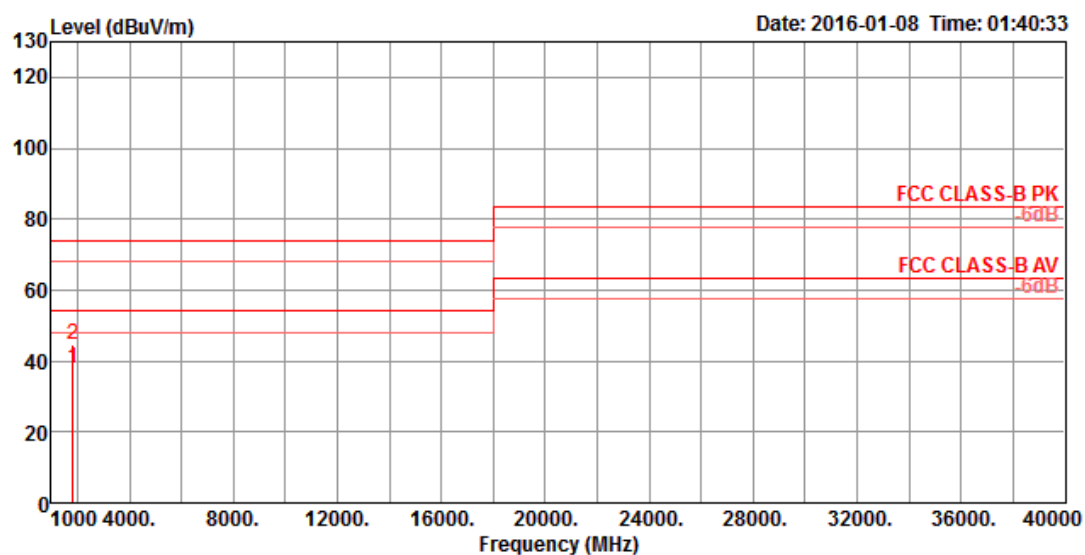

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	1842.43	38.03	54.00	-15.97	42.27	4.59	34.70	25.87	HORIZONTAL	153	356	Average
2	1842.46	44.62	74.00	-29.38	48.86	4.59	34.70	25.87	HORIZONTAL	153	356	Peak

Vertical

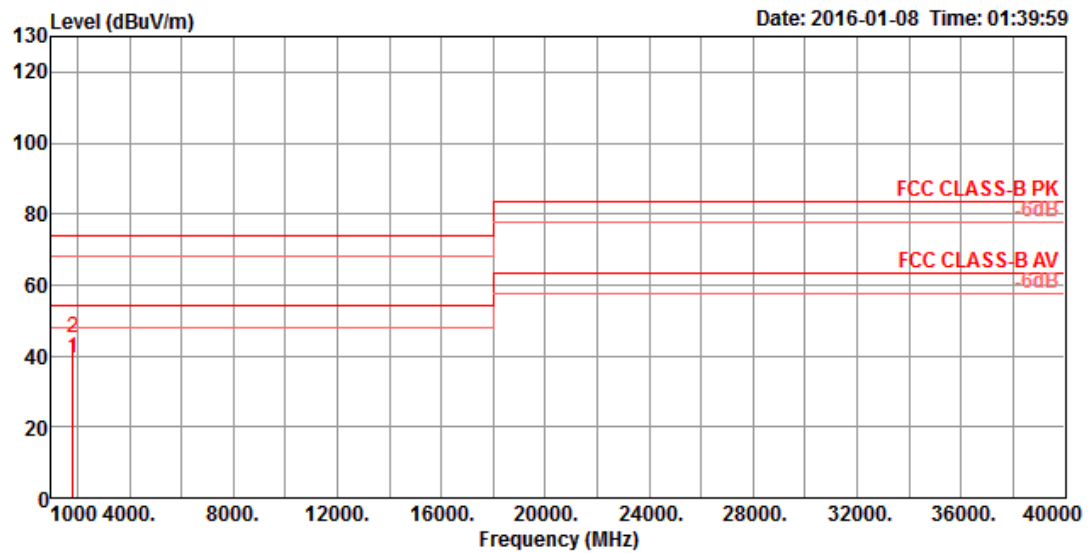

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	1842.40	39.51	54.00	-14.49	43.75	4.59	34.70	25.87	VERTICAL	153	356	Average
2	1842.46	44.96	74.00	-29.04	49.20	4.59	34.70	25.87	VERTICAL	153	356	Peak