

FCC Radio Test Report

FCC ID: KA2IRX1870A1

This report concerns: Original Grant

Project No. : 2007H027
Equipment : AX1800 Mesh Wi-Fi 6 Router
Brand Name : D-Link
Test Model : DIR-X1870
Series Model : N/A
Applicant : D-Link Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California United State 92708
Manufacturer : D-Link Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California United State 92708
Factory : N/A
Address : N/A
Date of Receipt : Jul. 16, 2020
Date of Test : Jul. 16, 2020~Aug. 28, 2020
Issued Date : Sep. 10, 2020
Report Version : R01
Test Sample : Engineering Sample No.: SH20200716113-1, SH20200716113-6
Standard(s) : FCC Part15, Subpart E(15.407)
 ANSI C63.10-2013
 FCC KDB 789033 D02 General UNII Test Procedures New Rules
 v02r01
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Allen Wei

Prepared by : Allen Wei

Ryan. Wang

Approved by : Ryan Wang



Certificate # 5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China
 TEL: +86-021-61765666
 Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	13
2.4 DUTY CYCLE	16
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
2.6 SUPPORT UNITS	18
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	19
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 EUT OPERATION CONDITIONS	20
3.6 TEST RESULTS	20
4 . RADIATED EMISSIONS TEST	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	22
4.4 TEST SETUP	23
4.5 EUT OPERATION CONDITIONS	25
4.6 TEST RESULTS - 9 KHZ to 30 MHZ	25
4.7 TEST RESULTS - 30 MHz TO 1000 MHz	25
4.8 TEST RESULTS - ABOVE 1000 MHz	25
5 . BANDWIDTH TEST	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	26
5.3 TEST PROCEDURE	26
5.4 TEST SETUP	27

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	27
5.6 TEST RESULTS	27
6 . MAXIMUM OUTPUT POWER TEST	28
6.1 LIMIT	28
6.2 TEST PROCEDURE	29
6.3 DEVIATION FROM STANDARD	29
6.4 TEST SETUP	29
6.5 EUT OPERATION CONDITIONS	29
6.6 TEST RESULTS	29
7 . POWER SPECTRAL DENSITY TEST	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 DEVIATION FROM STANDARD	30
7.4 TEST SETUP	31
7.5 EUT OPERATION CONDITIONS	31
7.6 TEST RESULTS	31
8 . FREQUENCY STABILITY MEASUREMENT	32
8.1 LIMIT	32
8.2 TEST PROCEDURE	32
8.3 DEVIATION FROM STANDARD	32
8.4 TEST SETUP	33
8.5 EUT OPERATION CONDITIONS	33
8.6 TEST RESULTS	33
9 . MEASUREMENT INSTRUMENTS LIST	34
10 . EUT TEST PHOTOS	36
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	39
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	42
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ	43
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	46
APPENDIX E - BANDWIDTH	119
APPENDIX F - CONDUCTED OUTPUT POWER	128
APPENDIX G - POWER SPECTRAL DENSITY	150

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Sep. 08, 2020
R01	Revised report to address TCB's comments.	Sep. 10, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgement	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Spectrum Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (3)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
☒ Access point device ☐ Client device

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

BTL's Test Firm Registration Number for FCC: 476765

BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	23°C	52%	AC 120V/60Hz	Forest
Radiated Emissions-30 MHz to 1GHz	23°C	52%	AC 120V/60Hz	Forest
Radiated Emissions-Above 1000 MHz	23°C	52%	AC 120V/60Hz	Forest
Spectrum Bandwidth	24°C	56%	AC 120V/60Hz	Forest
Maximum Output Power	24°C	56%	AC 120V/60Hz	Forest
Power Spectral Density	24°C	56%	AC 120V/60Hz	Forest

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AX1800 Mesh Wi-Fi 6 Router
Brand Name	D-Link
Test Model	DIR-X1870
Series Model	N/A
Model Difference(s)	N/A
Software Version	1
Hardware Version	A1
Power Source	DC voltage supplied from AC/DC adapter. 1#Brand/Mode: S12A12-120A100-CJ 2#Brand/Mode: WB-12G12R
Power Rating	1# I/P: 100V-240V ~ 50Hz/60Hz Max0.5A, O/P:12V === 1A. 2# I/P: 100V-240V ~ 50Hz/60Hz 0.3A Max, O/P:12V === 1.0A.12W
Operation Frequency	UNII-1: 5150 MHz~5250 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	OFDM
Bit Rate of Transmitter	Up to 300 Mbps

Maximum Conducted Output Power for UNII-1 (1TX) CDD	IEEE 802.11a: 25.08 dBm (0.3221 W)
Maximum Conducted Output Power for UNII-3 (1TX) CDD	IEEE 802.11a: 24.88 dBm (0.3076W)

Maximum Conducted Output Power for UNII-1 (2TX) CDD	IEEE 802.11n (HT20): 25.47 dBm (0.3524 W) IEEE 802.11n (HT40): 23.11 dBm (0.2046 W) IEEE 802.11ac (VHT20): 26.49 dBm (0.4457 W) IEEE 802.11ac (VHT40): 23.12 dBm (0.2051 W) IEEE 802.11ac (VHT80): 19.71 dBm (0.0935 W)
Maximum Conducted Output Power for UNII-3 (2TX) CDD	IEEE 802.11n (HT20): 27.42 dBm (0.5521 W) IEEE 802.11n (HT40): 26.02 dBm (0.3999 W) IEEE 802.11ac (VHT20): 27.20 dBm (0.5248 W) IEEE 802.11ac (VHT40): 25.48 dBm (0.3532 W) IEEE 802.11ac (VHT80): 22.66 dBm (0.1845 W)

Maximum Conducted Output Power for UNII-1 (2TX) Beamforming	IEEE 802.11n (HT20): 25.25 dBm (0.3350 W) IEEE 802.11n (HT40): 22.95 dBm (0.1972 W) IEEE 802.11ac (VHT20): 26.29 dBm (0.4256 W) IEEE 802.11ac (VHT40): 22.98 dBm (0.1986 W) IEEE 802.11ac (VHT80): 19.50 dBm (0.0891 W)
Maximum Conducted Output Power for UNII-3 (2TX) Beamforming	IEEE 802.11n (HT20): 27.40 dBm (0.5495 W) IEEE 802.11n (HT40): 25.98 dBm (0.3693 W) IEEE 802.11ac (VHT20): 27.21 dBm (0.5260 W) IEEE 802.11ac (VHT40): 25.43 dBm (0.3491W) IEEE 802.11ac (VHT80): 21.04 dBm (0.1271 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
	N/A	N/A	Dipole	N/A	5	N/A
	N/A	N/A	Dipole	N/A	5	N/A

Note:

(1) Beamforming:

All antennas have the same gain, Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi,

that is Directional gain = $5 + 10 \log(2)$ dBi = 8.01;

So output power limit is $30 - 8.01 + 6 = 27.99$, the UNII-1 power density limit is $17 - (8.01 - 6) = 14.99$. the UNII-3 power density limit is $30 - 8.01 + 6 = 27.99$.

(2) CDD:

All antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$,

For power spectral density measurements, $N_{ANT} = 2$, $N_{SS} = 1$.

So Directional gain = $G_{ANT} + \text{Array Gain} = 10 \log(N_{ANT} / N_{SS})$ dB = $5 + 10 \log(2/1)$ dBi = 8.01.

Then, the UNII-1 power density limit is $17 - (11.02 - 6) = 14.99$.

the UNII-3 power density limit is $30 - 8.01 + 6 = 27.99$

For power measurements, Array Gain = 0 dB ($N_{ANT} \leq 4$), so the Directional gain = 5.

4. Table for Antenna Configuration:

Operating Mode TX Mode	Ant. 1	Ant. 2	Ant. 1+2
IEEE 802.11a	✓	✓	✗
IEEE 802.11n (HT20)	✓	✓	✓
IEEE 802.11n (HT40)	✓	✓	✓
IEEE 802.11ac (VHT20)	✓	✓	✓
IEEE 802.11ac (VHT40)	✓	✓	✓
IEEE 802.11ac (VHT80)	✓	✓	✓

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 13	TX AC(VHT20) Mode / CH48 (UNII-1)

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 13	TX AC(VHT20) Mode / CH48 (UNII-1)

Radiated emissions test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 5	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 6	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 7	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 8	TX AC (VHT80) Mode / CH155 (UNII-3)

Conducted test	
Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 22	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT80) Mode / CH155 (UNII-3)

Note:

- (1) For radiated emission below 1 GHz test, the IEEE 802.11ac20 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

CDD

UNII-1 - 1TX			
Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	84	97	102

UNII-3 - 1TX			
Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	108	108	108

UNII-1 - 2TX			
Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11n (HT20)	74	88	95
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	66	82	

UNII-3 - 2TX			
Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11n (HT20)	106	106	106
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	96	96	

UNII-1 - 2TX			
Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11ac (VHT20)	74	88	97
Test Frequency (MHz)	5190	5230	
IEEE 802.11ac (VHT40)	66	82	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	68		

UNII-3 - 2TX			
Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11ac (VHT20)	106	106	106
Test Frequency (MHz)	5755	5795	
IEEE 802.11ac (VHT40)	96	96	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	82		

Beamforming

UNII-1 - 2TX

Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11n (HT20)	74	88	95
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	66	82	

UNII-3 - 2TX

Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11n (HT20)	106	106	106
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	96	96	

UNII-1 - 2TX


Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11ac (VHT20)	74	88	97
Test Frequency (MHz)	5190	5230	
IEEE 802.11ac (VHT40)	66	82	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	68		

UNII-3 - 2TX

Test Software	accessMTool.3.1.0.6		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11ac (VHT20)	106	106	106
Test Frequency (MHz)	5755	5795	
IEEE 802.11ac (VHT40)	96	96	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	82		


2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.

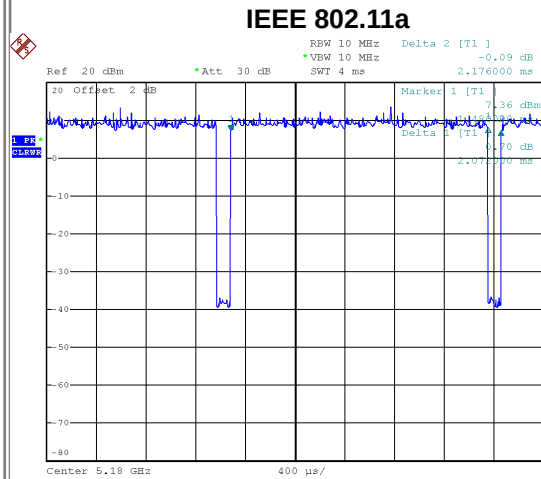


Date: 21.JUL.2020 12:29:58

Duty cycle = 2.072 ms / 2.176 ms = 95.22%
Duty Factor = 10 * log(1 / Duty cycle) = 0.21 dB

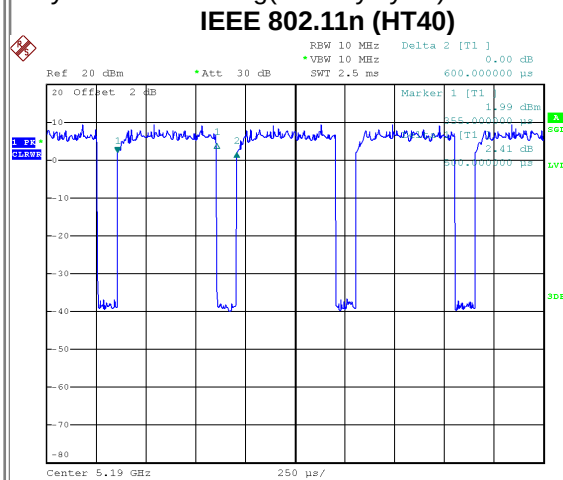


Date: 21.JUL.2020 12:32:54

Duty cycle = 0.500 ms / 0.600 ms = 83.33%
Duty Factor = 10 * log(1 / Duty cycle) = 0.79 dB

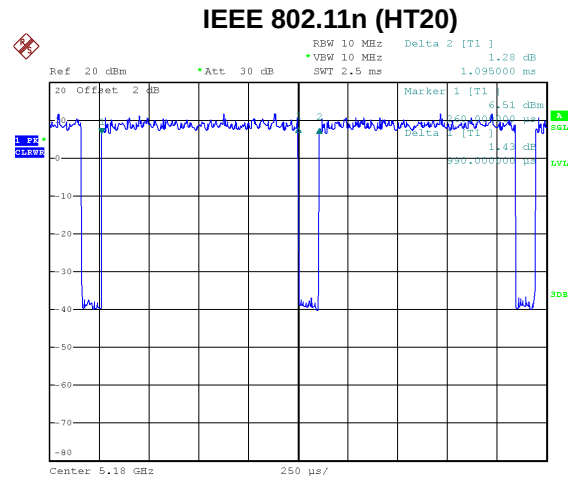

Date: 21.JUL.2020 12:30:31


Duty cycle = 0.990 ms / 1.095 ms = 90.41%
Duty Factor = 10 * log(1 / Duty cycle) = 0.44 dB

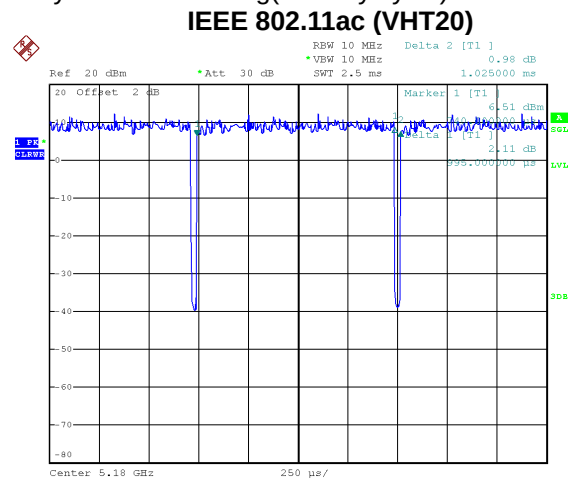

Date: 21.JUL.2020 12:31:18

Duty cycle = 0.995 ms / 1.025 ms = 97.07%
Duty Factor = 10 * log(1 / Duty cycle) = 0.13 dB


IEEE 802.11ac (VHT40)

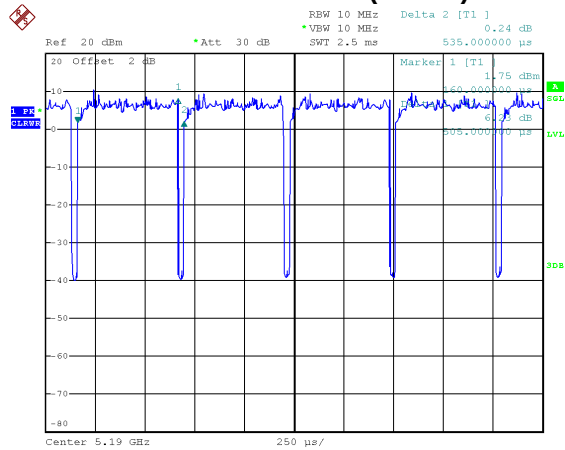

Date: 21.JUL.2020 12:31:58

Duty cycle = 0.505 ms / 0.535 ms = 94.39%
 Duty Factor = 10 * log(1 / Duty cycle) = 0.25 dB

IEEE 802.11ac (VHT80)

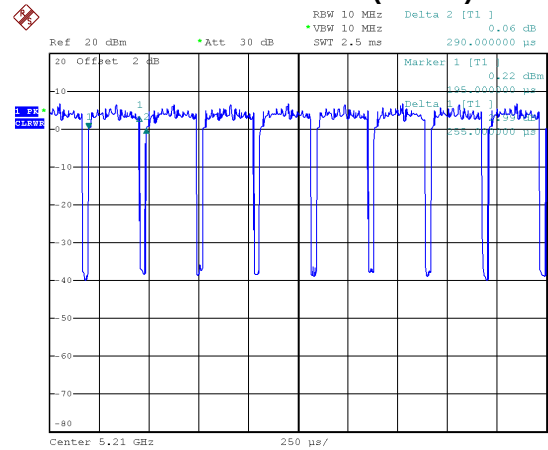

Date: 21.JUL.2020 12:33:50

Duty cycle = 0.255 ms / 0.290 ms = 87.93%
 Duty Factor = 10 * log(1 / Duty cycle) = 0.56 dB

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20) and IEEE 802.11ac (VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).


For IEEE 802.11n (HT40) and IEEE 802.11ac (VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

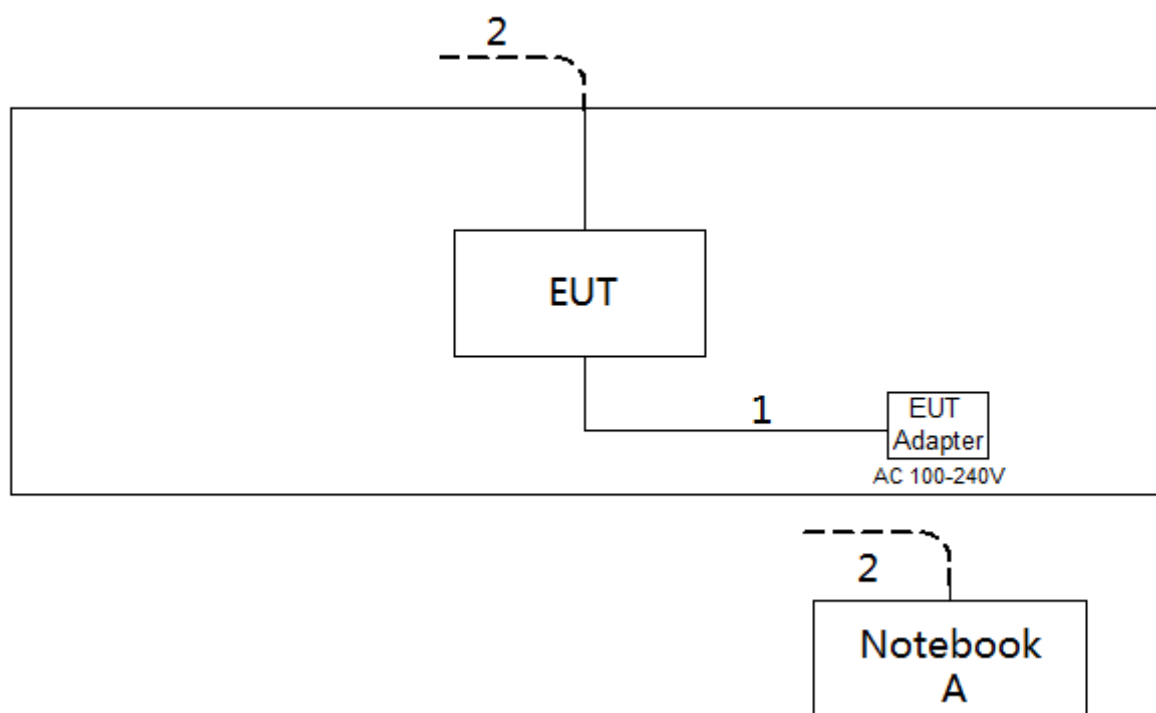

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	#P152014	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

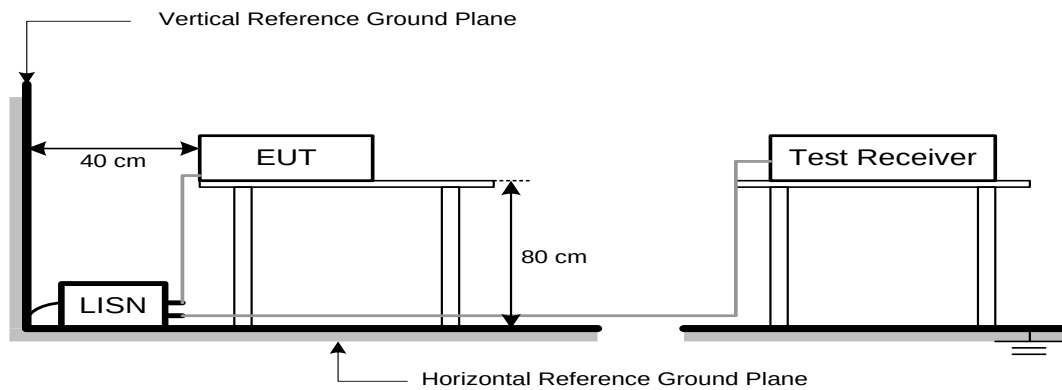

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 NOTE (2)	68.3
	10 NOTE (2)	105.3
	15.6 NOTE (2)	110.9
	27 NOTE (2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation

4.4 TEST SETUP


9 kHz to 30 MHz

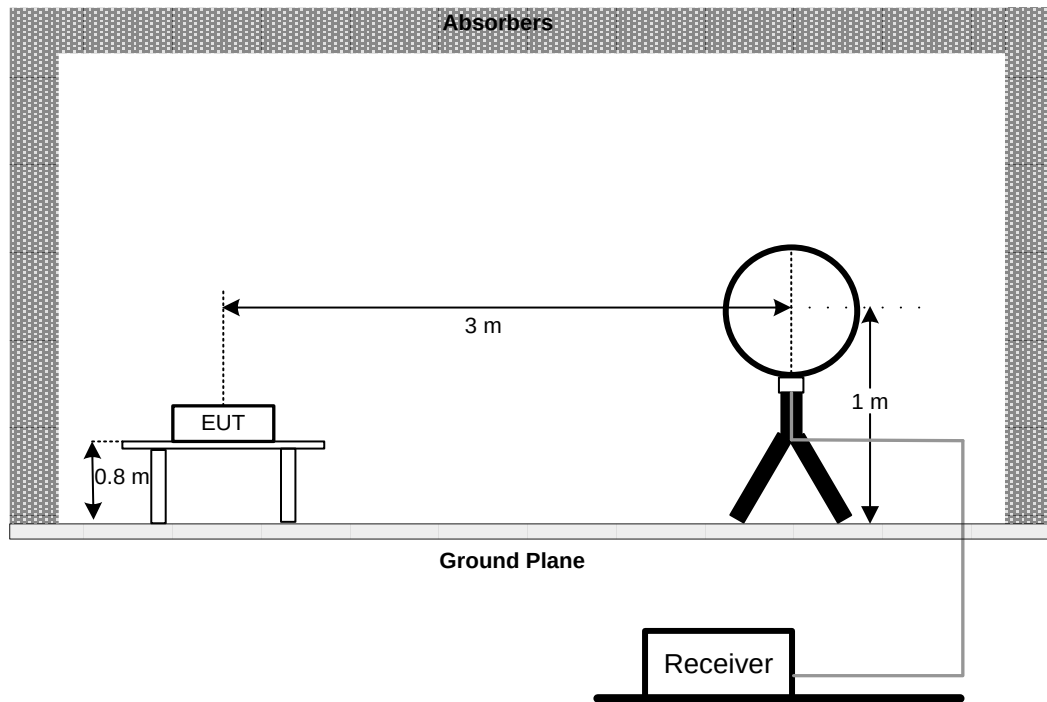


30 MHz to 1 GHz

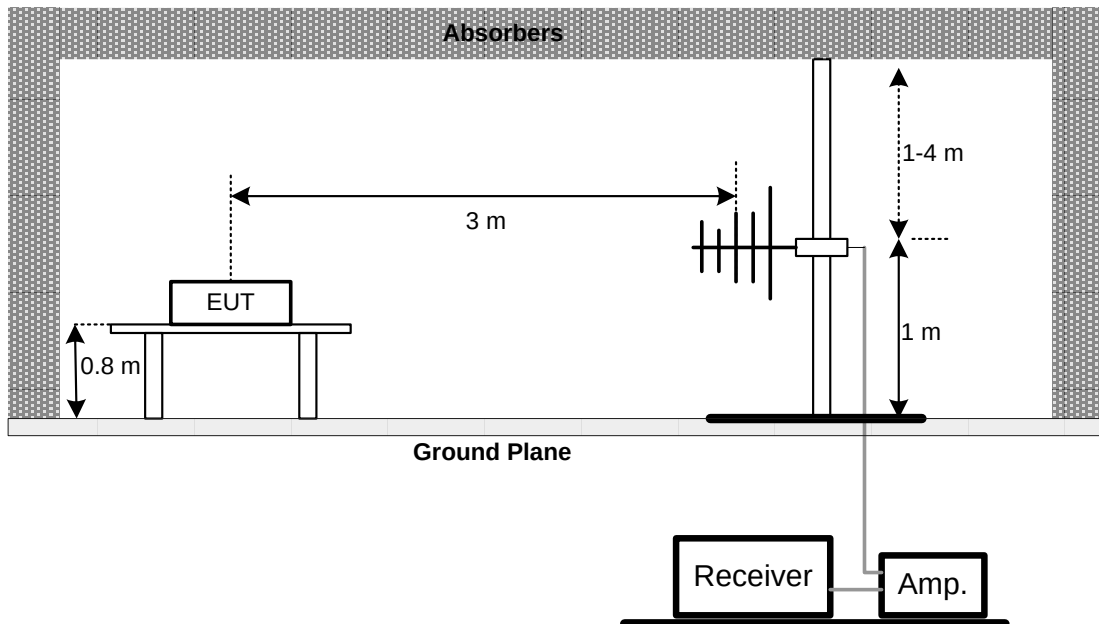

Above 1 GHz

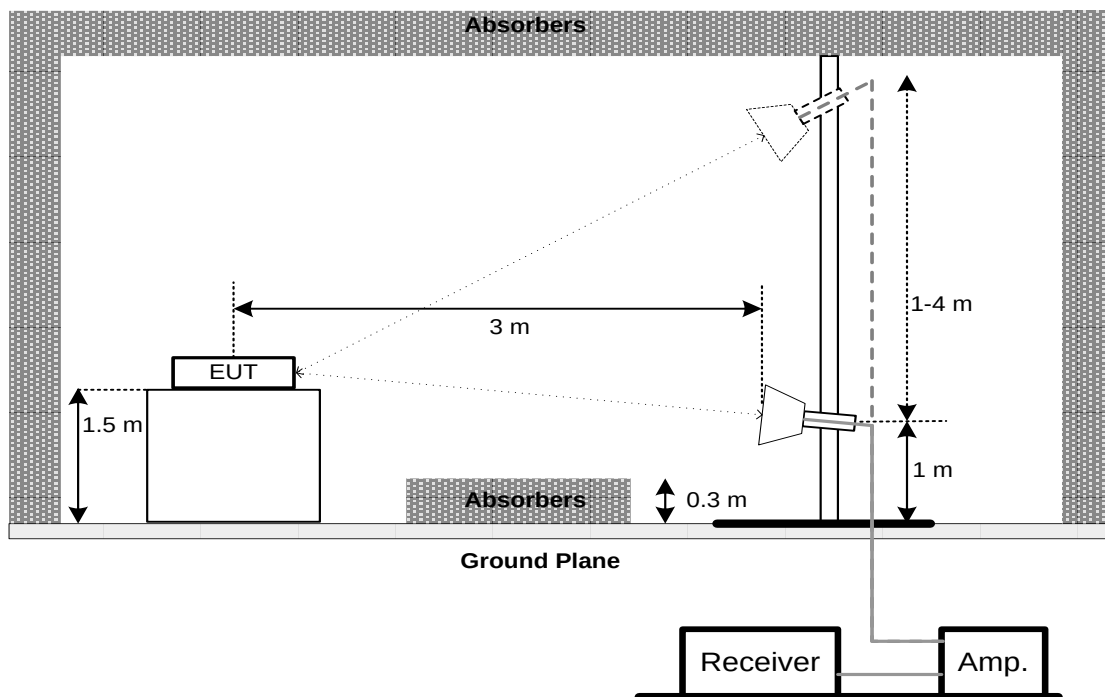

Above 1 GHz Band edge

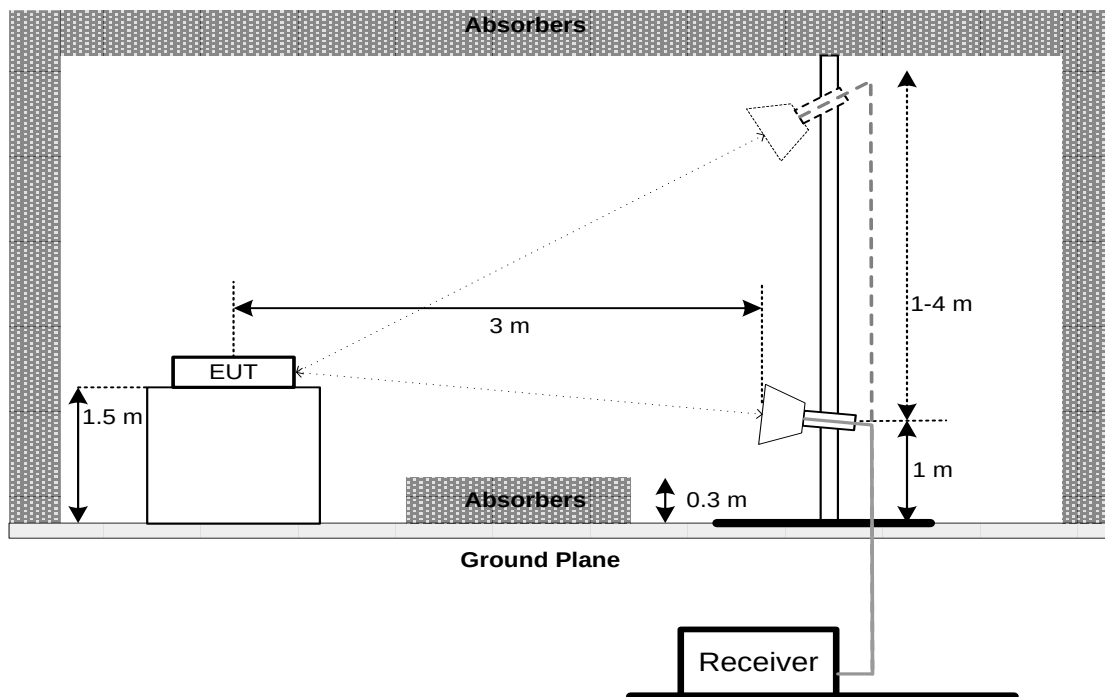

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ to 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a) 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. a. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz) 1 MHz (Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz) 3 MHz (Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB below carrier

5.3 TEST PROCEDURE

No deviation.

5.4 TEST SETUP**5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Conducted Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (24 dBm)	5150-5250
		250 mW (24 dBm)	5250-5350
		250 mW (24 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY TEST

7.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.
- The value measured with RBW=1 MHz is to be added with $10\log(500 \text{ kHz}/1 \text{ MHz})$ which is -3 dB. For example, if the measured value is +10dBm using RBW=1 MHz (that is +10 dBm/MHz), then the converted value will be +7dBm/500kHz.
- The value measured with RBW=100kHz is to be added with $10\log(500 \text{ kHz}/100\text{kHz})$ which is 7 dB. For example, if the measured value is +10dBm using RBW=100kHz (that is +10 dBm/100kHz), then the converted value will be +17dBm/500kHz.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. FREQUENCY STABILITY MEASUREMENT

8.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

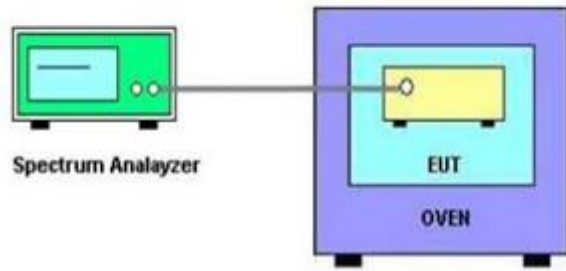

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 21, 2021
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Sep. 01, 2020
3	EMI Test Receiver	R&S	ESCI	100082	Mar. 28, 2021
4	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 21, 2021
5	Cable	10m	EMCRG400-BM-NM-10000	170628	Mar. 21, 2021
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 28, 2021
2	Cable	N/A	EMCRG400-BM-NM-10000	170628	Mar. 21, 2021
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 21, 2021
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 21, 2021
4	Attenuator	emci	EMCI-N-6-06	AT-N0644	Mar. 21, 2021
5	Cable	7m	EMC104-SM-SM-7000	170330	Apr. 16, 2021
6	Cable	1m	EMC104-SM-SM-1000	170331	Apr. 16, 2021
7	Cable	3.5m	EMC104-SM-NM-3500	170621	Apr. 16, 2021
8	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 28, 2021
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 28, 2021
9	Antenna	Schwarzbeck	BBHA9170	9170-651	Apr. 02, 2021
10	Pre-Amplifier	EMC INSTRUMENT	EMC184045B	980265	Mar. 21, 2021
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 21, 2021
12	Test Cable	emci	EMC102-SM-SM-800	170335	Apr. 13, 2021
13	Test Cable	emci	EMC102-KM-KM-2500	170627	Apr. 13, 2021


Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyze	Keysight	8990B	MY51000507	Mar. 21, 2021
2	Wideband Power Sensor	Keysight	N9123A	MY58310003	Mar. 21, 2021

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

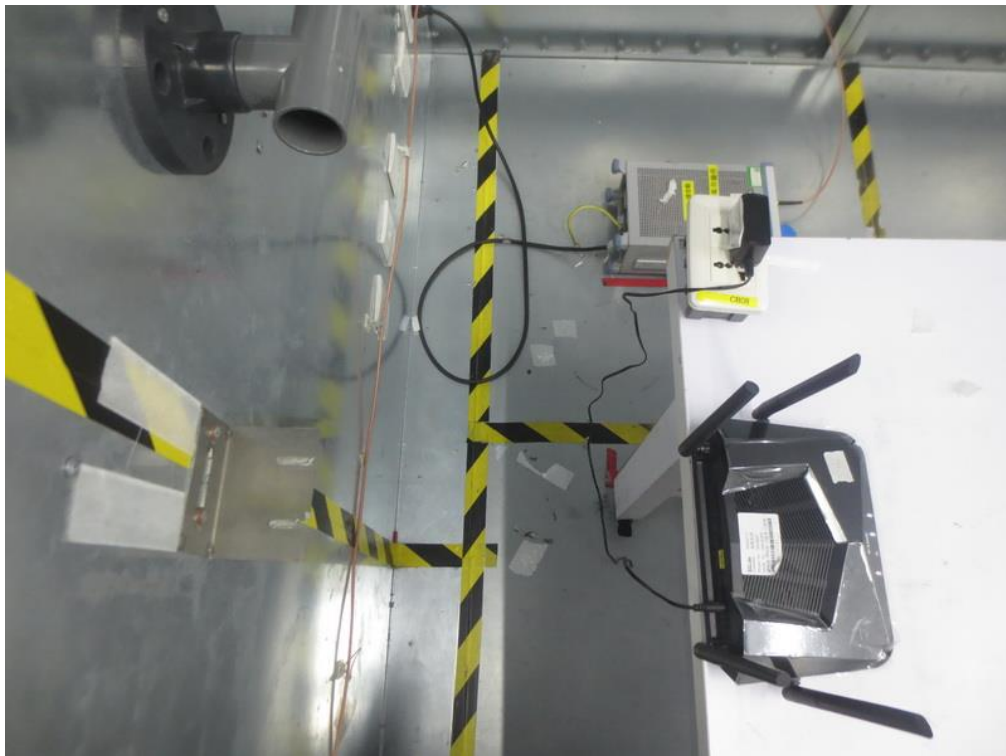10. EUT TEST PHOTOS**Conducted Emissions Test Photos**


Radiated Emissions Test Photos

30 MHz to 1 GHz

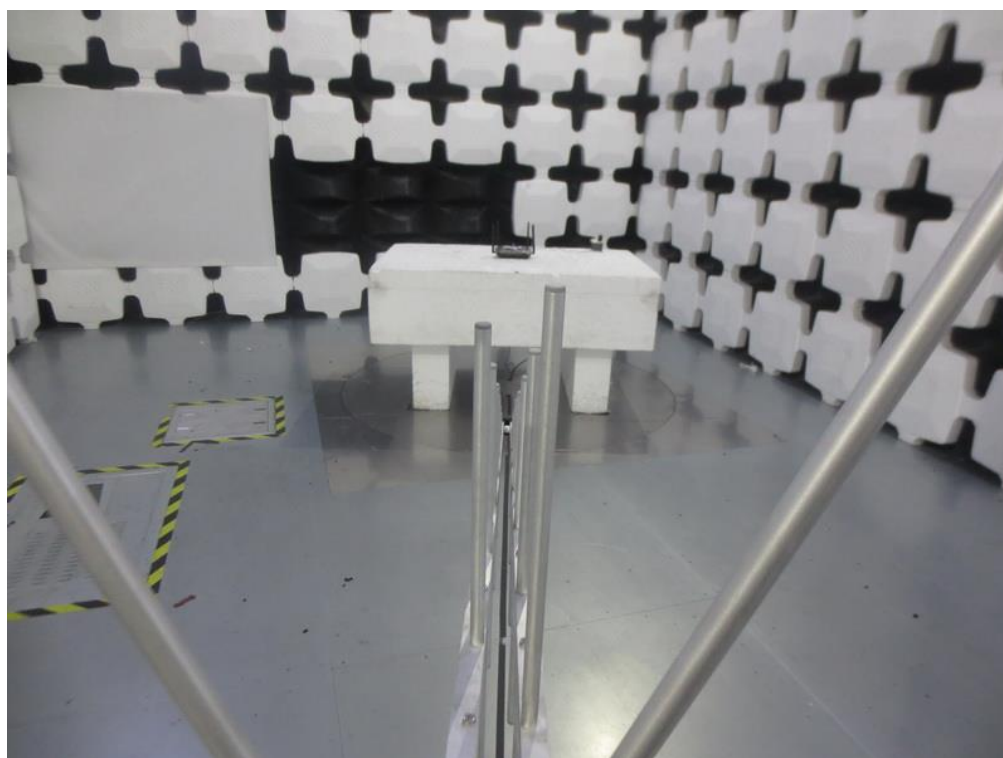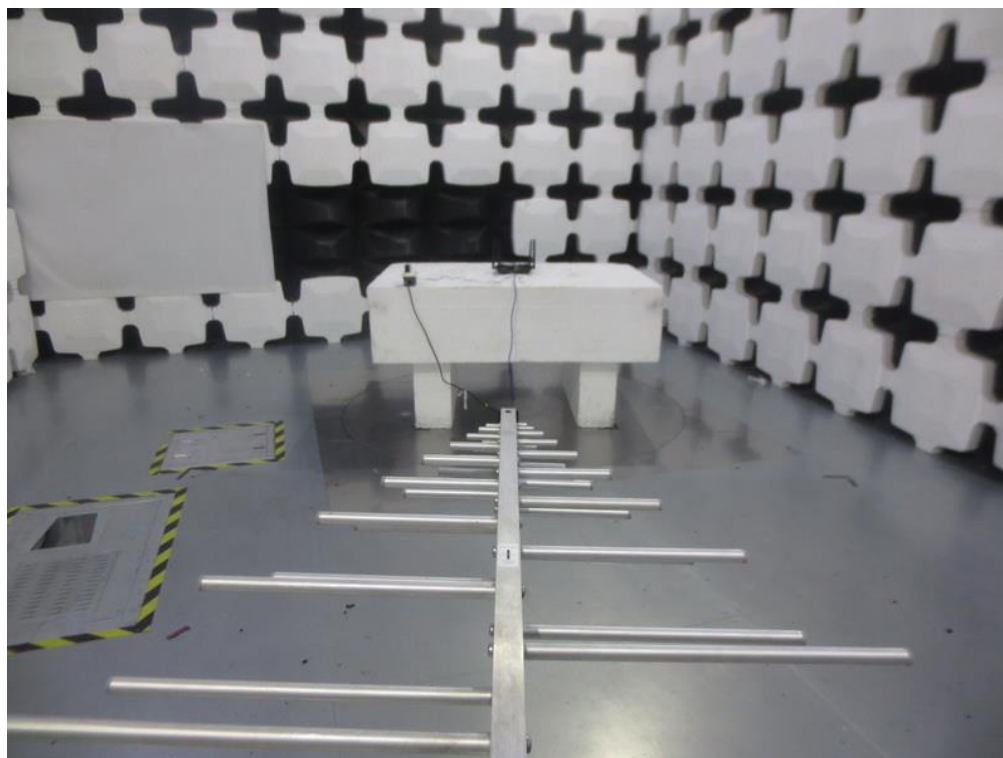


Radiated Emissions Test Photos

Above 1 GHz

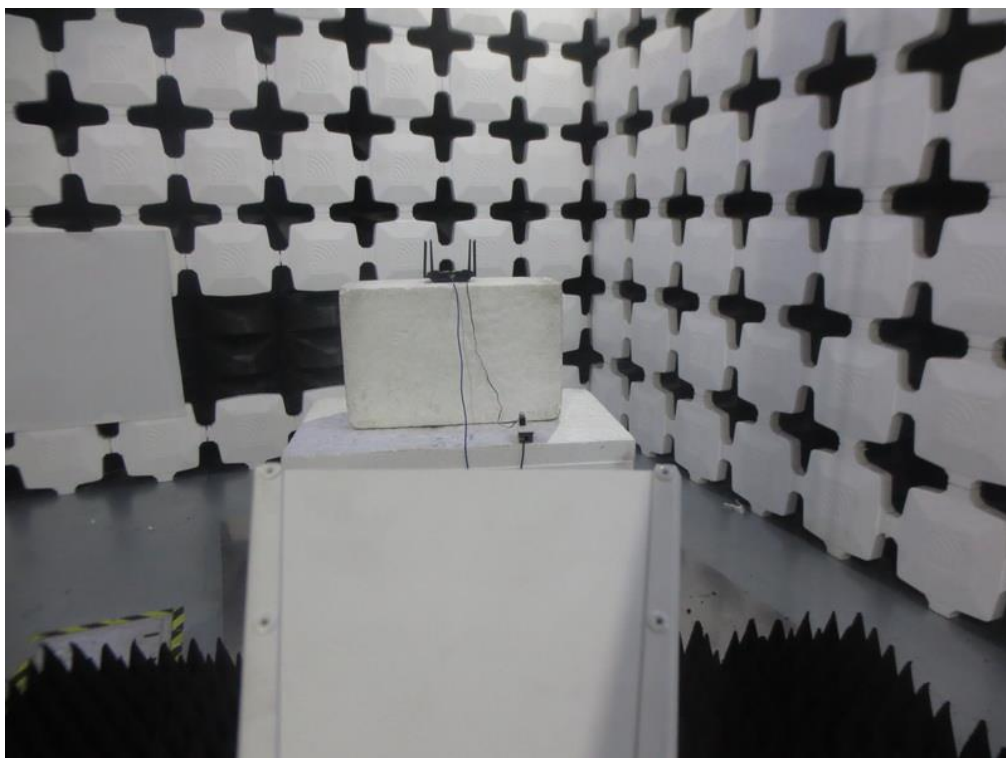

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX N (HT20) Mode Channel 157

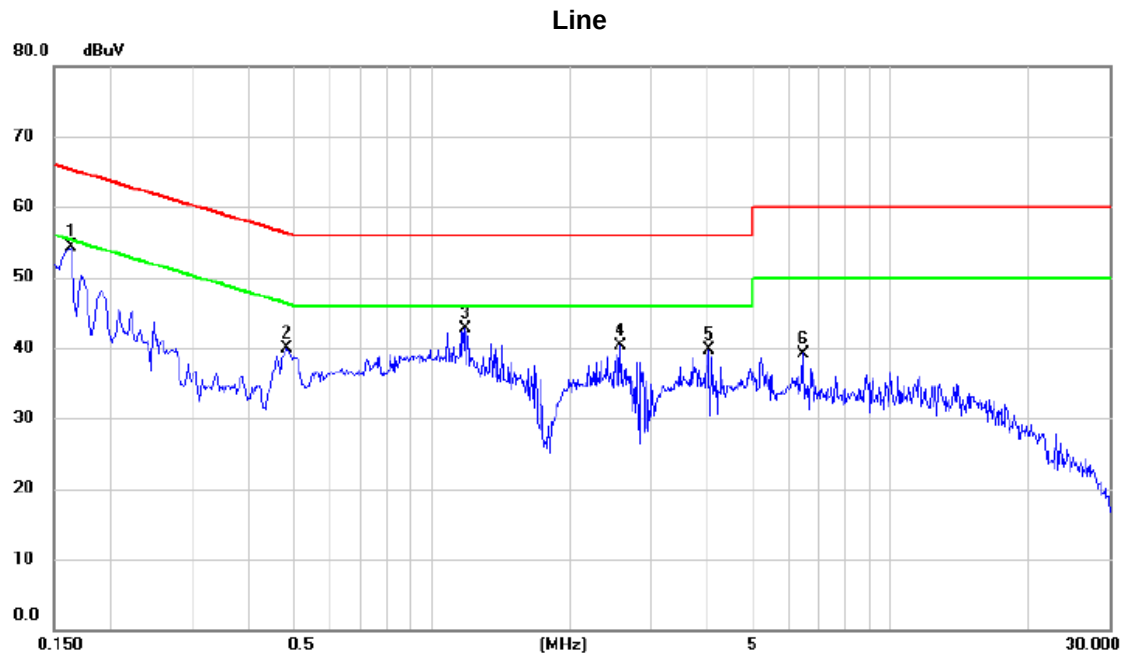

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1635	44.58	9.74	54.32	65.28	-10.96	peak	
2		0.4830	29.95	9.89	39.84	56.29	-16.45	peak	
3		1.1803	33.04	9.75	42.79	56.00	-13.21	peak	
4		2.5844	30.53	9.83	40.36	56.00	-15.64	peak	
5		4.0243	29.83	9.92	39.75	56.00	-16.25	peak	
6		6.4320	29.16	10.04	39.20	60.00	-20.80	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N (HT20) Mode Channel 157

Neutral

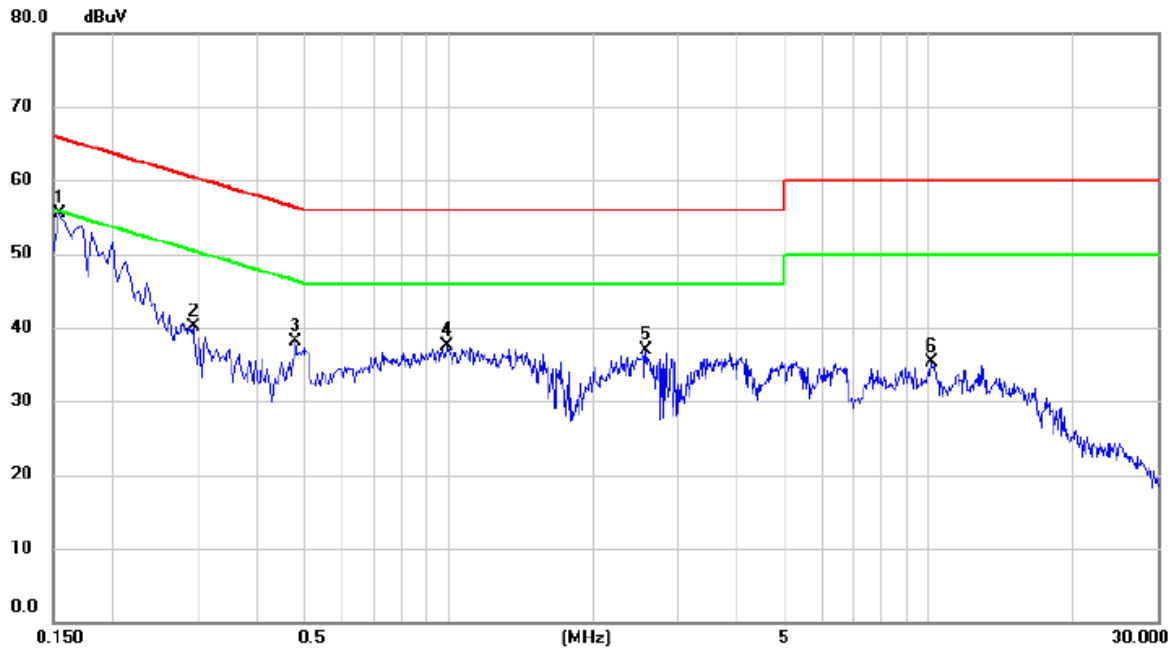

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1544	45.84	9.61	55.45	65.76	-10.31	peak	
2		0.2940	30.39	9.65	40.04	60.41	-20.37	peak	
3		0.4786	28.45	9.69	38.14	56.36	-18.22	peak	
4		0.9960	27.79	9.72	37.51	56.00	-18.49	peak	
5		2.5754	27.16	9.82	36.98	56.00	-19.02	peak	
6		10.1130	25.06	10.16	35.22	60.00	-24.78	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Note: The measured value have enough margin over 20dB than the limit, therefore they are not reported.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ

Test Mode: TX N (HT20) Mode Channel 157

Vertical

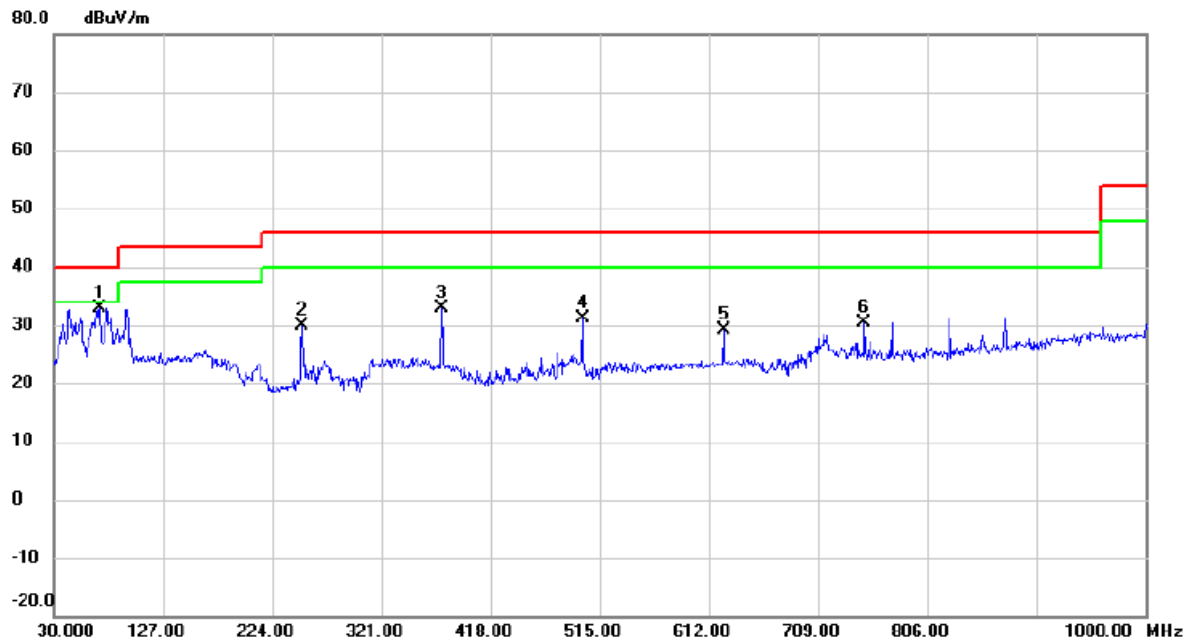


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	70.7400	51.24	-18.36	32.88	40.00	-7.12	peak	
2		250.1900	46.56	-16.67	29.89	46.00	-16.11	peak	
3		374.8350	46.09	-13.11	32.98	46.00	-13.02	peak	
4		499.9650	41.45	-10.32	31.13	46.00	-14.87	peak	
5		625.0950	36.79	-7.75	29.04	46.00	-16.96	peak	
6		750.2250	36.27	-5.82	30.45	46.00	-15.55	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N (HT20) Mode Channel 157

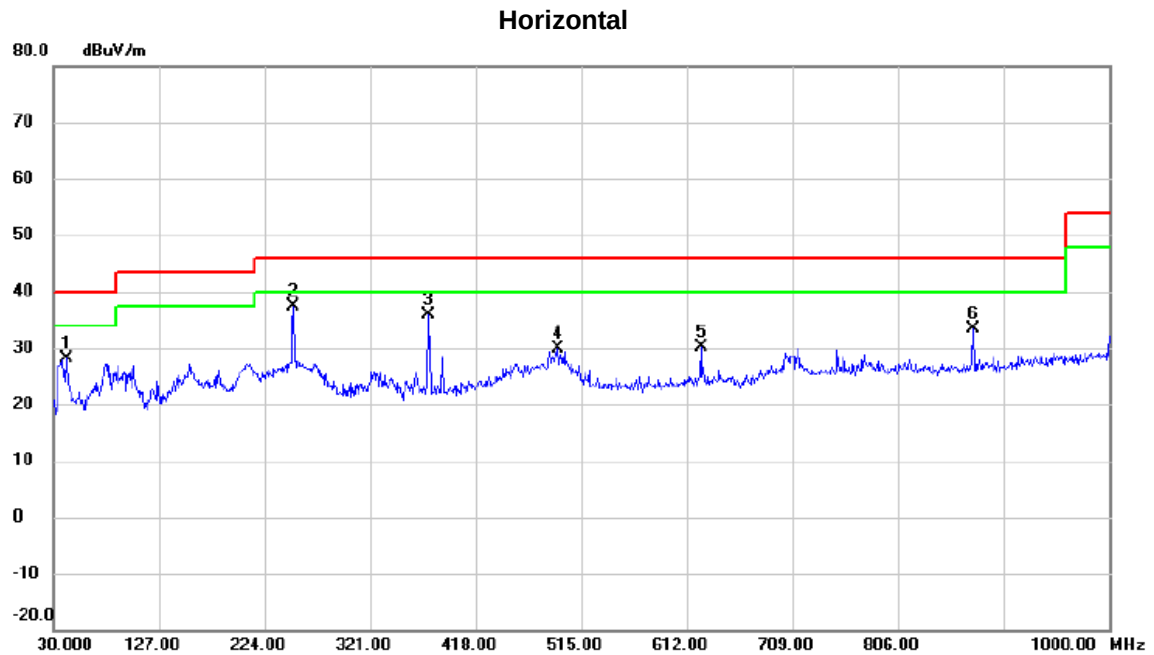

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.1250	45.04	-16.86	28.18	40.00	-11.82	peak	
2	*	250.1900	54.10	-16.67	37.43	46.00	-8.57	peak	
3		374.8350	49.02	-13.11	35.91	46.00	-10.09	peak	
4		493.6600	40.25	-10.43	29.82	46.00	-16.18	peak	
5		625.0950	37.81	-7.75	30.06	46.00	-15.94	peak	
6		874.8700	38.05	-4.66	33.39	46.00	-12.61	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

130 dBuV/m

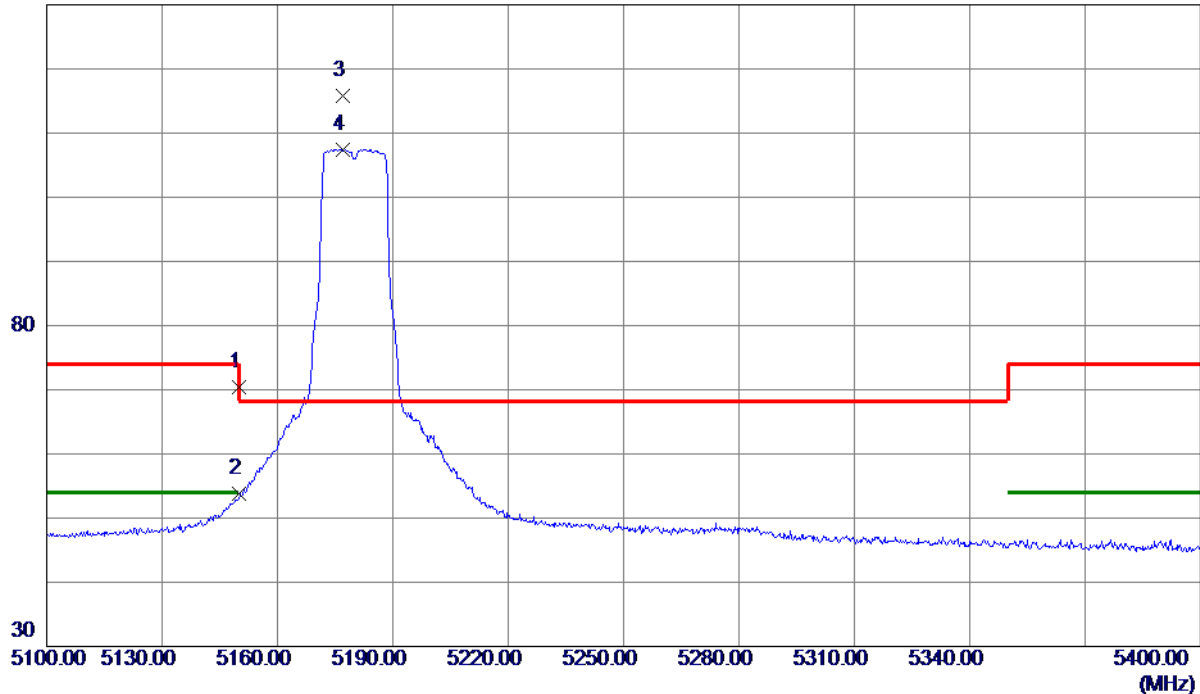

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	32.44	37.88	70.32	74.00	-3.68	Peak	
2	5150.0000	15.90	37.88	53.78	54.00	-0.22	AVG	
3 *	5176.9500	77.98	37.77	115.75	68.30	47.45	Peak	No limit
4	5176.9500	69.69	37.77	107.46	999.00	-891.54	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

80 dBuV/m

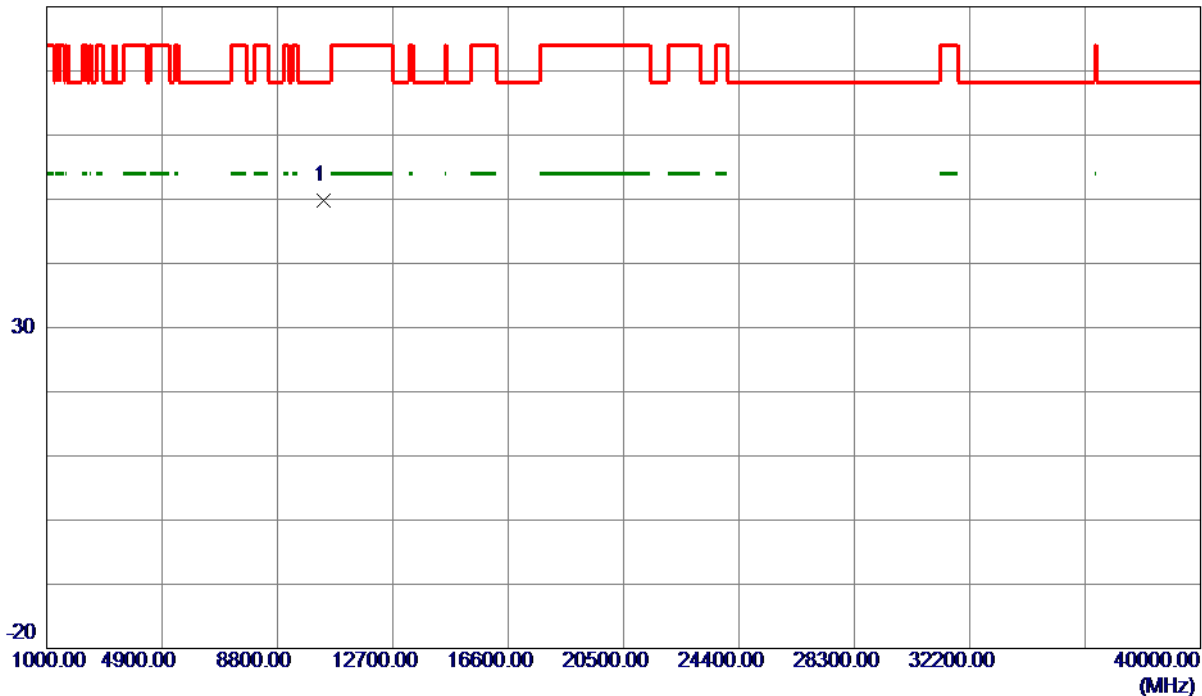

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10362.0080	48.17	1.65	49.82	68.30	-18.48	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Horizontal

130 dBuV/m

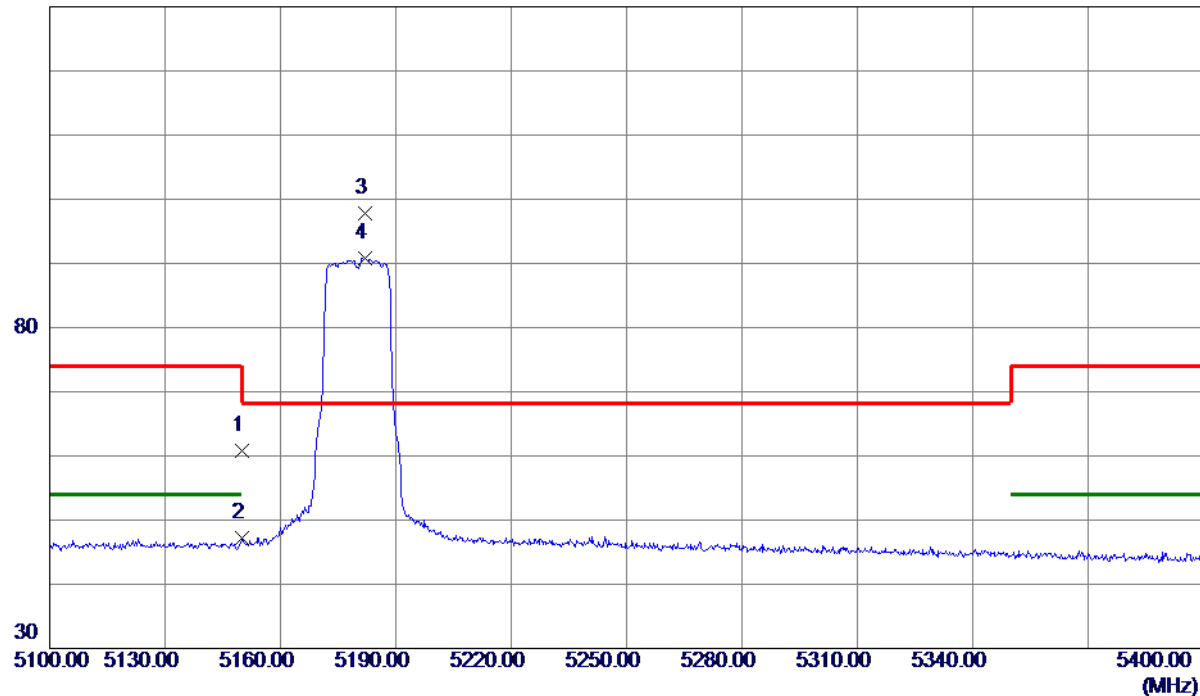

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.94	37.88	60.82	74.00	-13.18	Peak	
2	5150.0000	9.26	37.88	47.14	54.00	-6.86	AVG	
3 *	5182.0500	59.99	37.75	97.74	68.30	29.44	Peak	No limit
4	5182.0500	53.13	37.75	90.88	999.00	-908.12	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Horizontal

80 dBuV/m

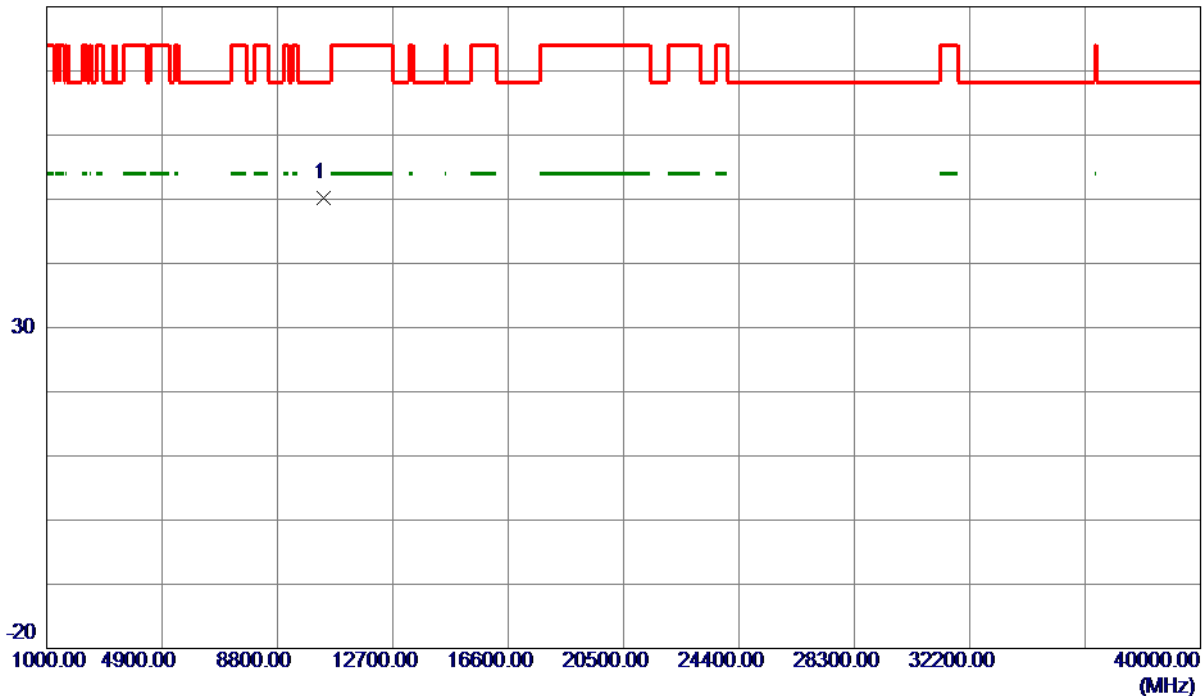

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.2779	48.54	1.64	50.18	68.30	-18.12	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

130 dBuV/m

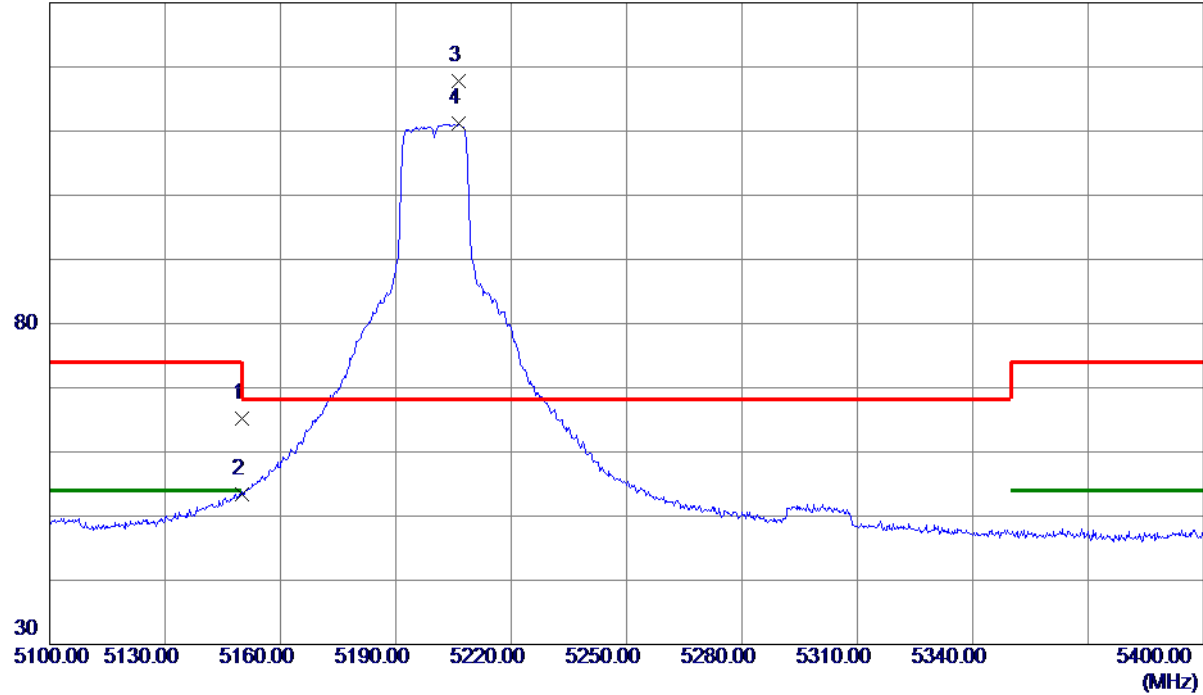

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	27.40	37.88	65.28	74.00	-8.72	Peak	
2	5150.0000	15.46	37.88	53.34	54.00	-0.66	AVG	
3 *	5206.3500	80.13	37.67	117.80	68.30	49.50	Peak	No limit
4	5206.3500	73.49	37.67	111.16	999.00	-887.84	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

80 dBuV/m

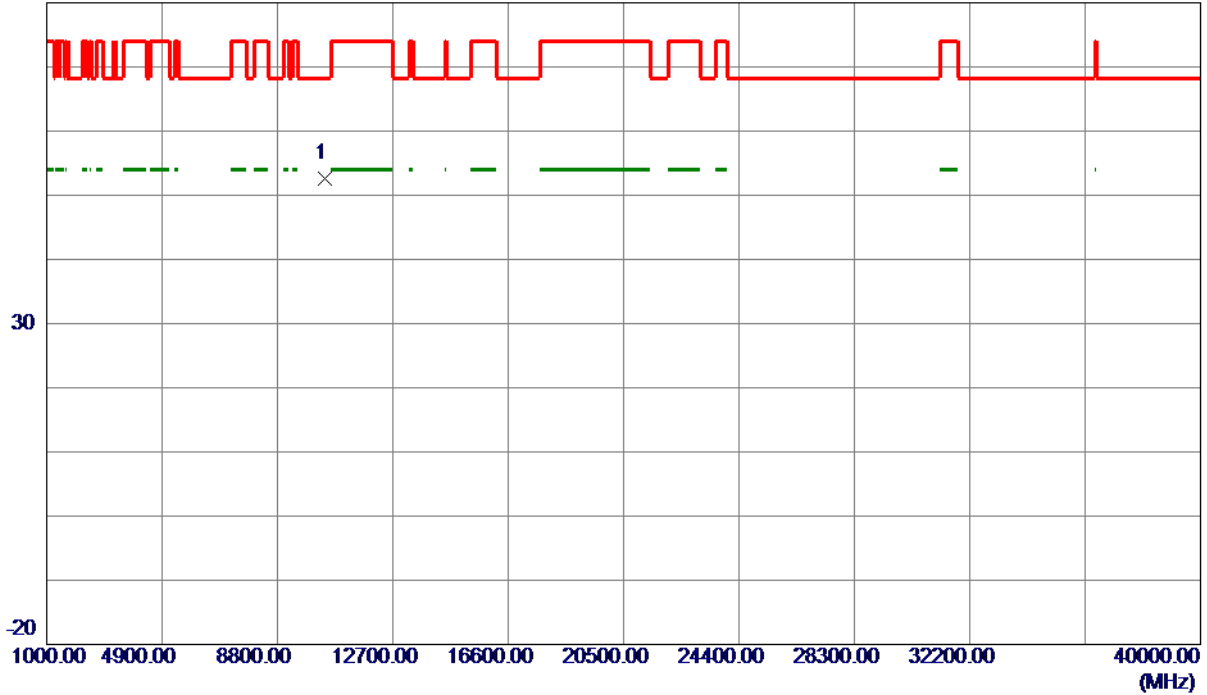

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.2840	50.87	1.72	52.59	68.30	-15.71	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Horizontal

130 dBuV/m

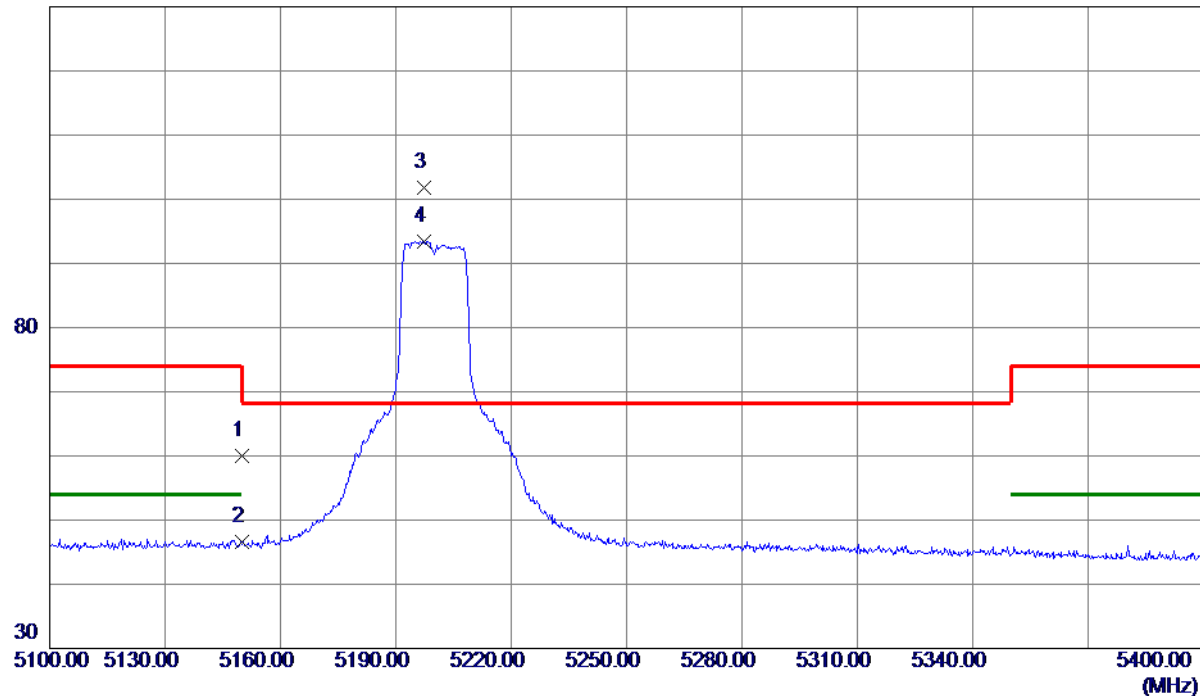

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.21	37.88	60.09	74.00	-13.91	Peak	
2	5150.0000	8.65	37.88	46.53	54.00	-7.47	AVG	
3 *	5197.2000	64.20	37.69	101.89	68.30	33.59	Peak	No limit
4	5197.2000	55.79	37.69	93.48	999.00	-905.52	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Horizontal

80 dBuV/m

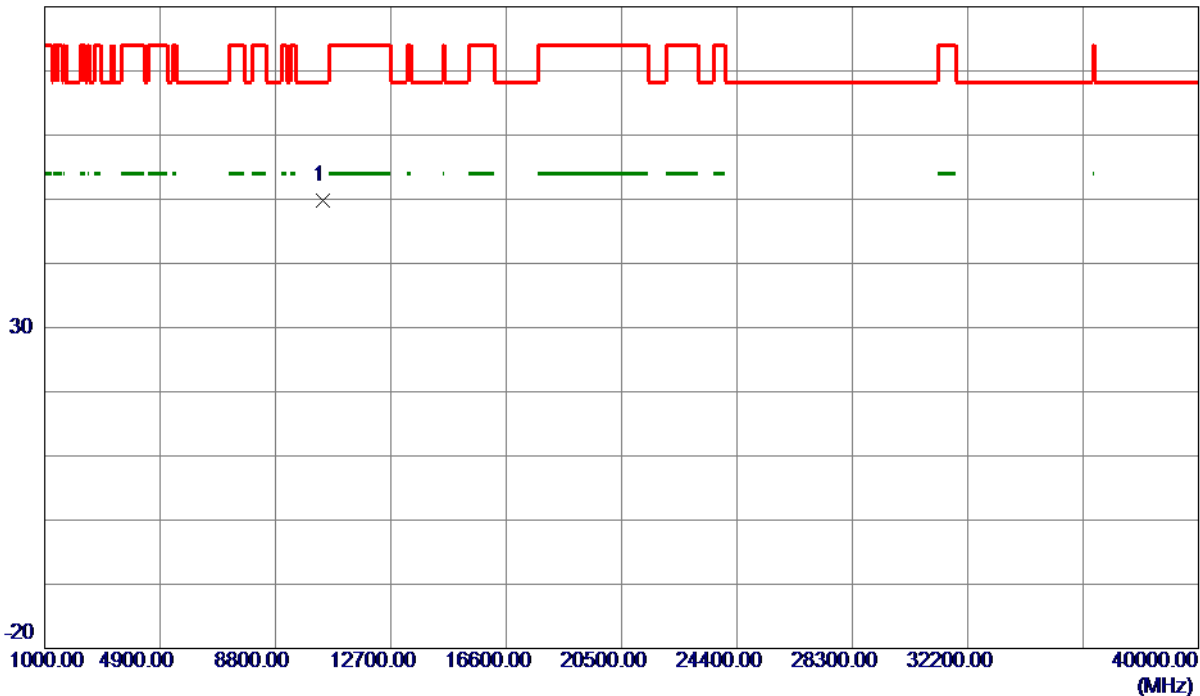

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10397.5420	48.17	1.72	49.89	68.30	-18.41	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

130 dBuV/m

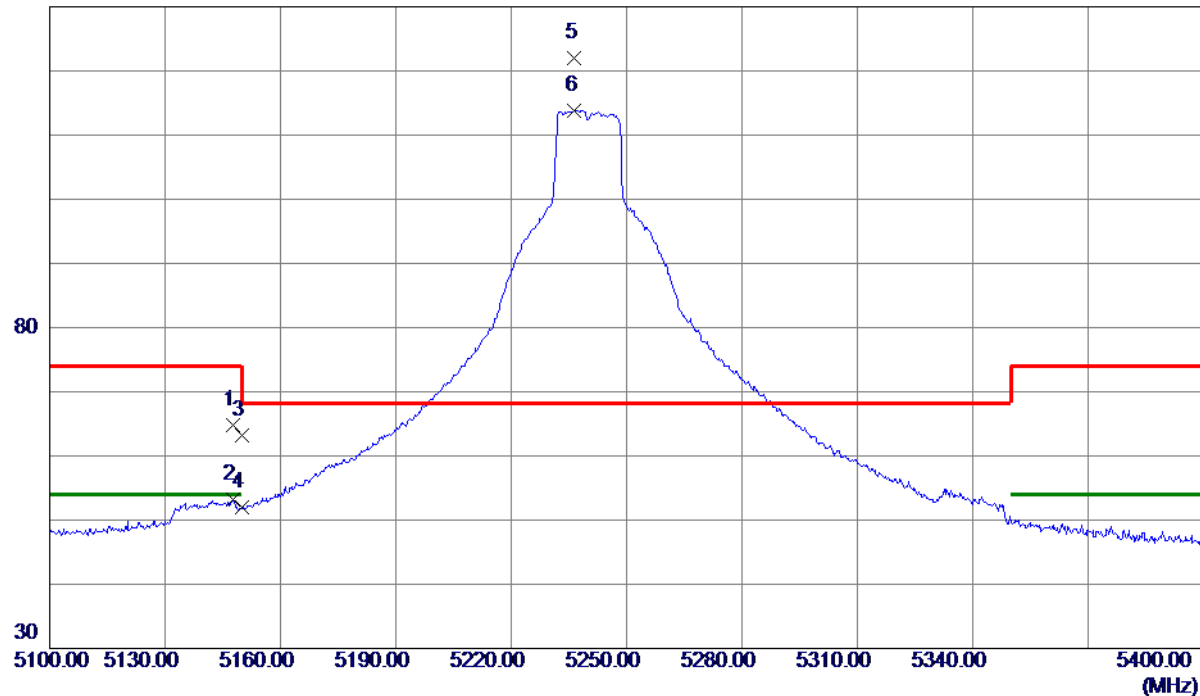

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.5500	26.84	37.88	64.72	74.00	-9.28	Peak	
2	5147.5500	15.26	37.88	53.14	54.00	-0.86	AVG	
3	5150.0000	25.35	37.88	63.23	74.00	-10.77	Peak	
4	5150.0000	14.17	37.88	52.05	54.00	-1.95	AVG	
5 *	5236.5000	84.33	37.63	121.96	68.30	53.66	Peak	No limit
6	5236.5000	76.25	37.63	113.88	999.00	-885.12	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

80 dBuV/m

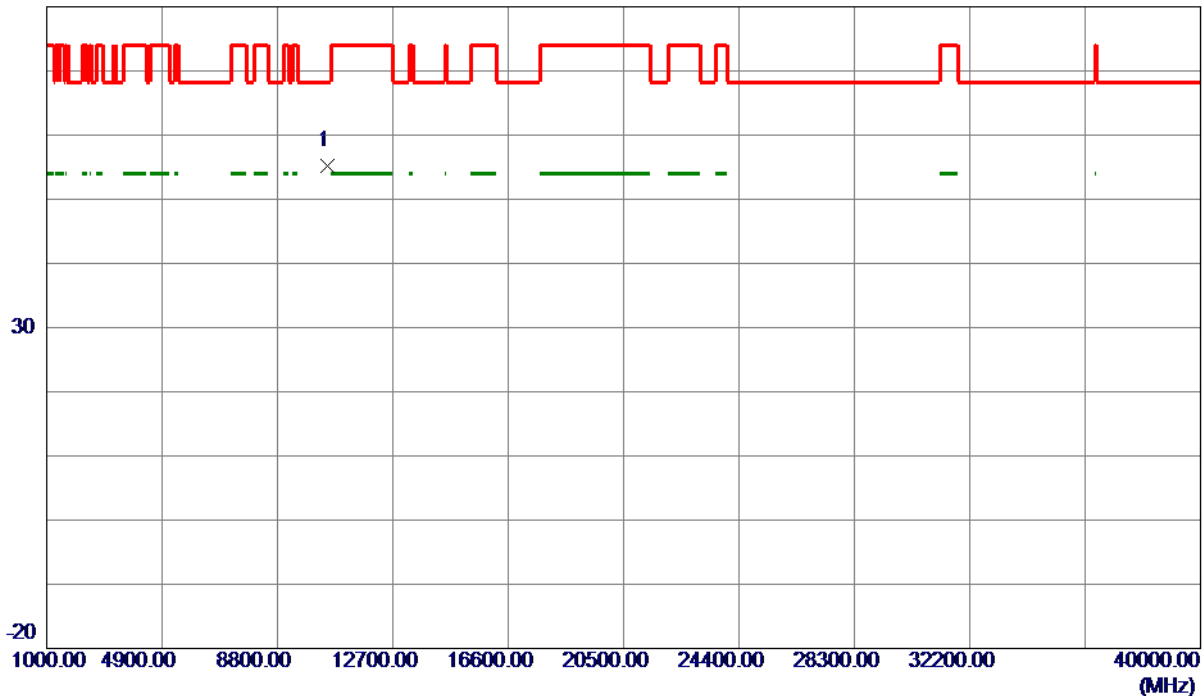

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.2340	53.32	1.80	55.12	68.30	-13.18	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

130 dBuV/m

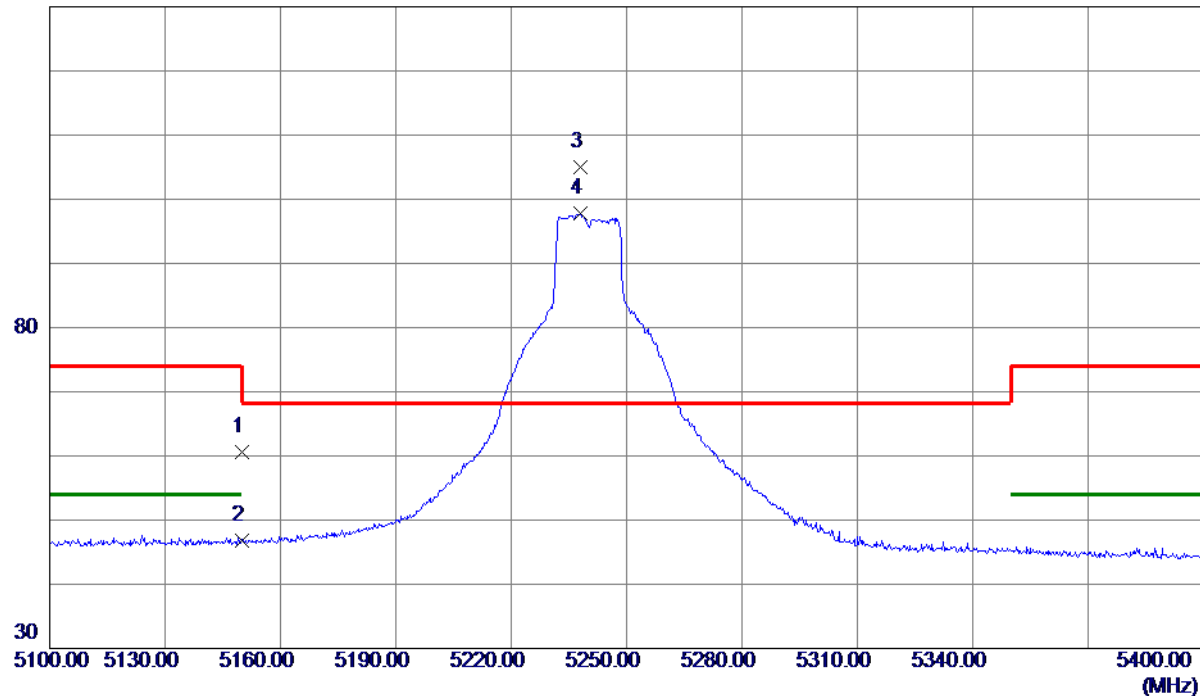

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.67	37.88	60.55	74.00	-13.45	Peak	
2	5150.0000	8.86	37.88	46.74	54.00	-7.26	AVG	
3 *	5237.8500	67.28	37.63	104.91	68.30	36.61	Peak	No limit
4	5237.8500	60.15	37.63	97.78	999.00	-901.22	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

80 dBuV/m

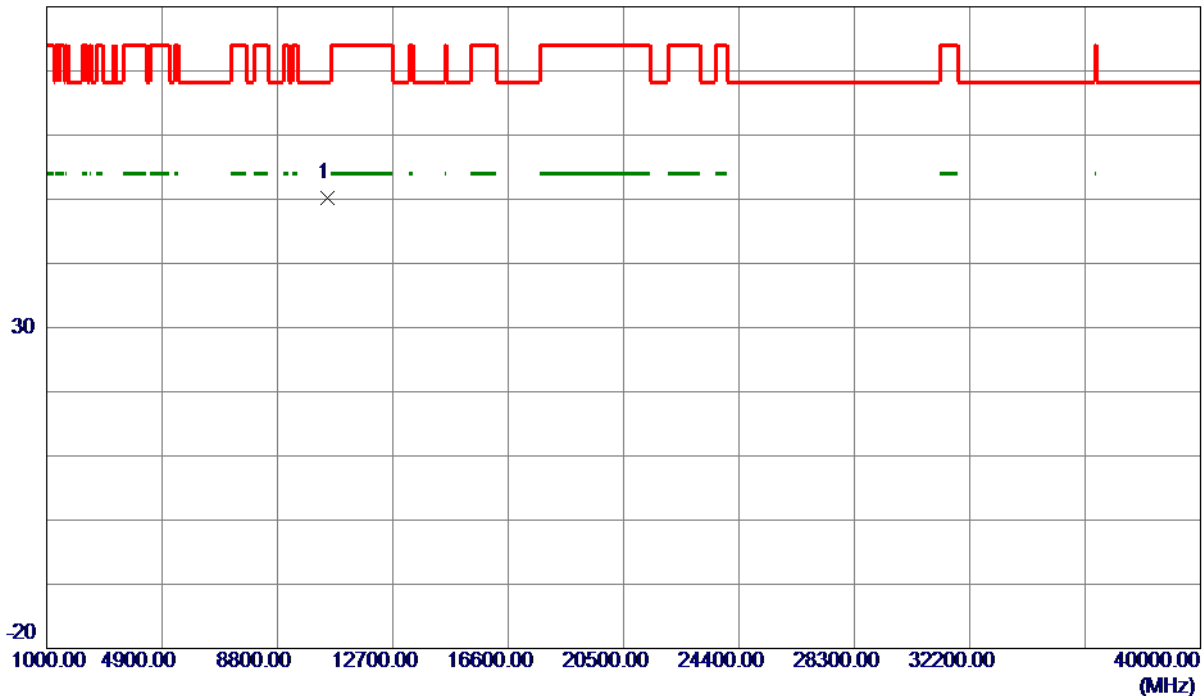

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10478.3560	48.37	1.80	50.17	68.30	-18.13	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Vertical

130 dBuV/m

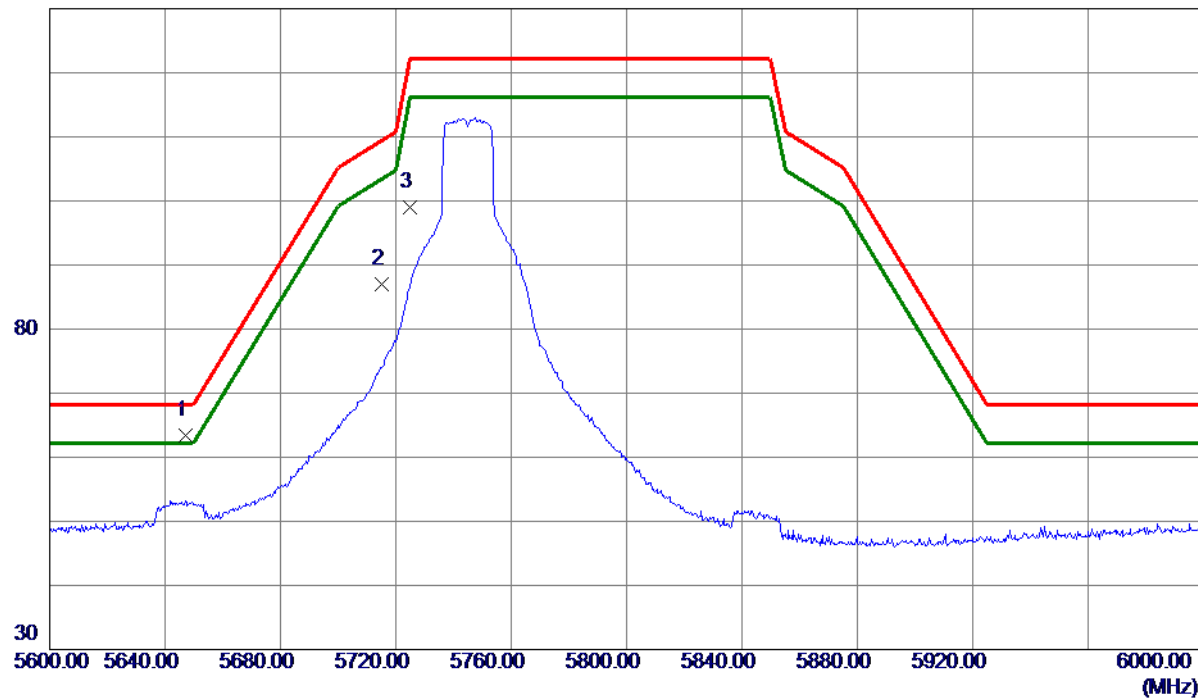

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.0000	25.06	38.37	63.43	68.20	-4.77	Peak	
2	5715.0000	48.57	38.46	87.03	109.40	-22.37	Peak	
3	5725.0000	60.59	38.50	99.09	122.20	-23.11	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Vertical

80 dBuV/m

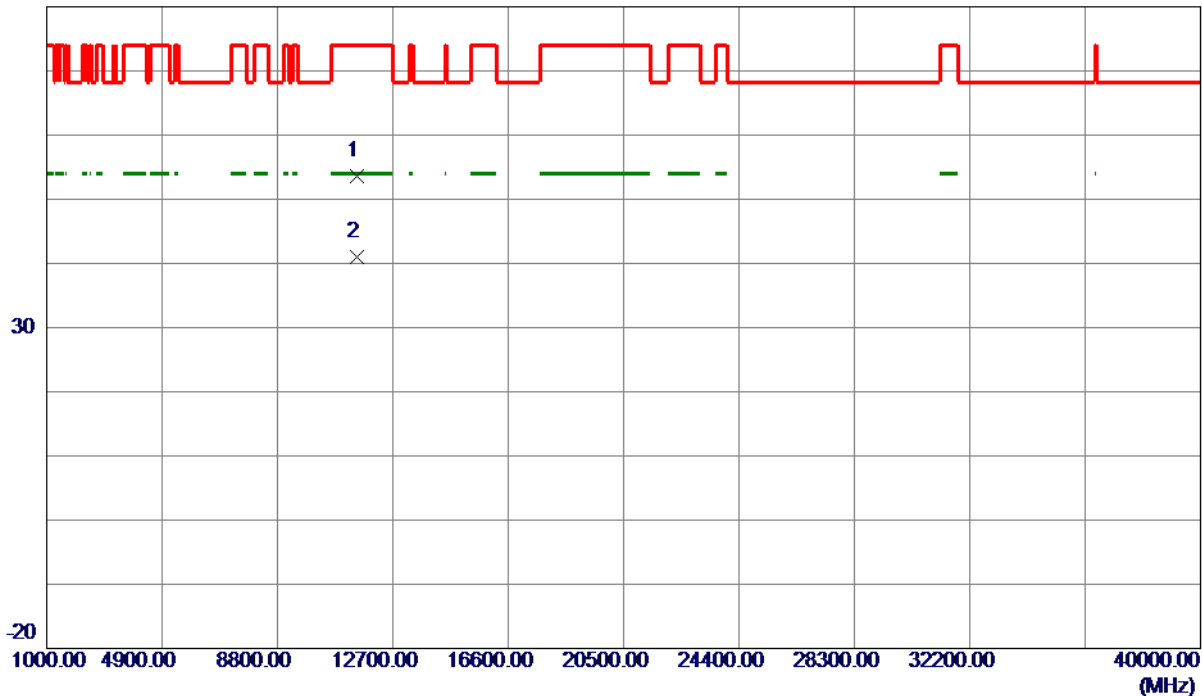

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.9509	51.31	2.20	53.51	74.00	-20.49	Peak	
2 *	11490.8630	38.88	2.21	41.09	54.00	-12.91	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Horizontal

130 dBuV/m

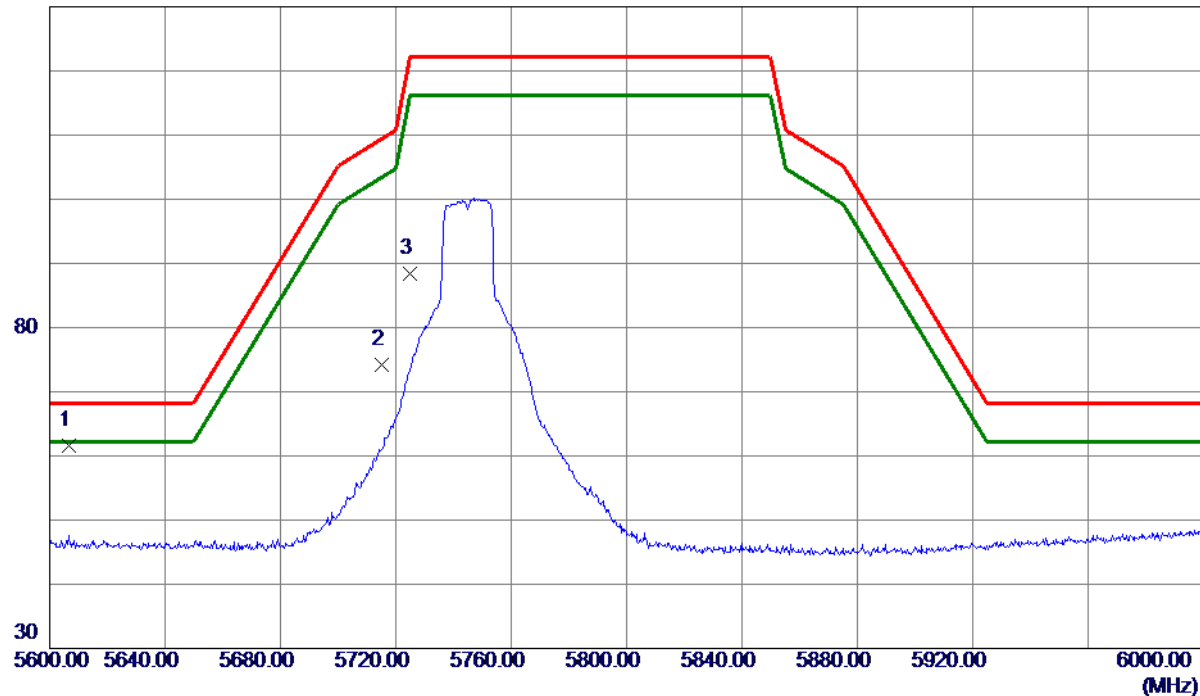

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5606.6000	23.18	38.34	61.52	68.20	-6.68	Peak	
2	5715.0000	35.76	38.46	74.22	109.40	-35.18	Peak	
3	5725.0000	49.93	38.50	88.43	122.20	-33.77	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Horizontal

80 dBuV/m

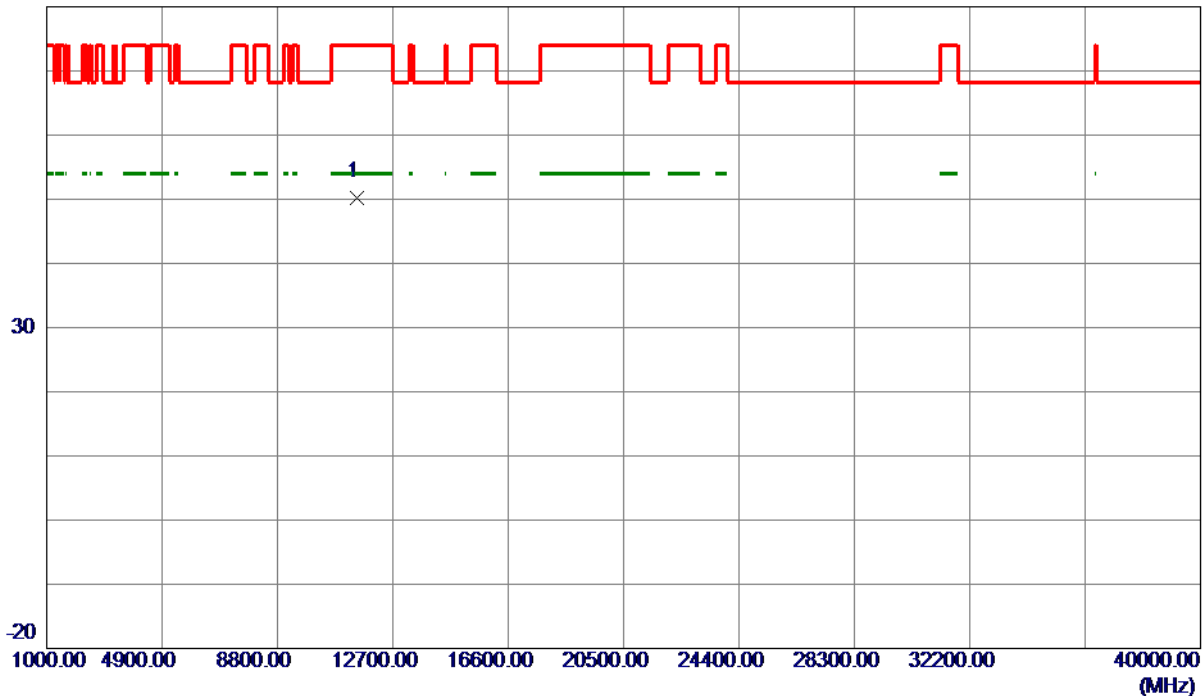

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.7870	48.10	2.20	50.30	74.00	-23.70	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Vertical

130 dBuV/m

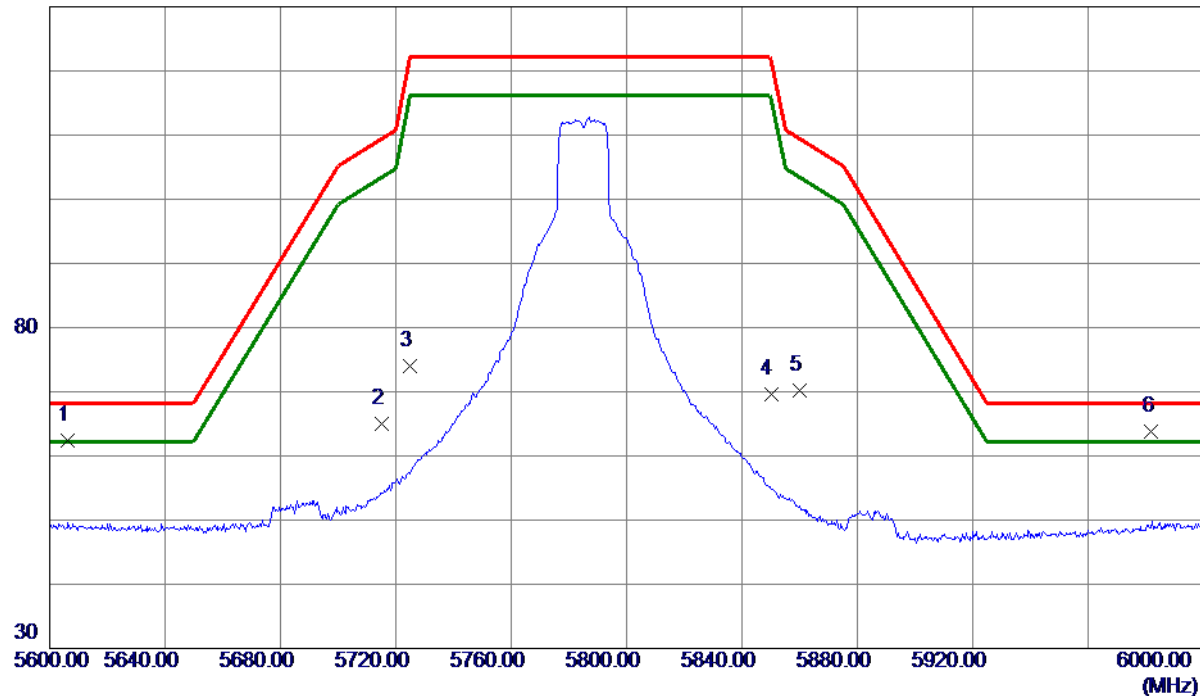

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5606.4000	24.07	38.34	62.41	68.20	-5.79	Peak	
2	5715.0000	26.54	38.46	65.00	109.40	-44.40	Peak	
3	5725.0000	35.45	38.50	73.95	122.20	-48.25	Peak	
4	5850.0000	30.61	38.91	69.52	122.20	-52.68	Peak	
5	5860.0000	31.30	38.94	70.24	109.40	-39.16	Peak	
6 *	5982.0000	24.52	39.21	63.73	68.20	-4.47	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Vertical

80 dBuV/m

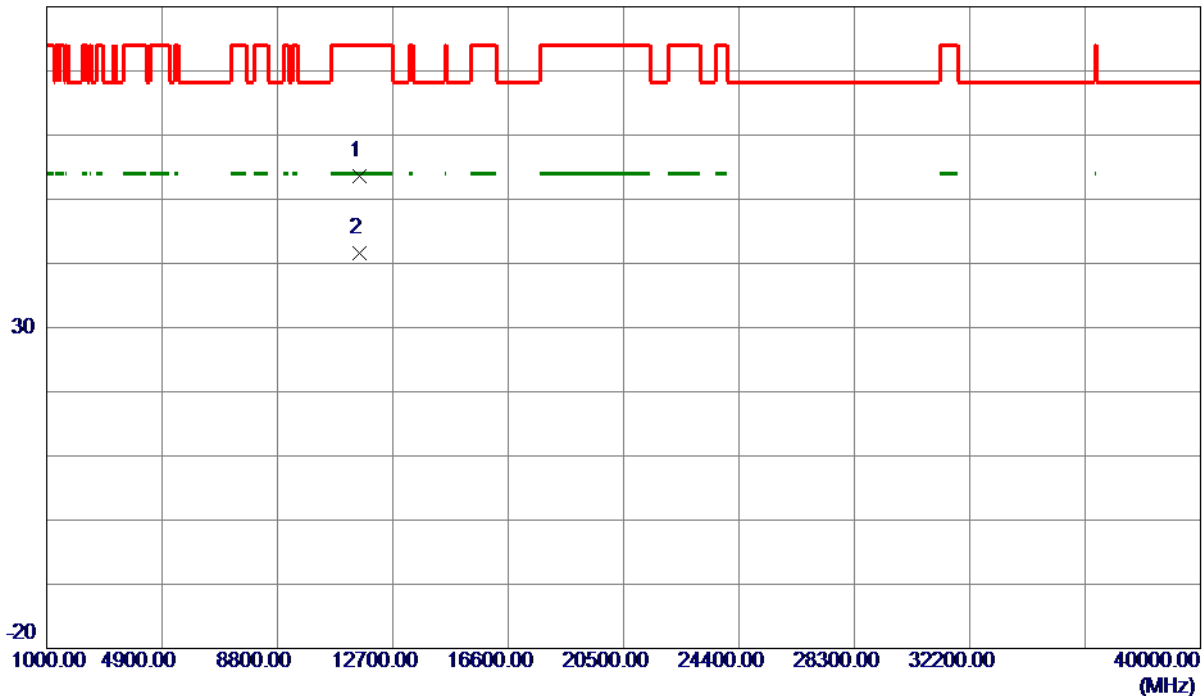

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11567.7260	51.41	2.27	53.68	74.00	-20.32	Peak	
2 *	11571.6730	39.31	2.28	41.59	54.00	-12.41	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Horizontal

130 dBuV/m

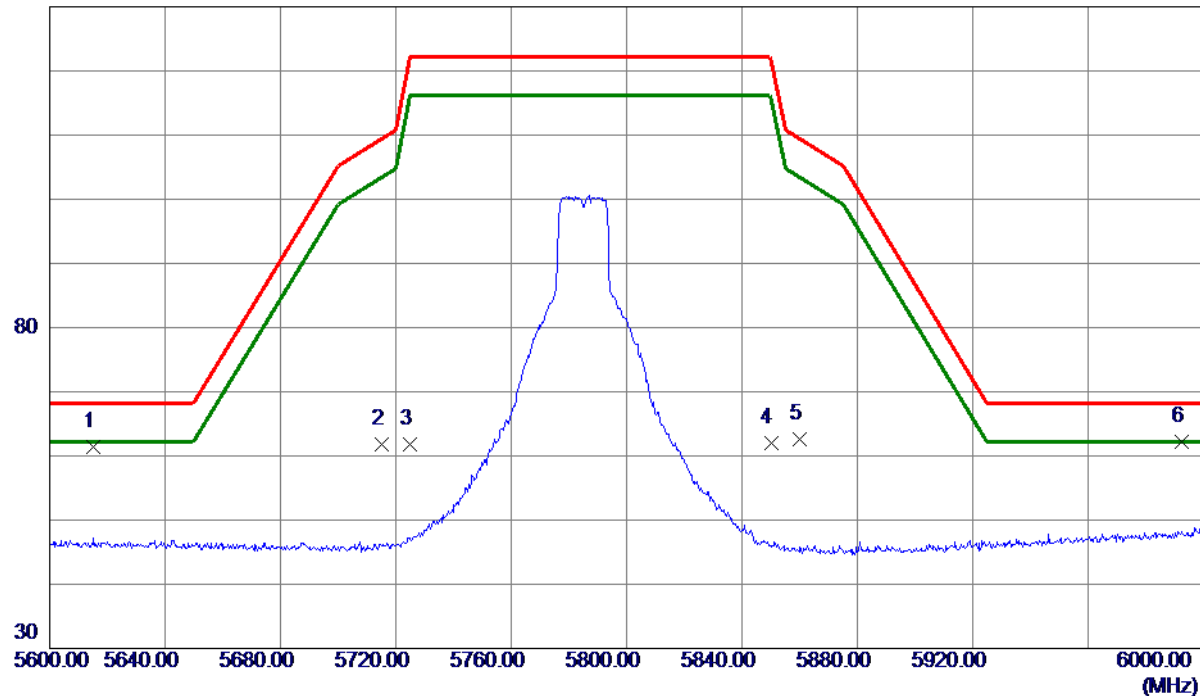

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5615.2000	23.13	38.35	61.48	68.20	-6.72	Peak	
2	5715.0000	23.40	38.46	61.86	109.40	-47.54	Peak	
3	5725.0000	23.21	38.50	61.71	122.20	-60.49	Peak	
4	5850.0000	23.18	38.91	62.09	122.20	-60.11	Peak	
5	5860.0000	23.66	38.94	62.60	109.40	-46.80	Peak	
6 *	5992.6000	22.94	39.24	62.18	68.20	-6.02	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Horizontal

80 dBuV/m

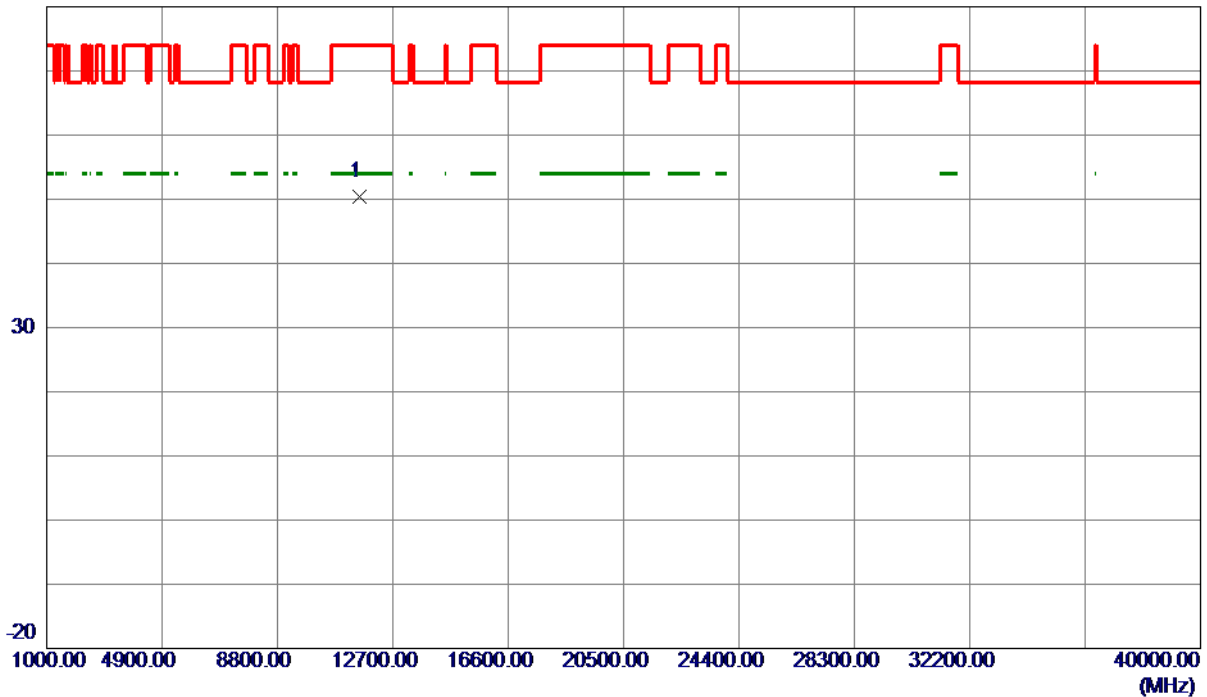

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11572.9900	48.15	2.28	50.43	74.00	-23.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Vertical

130 dBuV/m

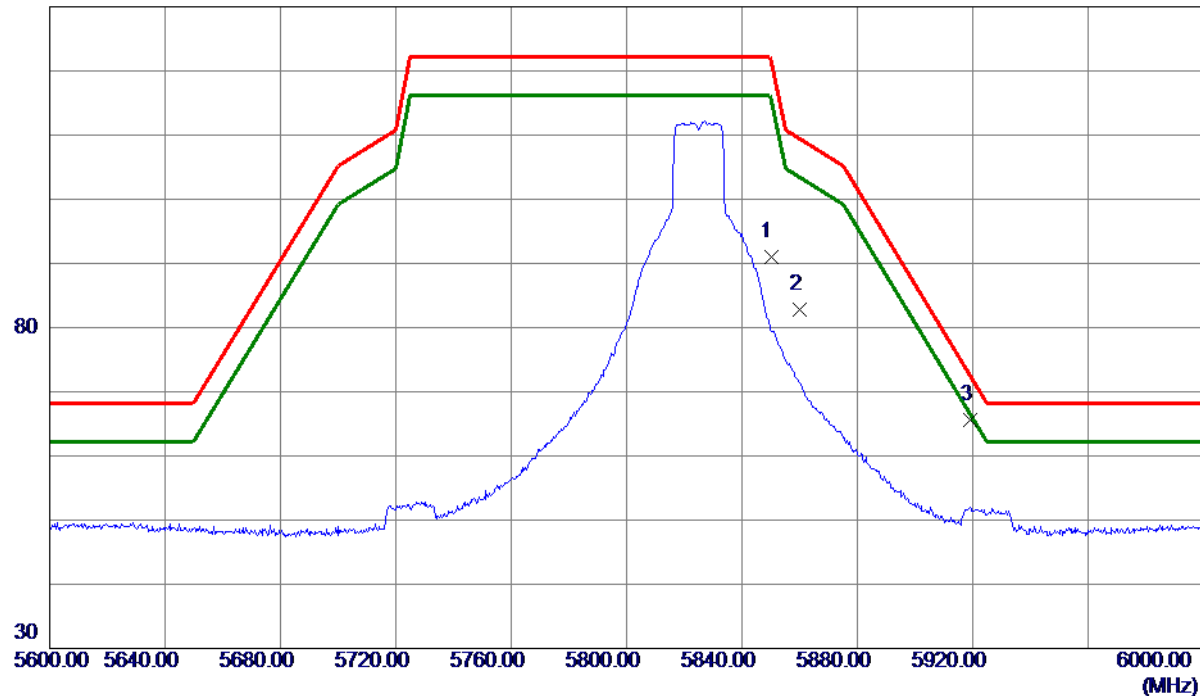

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	52.13	38.91	91.04	122.20	-31.16	Peak	
2	5860.0000	43.91	38.94	82.85	109.40	-26.55	Peak	
3 *	5919.0000	26.43	39.09	65.52	72.64	-7.12	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Vertical

80 dBuV/m

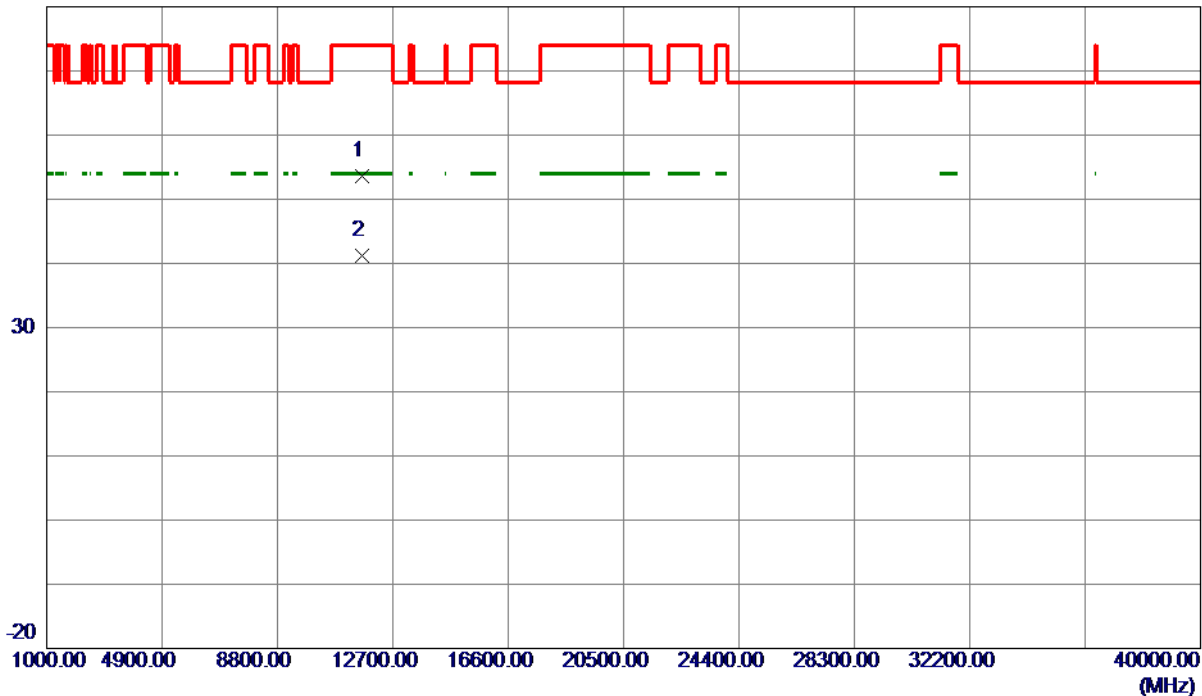

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11651.4090	51.44	2.10	53.54	74.00	-20.46	Peak	
2 *	11652.0020	39.01	2.10	41.11	54.00	-12.89	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

130 dBuV/m

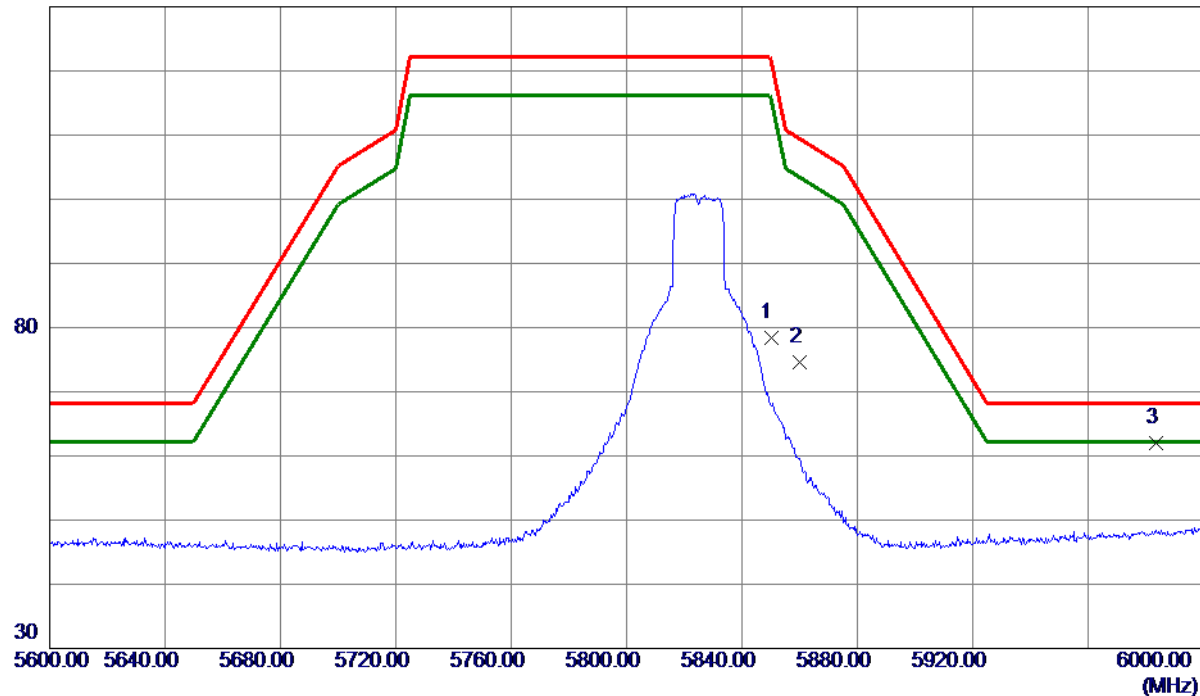

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	39.41	38.91	78.32	122.20	-43.88	Peak	
2	5860.0000	35.61	38.94	74.55	109.40	-34.85	Peak	
3 *	5983.6000	22.85	39.22	62.07	68.20	-6.13	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

80 dBuV/m

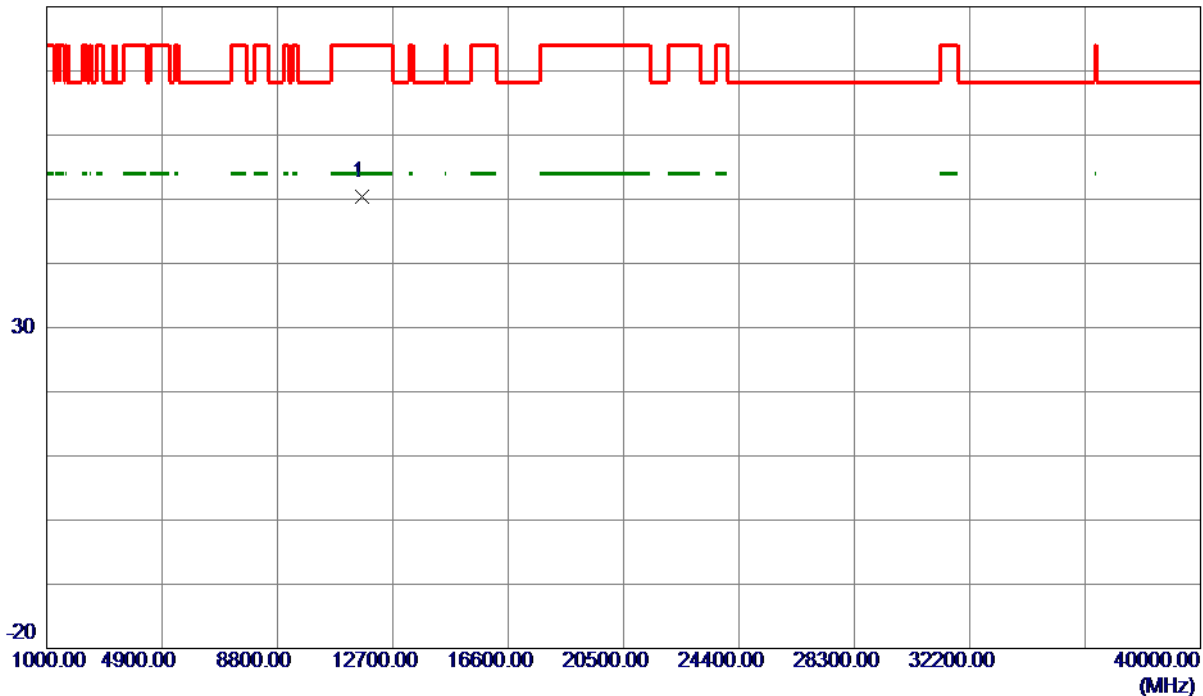

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.6220	48.33	2.09	50.42	74.00	-23.58	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

130 dBuV/m

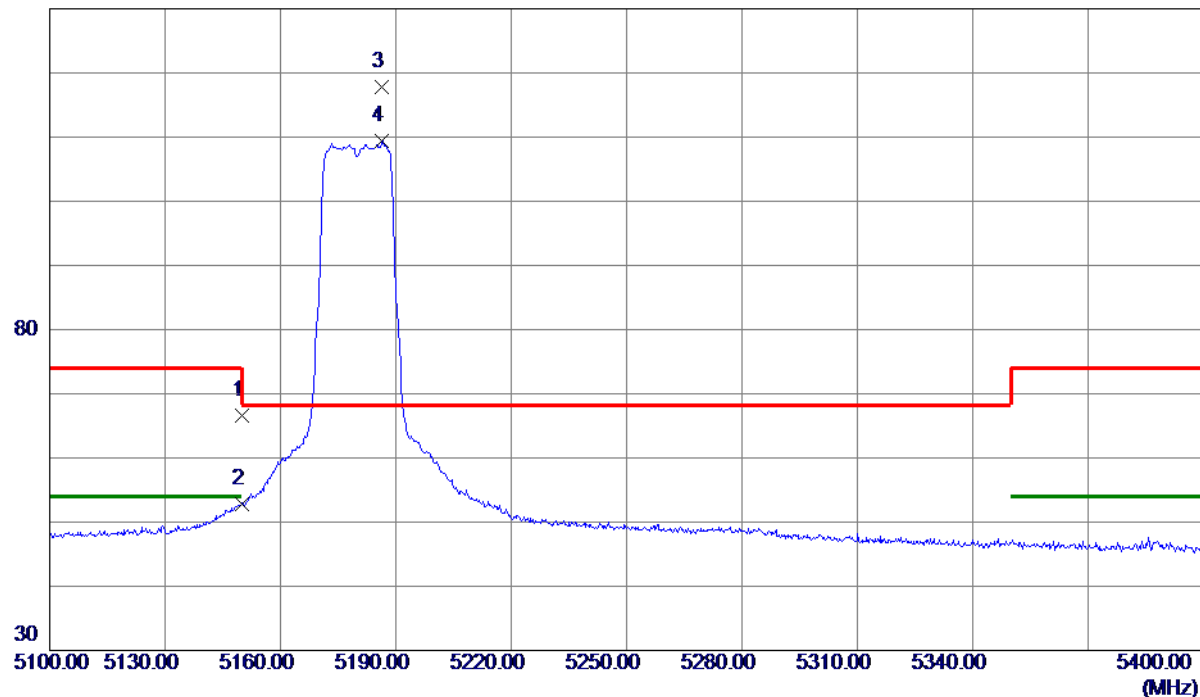

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	28.65	37.88	66.53	74.00	-7.47	Peak	
2	5150.0000	14.83	37.88	52.71	54.00	-1.29	AVG	
3 *	5186.4000	80.08	37.73	117.81	68.30	49.51	Peak	No limit
4	5186.4000	71.66	37.73	109.39	999.00	-889.61	AVG	No limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

80 dBuV/m

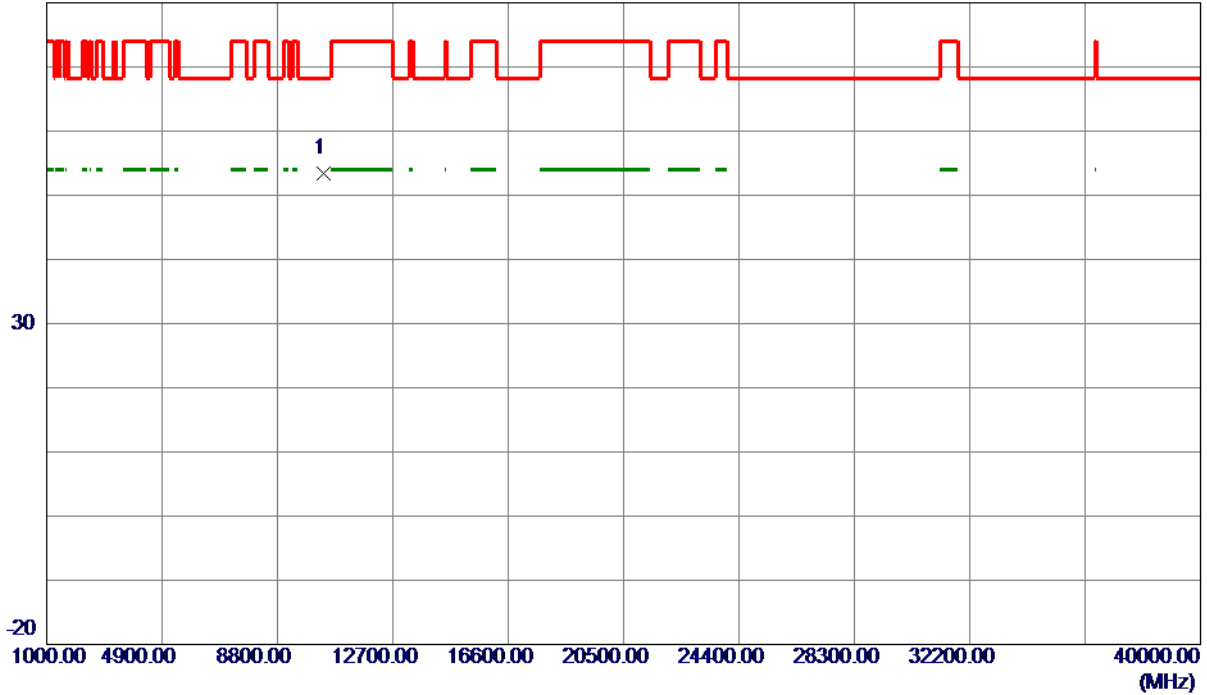

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.5570	51.69	1.65	53.34	68.30	-14.96	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

130 dBuV/m

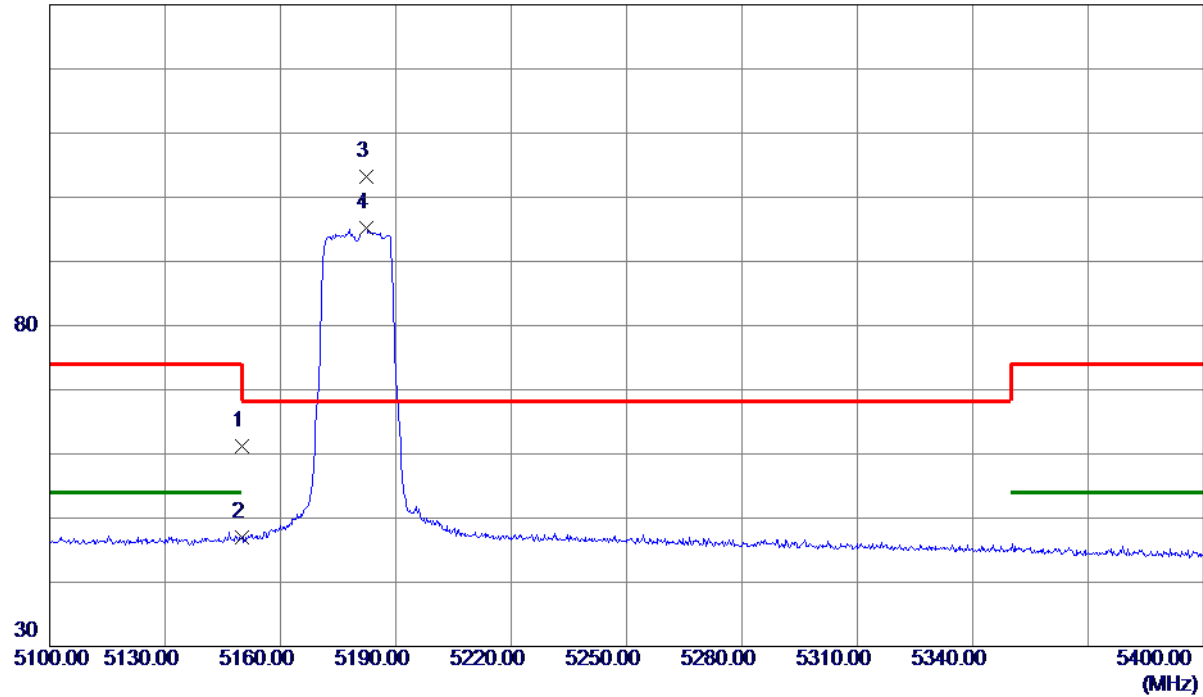

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.35	37.88	61.23	74.00	-12.77	Peak	
2	5150.0000	9.06	37.88	46.94	54.00	-7.06	AVG	
3 *	5182.3500	65.44	37.75	103.19	68.30	34.89	Peak	No limit
4	5182.3500	57.43	37.75	95.18	999.00	-903.82	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

80 dBuV/m

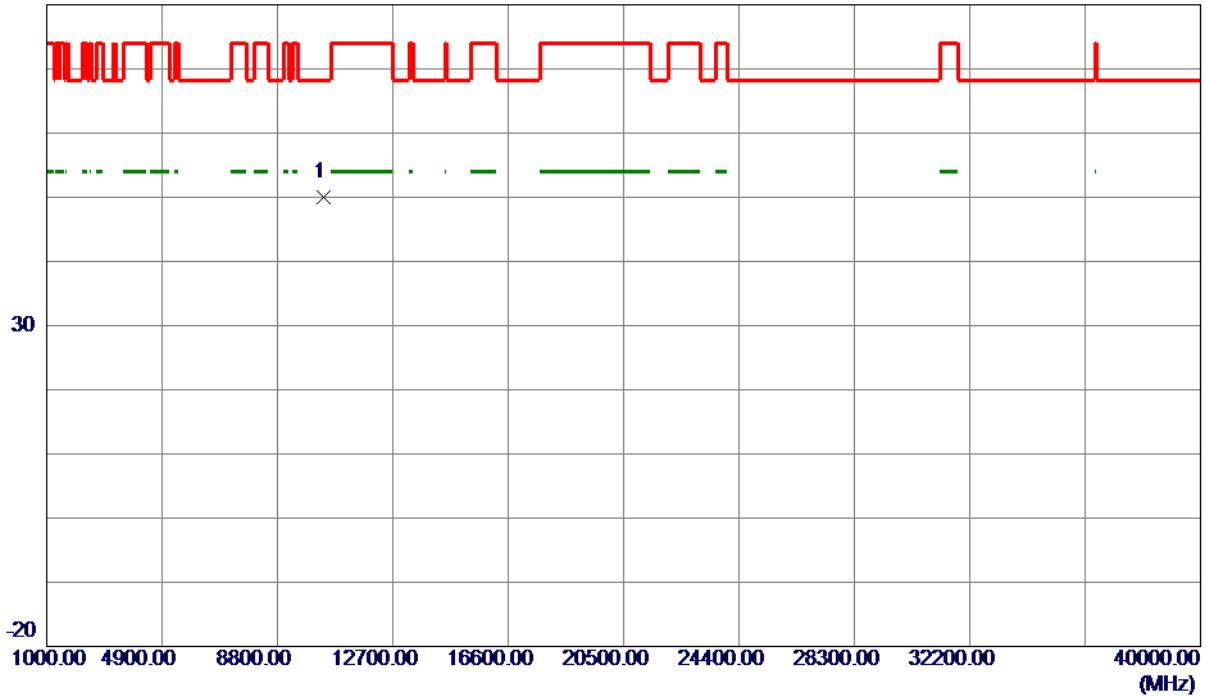

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.4720	48.41	1.65	50.06	68.30	-18.24	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

130 dBuV/m

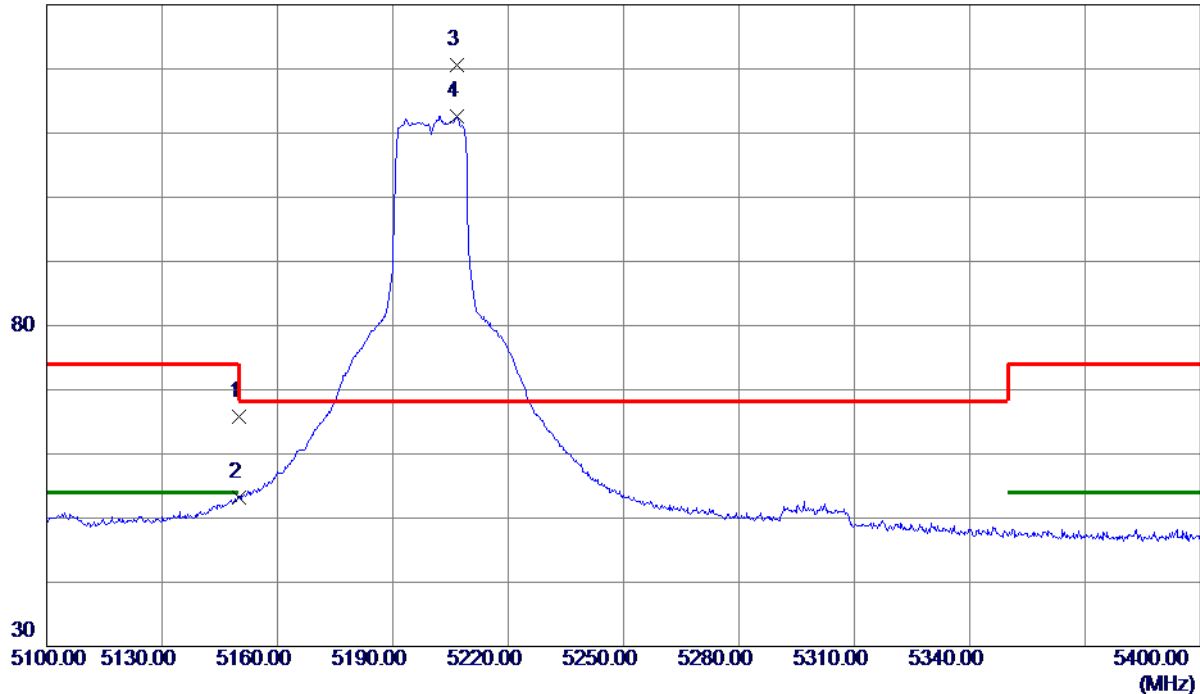

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	27.89	37.88	65.77	74.00	-8.23	Peak	
2	5150.0000	15.34	37.88	53.22	54.00	-0.78	AVG	
3 *	5206.8000	82.96	37.67	120.63	68.30	52.33	Peak	No limit
4	5206.8000	74.97	37.67	112.64	999.00	-886.36	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

80 dBuV/m

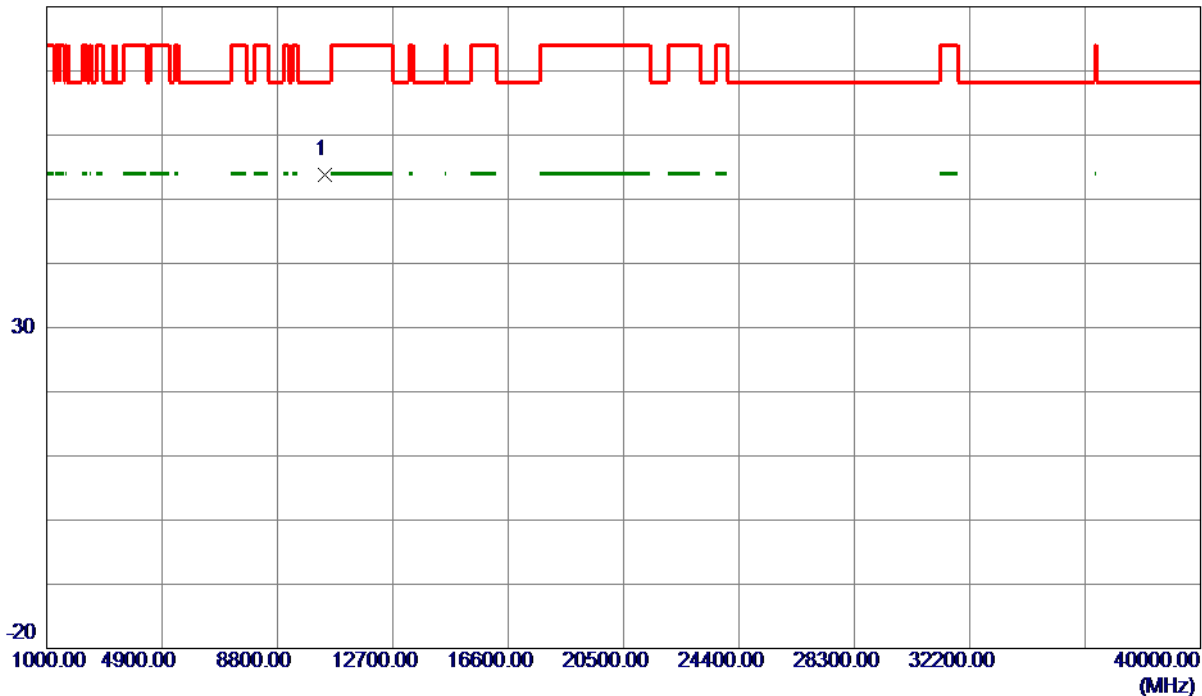

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10401.0740	52.17	1.72	53.89	68.30	-14.41	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

130 dBuV/m

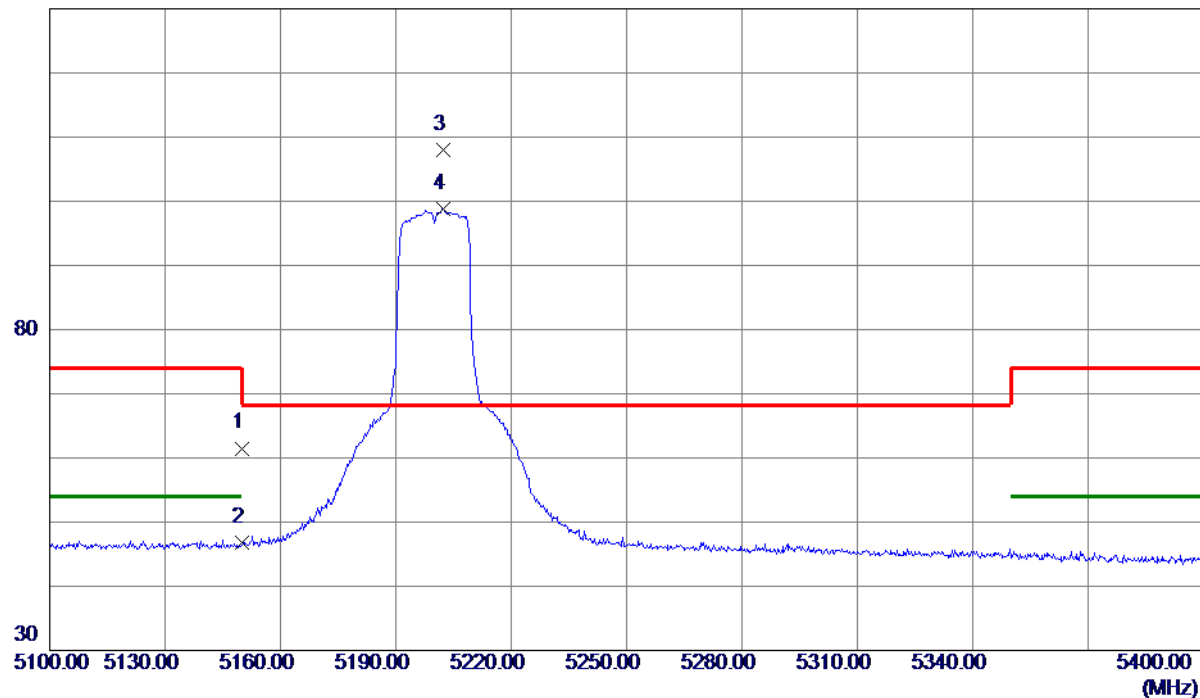

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.62	37.88	61.50	74.00	-12.50	Peak	
2	5150.0000	9.01	37.88	46.89	54.00	-7.11	AVG	
3 *	5202.4500	70.24	37.68	107.92	68.30	39.62	Peak	No limit
4	5202.4500	61.12	37.68	98.80	999.00	-900.20	AVG	No limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

80 dBuV/m

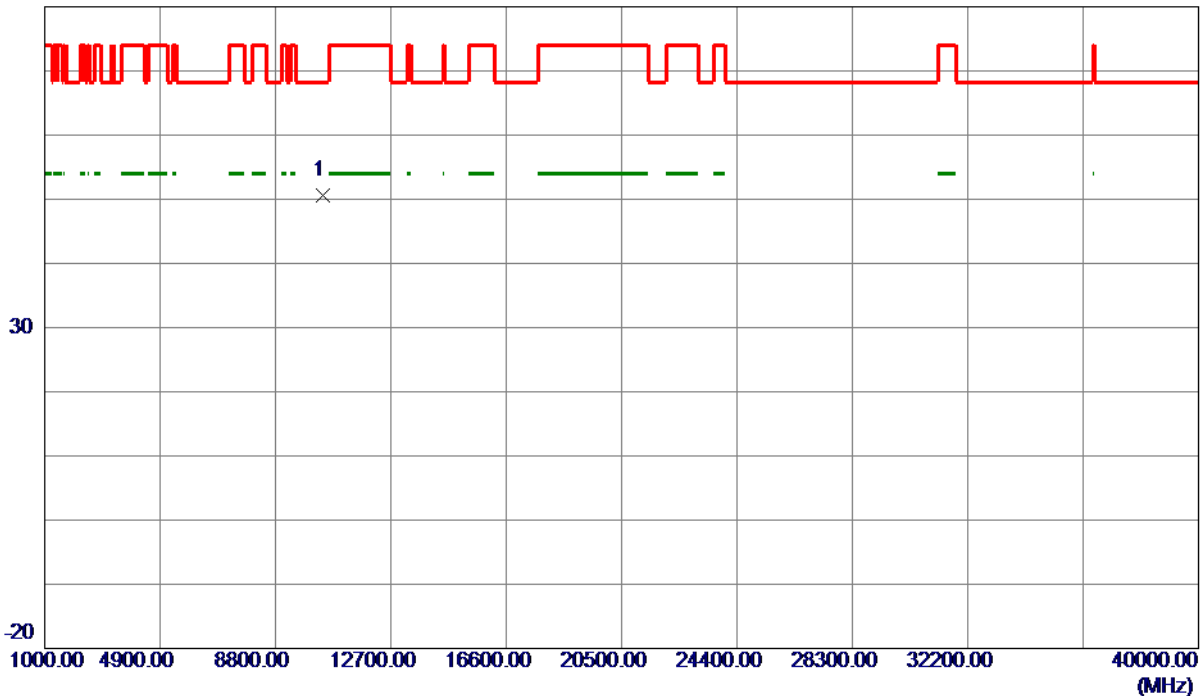

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10401.7120	48.97	1.72	50.69	68.30	-17.61	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

130 dBuV/m

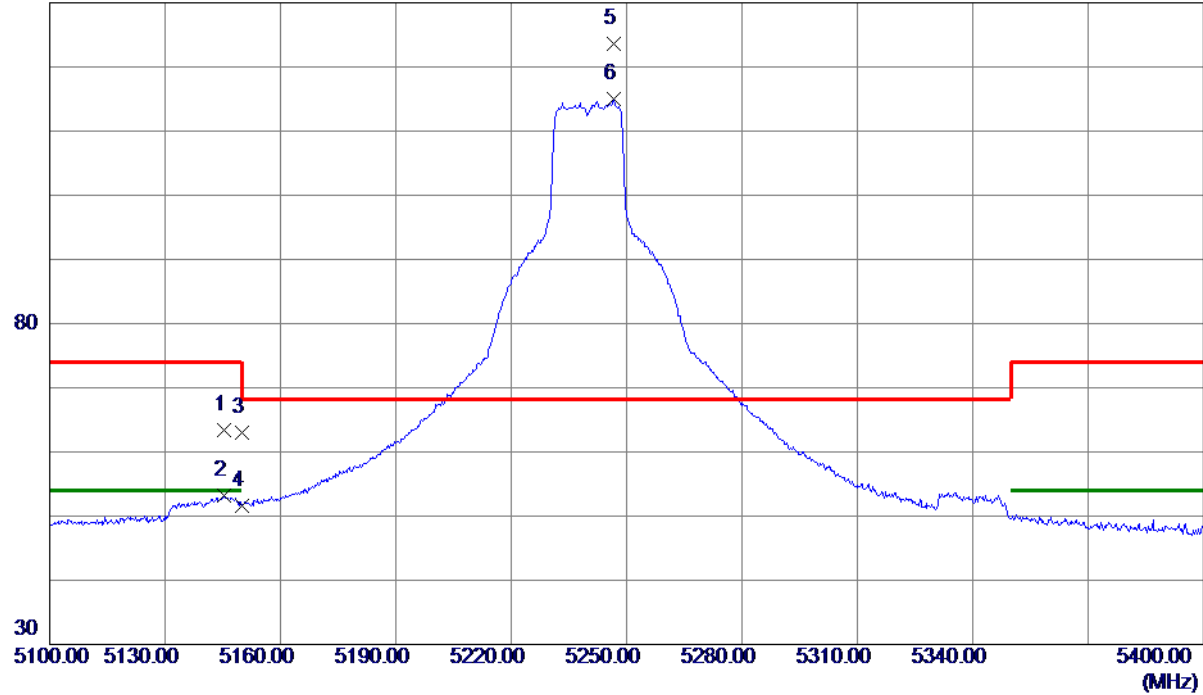

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.3000	25.58	37.89	63.47	74.00	-10.53	Peak	
2	5145.3000	15.34	37.89	53.23	54.00	-0.77	AVG	
3	5150.0000	25.19	37.88	63.07	74.00	-10.93	Peak	
4	5150.0000	13.69	37.88	51.57	54.00	-2.43	AVG	
5 *	5246.5500	86.05	37.61	123.66	68.30	55.36	Peak	No limit
6	5246.5500	77.45	37.61	115.06	999.00	-883.94	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

80 dBuV/m

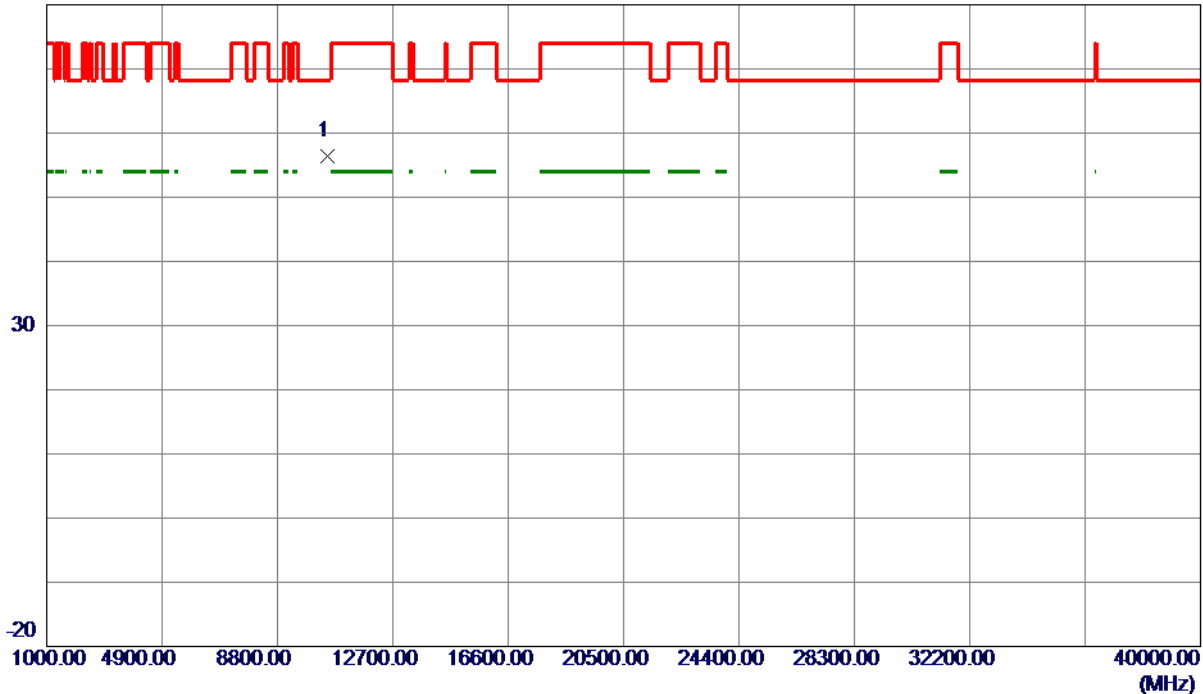

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.6860	54.68	1.80	56.48	68.30	-11.82	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

130 dBuV/m

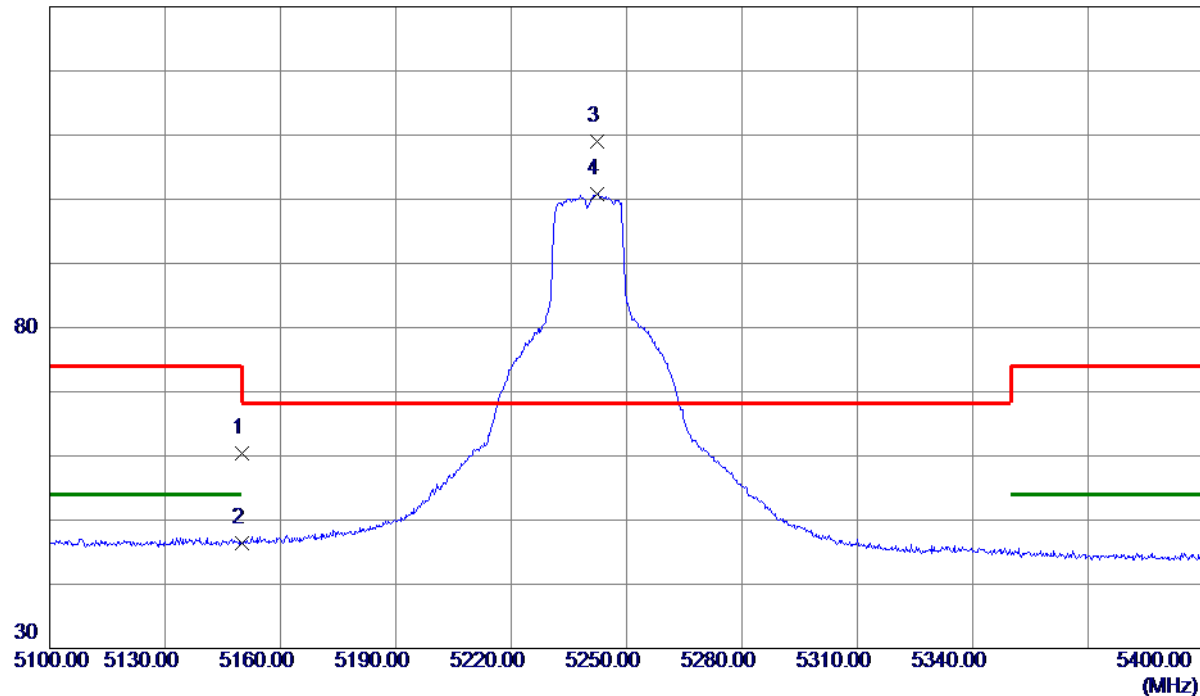

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.44	37.88	60.32	74.00	-13.68	Peak	
2	5150.0000	8.44	37.88	46.32	54.00	-7.68	AVG	
3 *	5242.3500	71.44	37.62	109.06	68.30	40.76	Peak	No limit
4	5242.3500	63.26	37.62	100.88	999.00	-898.12	AVG	No limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

80 dBuV/m

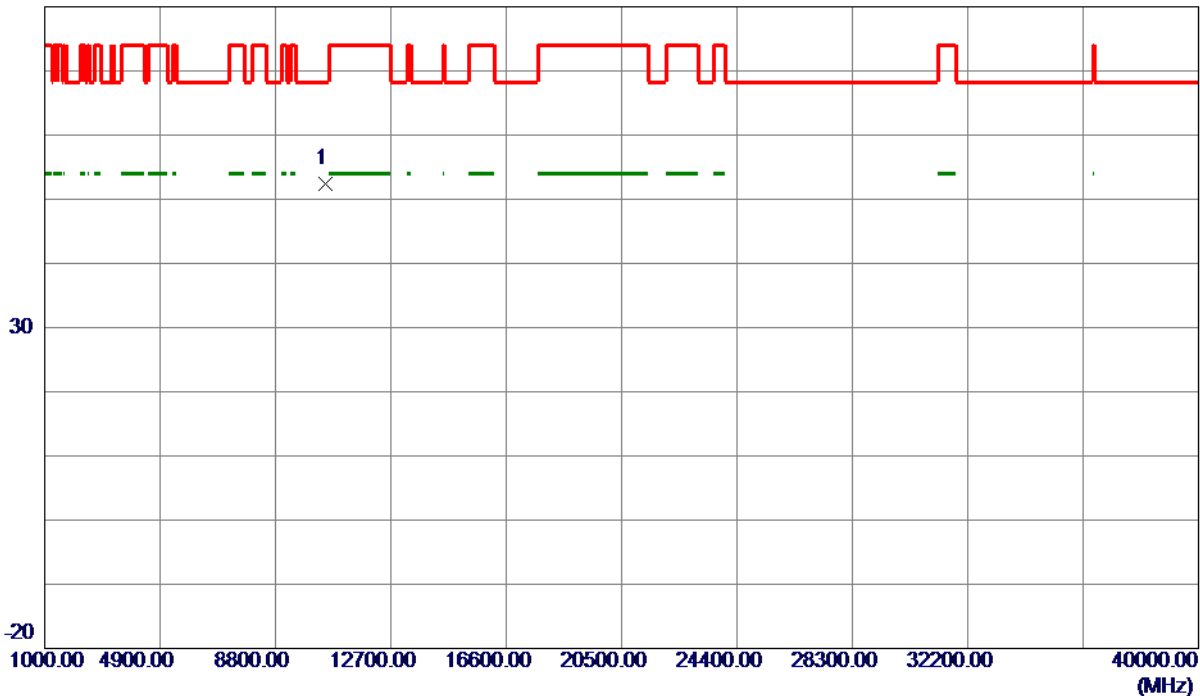

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.3850	50.66	1.80	52.46	68.30	-15.84	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

130 dBuV/m

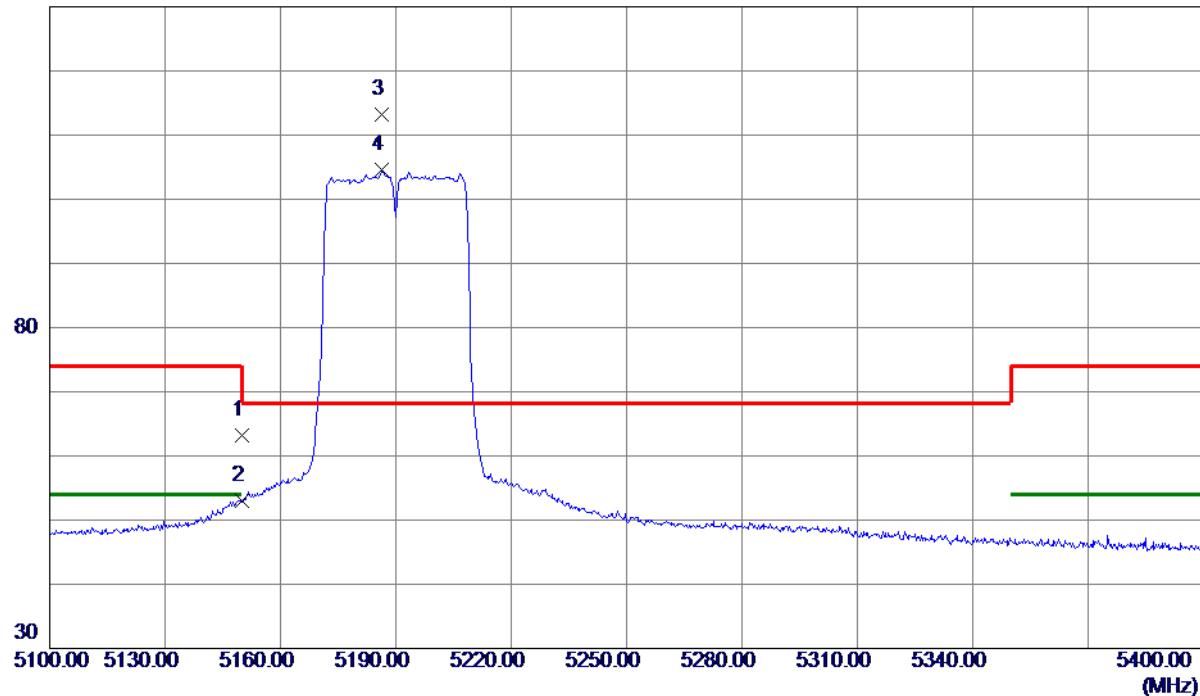

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.40	37.88	63.28	74.00	-10.72	Peak	
2	5150.0000	15.08	37.88	52.96	54.00	-1.04	AVG	
3 *	5186.4000	75.47	37.73	113.20	68.30	44.90	Peak	No limit
4	5186.4000	66.80	37.73	104.53	999.00	-894.47	AVG	No limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

80 dBuV/m

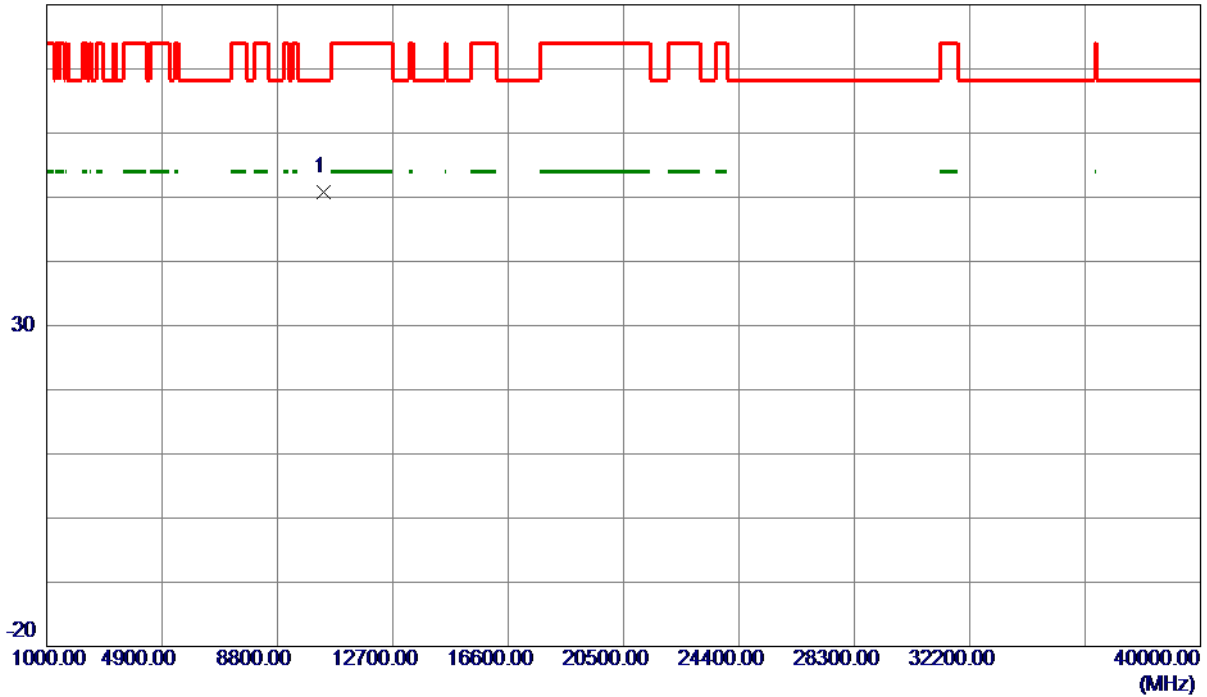

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10379.5630	49.05	1.68	50.73	68.30	-17.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

130 dBuV/m

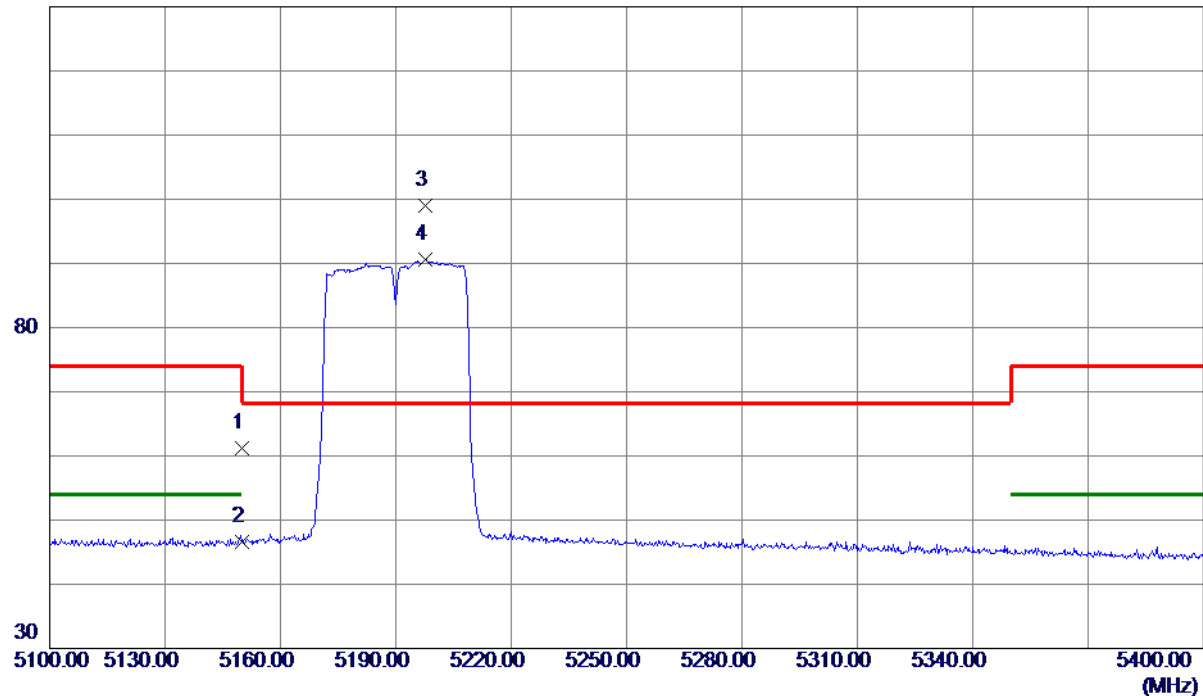

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.39	37.88	61.27	74.00	-12.73	Peak	
2	5150.0000	8.72	37.88	46.60	54.00	-7.40	AVG	
3 *	5197.6500	61.25	37.69	98.94	68.30	30.64	Peak	No limit
4	5197.6500	52.91	37.69	90.60	999.00	-908.40	AVG	No limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

80 dBuV/m

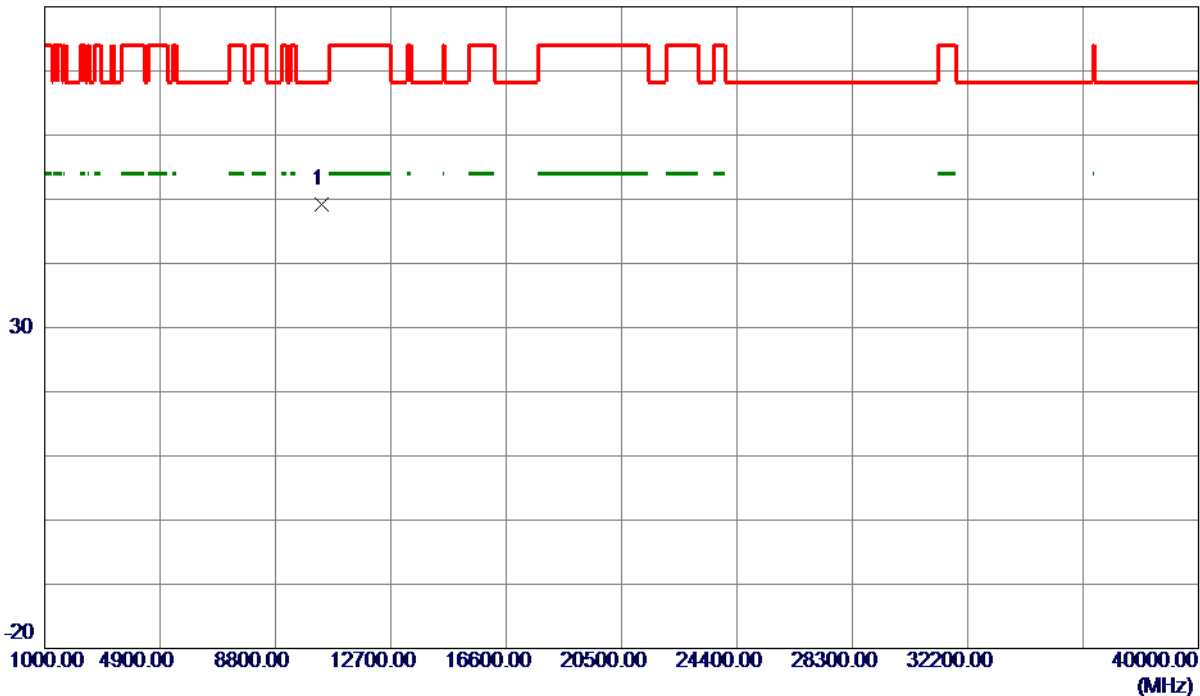

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10381.2820	47.58	1.69	49.27	68.30	-19.03	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

130 dBuV/m

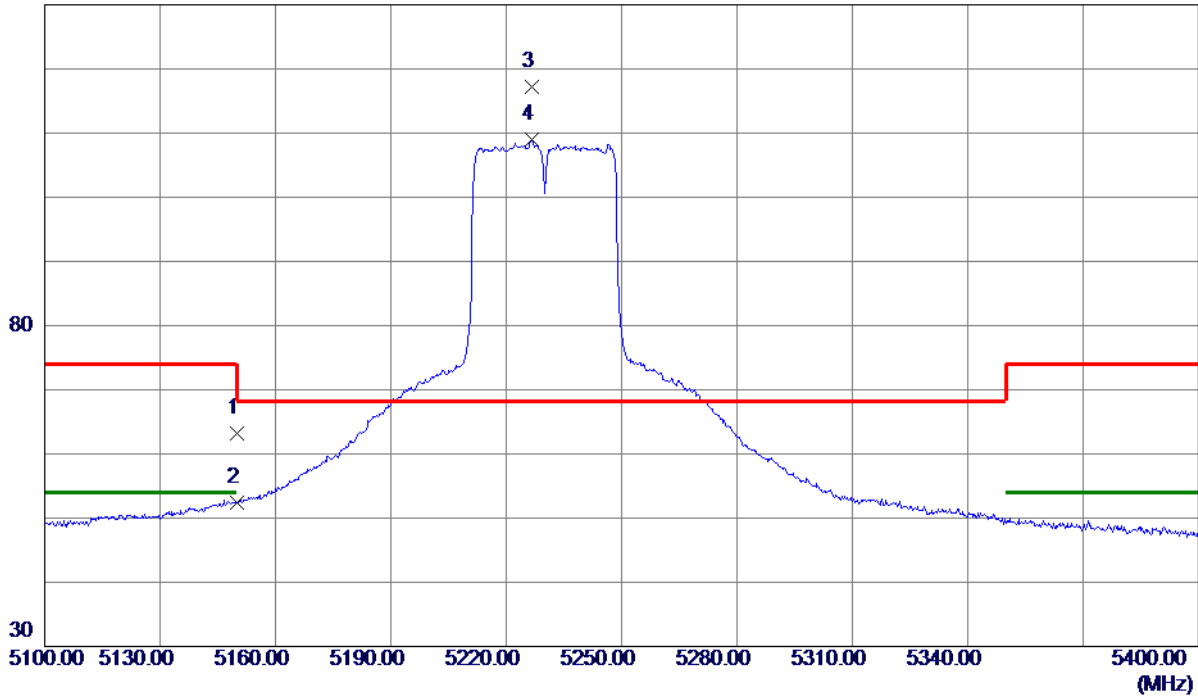

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.36	37.88	63.24	74.00	-10.76	Peak	
2	5150.0000	14.45	37.88	52.33	54.00	-1.67	AVG	
3 *	5226.6000	79.54	37.64	117.18	68.30	48.88	Peak	No limit
4	5226.6000	71.29	37.64	108.93	999.00	-890.07	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

80 dBuV/m

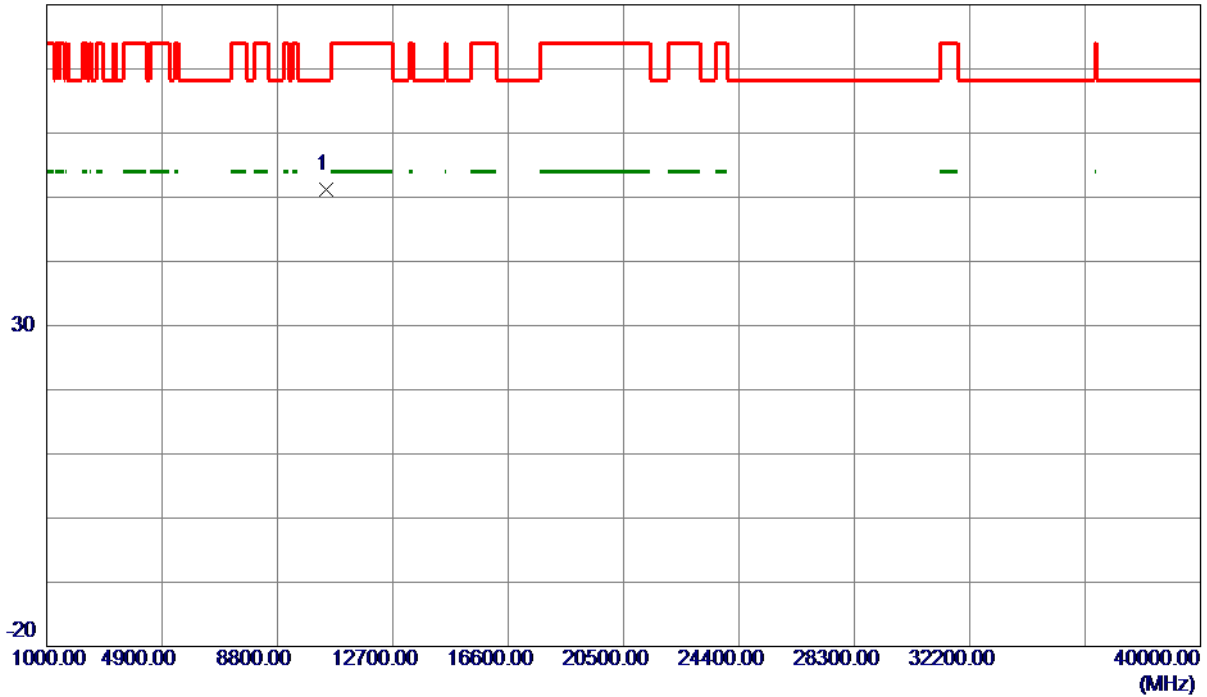

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10461.4770	49.49	1.78	51.27	68.30	-17.03	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

130 dBuV/m

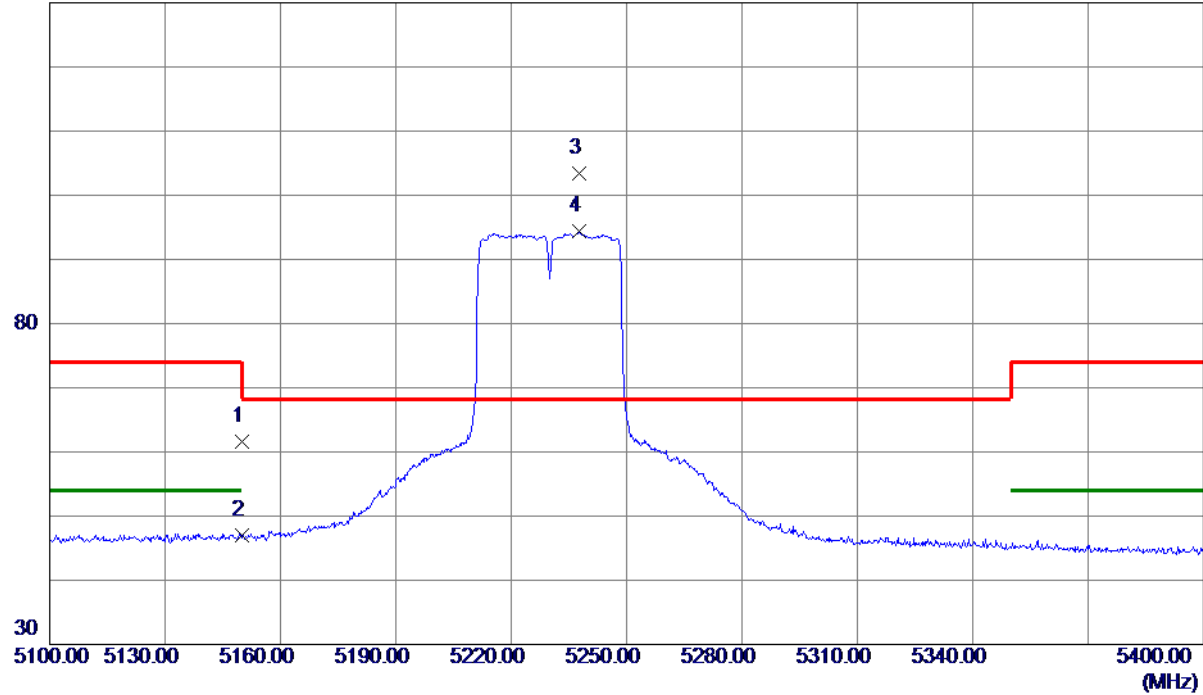

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.64	37.88	61.52	74.00	-12.48	Peak	
2	5150.0000	9.13	37.88	47.01	54.00	-6.99	AVG	
3 *	5237.7000	65.77	37.63	103.40	68.30	35.10	Peak	No limit
4	5237.7000	56.72	37.63	94.35	999.00	-904.65	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

80 dBuV/m

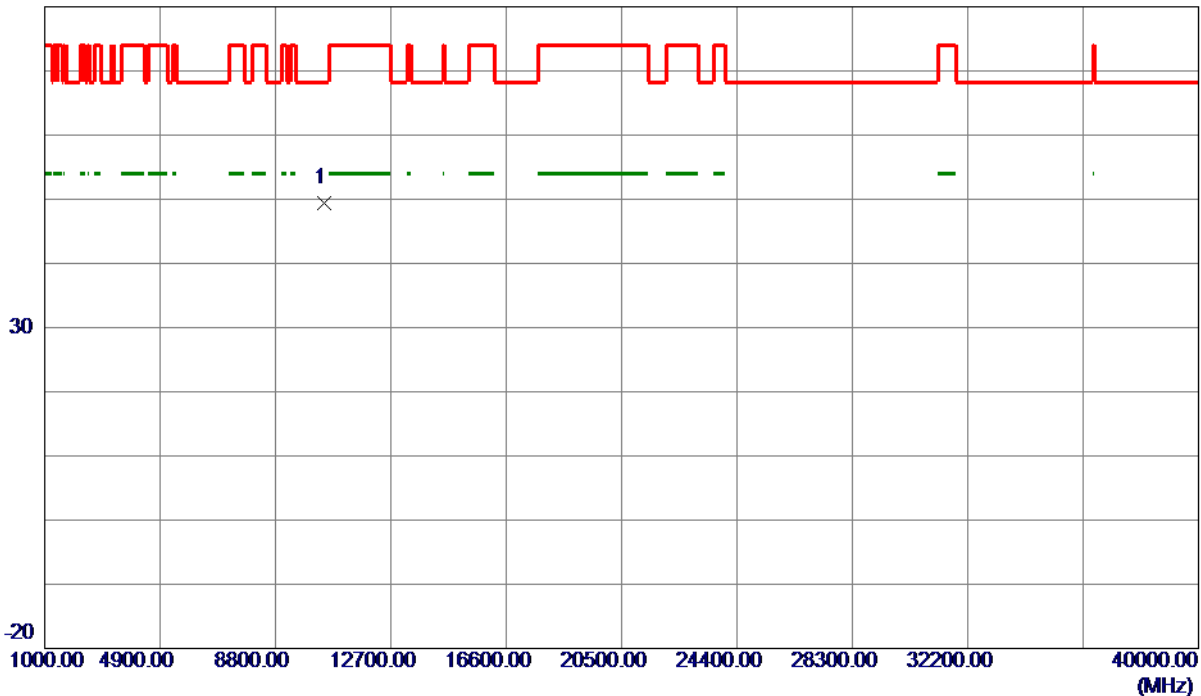

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10459.4170	47.63	1.78	49.41	68.30	-18.89	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

130 dBuV/m

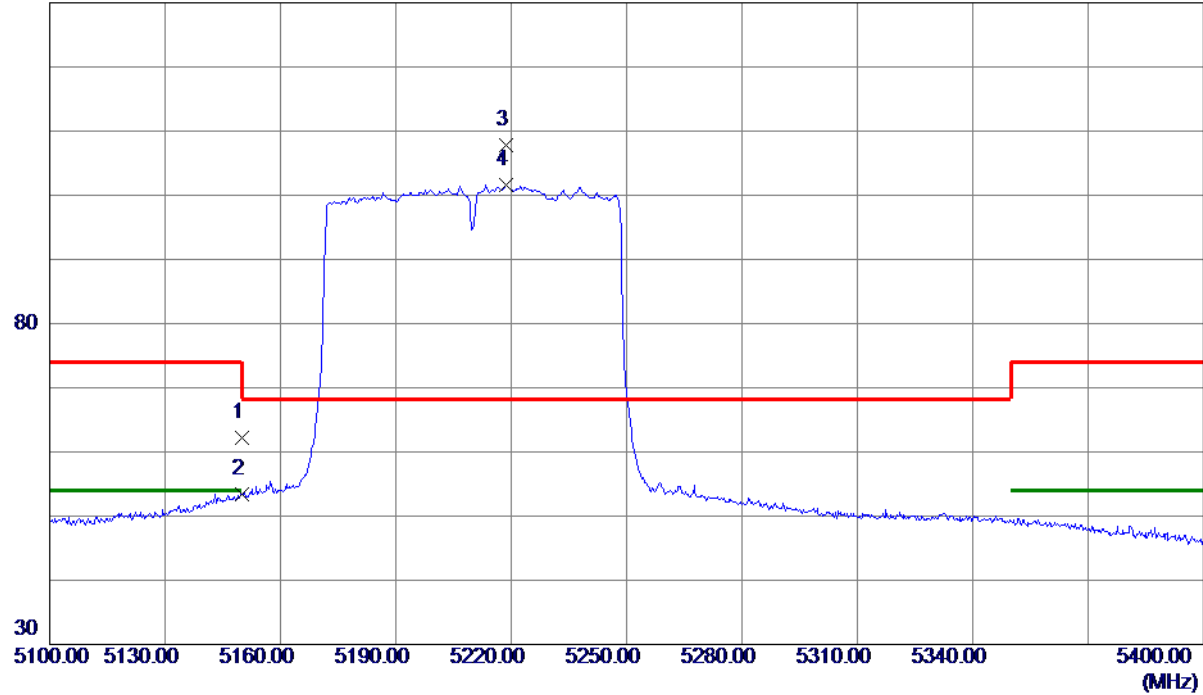

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	24.26	37.88	62.14	74.00	-11.86	Peak	
2	5150.0000	15.56	37.88	53.44	54.00	-0.56	AVG	
3 *	5218.6500	70.13	37.65	107.78	68.30	39.48	Peak	No limit
4	5218.6500	63.91	37.65	101.56	999.00	-897.44	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

80 dBuV/m

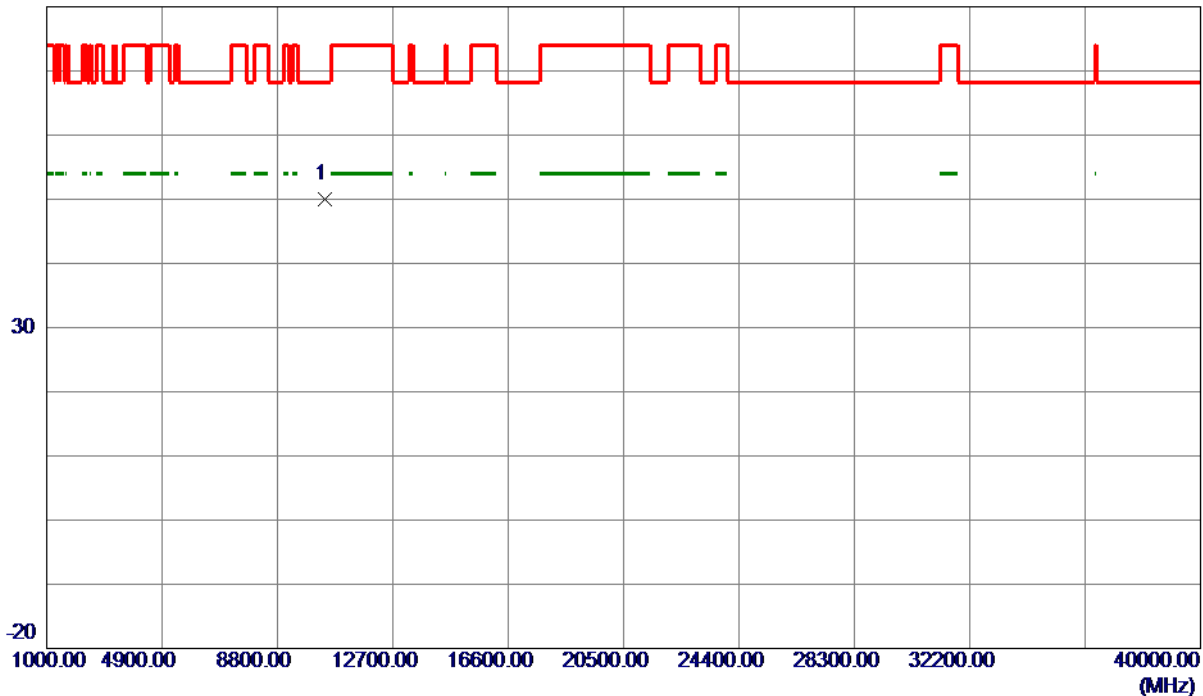

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.4870	48.33	1.74	50.07	68.30	-18.23	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

130 dBuV/m

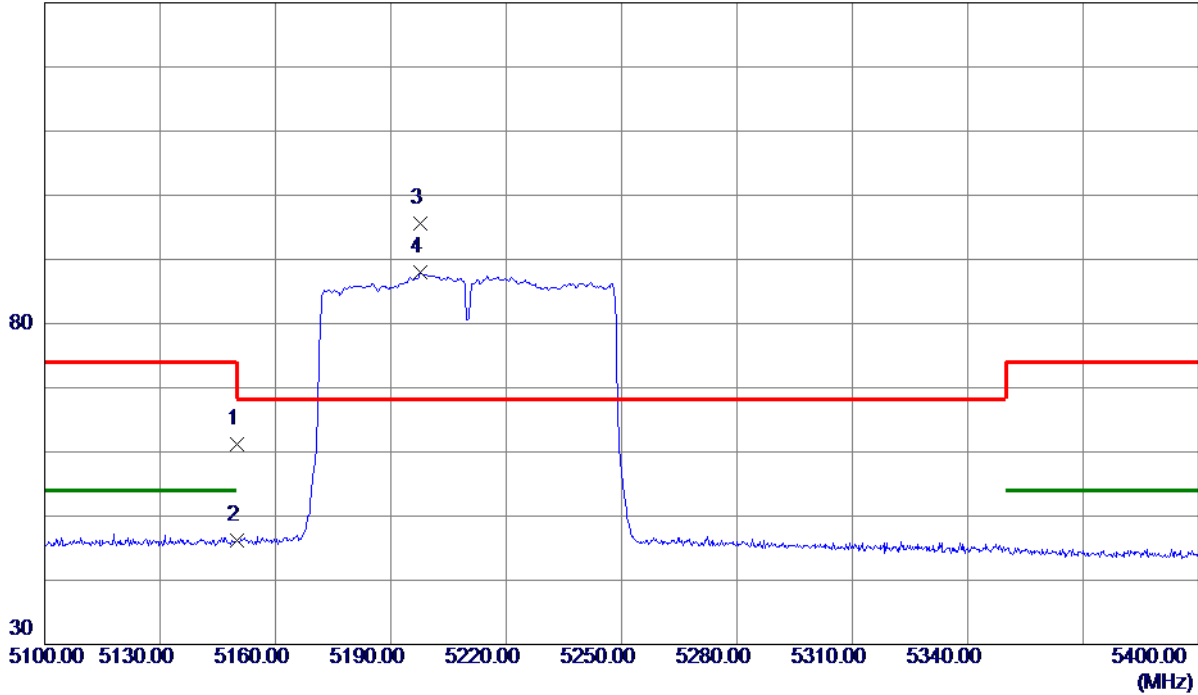

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.28	37.88	61.16	74.00	-12.84	Peak	
2	5150.0000	8.38	37.88	46.26	54.00	-7.74	AVG	
3 *	5197.6500	57.85	37.69	95.54	68.30	27.24	Peak	No limit
4	5197.6500	50.31	37.69	88.00	999.00	-911.00	AVG	No limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

80 dBuV/m

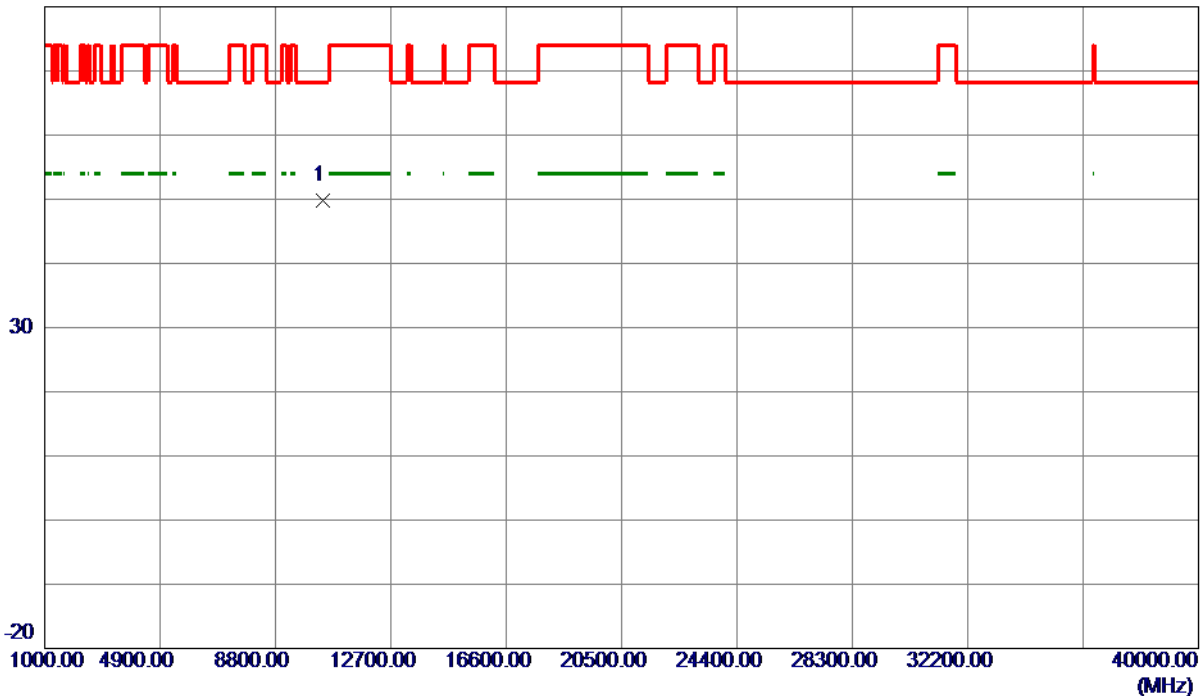

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10422.3019	47.99	1.74	49.73	68.30	-18.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

130 dBuV/m

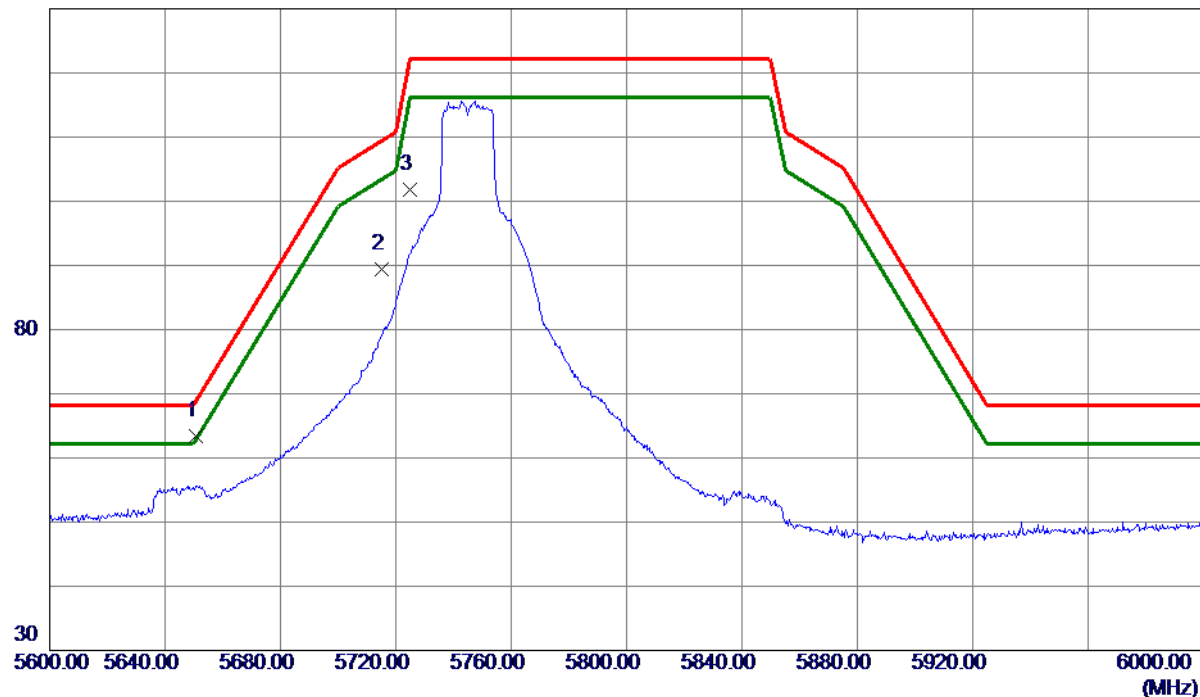

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.8000	25.03	38.37	63.40	68.79	-5.39	Peak	
2	5715.0000	50.95	38.46	89.41	109.40	-19.99	Peak	
3	5725.0000	63.21	38.50	101.71	122.20	-20.49	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

80 dBuV/m

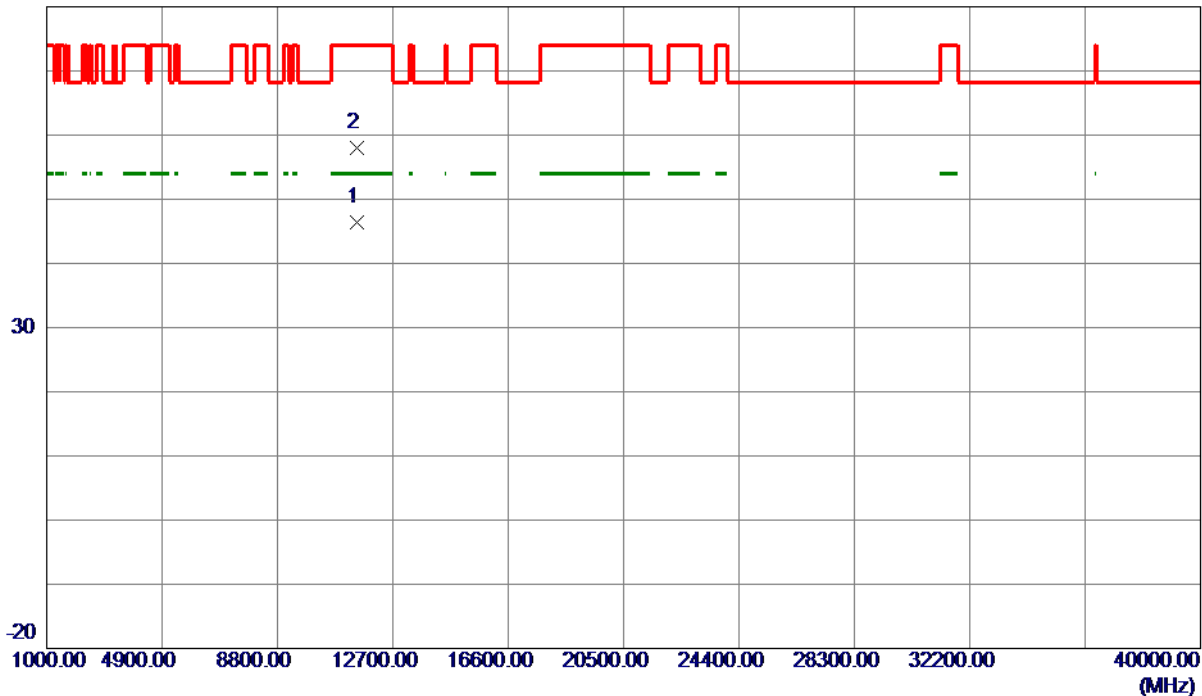

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.8480	44.11	2.21	46.32	54.00	-7.68	AVG	
2	11491.3750	55.85	2.21	58.06	74.00	-15.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

130 dBuV/m

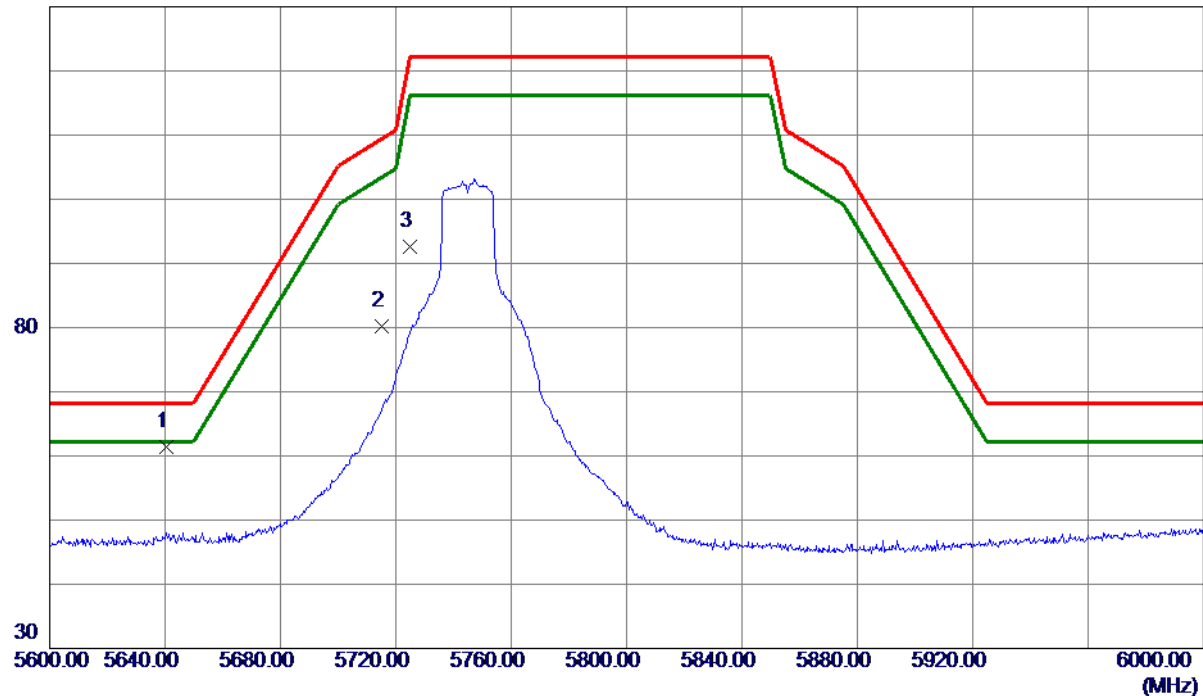

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5640.4000	23.03	38.37	61.40	68.20	-6.80	Peak	
2	5715.0000	41.72	38.46	80.18	109.40	-29.22	Peak	
3	5725.0000	54.18	38.50	92.68	122.20	-29.52	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

80 dBuV/m

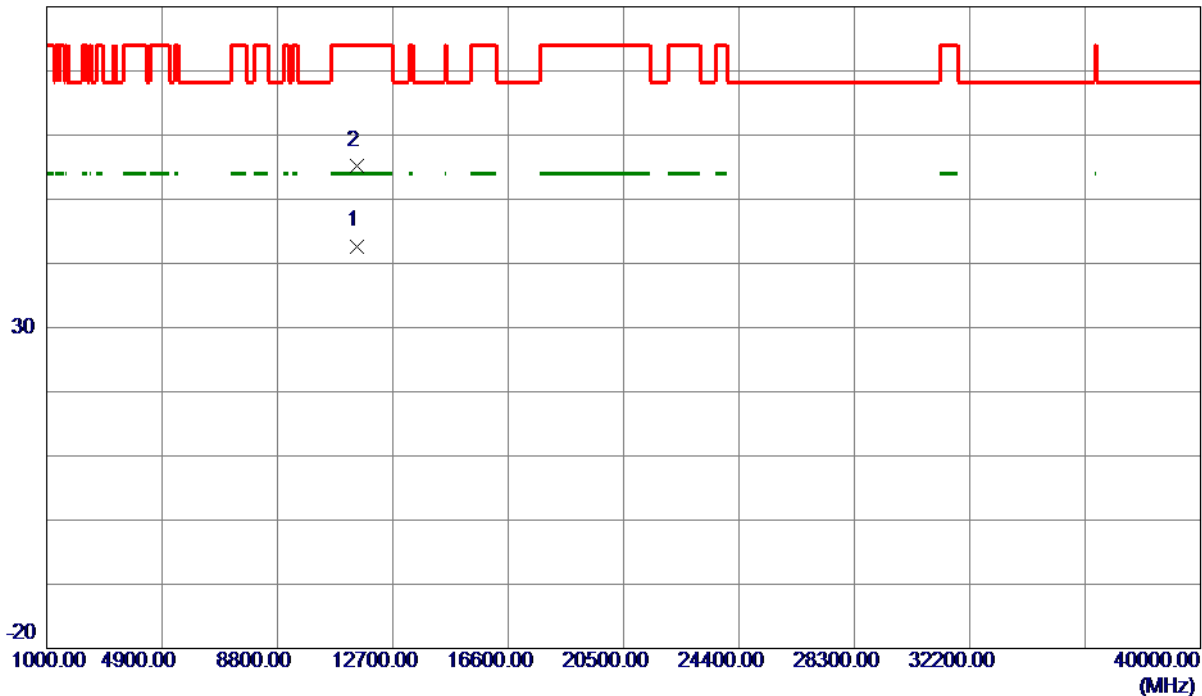

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.4589	40.49	2.21	42.70	54.00	-11.30	AVG	
2	11491.1950	53.04	2.21	55.25	74.00	-18.75	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

130 dBuV/m

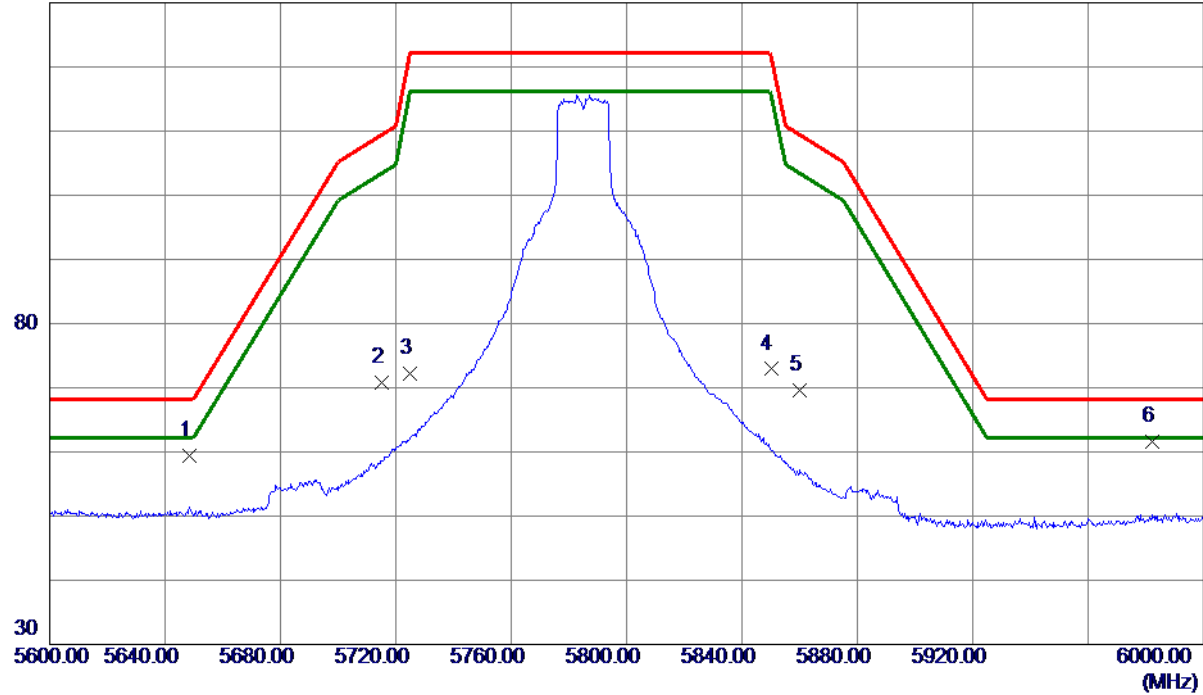

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.6000	21.10	38.37	59.47	68.20	-8.73	Peak	
2	5715.0000	32.40	38.46	70.86	109.40	-38.54	Peak	
3	5725.0000	33.76	38.50	72.26	122.20	-49.94	Peak	
4	5850.0000	33.99	38.91	72.90	122.20	-49.30	Peak	
5	5860.0000	30.66	38.94	69.60	109.40	-39.80	Peak	
6 *	5982.0000	22.34	39.21	61.55	68.20	-6.65	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

80 dBuV/m

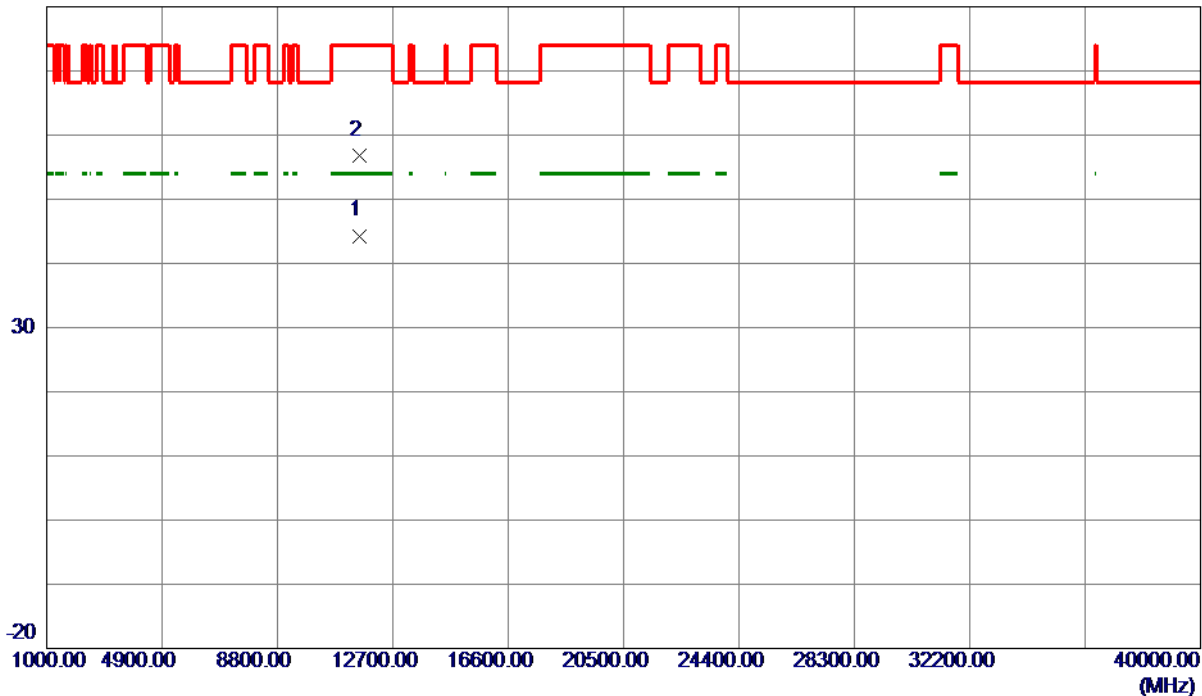

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.1390	42.03	2.27	44.30	54.00	-9.70	AVG	
2	11570.2260	54.52	2.27	56.79	74.00	-17.21	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

130 dBuV/m

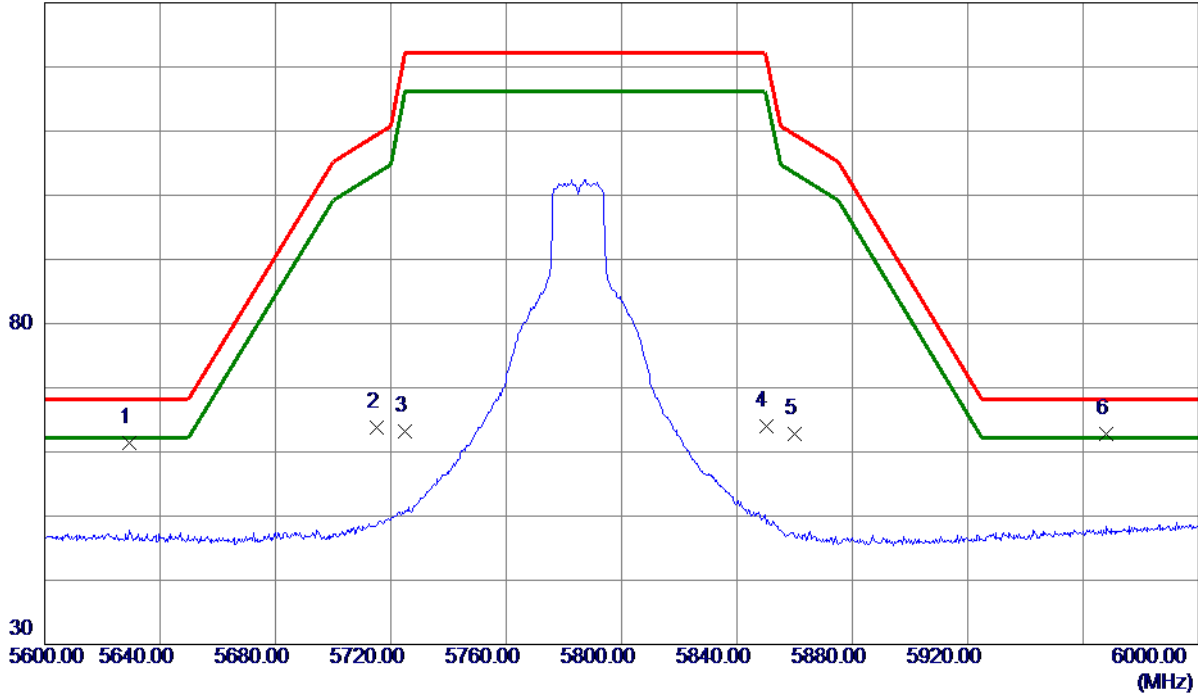

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5629.4000	23.02	38.36	61.38	68.20	-6.82	Peak	
2	5715.0000	25.33	38.46	63.79	109.40	-45.61	Peak	
3	5725.0000	24.67	38.50	63.17	122.20	-59.03	Peak	
4	5850.0000	25.07	38.91	63.98	122.20	-58.22	Peak	
5	5860.0000	23.84	38.94	62.78	109.40	-46.62	Peak	
6 *	5968.2000	23.67	39.19	62.86	68.20	-5.34	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

80 dBuV/m

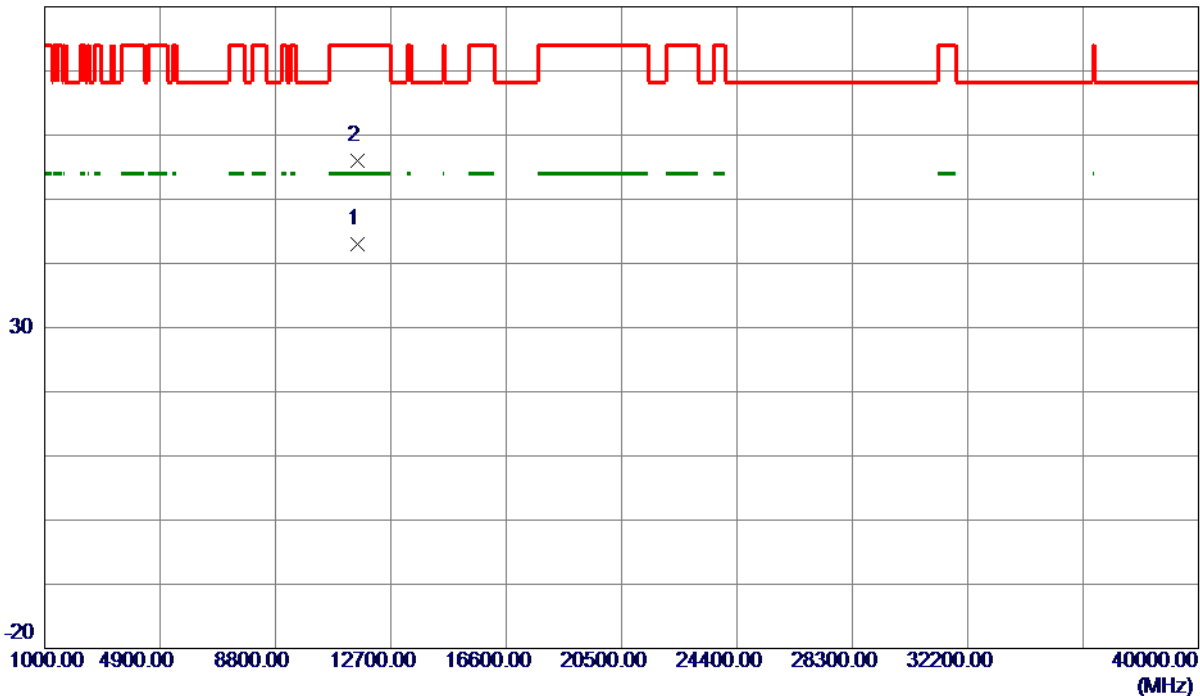

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.3400	40.74	2.27	43.01	54.00	-10.99	AVG	
2	11571.2020	53.67	2.28	55.95	74.00	-18.05	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

130 dBuV/m

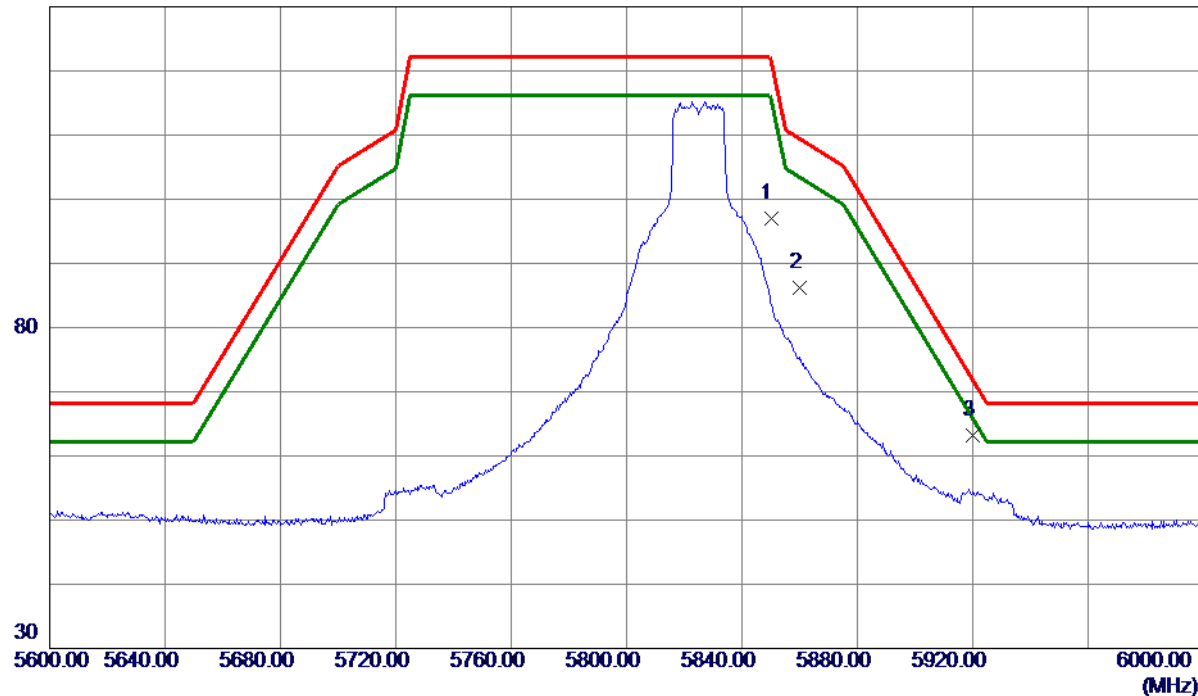

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	58.04	38.91	96.95	122.20	-25.25	Peak	
2	5860.0000	47.27	38.94	86.21	109.40	-23.19	Peak	
3 *	5920.2000	24.07	39.09	63.16	71.75	-8.59	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

80 dBuV/m

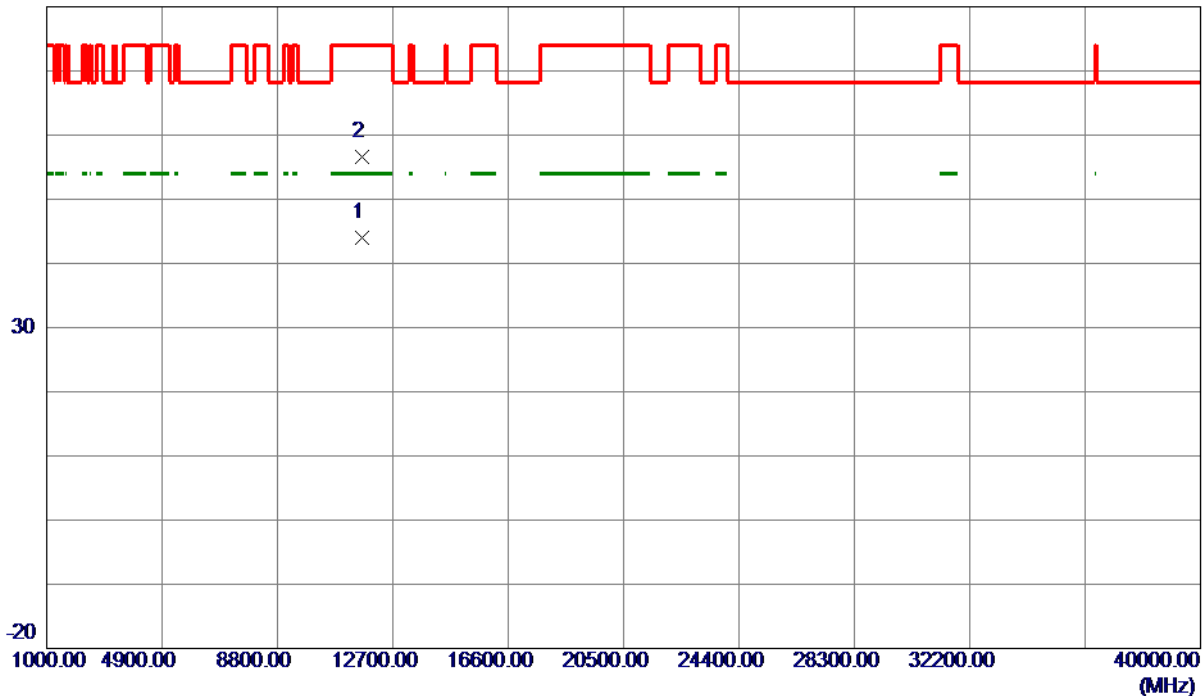

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.5439	41.92	2.10	44.02	54.00	-9.98	AVG	
2	11651.0679	54.57	2.10	56.67	74.00	-17.33	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

130 dBuV/m

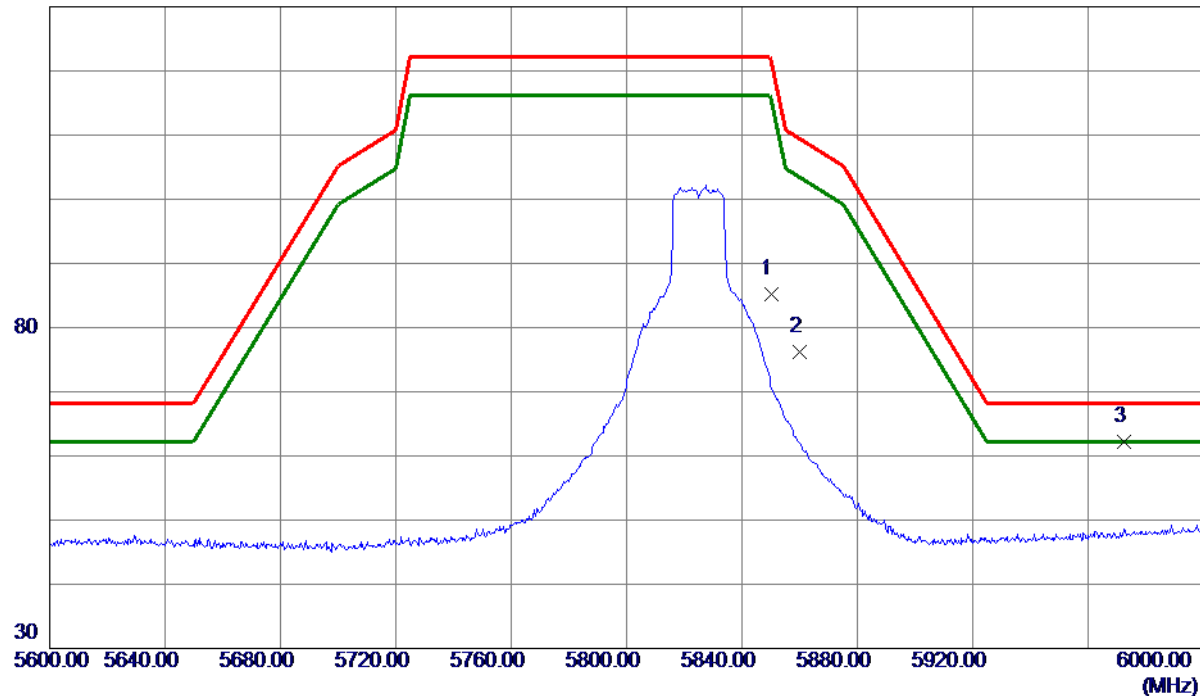

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	46.20	38.91	85.11	122.20	-37.09	Peak	
2	5860.0000	37.18	38.94	76.12	109.40	-33.28	Peak	
3 *	5972.6000	23.07	39.20	62.27	68.20	-5.93	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

80 dBuV/m

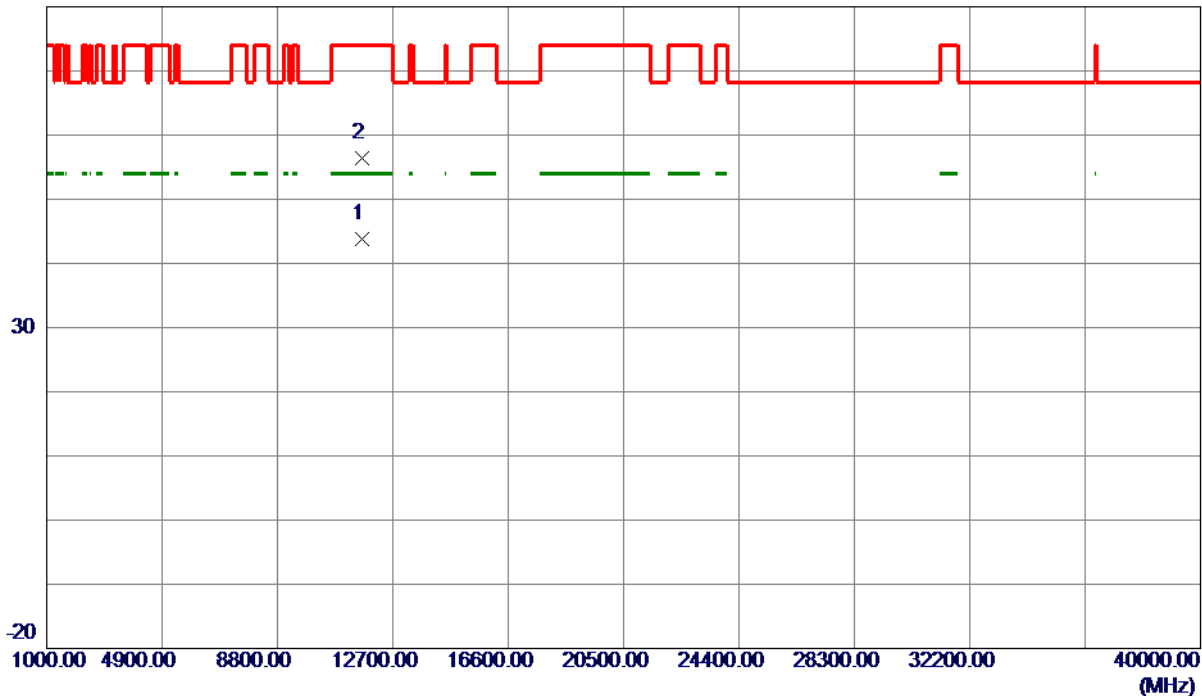

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.7350	41.60	2.11	43.71	54.00	-10.29	AVG	
2	11651.2030	54.34	2.10	56.44	74.00	-17.56	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

130 dBuV/m

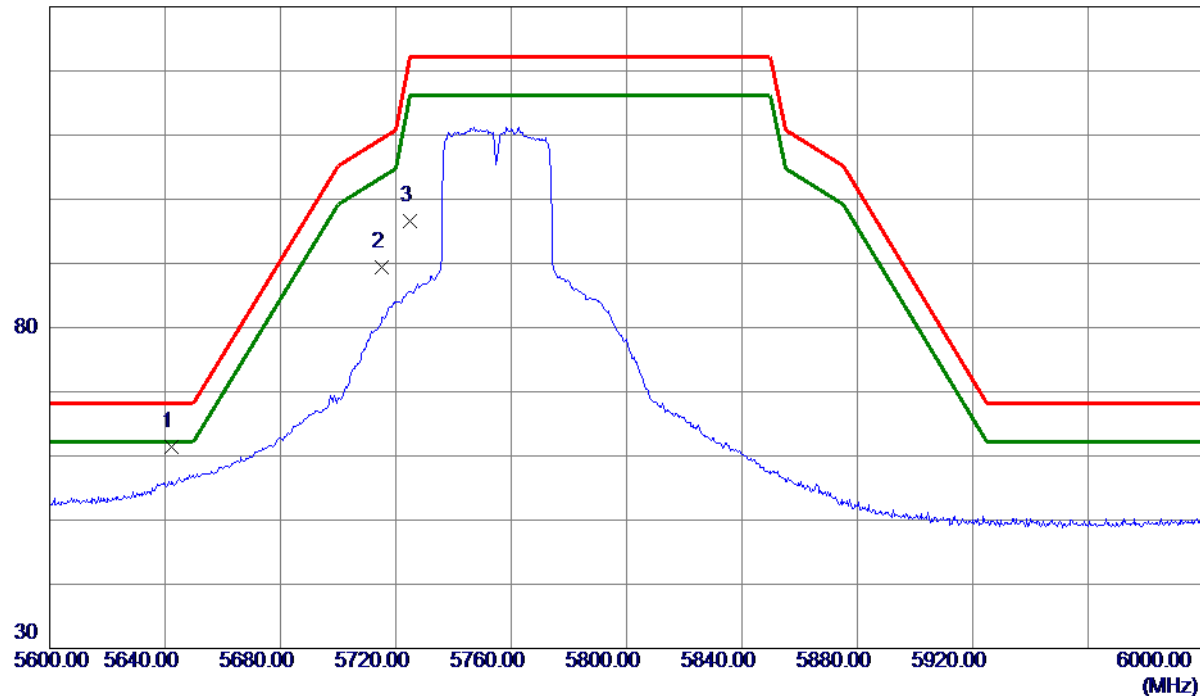

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5642.4000	23.07	38.37	61.44	68.20	-6.76	Peak	
2	5715.0000	50.96	38.46	89.42	109.40	-19.98	Peak	
3	5725.0000	58.10	38.50	96.60	122.20	-25.60	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

80 dBuV/m

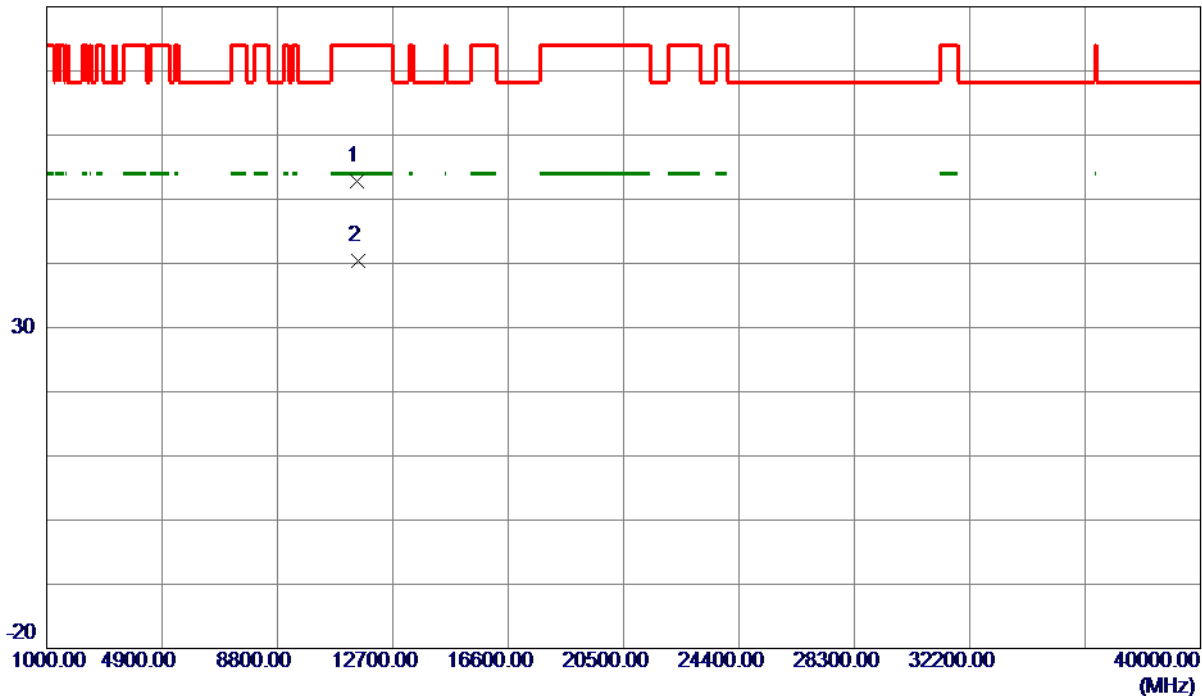

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11507.7100	50.65	2.22	52.87	74.00	-21.13	Peak	
2 *	11508.7270	38.22	2.22	40.44	54.00	-13.56	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

130 dBuV/m

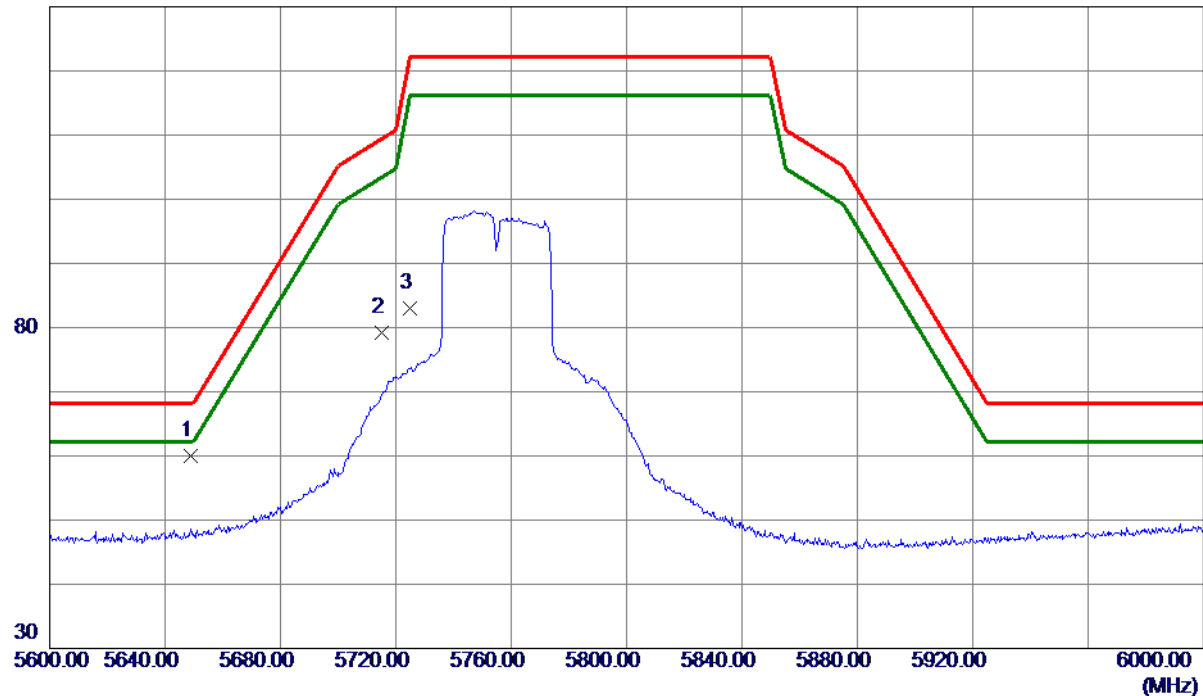

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.8000	21.67	38.37	60.04	68.20	-8.16	Peak	
2	5715.0000	40.69	38.46	79.15	109.40	-30.25	Peak	
3	5725.0000	44.45	38.50	82.95	122.20	-39.25	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

80 dBuV/m

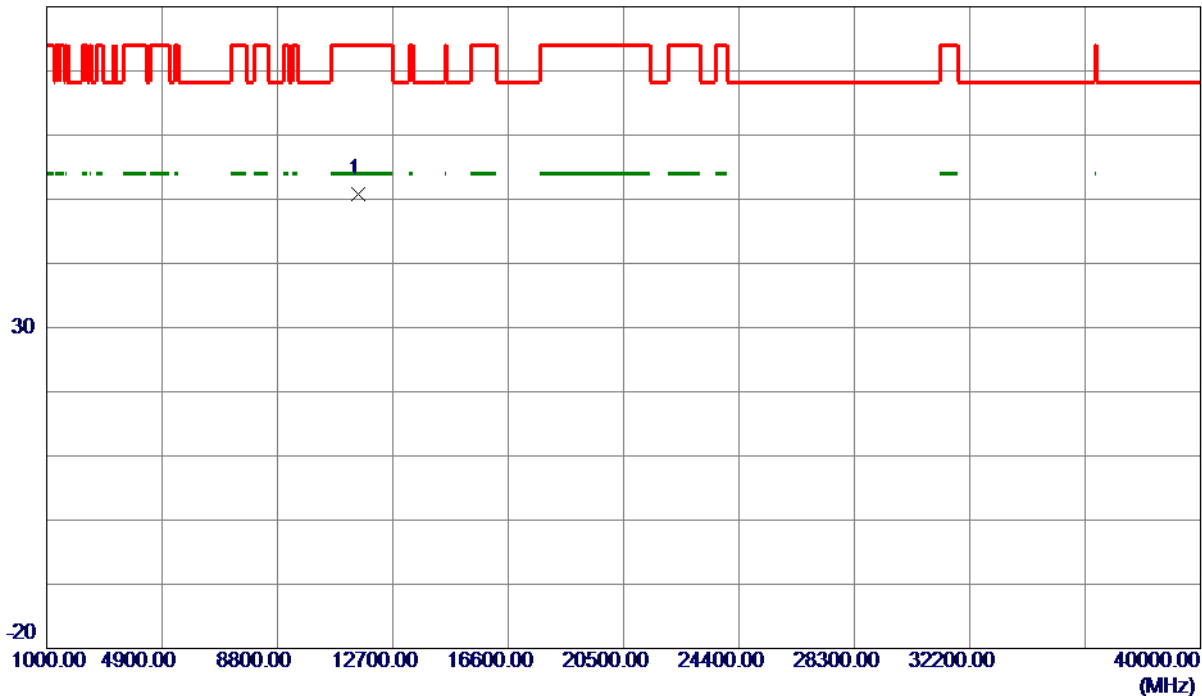

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.9090	48.60	2.22	50.82	74.00	-23.18	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

130 dBuV/m

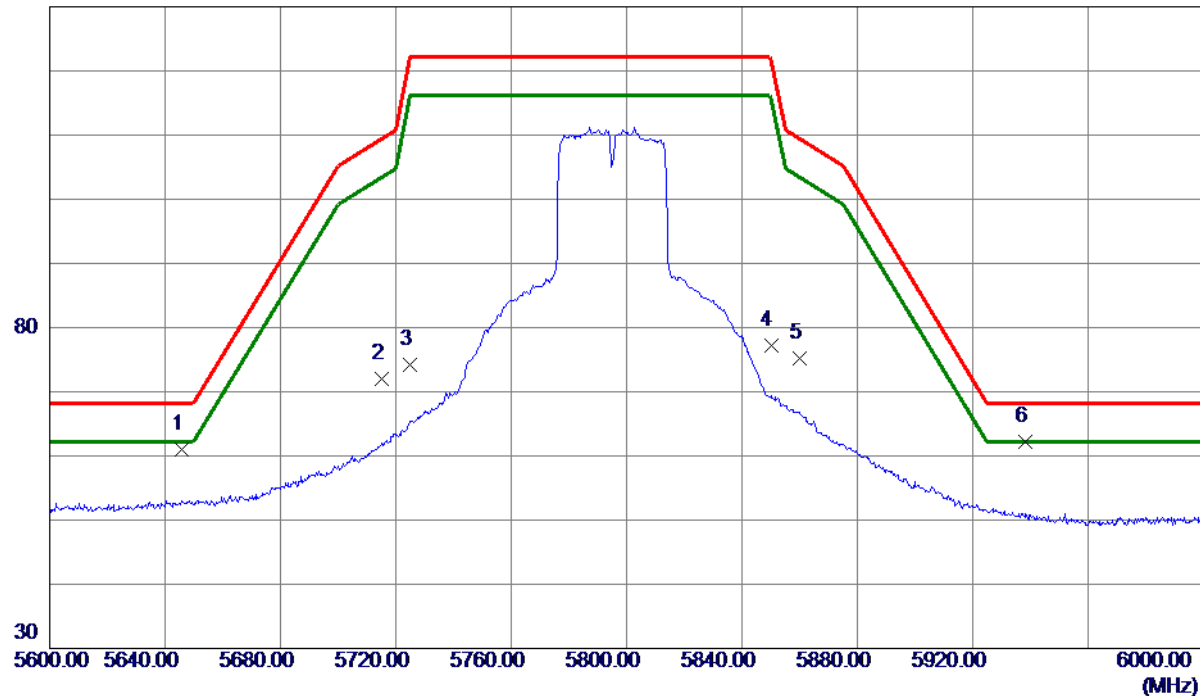

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.8000	22.61	38.37	60.98	68.20	-7.22	Peak	
2	5715.0000	33.50	38.46	71.96	109.40	-37.44	Peak	
3	5725.0000	35.69	38.50	74.19	122.20	-48.01	Peak	
4	5850.0000	38.37	38.91	77.28	122.20	-44.92	Peak	
5	5860.0000	36.20	38.94	75.14	109.40	-34.26	Peak	
6 *	5938.4000	23.06	39.13	62.19	68.20	-6.01	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

80 dBuV/m

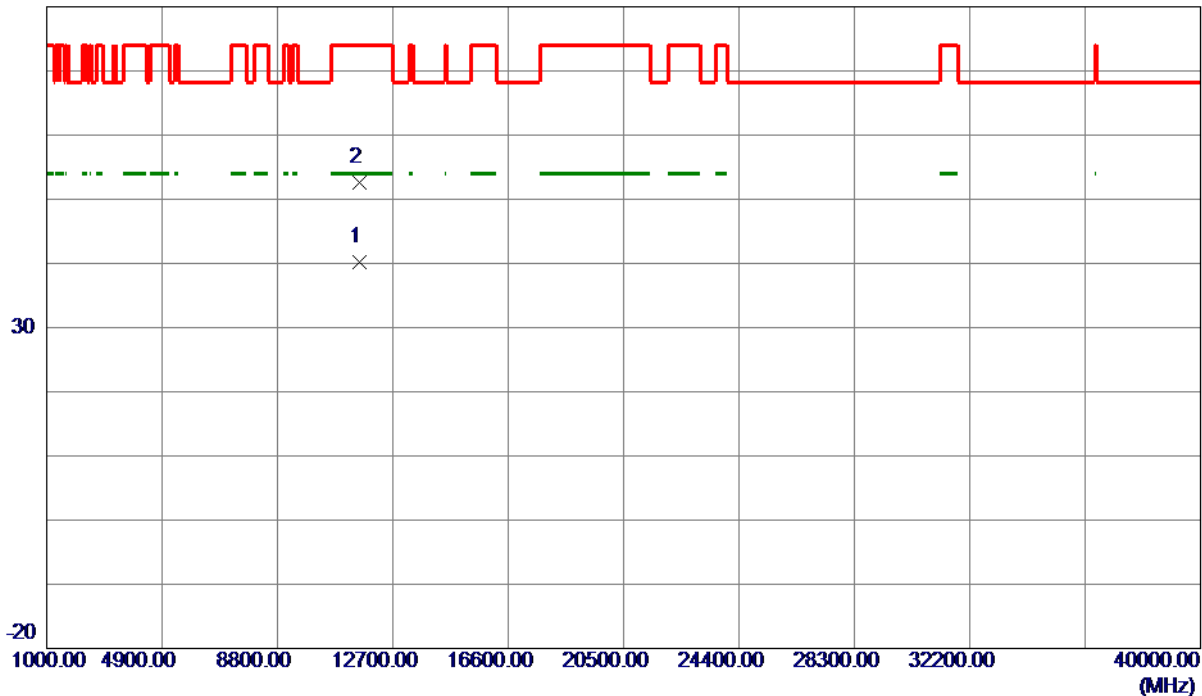

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.8830	37.88	2.29	40.17	54.00	-13.83	AVG	
2	11590.5640	50.30	2.29	52.59	74.00	-21.41	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

130 dBuV/m

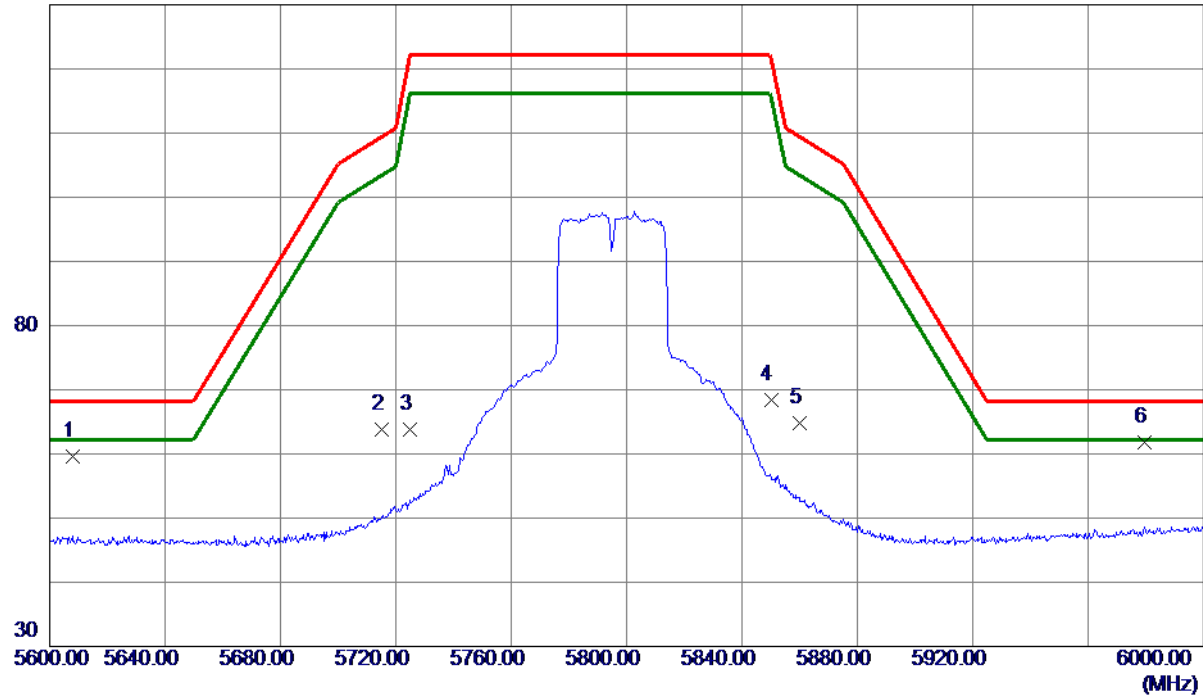

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5607.8000	21.34	38.34	59.68	68.20	-8.52	Peak	
2	5715.0000	25.27	38.46	63.73	109.40	-45.67	Peak	
3	5725.0000	25.30	38.50	63.80	122.20	-58.40	Peak	
4	5850.0000	29.46	38.91	68.37	122.20	-53.83	Peak	
5	5860.0000	25.81	38.94	64.75	109.40	-44.65	Peak	
6 *	5979.4000	22.63	39.21	61.84	68.20	-6.36	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

80 dBuV/m

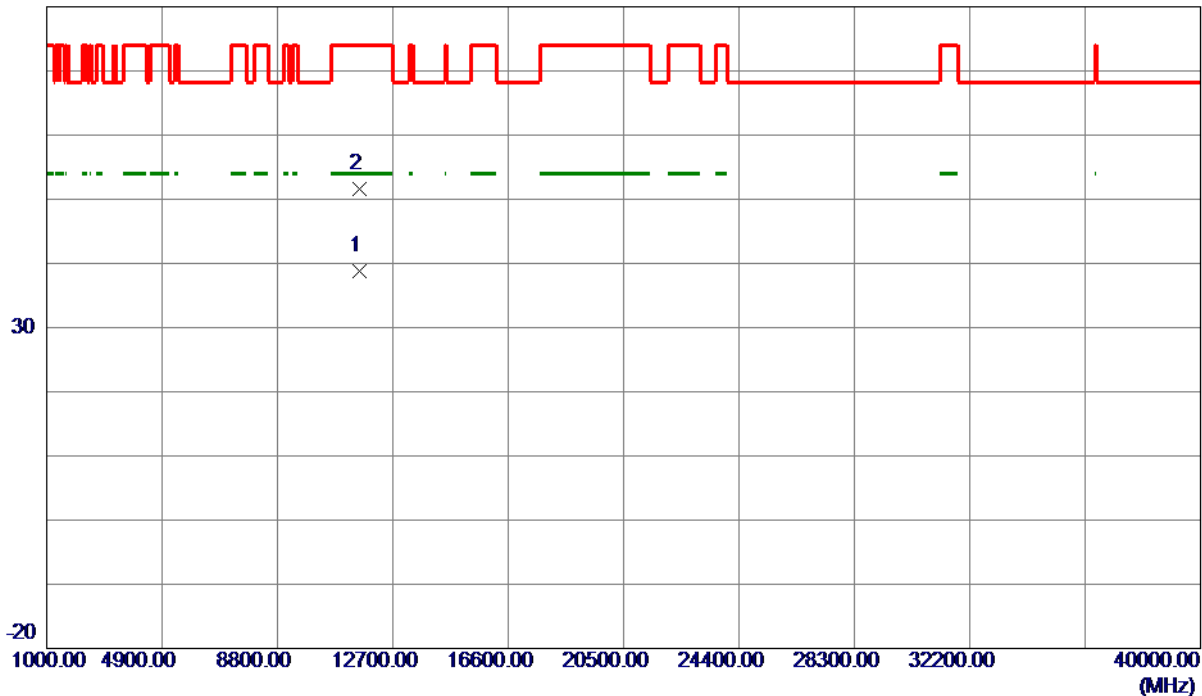


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.8160	36.55	2.29	38.84	54.00	-15.16	AVG	
2	11590.1020	49.31	2.29	51.60	74.00	-22.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

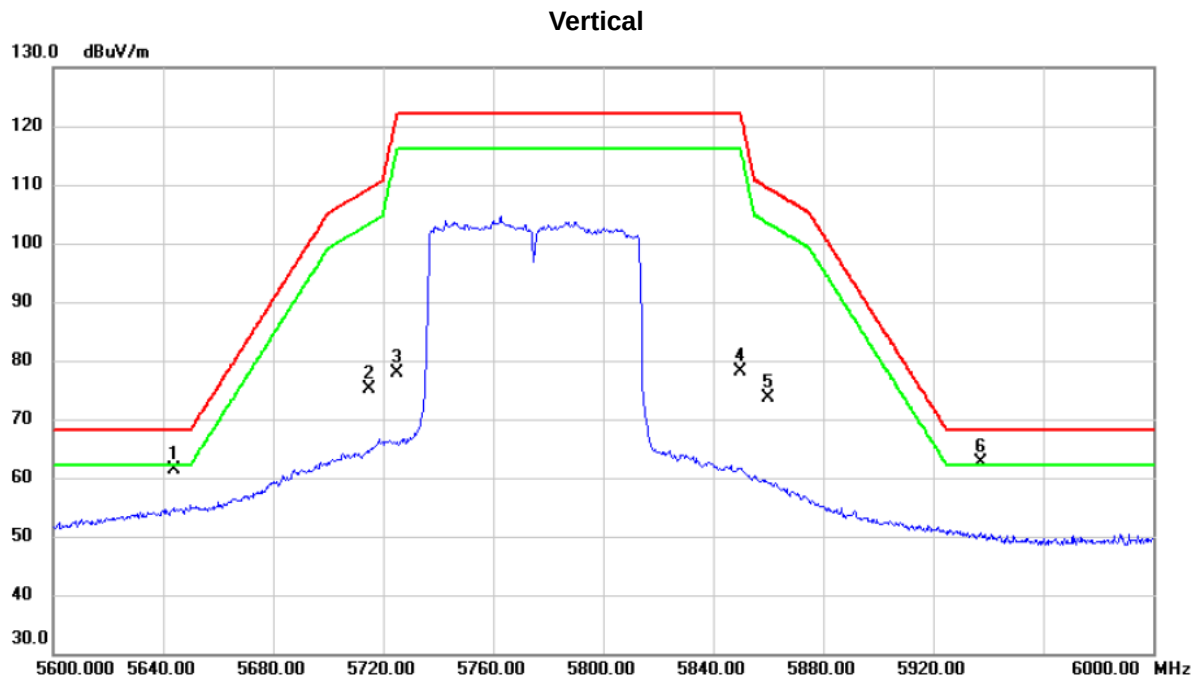

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5643.800	23.02	38.37	61.39	68.20	-6.81	peak	
2		5715.000	36.58	38.46	75.04	109.40	-34.36	peak	
3		5725.000	39.37	38.50	77.87	122.20	-44.33	peak	
4		5850.000	39.23	38.91	78.14	122.20	-44.06	peak	
5		5860.000	34.75	38.95	73.70	109.40	-35.70	peak	
6	*	5937.400	23.43	39.12	62.55	68.20	-5.65	peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

80 dBuV/m

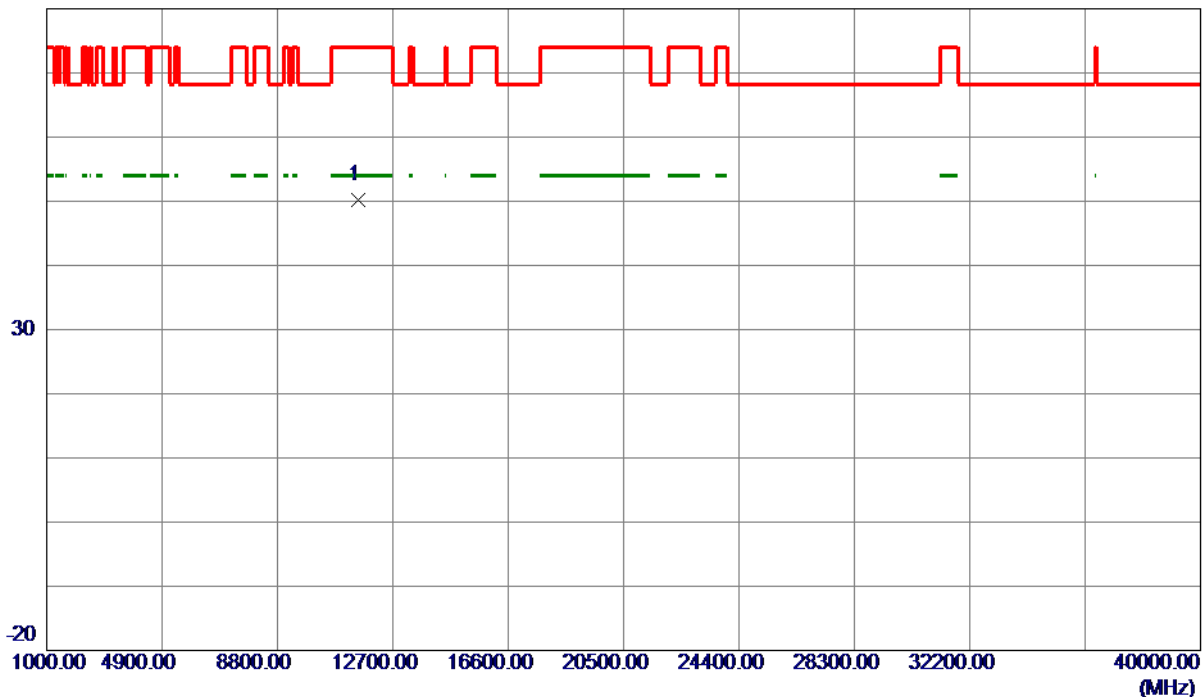


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11548.5730	47.97	2.26	50.23	74.00	-23.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

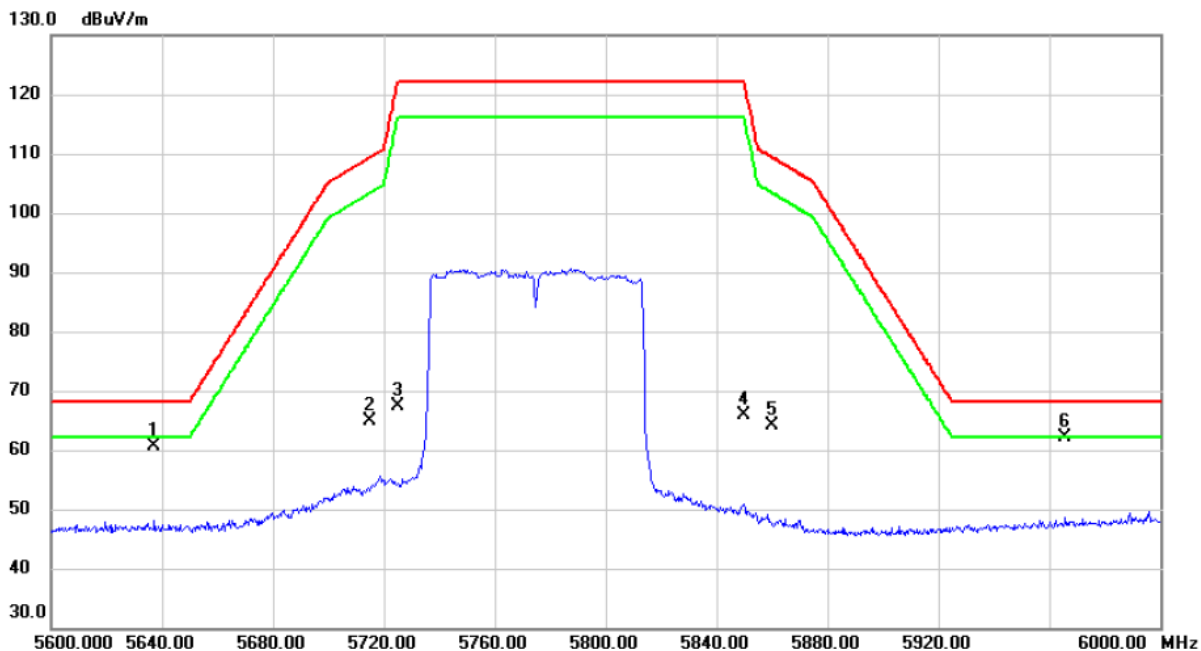

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5637.200	22.17	38.36	60.53	68.20	-7.67	peak	
2		5715.000	26.37	38.46	64.83	109.40	-44.57	peak	
3		5725.000	28.78	38.50	67.28	122.20	-54.92	peak	
4		5850.000	27.00	38.91	65.91	122.20	-56.29	peak	
5		5860.000	25.18	38.95	64.13	109.40	-45.27	peak	
6	*	5965.600	23.04	39.18	62.22	68.20	-5.98	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

80 dBuV/m

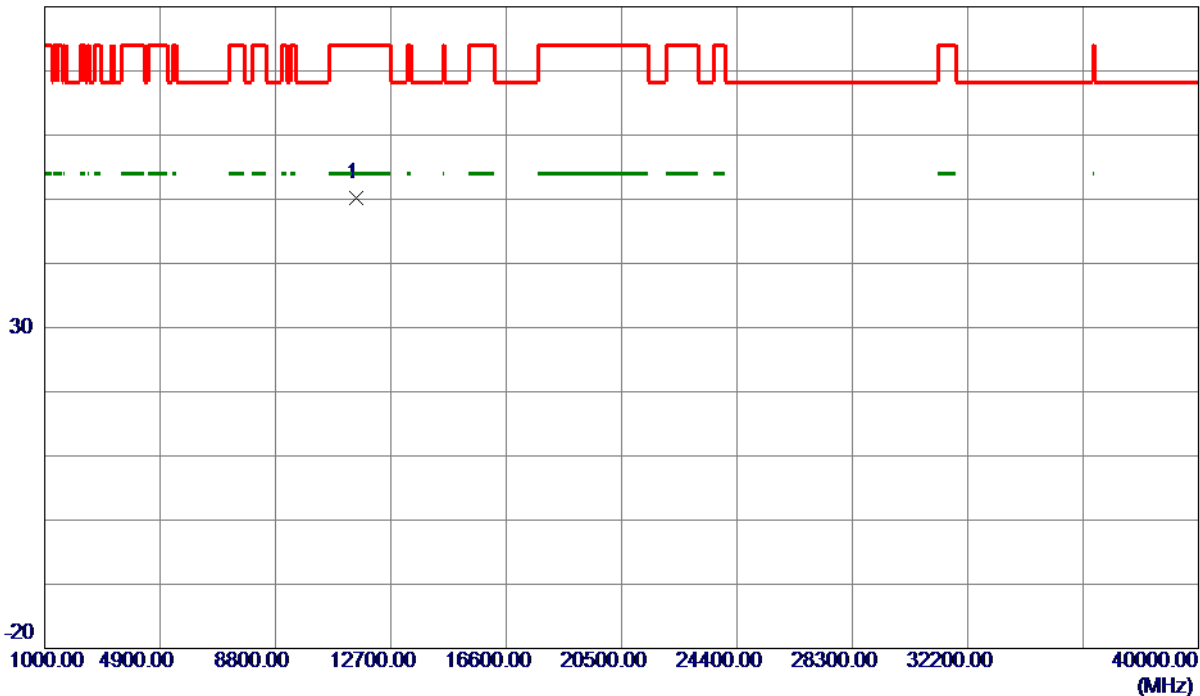

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11547.3380	47.95	2.26	50.21	74.00	-23.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

CDD


Test Mode UNII-1_TX A Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	42.39	23.60
40	5200	42.49	24.10
48	5240	37.89	18.40

CH36

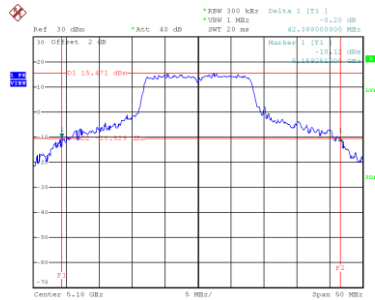


Date: 23.JUL.2020 14:01:17




Date: 23.JUL.2020 14:01:24

CH40

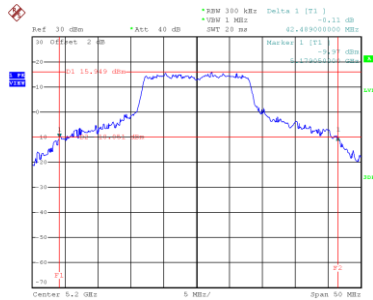


Date: 23.JUL.2020 14:01:07

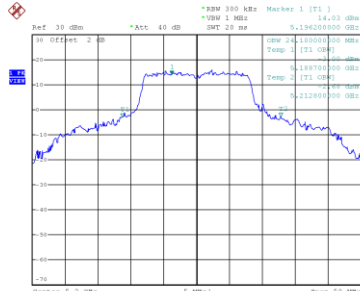


Date: 23.JUL.2020 14:02:53

CH48




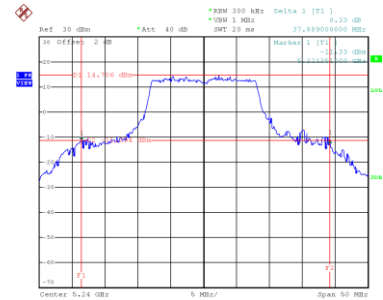


Date: 23.JUL.2020 14:06:20

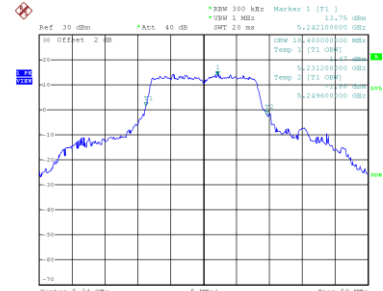

Date: 23.JUL.2020 14:06:03


Test Mode	UNII-1_TX AC (VHT40) Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	99.30	73.00
46	5230	56.79	38.20

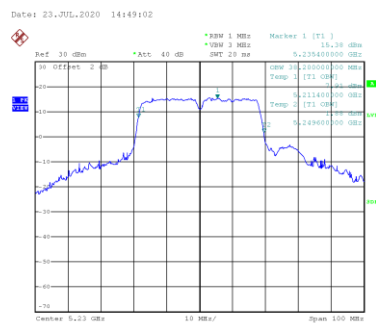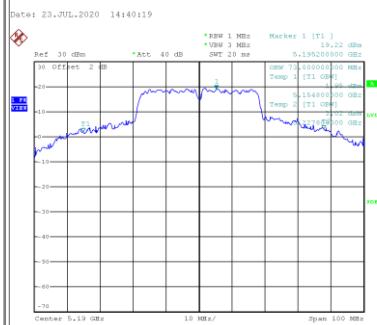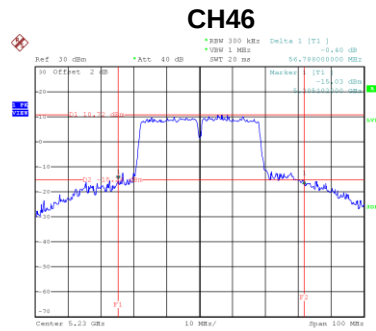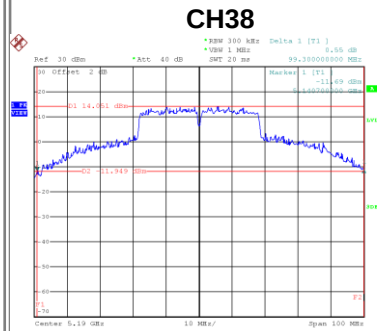


Test Mode	UNII-1_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	155.40	77.20

CH42

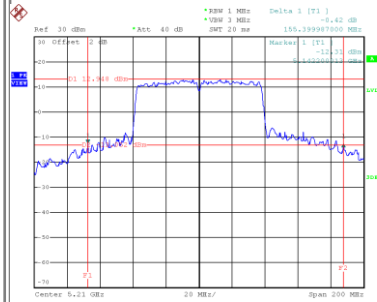

Date: 20.JUL.2020 15:21:41

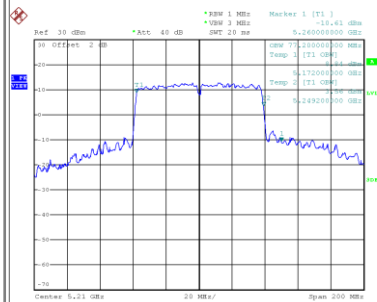


Date: 20.JUL.2020 15:21:22


Test Mode	UNII-3_TX AC (VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	17.55	41.80	500	Complies
157	5785	17.55	41.60	500	Complies
165	5825	17.49	40.70	500	Complies


CH149

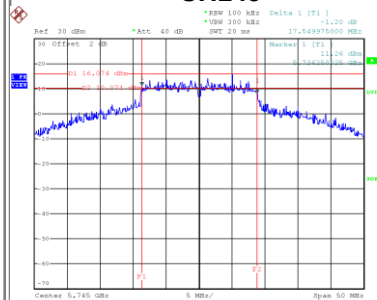


CH157

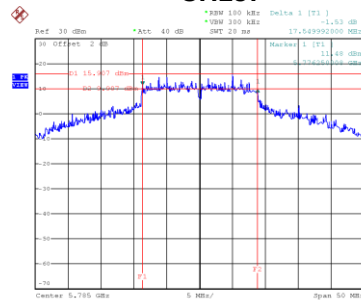


CH165

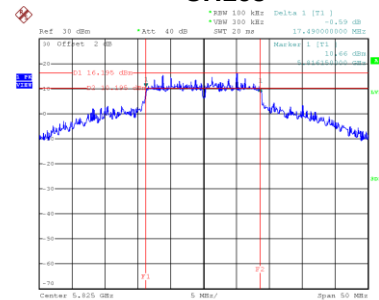


Date: 23.JUL.2020 14:27:14

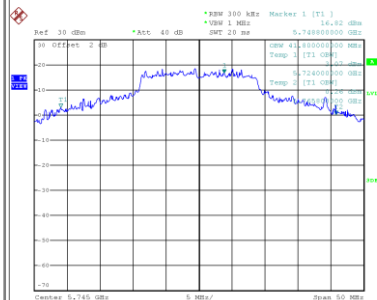

Date: 23.JUL.2020 14:30:16

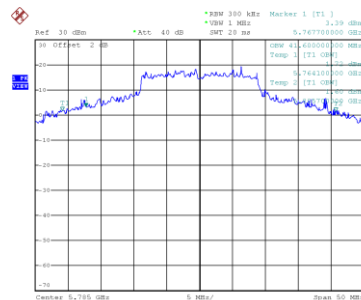

Date: 23.JUL.2020 14:37:50

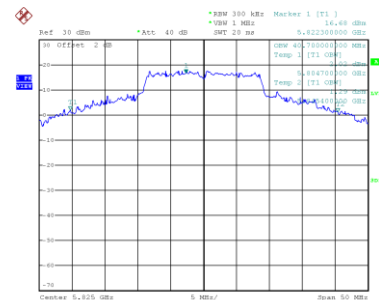

Date: 23.JUL.2020 14:26:41


Date: 23.JUL.2020 14:33:53

Date: 23.JUL.2020 14:37:16




Test Mode	UNII-3_TX AC (VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.19	84.60	500	Complies
159	5795	36.50	83.00	500	Complies

CH151

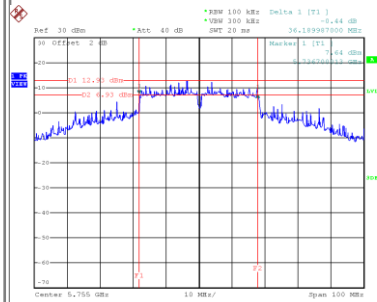


CH159

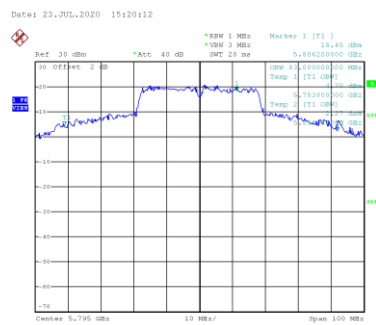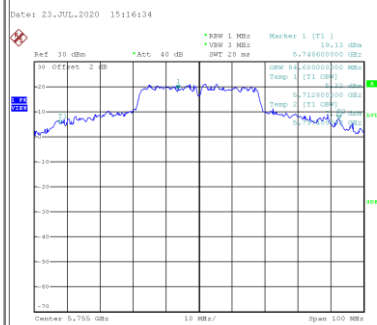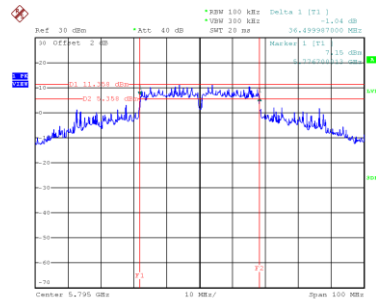


Test Mode	UNII-3_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	75.40	164.40	500	Complies

CH155

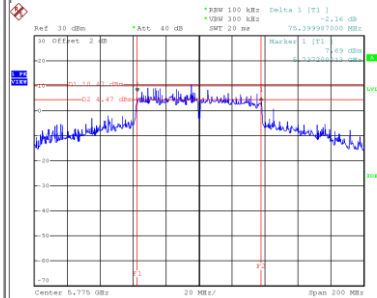

Date: 23.JUL.2020 15:25:30

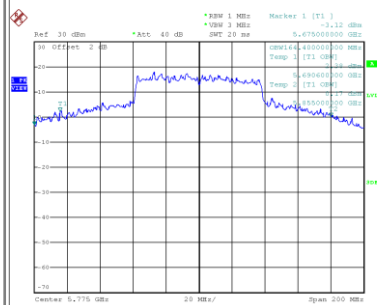

Date: 23.JUL.2020 15:26:49

APPENDIX F - CONDUCTED OUTPUT POWER

For 1TX

Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.77	0.21	19.98	30.00	1.00	Complies
40	5200	22.80	0.21	23.01	30.00	1.00	Complies
48	5240	24.87	0.21	25.08	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	24.55	0.21	24.76	30.00	1.00	Complies
157	5785	24.43	0.21	24.64	30.00	1.00	Complies
165	5825	24.67	0.21	24.88	30.00	1.00	Complies

**For 2TX
CDD**

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.21	0.44	18.65	30.00	1.00	Complies
40	5200	21.55	0.44	21.99	30.00	1.00	Complies
48	5240	23.40	0.44	23.84	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	17.24	0.44	17.68	30.00	1.00	Complies
40	5200	20.57	0.44	21.01	30.00	1.00	Complies
48	5240	20.00	0.44	20.44	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.20	30.00	1.00	Complies
40	5200	24.54	30.00	1.00	Complies
48	5240	25.47	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.61	0.79	16.40	30.00	1.00	Complies
46	5230	19.65	0.79	20.44	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.02	0.79	15.81	30.00	1.00	Complies
46	5230	18.93	0.79	19.72	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	19.13	30.00	1.00	Complies
46	5230	23.11	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	24.05	0.44	24.49	30.00	1.00	Complies
157	5785	24.12	0.44	24.56	30.00	1.00	Complies
165	5825	24.11	0.44	24.55	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.80	0.44	24.24	30.00	1.00	Complies
157	5785	23.83	0.44	24.27	30.00	1.00	Complies
165	5825	23.80	0.44	24.24	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	27.37	30.00	1.00	Complies
157	5785	27.42	30.00	1.00	Complies
165	5825	27.40	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.24	0.79	23.03	30.00	1.00	Complies
159	5795	22.32	0.79	23.11	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.01	0.79	22.80	30.00	1.00	Complies
159	5795	22.10	0.79	22.89	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	25.93	30.00	1.00	Complies
159	5795	26.02	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.94	0.13	19.07	30.00	1.00	Complies
40	5200	22.41	0.13	22.54	30.00	1.00	Complies
48	5240	23.89	0.13	24.02	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	17.66	0.13	17.79	30.00	1.00	Complies
40	5200	20.64	0.13	20.77	30.00	1.00	Complies
48	5240	22.74	0.13	22.87	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.49	30.00	1.00	Complies
40	5200	24.75	30.00	1.00	Complies
48	5240	26.49	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	16.39	0.25	16.64	30.00	1.00	Complies
46	5230	20.34	0.25	20.59	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.34	0.25	15.59	30.00	1.00	Complies
46	5230	19.32	0.25	19.57	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	19.16	30.00	1.00	Complies
46	5230	23.12	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.44	0.56	17.00	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.81	0.56	16.37	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	19.71	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	24.08	0.13	24.21	30.00	1.00	Complies
157	5785	24.16	0.13	24.29	30.00	1.00	Complies
165	5825	24.20	0.13	24.33	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.90	0.13	24.03	30.00	1.00	Complies
157	5785	23.83	0.13	23.96	30.00	1.00	Complies
165	5825	23.91	0.13	24.04	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	27.13	30.00	1.00	Complies
157	5785	27.14	30.00	1.00	Complies
165	5825	27.20	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.28	0.25	22.53	30.00	1.00	Complies
159	5795	22.36	0.25	22.61	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.03	0.25	22.28	30.00	1.00	Complies
159	5795	22.07	0.25	22.32	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	25.42	30.00	1.00	Complies
159	5795	25.48	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.17	0.56	19.73	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.01	0.56	19.57	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	22.66	30.00	1.00	Complies

**For 2TX
Beamforming**

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.01	0.44	18.45	27.99	0.6295	Complies
40	5200	21.25	0.44	21.69	27.99	0.6295	Complies
48	5240	23.18	0.44	23.62	27.99	0.6295	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.97	0.44	17.41	27.99	0.6295	Complies
40	5200	20.38	0.44	20.82	27.99	0.6295	Complies
48	5240	19.77	0.44	20.21	27.99	0.6295	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	20.97	27.99	0.6295	Complies
40	5200	24.28	27.99	0.6295	Complies
48	5240	25.25	27.99	0.6295	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.43	0.79	16.22	27.99	0.6295	Complies
46	5230	19.46	0.79	20.25	27.99	0.6295	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	14.90	0.79	15.69	27.99	0.6295	Complies
46	5230	18.82	0.79	19.61	27.99	0.6295	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.98	27.99	0.6295	Complies
46	5230	22.95	27.99	0.6295	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	24.02	0.44	24.46	27.99	0.6295	Complies
157	5785	24.03	0.44	24.47	27.99	0.6295	Complies
165	5825	24.08	0.44	24.52	27.99	0.6295	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.75	0.44	24.19	27.99	0.6295	Complies
157	5785	23.87	0.44	24.31	27.99	0.6295	Complies
165	5825	23.80	0.44	24.24	27.99	0.6295	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	27.33	27.99	0.6295	Complies
157	5785	27.40	27.99	0.6295	Complies
165	5825	27.39	27.99	0.6295	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.19	0.79	22.98	27.99	0.6295	Complies
159	5795	22.32	0.79	23.11	27.99	0.6295	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	21.89	0.79	22.68	27.99	0.6295	Complies
159	5795	22.04	0.79	22.83	27.99	0.6295	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	25.84	27.99	0.6295	Complies
159	5795	25.98	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.81	0.13	18.94	27.99	0.6295	Complies
40	5200	22.21	0.13	22.34	27.99	0.6295	Complies
48	5240	23.70	0.13	23.83	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	17.47	0.13	17.60	27.99	0.6295	Complies
40	5200	20.45	0.13	20.58	27.99	0.6295	Complies
48	5240	22.52	0.13	22.65	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.33	27.99	0.6295	Complies
40	5200	24.56	27.99	0.6295	Complies
48	5240	26.29	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	16.28	0.25	16.53	27.99	0.6295	Complies
46	5230	20.20	0.25	20.45	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.19	0.25	15.44	27.99	0.6295	Complies
46	5230	19.18	0.25	19.43	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	19.03	27.99	0.6295	Complies
46	5230	22.98	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.15	0.56	16.71	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.70	0.56	16.26	27.99	0.6295	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	19.50	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.99	0.13	24.12	27.99	0.6295	Complies
157	5785	24.08	0.13	24.21	27.99	0.6295	Complies
165	5825	24.19	0.13	24.32	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.78	0.13	23.91	27.99	0.6295	Complies
157	5785	23.85	0.13	23.98	27.99	0.6295	Complies
165	5825	23.95	0.13	24.08	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	27.03	27.99	0.6295	Complies
157	5785	27.11	27.99	0.6295	Complies
165	5825	27.21	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.26	0.25	22.51	27.99	0.6295	Complies
159	5795	22.26	0.25	22.51	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.08	0.25	22.33	27.99	0.6295	Complies
159	5795	21.95	0.25	22.20	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	25.43	27.99	0.6295	Complies
159	5795	25.37	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	18.00	0.56	18.56	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	16.87	0.56	17.43	27.99	0.6295	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------


Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	21.04	27.99	0.6295	Complies

APPENDIX G - POWER SPECTRAL DENSITY


For 1TX

Test Mode UNII-1_TX A Mode


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	11.83	0.21	12.04	17.00	Complies
40	5200	11.98	0.21	12.19	17.00	Complies
48	5240	10.67	0.21	10.88	17.00	Complies

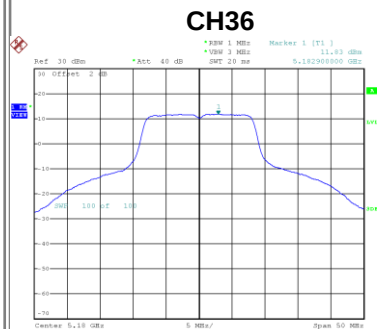

Date: 23.JUL.2020 14:02:07

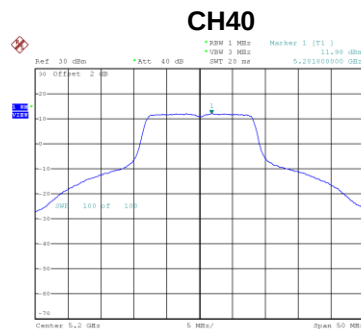


Date: 23.JUL.2020 14:02:47

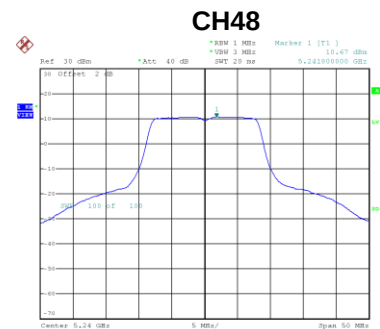


Date: 23.JUL.2020 14:06:34

Test Mode UNII-3_TX A Mode


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	12.05	0.21	12.26	30.00	Complies
157	5785	11.82	0.21	12.03	30.00	Complies
165	5825	11.98	0.21	12.19	30.00	Complies

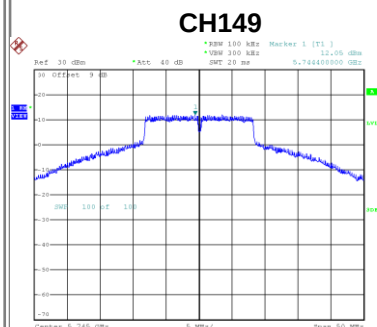

Date: 23.JUL.2020 14:08:03

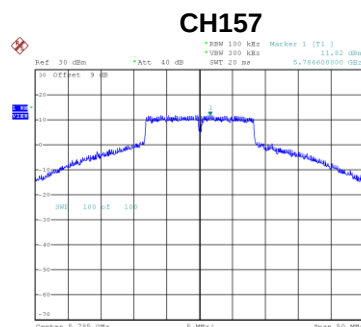

Date: 23.JUL.2020 14:09:21

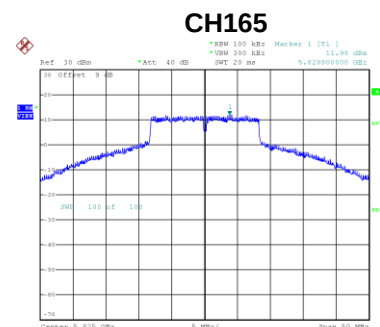


Date: 23.JUL.2020 14:10:37

For 2TX CDD


Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	10.62	0.13	10.75	14.99	Complies
40	5200	10.90	0.13	11.03	14.99	Complies
48	5240	10.49	0.13	10.62	14.99	Complies

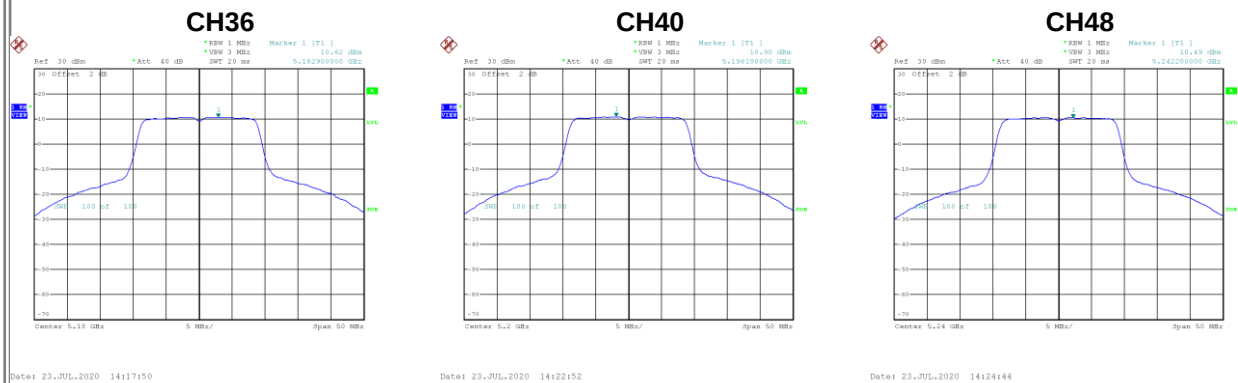

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	11.48	0.13	11.61	14.99	Complies
40	5200	11.55	0.13	11.68	14.99	Complies
48	5240	11.24	0.13	11.37	14.99	Complies

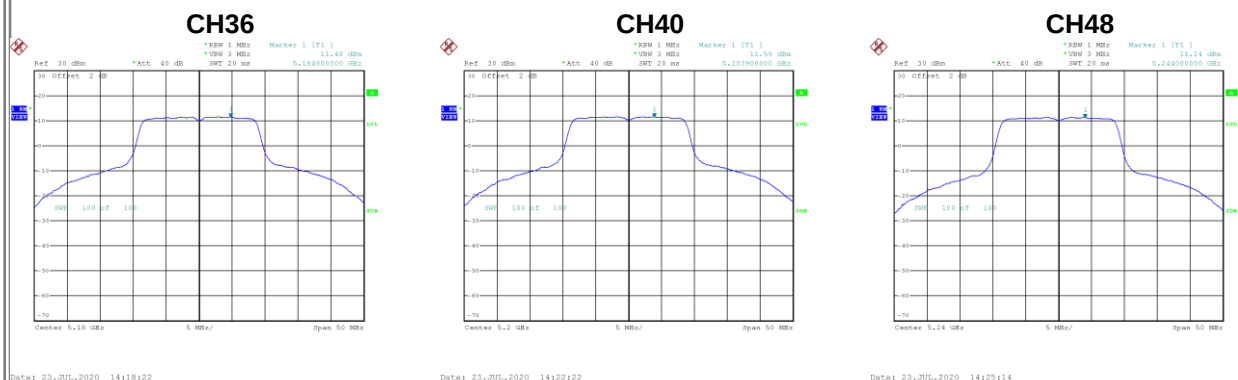


Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	14.21	14.99	Complies
40	5200	14.38	14.99	Complies
48	5240	14.02	14.99	Complies


Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	10.33	0.25	10.58	14.99	Complies
46	5230	6.92	0.25	7.17	14.99	Complies

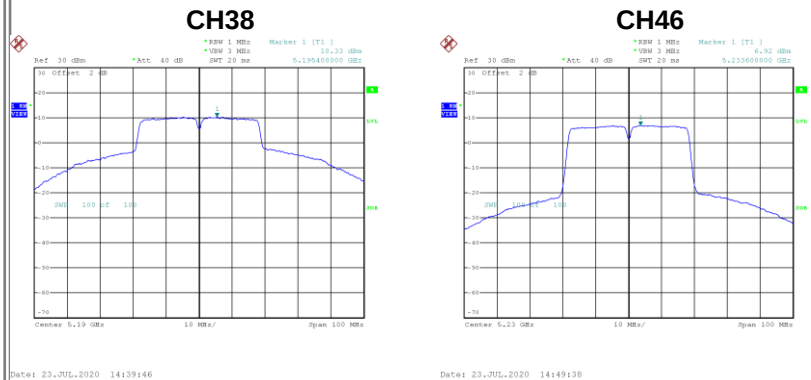

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	9.07	0.25	9.32	14.99	Complies
46	5230	7.32	0.25	7.57	14.99	Complies

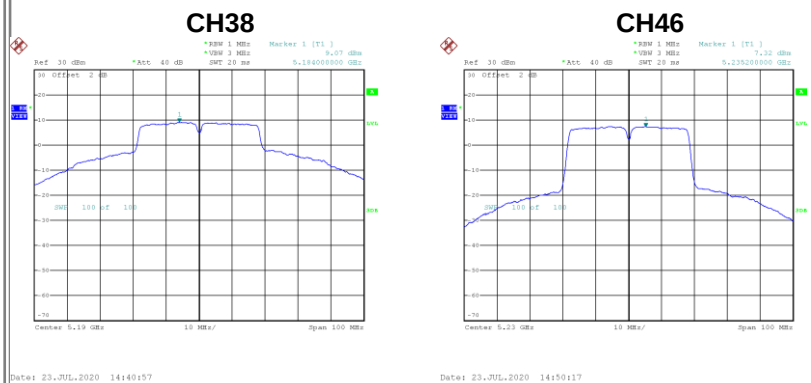


Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	13.01	14.99	Complies
46	5230	10.39	14.99	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	4.01	0.56	4.57	14.99	Complies

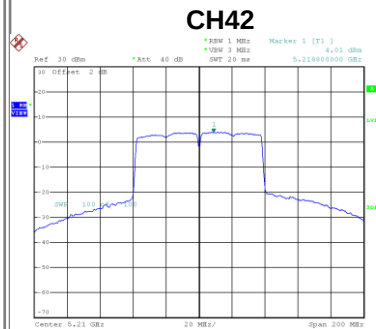

Date: 23.JUL.2020 15:22:01

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	4.49	0.56	5.05	14.99	Complies

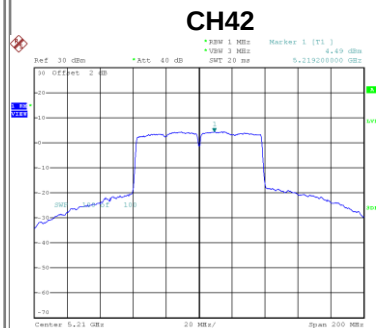


Date: 23.JUL.2020 15:23:06

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	7.83	14.99	Complies


Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	11.49	0.13	11.62	27.99	Complies
157	5785	11.19	0.13	11.32	27.99	Complies
165	5825	12.06	0.13	12.19	27.99	Complies

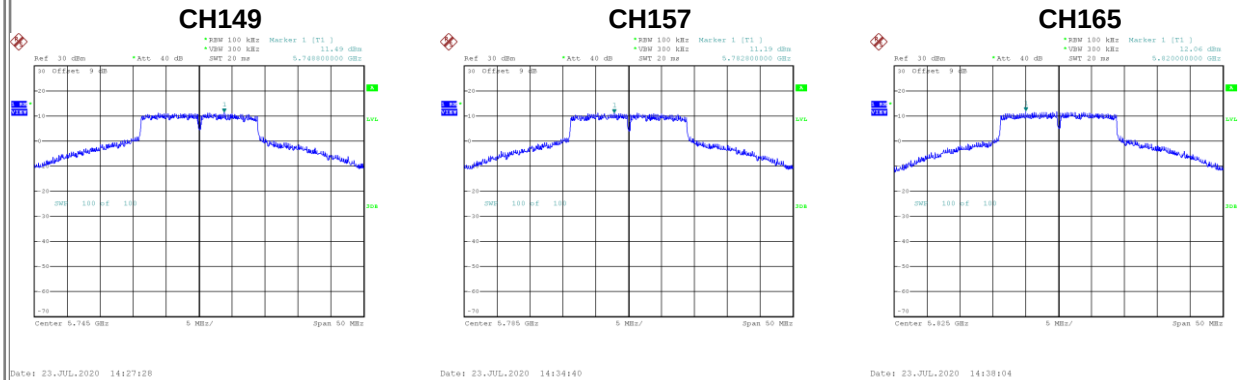

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	11.45	0.13	11.58	27.99	Complies
157	5785	11.16	0.13	11.29	27.99	Complies
165	5825	11.30	0.13	11.43	27.99	Complies

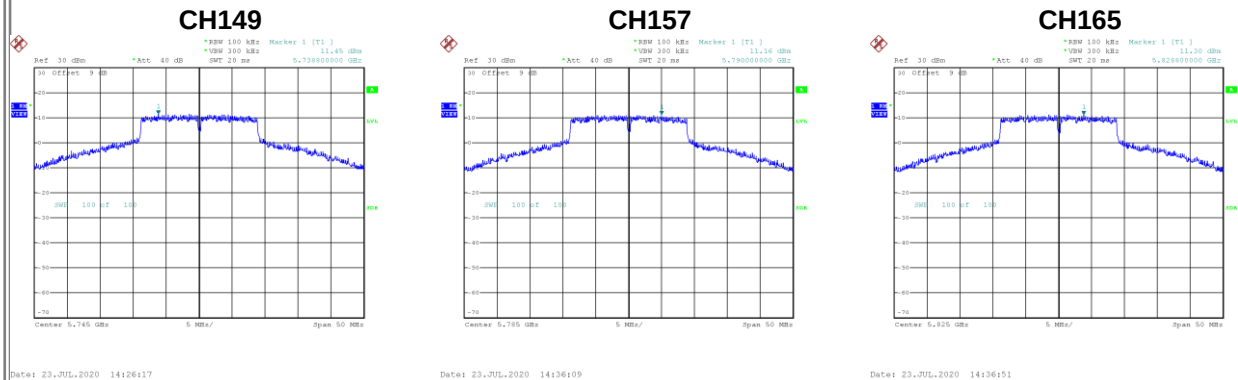


Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	14.61	27.99	Complies
157	5785	14.31	27.99	Complies
165	5825	14.84	27.99	Complies


Test Mode UNII-3_TX AC (VHT40) Mode_Ant. 1

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	8.43	0.25	8.68	27.99	Complies
159	5795	8.26	0.25	8.51	27.99	Complies

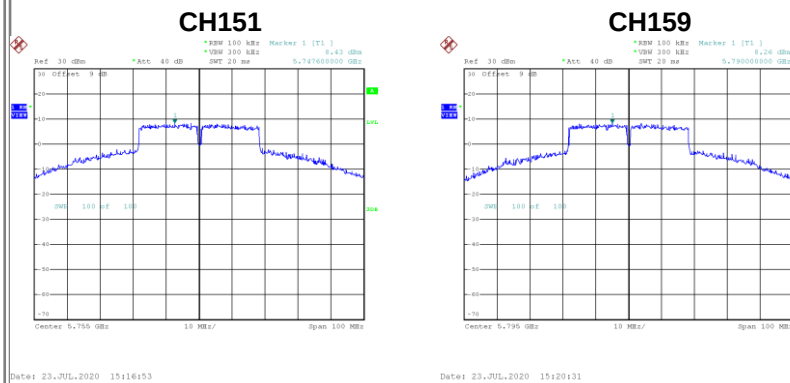

Test Mode UNII-3_TX AC (VHT40) Mode_Ant. 2

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	8.37	0.25	8.62	27.99	Complies
159	5795	8.69	0.25	8.94	27.99	Complies

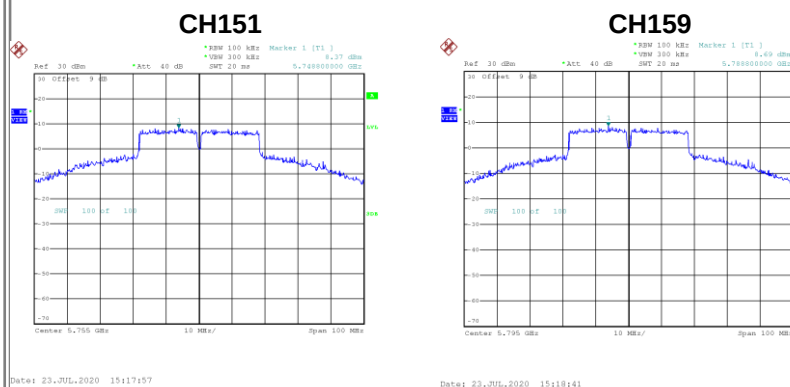


Test Mode UNII-3_TX AC (VHT40) Mode_Total

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	11.66	27.99	Complies
159	5795	11.74	27.99	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	4.74	0.56	5.30	27.99	Complies

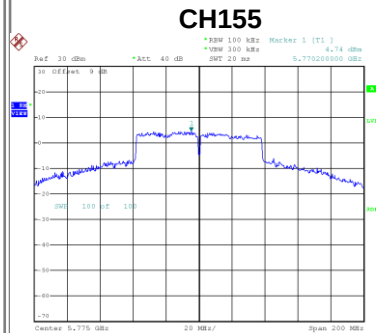

Date: 23_JUL_2020 15:25:50

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	4.55	0.56	5.11	27.99	Complies

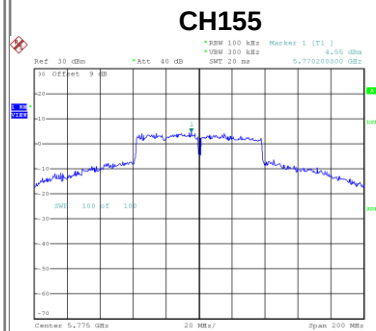

Date: 23_JUL_2020 15:26:42

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	8.21	27.99	Complies

End of Test Report