

FCC Test Report

Report No.: RFBDUI-WTW-P20110876

FCC ID: KA2R15A1

Test Model: R15

Received Date: Feb. 20, 2021

Test Date: Mar. 09 ~ Jun. 25, 2021

Issued Date: Jun. 25, 2021

Applicant: D-Link Corporation

Address: 14420 Myford Road Suite 100 Irvine California United States 92606

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards and References	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	18
4.1.5 Test Set Up	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement.....	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Conditions.....	37
4.2.7 Test Results	38
4.3 6 dB Bandwidth Measurement.....	42
4.3.1 Limits of 6 dB Bandwidth Measurement.....	42
4.3.2 Test Setup.....	42
4.3.3 Test Instruments	42
4.3.4 Test Procedure	42
4.3.5 Deviation from Test Standard	42
4.3.6 EUT Operating Conditions.....	42
4.3.7 Test Results	43
4.4 Occupied Bandwidth Measurement.....	45
4.4.1 Test Setup.....	45
4.4.2 Test Instruments	45
4.4.3 Test Procedure	45
4.4.4 Deviation from Test Standard	45
4.4.5 EUT Operating Conditions.....	45
4.4.6 Test Results	46
4.5 Conducted Output Power Measurement	48
4.5.1 Limits of Conducted Output Power Measurement.....	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments	48
4.5.4 Test Procedures.....	48
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Conditions.....	48
4.5.7 Test Results	49

4.6	Power Spectral Density Measurement	51
4.6.1	Limits of Power Spectral Density Measurement.....	51
4.6.2	Test Setup.....	51
4.6.3	Test Instruments	51
4.6.4	Test Procedure	51
4.6.5	Deviation from Test Standard	52
4.6.6	EUT Operating Condition	52
4.6.7	Test Results	53
4.7	Conducted Out of Band Emission Measurement	56
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	56
4.7.2	Test Setup.....	56
4.7.3	Test Instruments	56
4.7.4	Test Procedure	56
4.7.5	Deviation from Test Standard	56
4.7.6	EUT Operating Condition	56
4.7.7	Test Results	57
5	Pictures of Test Arrangements.....	66
	Annex A- Band Edge Measurement	67
	Appendix – Information of the Testing Laboratories	75

Release Control Record

Issue No.	Description	Date Issued
RFBDUI-WTW-P20110876	Original Release	Jun. 25, 2021

1 Certificate of Conformity

Product: AX1500 Wi-Fi 6 AI Router, AX1500 SMART ROUTER (refer to item 3.1 for more details)

Brand: D-Link

Test Model: R15

Sample Status: Engineering Sample

Applicant: D-Link Corporation

Test Date: Mar. 09 ~ Jun. 25, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.


Prepared by : _____, **Date:** Jun. 25, 2021
Lena Wang / Specialist


Approved by : _____, **Date:** Jun. 25, 2021
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is 10.23 dB at 0.43000 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.7 dB at 2483.50 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is MHF compatible

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX1500 Wi-Fi 6 AI Router, AX1500 SMART ROUTER
Product Difference	For Marketing purpose
Brand	D-Link
Test Model	R15
Status of EUT	Engineering Sample
Power Supply Rating	12.0 Vdc, 1A (adapter or host equipment)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 300 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	CDD Mode: 619.765 mW Beamforming Mode: 158.323 mW
Antenna Type	Refer to Note as below
Antenna Connector	N/A
Accessory Device	Refer to Note as below
Data Cable Supplied	N/A

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function	CDD Mode	Beamforming Mode
802.11b	2TX	Support	Not Support
802.11g	2TX	Support	Not Support
802.11n (HT20)	2TX	Support	Support
802.11n (HT40)	2TX	Support	Support

2. The EUT contains following accessory devices.

3. Product	Brand	Model	Description
Adapter 1	Amigo	AMS159A-1201000FU (US)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 2	YOUNGHOPE	YHSW-120100UA (US)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 3	Amigo	AMS159A-1201000FV (EU)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 4	Amigo	AMS159A-1201000F (US+ UK) AMS159A-1201000F (EU+ UK)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 5	Amigo	AMS159A-1201000FS (AU)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 6	Amigo	AMS195-1201000FY (IN)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A

Product	Brand	Model	Description
Adapter 7	Amigo	AMS195-1201000FK (KR)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 8	Amigo	AMS159A-1201000FX (BR)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 9	Amigo	AMS159A-1201000FB (UK)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 10	YOUNGHOPE	YHSW-120100VA (EU)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 11	YOUNGHOPE	YHSW-120100BA (UK)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 12	YOUNGHOPE	YHSW120100SA (AU)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 13	YOUNGHOPE	YHSW-120100BZA (BR)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 14	YOUNGHOPE	YHSW-120100IA (IN)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
Adapter 15	YOUNGHOPE	YHSW-120100KA (KR)	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 12 Vdc, 1 A
CAT5E 24AWG CCA BLACK CABLE	Nienyi	NYS4709 REV.0	1M

* Adapter 1, 3-9 and Adapter 2, 10-15 only different in plug. Therefore, use US Type as a representative for test.

4. The following antennas were provided to the EUT.

Ant. Type	Router External Antenna
Connector Type	MHF compatible
Antenna Gain (dBi)	
Model	2400 ~ 2500 MHz
AOX20X-051040-00	4.8
AOX20X-051041-00	4.4

- The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
- WLAN 2.4GHz and WLAN 5GHz can transmit at same time.
- Spurious emission of the simultaneous operation (WLAN 2.4GHz, 5GHz) has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Adapter 1
B	-	√	√	-	Adapter 2

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz

RE<1G: Radiated Emission below 1 GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

NOTE: "-" means no effect.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11n (HT40)	3 to 9	9	OFDM	BPSK	13.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11n (HT40)	3 to 9	9	OFDM	BPSK	13.5

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin, Han Wu
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin, Han Wu
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.


Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.417/8.517 = 0.988$

802.11g: Duty cycle = $1.395/1.491 = 0.936$, Duty factor = $10 * \log(1/0.936) = 0.29$

802.11n (HT20): Duty cycle = $1.307/1.376 = 0.95$, Duty factor = $10 * \log(1/0.95) = 0.22$

802.11n (HT40): Duty cycle = $0.648/0.816 = 0.794$, Duty factor = $10 * \log(1/0.794) = 1.00$

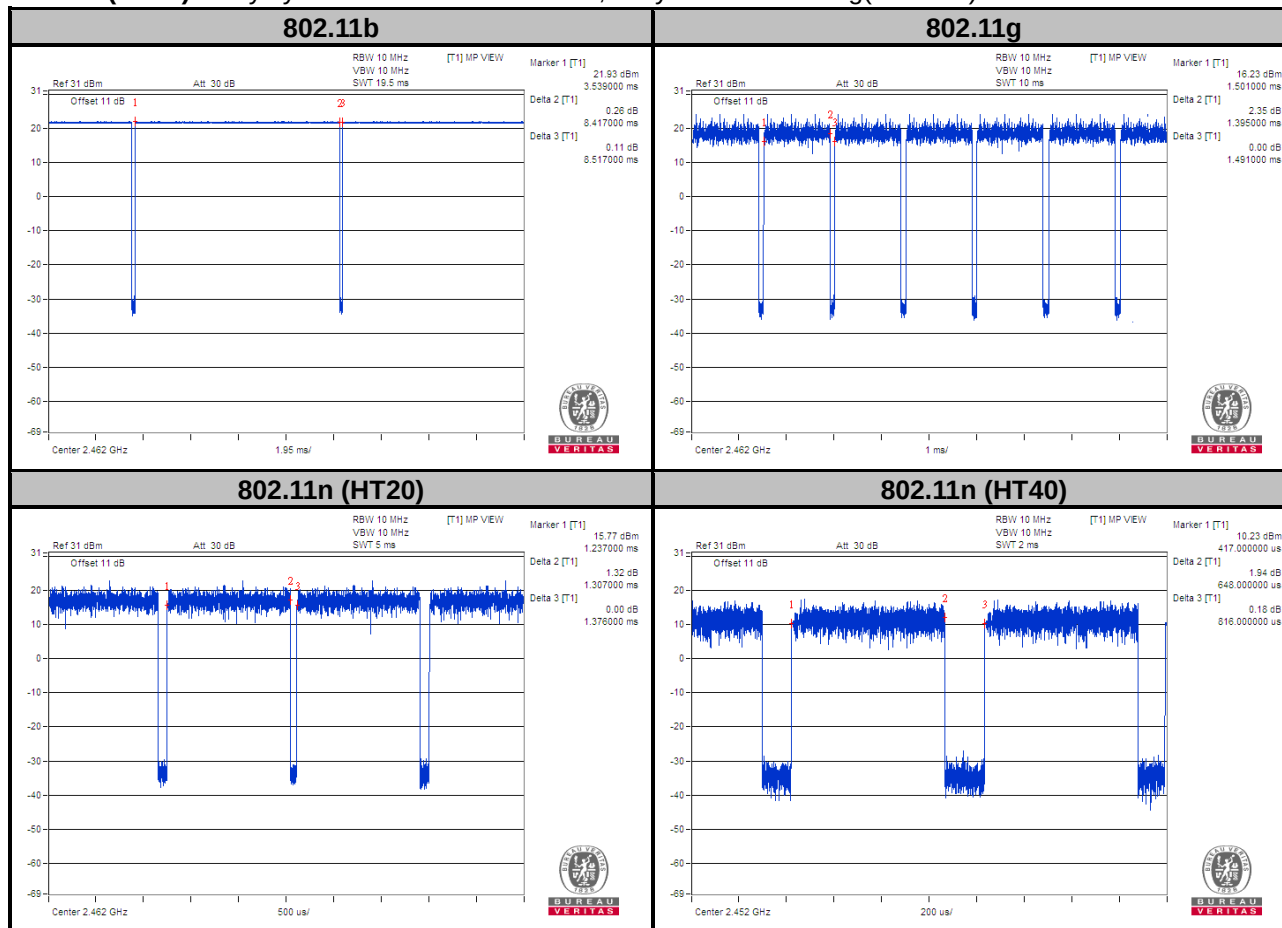

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
A	Load	N/A	N/A	N/A	N/A
B	Notebook	DELL	E5420	33MJMQ1	N/A
C	Adapter	Amigo	AMS159A-1201000FU	N/A	N/A
D	Adapter	Amigo	AMS159A-1201000FV	N/A	N/A


No.	Signal Cable Description of The Above Support Units
1.	LAN Cable: 10m
2.	CAT5E 24AWG CCA BLACK CABLE: 1m
3.	LAN Cable: 1.2m*2

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items B acted as communication partners to transfer data.

3.4.1 Configuration of System under Test

Mode A

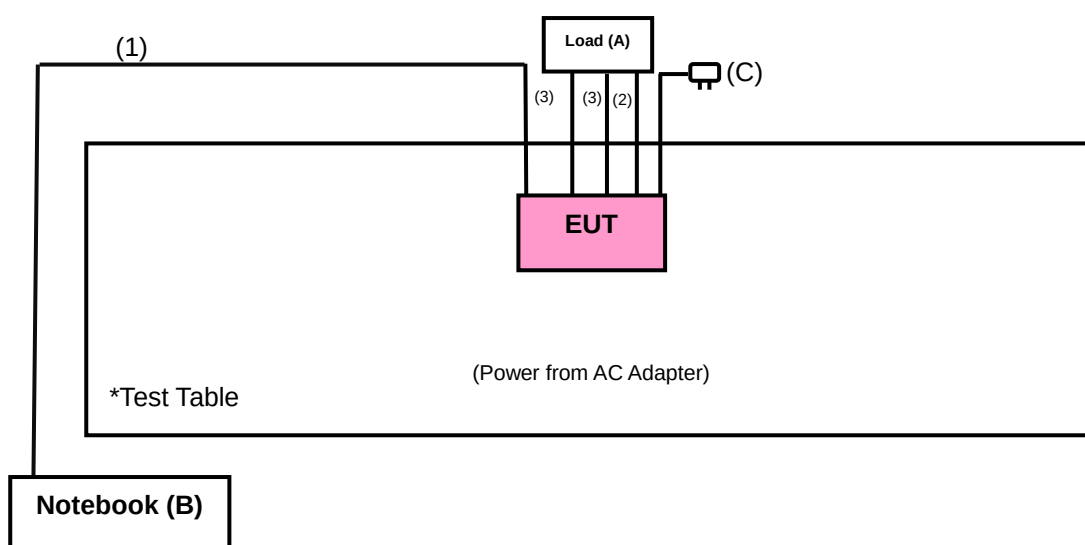

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 22, 2020	Apr. 21, 2021
			Apr. 09, 2021	Apr. 08, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
			Jun. 05, 2021	Jun. 04, 2022
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 17, 2021	Feb. 16, 2022
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM- SM8000	CABLE-CH9-02 (248780+171006)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9- (250795/4)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
			Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz- 40GHz) EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 10 Hz ;
11n (HT20): RBW = 1 MHz, VBW = 10 Hz ; 11n (HT40): RBW = 1 MHz, VBW = 10 Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

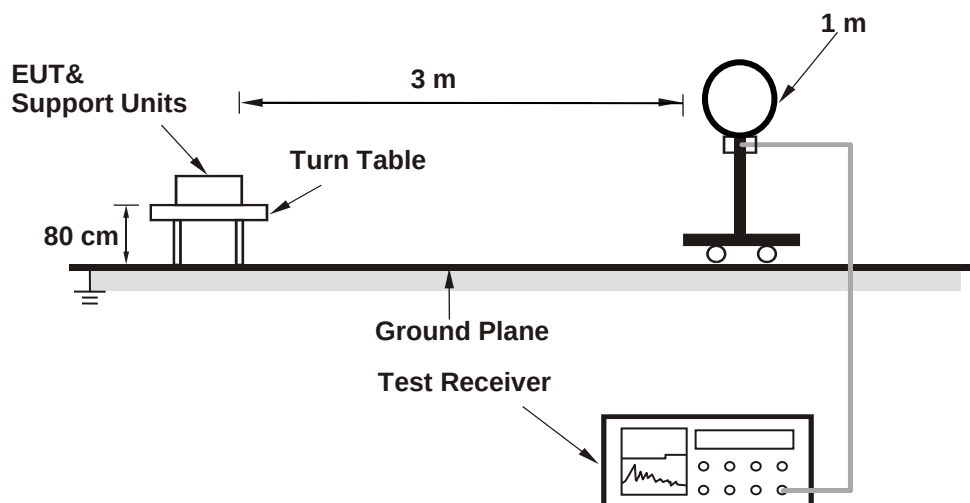

<Radiated Emission 30 MHz to 1 GHz>

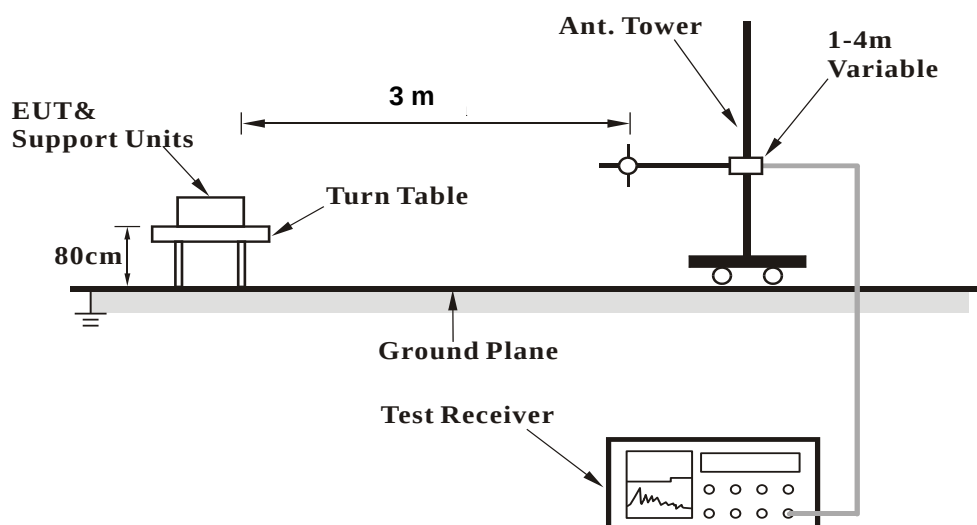

<Radiated Emission above 1 GHz>

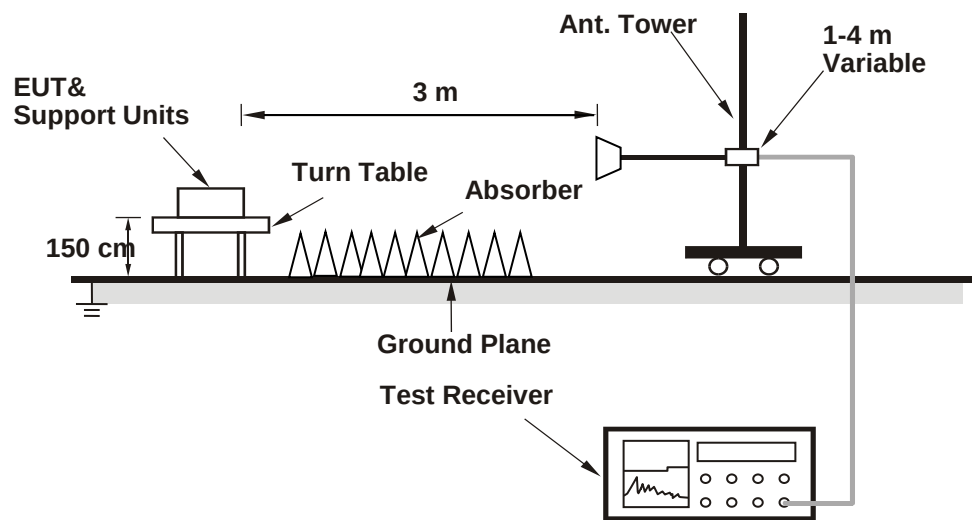

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :

802.11b

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	1.13 H	151	25.1	31.2
2	2390.00	44.7 AV	54.0	-9.3	1.13 H	151	13.5	31.2
3	*2412.00	97.7 PK			1.13 H	151	66.5	31.2
4	*2412.00	94.6 AV			1.13 H	151	63.4	31.2
5	4824.00	43.7 PK	74.0	-30.3	2.94 H	163	41.6	2.1
6	4824.00	34.0 AV	54.0	-20.0	2.94 H	163	31.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.73 V	10	30.6	31.2
2	2390.00	52.9 AV	54.0	-1.1	1.73 V	10	21.7	31.2
3	*2412.00	111.8 PK			1.73 V	10	80.6	31.2
4	*2412.00	108.6 AV			1.73 V	10	77.4	31.2
5	4824.00	45.1 PK	74.0	-28.9	3.42 V	357	43.0	2.1
6	4824.00	35.5 AV	54.0	-18.5	3.42 V	357	33.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.18 H	159	24.9	31.2
2	2390.00	43.1 AV	54.0	-10.9	1.18 H	159	11.9	31.2
3	*2437.00	99.4 PK			1.18 H	159	68.3	31.1
4	*2437.00	96.2 AV			1.18 H	159	65.1	31.1
5	4874.00	51.3 PK	74.0	-22.7	2.76 H	79	49.2	2.1
6	4874.00	47.8 AV	54.0	-6.2	2.76 H	79	45.7	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	2.10 V	11	30.4	31.2
2	2390.00	52.8 AV	54.0	-1.2	2.10 V	11	21.6	31.2
3	*2437.00	114.8 PK			2.08 V	9	83.7	31.1
4	*2437.00	111.6 AV			2.08 V	9	80.5	31.1
5	4874.00	52.2 PK	74.0	-21.8	2.42 V	46	50.1	2.1
6	4874.00	49.2 AV	54.0	-4.8	2.42 V	46	47.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.9 PK			1.17 H	148	66.8	31.1
2	*2462.00	94.8 AV			1.17 H	148	63.7	31.1
3	2483.50	57.8 PK	74.0	-16.2	1.17 H	148	26.7	31.1
4	2483.50	46.4 AV	54.0	-7.6	1.17 H	148	15.3	31.1
5	4924.00	45.7 PK	74.0	-28.3	3.03 H	69	43.6	2.1
6	4924.00	39.6 AV	54.0	-14.4	3.03 H	69	37.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.2 PK			1.87 V	8	81.1	31.1
2	*2462.00	109.0 AV			1.87 V	8	77.9	31.1
3	2483.50	60.4 PK	74.0	-13.6	1.87 V	8	29.3	31.1
4	2483.50	53.0 AV	54.0	-1.0	1.87 V	8	21.9	31.1
5	4924.00	46.7 PK	74.0	-27.3	2.89 V	87	44.6	2.1
6	4924.00	41.9 AV	54.0	-12.1	2.89 V	87	39.8	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.18 H	156	27.2	31.2
2	2390.00	44.4 AV	54.0	-9.6	1.18 H	156	13.2	31.2
3	*2412.00	110.5 PK			1.18 H	156	79.3	31.2
4	*2412.00	101.3 AV			1.18 H	156	70.1	31.2
5	4824.00	43.4 PK	74.0	-30.6	2.97 H	157	41.3	2.1
6	4824.00	30.5 AV	54.0	-23.5	2.97 H	157	28.4	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.68 V	9	37.5	31.2
2	2390.00	53.0 AV	54.0	-1.0	1.68 V	9	21.8	31.2
3	*2412.00	114.8 PK			1.68 V	9	83.6	31.2
4	*2412.00	105.7 AV			1.68 V	9	74.5	31.2
5	4824.00	42.5 PK	74.0	-31.5	2.54 V	54	40.4	2.1
6	4824.00	29.8 AV	54.0	-24.2	2.54 V	54	27.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.0 PK			1.12 H	158	75.9	31.1
2	*2437.00	97.4 AV			1.12 H	158	66.3	31.1
3	2483.50	61.8 PK	74.0	-12.2	1.12 H	158	30.7	31.1
4	2483.50	46.5 AV	54.0	-7.5	1.12 H	158	15.4	31.1
5	4874.00	56.4 PK	74.0	-17.6	2.87 H	174	54.3	2.1
6	4874.00	43.2 AV	54.0	-10.8	2.87 H	174	41.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.7 PK			1.93 V	11	90.6	31.1
2	*2437.00	112.2 AV			1.93 V	11	81.1	31.1
3	2483.50	67.9 PK	74.0	-6.1	1.93 V	11	36.8	31.1
4	2483.50	52.9 AV	54.0	-1.1	1.93 V	11	21.8	31.1
5	4874.00	58.9 PK	74.0	-15.1	3.67 V	183	56.8	2.1
6	4874.00	45.0 AV	54.0	-9.0	3.67 V	183	42.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.0 PK			1.07 H	148	67.9	31.1
2	*2462.00	89.7 AV			1.07 H	148	58.6	31.1
3	2483.50	58.3 PK	74.0	-15.7	1.07 H	146	27.2	31.1
4	2483.50	46.0 AV	54.0	-8.0	1.07 H	146	14.9	31.1
5	4924.00	43.8 PK	74.0	-30.2	2.98 H	174	41.7	2.1
6	4924.00	29.9 AV	54.0	-24.1	2.98 H	174	27.8	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.5 PK			1.70 V	2	82.4	31.1
2	*2462.00	104.3 AV			1.70 V	2	73.2	31.1
3	2483.50	68.8 PK	74.0	-5.2	1.70 V	2	37.7	31.1
4	2483.50	52.9 AV	54.0	-1.1	1.70 V	2	21.8	31.1
5	4924.00	44.5 PK	74.0	-29.5	2.67 V	174	42.4	2.1
6	4924.00	30.7 AV	54.0	-23.3	2.67 V	174	28.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT20)

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	1.28 H	162	25.2	31.2
2	2390.00	43.5 AV	54.0	-10.5	1.28 H	162	12.3	31.2
3	*2412.00	98.5 PK			1.28 H	162	67.3	31.2
4	*2412.00	89.1 AV			1.28 H	162	57.9	31.2
5	4824.00	43.0 PK	74.0	-31.0	2.91 H	154	40.9	2.1
6	4824.00	29.7 AV	54.0	-24.3	2.91 H	154	27.6	2.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	1.70 V	3	41.6	31.2
2	2390.00	51.6 AV	54.0	-2.4	1.70 V	3	20.4	31.2
3	*2412.00	113.6 PK			1.70 V	3	82.4	31.2
4	*2412.00	103.9 AV			1.70 V	3	72.7	31.2
5	4824.00	43.7 PK	74.0	-30.3	2.87 V	68	41.6	2.1
6	4824.00	30.0 AV	54.0	-24.0	2.87 V	68	27.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.9 PK			1.26 H	158	73.8	31.1
2	*2437.00	95.5 AV			1.26 H	158	64.4	31.1
3	2483.50	62.8 PK	74.0	-11.2	1.26 H	158	31.7	31.1
4	2483.50	46.4 AV	54.0	-7.6	1.26 H	158	15.3	31.1
5	4874.00	56.3 PK	74.0	-17.7	3.06 H	175	54.2	2.1
6	4874.00	42.4 AV	54.0	-11.6	3.06 H	175	40.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.7 PK			1.66 V	24	88.6	31.1
2	*2437.00	110.3 AV			1.66 V	24	79.2	31.1
3	2483.50	72.9 PK	74.0	-1.1	1.66 V	24	41.8	31.1
4	2483.50	50.9 AV	54.0	-3.1	1.66 V	24	19.8	31.1
5	4874.00	58.5 PK	74.0	-15.5	3.54 V	178	56.4	2.1
6	4874.00	44.9 AV	54.0	-9.1	3.54 V	178	42.8	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.5 PK			1.27 H	146	65.4	31.1
2	*2462.00	86.9 AV			1.27 H	146	55.8	31.1
3	2483.50	59.4 PK	74.0	-14.6	1.27 H	146	28.3	31.1
4	2483.50	46.8 AV	54.0	-7.2	1.27 H	146	15.7	31.1
5	4924.00	43.5 PK	74.0	-30.5	2.98 H	169	41.4	2.1
6	4924.00	29.4 AV	54.0	-24.6	2.98 H	169	27.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.4 PK			1.64 V	23	80.3	31.1
2	*2462.00	101.7 AV			1.64 V	23	70.6	31.1
3	2483.50	69.9 PK	74.0	-4.1	1.64 V	23	38.8	31.1
4	2483.50	52.8 AV	54.0	-1.2	1.64 V	23	21.7	31.1
5	4924.00	44.3 PK	74.0	-29.7	2.57 V	98	42.2	2.1
6	4924.00	30.2 AV	54.0	-23.8	2.57 V	98	28.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT40)

RF Mode	TX 802.11n (HT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.17 H	156	25.6	31.2
2	2390.00	43.8 AV	54.0	-10.2	1.17 H	156	12.6	31.2
3	*2422.00	95.5 PK			1.17 H	156	64.3	31.2
4	*2422.00	85.6 AV			1.17 H	156	54.4	31.2
5	4844.00	42.4 PK	74.0	-31.6	3.01 H	173	40.3	2.1
6	4844.00	29.1 AV	54.0	-24.9	3.01 H	173	27.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	1.70 V	6	38.3	31.2
2	2390.00	52.9 AV	54.0	-1.1	1.70 V	6	21.7	31.2
3	*2422.00	110.4 PK			1.70 V	6	79.2	31.2
4	*2422.00	100.3 AV			1.70 V	6	69.1	31.2
5	4844.00	42.8 PK	74.0	-31.2	2.74 V	59	40.7	2.1
6	4844.00	29.4 AV	54.0	-24.6	2.74 V	59	27.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.2 PK			1.14 H	146	66.1	31.1
2	*2437.00	87.0 AV			1.14 H	146	55.9	31.1
3	2483.50	59.6 PK	74.0	-14.4	1.14 H	146	28.5	31.1
4	2483.50	46.6 AV	54.0	-7.4	1.14 H	146	15.5	31.1
5	4874.00	46.0 PK	74.0	-28.0	2.96 H	177	43.9	2.1
6	4874.00	31.5 AV	54.0	-22.5	2.96 H	177	29.4	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.7 PK			1.68 V	22	80.6	31.1
2	*2437.00	101.3 AV			1.68 V	22	70.2	31.1
3	2483.50	67.8 PK	74.0	-6.2	1.68 V	22	36.7	31.1
4	2483.50	52.9 AV	54.0	-1.1	1.68 V	22	21.8	31.1
5	4874.00	47.4 PK	74.0	-26.6	3.39 V	182	45.3	2.1
6	4874.00	32.9 AV	54.0	-21.1	3.39 V	182	30.8	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	94.5 PK			1.19 H	163	63.4	31.1
2	*2452.00	84.9 AV			1.19 H	163	53.8	31.1
3	2483.50	57.0 PK	74.0	-17.0	1.19 H	163	25.9	31.1
4	2483.50	46.2 AV	54.0	-7.8	1.19 H	163	15.1	31.1
5	4904.00	42.8 PK	74.0	-31.2	3.09 H	155	40.8	2.0
6	4904.00	29.4 AV	54.0	-24.6	3.09 H	155	27.4	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.8 PK			1.72 V	6	78.7	31.1
2	*2452.00	99.5 AV			1.72 V	6	68.4	31.1
3	2483.50	68.2 PK	74.0	-5.8	1.72 V	6	37.1	31.1
4	2483.50	53.3 AV	54.0	-0.7	1.72 V	6	22.2	31.1
5	4904.00	43.4 PK	74.0	-30.6	2.67 V	49	41.4	2.0
6	4904.00	29.6 AV	54.0	-24.4	2.67 V	49	27.6	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:

802.11n (HT40)


Mode A

RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.80	26.0 QP	40.0	-14.0	1.25 H	14	36.8	-10.8
2	135.73	28.6 QP	43.5	-14.9	1.00 H	283	38.2	-9.6
3	286.08	25.1 QP	46.0	-20.9	1.50 H	14	32.2	-7.1
4	497.54	32.9 QP	46.0	-13.1	1.00 H	165	35.2	-2.3
5	789.51	33.2 QP	46.0	-12.8	1.00 H	256	29.8	3.4
6	947.62	35.5 QP	46.0	-10.5	1.00 H	311	29.0	6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

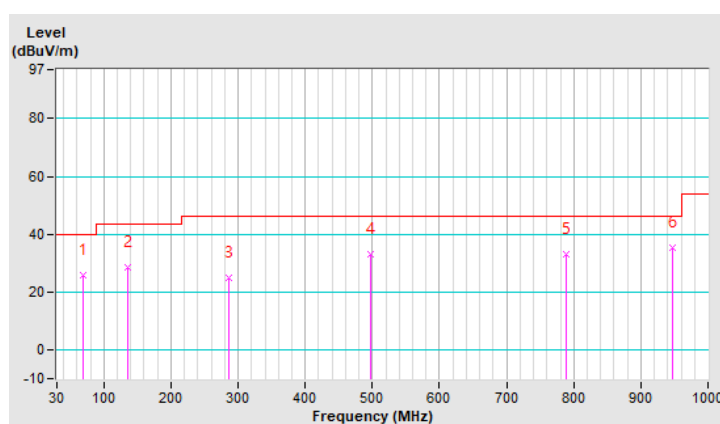


RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	32.8 QP	40.0	-7.2	1.50 V	134	41.8	-9.0
2	80.44	35.3 QP	40.0	-4.7	1.00 V	342	48.9	-13.6
3	121.18	32.3 QP	43.5	-11.2	1.25 V	84	43.1	-10.8
4	159.98	26.7 QP	43.5	-16.8	1.00 V	196	35.2	-8.5
5	506.27	32.3 QP	46.0	-13.7	1.25 V	6	34.5	-2.2
6	909.79	34.8 QP	46.0	-11.2	1.50 V	228	28.9	5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

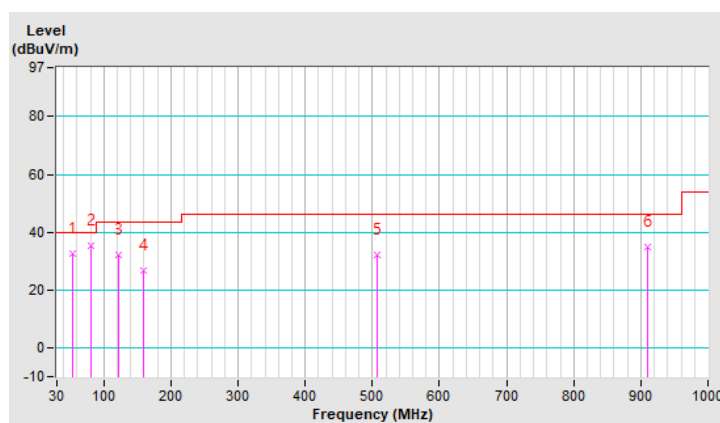


Mode B

RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.13	23.6 QP	40.0	-16.4	1.25 H	244	32.9	-9.3
2	174.53	27.6 QP	43.5	-15.9	1.00 H	271	36.9	-9.3
3	303.54	25.1 QP	46.0	-20.9	1.25 H	213	31.7	-6.6
4	512.09	32.5 QP	46.0	-13.5	1.50 H	163	34.4	-1.9
5	765.26	31.5 QP	46.0	-14.5	1.00 H	233	28.6	2.9
6	958.29	34.7 QP	46.0	-11.3	1.25 H	329	28.2	6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

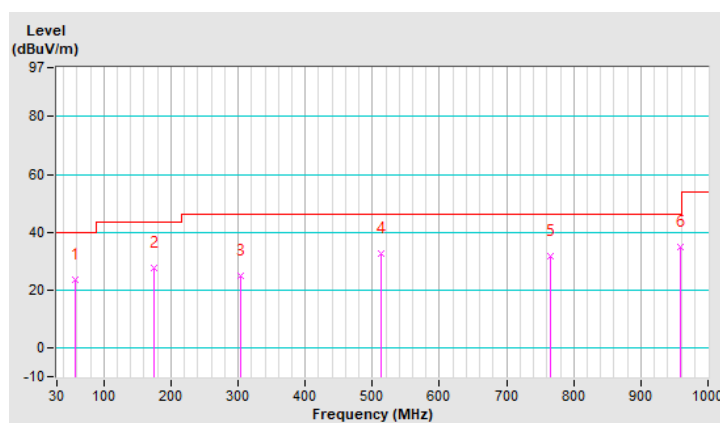


RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	26.3 QP	40.0	-13.7	1.25 V	16	36.6	-10.3
2	65.89	34.8 QP	40.0	-5.2	1.00 V	84	45.0	-10.2
3	115.36	34.5 QP	43.5	-9.0	1.25 V	84	46.0	-11.5
4	491.72	29.7 QP	46.0	-16.3	1.50 V	326	32.2	-2.5
5	733.25	31.8 QP	46.0	-14.2	1.00 V	257	29.9	1.9
6	967.02	34.4 QP	54.0	-19.6	1.00 V	132	27.8	6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

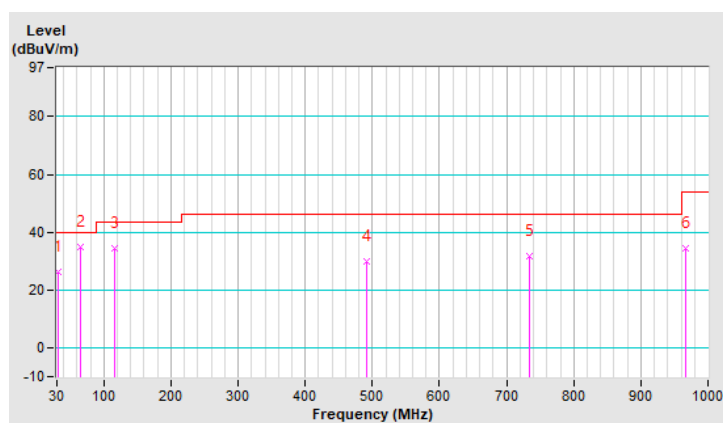

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 21, 2020	Dec. 20, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2020	Sep. 03, 2021
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 28, 2021	Jan. 27, 2022
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 18, 2020	Aug. 17, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).
 3. The VCCI Site Registration No. is C-12047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

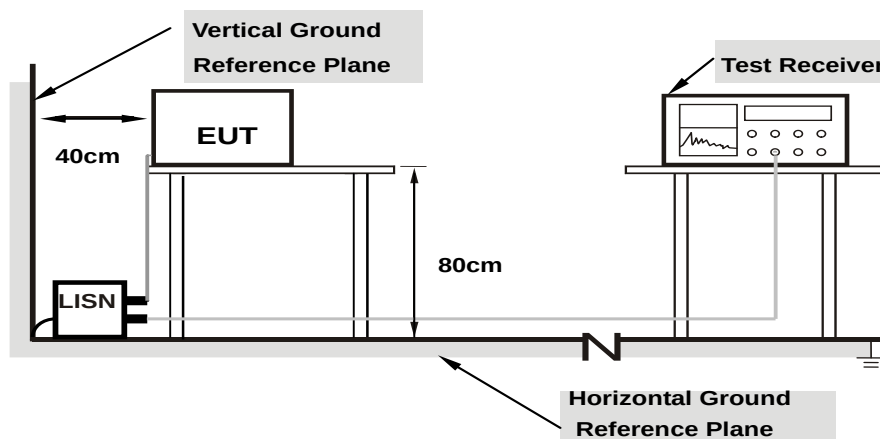

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.2.7 Test Results


Mode A

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin	Test Date	2021/6/22

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.09	31.54	15.40	41.63	25.49	66.00	56.00	-24.37	-30.51
2	0.17400	10.10	26.33	9.97	36.43	20.07	64.77	54.77	-28.34	-34.70
3	0.28600	10.15	18.72	5.62	28.87	15.77	60.64	50.64	-31.77	-34.87
4	0.44177	10.19	27.12	15.31	37.31	25.50	57.03	47.03	-19.72	-21.53
5	0.55400	10.20	12.45	1.78	22.65	11.98	56.00	46.00	-33.35	-34.02
6	9.31400	10.48	15.79	3.04	26.27	13.52	60.00	50.00	-33.73	-36.48

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

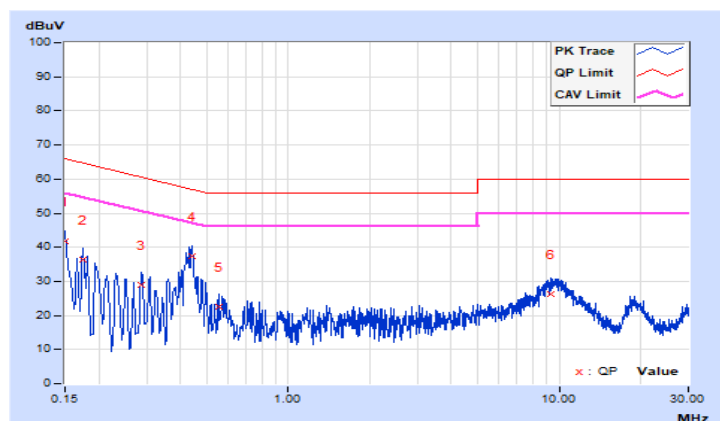


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin	Test Date	2021/6/22

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.10	29.67	18.34	39.77	28.44	66.00	56.00	-26.23	-27.56
2	0.19000	10.12	24.53	15.28	34.65	25.40	64.04	54.04	-29.39	-28.64
3	0.30955	10.16	21.23	15.91	31.39	26.07	59.98	49.98	-28.59	-23.91
4	0.43000	10.20	32.36	26.82	42.56	37.02	57.25	47.25	-14.69	-10.23
5	1.19400	10.29	18.40	10.94	28.69	21.23	56.00	46.00	-27.31	-24.77
6	9.67800	10.59	18.15	10.60	28.74	21.19	60.00	50.00	-31.26	-28.81

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

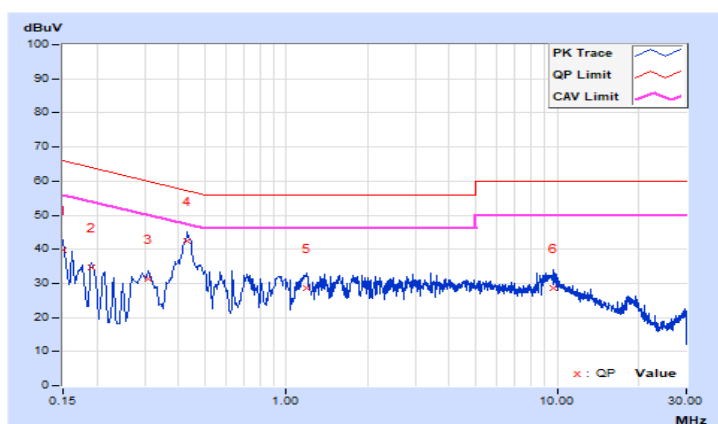


Mode B

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin	Test Date	2021/6/25

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	10.09	21.67	11.09	31.76	21.18	65.37	55.37	-33.61	-34.19
2	0.47062	10.19	24.62	3.25	34.81	13.44	56.50	46.50	-21.69	-33.06
3	0.50581	10.19	27.58	1.62	37.77	11.81	56.00	46.00	-18.23	-34.19
4	2.10109	10.29	17.37	3.96	27.66	14.25	56.00	46.00	-28.34	-31.75
5	3.08641	10.33	23.64	6.13	33.97	16.46	56.00	46.00	-22.03	-29.54
6	10.18306	10.49	11.62	2.62	22.11	13.11	60.00	50.00	-37.89	-36.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

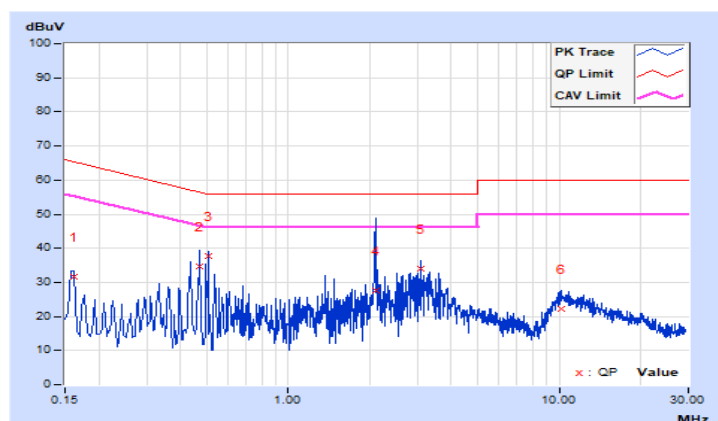


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin	Test Date	2021/6/25

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	10.10	24.35	15.37	34.45	25.47	65.58	55.58	-31.13	-30.11
2	0.50190	10.21	23.92	10.33	34.13	20.54	56.00	46.00	-21.87	-25.46
3	0.92809	10.27	20.84	9.71	31.11	19.98	56.00	46.00	-24.89	-26.02
4	1.37774	10.30	14.90	2.44	25.20	12.74	56.00	46.00	-30.80	-33.26
5	2.97302	10.37	24.23	7.19	34.60	17.56	56.00	46.00	-21.40	-28.44
6	3.31710	10.39	24.67	7.80	35.06	18.19	56.00	46.00	-20.94	-27.81

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

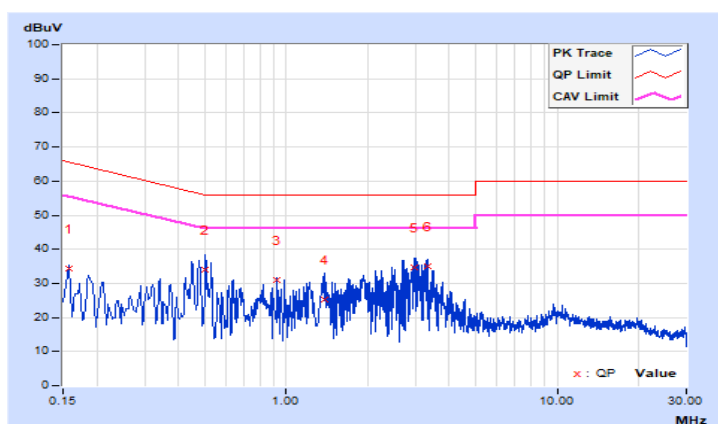


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	10.14	10.13	0.5	Pass
6	2437	10.13	10.14	0.5	Pass
11	2462	10.12	10.13	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.37	16.39	0.5	Pass
6	2437	16.38	16.40	0.5	Pass
11	2462	16.39	16.40	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.16	17.14	0.5	Pass
6	2437	17.30	17.32	0.5	Pass
11	2462	17.14	17.08	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.56	35.55	0.5	Pass
6	2437	35.55	35.57	0.5	Pass
9	2452	35.70	35.67	0.5	Pass

Spectrum Plot of Worst Value


802.11b

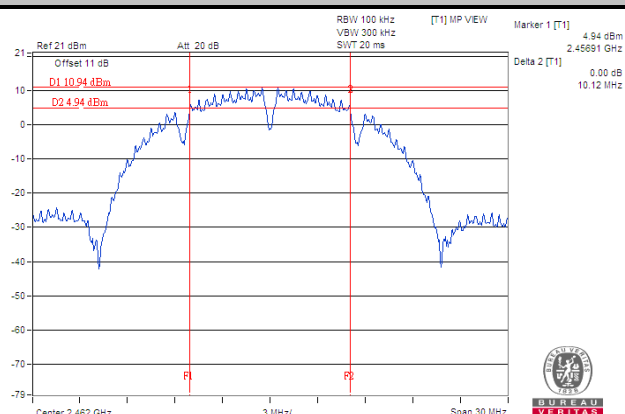


802.11g

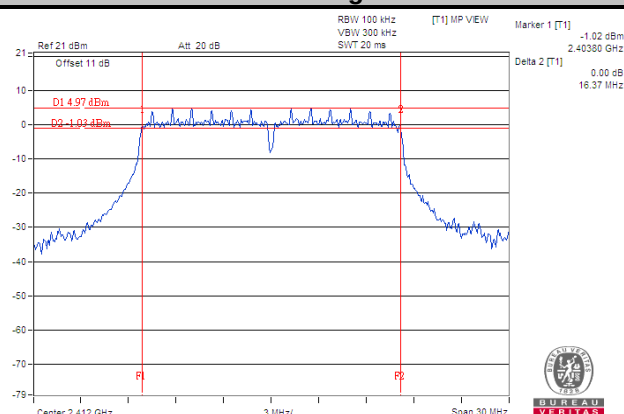

802.11n (HT20)

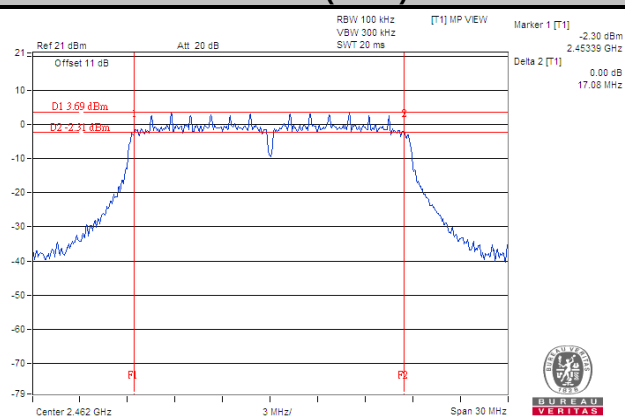


802.11n (HT40)

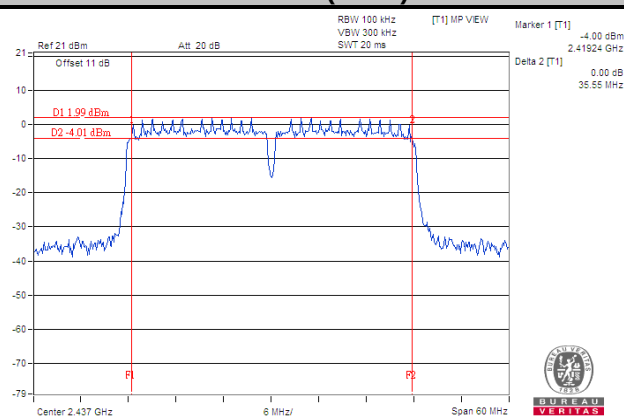

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	15.39	15.31	Pass
6	2437	16.20	16.20	Pass
11	2462	15.48	15.36	Pass

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	16.80	16.80	Pass
6	2437	23.40	23.28	Pass
11	2462	16.80	16.80	Pass

802.11n (HT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	17.88	17.76	Pass
6	2437	19.92	19.92	Pass
11	2462	17.88	17.76	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
3	2422	36.00	36.00	Pass
6	2437	36.00	36.00	Pass
9	2452	36.00	36.00	Pass

Spectrum Plot of Worst Value


802.11b

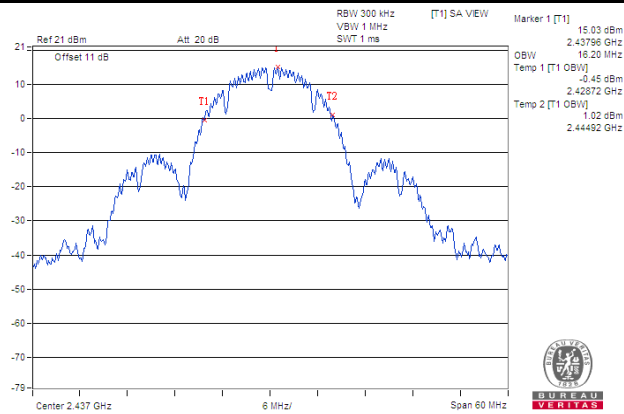


802.11g

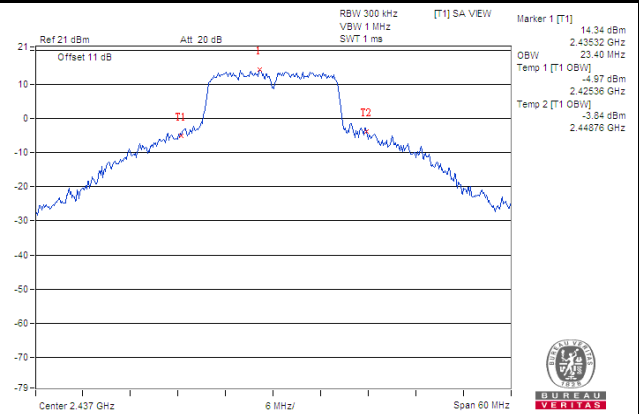

802.11n (HT20)

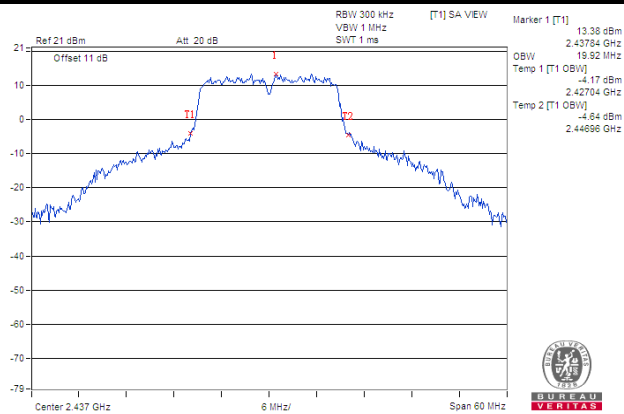

802.11n (HT40)

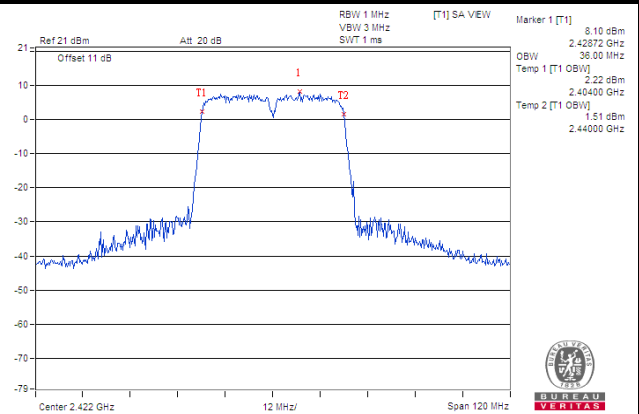

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20 MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.72	20.02	194.218	22.88	30	Pass
6	2437	24.15	25.56	619.765	27.92	30	Pass
11	2462	20.62	21.33	251.177	24.00	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.34	16.56	88.342	19.46	30	Pass
6	2437	22.94	23.36	413.559	26.17	30	Pass
11	2462	15.73	15.84	75.782	18.80	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	14.93	15.23	64.46	18.09	30	Pass
6	2437	21.96	22.03	316.624	25.01	30	Pass
11	2462	14.67	15.02	61.078	17.86	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	14.05	14.23	51.895	17.15	30	Pass
6	2437	16.21	16.42	85.636	19.33	30	Pass
9	2452	13.74	14.05	49.069	16.91	30	Pass

Beamforming Mode

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	11.92	12.22	32.232	15.08	28.19	Pass
6	2437	18.95	19.02	158.323	22.00	28.19	Pass
11	2462	11.66	12.01	30.541	14.85	28.19	Pass

NOTE:

- Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.81 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $30 - (7.81 - 6) = 28.19 \text{ dBm}$.

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	11.04	11.22	25.949	14.14	28.19	Pass
6	2437	13.20	13.41	42.821	16.32	28.19	Pass
9	2452	10.73	11.04	24.536	13.90	28.19	Pass

NOTE:


- Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.81 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $30 - (7.81 - 6) = 28.19 \text{ dBm}$.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

For Average Power (Duty cycle $\geq 98\%$)

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle < 98%)

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e. Set VBW $\geq 3 \times \text{RBW}$.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to “free run”.
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.
- l. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11b

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-13.71	3.01	-10.7	6.19	Pass
	6	2437	-9.83	3.01	-6.82	6.19	Pass
	11	2462	-13.71	3.01	-10.7	6.19	Pass
1	1	2412	-15.9	3.01	-12.89	6.19	Pass
	6	2437	-12.19	3.01	-9.18	6.19	Pass
	11	2462	-13.51	3.01	-10.5	6.19	Pass

NOTE:

- Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.81 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $8 - (7.81 - 6) = 6.19 \text{ dBm}$.
- Method 2) C) of power density measurement of KDB 662911 is using for calculating total power density.

802.11g

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-20.17	3.01	0.29	-16.87	6.19	Pass
	6	2437	-13.76	3.01	0.29	-10.46	6.19	Pass
	11	2462	-19.68	3.01	0.29	-16.38	6.19	Pass
1	1	2412	-21.66	3.01	0.29	-18.36	6.19	Pass
	6	2437	-11.47	3.01	0.29	-8.17	6.19	Pass
	11	2462	-21.26	3.01	0.29	-17.96	6.19	Pass

NOTE:

- Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.81 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $8 - (7.81 - 6) = 6.19 \text{ dBm}$.
- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

802.11n (HT20)

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-22.15	3.01	0.22	-18.92	6.19	Pass
	6	2437	-15.96	3.01	0.22	-12.73	6.19	Pass
	11	2462	-22.25	3.01	0.22	-19.02	6.19	Pass
1	1	2412	-19.31	3.01	0.22	-16.08	6.19	Pass
	6	2437	-16.58	3.01	0.22	-13.35	6.19	Pass
	11	2462	-22.42	3.01	0.22	-19.19	6.19	Pass

NOTE:

- Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.81 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $8 - (7.81 - 6) = 6.19 \text{ dBm}$.
- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

802.11n (HT40)


TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-24.73	3.01	1	-20.72	6.19	Pass
	6	2437	-19.99	3.01	1	-15.98	6.19	Pass
	9	2452	-25.03	3.01	1	-21.02	6.19	Pass
1	3	2422	-22.89	3.01	1	-18.88	6.19	Pass
	6	2437	-19.58	3.01	1	-15.57	6.19	Pass
	9	2452	-23.69	3.01	1	-19.68	6.19	Pass

NOTE:


- Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.81 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $8 - (7.81 - 6) = 6.19 \text{ dBm}$.
- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

Spectrum Plot of Worst Value


802.11b

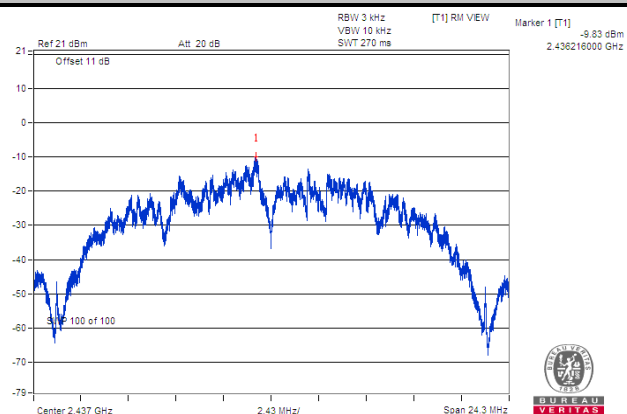


802.11g

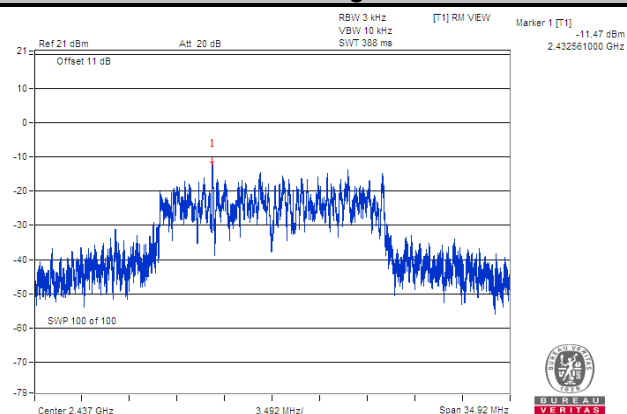

802.11n (HT20)

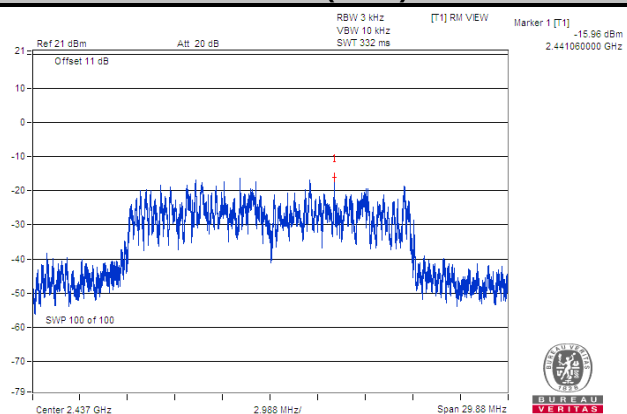

802.11n (HT40)

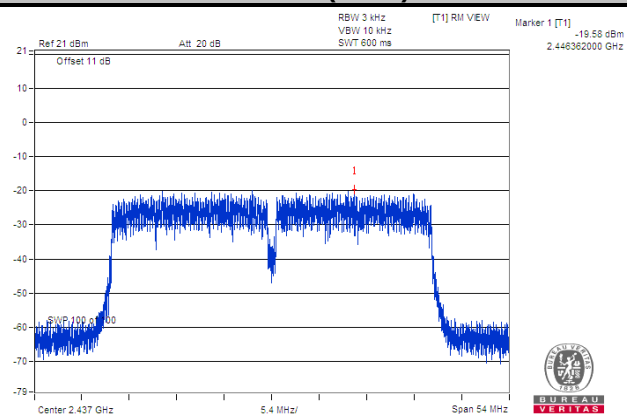


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.7.7 Test Results


The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 30 dB offset below D1. It shows compliance with the requirement.

802.11b



CHAIN 0

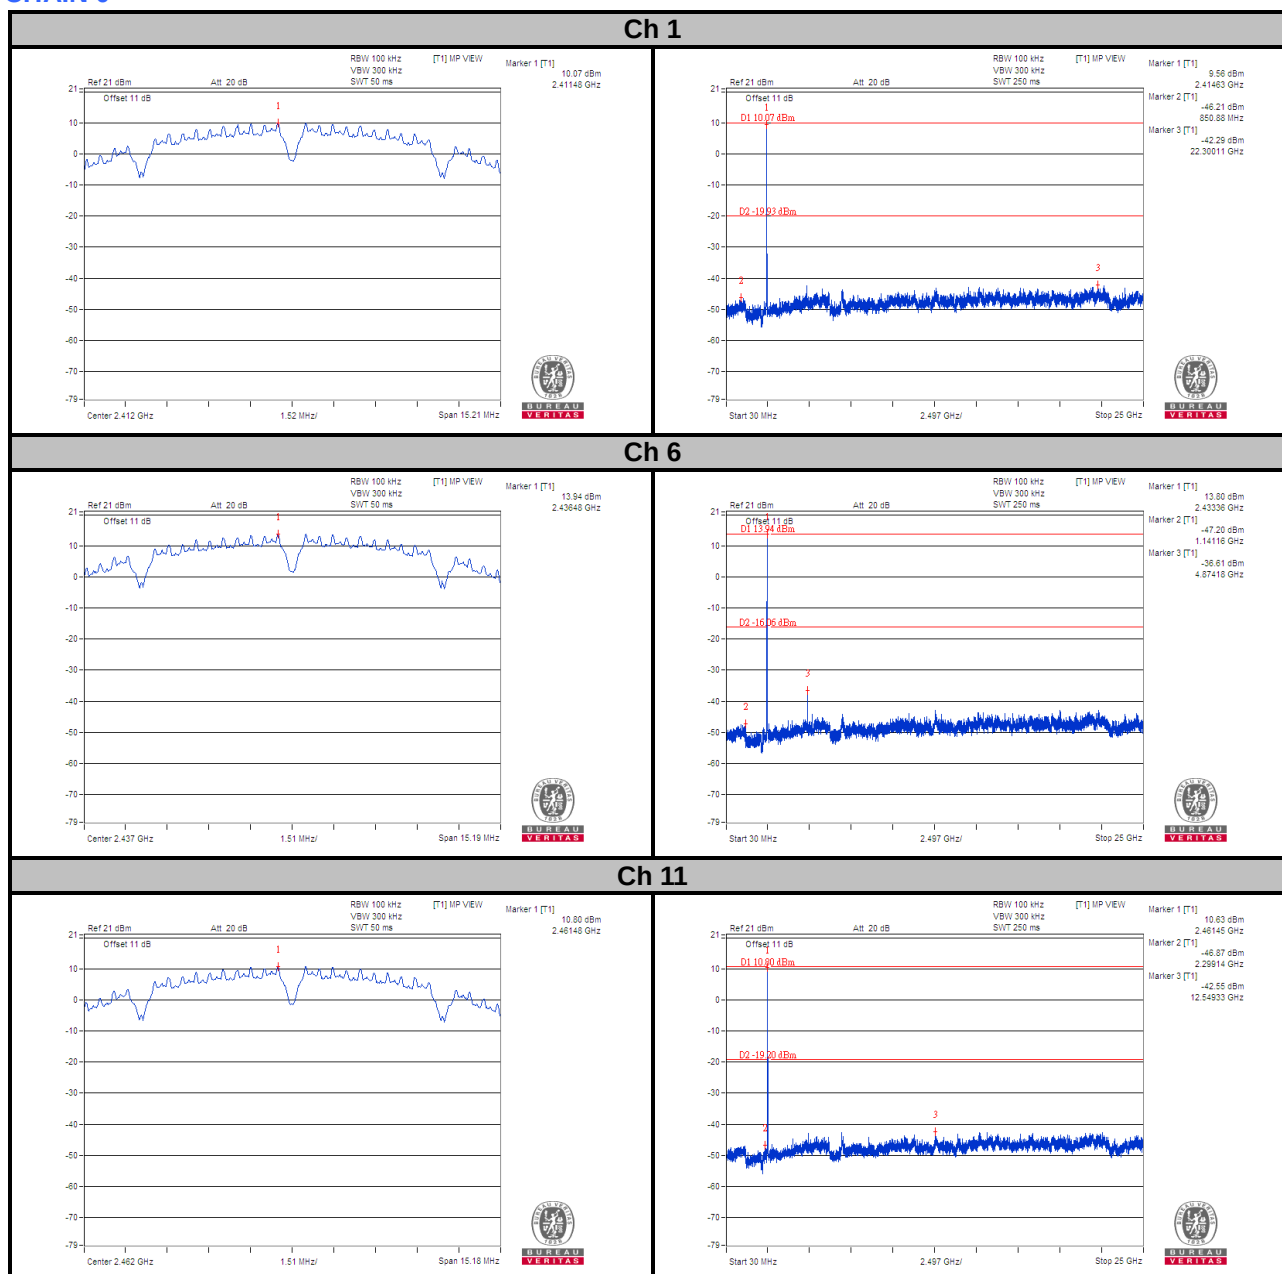


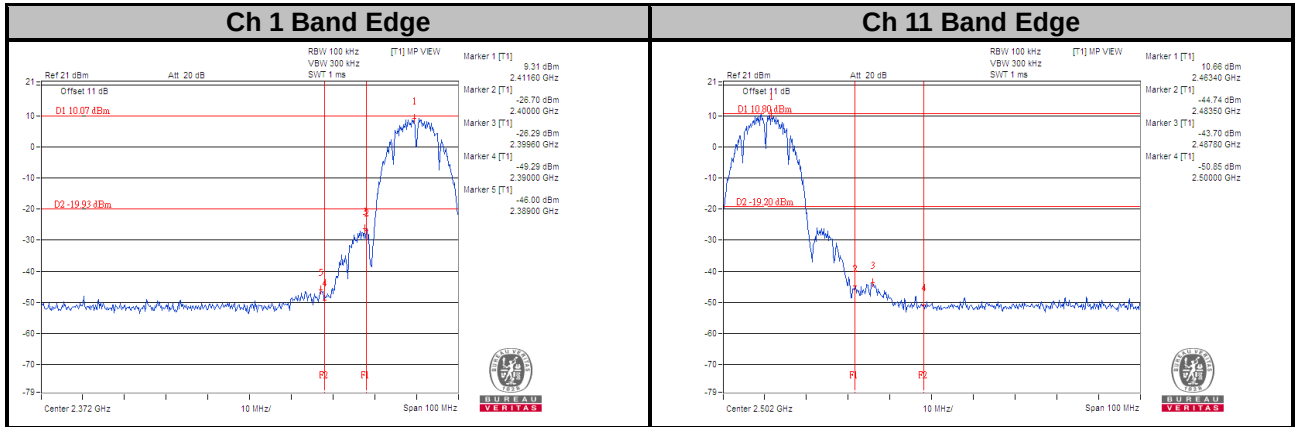


CHAIN 1



Ch 1

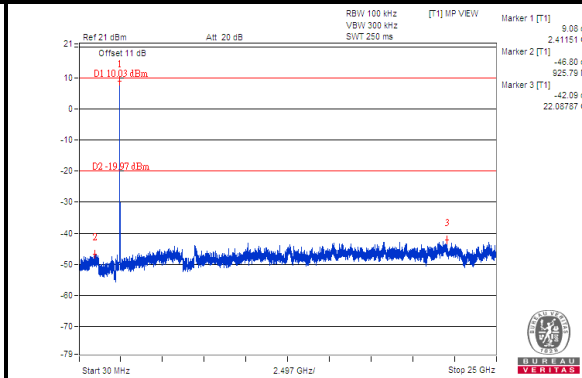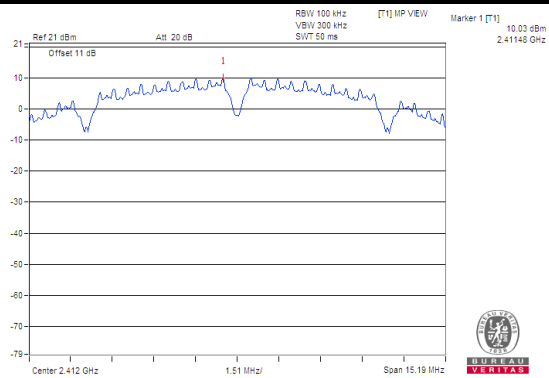


Ch 6

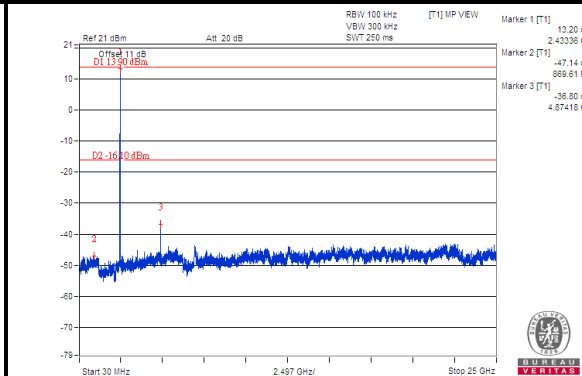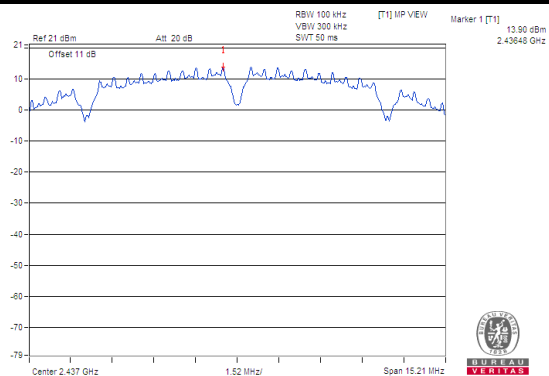


Ch 11

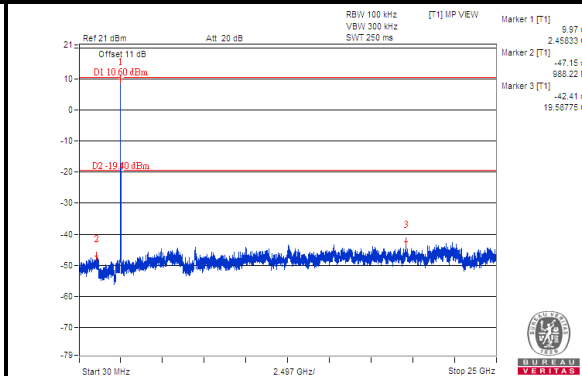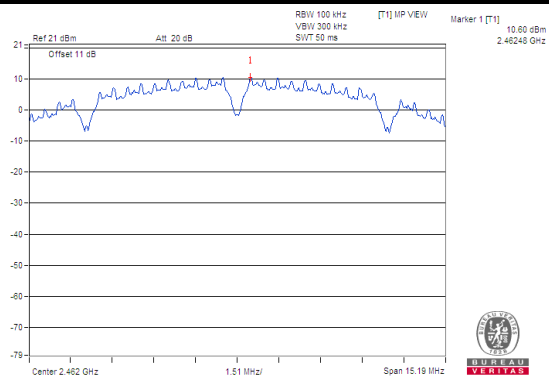


Ch 1 Band Edge

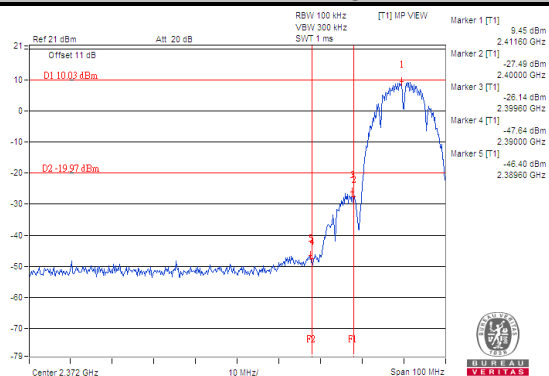


Ch 11 Band Edge

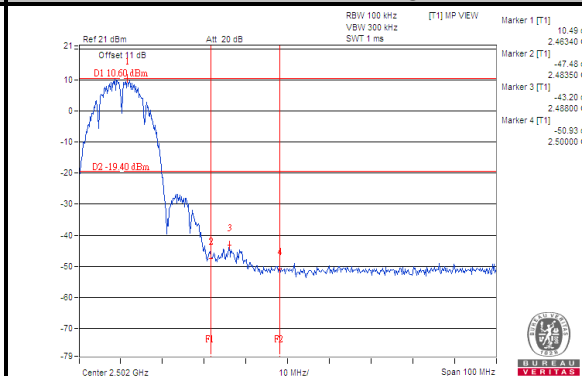

802.11g CHAIN 0

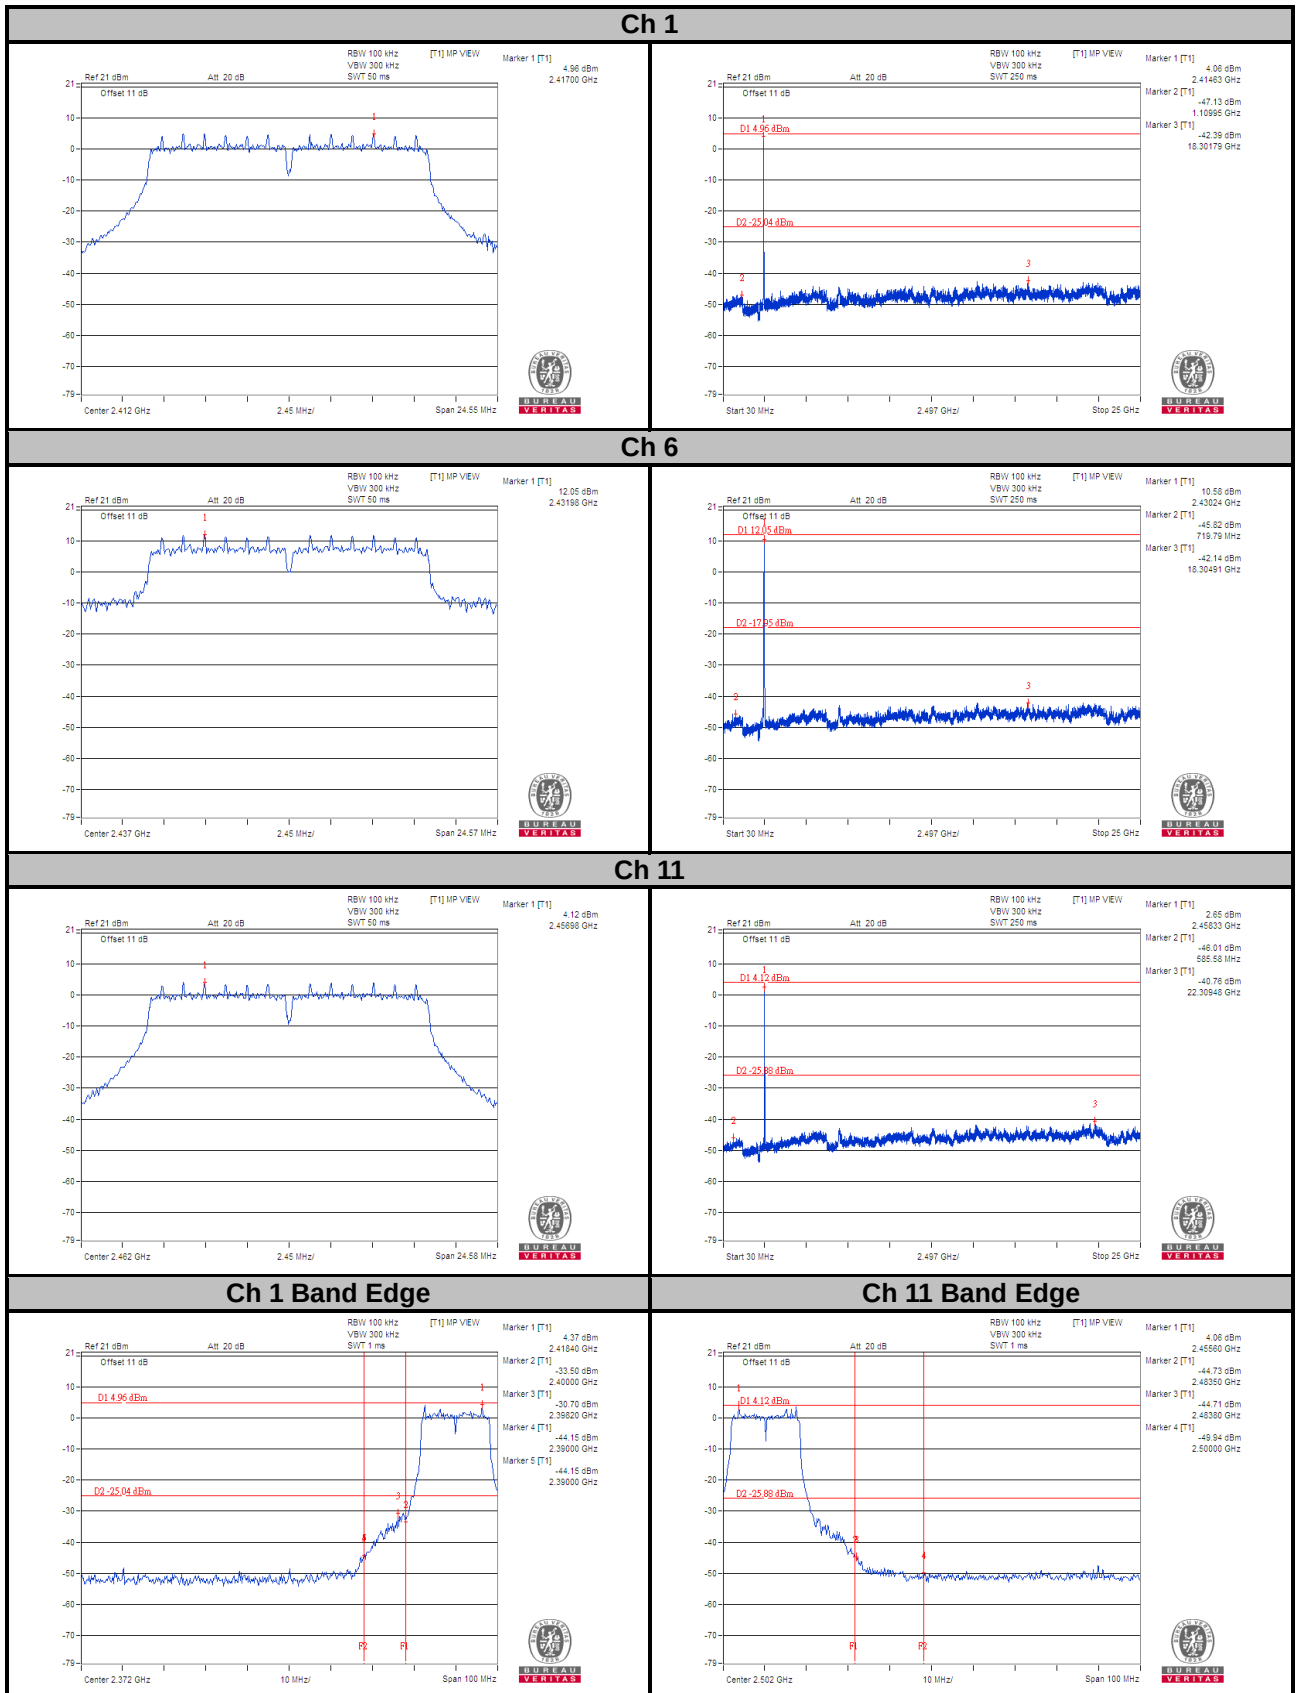


CHAIN 1

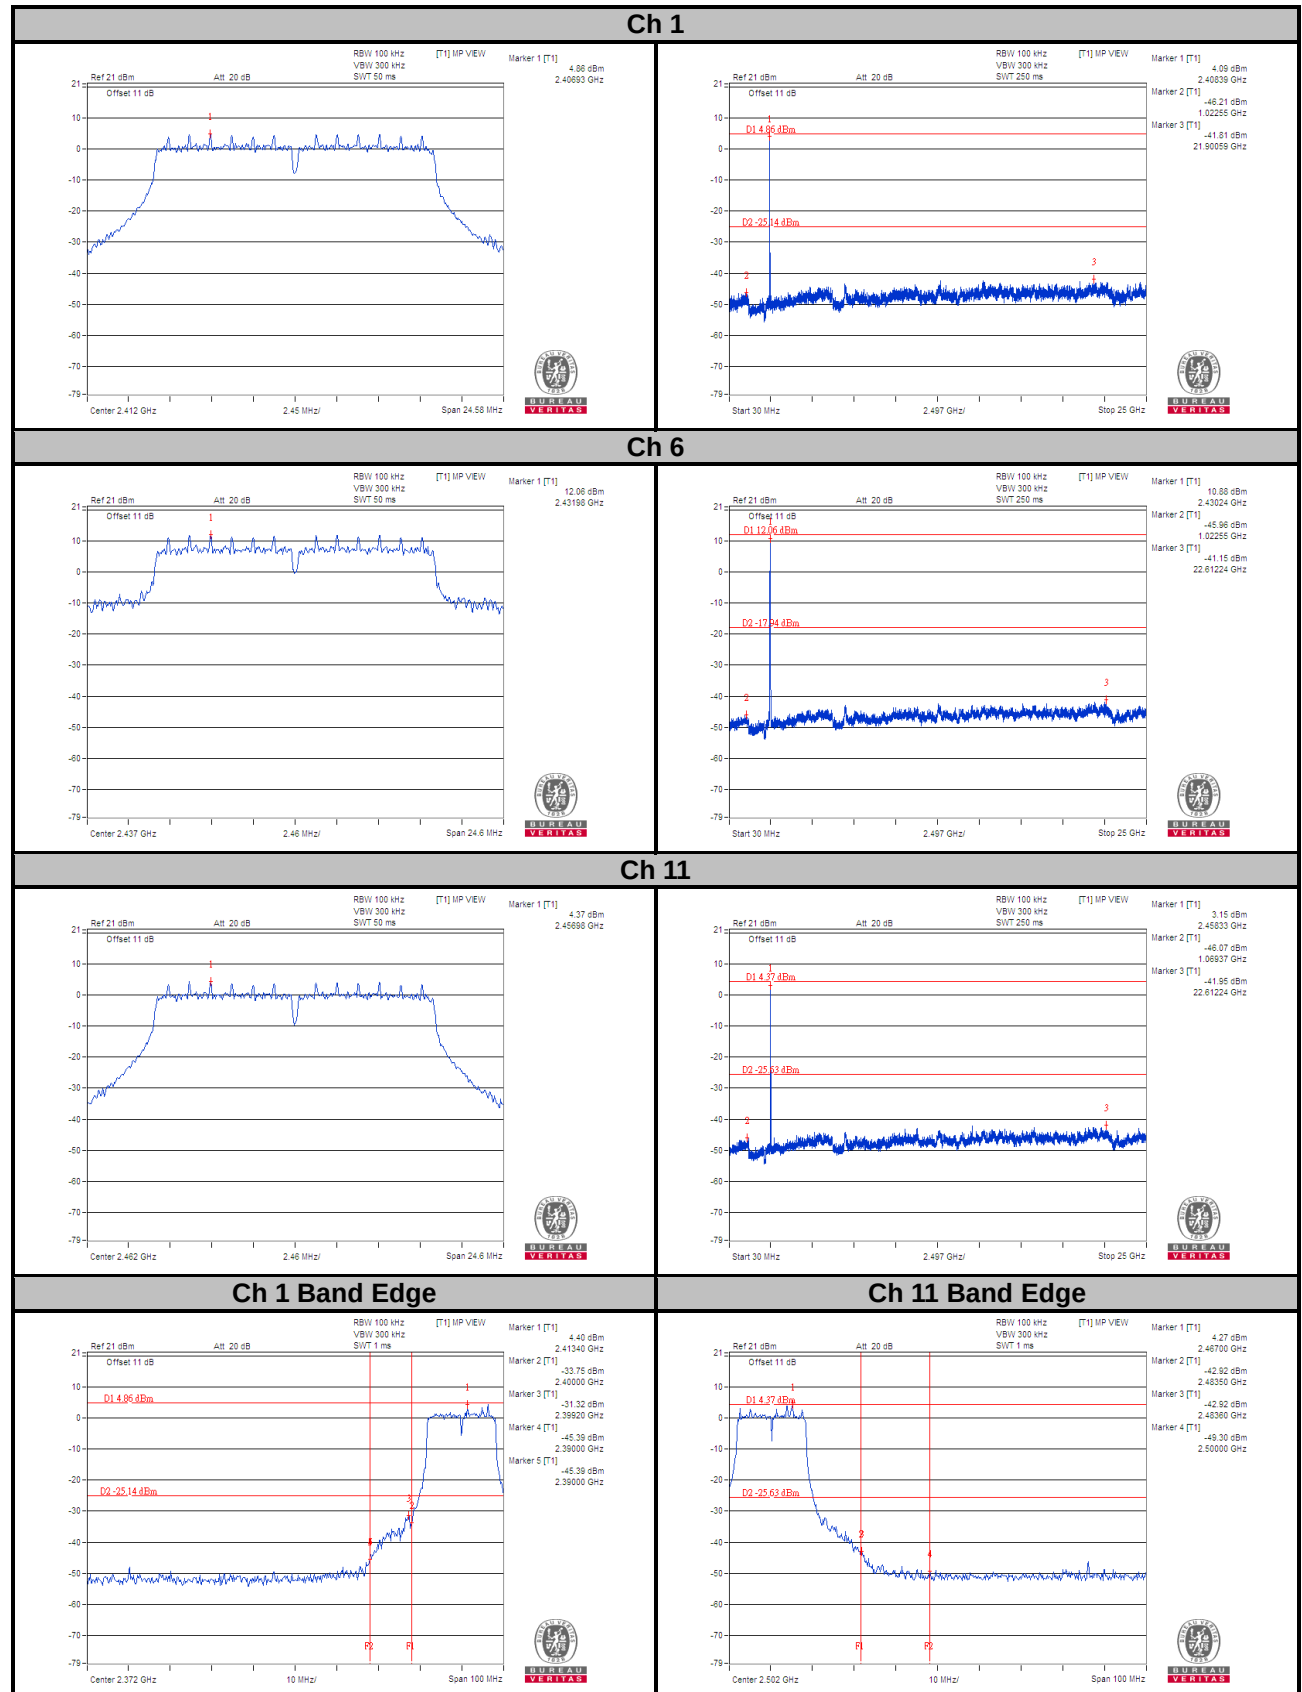



802.11n (HT20)

CHAIN 0


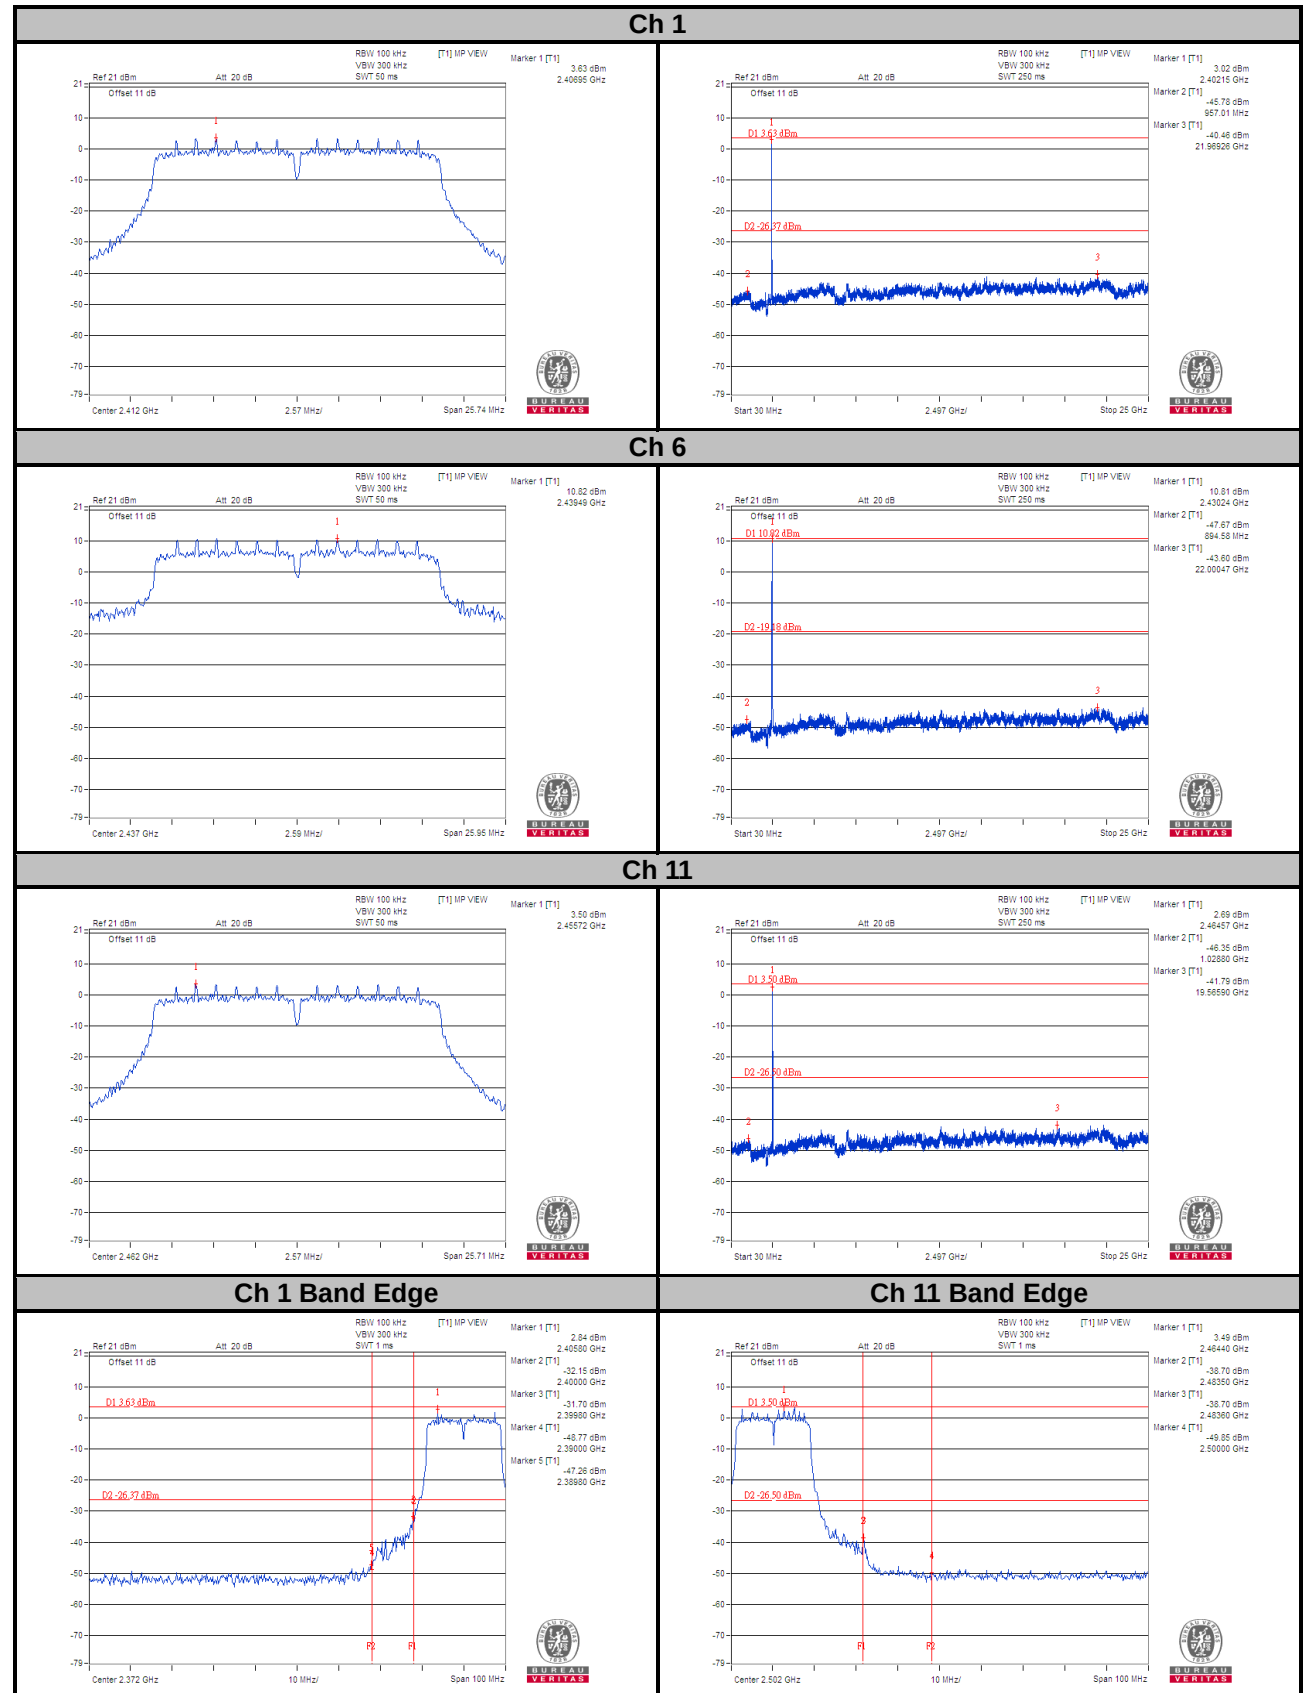


CHAIN 1



Ch 1

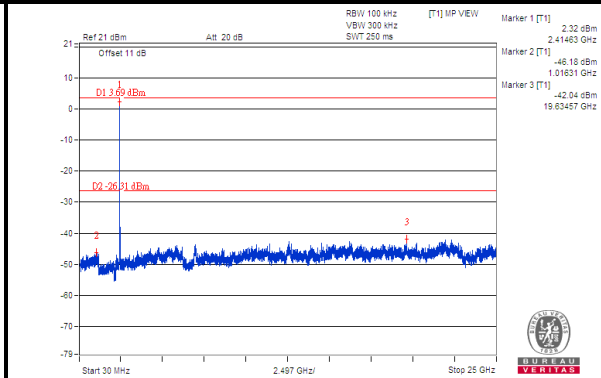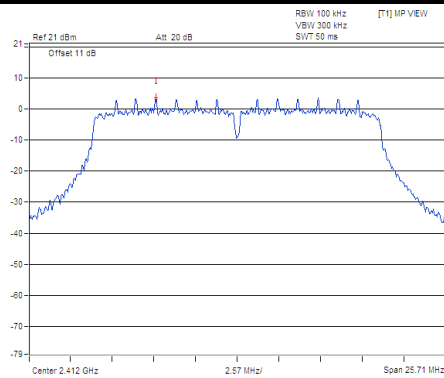


Ch 6

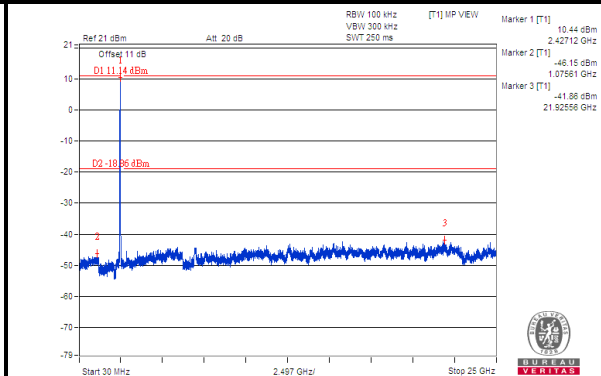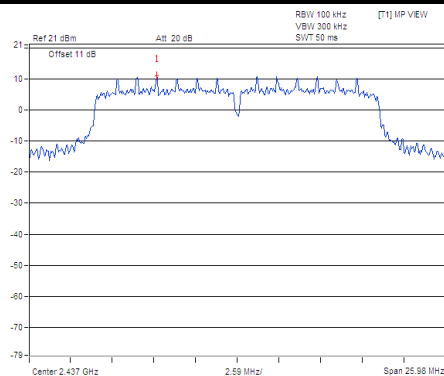


Ch 11

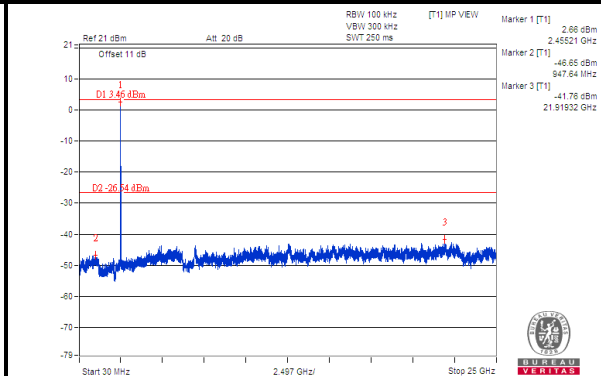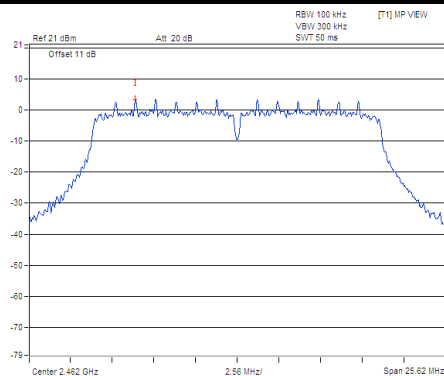

Ch 1 Band Edge

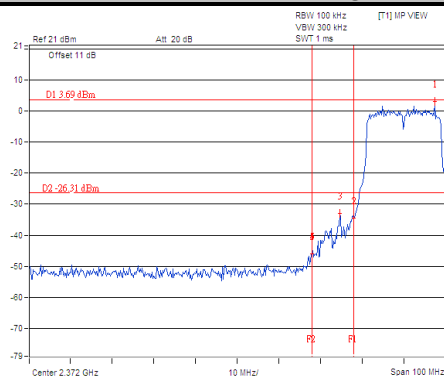


Ch 11 Band Edge

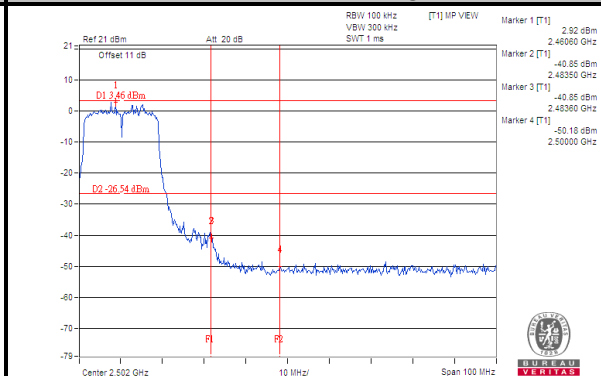



802.11n (HT40)

CHAIN 0


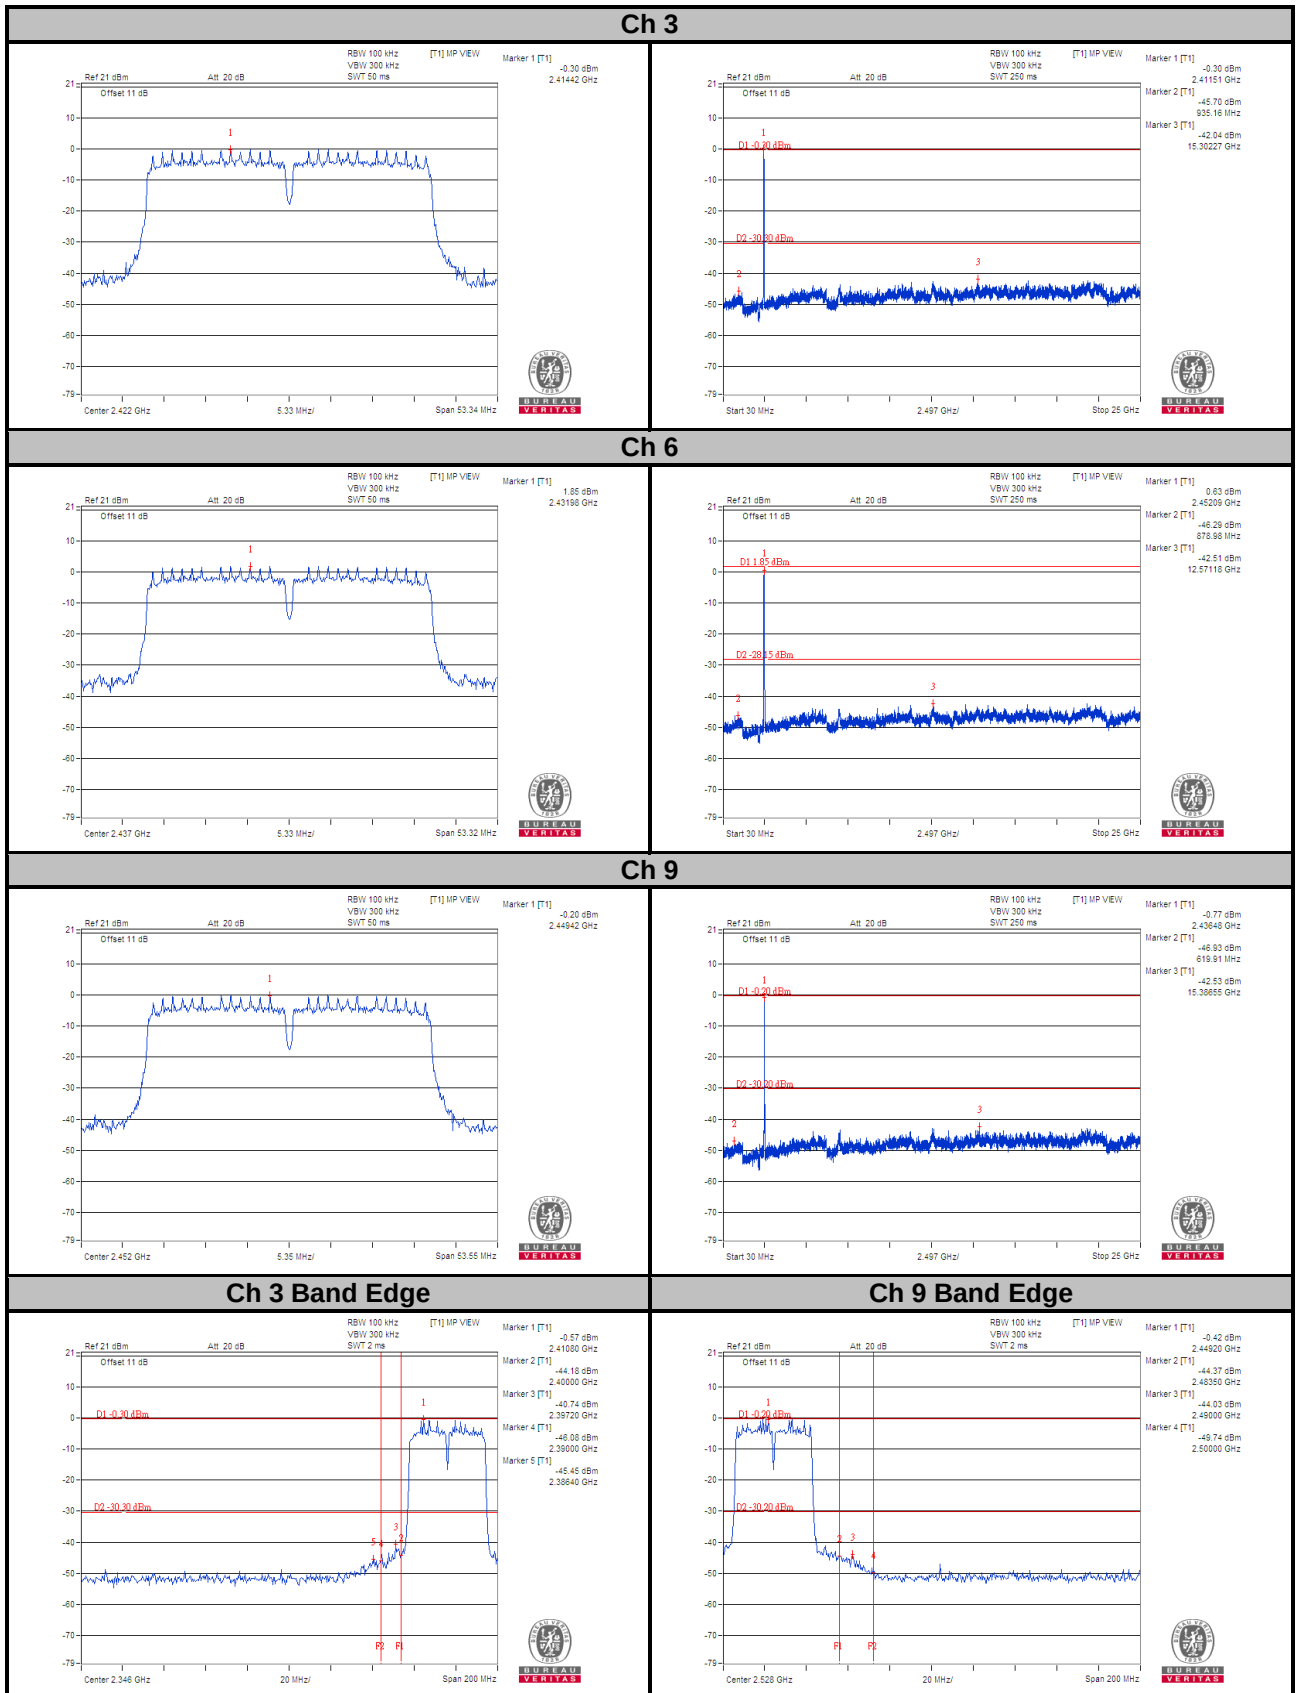


CHAIN 1



Ch 3

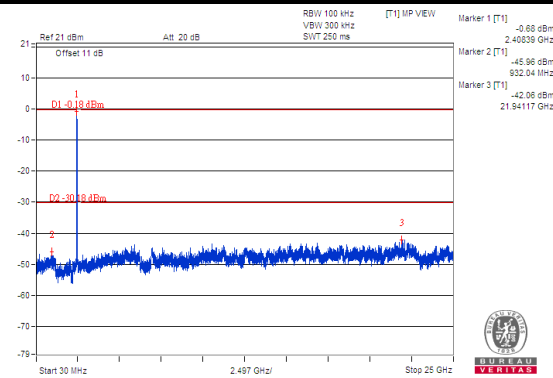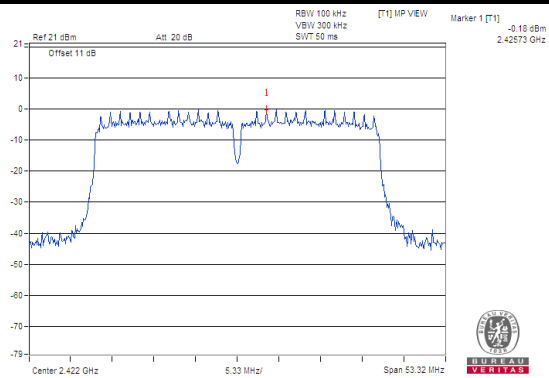


Ch 6

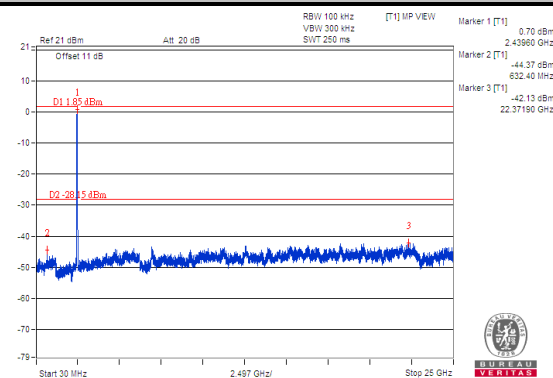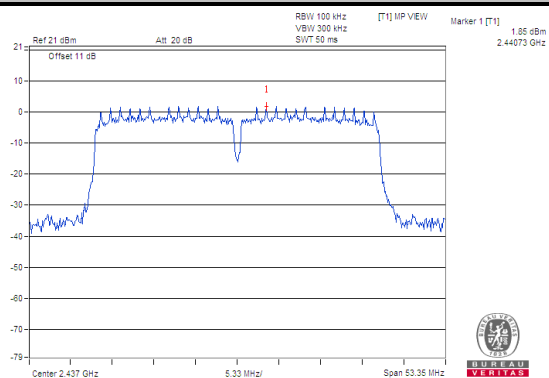


Ch 9

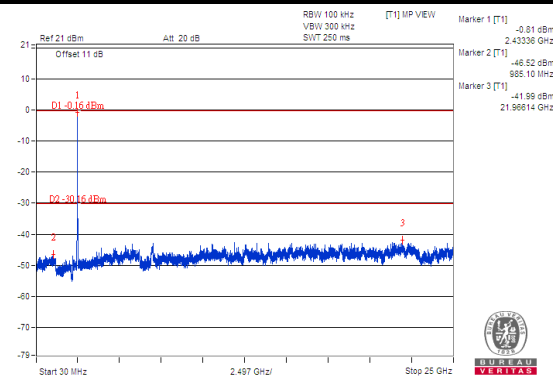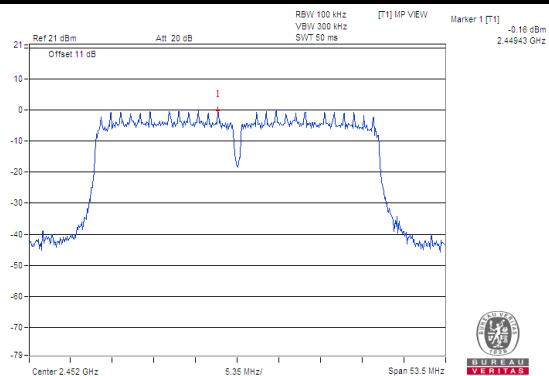

Ch 3 Band Edge

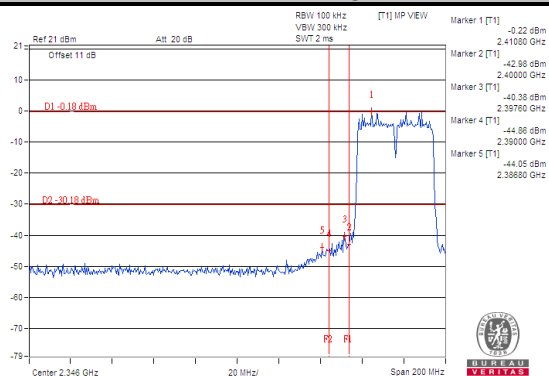

Ch 9 Band Edge

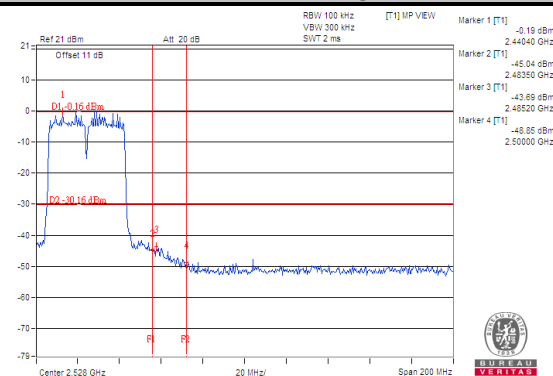



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).


Annex A- Band Edge Measurement


802.11b

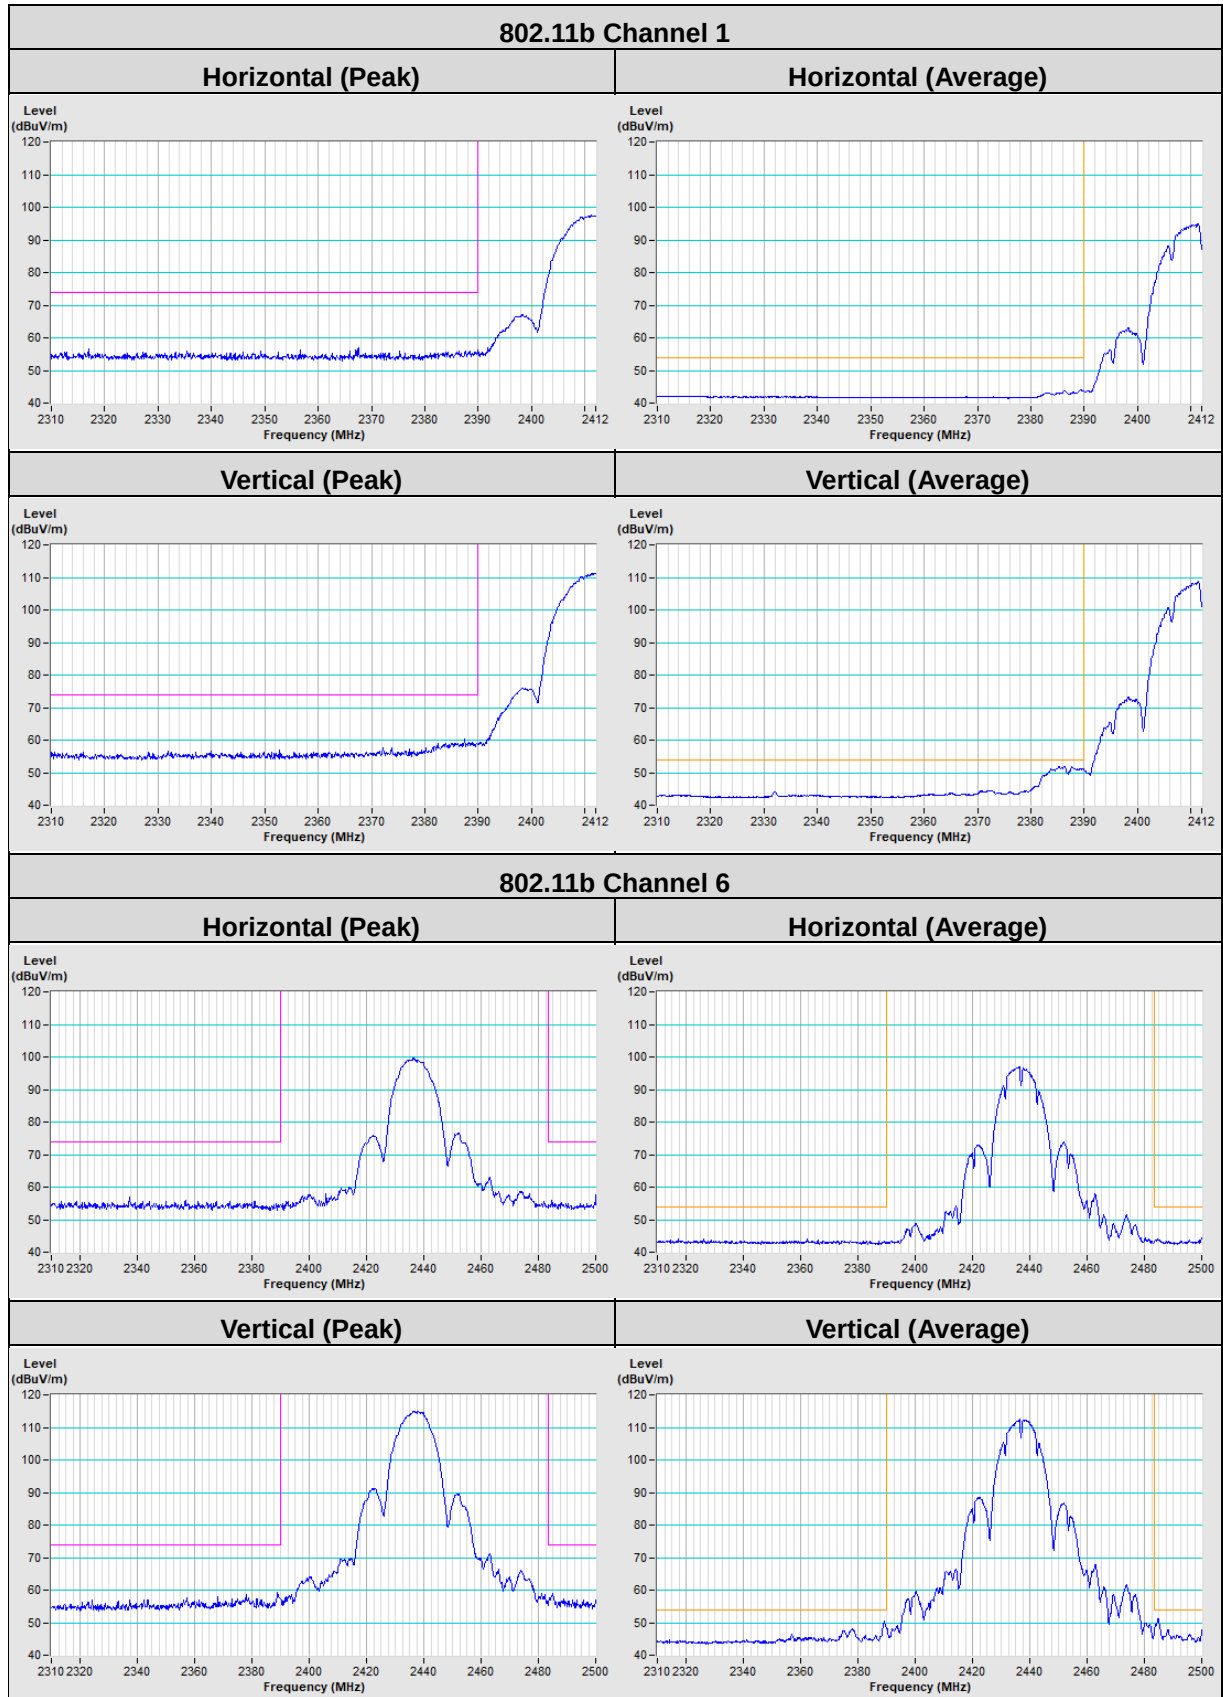

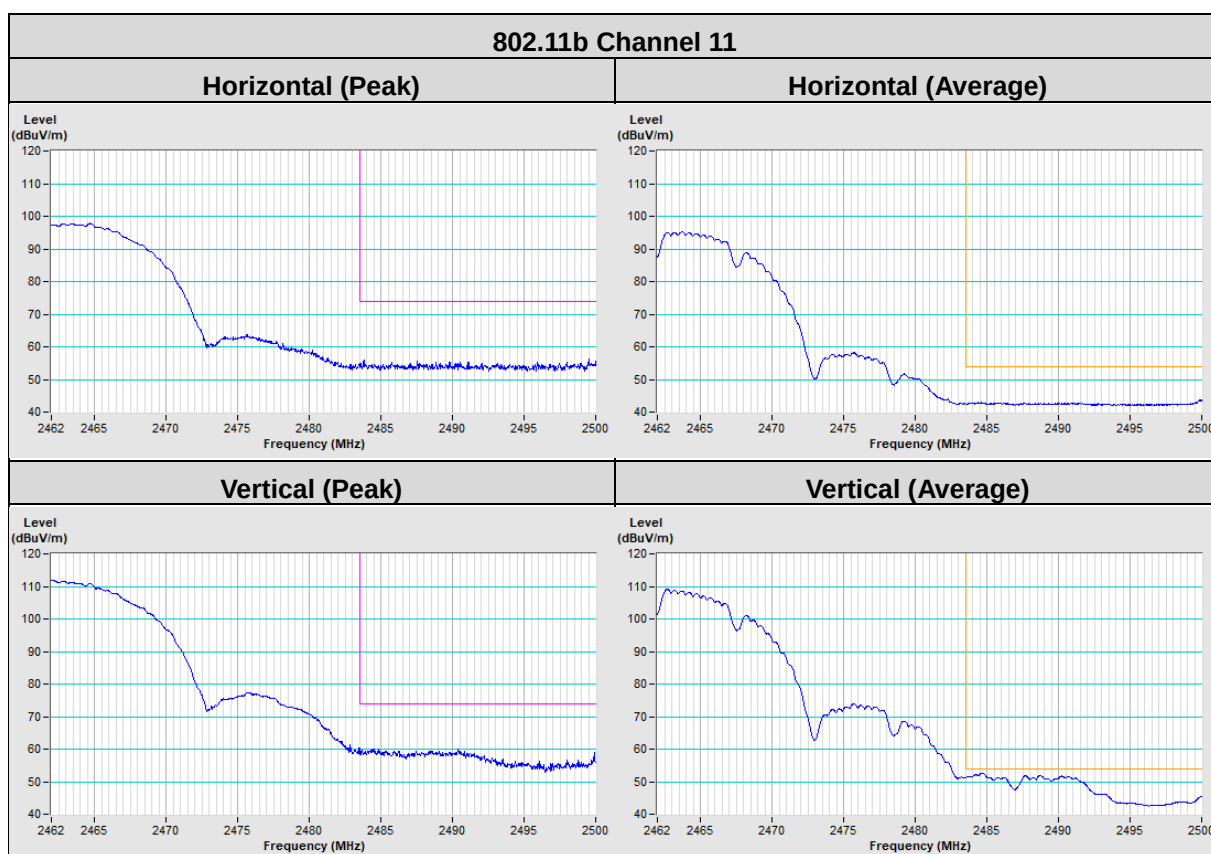


802.11g

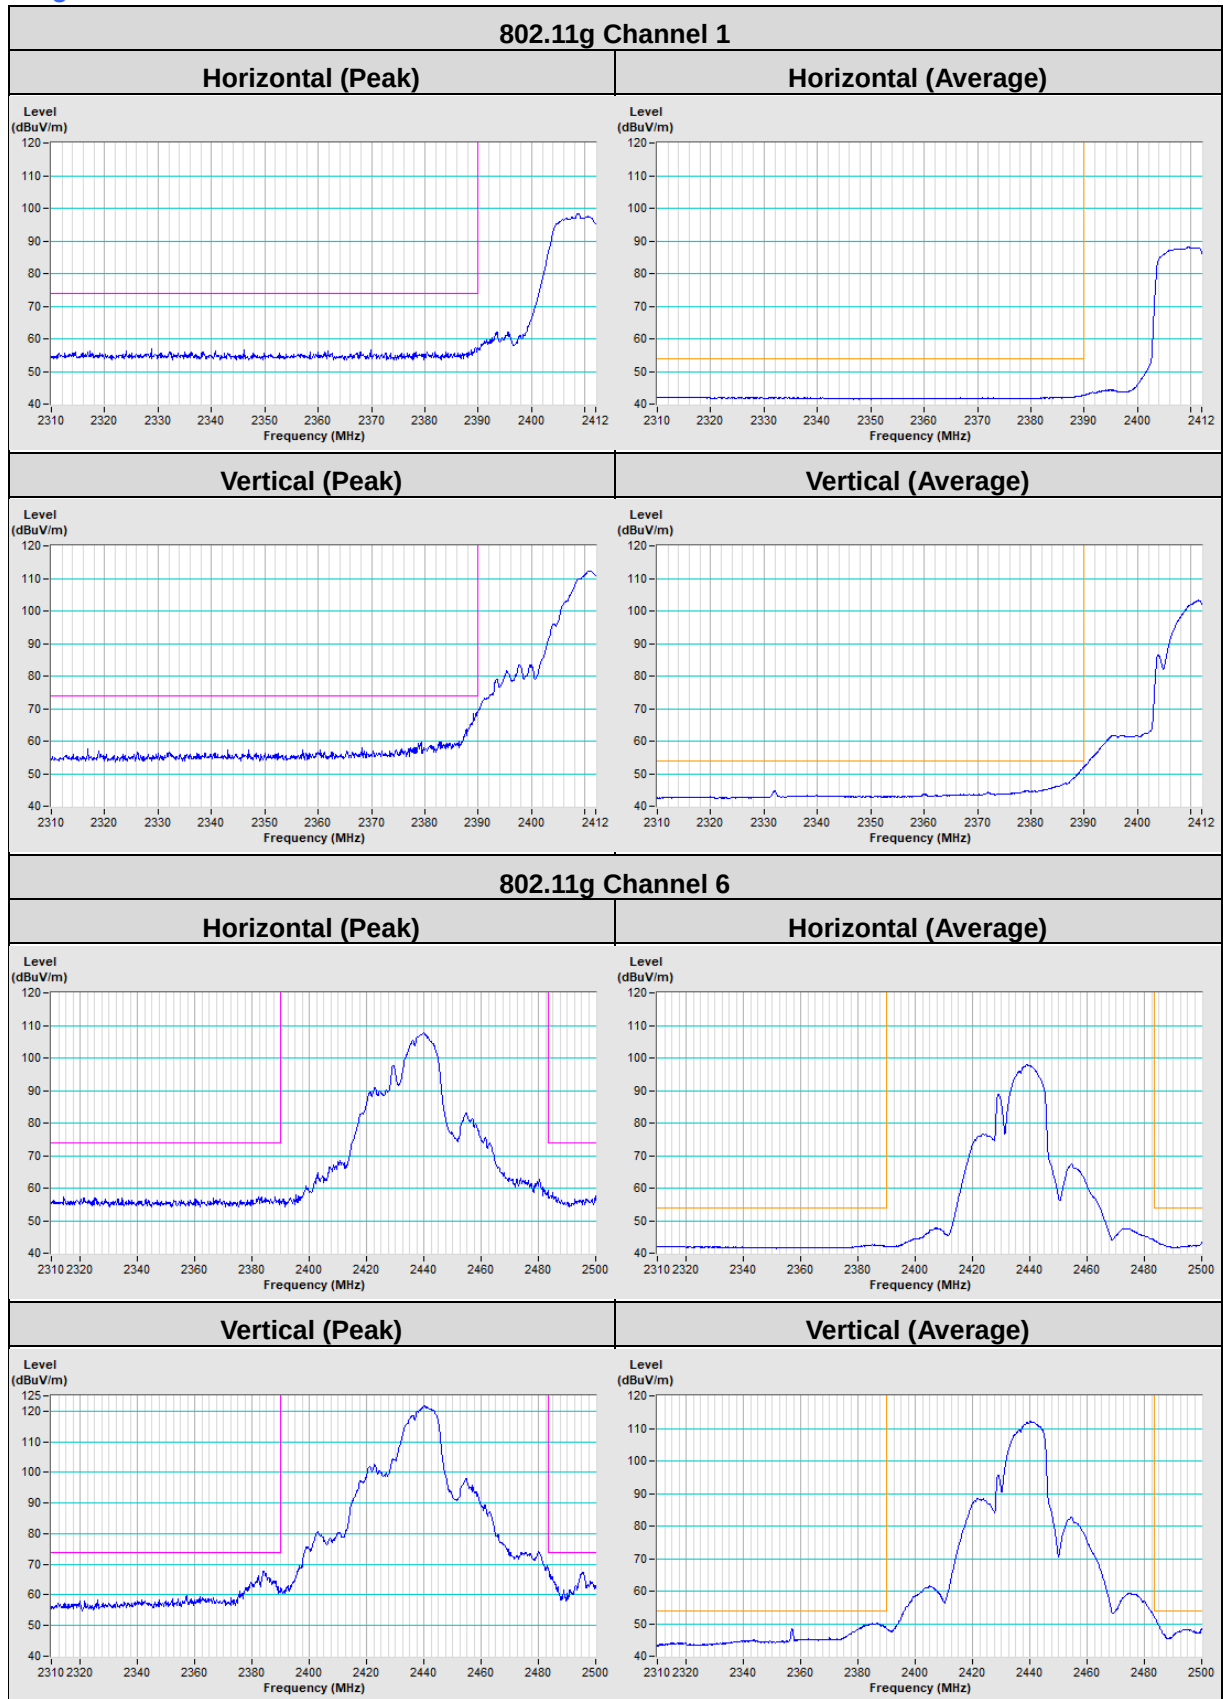

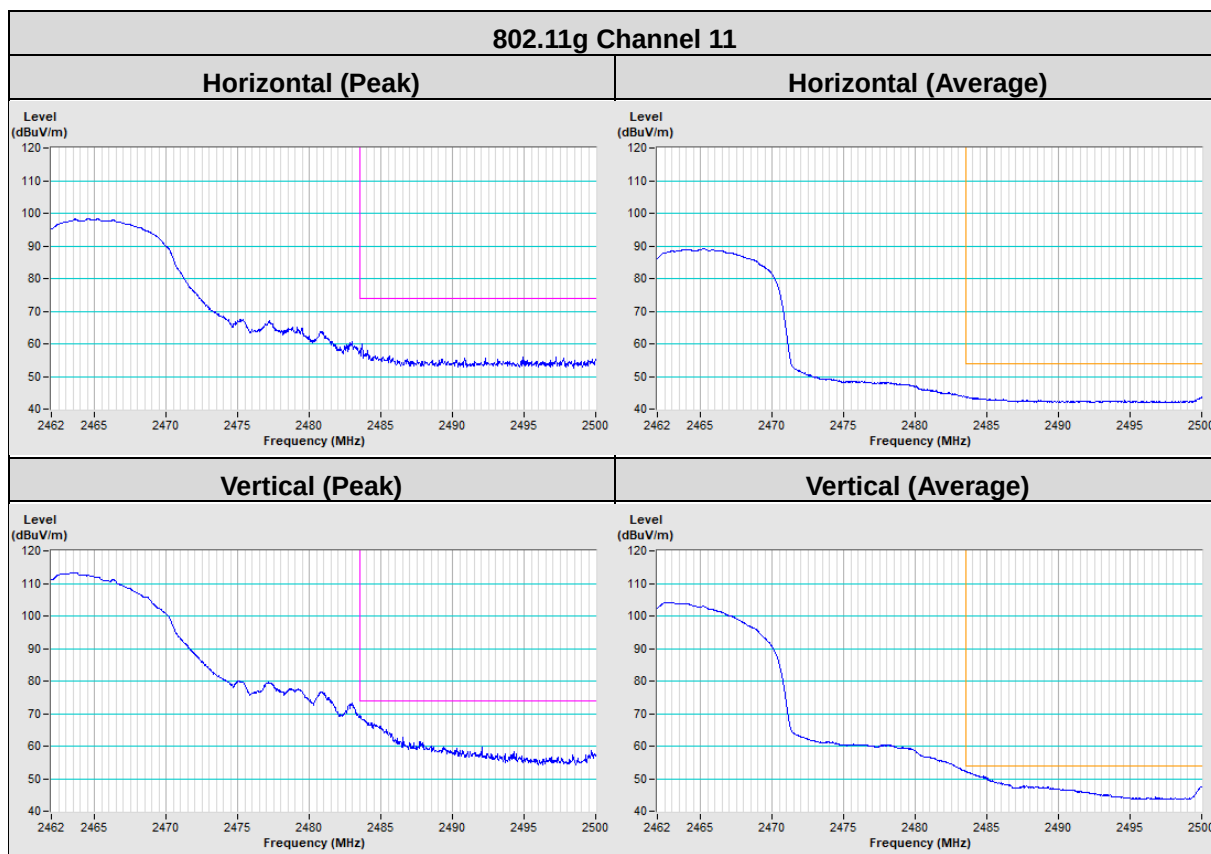


802.11n (HT20)

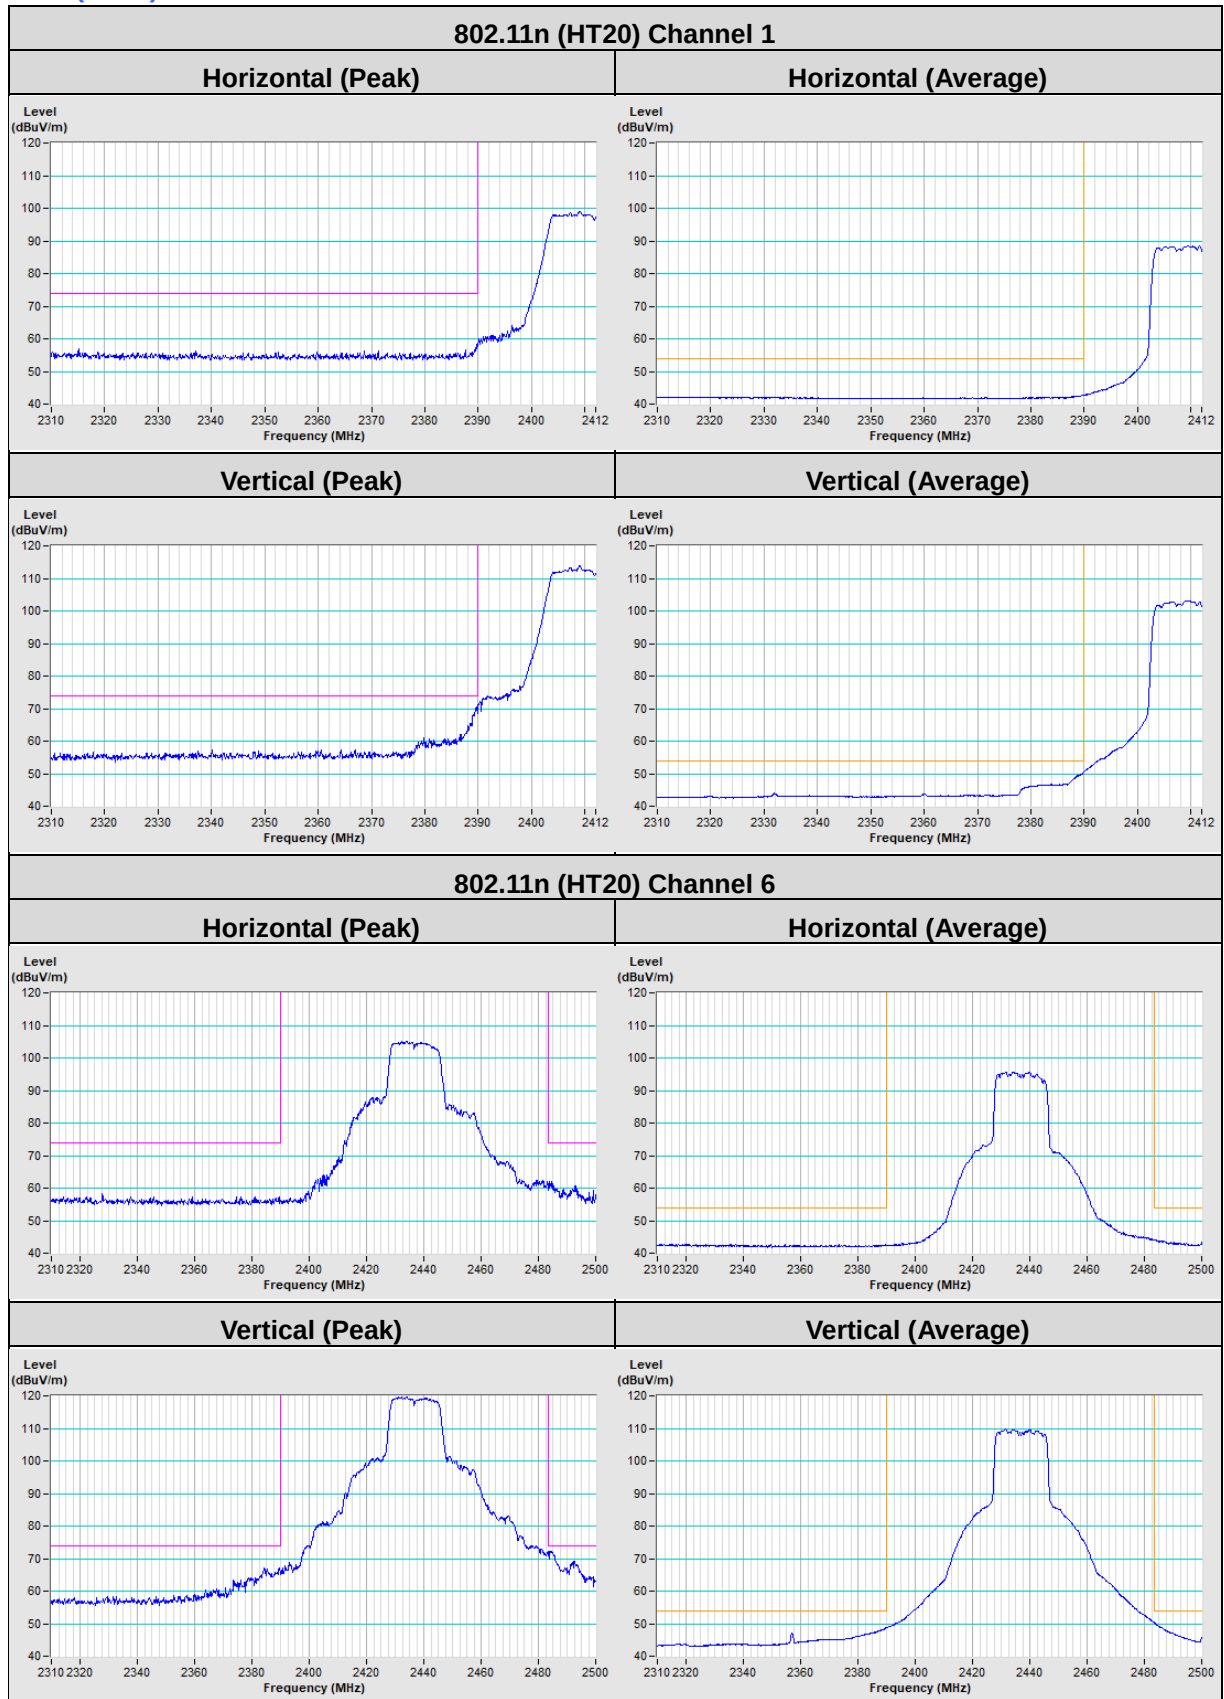


802.11n (HT20) Channel 11


Horizontal (Peak)

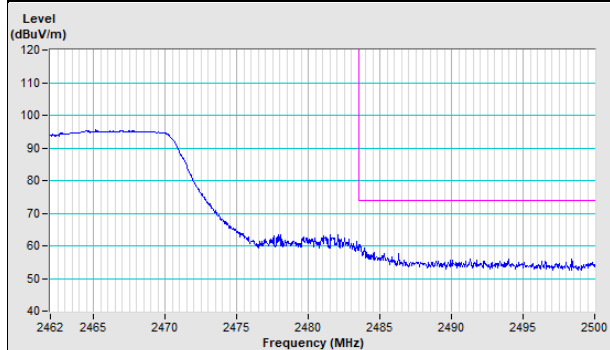


Horizontal (Average)

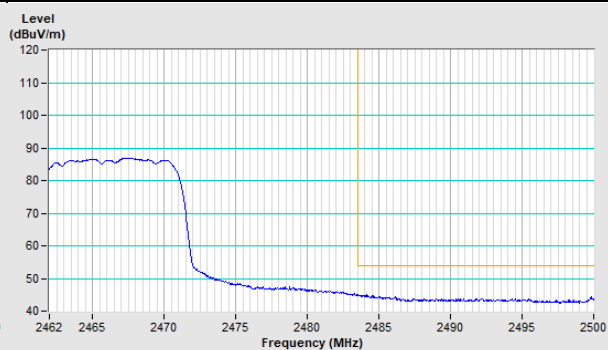


Vertical (Peak)

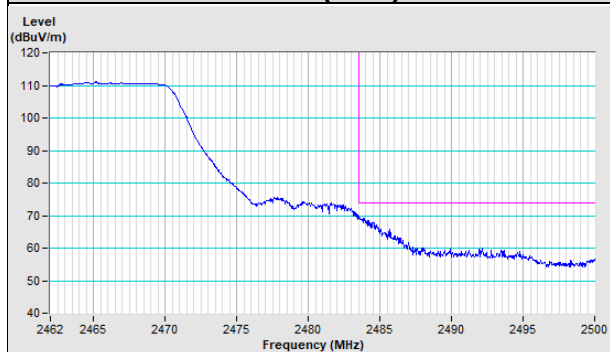


Vertical (Average)

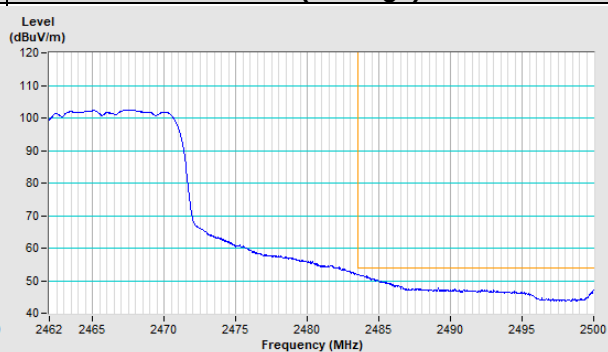

802.11n (HT40)

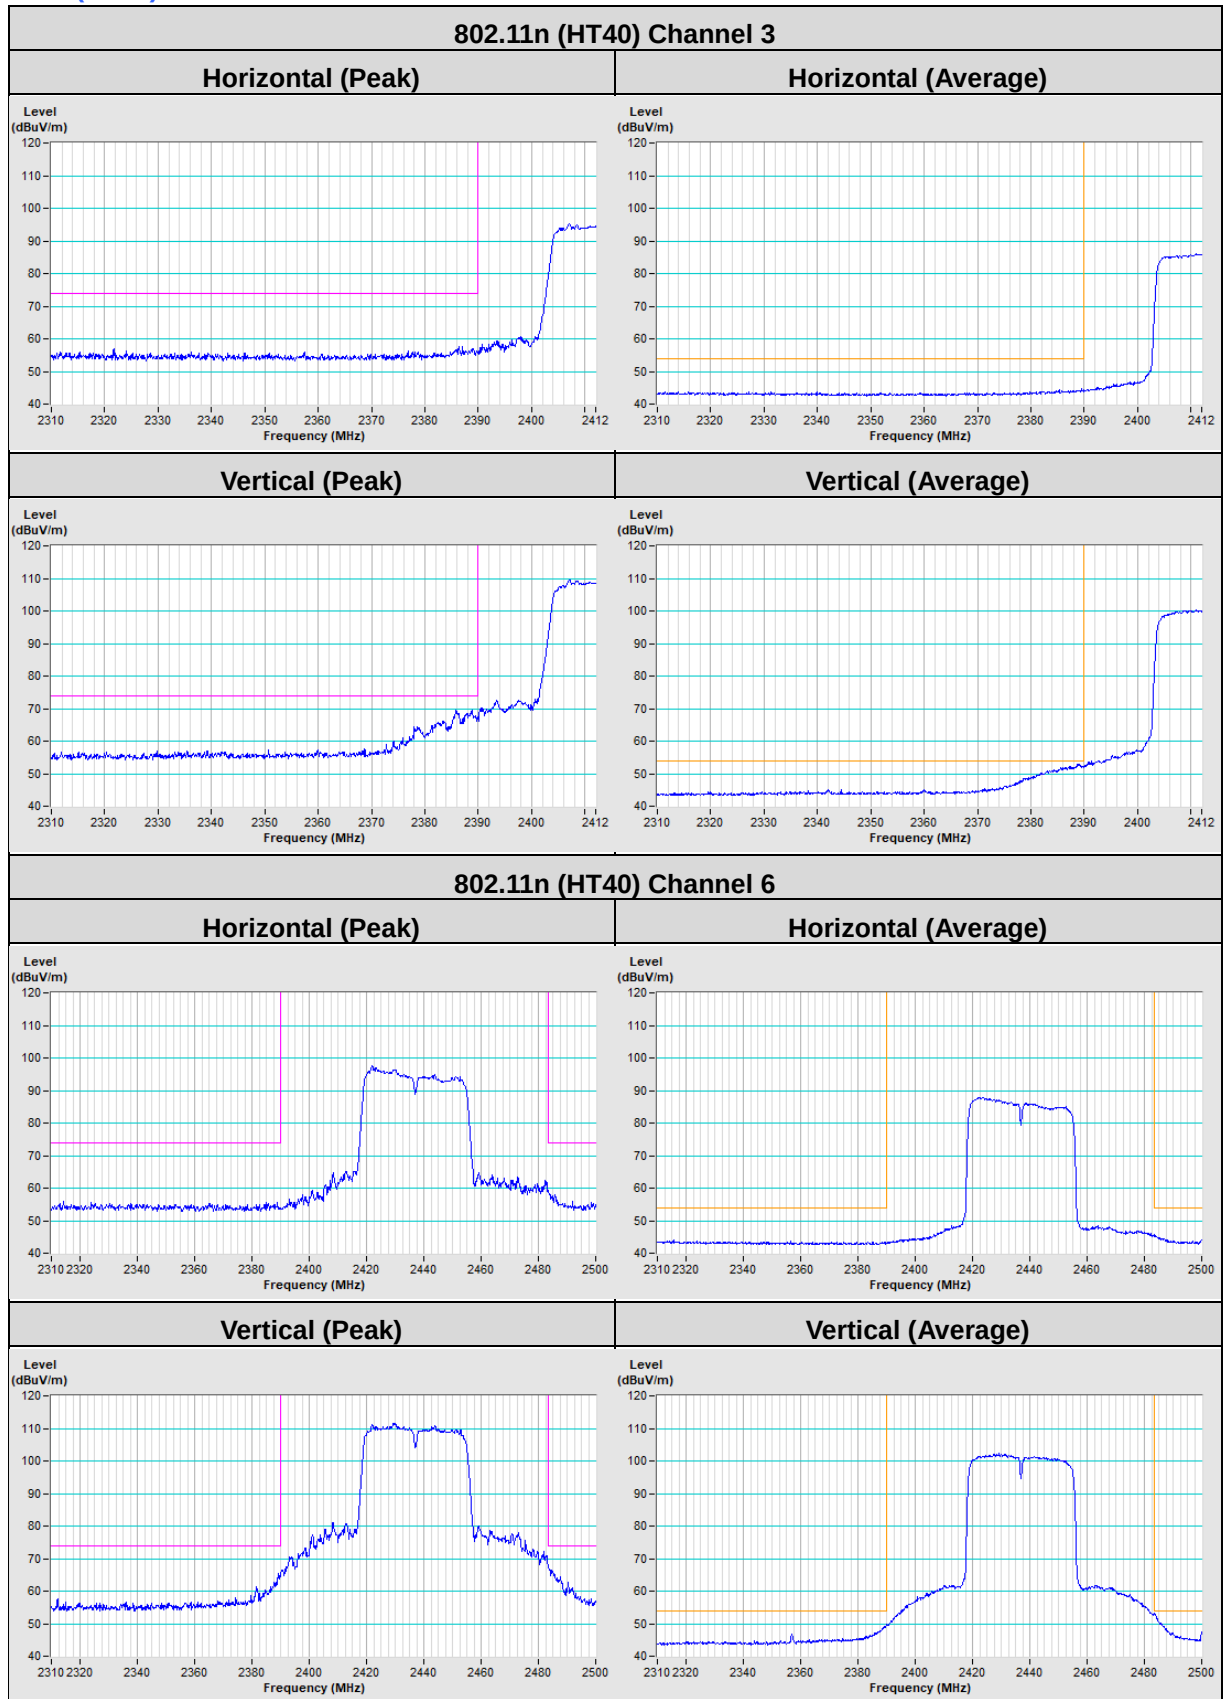

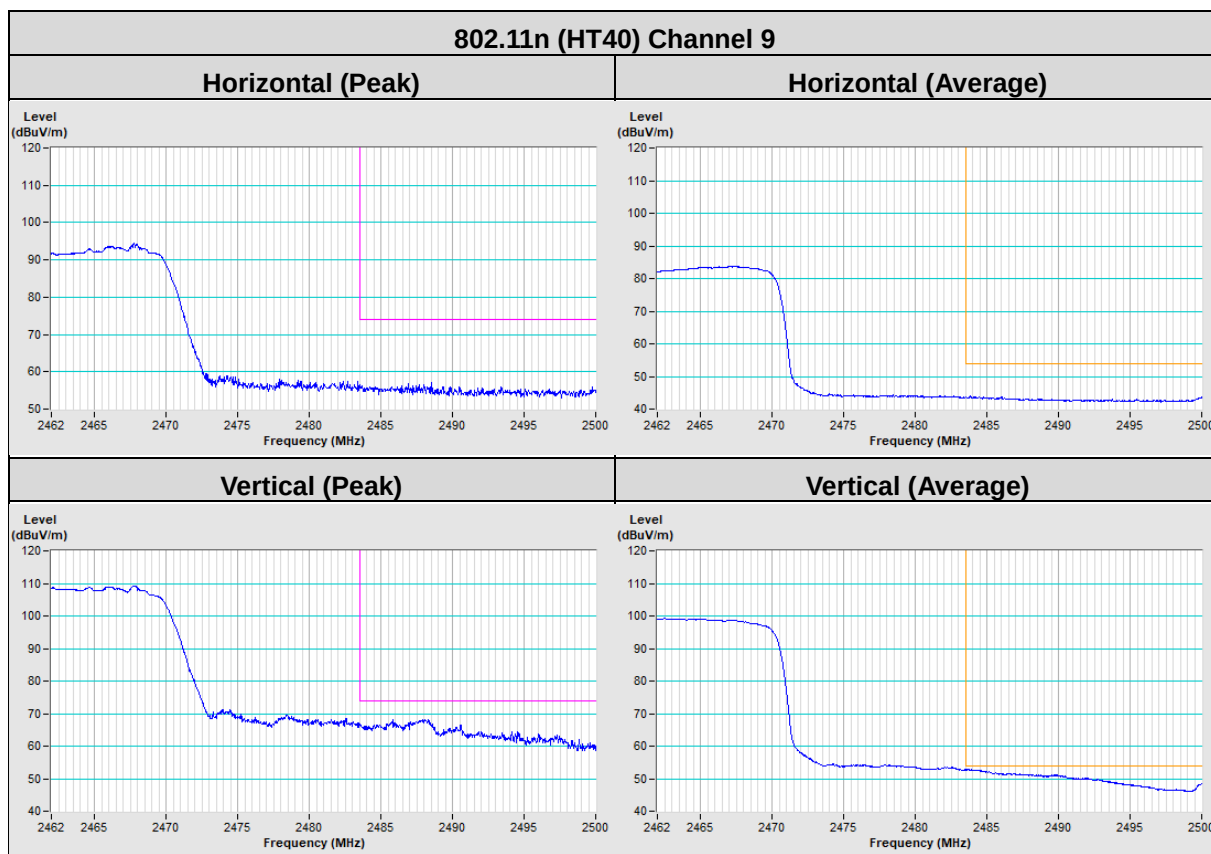

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---