



## Test Plots



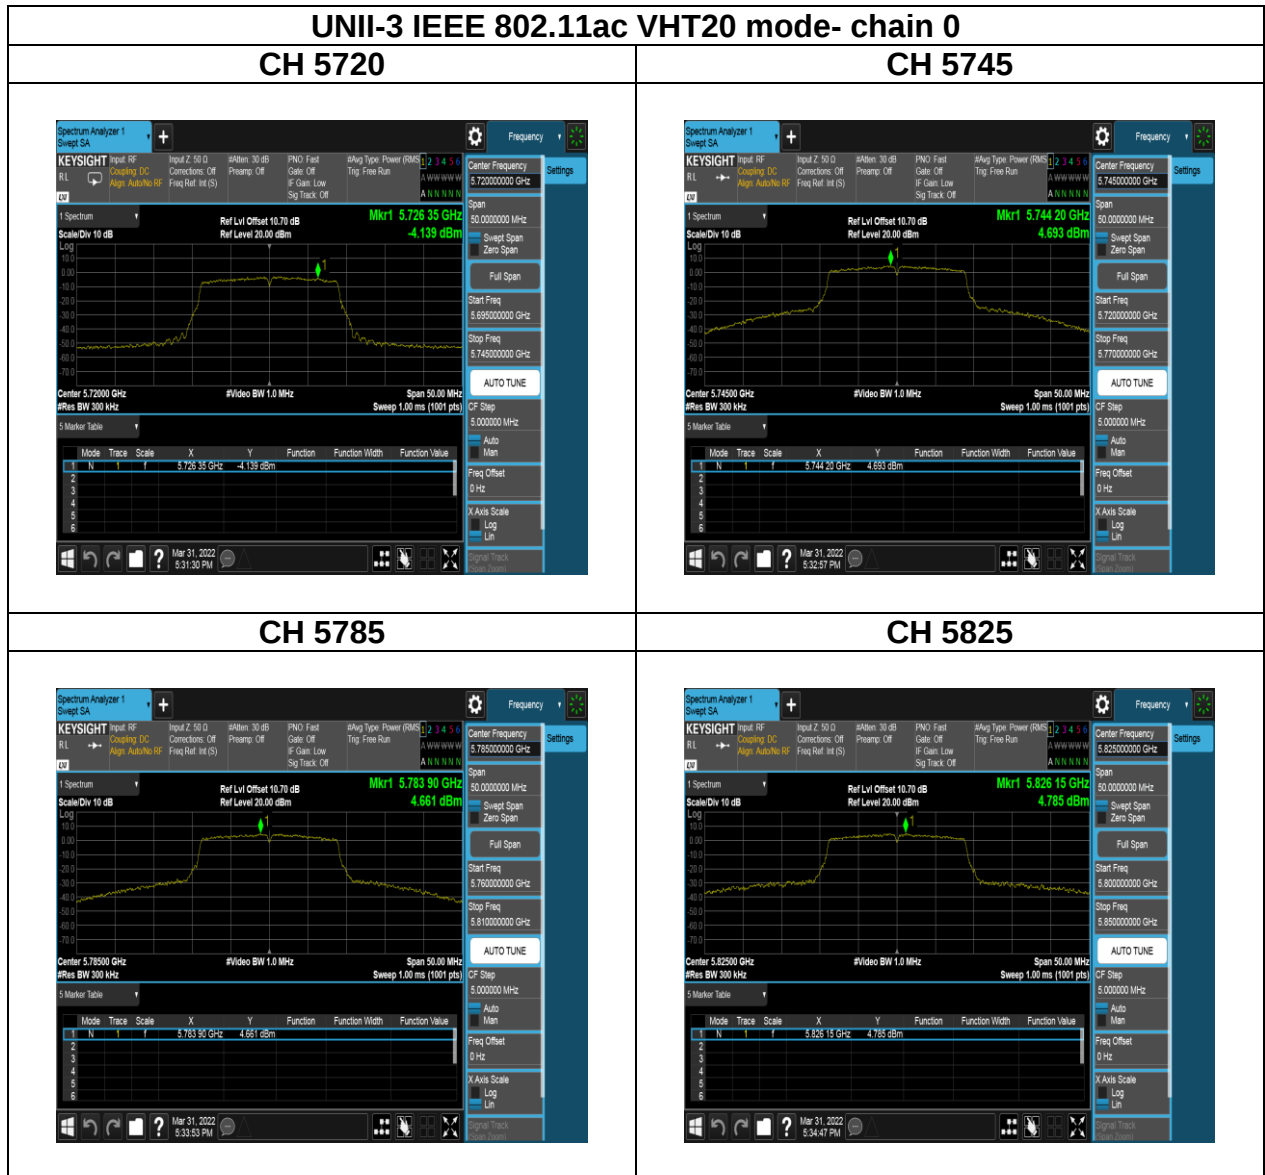

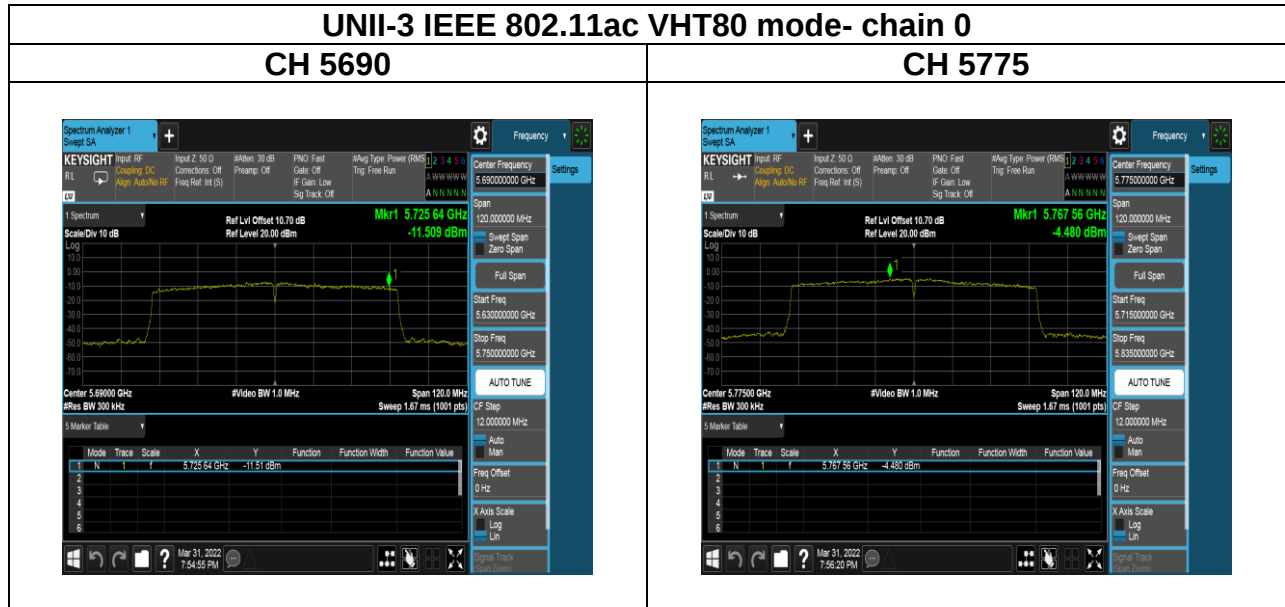

Report No.: TMWK2201000141KR

### UNII-3 IEEE 802.11ax HE20 mode- chain 0

#### CH 5720 full



#### CH 5745 full



#### CH 5785 full



#### CH 5825 full



## UNII-3 IEEE 802.11ax HE40 mode- chain 0

### CH 5710 full




### CH 5755 full




### CH 5795 full




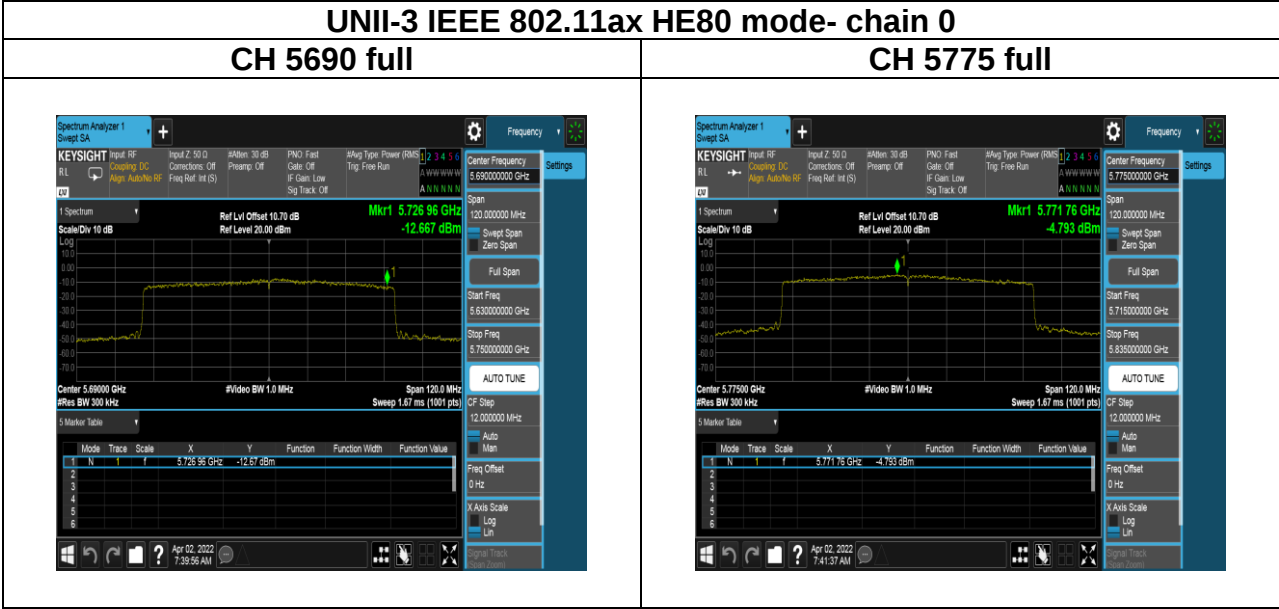

Report No.: TMWK2201000141KR

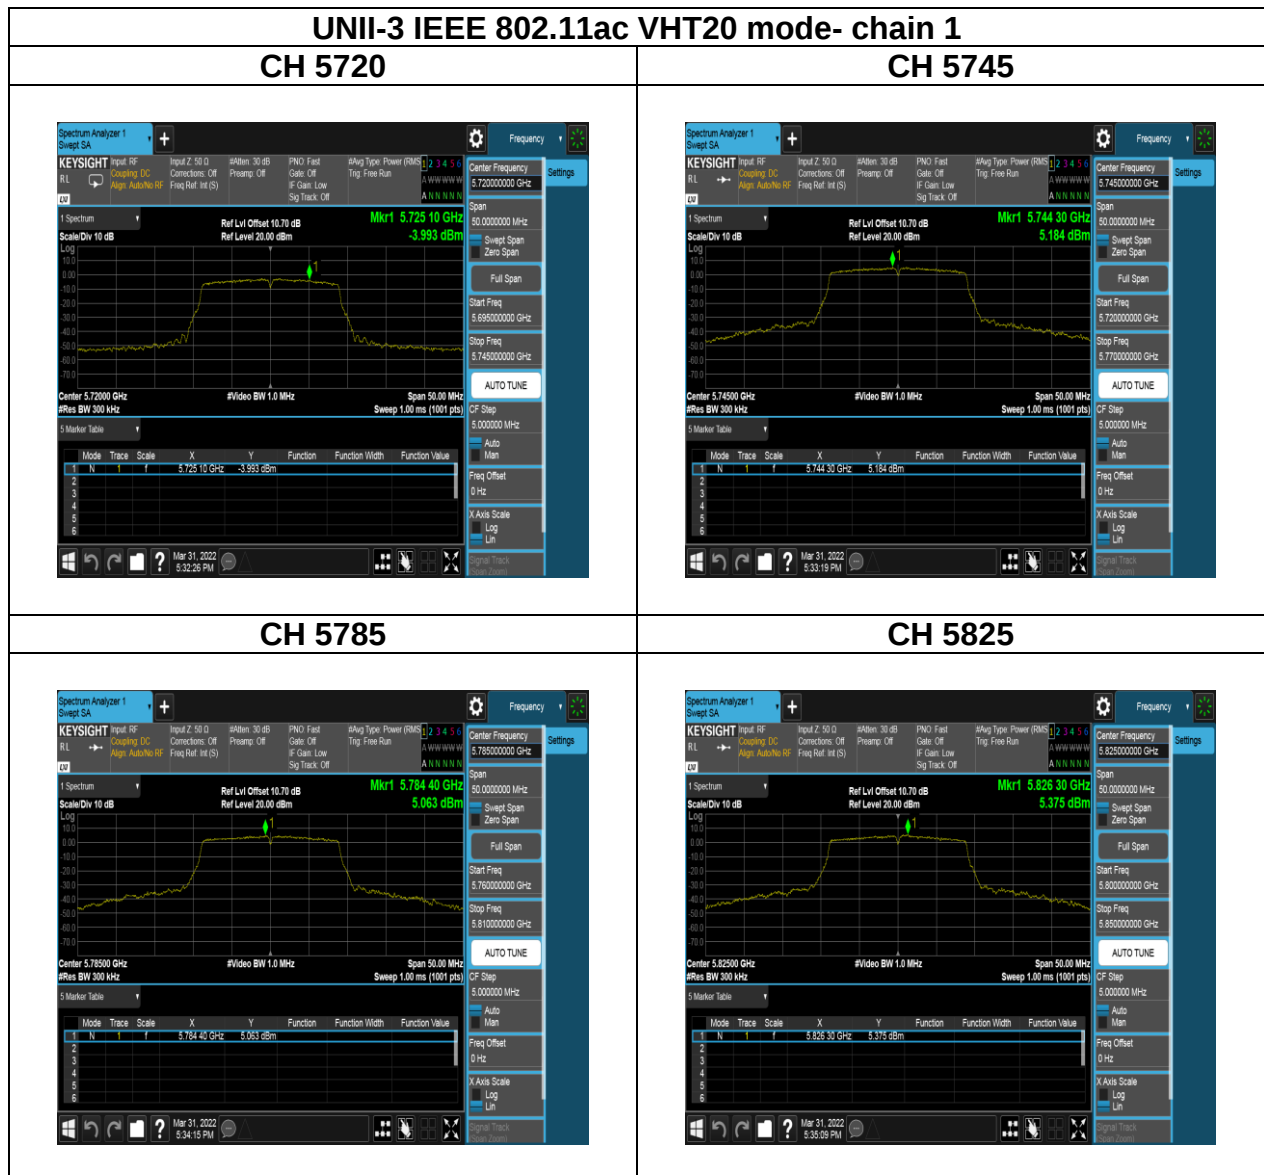



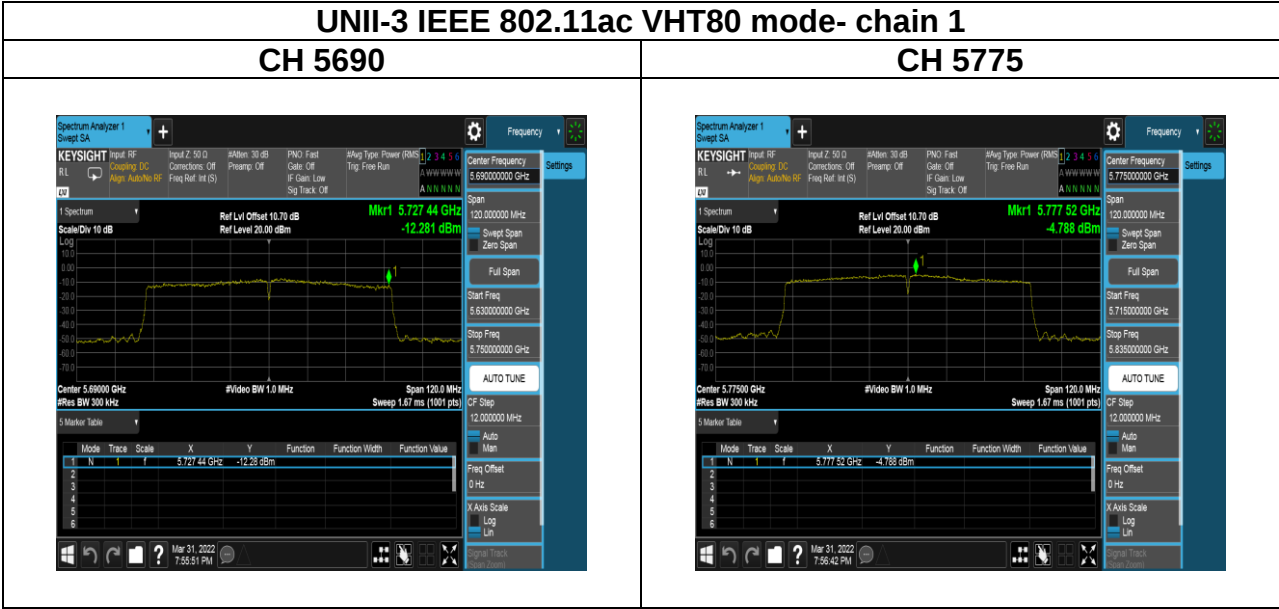

Report No.: TMWK2201000141KR

### UNII-3 IEEE 802.11ax HE20 mode- chain 1

#### CH 5720 full



#### CH 5745 full



#### CH 5785 full



#### CH 5825 full



## UNII-3 IEEE 802.11ax HE40 mode- chain 1

### CH 5710 full




### CH 5755 full



### CH 5795 full



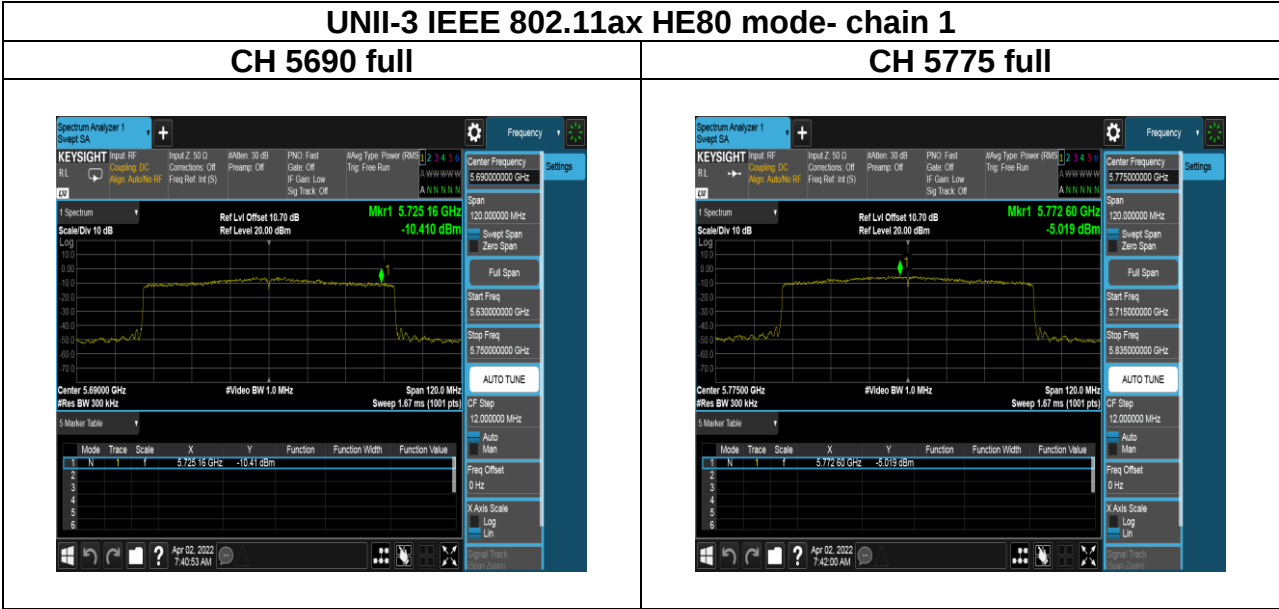

## 4.5 RADIATION BANDEDGE AND SPURIOUS EMISSION

### 4.5.1 Test Limit

FCC according to §15.407, §15.209 and §15.205,

#### Below 30 MHz

| Frequency     | Field Strength<br>(microvolts/m) | Magnetic<br>H-Field<br>(microamperes/m) | Measurement<br>Distance<br>(metres) |
|---------------|----------------------------------|-----------------------------------------|-------------------------------------|
| 9-490 kHz     | 2,400/F (F in kHz)               | 2,400/F (F in kHz)                      | 300                                 |
| 490-1,705 kHz | 24,000/F (F in kHz)              | 24,000/F (F in kHz)                     | 30                                  |
| 1.705-30 MHz  | 30                               | N/A                                     | 30                                  |

#### Above 30 MHz

| Frequency<br>(MHz) | Field Strength<br>microvolts/m at 3 metres (watts, e.i.r.p.) |              |
|--------------------|--------------------------------------------------------------|--------------|
|                    | Transmitters                                                 | Receivers    |
| 30-88              | 100 (3 nW)                                                   | 100 (3 nW)   |
| 88-216             | 150 (6.8 nW)                                                 | 150 (6.8 nW) |
| 216-960            | 200 (12 nW)                                                  | 200 (12 nW)  |
| Above 960          | 500 (75 nW)                                                  | 500 (75 nW)  |

#### UNII-1 :

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

#### UNII-3:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


## 4.5.2 Test Procedure

Test method Refer as KDB 789033 D02.


1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)
5. The SA setting following :
  - (1) Below 1G : RBW = 100kHz, VBW  $\geq 3 \times$  RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
  - (2) Above 1G :
    - (2.1) For Peak measurement : RBW = 1MHz, VBW  $\geq 3$  RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
    - (2.2) For Average measurement : RBW = 1MHz, VBW
      - If Duty Cycle  $\geq 98\%$ , VBW=10Hz.
      - If Duty Cycle  $< 98\%$ , VBW=1/T.


### 4.5.3 Test Setup

#### 9kHz ~ 30MHz

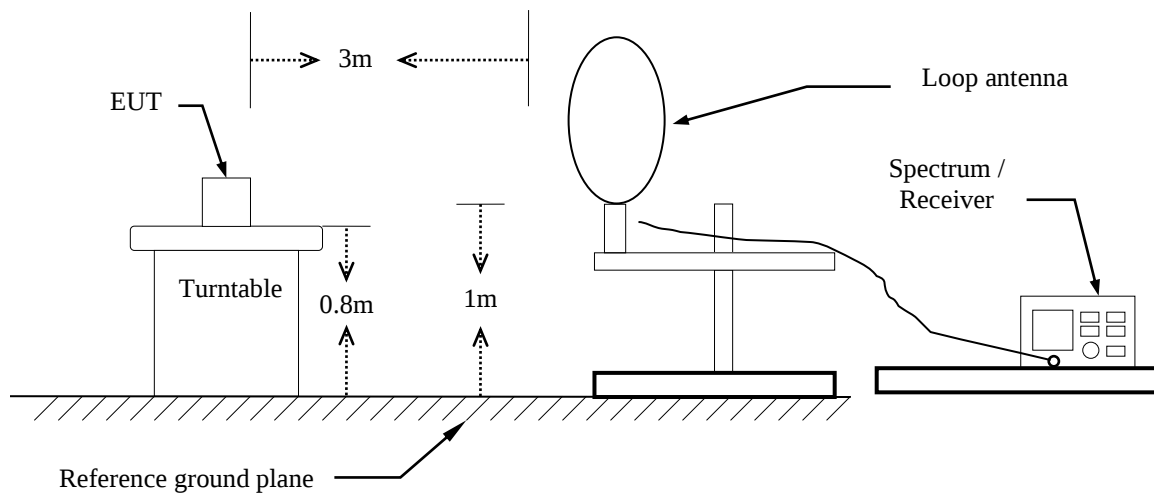

#### 30MHz ~ 1GHz

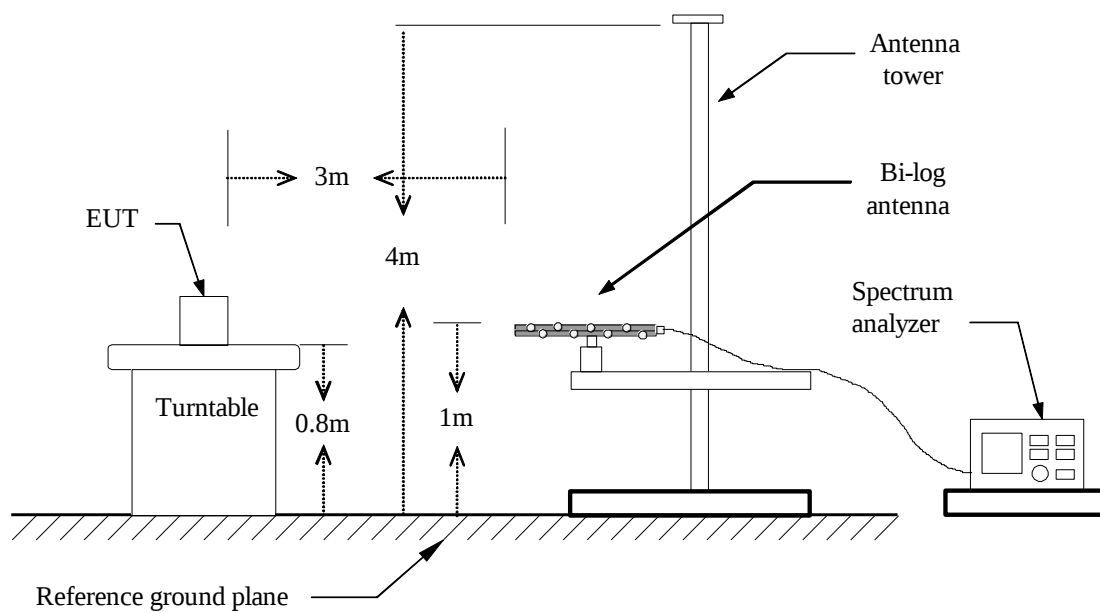

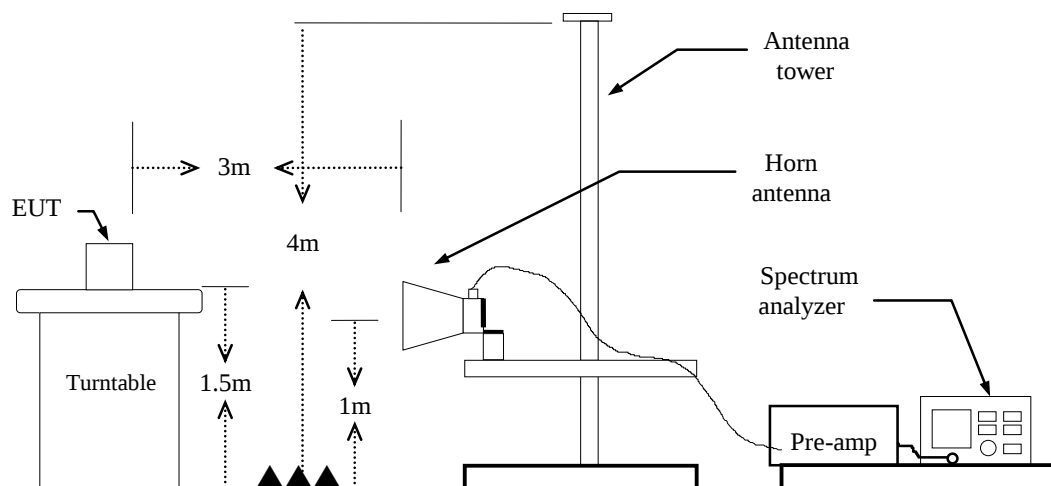**Above 1 GHz**


#### 4.5.4 Test Result

##### Band Edge Test Data

BFM OFF


##### Test Data for UNII-1

|           |                        |               |                   |
|-----------|------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5180MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge              | Test Date     | February 23, 2022 |
| Polarize  | Vertical               | Test Engineer | Tony Chao         |
| Detector  | Peak & Average         |               |                   |

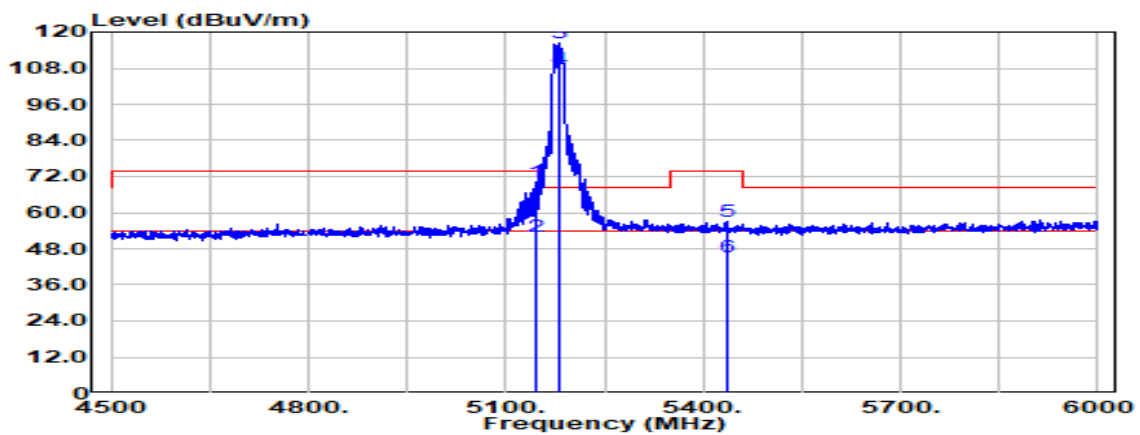

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5145.000       | Peak                           | 51.10                               | 18.98          | 70.08                    | 74.00                    | -3.92          |
| 5145.000       | Average                        | 33.12                               | 18.98          | 52.10                    | 54.00                    | -1.90          |
| 5180.000       | Peak                           | 96.97                               | 19.19          | 116.16                   | --                       | --             |
| 5180.000       | Average                        | 88.72                               | 19.19          | 107.91                   | --                       | --             |
| 5435.250       | Peak                           | 36.91                               | 20.07          | 56.98                    | 74.00                    | -17.02         |
| 5435.250       | Average                        | 24.99                               | 20.07          | 45.06                    | 54.00                    | -8.94          |

|           |                        |               |                   |
|-----------|------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5180MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge              | Test Date     | February 23, 2022 |
| Polarize  | Horizontal             | Test Engineer | Tony Chao         |
| Detector  | Peak & Average         |               |                   |

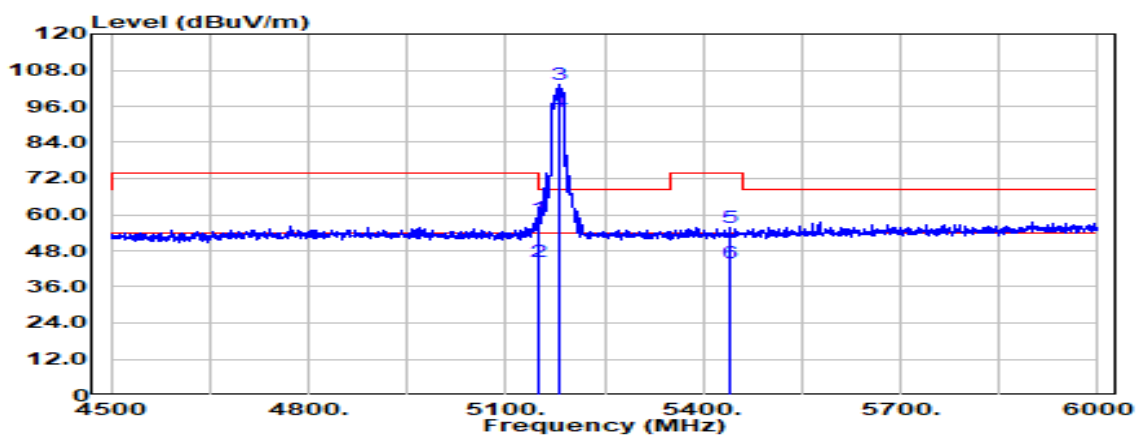

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5149.500       | Peak                           | 40.06                               | 19.00          | 59.06                    | 74.00                    | -14.94         |
| 5149.500       | Average                        | 25.50                               | 19.00          | 44.50                    | 54.00                    | -9.50          |
| 5180.000       | Peak                           | 83.94                               | 19.19          | 103.13                   | - -                      | - -            |
| 5180.000       | Average                        | 75.12                               | 19.19          | 94.31                    | - -                      | - -            |
| 5440.500       | Peak                           | 35.78                               | 20.07          | 55.84                    | 74.00                    | -18.16         |
| 5440.500       | Average                        | 23.72                               | 20.07          | 43.78                    | 54.00                    | -10.22         |




Report No.: TMWK2201000141KR

Page: 424 / 939

Rev.: 02

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5180MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                     | Test Date     | February 23, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

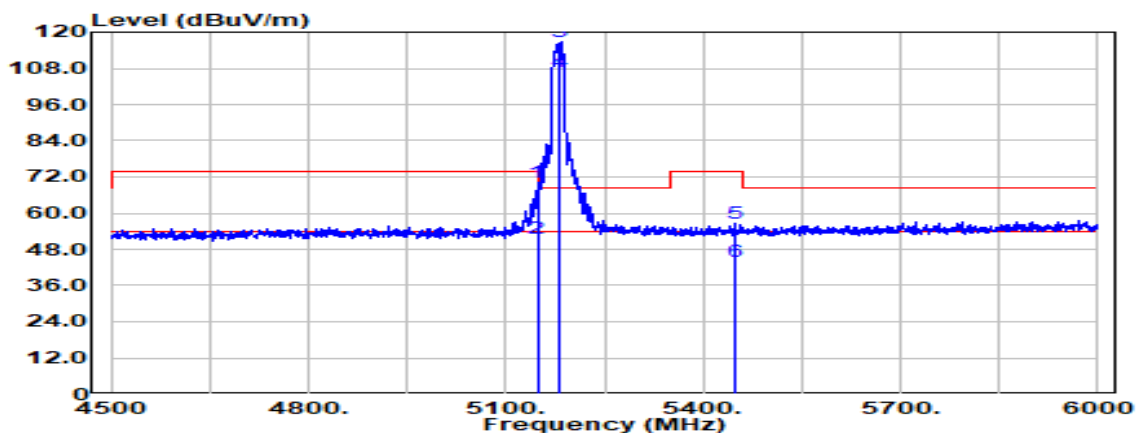


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5148.000       | Peak                           | 50.99                                | 18.99          | 69.98                     | 74.00                     | -4.02          |
| 5148.000       | Average                        | 32.42                                | 18.99          | 51.41                     | 54.00                     | -2.59          |
| 5180.000       | Peak                           | 97.45                                | 19.19          | 116.64                    | - -                       | - -            |
| 5180.000       | Average                        | 87.82                                | 19.19          | 107.01                    | - -                       | - -            |
| 5449.500       | Peak                           | 36.61                                | 20.07          | 56.68                     | 74.00                     | -17.32         |
| 5449.500       | Average                        | 23.96                                | 20.07          | 44.03                     | 54.00                     | -9.97          |

Report No.: TMWK2201000141KR

Page: 425 / 939

Rev.: 02

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11 ac VHT20 / 5180MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

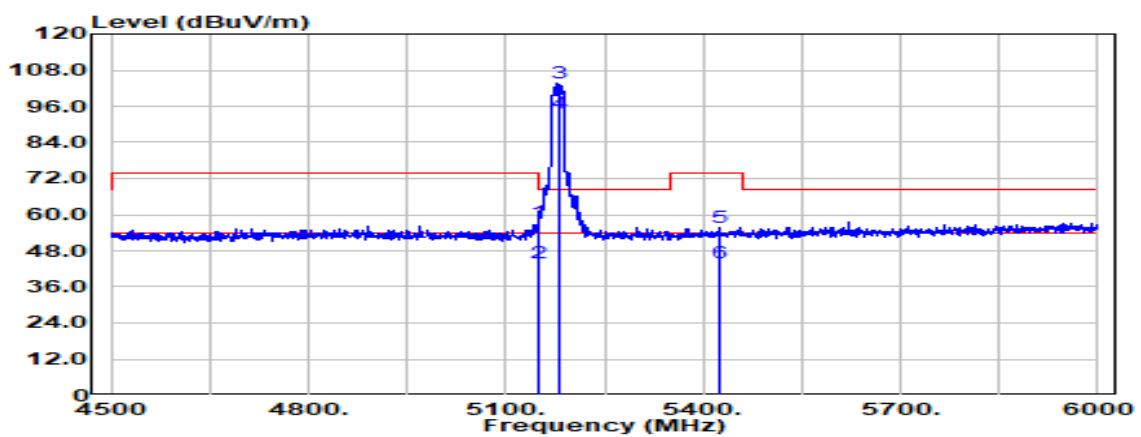

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5148.750       | Peak                           | 38.50                               | 19.00          | 57.50                    | 74.00                    | -16.50         |
| 5148.750       | Average                        | 25.02                               | 19.00          | 44.01                    | 54.00                    | -9.99          |
| 5180.000       | Peak                           | 84.36                               | 19.19          | 103.55                   | - -                      | - -            |
| 5180.000       | Average                        | 74.71                               | 19.19          | 93.90                    | - -                      | - -            |
| 5424.000       | Peak                           | 35.68                               | 20.06          | 55.74                    | 74.00                    | -18.26         |
| 5424.000       | Average                        | 23.68                               | 20.06          | 43.75                    | 54.00                    | -10.25         |




Report No.: TMWK2201000141KR

Page: 426 / 939


Rev.: 02

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11 ac VHT40 / 5190MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Vertical                       | Test Engineer | Ray Li            |
| Detector  | Peak & Average                 |               |                   |

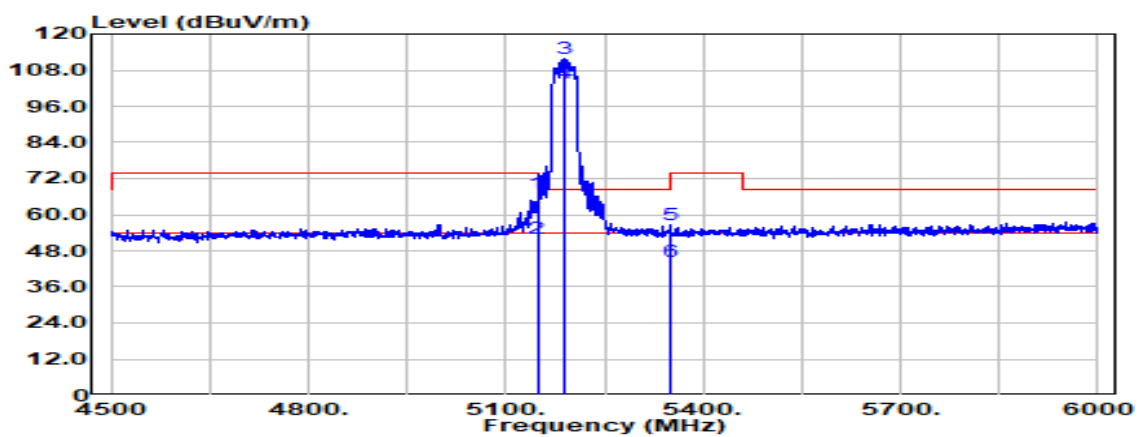


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5148.000       | Peak                           | 48.23                               | 18.99          | 67.23                    | 74.00                    | -6.77          |
| 5148.000       | Average                        | 33.22                               | 18.99          | 52.21                    | 54.00                    | -1.79          |
| 5190.000       | Peak                           | 92.74                               | 19.26          | 112.00                   | - -                      | - -            |
| 5190.000       | Average                        | 84.26                               | 19.26          | 103.51                   | - -                      | - -            |
| 5351.250       | Peak                           | 36.93                               | 19.83          | 56.76                    | 74.00                    | -17.24         |
| 5351.250       | Average                        | 24.50                               | 19.83          | 44.32                    | 54.00                    | -9.68          |

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11 ac VHT40 / 5190MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Horizontal                     | Test Engineer | Ray Li            |
| Detector  | Peak & Average                 |               |                   |

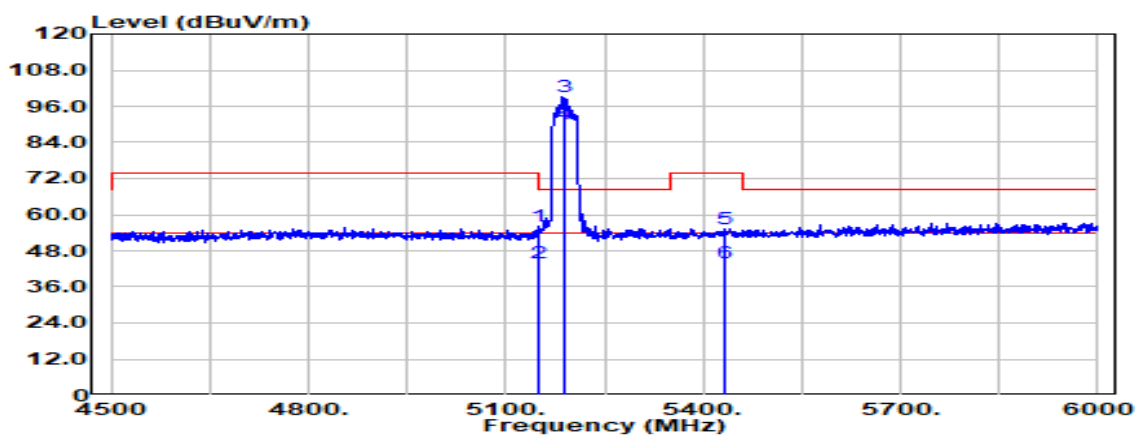


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5149.500       | Peak                           | 37.27                               | 19.00          | 56.27                    | 74.00                    | -17.73         |
| 5149.500       | Average                        | 24.91                               | 19.00          | 43.91                    | 54.00                    | -10.09         |
| 5190.000       | Peak                           | 79.90                               | 19.26          | 99.16                    | --                       | --             |
| 5190.000       | Average                        | 70.89                               | 19.26          | 90.15                    | --                       | --             |
| 5431.500       | Peak                           | 35.14                               | 20.07          | 55.21                    | 74.00                    | -18.79         |
| 5431.500       | Average                        | 24.08                               | 20.07          | 44.15                    | 54.00                    | -9.85          |

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210MHz | Temp/Hum      | 20.0(°C)/ 62%RH   |
| Test Item | Band Edge                     | Test Date     | February 24, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

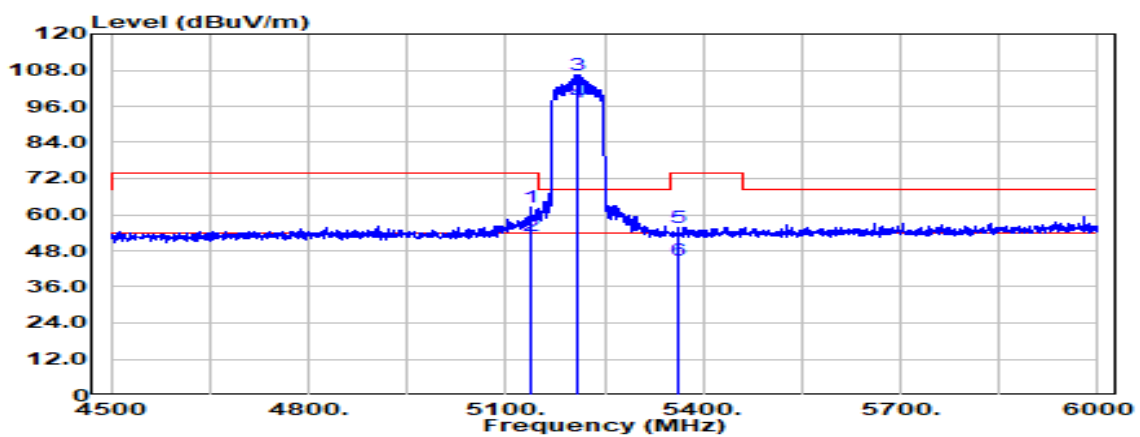

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5136.750       | Peak                           | 43.33                               | 18.96          | 62.29                    | 74.00                    | -11.71         |
| 5136.750       | Average                        | 33.83                               | 18.96          | 52.78                    | 54.00                    | -1.22          |
| 5210.000       | Peak                           | 87.24                               | 19.39          | 106.62                   | - -                      | - -            |
| 5210.000       | Average                        | 77.77                               | 19.39          | 97.16                    | - -                      | - -            |
| 5361.750       | Peak                           | 35.78                               | 19.88          | 55.66                    | 74.00                    | -18.34         |
| 5361.750       | Average                        | 24.97                               | 19.88          | 44.85                    | 54.00                    | -9.15          |

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210MHz | Temp/Hum      | 20.0(°C)/ 62%RH   |
| Test Item | Band Edge                     | Test Date     | February 24, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

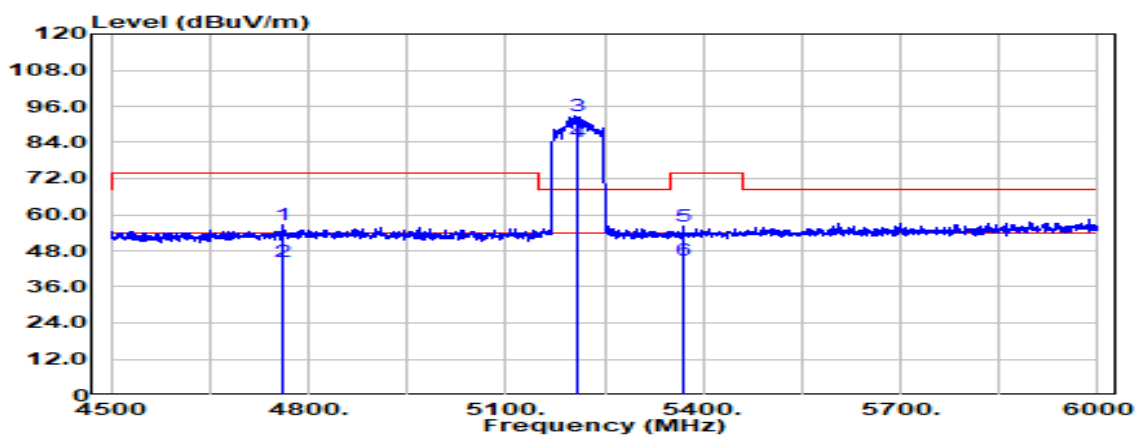

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4762.500       | Peak                           | 38.22                               | 18.49          | 56.70                    | 74.00                    | -17.30         |
| 4762.500       | Average                        | 26.03                               | 18.49          | 44.52                    | 54.00                    | -9.48          |
| 5210.000       | Peak                           | 73.28                               | 19.39          | 92.67                    | - -                      | - -            |
| 5210.000       | Average                        | 64.81                               | 19.39          | 84.20                    | - -                      | - -            |
| 5370.000       | Peak                           | 36.10                               | 19.92          | 56.02                    | 74.00                    | -17.98         |
| 5370.000       | Average                        | 25.09                               | 19.92          | 45.01                    | 54.00                    | -8.99          |




Report No.: TMWK2201000141KR

Page: 430 / 939

Rev.: 02

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz | Temp/Hum      | 20.0(°C)/ 62%RH   |
| Test Item | Band Edge                    | Test Date     | February 24, 2022 |
| Polarize  | Vertical                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

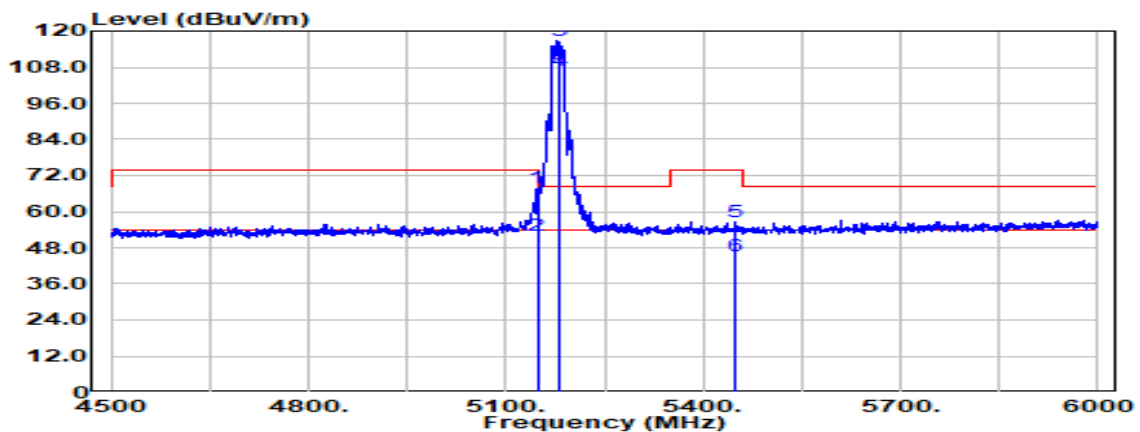


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5148.000       | Peak                           | 49.12                                | 18.99          | 68.11                     | 74.00                     | -5.89          |
| 5148.000       | Average                        | 33.25                                | 18.99          | 52.25                     | 54.00                     | -1.75          |
| 5180.000       | Peak                           | 97.75                                | 19.19          | 116.95                    | --                        | --             |
| 5180.000       | Average                        | 87.46                                | 19.19          | 106.65                    | --                        | --             |
| 5447.250       | Peak                           | 36.49                                | 20.07          | 56.56                     | 74.00                     | -17.44         |
| 5447.250       | Average                        | 25.19                                | 20.07          | 45.26                     | 54.00                     | -8.74          |



Report No.: TMWK2201000141KR


|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz | Temp/Hum      | 20.0(°C)/ 62%RH   |
| Test Item | Band Edge                    | Test Date     | February 24, 2022 |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

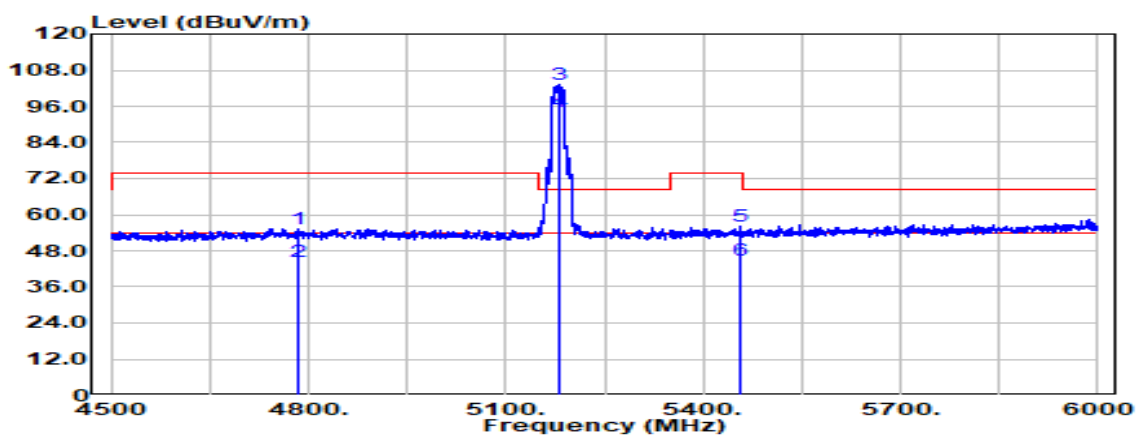

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4785.750       | Peak                           | 36.93                               | 18.46          | 55.40                    | 74.00                    | -18.60         |
| 4785.750       | Average                        | 26.06                               | 18.46          | 44.53                    | 54.00                    | -9.47          |
| 5180.000       | Peak                           | 84.20                               | 19.19          | 103.40                   | --                       | --             |
| 5180.000       | Average                        | 75.10                               | 19.19          | 94.29                    | --                       | --             |
| 5457.000       | Peak                           | 35.89                               | 20.06          | 55.95                    | 74.00                    | -18.05         |
| 5457.000       | Average                        | 24.68                               | 20.06          | 44.74                    | 54.00                    | -9.26          |

Report No.: TMWK2201000141KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz 26/0 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                         | Test Date     | March 4, 2022   |
| Polarize  | Vertical                          | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                    |               |                 |

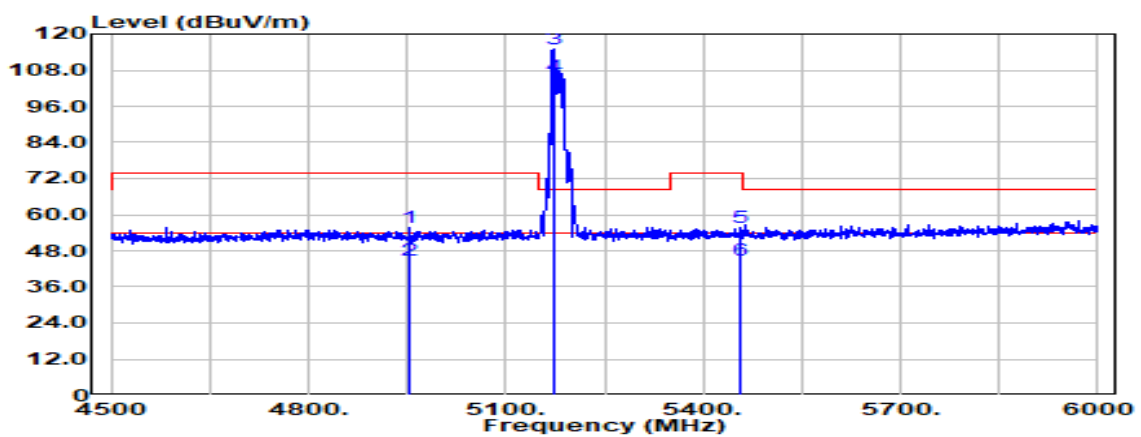

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4954.500       | Peak                           | 37.21                                | 18.69          | 55.90                     | 74.00                     | -18.10         |
| 4954.500       | Average                        | 26.14                                | 18.69          | 44.83                     | 54.00                     | -9.17          |
| 5172.000       | Peak                           | 95.69                                | 19.14          | 114.83                    | --                        | --             |
| 5172.000       | Average                        | 86.61                                | 19.14          | 105.75                    | --                        | --             |
| 5456.250       | Peak                           | 35.76                                | 20.06          | 55.82                     | 74.00                     | -18.18         |
| 5456.250       | Average                        | 24.73                                | 20.06          | 44.79                     | 54.00                     | -9.21          |




Report No.: TMWK2201000141KR

Page: 433 / 939


Rev.: 02

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz 26/0 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                         | Test Date     | March 4, 2022   |
| Polarize  | Horizontal                        | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                    |               |                 |

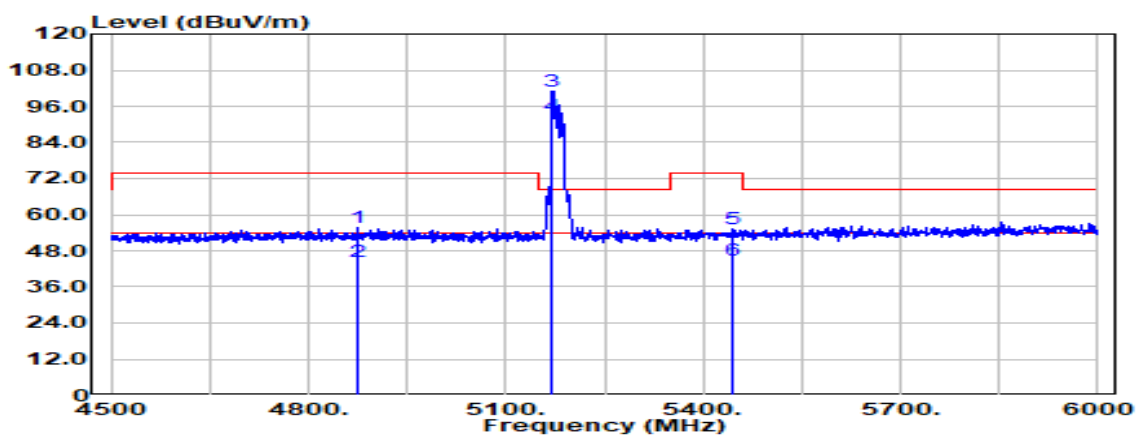

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4875.750       | Peak                           | 36.97                               | 18.59          | 55.57                    | 74.00                    | -18.43         |
| 4875.750       | Average                        | 25.88                               | 18.59          | 44.48                    | 54.00                    | -9.52          |
| 5171.250       | Peak                           | 81.91                               | 19.14          | 101.05                   | - -                      | - -            |
| 5171.250       | Average                        | 73.54                               | 19.14          | 92.67                    | - -                      | - -            |
| 5443.500       | Peak                           | 35.02                               | 20.07          | 55.08                    | 74.00                    | -18.92         |
| 5443.500       | Average                        | 24.75                               | 20.07          | 44.82                    | 54.00                    | -9.18          |

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz 52/37 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                          | Test Date     | March 4, 2022   |
| Polarize  | Vertical                           | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                     |               |                 |

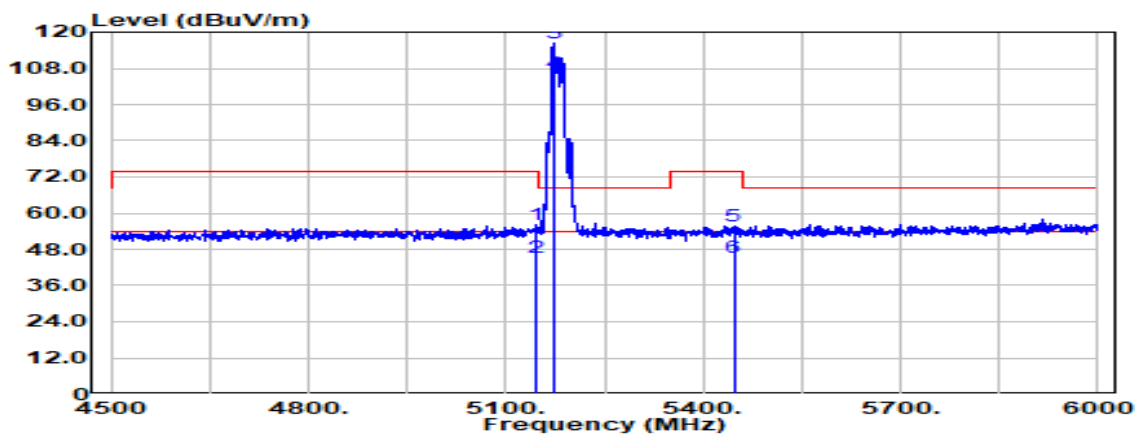

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5144.250       | Peak                           | 37.13                               | 18.98          | 56.12                    | 74.00                    | -17.88         |
| 5144.250       | Average                        | 26.29                               | 18.98          | 45.27                    | 54.00                    | -8.73          |
| 5172.000       | Peak                           | 97.46                               | 19.14          | 116.60                   | - -                      | - -            |
| 5172.000       | Average                        | 87.45                               | 19.14          | 106.59                   | - -                      | - -            |
| 5446.500       | Peak                           | 35.71                               | 20.07          | 55.78                    | 74.00                    | -18.22         |
| 5446.500       | Average                        | 25.29                               | 20.07          | 45.36                    | 54.00                    | -8.64          |




Report No.: TMWK2201000141KR

Page: 435 / 939

Rev.: 02

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz 52/37 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                          | Test Date     | March 4, 2022   |
| Polarize  | Horizontal                         | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                     |               |                 |

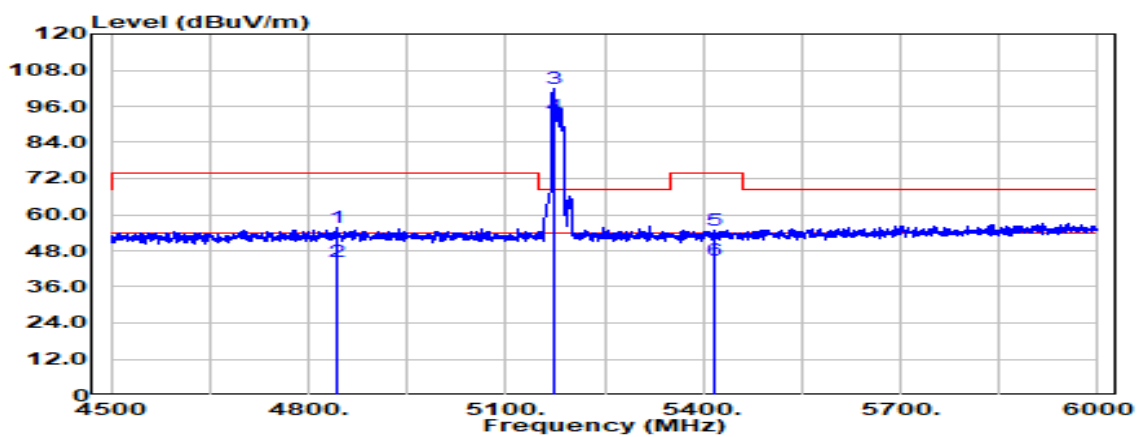

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.250       | Peak                           | 37.02                               | 18.59          | 55.61                    | 74.00                    | -18.39         |
| 4844.250       | Average                        | 25.95                               | 18.59          | 44.54                    | 54.00                    | -9.46          |
| 5172.750       | Peak                           | 82.71                               | 19.15          | 101.86                   | --                       | --             |
| 5172.750       | Average                        | 73.81                               | 19.15          | 92.96                    | --                       | --             |
| 5418.750       | Peak                           | 34.86                               | 20.06          | 54.93                    | 74.00                    | -19.07         |
| 5418.750       | Average                        | 24.70                               | 20.06          | 44.76                    | 54.00                    | -9.24          |




Report No.: TMWK2201000141KR

Page: 436 / 939


Rev.: 02

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz_106/53 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                           | Test Date     | March 4, 2022   |
| Polarize  | Vertical                            | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                      |               |                 |

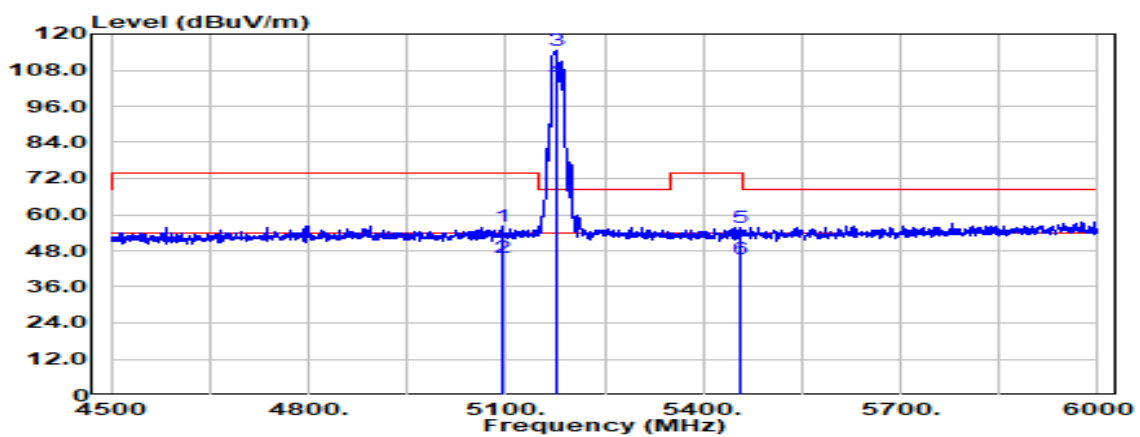

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5093.250       | Peak                           | 37.39                               | 18.85          | 56.24                    | 74.00                    | -17.76         |
| 5093.250       | Average                        | 26.83                               | 18.85          | 45.67                    | 54.00                    | -8.33          |
| 5177.250       | Peak                           | 95.21                               | 19.17          | 114.39                   | --                       | --             |
| 5177.250       | Average                        | 86.08                               | 19.17          | 105.26                   | --                       | --             |
| 5457.750       | Peak                           | 35.51                               | 20.06          | 55.57                    | 74.00                    | -18.43         |
| 5457.750       | Average                        | 25.07                               | 20.06          | 45.13                    | 54.00                    | -8.87          |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz_106/53 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                           | Test Date     | March 4, 2022   |
| Polarize  | Horizontal                          | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                      |               |                 |

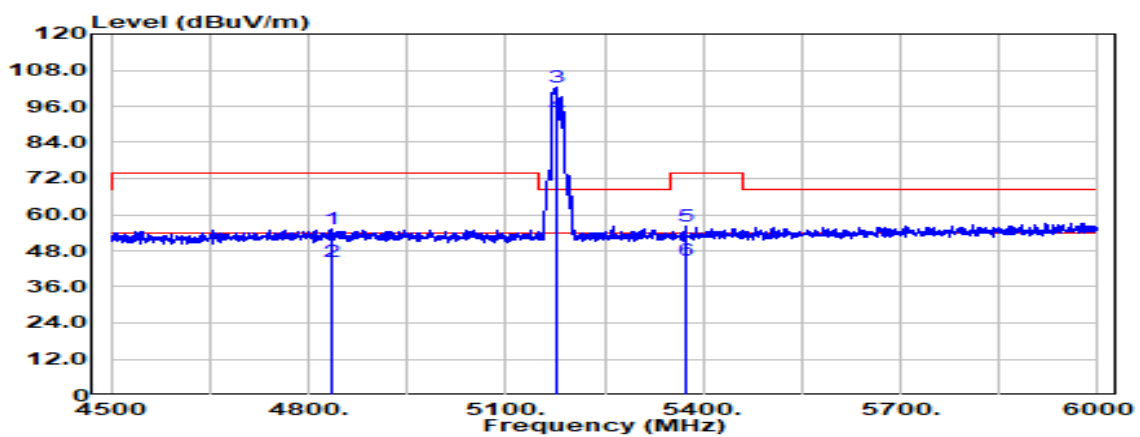


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4833.750       | Peak                           | 36.71                               | 18.56          | 55.27                    | 74.00                    | -18.73         |
| 4833.750       | Average                        | 25.99                               | 18.56          | 44.55                    | 54.00                    | -9.45          |
| 5177.250       | Peak                           | 83.30                               | 19.17          | 102.47                   | --                       | --             |
| 5177.250       | Average                        | 73.99                               | 19.17          | 93.16                    | --                       | --             |
| 5373.750       | Peak                           | 36.27                               | 19.93          | 56.21                    | 74.00                    | -17.79         |
| 5373.750       | Average                        | 24.84                               | 19.93          | 44.77                    | 54.00                    | -9.23          |




Report No.: TMWK2201000141KR

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE40 / 5190MHz | Temp/Hum      | 19.6(°C) / 62%RH  |
| Test Item | Band Edge                    | Test Date     | February 25, 2022 |
| Polarize  | Vertical                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

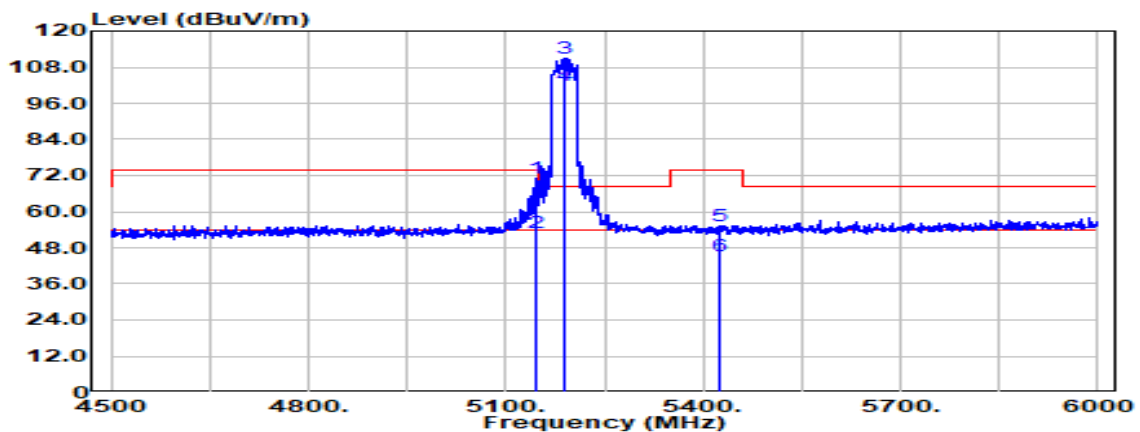

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5144.250       | Peak                           | 52.03                               | 18.98          | 71.02                    | 74.00                    | -2.98          |
| 5144.250       | Average                        | 33.80                               | 18.98          | 52.79                    | 54.00                    | -1.21          |
| 5190.000       | Peak                           | 91.88                               | 19.26          | 111.13                   | --                       | --             |
| 5190.000       | Average                        | 82.70                               | 19.26          | 101.96                   | --                       | --             |
| 5423.250       | Peak                           | 35.40                               | 20.06          | 55.46                    | 74.00                    | -18.54         |
| 5423.250       | Average                        | 25.22                               | 20.06          | 45.28                    | 54.00                    | -8.72          |

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE40 / 5190MHz | Temp/Hum      | 19.6(°C)/ 62%RH   |
| Test Item | Band Edge                    | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

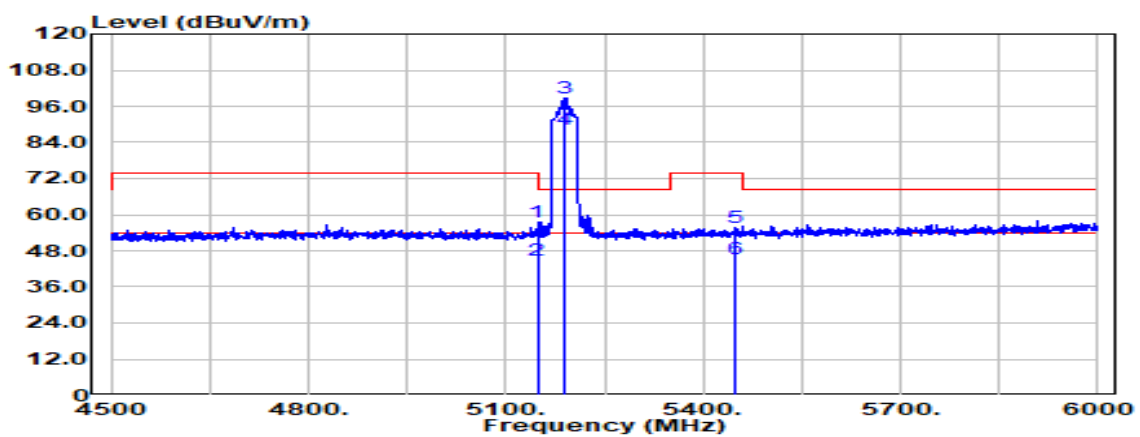


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5148.000       | Peak                           | 38.53                               | 18.99          | 57.52                    | 74.00                    | -16.48         |
| 5148.000       | Average                        | 25.62                               | 18.99          | 44.61                    | 54.00                    | -9.39          |
| 5190.000       | Peak                           | 79.45                               | 19.26          | 98.71                    | - -                      | - -            |
| 5190.000       | Average                        | 69.00                               | 19.26          | 88.25                    | - -                      | - -            |
| 5449.500       | Peak                           | 35.75                               | 20.07          | 55.82                    | 74.00                    | -18.18         |
| 5449.500       | Average                        | 25.00                               | 20.07          | 45.07                    | 54.00                    | -8.93          |




Report No.: TMWK2201000141KR

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5190MHz_242/61 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                           | Test Date     | March 4, 2022   |
| Polarize  | Vertical                            | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                      |               |                 |

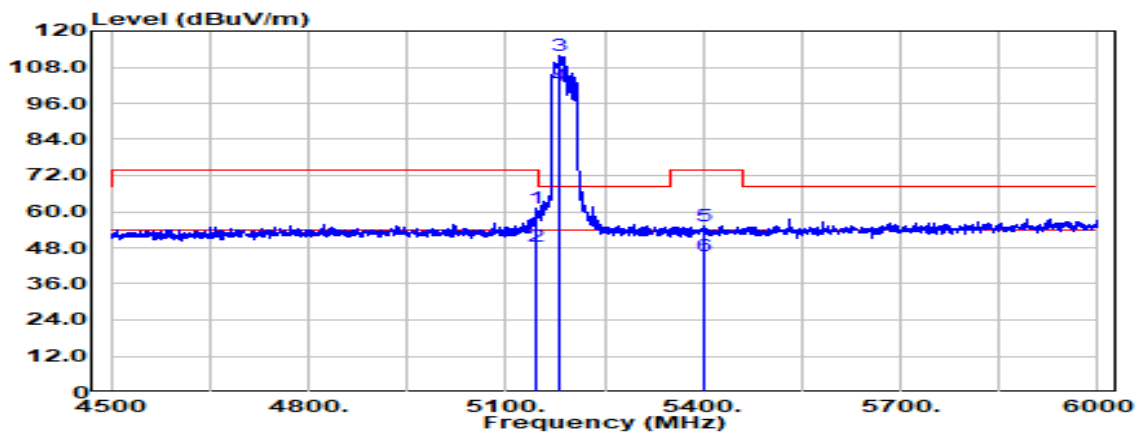


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5145.750       | Peak                           | 42.07                               | 18.99          | 61.06                    | 74.00                    | -12.94         |
| 5145.750       | Average                        | 29.66                               | 18.99          | 48.65                    | 54.00                    | -5.35          |
| 5182.500       | Peak                           | 92.45                               | 19.21          | 111.66                   | --                       | --             |
| 5182.500       | Average                        | 82.59                               | 19.21          | 101.80                   | --                       | --             |
| 5400.750       | Peak                           | 35.34                               | 20.06          | 55.40                    | 74.00                    | -18.60         |
| 5400.750       | Average                        | 25.20                               | 20.06          | 45.26                    | 54.00                    | -8.74          |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5190MHz 242/61 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                           | Test Date     | March 4, 2022   |
| Polarize  | Horizontal                          | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                      |               |                 |

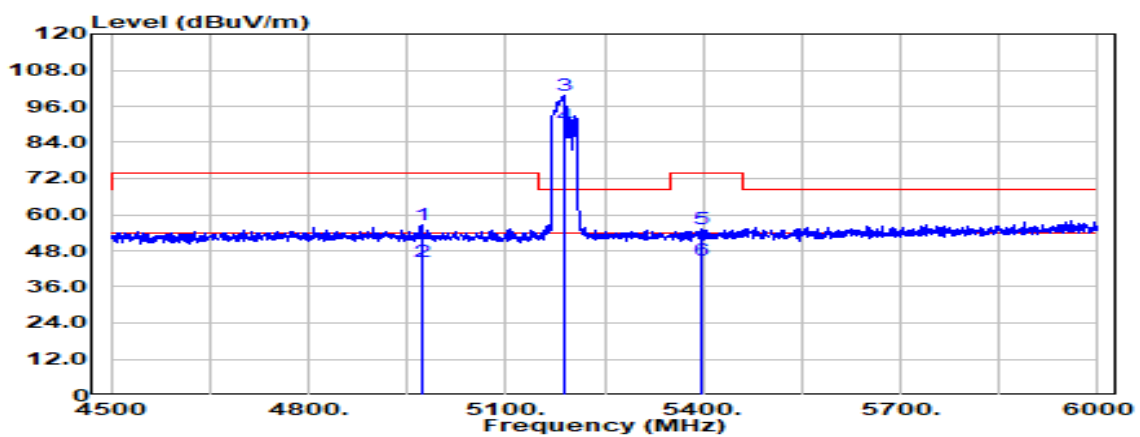


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4971.750       | Peak                           | 37.71                               | 18.74          | 56.45                    | 74.00                    | -17.55         |
| 4971.750       | Average                        | 25.67                               | 18.74          | 44.41                    | 54.00                    | -9.59          |
| 5187.750       | Peak                           | 80.37                               | 19.24          | 99.61                    | --                       | --             |
| 5187.750       | Average                        | 70.55                               | 19.24          | 89.79                    | --                       | --             |
| 5397.750       | Peak                           | 35.22                               | 20.05          | 55.27                    | 74.00                    | -18.73         |
| 5397.750       | Average                        | 24.63                               | 20.05          | 44.68                    | 54.00                    | -9.32          |

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE80 / 5210MHz | Temp/Hum      | 19.6(°C) / 62%RH  |
| Test Item | Band Edge                    | Test Date     | February 25, 2022 |
| Polarize  | Vertical                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

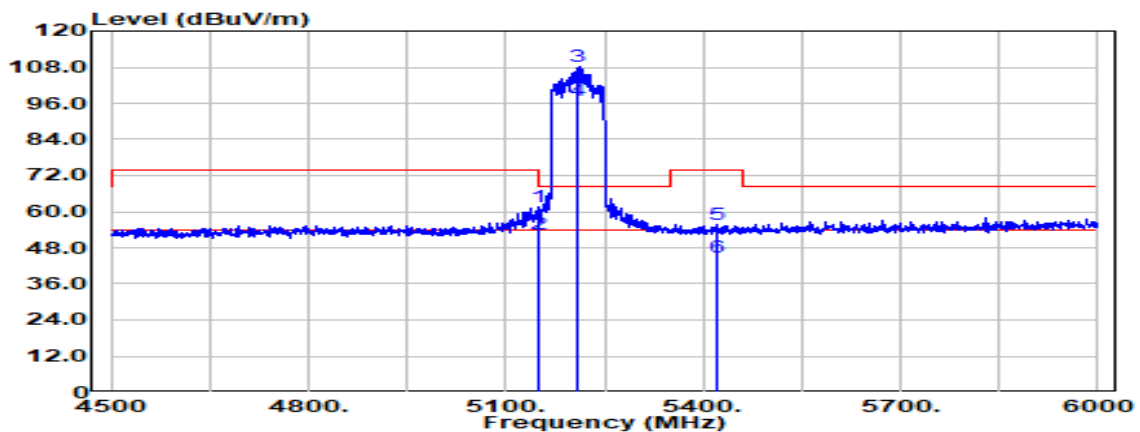


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5149.500       | Peak                           | 42.51                               | 19.00          | 61.51                    | 74.00                    | -12.49         |
| 5149.500       | Average                        | 33.72                               | 19.00          | 52.72                    | 54.00                    | -1.28          |
| 5210.000       | Peak                           | 88.72                               | 19.39          | 108.11                   | --                       | --             |
| 5210.000       | Average                        | 77.55                               | 19.39          | 96.93                    | --                       | --             |
| 5421.000       | Peak                           | 35.59                               | 20.06          | 55.65                    | 74.00                    | -18.35         |
| 5421.000       | Average                        | 24.90                               | 20.06          | 44.96                    | 54.00                    | -9.04          |

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE80 / 5210MHz | Temp/Hum      | 19.6(°C)/ 62%RH   |
| Test Item | Band Edge                    | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

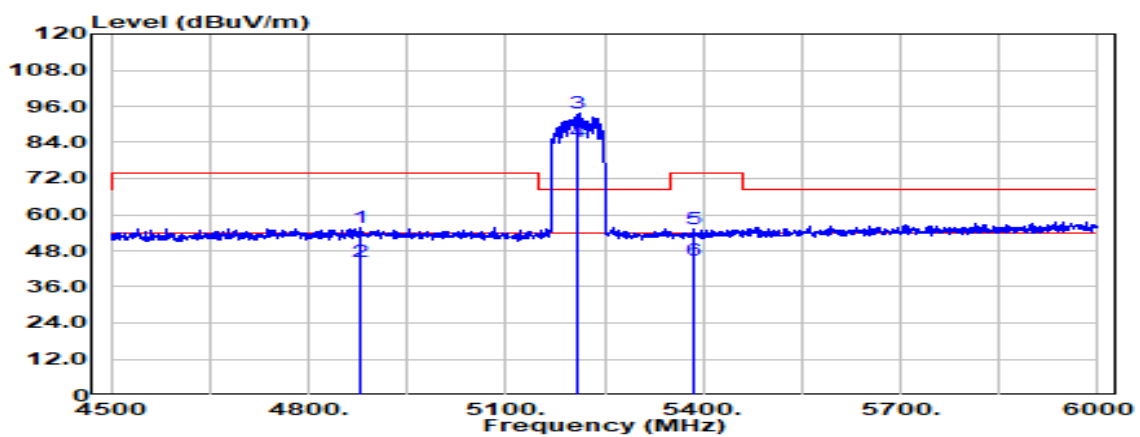

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4880.250       | Peak                           | 37.06                               | 18.59          | 55.65                    | 74.00                    | -18.35         |
| 4880.250       | Average                        | 25.84                               | 18.59          | 44.43                    | 54.00                    | -9.57          |
| 5210.000       | Peak                           | 74.54                               | 19.39          | 93.93                    | - -                      | - -            |
| 5210.000       | Average                        | 64.93                               | 19.39          | 84.32                    | - -                      | - -            |
| 5385.750       | Peak                           | 35.44                               | 19.99          | 55.43                    | 74.00                    | -18.57         |
| 5385.750       | Average                        | 24.72                               | 19.99          | 44.71                    | 54.00                    | -9.29          |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5210MHz_484/65 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                           | Test Date     | March 4, 2022   |
| Polarize  | Vertical                            | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                      |               |                 |

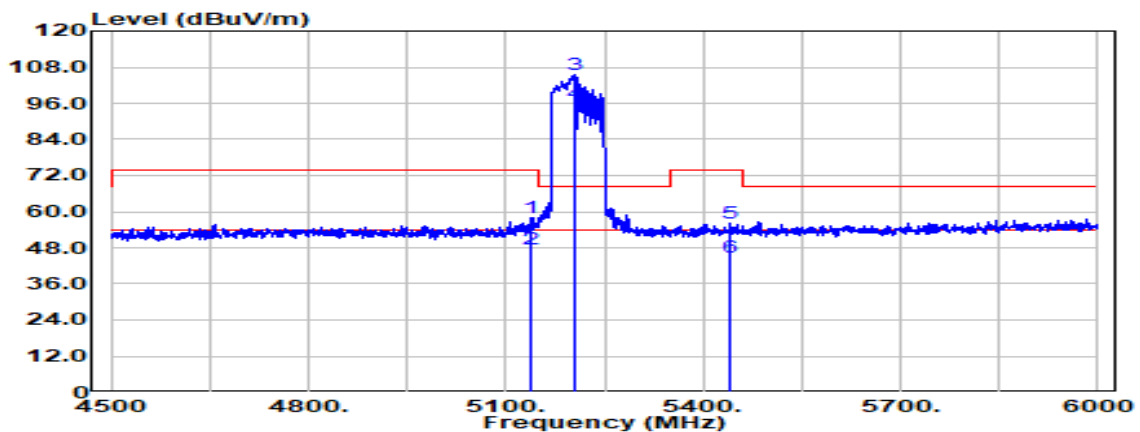

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5138.250       | Peak                           | 39.21                               | 18.96          | 58.17                    | 74.00                    | -15.83         |
| 5138.250       | Average                        | 28.50                               | 18.96          | 47.47                    | 54.00                    | -6.53          |
| 5203.500       | Peak                           | 86.17                               | 19.34          | 105.52                   | --                       | --             |
| 5203.500       | Average                        | 76.67                               | 19.34          | 96.01                    | --                       | --             |
| 5441.250       | Peak                           | 36.25                               | 20.07          | 56.32                    | 74.00                    | -17.68         |
| 5441.250       | Average                        | 24.86                               | 20.07          | 44.93                    | 54.00                    | -9.07          |




Report No.: TMWK2201000141KR

Page: 445 / 939

Rev.: 02

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5210MHz 484/65 | Temp/Hum      | 23.9(°C)/ 58%RH |
| Test Item | Band Edge                           | Test Date     | March 4, 2022   |
| Polarize  | Horizontal                          | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                      |               |                 |

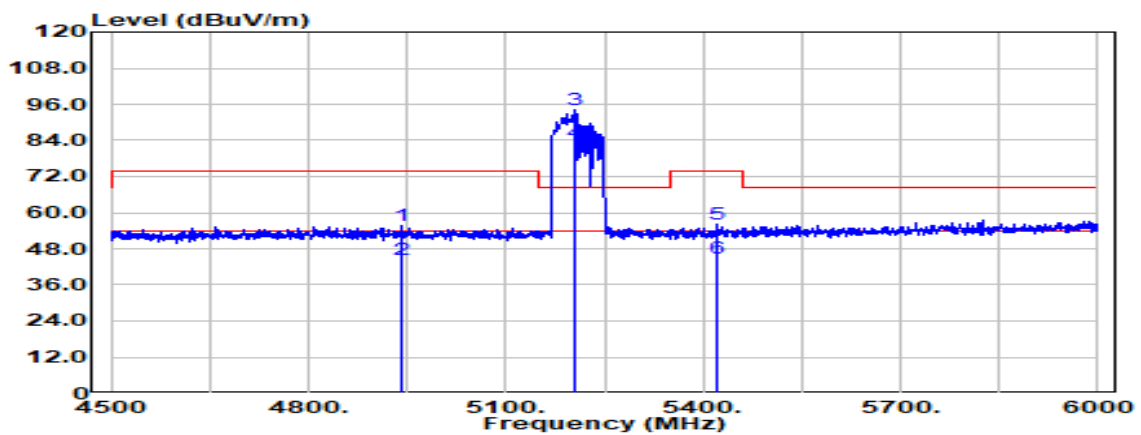


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4942.500       | Peak                           | 37.00                                | 18.67          | 55.66                     | 74.00                     | -18.34         |
| 4942.500       | Average                        | 25.68                                | 18.67          | 44.35                     | 54.00                     | -9.65          |
| 5205.750       | Peak                           | 74.61                                | 19.36          | 93.97                     | --                        | --             |
| 5205.750       | Average                        | 64.15                                | 19.36          | 83.51                     | --                        | --             |
| 5420.250       | Peak                           | 36.04                                | 20.06          | 56.11                     | 74.00                     | -17.89         |
| 5420.250       | Average                        | 24.67                                | 20.06          | 44.74                     | 54.00                     | -9.26          |

Report No.: TMWK2201000141KR

### Test Data for UNII-2a

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5320 MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge               | Test Date     | February 23, 2022 |
| Polarize  | Vertical                | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

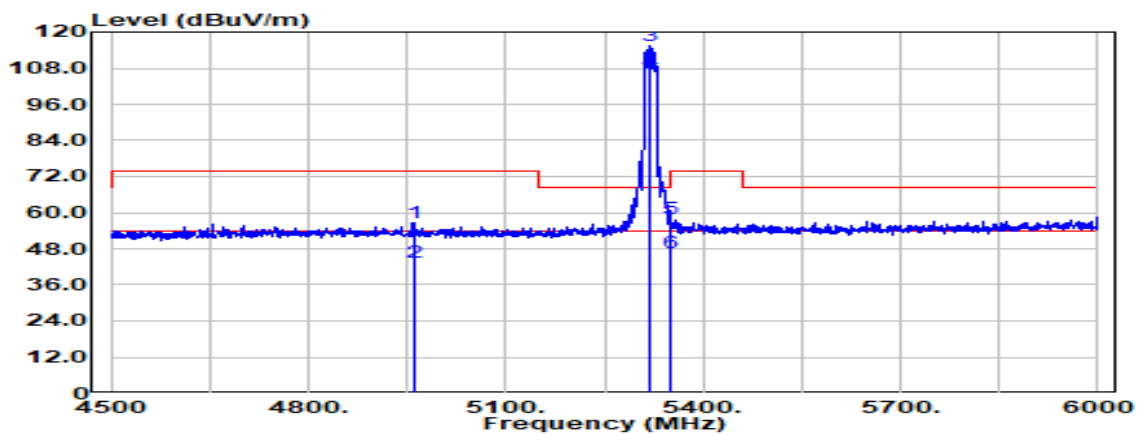

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4959.750       | Peak                           | 38.05                               | 18.71          | 56.75                    | 74.00                    | -17.25         |
| 4959.750       | Average                        | 24.64                               | 18.71          | 43.34                    | 54.00                    | -10.66         |
| 5320.000       | Peak                           | 95.60                               | 19.81          | 115.42                   | --                       | --             |
| 5320.000       | Average                        | 86.85                               | 19.81          | 106.66                   | --                       | --             |
| 5352.000       | Peak                           | 38.00                               | 19.83          | 57.83                    | 74.00                    | -16.17         |
| 5352.000       | Average                        | 26.83                               | 19.83          | 46.66                    | 54.00                    | -7.34          |




Report No.: TMWK2201000141KR

Page: 447 / 939


Rev.: 02

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5320 MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge               | Test Date     | February 23, 2022 |
| Polarize  | Horizontal              | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

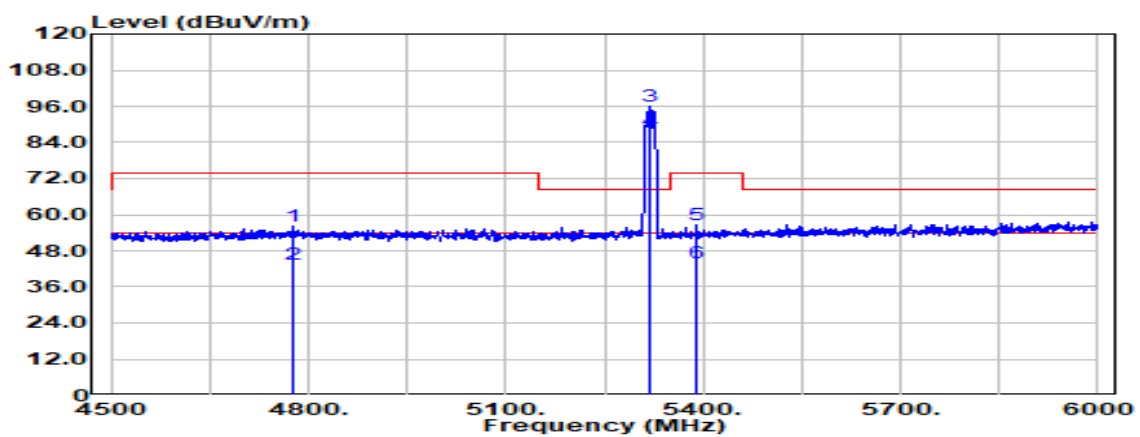

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4776.750       | Peak                           | 37.90                               | 18.47          | 56.37                    | 74.00                    | -17.63         |
| 4776.750       | Average                        | 24.97                               | 18.47          | 43.45                    | 54.00                    | -10.55         |
| 5320.000       | Peak                           | 76.38                               | 19.81          | 96.20                    | - -                      | - -            |
| 5320.000       | Average                        | 67.94                               | 19.81          | 87.75                    | - -                      | - -            |
| 5389.500       | Peak                           | 36.77                               | 20.01          | 56.78                    | 74.00                    | -17.22         |
| 5389.500       | Average                        | 23.81                               | 20.01          | 43.82                    | 54.00                    | -10.18         |

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5320 MHz | Temp/Hum      | 19.9(°C) / 65%RH  |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Vertical                       | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

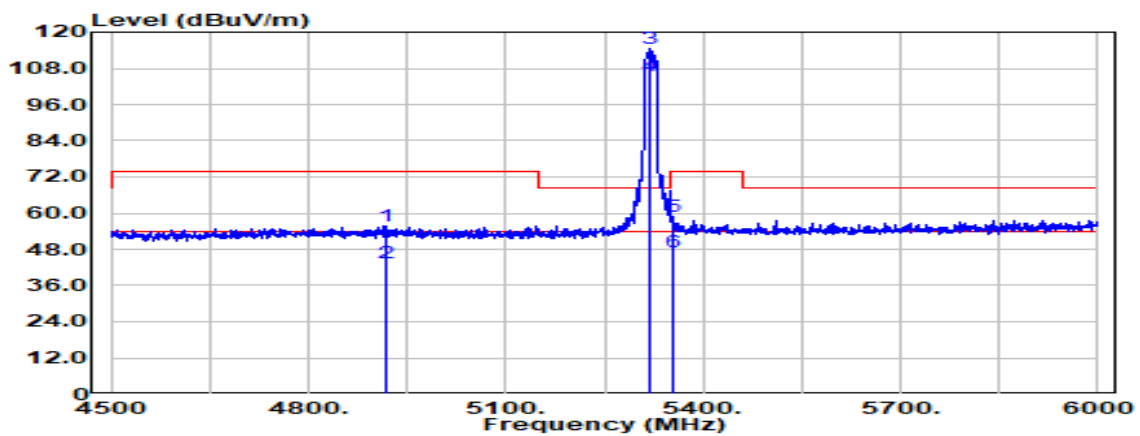

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4919.250       | Peak                           | 37.01                               | 18.62          | 55.63                    | 74.00                    | -18.37         |
| 4919.250       | Average                        | 24.77                               | 18.62          | 43.39                    | 54.00                    | -10.61         |
| 5320.000       | Peak                           | 94.91                               | 19.81          | 114.72                   | --                       | --             |
| 5320.000       | Average                        | 85.83                               | 19.81          | 105.65                   | --                       | --             |
| 5352.750       | Peak                           | 38.83                               | 19.83          | 58.67                    | 74.00                    | -15.33         |
| 5352.750       | Average                        | 27.14                               | 19.83          | 46.97                    | 54.00                    | -7.03          |




Report No.: TMWK2201000141KR

Page: 449 / 939


Rev.: 02

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5320 MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

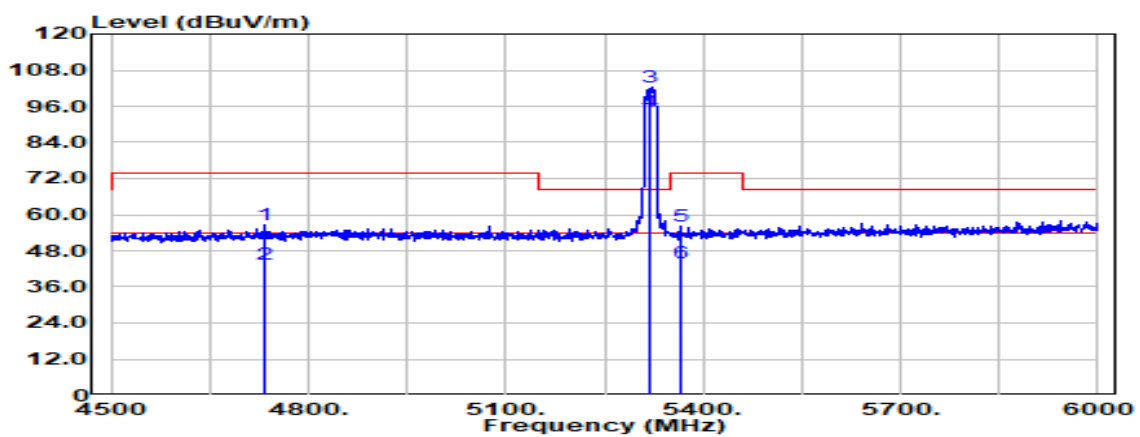

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4734.750       | Peak                           | 38.02                               | 18.48          | 56.50                    | 74.00                    | -17.50         |
| 4734.750       | Average                        | 24.82                               | 18.48          | 43.31                    | 54.00                    | -10.69         |
| 5320.000       | Peak                           | 82.42                               | 19.81          | 102.23                   | - -                      | - -            |
| 5320.000       | Average                        | 74.38                               | 19.81          | 94.20                    | - -                      | - -            |
| 5365.500       | Peak                           | 36.39                               | 19.89          | 56.28                    | 74.00                    | -17.72         |
| 5365.500       | Average                        | 23.81                               | 19.89          | 43.71                    | 54.00                    | -10.29         |

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5310 MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Vertical                       | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

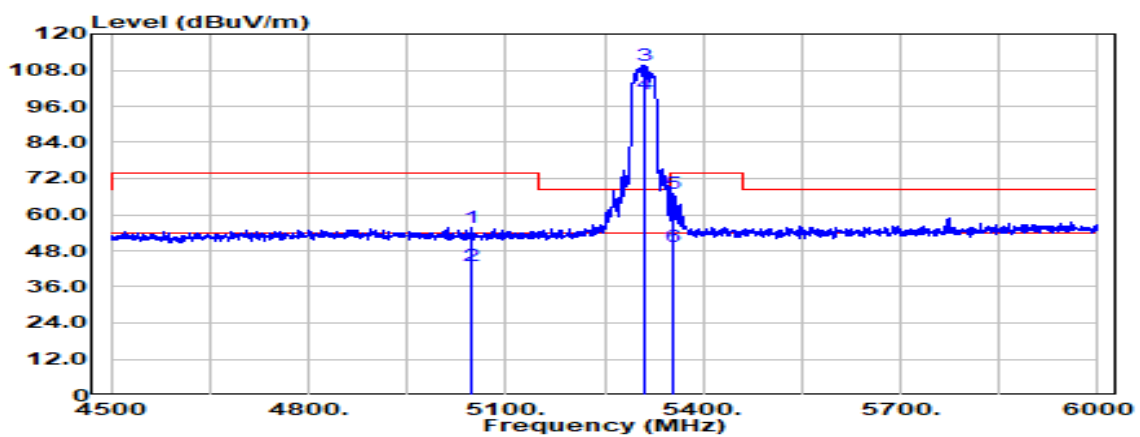

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5049.000       | Peak                           | 36.66                               | 18.90          | 55.56                    | 74.00                    | -18.44         |
| 5049.000       | Average                        | 24.35                               | 18.90          | 43.24                    | 54.00                    | -10.76         |
| 5310.000       | Peak                           | 89.67                               | 19.81          | 109.48                   | - -                      | - -            |
| 5310.000       | Average                        | 80.46                               | 19.81          | 100.27                   | - -                      | - -            |
| 5354.250       | Peak                           | 47.39                               | 19.84          | 67.23                    | 74.00                    | -6.77          |
| 5354.250       | Average                        | 29.73                               | 19.84          | 49.57                    | 54.00                    | -4.43          |




Report No.: TMWK2201000141KR

Page: 451 / 939

Rev.: 02

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5310 MHz | Temp/Hum      | 19.9(°C)/ 65%RH   |
| Test Item | Band Edge                      | Test Date     | February 23, 2022 |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

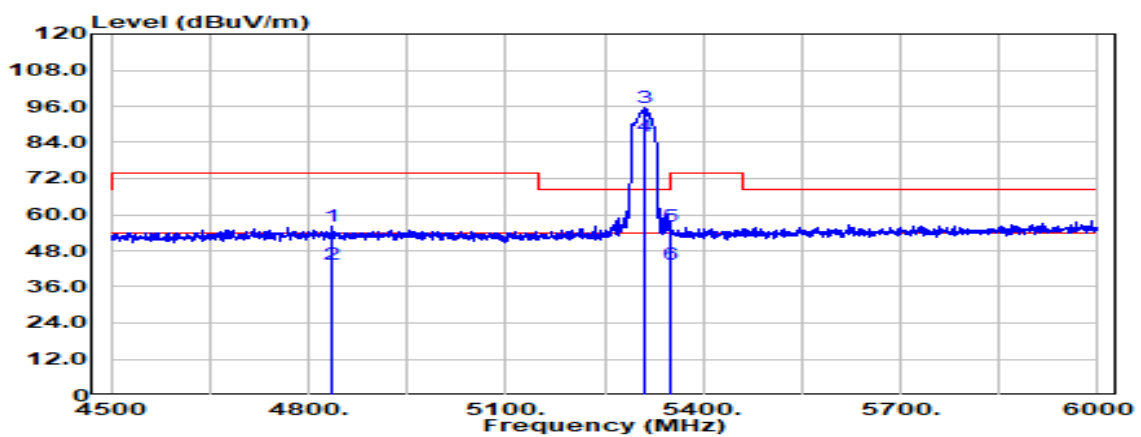

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4835.250       | Peak                           | 37.38                               | 18.56          | 55.94                    | 74.00                    | -18.06         |
| 4835.250       | Average                        | 24.72                               | 18.56          | 43.28                    | 54.00                    | -10.72         |
| 5310.000       | Peak                           | 75.62                               | 19.81          | 95.43                    | - -                      | - -            |
| 5310.000       | Average                        | 66.09                               | 19.81          | 85.90                    | - -                      | - -            |
| 5351.250       | Peak                           | 36.19                               | 19.83          | 56.01                    | 74.00                    | -17.99         |
| 5351.250       | Average                        | 23.68                               | 19.83          | 43.51                    | 54.00                    | -10.49         |