



|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                      | Test Date     | April 7, 2022   |
| Polarize  | Vertical                       | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                 |               |                 |

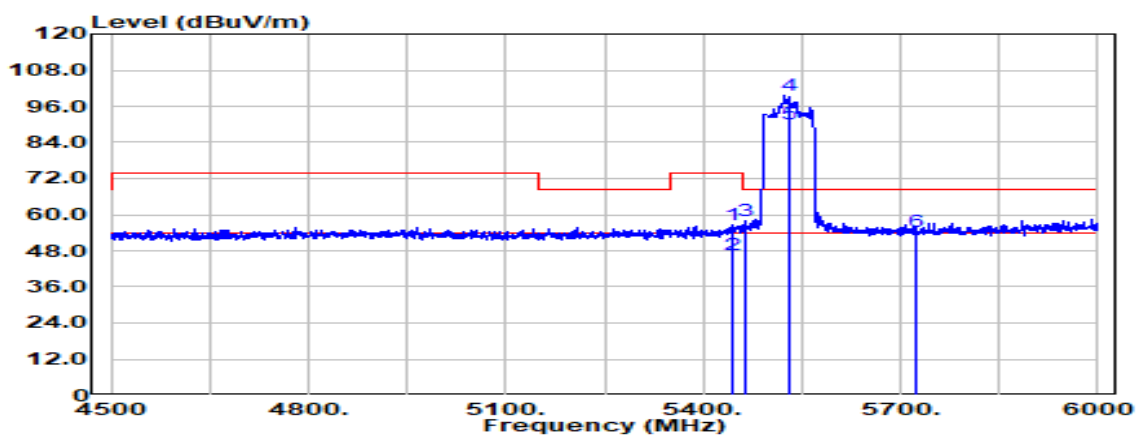


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5444.250       | Peak                           | 36.63                               | 20.07          | 56.70                    | 74.00                    | -17.30         |
| 5444.250       | Average                        | 26.68                               | 20.07          | 46.74                    | 54.00                    | -7.26          |
| 5463.750       | Peak                           | 37.97                               | 20.06          | 58.03                    | 68.20                    | -10.17         |
| 5530.000       | Peak                           | 79.40                               | 20.03          | 99.43                    | - -                      | - -            |
| 5530.000       | Average                        | 70.27                               | 20.03          | 90.30                    | - -                      | - -            |
| 5725.000       | Peak                           | 33.96                               | 20.32          | 54.28                    | 68.20                    | -13.92         |

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                      | Test Date     | April 7, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                 |               |                 |

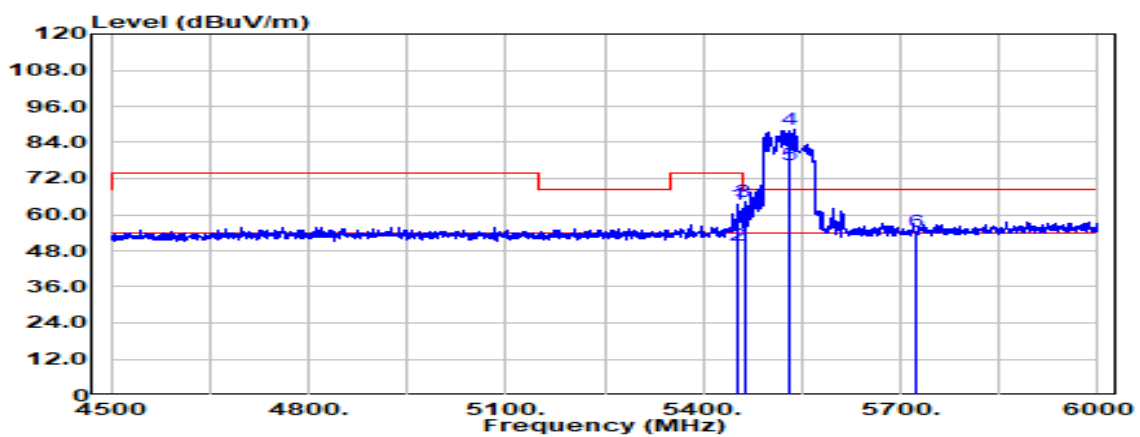

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5452.500       | Peak                           | 43.11                               | 20.07          | 63.18                    | 74.00                    | -10.82         |
| 5452.500       | Average                        | 29.66                               | 20.07          | 49.73                    | 54.00                    | -4.27          |
| 5462.250       | Peak                           | 44.20                               | 20.06          | 64.25                    | 68.20                    | -3.95          |
| 5530.000       | Peak                           | 68.29                               | 20.03          | 88.31                    | - -                      | - -            |
| 5530.000       | Average                        | 56.52                               | 20.03          | 76.55                    | - -                      | - -            |
| 5725.000       | Peak                           | 34.04                               | 20.32          | 54.36                    | 68.20                    | -13.84         |

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

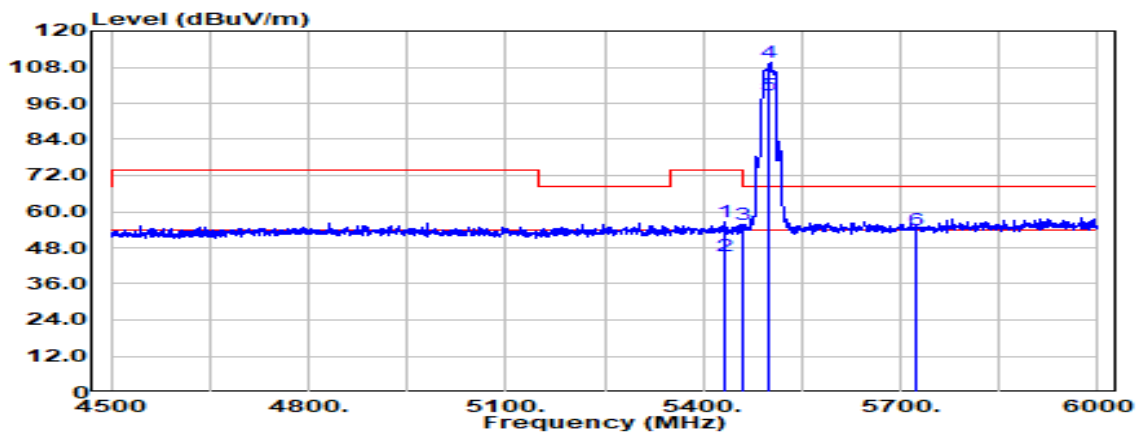

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5432.250       | Peak                           | 36.41                               | 20.07          | 56.48                    | 74.00                    | -17.52         |
| 5432.250       | Average                        | 25.05                               | 20.07          | 45.12                    | 54.00                    | -8.88          |
| 5461.500       | Peak                           | 35.53                               | 20.06          | 55.59                    | 68.20                    | -12.61         |
| 5500.000       | Peak                           | 89.56                               | 20.02          | 109.58                   | --                       | --             |
| 5500.000       | Average                        | 78.54                               | 20.02          | 98.56                    | --                       | --             |
| 5725.000       | Peak                           | 33.35                               | 20.32          | 53.67                    | 68.20                    | -14.53         |




Report No.: TMWK2201000141KR

Page: 591 / 939

Rev.: 02

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

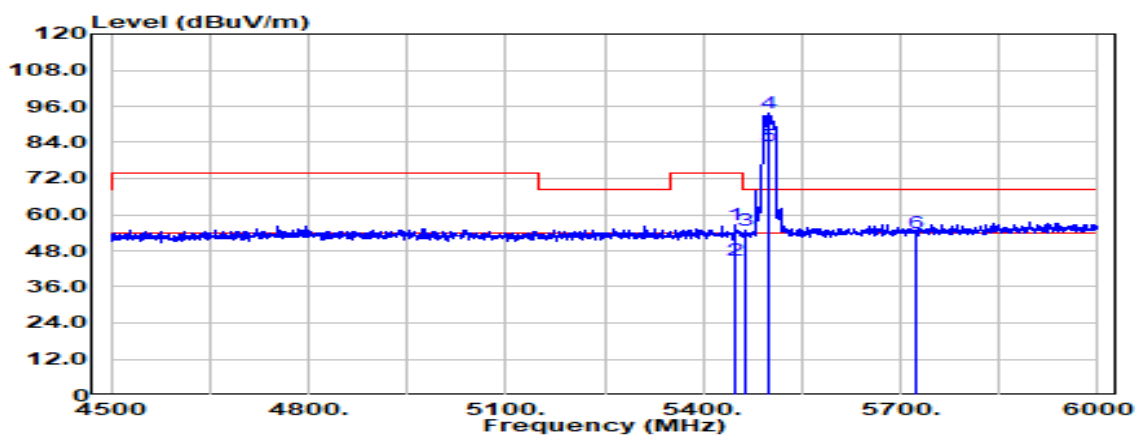


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5447.250       | Peak                           | 36.52                               | 20.07          | 56.59                    | 74.00                    | -17.41         |
| 5447.250       | Average                        | 24.86                               | 20.07          | 44.93                    | 54.00                    | -9.07          |
| 5465.250       | Peak                           | 34.60                               | 20.05          | 54.66                    | 68.20                    | -13.54         |
| 5500.000       | Peak                           | 73.87                               | 20.02          | 93.89                    | - -                      | - -            |
| 5500.000       | Average                        | 62.64                               | 20.02          | 82.66                    | - -                      | - -            |
| 5725.000       | Peak                           | 33.58                               | 20.32          | 53.90                    | 68.20                    | -14.30         |



Report No.: TMWK2201000141KR

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

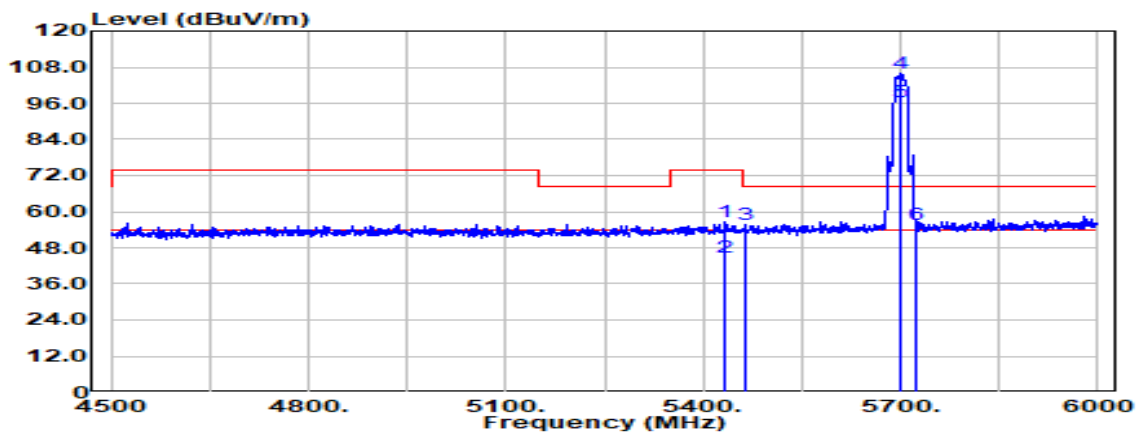

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5433.000       | Peak                           | 36.52                               | 20.07          | 56.58                    | 74.00                    | -17.42         |
| 5433.000       | Average                        | 24.90                               | 20.07          | 44.97                    | 54.00                    | -9.03          |
| 5465.250       | Peak                           | 35.64                               | 20.05          | 55.69                    | 68.20                    | -12.51         |
| 5700.000       | Peak                           | 85.75                               | 20.16          | 105.91                   | --                       | --             |
| 5700.000       | Average                        | 76.51                               | 20.16          | 96.67                    | --                       | --             |
| 5725.000       | Peak                           | 35.36                               | 20.32          | 55.68                    | 68.20                    | -12.52         |




Report No.: TMWK2201000141KR

Page: 593 / 939


Rev.: 02

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

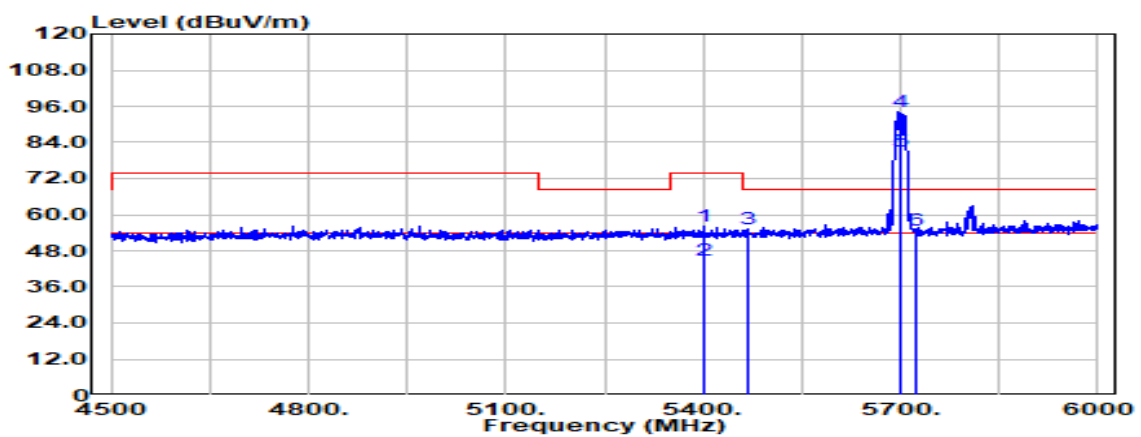


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5400.750       | Peak                           | 36.23                               | 20.06          | 56.29                    | 74.00                    | -17.71         |
| 5400.750       | Average                        | 24.77                               | 20.06          | 44.83                    | 54.00                    | -9.17          |
| 5469.000       | Peak                           | 34.98                               | 20.05          | 55.03                    | 68.20                    | -13.17         |
| 5700.000       | Peak                           | 74.21                               | 20.16          | 94.37                    | - -                      | - -            |
| 5700.000       | Average                        | 61.02                               | 20.16          | 81.18                    | - -                      | - -            |
| 5725.000       | Peak                           | 34.30                               | 20.32          | 54.62                    | 68.20                    | -13.58         |

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022    |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

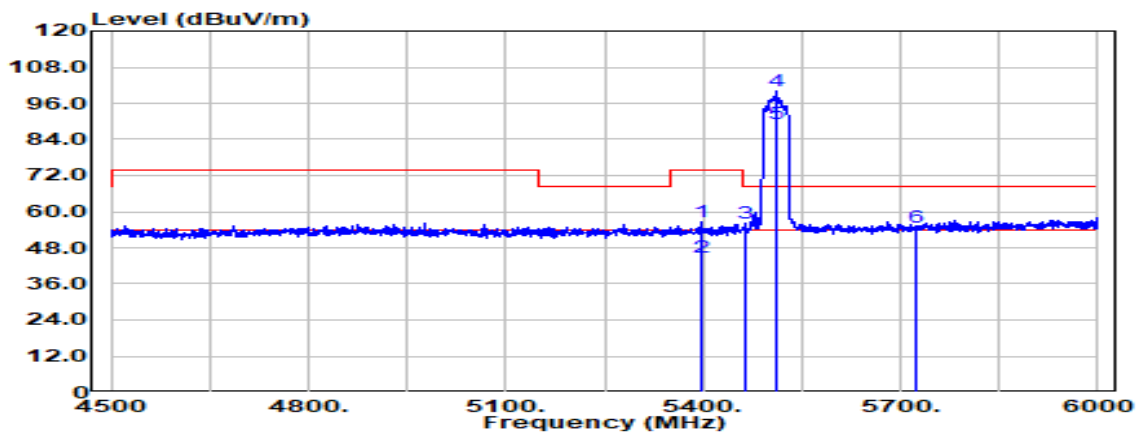

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5397.000       | Peak                           | 36.46                               | 20.05          | 56.50                    | 74.00                    | -17.50         |
| 5397.000       | Average                        | 24.74                               | 20.05          | 44.79                    | 54.00                    | -9.21          |
| 5465.250       | Peak                           | 35.93                               | 20.05          | 55.99                    | 68.20                    | -12.21         |
| 5510.000       | Peak                           | 80.09                               | 20.02          | 100.11                   | --                       | --             |
| 5510.000       | Average                        | 68.99                               | 20.02          | 89.01                    | --                       | --             |
| 5725.000       | Peak                           | 34.34                               | 20.32          | 54.66                    | 68.20                    | -13.54         |

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

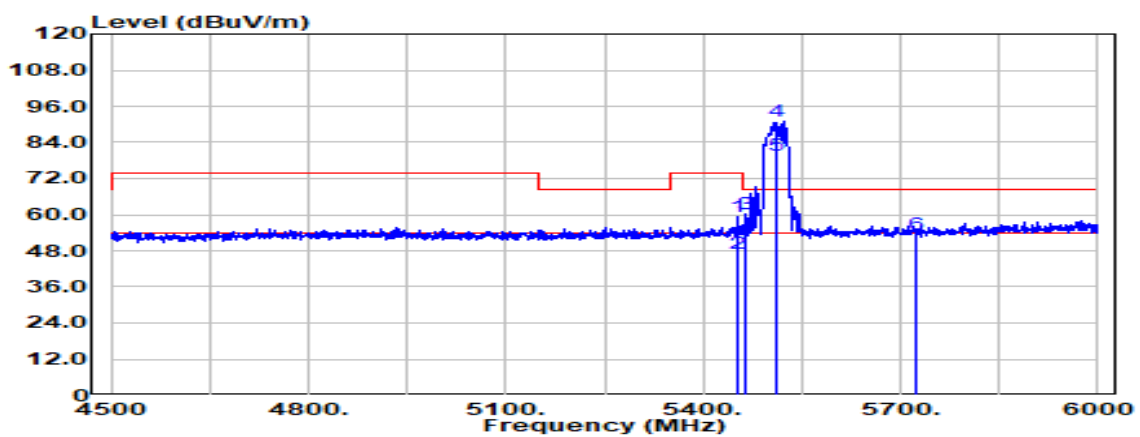


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5454.000       | Peak                           | 39.03                               | 20.07          | 59.10                    | 74.00                    | -14.90         |
| 5454.000       | Average                        | 27.05                               | 20.07          | 47.11                    | 54.00                    | -6.89          |
| 5466.000       | Peak                           | 40.11                               | 20.05          | 60.17                    | 68.20                    | -8.03          |
| 5510.000       | Peak                           | 71.05                               | 20.02          | 91.07                    | - -                      | - -            |
| 5510.000       | Average                        | 59.46                               | 20.02          | 79.48                    | - -                      | - -            |
| 5725.000       | Peak                           | 32.96                               | 20.32          | 53.28                    | 68.20                    | -14.92         |



Report No.: TMWK2201000141KR

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022    |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

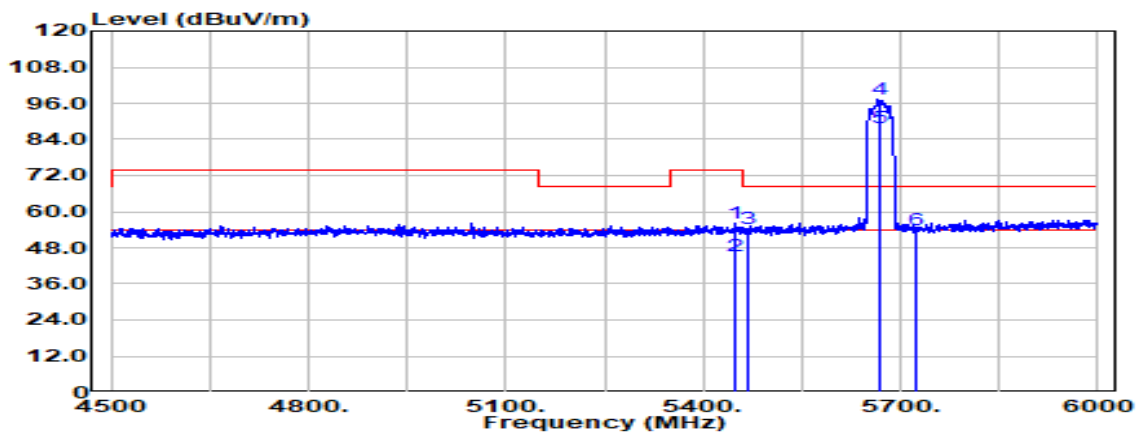

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5448.750       | Peak                           | 35.87                               | 20.07          | 55.94                    | 74.00                    | -18.06         |
| 5448.750       | Average                        | 25.41                               | 20.07          | 45.48                    | 54.00                    | -8.52          |
| 5469.000       | Peak                           | 34.50                               | 20.05          | 54.55                    | 68.20                    | -13.65         |
| 5670.000       | Peak                           | 77.10                               | 20.15          | 97.26                    | --                       | --             |
| 5670.000       | Average                        | 67.71                               | 20.15          | 87.86                    | --                       | --             |
| 5725.000       | Peak                           | 33.42                               | 20.32          | 53.74                    | 68.20                    | -14.46         |




Report No.: TMWK2201000141KR

Page: 597 / 939

Rev.: 02

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

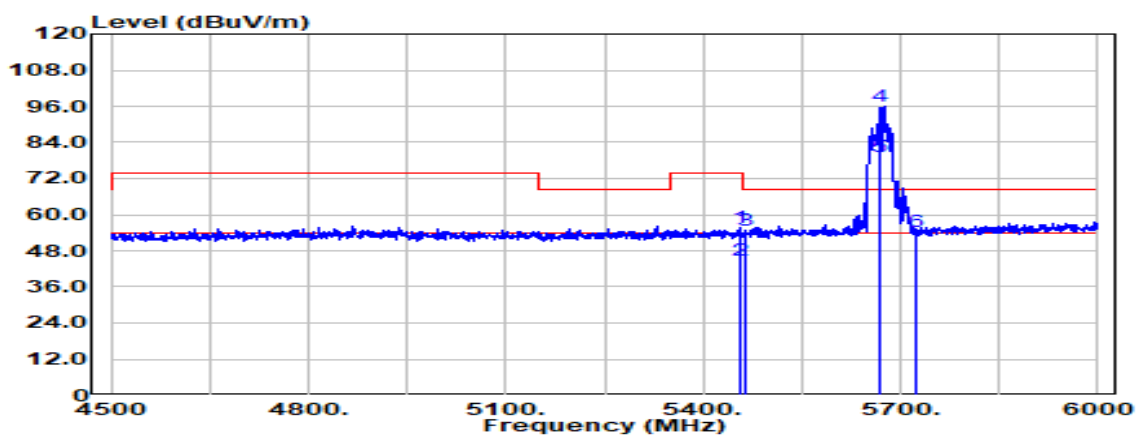


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5457.000       | Peak                           | 35.58                               | 20.06          | 55.65                    | 74.00                    | -18.35         |
| 5457.000       | Average                        | 24.76                               | 20.06          | 44.83                    | 54.00                    | -9.17          |
| 5463.750       | Peak                           | 34.82                               | 20.06          | 54.88                    | 68.20                    | -13.32         |
| 5670.000       | Peak                           | 75.81                               | 20.15          | 95.96                    | - -                      | - -            |
| 5670.000       | Average                        | 59.08                               | 20.15          | 79.23                    | - -                      | - -            |
| 5725.000       | Peak                           | 33.86                               | 20.32          | 54.18                    | 68.20                    | -14.02         |




Report No.: TMWK2201000141KR

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                     | Test Date     | April 7, 2022    |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

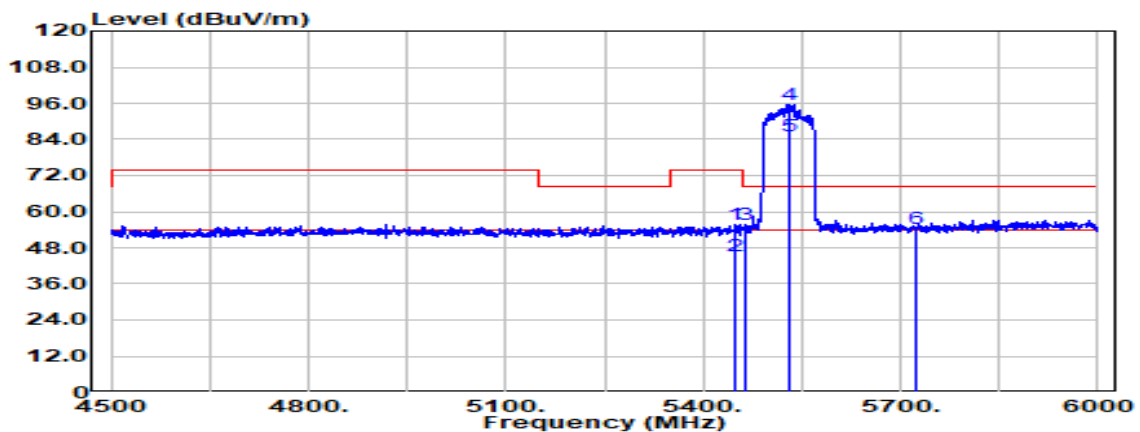

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5448.000       | Peak                           | 35.71                               | 20.07          | 55.78                    | 74.00                    | -18.22         |
| 5448.000       | Average                        | 25.37                               | 20.07          | 45.44                    | 54.00                    | -8.56          |
| 5463.000       | Peak                           | 35.43                               | 20.06          | 55.49                    | 68.20                    | -12.71         |
| 5530.000       | Peak                           | 75.72                               | 20.03          | 95.75                    | --                       | --             |
| 5530.000       | Average                        | 64.92                               | 20.03          | 84.95                    | --                       | --             |
| 5725.000       | Peak                           | 33.82                               | 20.32          | 54.14                    | 68.20                    | -14.06         |


|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum      | 21.1(°C)/ 51%RH |
| Test Item | Band Edge                     | Test Date     | April 8, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

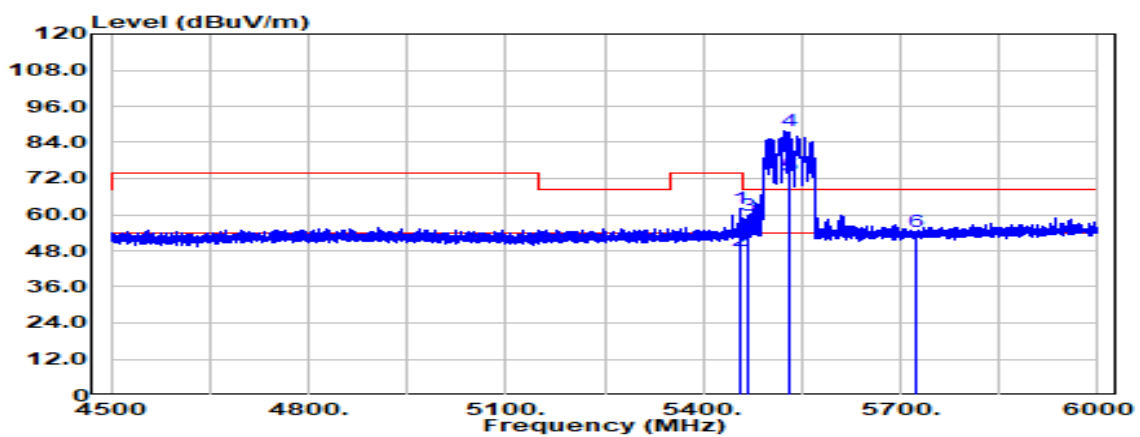

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5456.250       | Peak                           | 41.85                                | 20.06          | 61.91                     | 74.00                     | -12.09         |
| 5456.250       | Average                        | 27.82                                | 20.06          | 47.88                     | 54.00                     | -6.12          |
| 5466.563       | Peak                           | 39.58                                | 20.05          | 59.63                     | 68.20                     | -8.57          |
| 5530.000       | Peak                           | 67.85                                | 20.03          | 87.87                     | - -                       | - -            |
| 5530.000       | Average                        | 52.91                                | 20.03          | 72.93                     | - -                       | - -            |
| 5725.000       | Peak                           | 34.12                                | 20.32          | 54.44                     | 68.20                     | -13.76         |


### Test Data for UNII-3

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5745 MHz | Temp/Hum      | 21.6(°C) / 52%RH |
| Test Item | Band Edge                      | Test Date     | April 2, 2022    |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

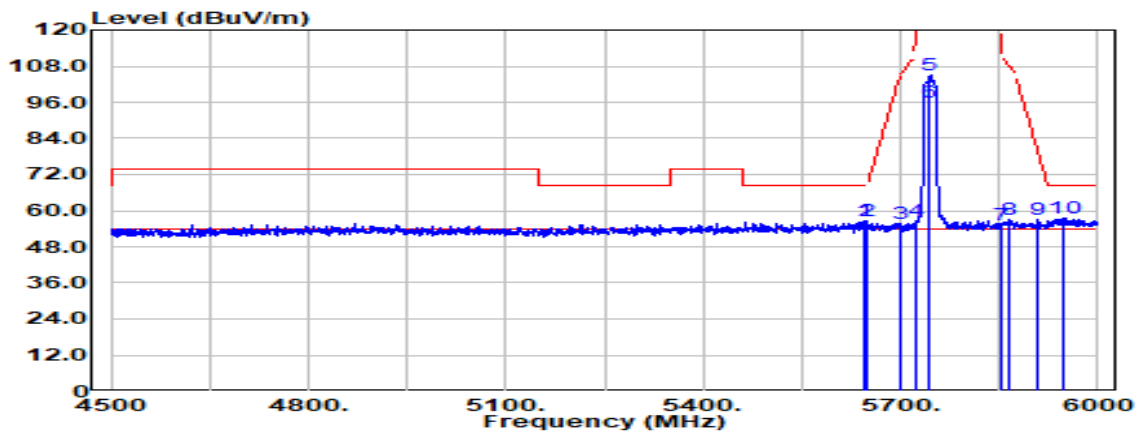

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5645.250       | Peak                           | 36.65                               | 20.14          | 56.79                    | 68.20                    | -11.41         |
| 5650.500       | Peak                           | 36.46                               | 20.15          | 56.61                    | 68.57                    | -11.96         |
| 5701.500       | Peak                           | 35.41                               | 20.17          | 55.58                    | 105.62                   | -50.04         |
| 5723.250       | Peak                           | 36.50                               | 20.31          | 56.81                    | 118.21                   | -61.40         |
| 5745.000       | Peak                           | 84.63                               | 20.45          | 105.08                   | - -                      | - -            |
| 5745.000       | Average                        | 75.40                               | 20.45          | 95.85                    | - -                      | - -            |
| 5853.000       | Peak                           | 34.62                               | 20.74          | 55.37                    | 115.36                   | -59.99         |
| 5864.250       | Peak                           | 36.29                               | 20.79          | 57.08                    | 108.21                   | -51.13         |
| 5909.250       | Peak                           | 36.06                               | 20.99          | 57.05                    | 79.82                    | -22.77         |
| 5949.000       | Peak                           | 36.17                               | 21.16          | 57.33                    | 68.20                    | -10.87         |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5745 MHz | Temp/Hum      | 23.1(°C) / 57%RH |
| Test Item | Band Edge                      | Test Date     | April 6, 2022    |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

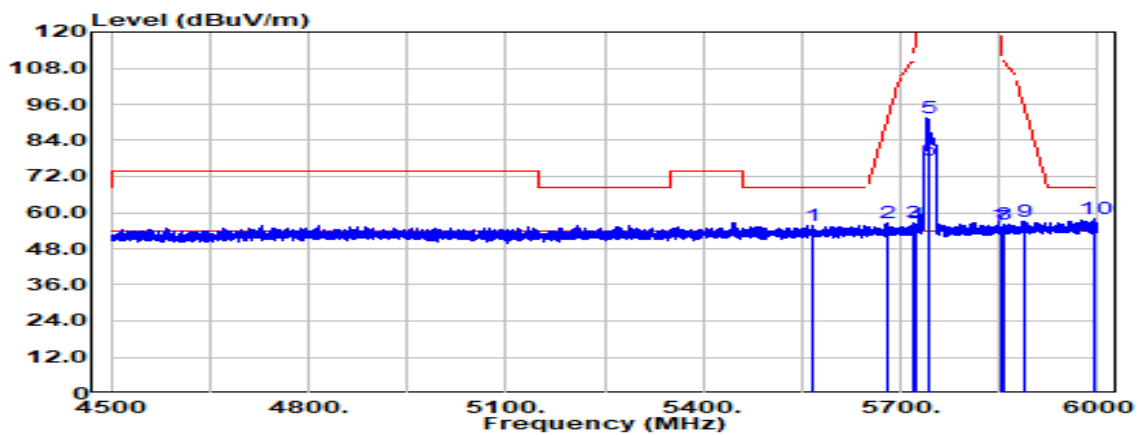

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5567.438       | Peak                           | 35.85                               | 20.04          | 55.89                    | 68.20                    | -12.31         |
| 5680.125       | Peak                           | 36.26                               | 20.16          | 56.42                    | 90.53                    | -34.11         |
| 5718.188       | Peak                           | 36.26                               | 20.28          | 56.53                    | 110.29                   | -53.76         |
| 5722.500       | Peak                           | 35.76                               | 20.30          | 56.06                    | 116.50                   | -60.44         |
| 5745.000       | Peak                           | 71.09                               | 20.45          | 91.54                    | - -                      | - -            |
| 5745.000       | Average                        | 56.97                               | 20.45          | 77.41                    | - -                      | - -            |
| 5851.500       | Peak                           | 34.72                               | 20.74          | 55.46                    | 118.78                   | -63.32         |
| 5856.750       | Peak                           | 35.24                               | 20.76          | 56.00                    | 110.31                   | -54.31         |
| 5886.750       | Peak                           | 36.36                               | 20.89          | 57.26                    | 96.48                    | -39.22         |
| 5993.625       | Peak                           | 36.81                               | 21.17          | 57.98                    | 68.20                    | -10.22         |




Report No.: TMWK2201000141KR

Page: 602 / 939

Rev.: 02

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5825 MHz | Temp/Hum      | 21.6(°C) / 52%RH |
| Test Item | Band Edge                      | Test Date     | April 2, 2022    |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

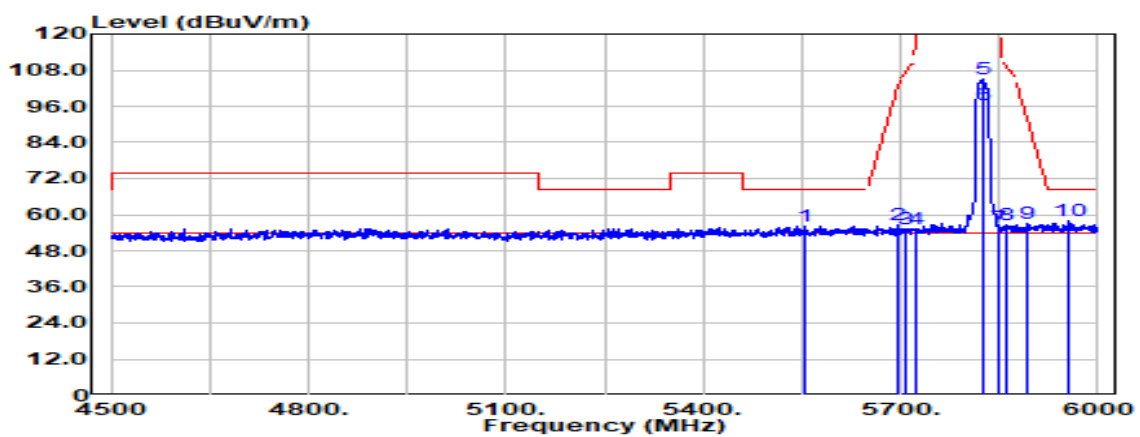

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5555.250       | Peak                           | 36.30                               | 20.03          | 56.34                    | 68.20                    | -11.86         |
| 5697.750       | Peak                           | 36.25                               | 20.16          | 56.41                    | 103.54                   | -47.13         |
| 5709.000       | Peak                           | 35.20                               | 20.22          | 55.42                    | 107.72                   | -52.30         |
| 5723.250       | Peak                           | 35.14                               | 20.31          | 55.45                    | 118.21                   | -62.76         |
| 5825.000       | Peak                           | 84.63                               | 20.64          | 105.27                   | --                       | --             |
| 5825.000       | Average                        | 75.89                               | 20.64          | 96.53                    | --                       | --             |
| 5850.750       | Peak                           | 35.00                               | 20.73          | 55.73                    | 120.49                   | -64.76         |
| 5862.750       | Peak                           | 35.85                               | 20.79          | 56.64                    | 108.63                   | -51.99         |
| 5893.500       | Peak                           | 35.97                               | 20.92          | 56.90                    | 91.47                    | -34.58         |
| 5957.250       | Peak                           | 36.82                               | 21.16          | 57.99                    | 68.20                    | -10.21         |



Report No.: TMWK2201000141KR

Page: 603 / 939

Rev.: 02

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5825 MHz | Temp/Hum      | 23.1(°C) / 57%RH |
| Test Item | Band Edge                      | Test Date     | April 6, 2022    |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |



| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5508.000       | Peak                           | 36.66                               | 20.02          | 56.68                    | 68.20                    | -11.52         |
| 5680.500       | Peak                           | 35.99                               | 20.16          | 56.14                    | 90.81                    | -34.66         |
| 5708.063       | Peak                           | 36.98                               | 20.21          | 57.20                    | 107.46                   | -50.26         |
| 5722.875       | Peak                           | 34.83                               | 20.31          | 55.14                    | 117.36                   | -62.22         |
| 5825.000       | Peak                           | 66.45                               | 20.64          | 87.08                    | - -                      | - -            |
| 5825.000       | Average                        | 52.77                               | 20.64          | 73.40                    | - -                      | - -            |
| 5853.375       | Peak                           | 34.85                               | 20.74          | 55.59                    | 114.50                   | -58.91         |
| 5861.813       | Peak                           | 35.87                               | 20.78          | 56.65                    | 108.89                   | -52.24         |
| 5922.375       | Peak                           | 36.10                               | 21.04          | 57.14                    | 70.13                    | -12.99         |
| 5999.250       | Peak                           | 35.94                               | 21.17          | 57.11                    | 68.20                    | -11.09         |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5755 MHz | Temp/Hum      | 23.1(°C) / 57%RH |
| Test Item | Band Edge                      | Test Date     | April 6, 2022    |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |



| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5510.438       | Peak                           | 36.67                               | 20.02          | 56.69                    | 68.20                    | -11.51         |
| 5652.000       | Peak                           | 37.11                               | 20.15          | 57.26                    | 69.69                    | -12.43         |
| 5714.250       | Peak                           | 37.05                               | 20.25          | 57.30                    | 109.19                   | -51.89         |
| 5722.688       | Peak                           | 38.70                               | 20.31          | 59.00                    | 116.93                   | -57.93         |
| 5755.000       | Peak                           | 82.31                               | 20.49          | 102.80                   | --                       | --             |
| 5755.000       | Average                        | 74.12                               | 20.49          | 94.60                    | --                       | --             |
| 5853.000       | Peak                           | 36.08                               | 20.74          | 56.83                    | 115.36                   | -58.53         |
| 5862.375       | Peak                           | 36.62                               | 20.78          | 57.41                    | 108.73                   | -51.33         |
| 5922.000       | Peak                           | 35.99                               | 21.04          | 57.03                    | 70.41                    | -13.38         |
| 5949.563       | Peak                           | 37.23                               | 21.16          | 58.39                    | 68.20                    | -9.81          |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5755 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                      | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |



| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5503.500       | Peak                           | 36.10                               | 20.02          | 56.12                    | 68.20                    | -12.08         |
| 5672.250       | Peak                           | 36.27                               | 20.15          | 56.43                    | 84.71                    | -28.28         |
| 5706.000       | Peak                           | 40.94                               | 20.20          | 61.14                    | 106.88                   | -45.75         |
| 5724.750       | Peak                           | 39.29                               | 20.32          | 59.61                    | 121.63                   | -62.02         |
| 5755.000       | Peak                           | 74.08                               | 20.49          | 94.57                    | - -                      | - -            |
| 5755.000       | Average                        | 55.59                               | 20.49          | 76.07                    | - -                      | - -            |
| 5850.750       | Peak                           | 34.82                               | 20.73          | 55.55                    | 120.49                   | -64.94         |
| 5865.000       | Peak                           | 36.00                               | 20.80          | 56.80                    | 108.00                   | -51.20         |
| 5913.000       | Peak                           | 35.87                               | 21.00          | 56.87                    | 77.05                    | -20.18         |
| 5986.500       | Peak                           | 37.05                               | 21.17          | 58.22                    | 68.20                    | -9.98          |




Report No.: TMWK2201000141KR

Page: 606 / 939

Rev.: 02

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5795 MHz | Temp/Hum      | 23.1(°C) / 57%RH |
| Test Item | Band Edge                      | Test Date     | April 6, 2022    |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

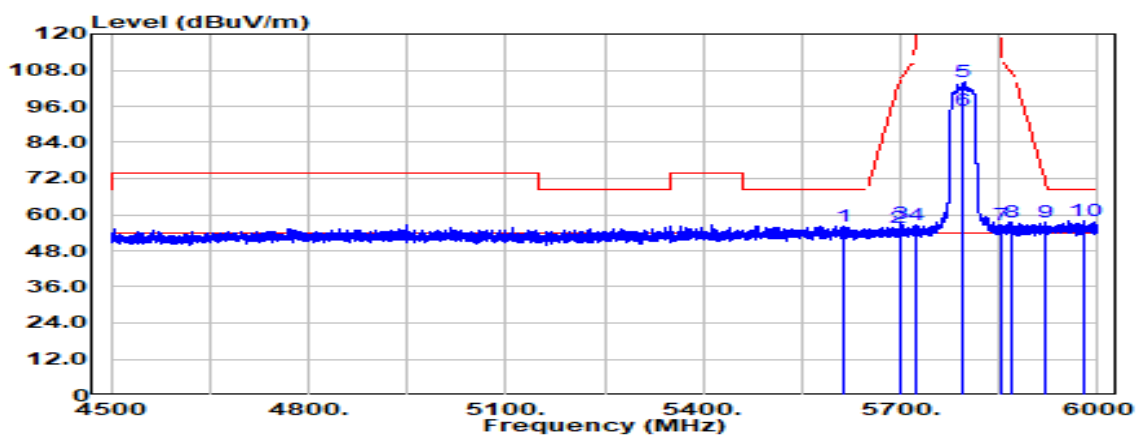


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5615.063       | Peak                           | 36.28                               | 20.09          | 56.37                    | 68.20                    | -11.83         |
| 5698.000       | Peak                           | 35.54                               | 20.16          | 55.70                    | 103.73                   | -48.02         |
| 5700.750       | Peak                           | 36.87                               | 20.16          | 57.04                    | 105.41                   | -48.37         |
| 5722.500       | Peak                           | 36.21                               | 20.30          | 56.51                    | 116.50                   | -59.99         |
| 5795.000       | Peak                           | 83.53                               | 20.53          | 104.06                   | -                        | -              |
| 5795.000       | Average                        | 74.32                               | 20.53          | 94.86                    | -                        | -              |
| 5852.250       | Peak                           | 35.92                               | 20.74          | 56.66                    | 117.07                   | -60.41         |
| 5868.188       | Peak                           | 36.86                               | 20.81          | 57.67                    | 107.11                   | -49.44         |
| 5918.250       | Peak                           | 36.65                               | 21.03          | 57.68                    | 73.18                    | -15.50         |
| 5977.313       | Peak                           | 36.98                               | 21.17          | 58.14                    | 68.20                    | -10.06         |




Report No.: TMWK2201000141KR

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5795 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                      | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

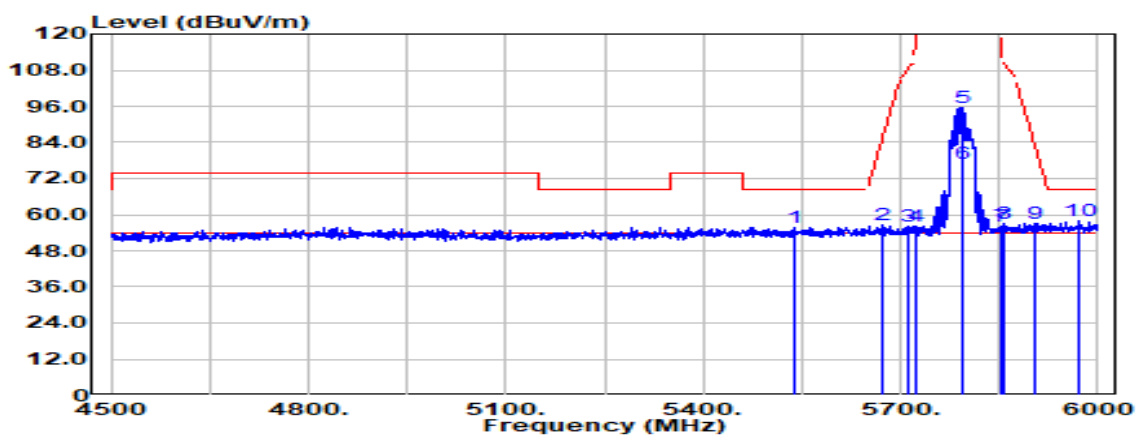


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5537.250       | Peak                           | 35.81                               | 20.03          | 55.84                    | 68.20                    | -12.36         |
| 5673.750       | Peak                           | 36.52                               | 20.15          | 56.67                    | 85.82                    | -29.14         |
| 5713.500       | Peak                           | 35.77                               | 20.25          | 56.02                    | 108.98                   | -52.97         |
| 5722.500       | Peak                           | 35.85                               | 20.30          | 56.16                    | 116.50                   | -60.34         |
| 5795.000       | Peak                           | 74.93                               | 20.53          | 95.46                    | --                       | --             |
| 5795.000       | Average                        | 56.48                               | 20.53          | 77.01                    | --                       | --             |
| 5853.000       | Peak                           | 35.33                               | 20.74          | 56.07                    | 115.36                   | -59.28         |
| 5856.750       | Peak                           | 36.20                               | 20.76          | 56.96                    | 110.31                   | -53.35         |
| 5905.500       | Peak                           | 36.07                               | 20.97          | 57.04                    | 82.59                    | -25.55         |
| 5971.500       | Peak                           | 36.79                               | 21.16          | 57.96                    | 68.20                    | -10.24         |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                      | Test Date     | April 7, 2022    |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

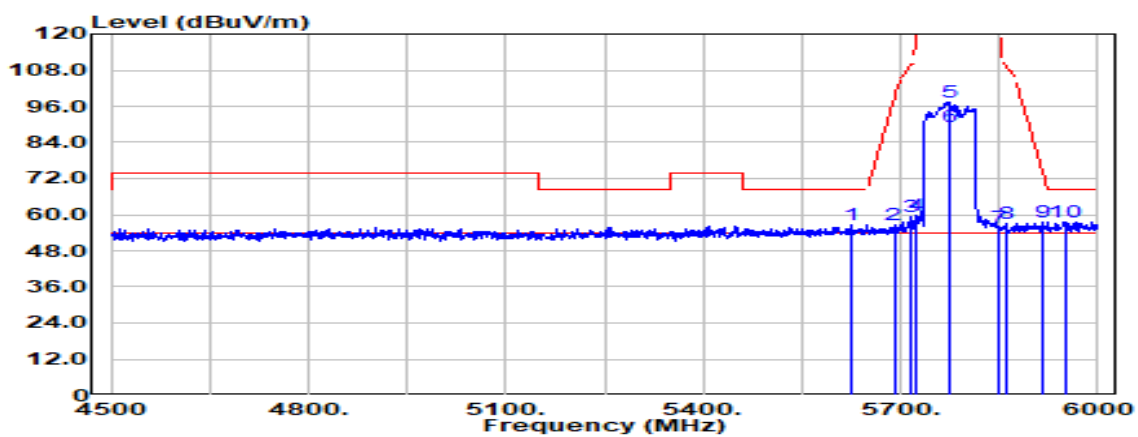

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5626.500       | Peak                           | 36.52                               | 20.11          | 56.63                    | 68.20                    | -11.57         |
| 5690.250       | Peak                           | 36.44                               | 20.16          | 56.60                    | 98.01                    | -41.41         |
| 5714.250       | Peak                           | 39.14                               | 20.25          | 59.39                    | 109.19                   | -49.81         |
| 5721.750       | Peak                           | 39.41                               | 20.30          | 59.71                    | 114.79                   | -55.09         |
| 5775.000       | Peak                           | 76.97                               | 20.51          | 97.48                    | - -                      | - -            |
| 5775.000       | Average                        | 68.92                               | 20.51          | 89.43                    | - -                      | - -            |
| 5850.750       | Peak                           | 35.09                               | 20.73          | 55.83                    | 120.49                   | -64.66         |
| 5861.250       | Peak                           | 36.19                               | 20.78          | 56.97                    | 109.05                   | -52.08         |
| 5915.250       | Peak                           | 36.39                               | 21.01          | 57.40                    | 75.39                    | -17.99         |
| 5949.750       | Peak                           | 36.36                               | 21.16          | 57.52                    | 68.20                    | -10.68         |


|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                      | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

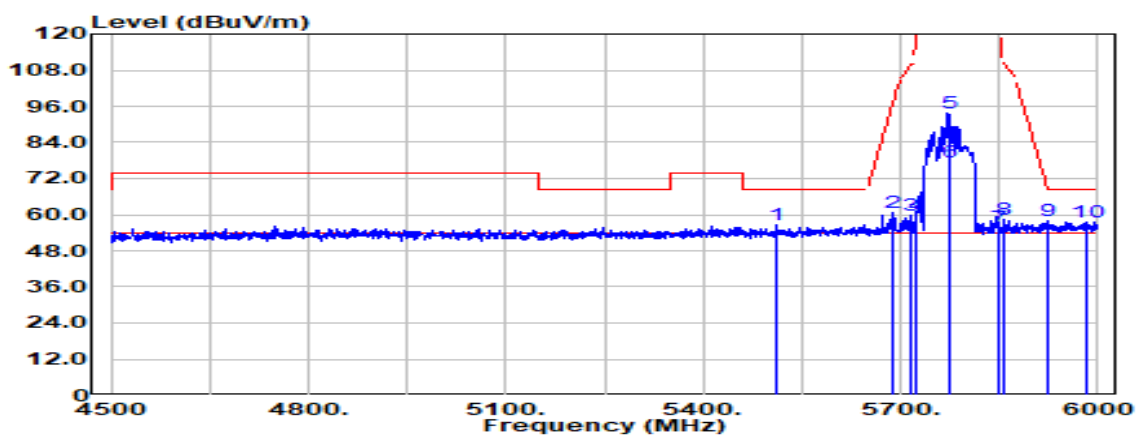

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5510.250       | Peak                           | 36.73                               | 20.02          | 56.75                    | 68.20                    | -11.45         |
| 5686.500       | Peak                           | 40.36                               | 20.16          | 60.52                    | 95.24                    | -34.72         |
| 5717.250       | Peak                           | 39.51                               | 20.27          | 59.78                    | 110.03                   | -50.25         |
| 5724.750       | Peak                           | 39.26                               | 20.32          | 59.58                    | 121.63                   | -62.05         |
| 5775.000       | Peak                           | 73.07                               | 20.51          | 93.58                    | - -                      | - -            |
| 5775.000       | Average                        | 56.79                               | 20.51          | 77.30                    | - -                      | - -            |
| 5850.750       | Peak                           | 35.01                               | 20.73          | 55.74                    | 120.49                   | -64.75         |
| 5858.250       | Peak                           | 37.60                               | 20.77          | 58.37                    | 109.89                   | -51.52         |
| 5923.500       | Peak                           | 37.06                               | 21.05          | 58.11                    | 69.31                    | -11.20         |
| 5982.750       | Peak                           | 36.56                               | 21.17          | 57.73                    | 68.20                    | -10.47         |

Report No.: TMWK2201000141KR

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745MHz | Temp/Hum      | 22.9(°C)/ 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022   |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

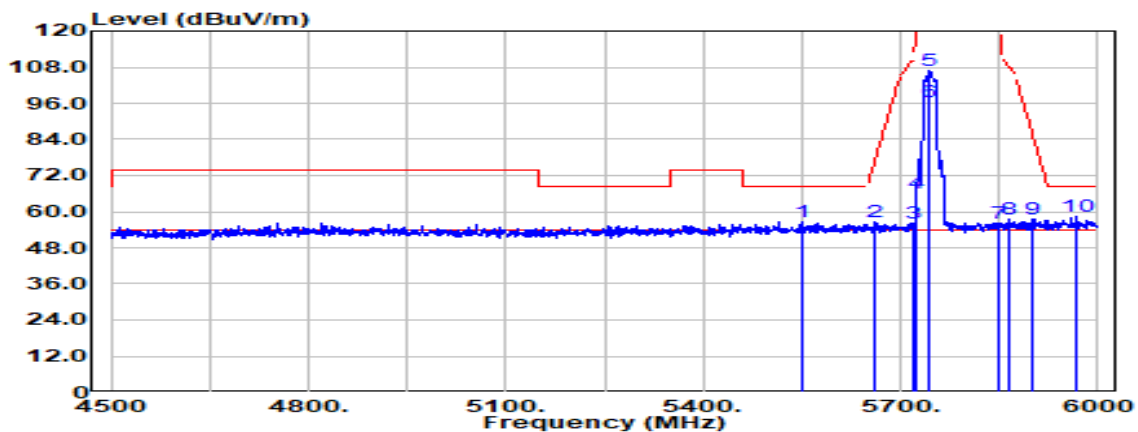

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5549.250       | Peak                           | 36.60                               | 20.03          | 56.63                    | 68.20                    | -11.57         |
| 5660.250       | Peak                           | 36.23                               | 20.15          | 56.39                    | 75.81                    | -19.42         |
| 5718.000       | Peak                           | 36.08                               | 20.28          | 56.36                    | 110.24                   | -53.88         |
| 5724.750       | Peak                           | 45.68                               | 20.32          | 66.00                    | 121.63                   | -55.63         |
| 5745.000       | Peak                           | 86.20                               | 20.45          | 106.65                   | - -                      | - -            |
| 5745.000       | Average                        | 76.23                               | 20.45          | 96.67                    | - -                      | - -            |
| 5850.750       | Peak                           | 35.48                               | 20.73          | 56.22                    | 120.49                   | -64.27         |
| 5866.500       | Peak                           | 36.65                               | 20.80          | 57.45                    | 107.58                   | -50.13         |
| 5899.500       | Peak                           | 36.52                               | 20.95          | 57.47                    | 87.03                    | -29.56         |
| 5968.500       | Peak                           | 37.08                               | 21.16          | 58.24                    | 68.20                    | -9.96          |




Report No.: TMWK2201000141KR

Page: 611 / 939


Rev.: 02

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE20 / 5745MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

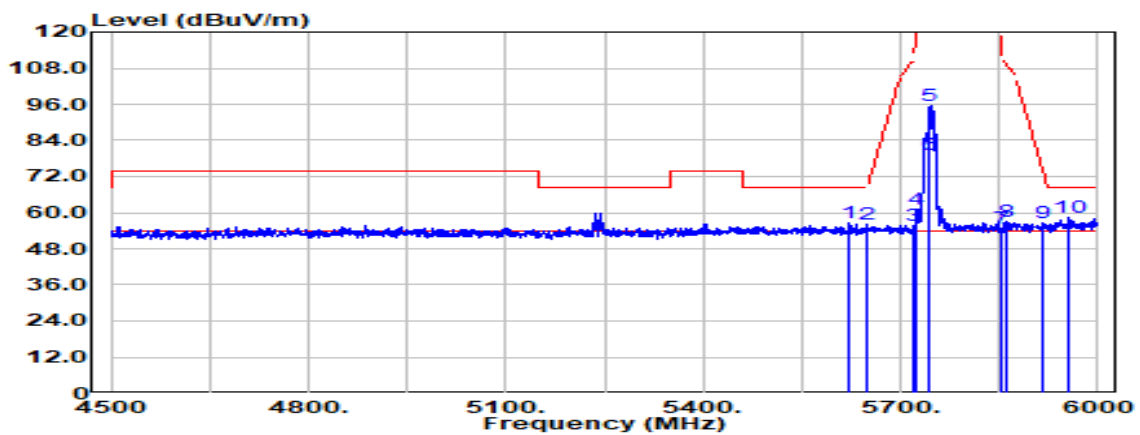


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5622.750       | Peak                           | 36.68                               | 20.11          | 56.79                    | 68.20                    | -11.41         |
| 5650.500       | Peak                           | 35.98                               | 20.15          | 56.13                    | 68.57                    | -12.44         |
| 5720.250       | Peak                           | 35.59                               | 20.29          | 55.88                    | 111.37                   | -55.49         |
| 5724.750       | Peak                           | 40.96                               | 20.32          | 61.28                    | 121.63                   | -60.35         |
| 5745.000       | Peak                           | 75.16                               | 20.45          | 95.61                    | -                        | -              |
| 5745.000       | Average                        | 58.73                               | 20.45          | 79.18                    | -                        | -              |
| 5851.500       | Peak                           | 33.86                               | 20.74          | 54.59                    | 118.78                   | -64.19         |
| 5859.750       | Peak                           | 36.22                               | 20.77          | 56.99                    | 109.47                   | -52.48         |
| 5917.500       | Peak                           | 35.74                               | 21.02          | 56.76                    | 73.73                    | -16.97         |
| 5957.250       | Peak                           | 37.24                               | 21.16          | 58.40                    | 68.20                    | -9.80          |

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE20 / 5825MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Vertical                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

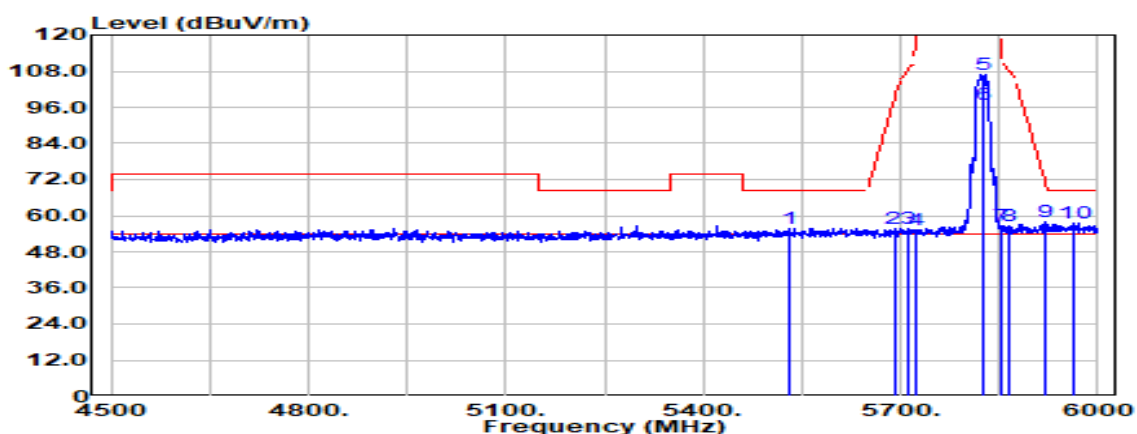


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5529.750       | Peak                           | 35.86                               | 20.03          | 55.89                    | 68.20                    | -12.31         |
| 5690.250       | Peak                           | 35.48                               | 20.16          | 55.64                    | 98.01                    | -42.37         |
| 5713.500       | Peak                           | 35.48                               | 20.25          | 55.73                    | 108.98                   | -53.25         |
| 5724.750       | Peak                           | 34.85                               | 20.32          | 55.17                    | 121.63                   | -66.46         |
| 5825.000       | Peak                           | 86.18                               | 20.64          | 106.82                   | --                       | --             |
| 5825.000       | Average                        | 76.41                               | 20.64          | 97.05                    | --                       | --             |
| 5851.500       | Peak                           | 36.04                               | 20.74          | 56.78                    | 118.78                   | -62.00         |
| 5865.750       | Peak                           | 36.02                               | 20.80          | 56.82                    | 107.79                   | -50.97         |
| 5920.500       | Peak                           | 36.79                               | 21.04          | 57.82                    | 71.52                    | -13.69         |
| 5961.750       | Peak                           | 36.49                               | 21.16          | 57.65                    | 68.20                    | -10.55         |

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE20 / 5825MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

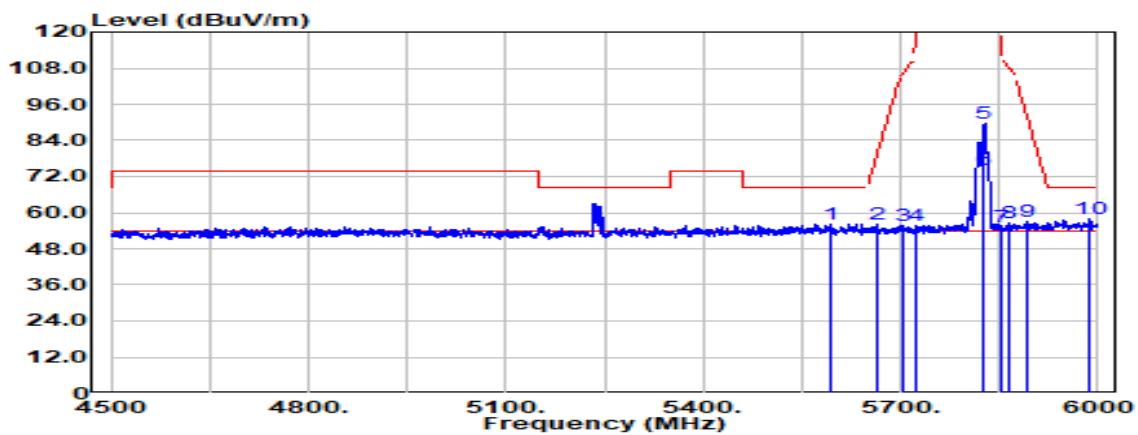


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5595.000       | Peak                           | 36.19                               | 20.07          | 56.26                    | 68.20                    | -11.94         |
| 5664.750       | Peak                           | 36.06                               | 20.15          | 56.21                    | 79.15                    | -22.94         |
| 5703.750       | Peak                           | 35.36                               | 20.18          | 55.54                    | 106.25                   | -50.71         |
| 5724.000       | Peak                           | 35.59                               | 20.31          | 55.90                    | 119.92                   | -64.02         |
| 5825.000       | Peak                           | 69.19                               | 20.64          | 89.82                    | --                       | --             |
| 5825.000       | Average                        | 53.52                               | 20.64          | 74.15                    | --                       | --             |
| 5852.250       | Peak                           | 34.48                               | 20.74          | 55.22                    | 117.07                   | -61.84         |
| 5865.000       | Peak                           | 35.77                               | 20.80          | 56.56                    | 108.00                   | -51.43         |
| 5894.250       | Peak                           | 36.02                               | 20.92          | 56.95                    | 90.92                    | -33.97         |
| 5987.250       | Peak                           | 36.77                               | 21.17          | 57.94                    | 68.20                    | -10.26         |

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5755MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Vertical                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

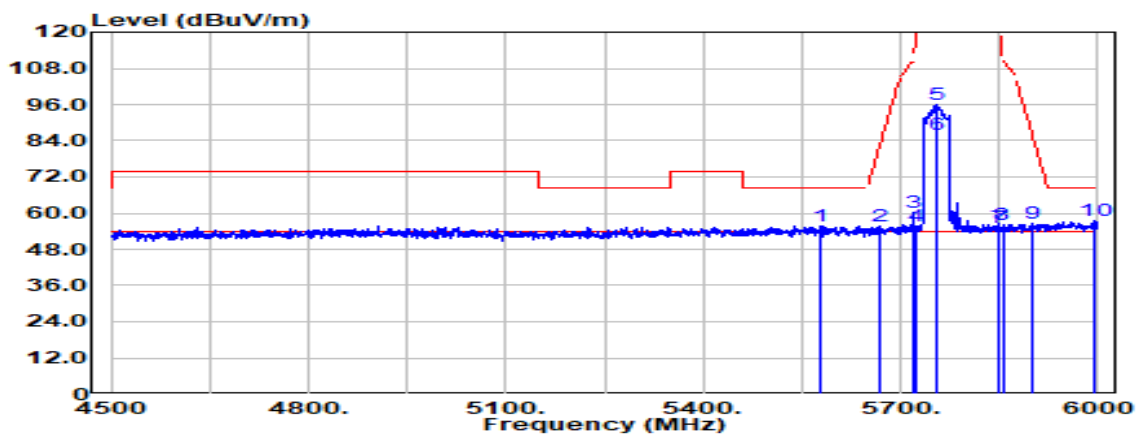


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5580.000       | Peak                           | 35.71                               | 20.05          | 55.77                    | 68.20                    | -12.43         |
| 5670.000       | Peak                           | 35.60                               | 20.15          | 55.76                    | 83.04                    | -27.28         |
| 5718.750       | Peak                           | 40.04                               | 20.28          | 60.32                    | 110.45                   | -50.13         |
| 5721.750       | Peak                           | 35.58                               | 20.30          | 55.88                    | 114.79                   | -58.91         |
| 5755.000       | Peak                           | 75.32                               | 20.49          | 95.81                    | - -                      | - -            |
| 5755.000       | Average                        | 65.36                               | 20.49          | 85.84                    | - -                      | - -            |
| 5850.750       | Peak                           | 34.50                               | 20.73          | 55.23                    | 120.49                   | -65.26         |
| 5855.250       | Peak                           | 35.55                               | 20.75          | 56.30                    | 110.73                   | -54.43         |
| 5898.750       | Peak                           | 35.61                               | 20.94          | 56.55                    | 87.59                    | -31.03         |
| 5996.250       | Peak                           | 36.52                               | 21.17          | 57.69                    | 68.20                    | -10.51         |

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5755MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

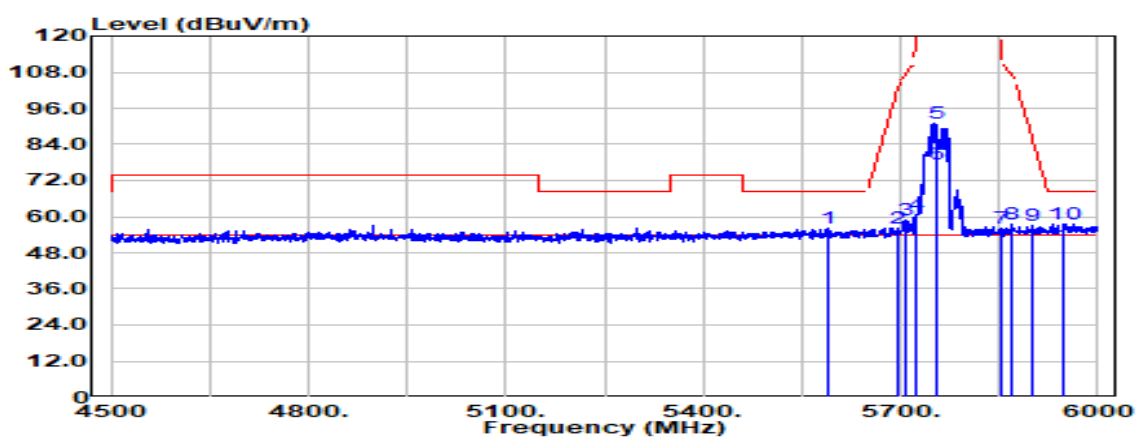

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5589.750       | Peak                           | 36.10                               | 20.06          | 56.17                    | 68.20                    | -12.03         |
| 5697.000       | Peak                           | 36.09                               | 20.16          | 56.25                    | 102.99                   | -46.74         |
| 5706.750       | Peak                           | 38.72                               | 20.20          | 58.92                    | 107.09                   | -48.17         |
| 5723.250       | Peak                           | 40.46                               | 20.31          | 60.77                    | 118.21                   | -57.44         |
| 5755.000       | Peak                           | 70.67                               | 20.49          | 91.16                    | -                        | -              |
| 5755.000       | Average                        | 56.96                               | 20.49          | 77.44                    | -                        | -              |
| 5851.500       | Peak                           | 35.36                               | 20.74          | 56.10                    | 118.78                   | -62.68         |
| 5870.250       | Peak                           | 36.57                               | 20.82          | 57.39                    | 106.53                   | -49.14         |
| 5900.250       | Peak                           | 35.96                               | 20.95          | 56.91                    | 86.48                    | -29.57         |
| 5946.750       | Peak                           | 36.40                               | 21.15          | 57.55                    | 68.20                    | -10.65         |

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5795MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Vertical                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

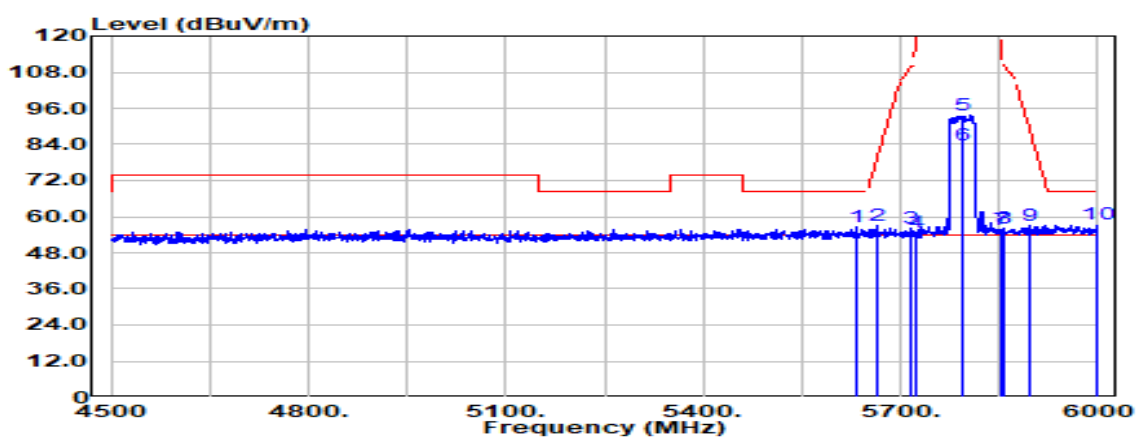

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5633.250       | Peak                           | 36.42                               | 20.12          | 56.54                    | 68.20                    | -11.66         |
| 5664.750       | Peak                           | 36.85                               | 20.15          | 57.01                    | 79.15                    | -22.14         |
| 5714.250       | Peak                           | 35.74                               | 20.25          | 55.99                    | 109.19                   | -53.20         |
| 5722.500       | Peak                           | 34.66                               | 20.30          | 54.97                    | 116.50                   | -61.54         |
| 5795.000       | Peak                           | 73.00                               | 20.53          | 93.53                    | --                       | --             |
| 5795.000       | Average                        | 63.28                               | 20.53          | 83.82                    | --                       | --             |
| 5853.750       | Peak                           | 35.13                               | 20.75          | 55.88                    | 113.65                   | -57.77         |
| 5856.000       | Peak                           | 35.43                               | 20.76          | 56.19                    | 110.52                   | -54.33         |
| 5898.000       | Peak                           | 35.99                               | 20.94          | 56.93                    | 88.14                    | -31.21         |
| 6000.000       | Peak                           | 36.36                               | 21.17          | 57.53                    | 68.20                    | -10.67         |




Report No.: TMWK2201000141KR

Page: 617 / 939


Rev.: 02

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5795MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

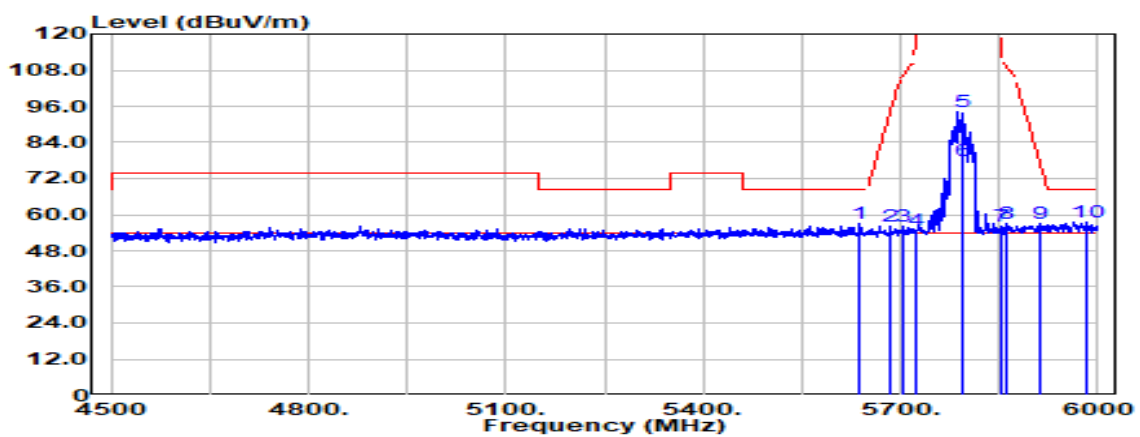


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5637.000       | Peak                           | 37.02                               | 20.13          | 57.15                    | 68.20                    | -11.05         |
| 5685.000       | Peak                           | 36.21                               | 20.16          | 56.37                    | 94.13                    | -37.77         |
| 5703.750       | Peak                           | 35.76                               | 20.18          | 55.95                    | 106.25                   | -50.30         |
| 5721.750       | Peak                           | 34.65                               | 20.30          | 54.95                    | 114.79                   | -59.84         |
| 5795.000       | Peak                           | 73.77                               | 20.53          | 94.30                    | --                       | --             |
| 5795.000       | Average                        | 57.32                               | 20.53          | 77.85                    | --                       | --             |
| 5853.750       | Peak                           | 35.49                               | 20.75          | 56.24                    | 113.65                   | -57.41         |
| 5861.250       | Peak                           | 36.23                               | 20.78          | 57.01                    | 109.05                   | -52.04         |
| 5913.000       | Peak                           | 36.03                               | 21.00          | 57.03                    | 77.05                    | -20.02         |
| 5983.500       | Peak                           | 36.38                               | 21.17          | 57.54                    | 68.20                    | -10.66         |

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE80 / 5775MHz | Temp/Hum      | 22.9(°C) / 58%RH |
| Test Item | Band Edge                    | Test Date     | April 7, 2022    |
| Polarize  | Vertical                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

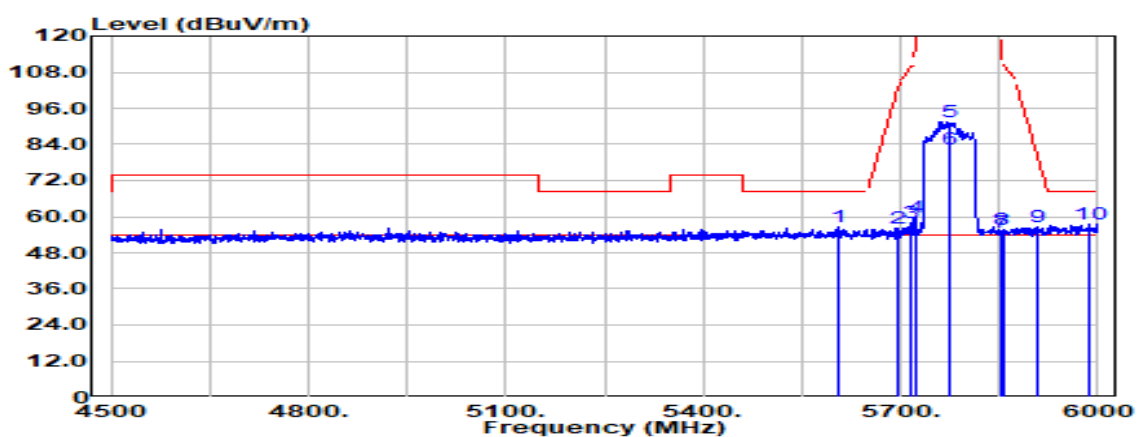

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5604.000       | Peak                           | 36.67                               | 20.08          | 56.75                    | 68.20                    | -11.45         |
| 5694.750       | Peak                           | 35.84                               | 20.16          | 56.00                    | 101.33                   | -45.33         |
| 5717.250       | Peak                           | 37.81                               | 20.27          | 58.08                    | 110.03                   | -51.95         |
| 5721.750       | Peak                           | 39.26                               | 20.30          | 59.56                    | 114.79                   | -55.23         |
| 5775.000       | Peak                           | 71.19                               | 20.51          | 91.70                    | --                       | --             |
| 5775.000       | Average                        | 61.78                               | 20.51          | 82.29                    | --                       | --             |
| 5853.750       | Peak                           | 34.13                               | 20.75          | 54.88                    | 113.65                   | -58.77         |
| 5855.250       | Peak                           | 34.95                               | 20.75          | 55.70                    | 110.73                   | -55.03         |
| 5907.000       | Peak                           | 35.65                               | 20.98          | 56.63                    | 81.48                    | -24.85         |
| 5988.000       | Peak                           | 36.27                               | 21.17          | 57.44                    | 68.20                    | -10.76         |


|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5775MHz | Temp/Hum      | 21.1(°C)/ 51%RH |
| Test Item | Band Edge                    | Test Date     | April 8, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

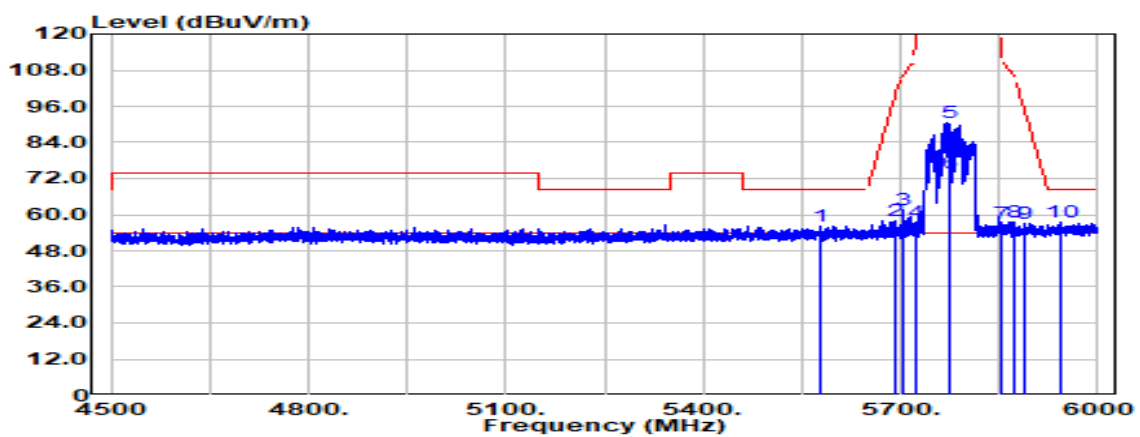

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5579.063       | Peak                           | 36.19                               | 20.05          | 56.24                    | 68.20                    | -11.96         |
| 5690.438       | Peak                           | 37.85                               | 20.16          | 58.01                    | 98.15                    | -40.14         |
| 5705.250       | Peak                           | 41.19                               | 20.19          | 61.39                    | 106.67                   | -45.29         |
| 5722.875       | Peak                           | 37.27                               | 20.31          | 57.57                    | 117.36                   | -59.78         |
| 5775.000       | Peak                           | 70.04                               | 20.51          | 90.55                    | - -                      | - -            |
| 5775.000       | Average                        | 53.48                               | 20.51          | 73.99                    | - -                      | - -            |
| 5851.500       | Peak                           | 36.54                               | 20.74          | 57.27                    | 118.78                   | -61.51         |
| 5873.625       | Peak                           | 36.66                               | 20.83          | 57.50                    | 105.58                   | -48.09         |
| 5889.188       | Peak                           | 36.17                               | 20.90          | 57.08                    | 94.67                    | -37.59         |
| 5943.938       | Peak                           | 36.40                               | 21.13          | 57.54                    | 68.20                    | -10.66         |

**BFM OFF****Below 1G Test Data****Test Data for UNII-1**


|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210MHz | Temp/Hum      | 23.4(°C) / 61%RH |
| Test Item | 30MHz-1GHz                    | Test Date     | March 3, 2022    |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak                          |               |                  |

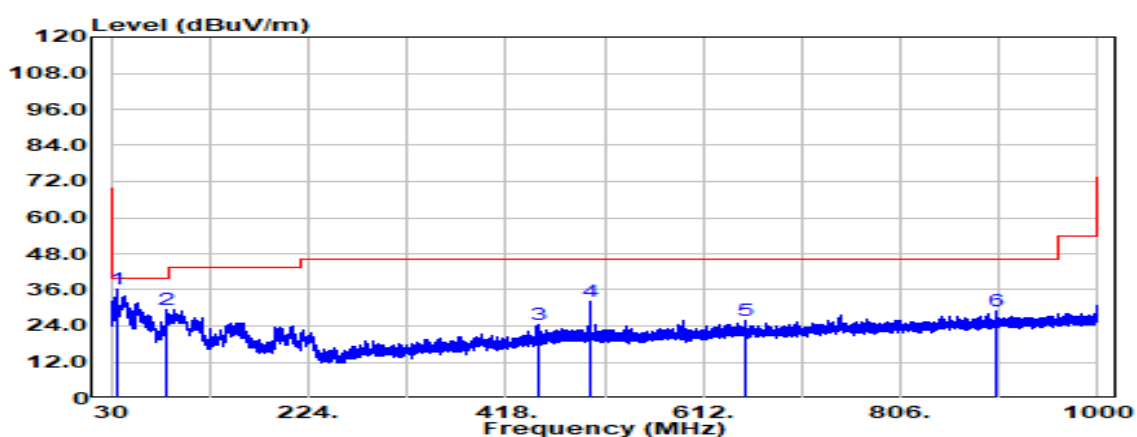

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 35.456         | Peak                           | 42.69                               | -6.54          | 36.15                    | 40.00                    | -3.85          |
| 85.533         | Peak                           | 45.62                               | -16.17         | 29.45                    | 40.00                    | -10.55         |
| 450.131        | Peak                           | 29.34                               | -4.78          | 24.56                    | 46.00                    | -21.44         |
| 501.299        | Peak                           | 35.79                               | -3.60          | 32.20                    | 46.00                    | -13.80         |
| 653.589        | Peak                           | 26.75                               | -0.79          | 25.96                    | 46.00                    | -20.04         |
| 899.969        | Peak                           | 26.22                               | 2.89           | 29.11                    | 46.00                    | -16.89         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                    | Test Date     | March 3, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak                          |               |                 |

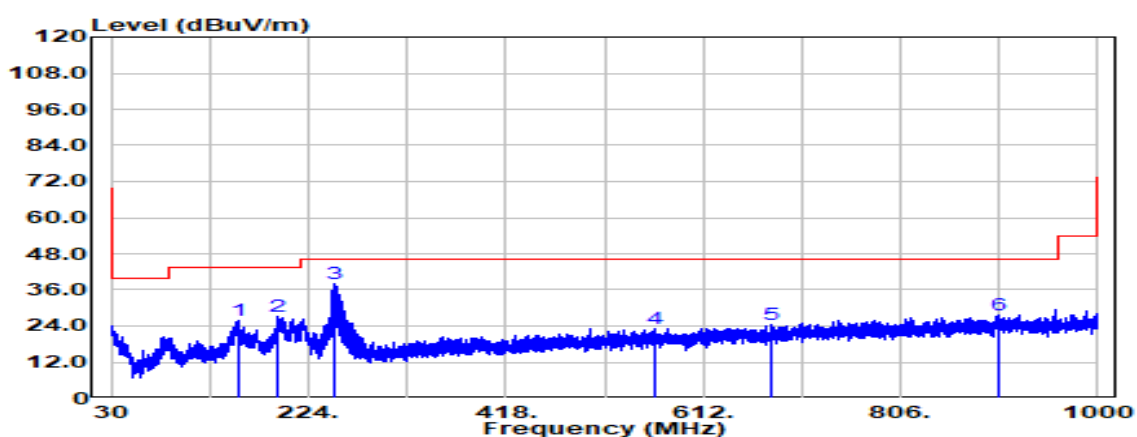


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 156.221        | Peak                           | 36.51                               | -10.76         | 25.74                    | 43.50                    | -17.76         |
| 194.658        | Peak                           | 38.23                               | -10.84         | 27.39                    | 43.50                    | -16.11         |
| 250.433        | Peak                           | 49.16                               | -10.96         | 38.20                    | 46.00                    | -7.80          |
| 564.228        | Peak                           | 25.72                               | -2.51          | 23.21                    | 46.00                    | -22.79         |
| 678.809        | Peak                           | 25.33                               | -0.68          | 24.65                    | 46.00                    | -21.35         |
| 902.273        | Peak                           | 24.94                               | 2.88           | 27.82                    | 46.00                    | -18.18         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

### Test Data for UNII-2a

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5260MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                   | Test Date     | March 3, 2022   |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak                         |               |                 |

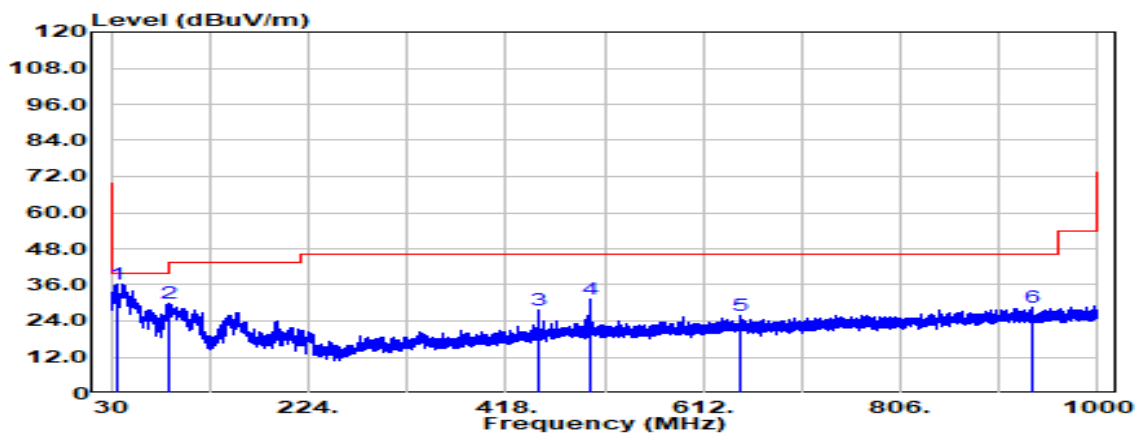


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 35.214         | Peak                           | 42.68                               | -6.32          | 36.36                    | 40.00                    | -3.64          |
| 85.896         | Peak                           | 46.34                               | -16.24         | 30.11                    | 40.00                    | -9.89          |
| 450.010        | Peak                           | 32.21                               | -4.78          | 27.43                    | 46.00                    | -18.57         |
| 501.299        | Peak                           | 35.06                               | -3.60          | 31.47                    | 46.00                    | -14.53         |
| 647.890        | Peak                           | 26.58                               | -0.81          | 25.77                    | 46.00                    | -20.23         |
| 934.889        | Peak                           | 25.32                               | 3.21           | 28.53                    | 46.00                    | -17.47         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5260MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                   | Test Date     | March 3, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao       |
| Detector  | Peak                         |               |                 |

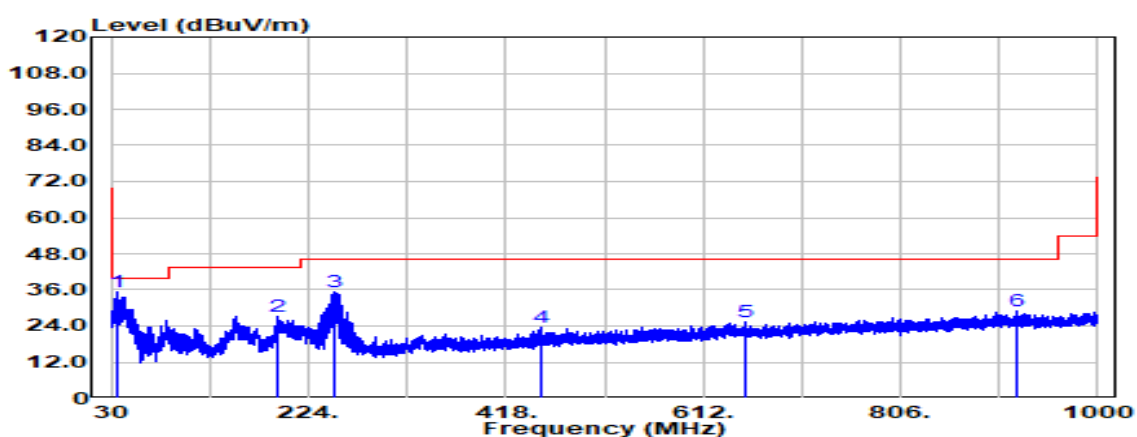


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 35.214         | Peak                           | 41.68                               | -6.32          | 35.36                    | 40.00                    | -4.64          |
| 193.081        | Peak                           | 38.35                               | -11.07         | 27.28                    | 43.50                    | -16.22         |
| 249.220        | Peak                           | 46.42                               | -10.96         | 35.46                    | 46.00                    | -10.54         |
| 451.829        | Peak                           | 28.13                               | -4.69          | 23.44                    | 46.00                    | -22.56         |
| 652.983        | Peak                           | 26.21                               | -0.80          | 25.41                    | 46.00                    | -20.59         |
| 920.581        | Peak                           | 25.78                               | 3.17           | 28.95                    | 46.00                    | -17.05         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

### Test Data for UNII-2c


|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                   | Test Date     | March 3, 2022   |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak                         |               |                 |

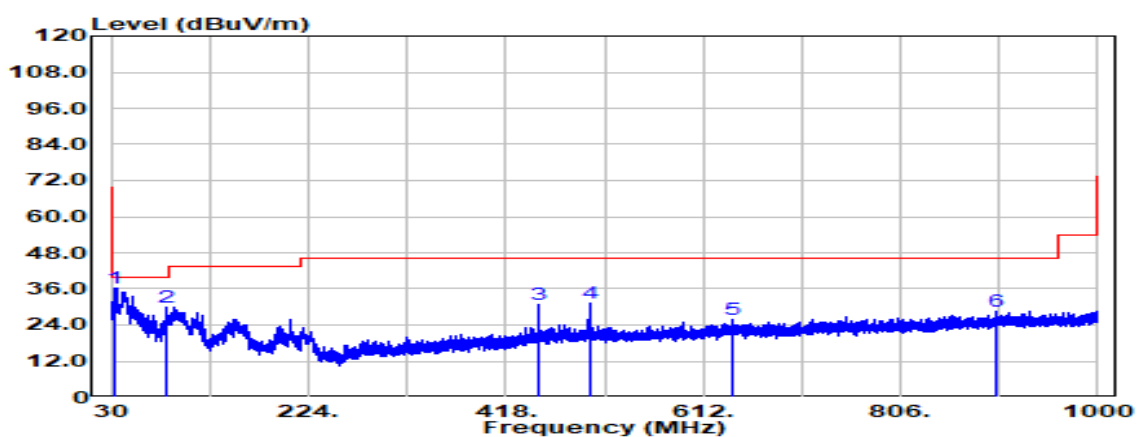

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 34.729         | Peak                           | 42.36                               | -5.91          | 36.45                    | 40.00                    | -3.55          |
| 84.926         | Peak                           | 46.05                               | -16.07         | 29.98                    | 40.00                    | -10.02         |
| 450.010        | Peak                           | 35.71                               | -4.78          | 30.93                    | 46.00                    | -15.07         |
| 501.299        | Peak                           | 34.96                               | -3.60          | 31.37                    | 46.00                    | -14.63         |
| 640.979        | Peak                           | 26.80                               | -0.80          | 26.01                    | 46.00                    | -19.99         |
| 901.181        | Peak                           | 25.77                               | 2.89           | 28.65                    | 46.00                    | -17.35         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                   | Test Date     | March 3, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao       |
| Detector  | Peak                         |               |                 |

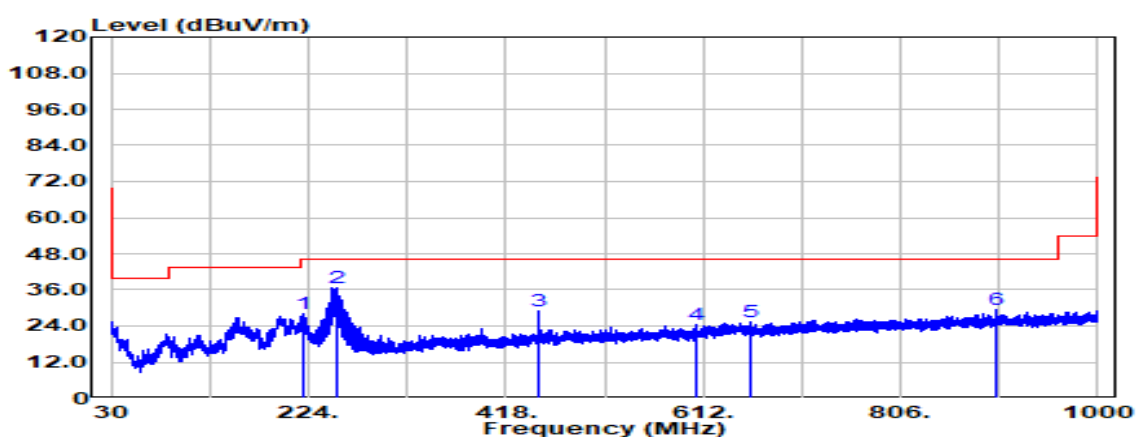


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 219.150        | Peak                           | 40.27                               | -12.01         | 28.25                    | 46.00                    | -17.75         |
| 252.736        | Peak                           | 47.72                               | -10.89         | 36.83                    | 46.00                    | -9.17          |
| 450.010        | Peak                           | 33.87                               | -4.78          | 29.08                    | 46.00                    | -16.92         |
| 604.968        | Peak                           | 26.69                               | -2.21          | 24.48                    | 46.00                    | -21.52         |
| 658.560        | Peak                           | 26.00                               | -0.85          | 25.15                    | 46.00                    | -20.85         |
| 899.969        | Peak                           | 26.49                               | 2.89           | 29.37                    | 46.00                    | -16.63         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

### Test Data for UNII-3


|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                   | Test Date     | March 3, 2022   |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak                         |               |                 |

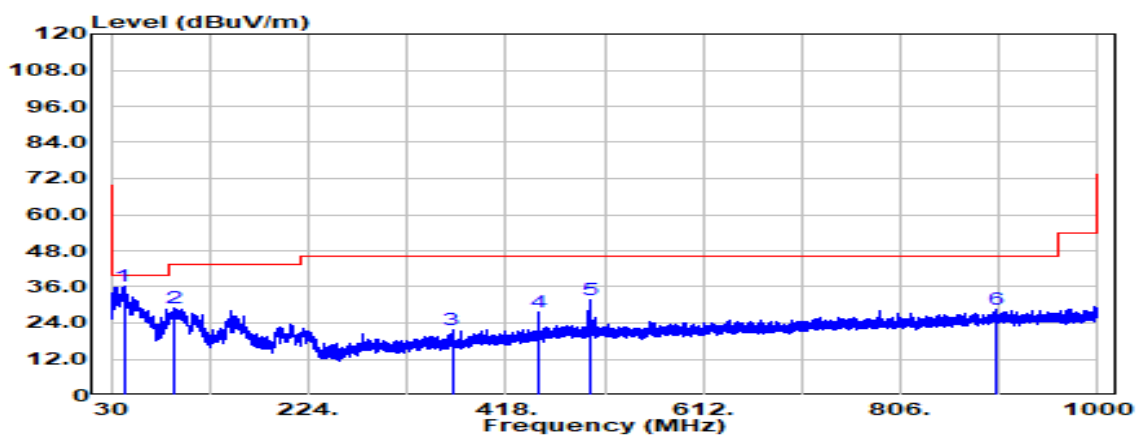

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 42.368         | Peak                           | 47.87                               | -11.58         | 36.29                    | 40.00                    | -3.71          |
| 92.565         | Peak                           | 43.81                               | -15.05         | 28.76                    | 43.50                    | -14.74         |
| 365.135        | Peak                           | 28.98                               | -7.29          | 21.69                    | 46.00                    | -24.31         |
| 449.161        | Peak                           | 32.28                               | -4.78          | 27.51                    | 46.00                    | -18.49         |
| 501.299        | Peak                           | 35.32                               | -3.60          | 31.72                    | 46.00                    | -14.28         |
| 899.969        | Peak                           | 25.71                               | 2.89           | 28.60                    | 46.00                    | -17.40         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745MHz | Temp/Hum      | 23.4(°C)/ 61%RH |
| Test Item | 30MHz-1GHz                   | Test Date     | March 3, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao       |
| Detector  | Peak                         |               |                 |

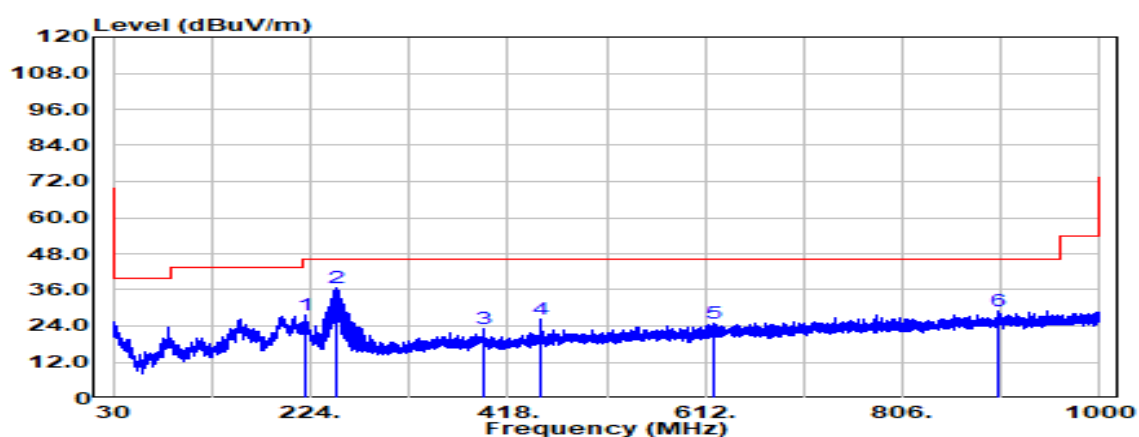

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 219.393        | Peak                           | 39.80                               | -12.01         | 27.79                    | 46.00                    | -18.21         |
| 249.220        | Peak                           | 47.67                               | -10.96         | 36.72                    | 46.00                    | -9.28          |
| 393.508        | Peak                           | 29.68                               | -6.47          | 23.22                    | 46.00                    | -22.78         |
| 450.495        | Peak                           | 31.16                               | -4.76          | 26.40                    | 46.00                    | -19.60         |
| 620.973        | Peak                           | 26.28                               | -1.40          | 24.89                    | 46.00                    | -21.11         |
| 899.969        | Peak                           | 25.88                               | 2.89           | 28.77                    | 46.00                    | -17.23         |

**Note:** 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)  
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Report No.: TMWK2201000141KR

### Above 1G

**BFM OFF**

### Test Data for UNII-1

|           |                        |               |                   |
|-----------|------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5180MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic               | Test Date     | February 25, 2022 |
| Polarize  | Vertical               | Test Engineer | Tony Chao         |
| Detector  | Peak & Average         |               |                   |

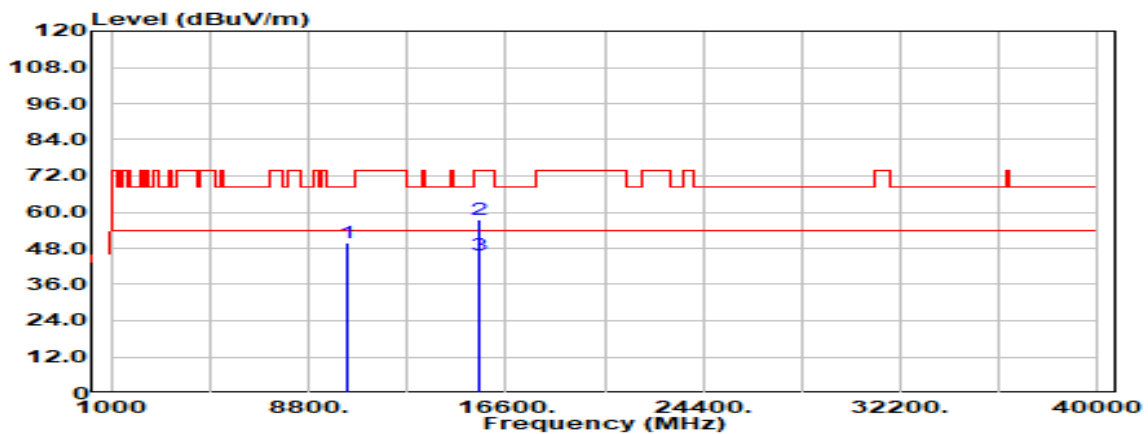


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 10360.000      | Peak                           | 32.22                                | 17.72          | 49.94                     | 68.20                     | -18.26         |
| 15540.000      | Peak                           | 32.66                                | 24.85          | 57.51                     | 74.00                     | -16.49         |
| 15540.000      | Average                        | 21.03                                | 24.85          | 45.88                     | 54.00                     | -8.12          |
| N/A            |                                |                                      |                |                           |                           |                |

### **Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                        |               |                   |
|-----------|------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5180MHz | Temp/Hum      | 19.6(°C) / 67%RH  |
| Test Item | Harmonic               | Test Date     | February 25, 2022 |
| Polarize  | Horizontal             | Test Engineer | Tony Chao         |
| Detector  | Peak & Average         |               |                   |

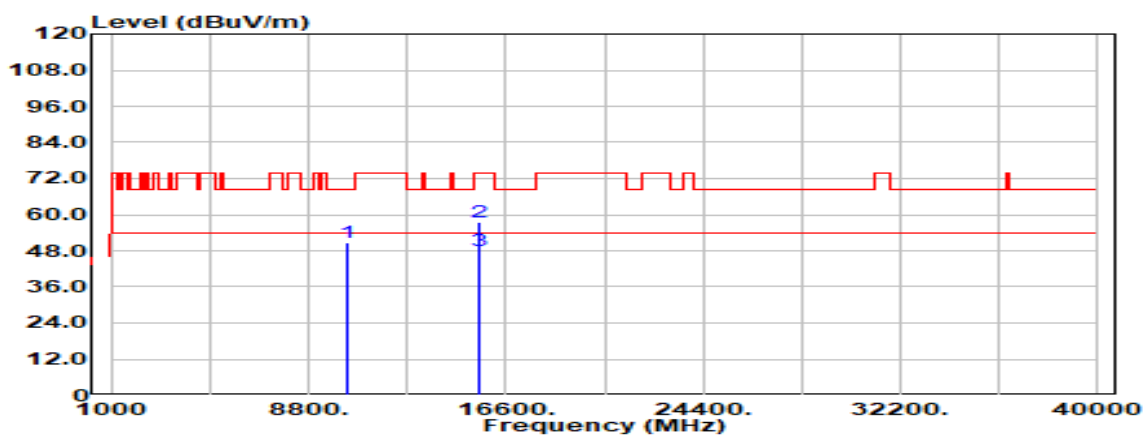


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10360.000      | Peak                           | 33.17                               | 17.72          | 50.89                    | 68.20                    | -17.31         |
| 15540.000      | Peak                           | 32.64                               | 24.85          | 57.49                    | 74.00                    | -16.51         |
| 15540.000      | Average                        | 23.08                               | 24.85          | 47.93                    | 54.00                    | -6.07          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5220 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonics               | Test Date     | February 25, 2022 |
| Polarize  | Vertical                | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

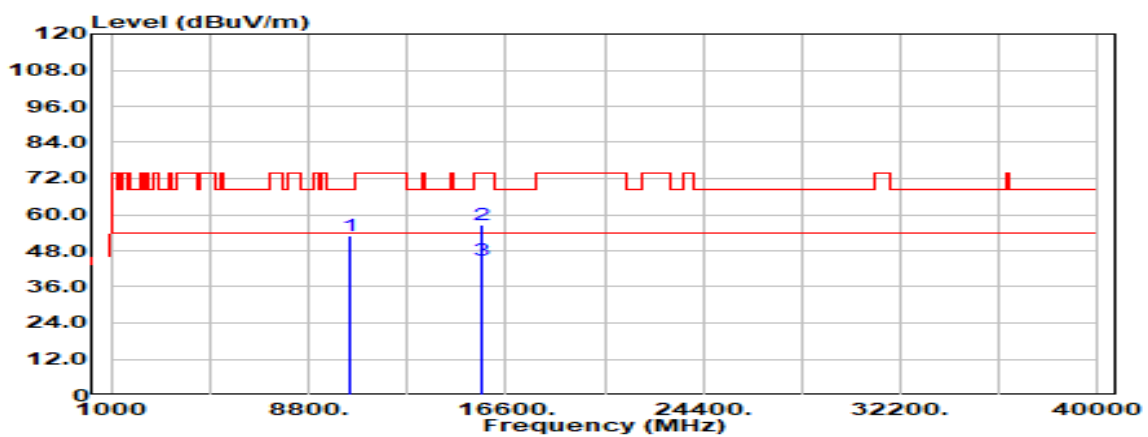


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10440.000      | Peak                           | 35.29                               | 17.90          | 53.19                    | 68.20                    | -15.01         |
| 15660.000      | Peak                           | 31.62                               | 25.15          | 56.77                    | 74.00                    | -17.23         |
| 15660.000      | Average                        | 19.73                               | 25.15          | 44.88                    | 54.00                    | -9.12          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5220 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                | Test Date     | February 25, 2022 |
| Polarize  | Horizontal              | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

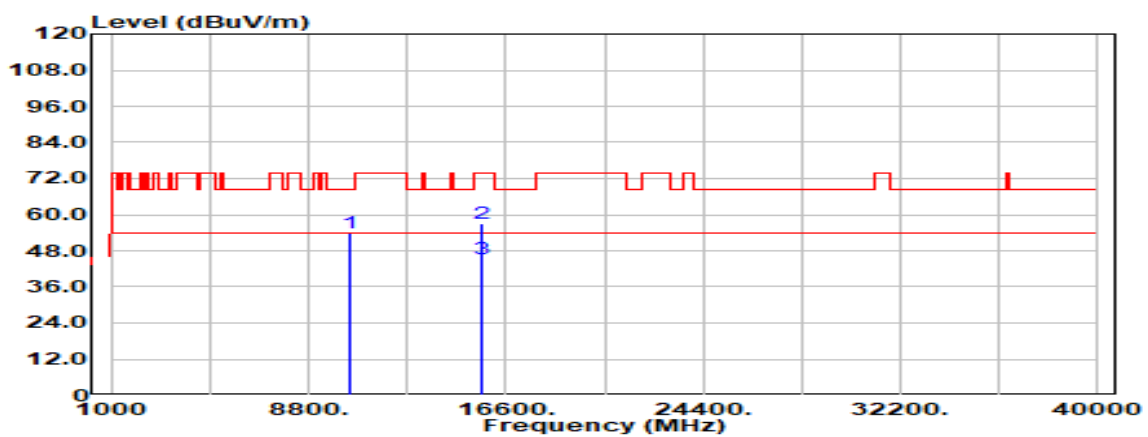


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10440.000      | Peak                           | 36.07                               | 17.90          | 53.98                    | 68.20                    | -14.22         |
| 15660.000      | Peak                           | 31.92                               | 25.15          | 57.07                    | 74.00                    | -16.93         |
| 15660.000      | Average                        | 20.31                               | 25.15          | 45.46                    | 54.00                    | -8.54          |
| N/A            |                                |                                     |                |                          |                          |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

|           |                        |               |                   |
|-----------|------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5240MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic               | Test Date     | February 25, 2022 |
| Polarize  | Vertical               | Test Engineer | Tony Chao         |
| Detector  | Peak & Average         |               |                   |

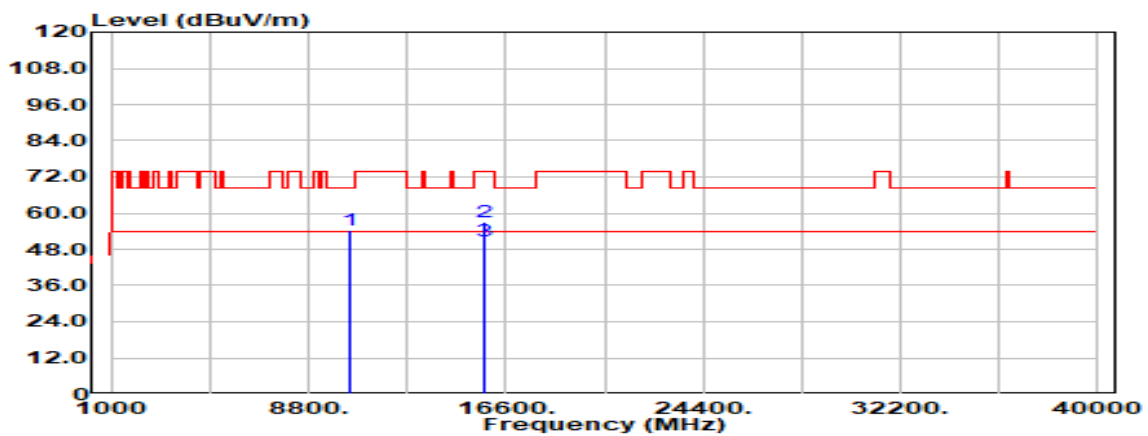


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10480.000      | Peak                           | 36.07                               | 18.05          | 54.12                    | 68.20                    | -14.08         |
| 15720.000      | Peak                           | 31.29                               | 25.55          | 56.84                    | 74.00                    | -17.16         |
| 15720.000      | Average                        | 25.05                               | 25.55          | 50.60                    | 54.00                    | -3.40          |
| N/A            |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                        |               |                   |
|-----------|------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5240MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic               | Test Date     | February 25, 2022 |
| Polarize  | Horizontal             | Test Engineer | Tony Chao         |
| Detector  | Peak & Average         |               |                   |

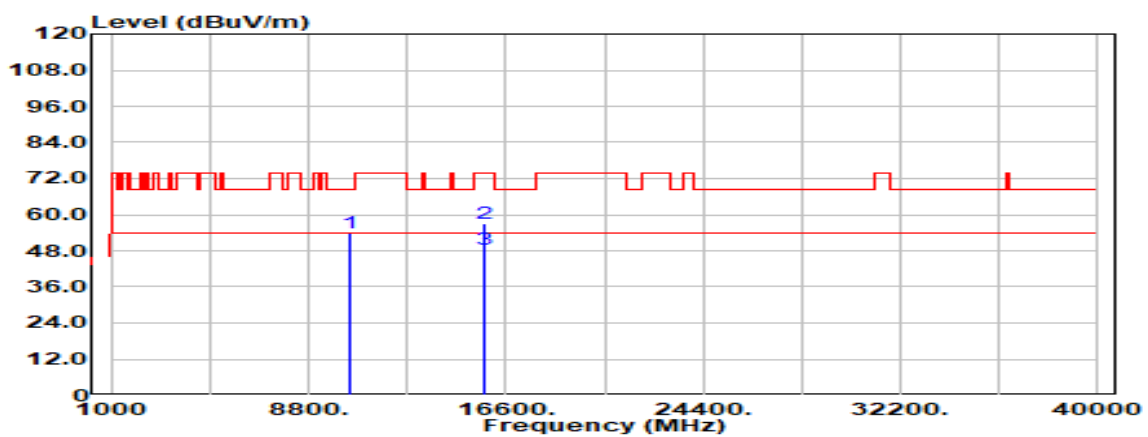


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10480.000      | Peak                           | 35.82                               | 18.05          | 53.87                    | 68.20                    | -14.33         |
| 15720.000      | Peak                           | 31.52                               | 25.55          | 57.08                    | 74.00                    | -16.92         |
| 15720.000      | Average                        | 23.03                               | 25.55          | 48.58                    | 54.00                    | -5.42          |
| N/A            |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5180MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

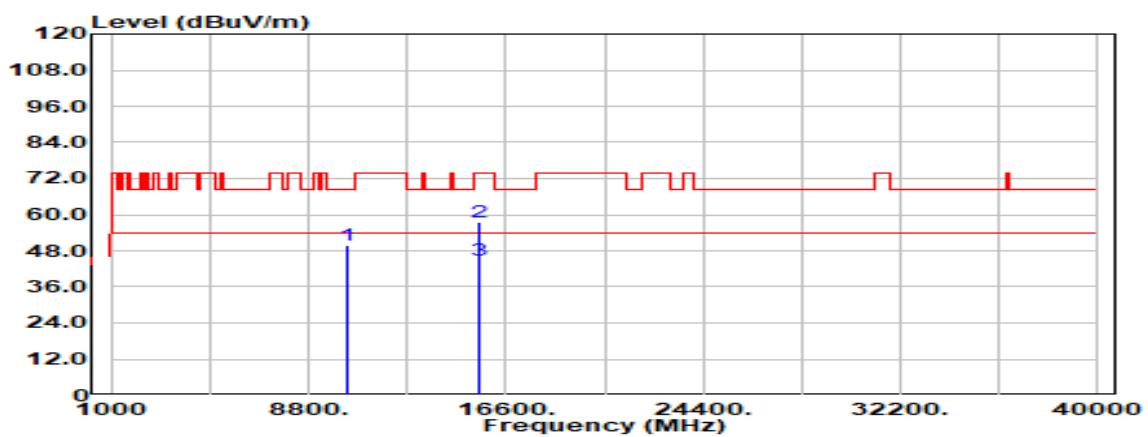


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10360.000      | Peak                           | 31.88                               | 17.72          | 49.60                    | 68.20                    | -18.60         |
| 15540.000      | Peak                           | 32.65                               | 24.85          | 57.50                    | 74.00                    | -16.50         |
| 15540.000      | Average                        | 20.21                               | 24.85          | 45.06                    | 54.00                    | -8.94          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5180MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

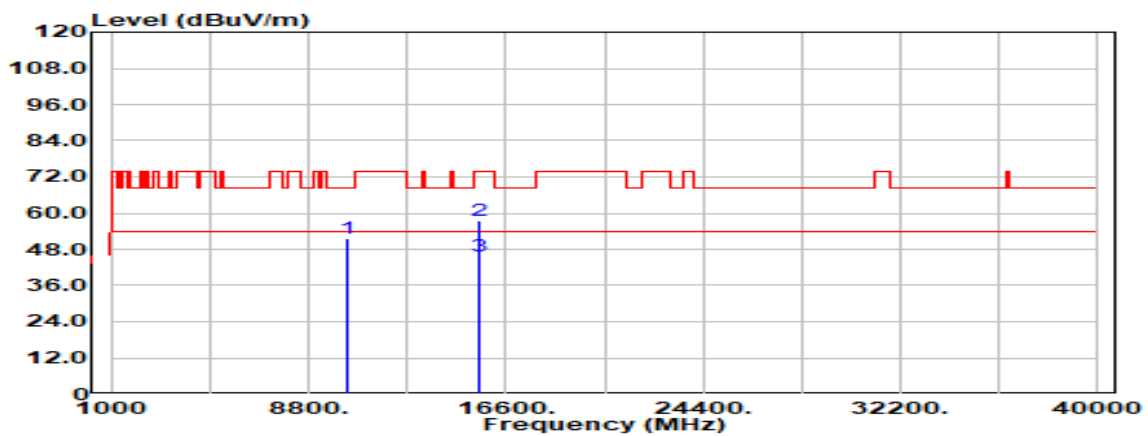


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10360.000      | Peak                           | 33.97                               | 17.72          | 51.69                    | 68.20                    | -16.51         |
| 15540.000      | Peak                           | 32.86                               | 24.85          | 57.70                    | 74.00                    | -16.30         |
| 15540.000      | Average                        | 20.88                               | 24.85          | 45.73                    | 54.00                    | -8.27          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5220MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

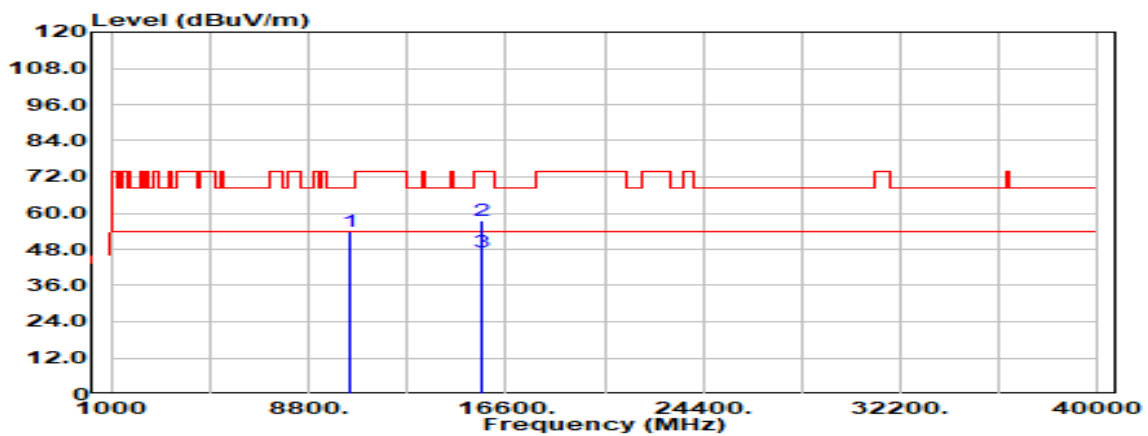


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10440.000      | Peak                           | 35.87                               | 17.90          | 53.78                    | 68.20                    | -14.42         |
| 15660.000      | Peak                           | 32.37                               | 25.15          | 57.52                    | 74.00                    | -16.48         |
| 15660.000      | Average                        | 21.85                               | 25.15          | 47.00                    | 54.00                    | -7.00          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5220MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

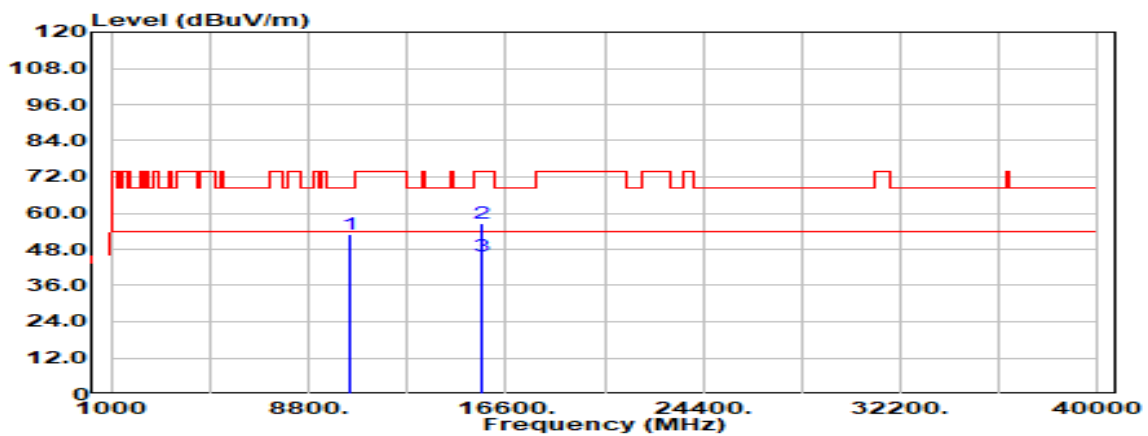


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10440.000      | Peak                           | 35.01                               | 17.90          | 52.91                    | 68.20                    | -15.29         |
| 15660.000      | Peak                           | 31.37                               | 25.15          | 56.52                    | 74.00                    | -17.48         |
| 15660.000      | Average                        | 20.38                               | 25.15          | 45.53                    | 54.00                    | -8.47          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5240MHz | Temp/Hum      | 19.6(°C) / 67%RH  |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

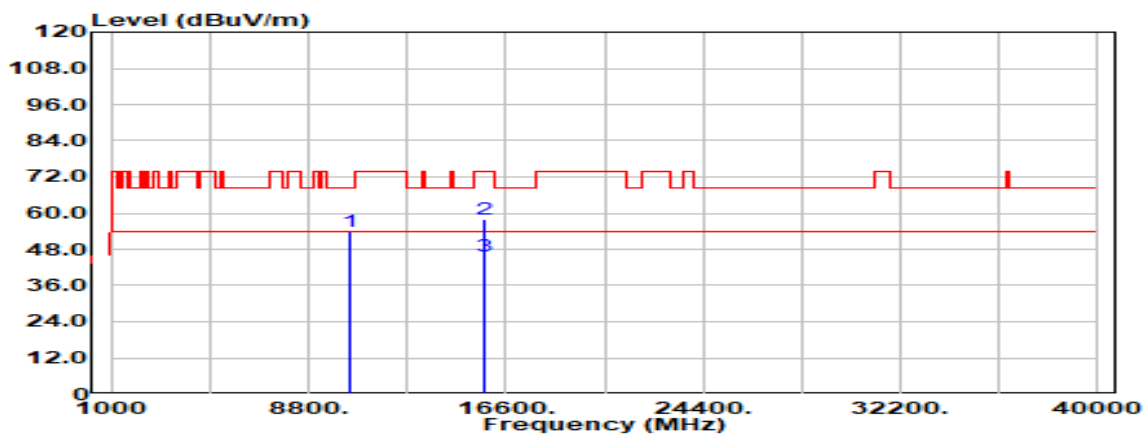


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10480.000      | Peak                           | 36.05                               | 18.05          | 54.10                    | 68.20                    | -14.10         |
| 15720.000      | Peak                           | 32.21                               | 25.55          | 57.77                    | 74.00                    | -16.23         |
| 15720.000      | Average                        | 20.15                               | 25.55          | 45.70                    | 54.00                    | -8.30          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5240MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

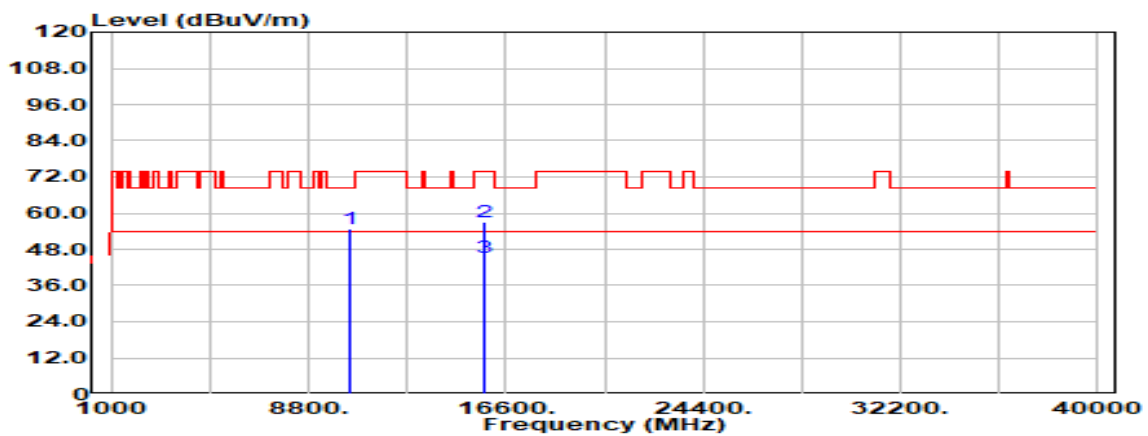


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10480.000      | Peak                           | 36.56                               | 18.05          | 54.61                    | 68.20                    | -13.59         |
| 15720.000      | Peak                           | 31.59                               | 25.55          | 57.14                    | 74.00                    | -16.86         |
| 15720.000      | Average                        | 19.85                               | 25.55          | 45.40                    | 54.00                    | -8.60          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5190MHz | Temp/Hum      | 20.4(°C) / 62%RH  |
| Test Item | Harmonic                      | Test Date     | February 26, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

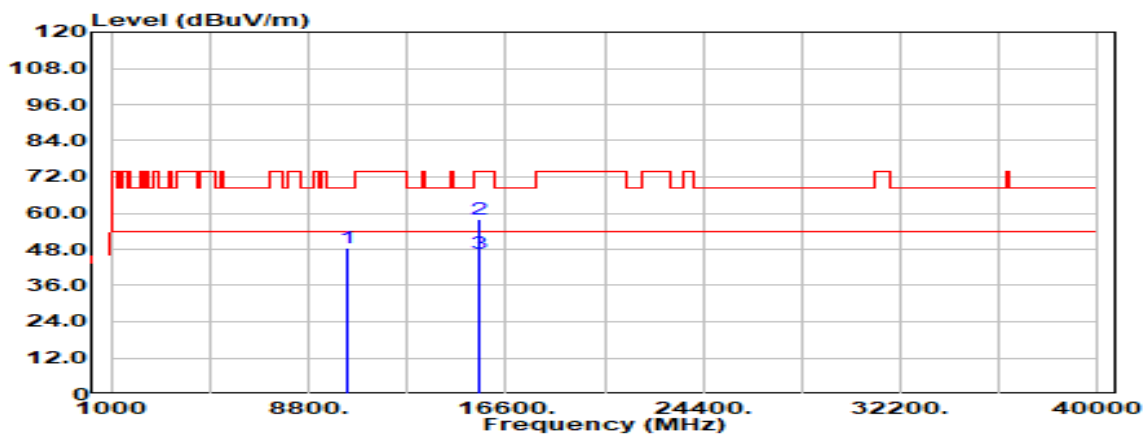


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10380.000      | Peak                           | 30.91                               | 17.76          | 48.67                    | 68.20                    | -19.53         |
| 15570.000      | Peak                           | 33.06                               | 24.85          | 57.91                    | 74.00                    | -16.09         |
| 15570.000      | Average                        | 21.59                               | 24.85          | 46.44                    | 54.00                    | -7.56          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5190MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                      | Test Date     | February 26, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

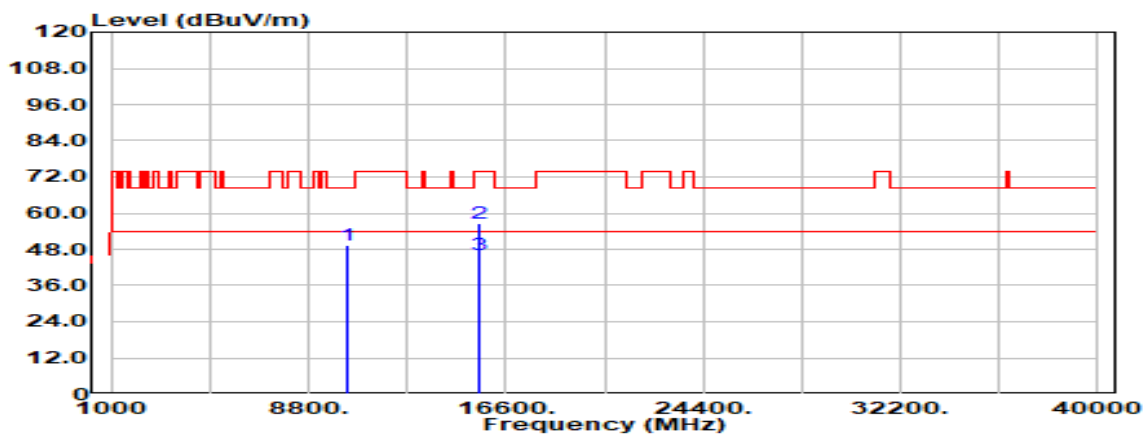


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10380.000      | Peak                           | 31.44                               | 17.76          | 49.20                    | 68.20                    | -19.00         |
| 15570.000      | Peak                           | 31.96                               | 24.85          | 56.81                    | 74.00                    | -17.19         |
| 15570.000      | Average                        | 21.48                               | 24.85          | 46.33                    | 54.00                    | -7.67          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5230MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                      | Test Date     | February 26, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

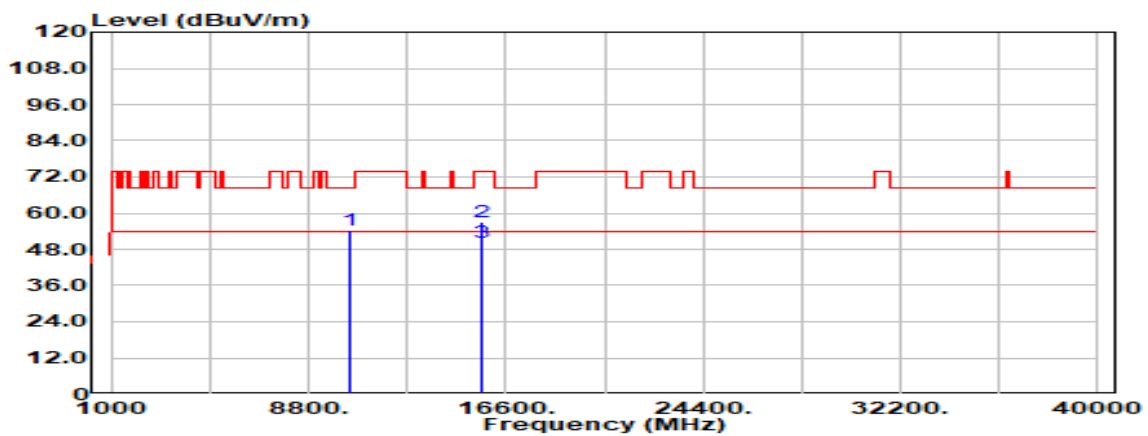


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10460.000      | Peak                           | 36.36                               | 17.97          | 54.33                    | 68.20                    | -13.87         |
| 15690.000      | Peak                           | 31.79                               | 25.38          | 57.17                    | 74.00                    | -16.83         |
| 15690.000      | Average                        | 24.68                               | 25.38          | 50.06                    | 54.00                    | -3.94          |
| N/A            |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5230MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                      | Test Date     | February 26, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

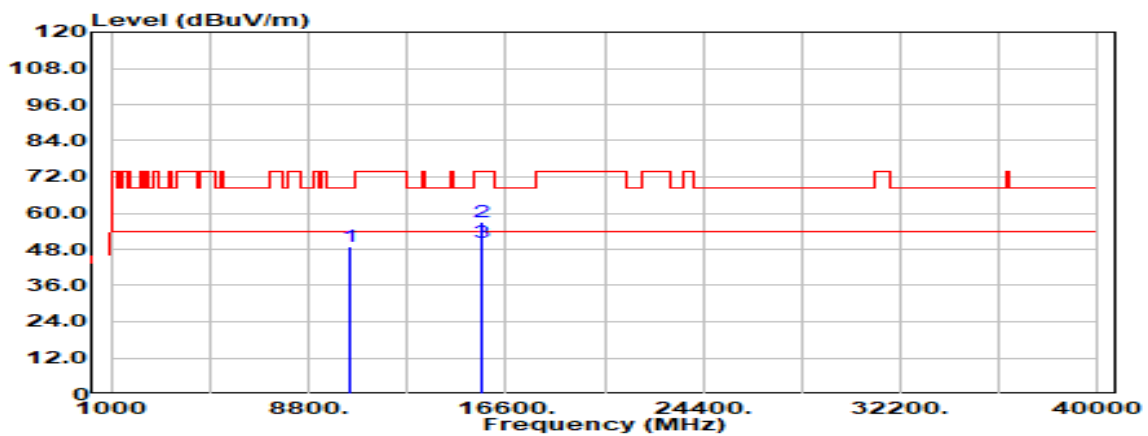


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10460.000      | Peak                           | 31.07                               | 17.97          | 49.04                    | 68.20                    | -19.16         |
| 15690.000      | Peak                           | 31.51                               | 25.38          | 56.90                    | 74.00                    | -17.10         |
| 15690.000      | Average                        | 24.67                               | 25.38          | 50.05                    | 54.00                    | -3.95          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210MHz | Temp/Hum      | 20.4(°C) / 62%RH  |
| Test Item | Harmonic                      | Test Date     | February 26, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

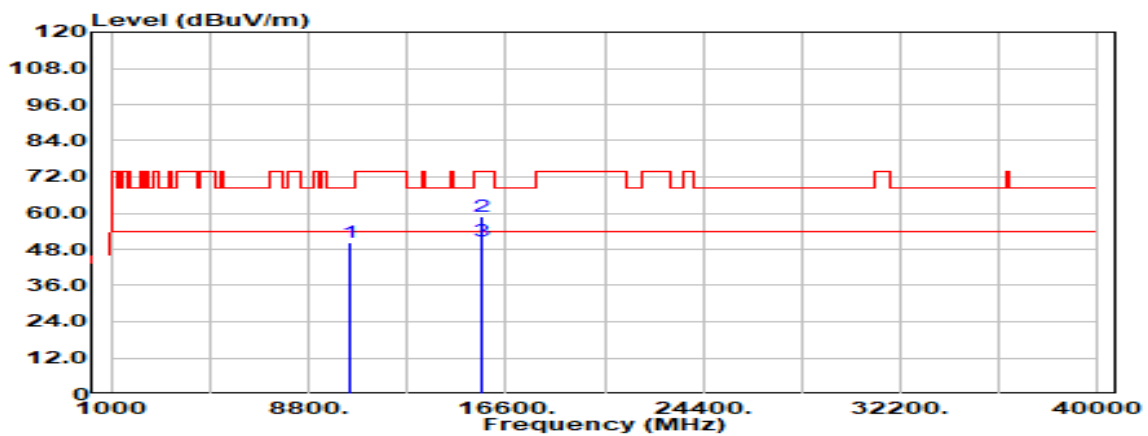


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10420.000      | Peak                           | 32.42                               | 17.85          | 50.27                    | 68.20                    | -17.93         |
| 15630.000      | Peak                           | 33.68                               | 25.00          | 58.68                    | 74.00                    | -15.32         |
| 15630.000      | Average                        | 25.84                               | 25.00          | 50.84                    | 54.00                    | -3.16          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210MHz | Temp/Hum      | 20.4(°C) / 62%RH  |
| Test Item | Harmonic                      | Test Date     | February 26, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

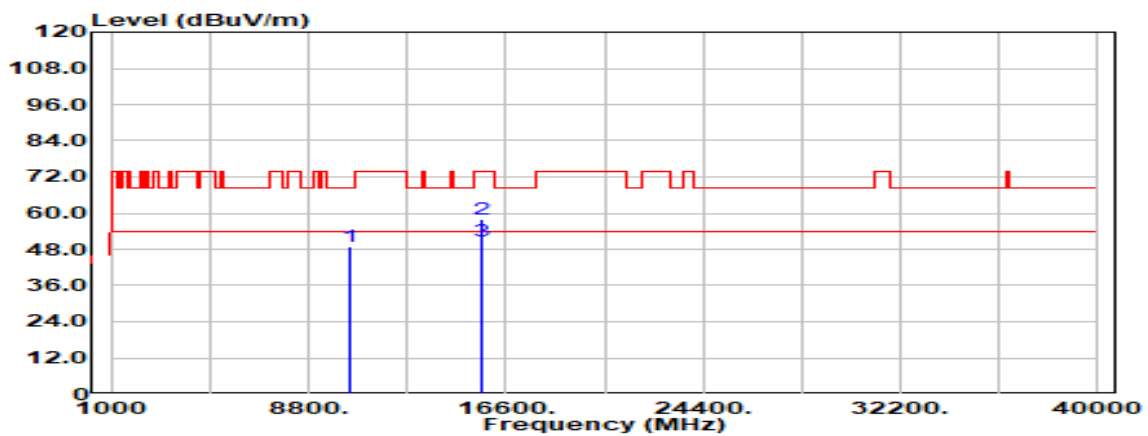


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10420.000      | Peak                           | 30.89                               | 17.85          | 48.74                    | 68.20                    | -19.46         |
| 15630.000      | Peak                           | 32.85                               | 25.00          | 57.85                    | 74.00                    | -16.15         |
| 15630.000      | Average                        | 25.72                               | 25.00          | 50.72                    | 54.00                    | -3.28          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                     | Test Date     | February 26, 2022 |
| Polarize  | Vertical                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

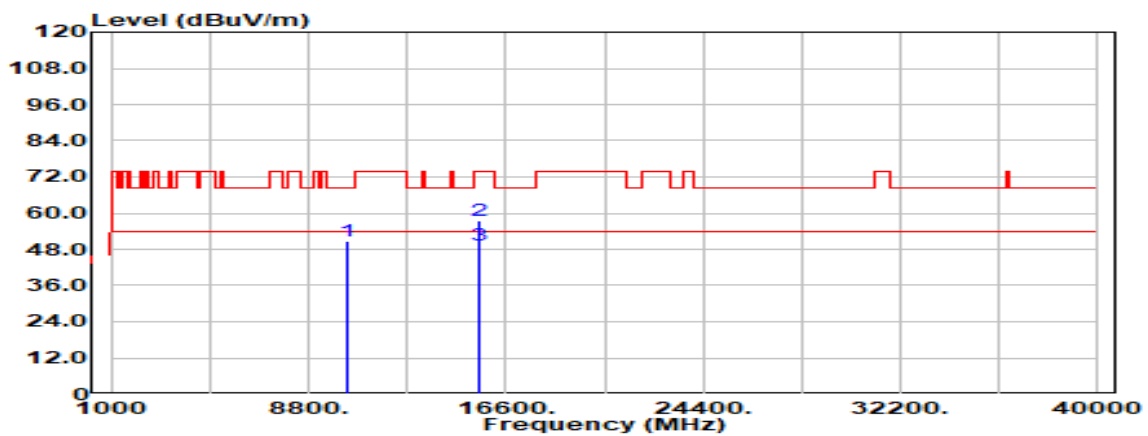


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10360.000      | Peak                           | 33.01                               | 17.72          | 50.73                    | 68.20                    | -17.47         |
| 15540.000      | Peak                           | 32.84                               | 24.85          | 57.69                    | 74.00                    | -16.31         |
| 15540.000      | Average                        | 24.30                               | 24.85          | 49.15                    | 54.00                    | -4.85          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5180MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                     | Test Date     | February 26, 2022 |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

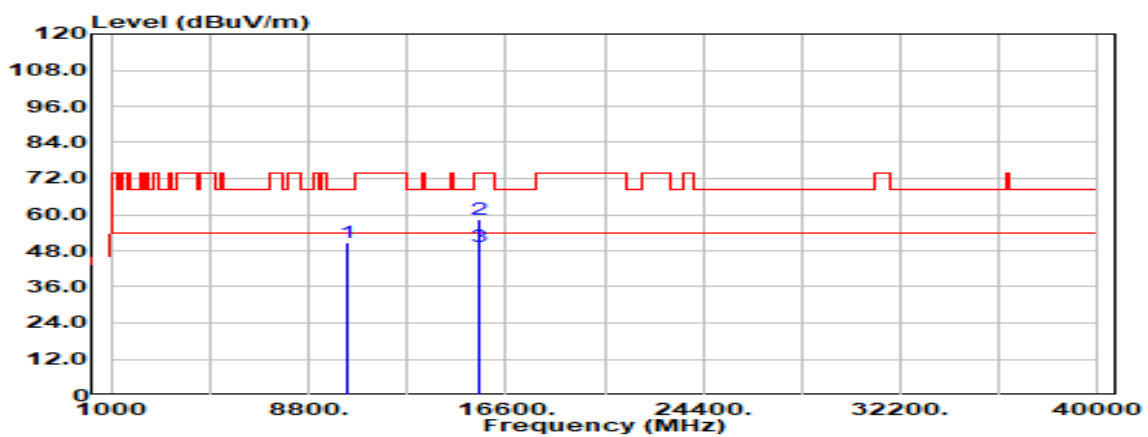


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10360.000      | Peak                           | 32.85                               | 17.72          | 50.57                    | 68.20                    | -17.63         |
| 15540.000      | Peak                           | 33.62                               | 24.85          | 58.46                    | 74.00                    | -15.54         |
| 15540.000      | Average                        | 24.43                               | 24.85          | 49.28                    | 54.00                    | -4.72          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5220MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                     | Test Date     | February 26, 2022 |
| Polarize  | Vertical                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

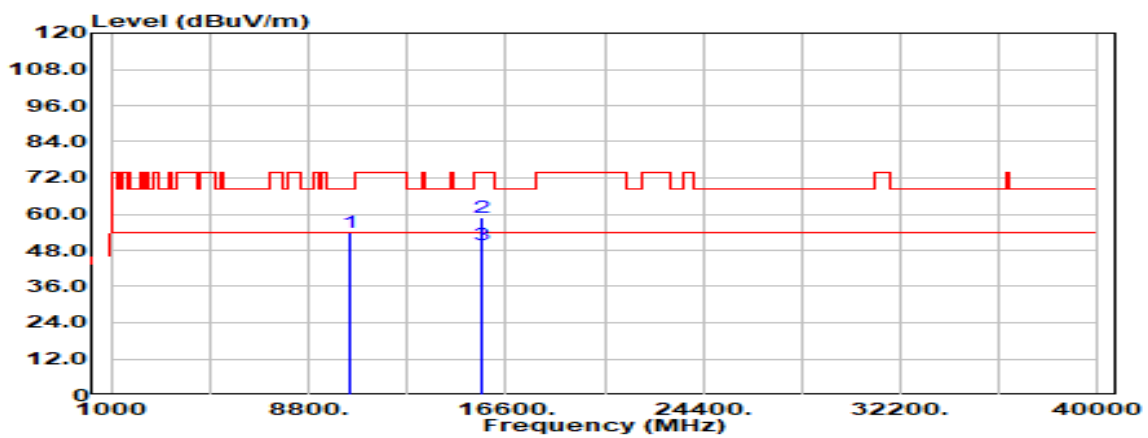


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPV) | Factor<br>(dB) | Actual<br>FS<br>(dBPV/m) | Limit<br>@3m<br>(dBPV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10440.000      | Peak                           | 36.15                               | 17.90          | 54.05                    | 68.20                    | -14.15         |
| 15660.000      | Peak                           | 33.64                               | 25.15          | 58.79                    | 74.00                    | -15.21         |
| 15660.000      | Average                        | 24.52                               | 25.15          | 49.67                    | 54.00                    | -4.33          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5220MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                     | Test Date     | February 26, 2022 |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

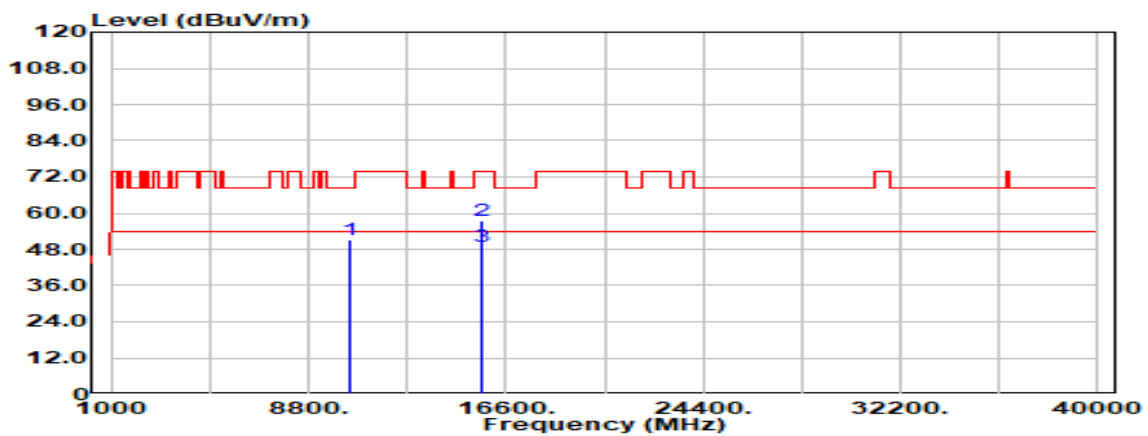


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10440.000      | Peak                           | 33.12                               | 17.90          | 51.02                    | 68.20                    | -17.18         |
| 15660.000      | Peak                           | 32.38                               | 25.15          | 57.53                    | 74.00                    | -16.47         |
| 15660.000      | Average                        | 23.78                               | 25.15          | 48.93                    | 54.00                    | -5.07          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5240MHz | Temp/Hum      | 20.4(°C) / 62%RH  |
| Test Item | Harmonic                     | Test Date     | February 26, 2022 |
| Polarize  | Vertical                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

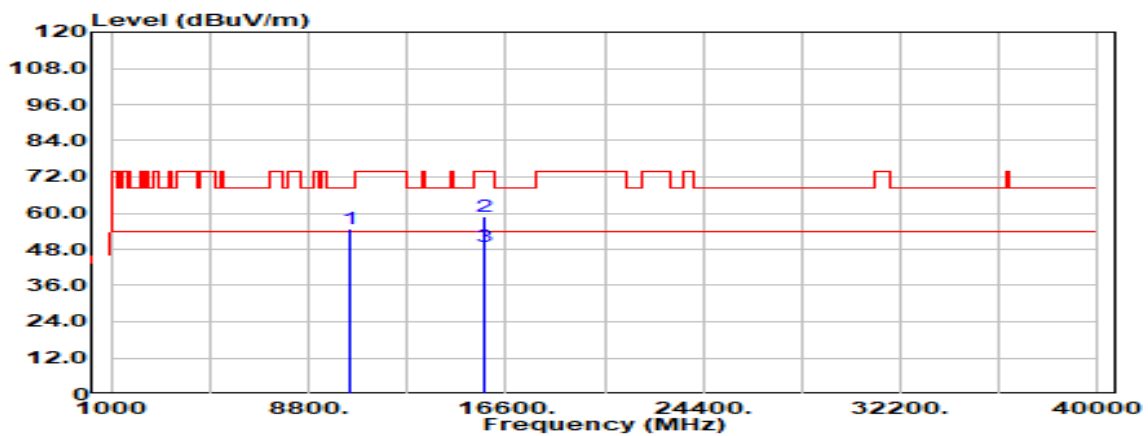


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10480.000      | Peak                           | 36.69                               | 18.05          | 54.74                    | 68.20                    | -13.46         |
| 15720.000      | Peak                           | 33.39                               | 25.55          | 58.94                    | 74.00                    | -15.06         |
| 15720.000      | Average                        | 23.52                               | 25.55          | 49.07                    | 54.00                    | -4.93          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                   |
|-----------|------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ax HE20 / 5240MHz | Temp/Hum      | 20.4(°C)/ 62%RH   |
| Test Item | Harmonic                     | Test Date     | February 26, 2022 |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao         |
| Detector  | Peak & Average               |               |                   |

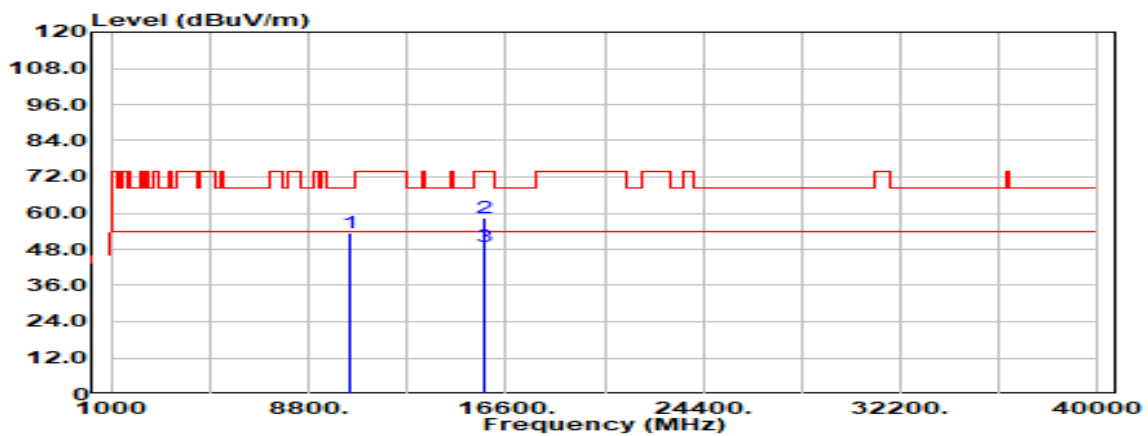


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10480.000      | Peak                           | 35.16                               | 18.05          | 53.21                    | 68.20                    | -14.99         |
| 15720.000      | Peak                           | 32.66                               | 25.55          | 58.21                    | 74.00                    | -15.79         |
| 15720.000      | Average                        | 23.45                               | 25.55          | 49.00                    | 54.00                    | -5.00          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5190MHz | Temp/Hum      | 21.3(°C)/ 59%RH |
| Test Item | Harmonic                     | Test Date     | March 1, 2022   |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

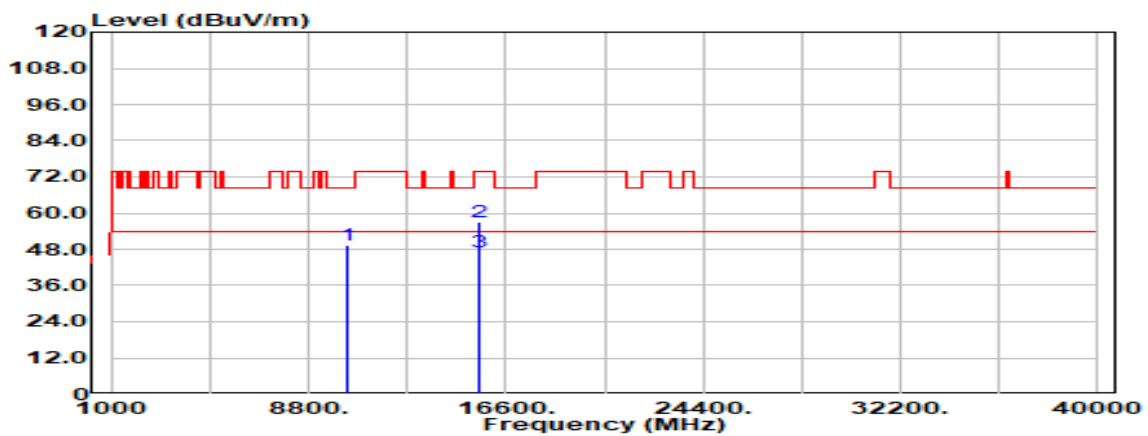


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10380.000      | Peak                           | 31.41                               | 17.76          | 49.17                    | 68.20                    | -19.03         |
| 15570.000      | Peak                           | 32.33                               | 24.85          | 57.19                    | 74.00                    | -16.81         |
| 15570.000      | Average                        | 22.32                               | 24.85          | 47.17                    | 54.00                    | -6.83          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5190MHz | Temp/Hum      | 21.3(°C)/ 59%RH |
| Test Item | Harmonic                     | Test Date     | March 1, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

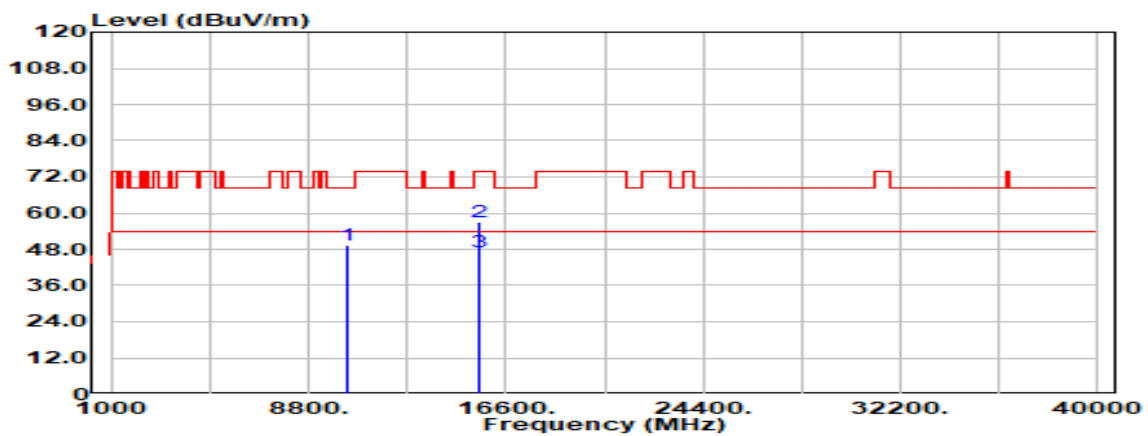


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10380.000      | Peak                           | 31.42                               | 17.76          | 49.18                    | 68.20                    | -19.02         |
| 15570.000      | Peak                           | 32.41                               | 24.85          | 57.27                    | 74.00                    | -16.73         |
| 15570.000      | Average                        | 22.36                               | 24.85          | 47.21                    | 54.00                    | -6.79          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5230MHz | Temp/Hum      | 21.3(°C) / 59%RH |
| Test Item | Harmonic                     | Test Date     | March 1, 2022    |
| Polarize  | Vertical                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

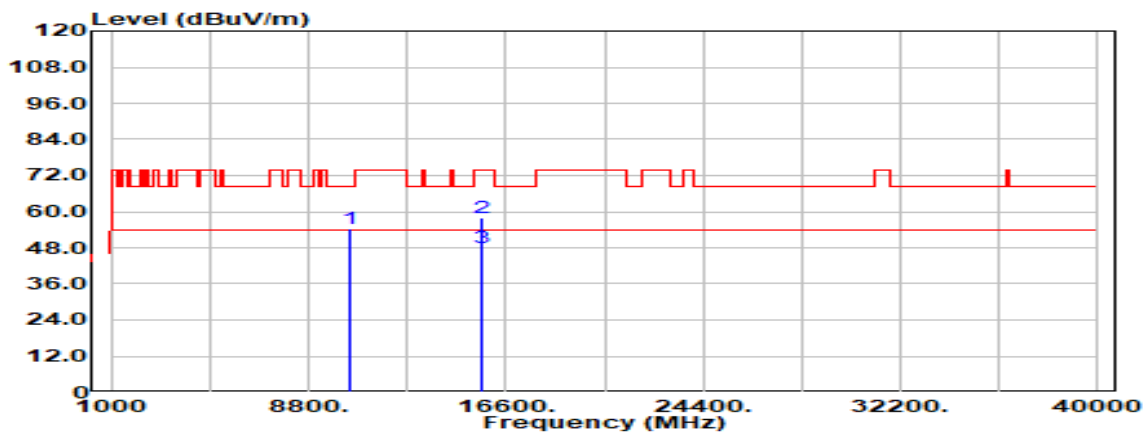


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10460.000      | Peak                           | 36.29                               | 17.97          | 54.26                    | 68.20                    | -13.94         |
| 15690.000      | Peak                           | 32.64                               | 25.38          | 58.02                    | 74.00                    | -15.98         |
| 15690.000      | Average                        | 22.53                               | 25.38          | 47.91                    | 54.00                    | -6.09          |
| N/A            |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5230MHz | Temp/Hum      | 21.3(°C) / 59%RH |
| Test Item | Harmonic                     | Test Date     | March 1, 2022    |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

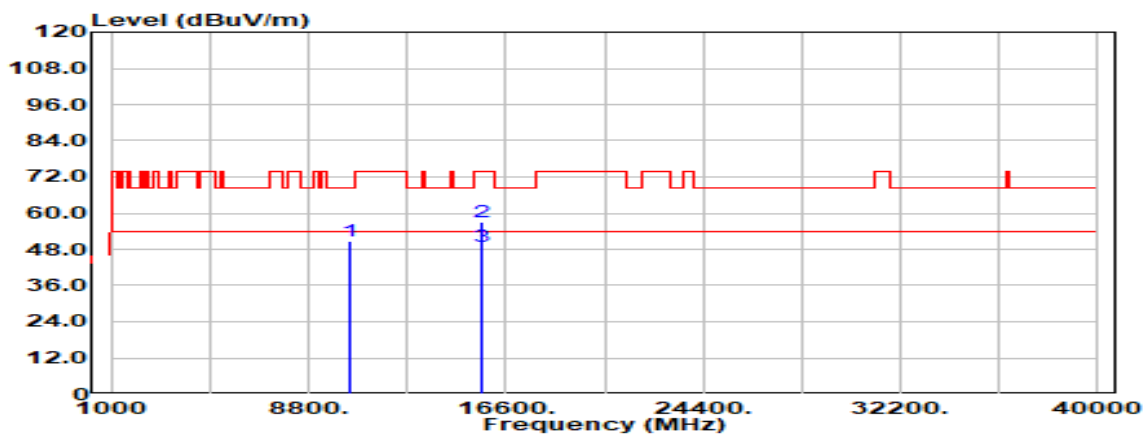


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10460.000      | Peak                           | 32.79                               | 17.97          | 50.76                    | 68.20                    | -17.44         |
| 15690.000      | Peak                           | 31.83                               | 25.38          | 57.21                    | 74.00                    | -16.79         |
| 15690.000      | Average                        | 23.72                               | 25.38          | 49.10                    | 54.00                    | -4.90          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5210MHz | Temp/Hum      | 21.3(°C)/ 59%RH |
| Test Item | Harmonic                     | Test Date     | March 1, 2022   |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

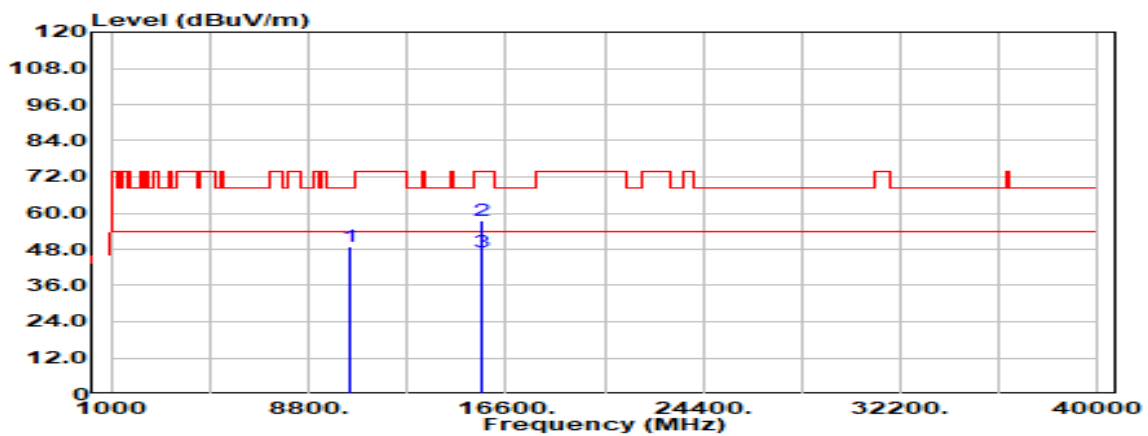


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10420.000      | Peak                           | 31.15                               | 17.85          | 49.00                    | 68.20                    | -19.20         |
| 15630.000      | Peak                           | 32.42                               | 25.00          | 57.42                    | 74.00                    | -16.58         |
| 15630.000      | Average                        | 22.20                               | 25.00          | 47.20                    | 54.00                    | -6.80          |
| N/A            |                                |                                     |                |                          |                          |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5210MHz | Temp/Hum      | 21.3(°C)/ 59%RH |
| Test Item | Harmonic                     | Test Date     | March 1, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

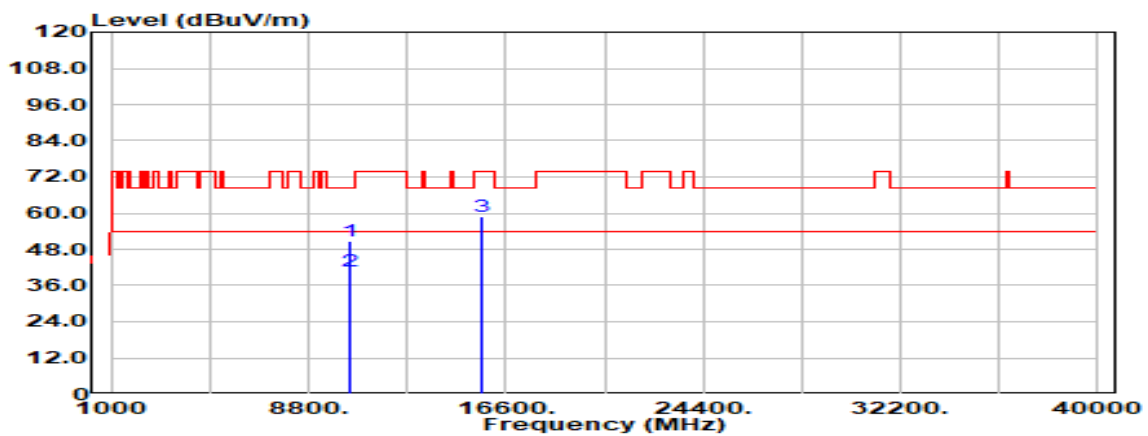


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10420.000      | Peak                           | 32.78                               | 17.85          | 50.64                    | 68.20                    | -17.56         |
| 10420.000      | Average                        | 22.93                               | 17.85          | 40.78                    | 54.00                    | -13.22         |
| 15630.000      | Peak                           | 33.68                               | 25.00          | 58.68                    | 74.00                    | -15.32         |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

### Test Data for UNII-2a

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5260 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                | Test Date     | February 25, 2022 |
| Polarize  | Vertical                | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

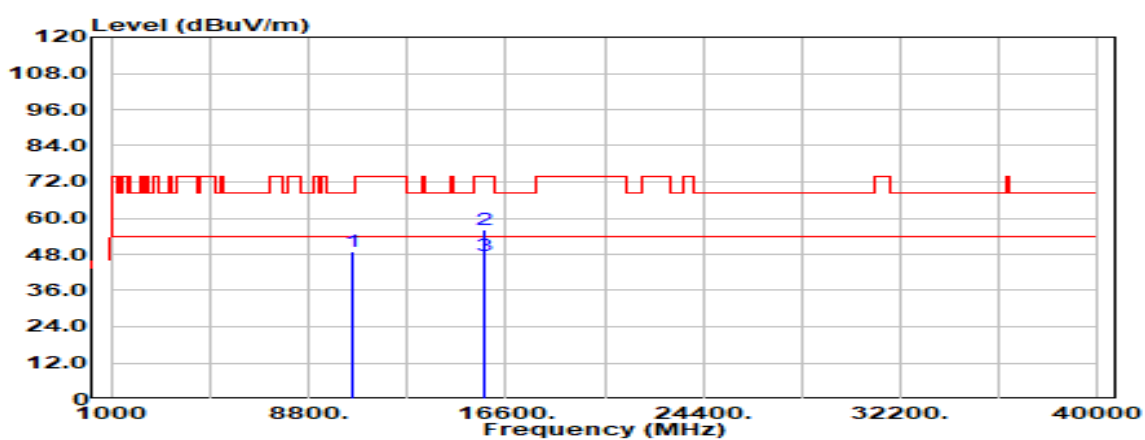


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10520.000      | Peak                           | 30.84                               | 18.16          | 49.00                    | 68.20                    | -19.20         |
| 15780.000      | Peak                           | 30.52                               | 25.80          | 56.32                    | 74.00                    | -17.68         |
| 15780.000      | Average                        | 21.58                               | 25.80          | 47.38                    | 54.00                    | -6.62          |
| N/A            |                                |                                     |                |                          |                          |                |

### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5260 MHz | Temp/Hum      | 19.6(°C) / 67%RH  |
| Test Item | Harmonic                | Test Date     | February 25, 2022 |
| Polarize  | Horizontal              | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

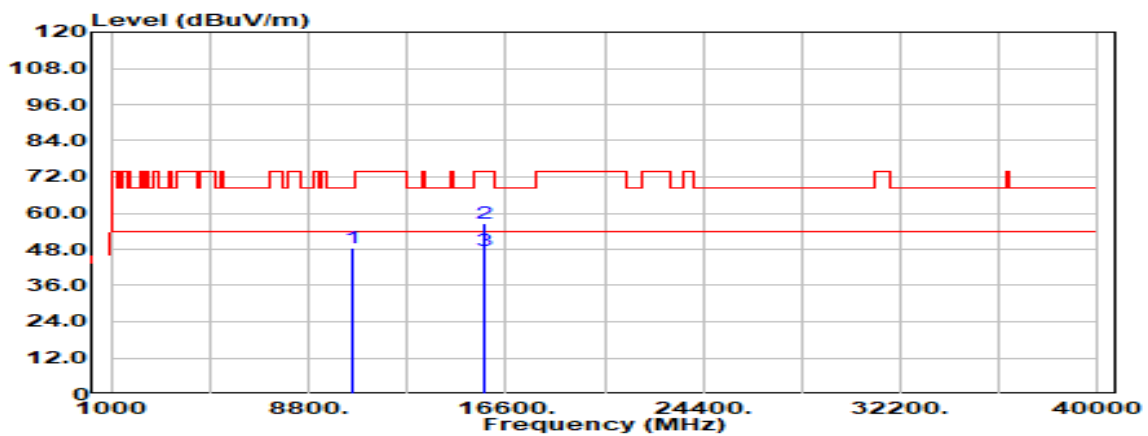


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10520.000      | Peak                           | 30.37                               | 18.16          | 48.53                    | 68.20                    | -19.67         |
| 15780.000      | Peak                           | 30.82                               | 25.80          | 56.63                    | 74.00                    | -17.37         |
| 15780.000      | Average                        | 21.80                               | 25.80          | 47.60                    | 54.00                    | -6.40          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5300 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonics               | Test Date     | February 25, 2022 |
| Polarize  | Vertical                | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

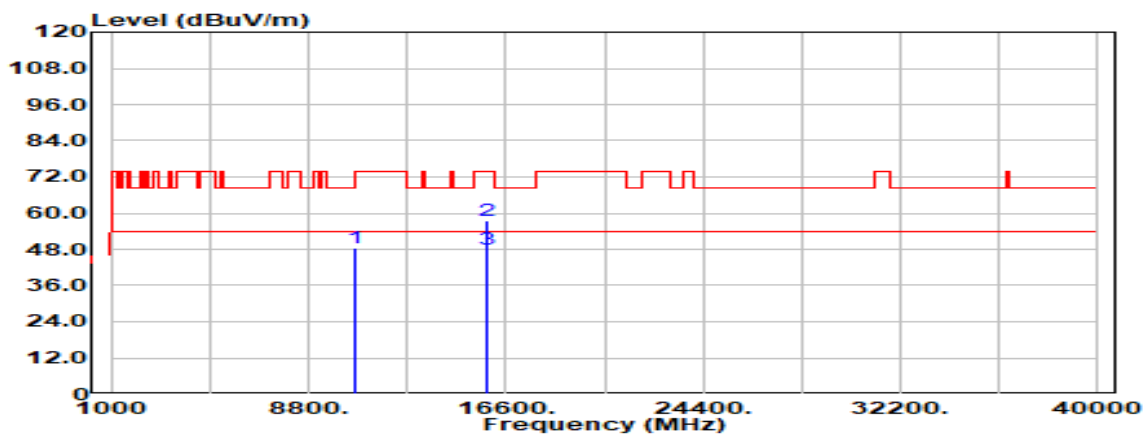


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10600.000      | Peak                           | 30.20                               | 18.20          | 48.40                    | 68.20                    | -19.80         |
| 15900.000      | Peak                           | 30.92                               | 26.46          | 57.38                    | 74.00                    | -16.62         |
| 15900.000      | Average                        | 21.65                               | 26.46          | 48.11                    | 54.00                    | -5.89          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5300 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                | Test Date     | February 25, 2022 |
| Polarize  | Horizontal              | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

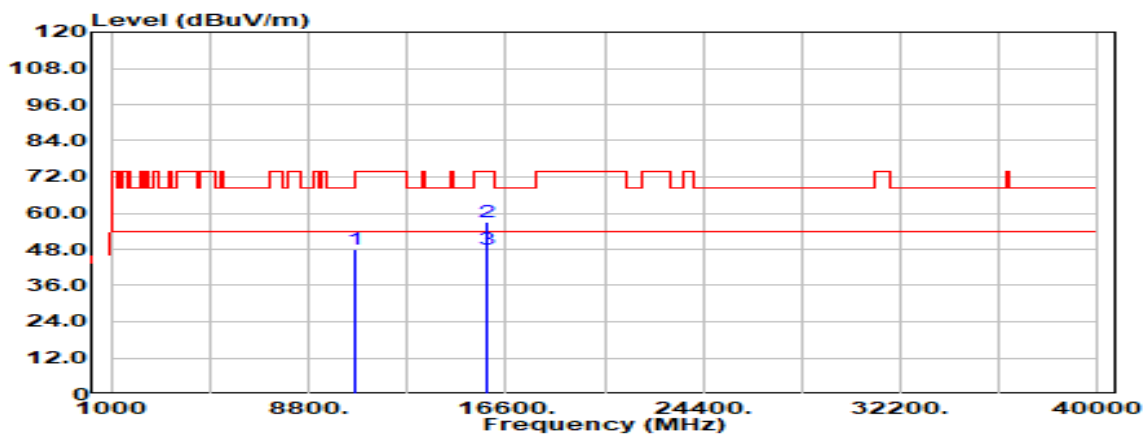


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10600.000      | Peak                           | 29.64                               | 18.20          | 47.84                    | 68.20                    | -20.36         |
| 15900.000      | Peak                           | 30.62                               | 26.46          | 57.08                    | 74.00                    | -16.92         |
| 15900.000      | Average                        | 21.62                               | 26.46          | 48.08                    | 54.00                    | -5.92          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5320 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                | Test Date     | February 25, 2022 |
| Polarize  | Vertical                | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

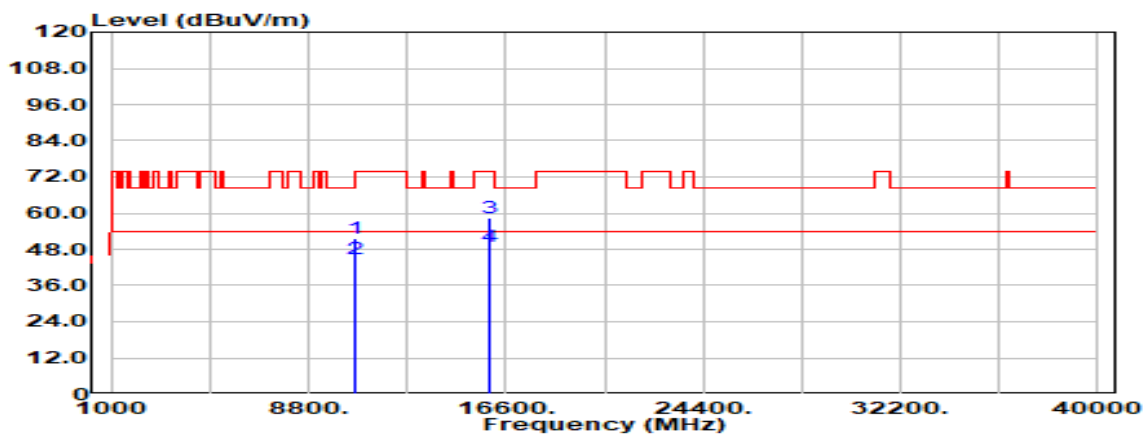


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10640.000      | Peak                           | 33.20                               | 18.37          | 51.57                    | 74.00                    | -22.43         |
| 10640.000      | Average                        | 26.53                               | 18.37          | 44.90                    | 54.00                    | -9.10          |
| 15960.000      | Peak                           | 31.47                               | 26.84          | 58.32                    | 74.00                    | -15.68         |
| 15960.000      | Average                        | 22.07                               | 26.84          | 48.91                    | 54.00                    | -5.09          |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

|           |                         |               |                   |
|-----------|-------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11a / 5320 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                | Test Date     | February 25, 2022 |
| Polarize  | Horizontal              | Test Engineer | Tony Chao         |
| Detector  | Peak & Average          |               |                   |

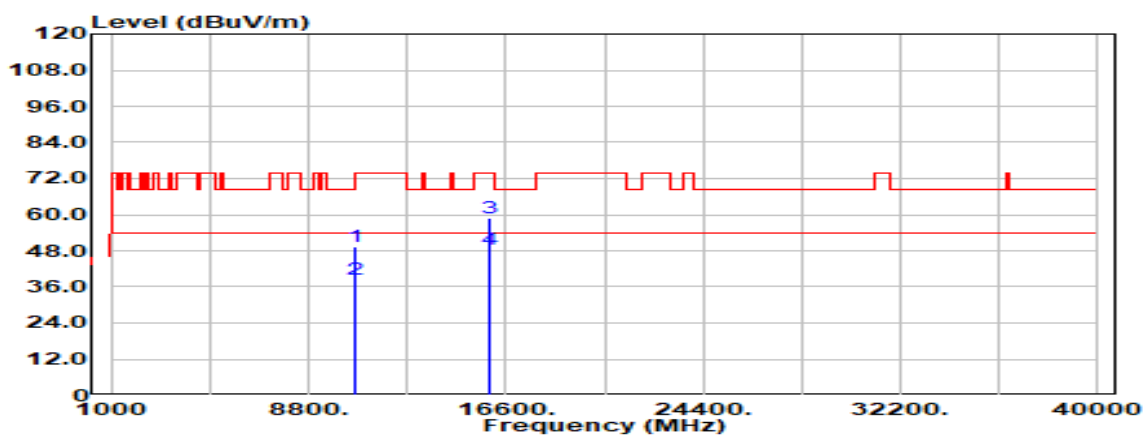


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10640.000      | Peak                           | 31.02                               | 18.37          | 49.39                    | 74.00                    | -24.61         |
| 10640.000      | Average                        | 19.96                               | 18.37          | 38.33                    | 54.00                    | -15.67         |
| 15960.000      | Peak                           | 32.16                               | 26.84          | 59.00                    | 74.00                    | -15.00         |
| 15960.000      | Average                        | 21.62                               | 26.84          | 48.46                    | 54.00                    | -5.54          |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5260 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                       | Test Date     | February 25, 2022 |
| Polarize  | Vertical                       | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

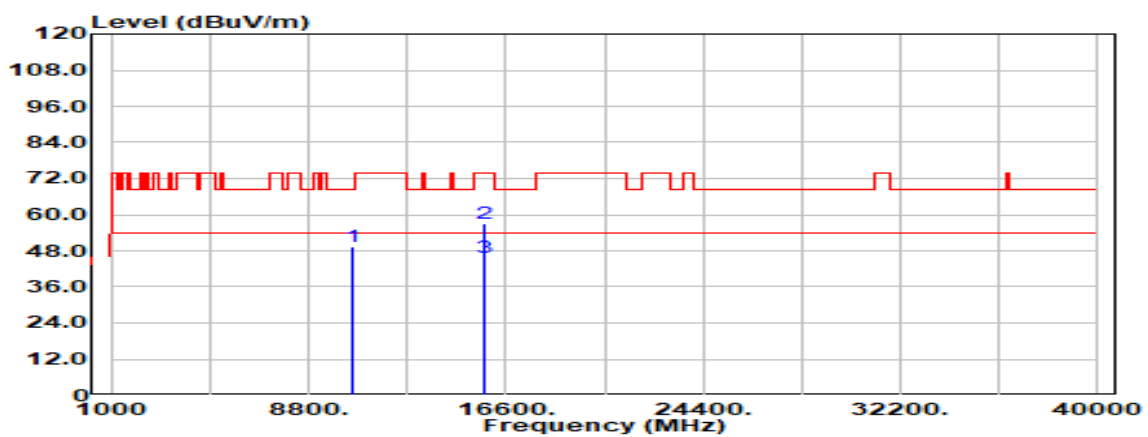


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10520.000      | Peak                           | 31.10                               | 18.16          | 49.26                    | 68.20                    | -18.94         |
| 15780.000      | Peak                           | 31.35                               | 25.80          | 57.15                    | 74.00                    | -16.85         |
| 15780.000      | Average                        | 19.96                               | 25.80          | 45.76                    | 54.00                    | -8.24          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                |               |                   |
|-----------|--------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5260 MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                       | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                 |               |                   |

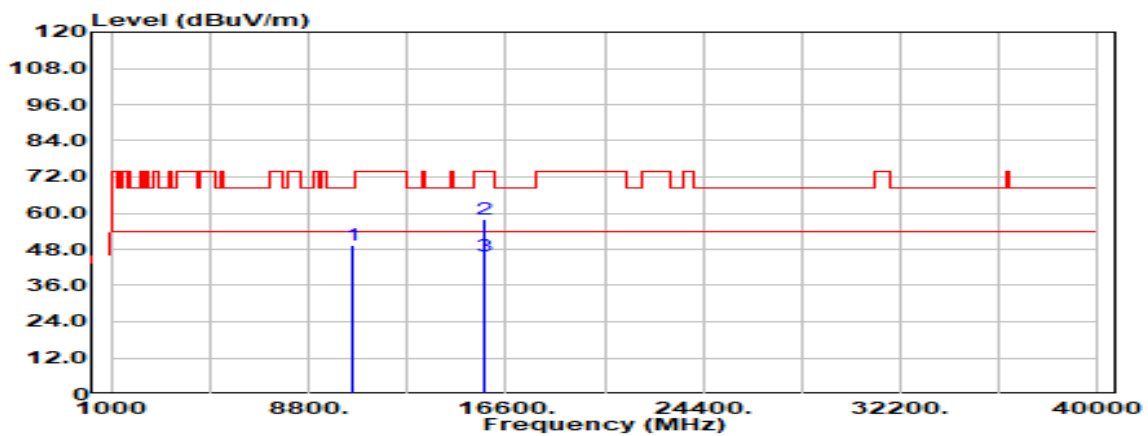


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10520.000      | Peak                           | 31.16                               | 18.16          | 49.32                    | 68.20                    | -18.88         |
| 15780.000      | Peak                           | 32.03                               | 25.80          | 57.83                    | 74.00                    | -16.17         |
| 15780.000      | Average                        | 20.15                               | 25.80          | 45.95                    | 54.00                    | -8.05          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5300MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Vertical                      | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

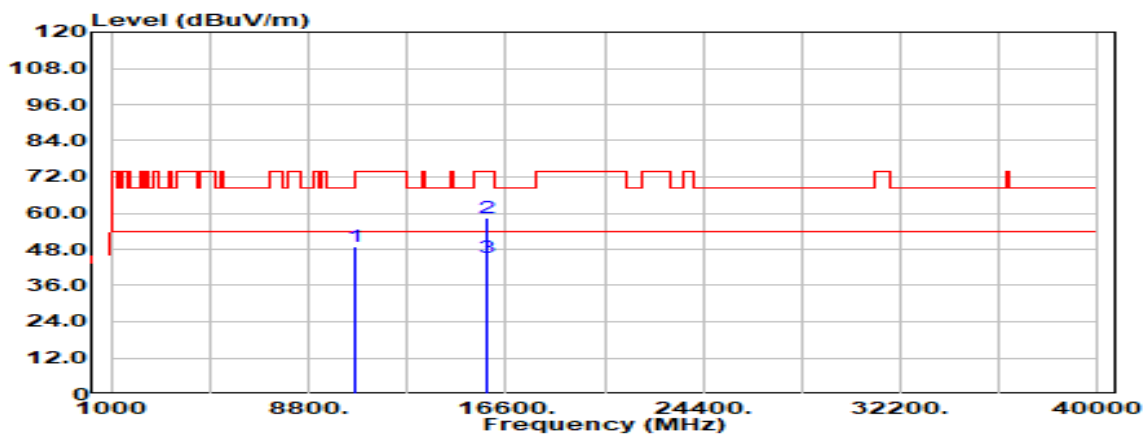


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10600.000      | Peak                           | 30.62                               | 18.20          | 48.82                    | 68.20                    | -19.38         |
| 15900.000      | Peak                           | 31.78                               | 26.46          | 58.24                    | 74.00                    | -15.76         |
| 15900.000      | Average                        | 18.89                               | 26.46          | 45.35                    | 54.00                    | -8.65          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                               |               |                   |
|-----------|-------------------------------|---------------|-------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5300MHz | Temp/Hum      | 19.6(°C)/ 67%RH   |
| Test Item | Harmonic                      | Test Date     | February 25, 2022 |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao         |
| Detector  | Peak & Average                |               |                   |

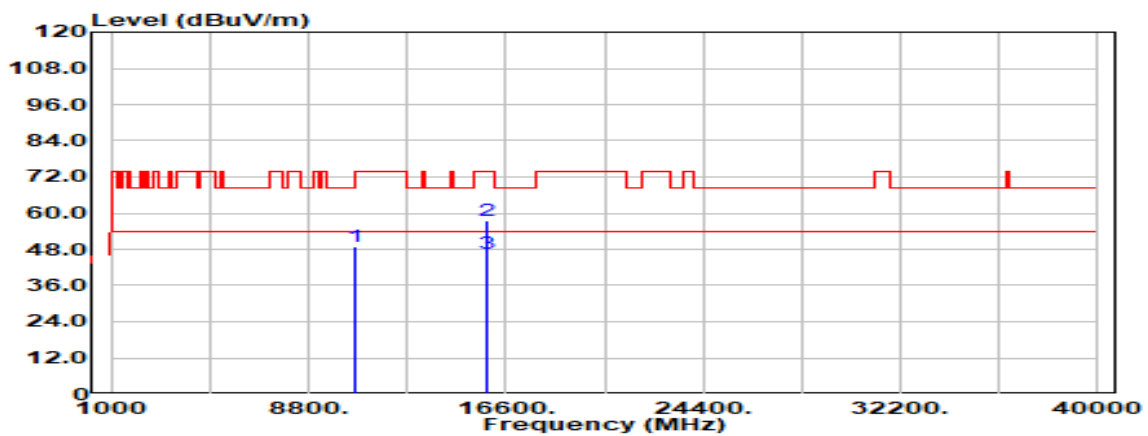

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPV) | Factor<br>(dB) | Actual<br>FS<br>(dBPV/m) | Limit<br>@3m<br>(dBPV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 10600.000      | Peak                           | 30.73                               | 18.20          | 48.93                    | 68.20                    | -19.27         |
| 15900.000      | Peak                           | 30.84                               | 26.46          | 57.30                    | 74.00                    | -16.70         |
| 15900.000      | Average                        | 20.14                               | 26.46          | 46.60                    | 54.00                    | -7.40          |
| N/A            |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.